



**FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT**

**FOR**

**PicoVA with Nightlight**

**MODEL NUMBER: PJ-3BRL**

**FCC ID: JPZ0075  
IC: 2851A-JPZ0075**

**REPORT NUMBER: 10060977**

**ISSUE DATE: 2013-10-16**

*Prepared for*  
**LUTRON ELECTRONICS INC.  
7200 SUTER RD.  
COOPERBURG PA, 18036, USA**

*Prepared by*  
**UL LLC  
1285 WALT WHITMAN RD.  
MELVILLE, NY 11747, U.S.A.  
TEL: (631) 271-6200  
FAX: (877) 854-3577**



**NVLAP LAB CODE 100255-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	2013-10-16	Initial Issue	B. DeLisi

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>4</b>
<b>2. TEST METHODOLOGY</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
<b>5. EQUIPMENT UNDER TEST</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.3. <i>SOFTWARE AND FIRMWARE</i>	6
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	6
5.5. <i>MODIFICATIONS</i>	6
5.6. <i>DESCRIPTION OF TEST SETUP</i>	7
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>9</b>
6.1. <i>DUTY CYCLE</i>	12
<b>7. RADIATED EMISSION TEST RESULTS</b>	<b>10</b>
7.1. <i>TX RADIATED SPURIOUS EMISSION</i>	10
<b>8. SETUP PHOTOS</b>	<b>17</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Lutron Electronics Inc.  
7200 Suter Rd.  
Cooperburg PA, 18036, USA

**EUT DESCRIPTION:** PicoVA with Nightlight

**MODEL:** PJ-3BRL

**SERIAL NUMBER:** Non-Serialized production unit

**DATE TESTED:** 2013-10-08 through 2013-10-15


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 1	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation, as described by the referenced documents. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL By:

Tested By:



---

Michael Antola  
WiSE Lead Engineer  
UL LLC

---

Bob DeLisi  
WiSE Principal Engineer  
UL LLC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 1285 Walt Whitman Rd. Melville, NY 11747, USA.

UL Melville is accredited by NVLAP, Laboratory Code 100255-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/1002550.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.3 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.00 dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a remote control intended for lighting applications.

This report covers a Class 2 permissive change. The product circuit board was modified to allow the night light feature to be included.

There is a typographical error in the model number. PJN-3BRL should have been listed as PJ-3BRL

### **5.2. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an PCB trace antenna.

### **5.3. SOFTWARE AND FIRMWARE**

Normal Operation Unit: 434\_VA\_PICO\_1\_15.nbf  
FCC test Unit Code Revision: FCC\_RC2.nbf

### **5.4. WORST-CASE CONFIGURATION AND MODE**

Testing for radiated emissions was conducted at the lowest and highest channel. Preliminary testing was conducted to determine with worst case orientation. The Y-Axis was determined to be the worst case configuration. All testing was conducted with the EUT in the Y-axis.

### **5.5. MODIFICATIONS**

No modifications were made during testing.

## **5.6. DESCRIPTION OF TEST SETUP**

### **SUPPORT EQUIPMENT**

NA – Device is standalone


### **I/O CABLES**

NA – Device does not contain I/O lines.

### **TEST SETUP**

The EUT was tested as a stand-alone device. Test software exercised the radio.

**SETUP DIAGRAM FOR TESTS**

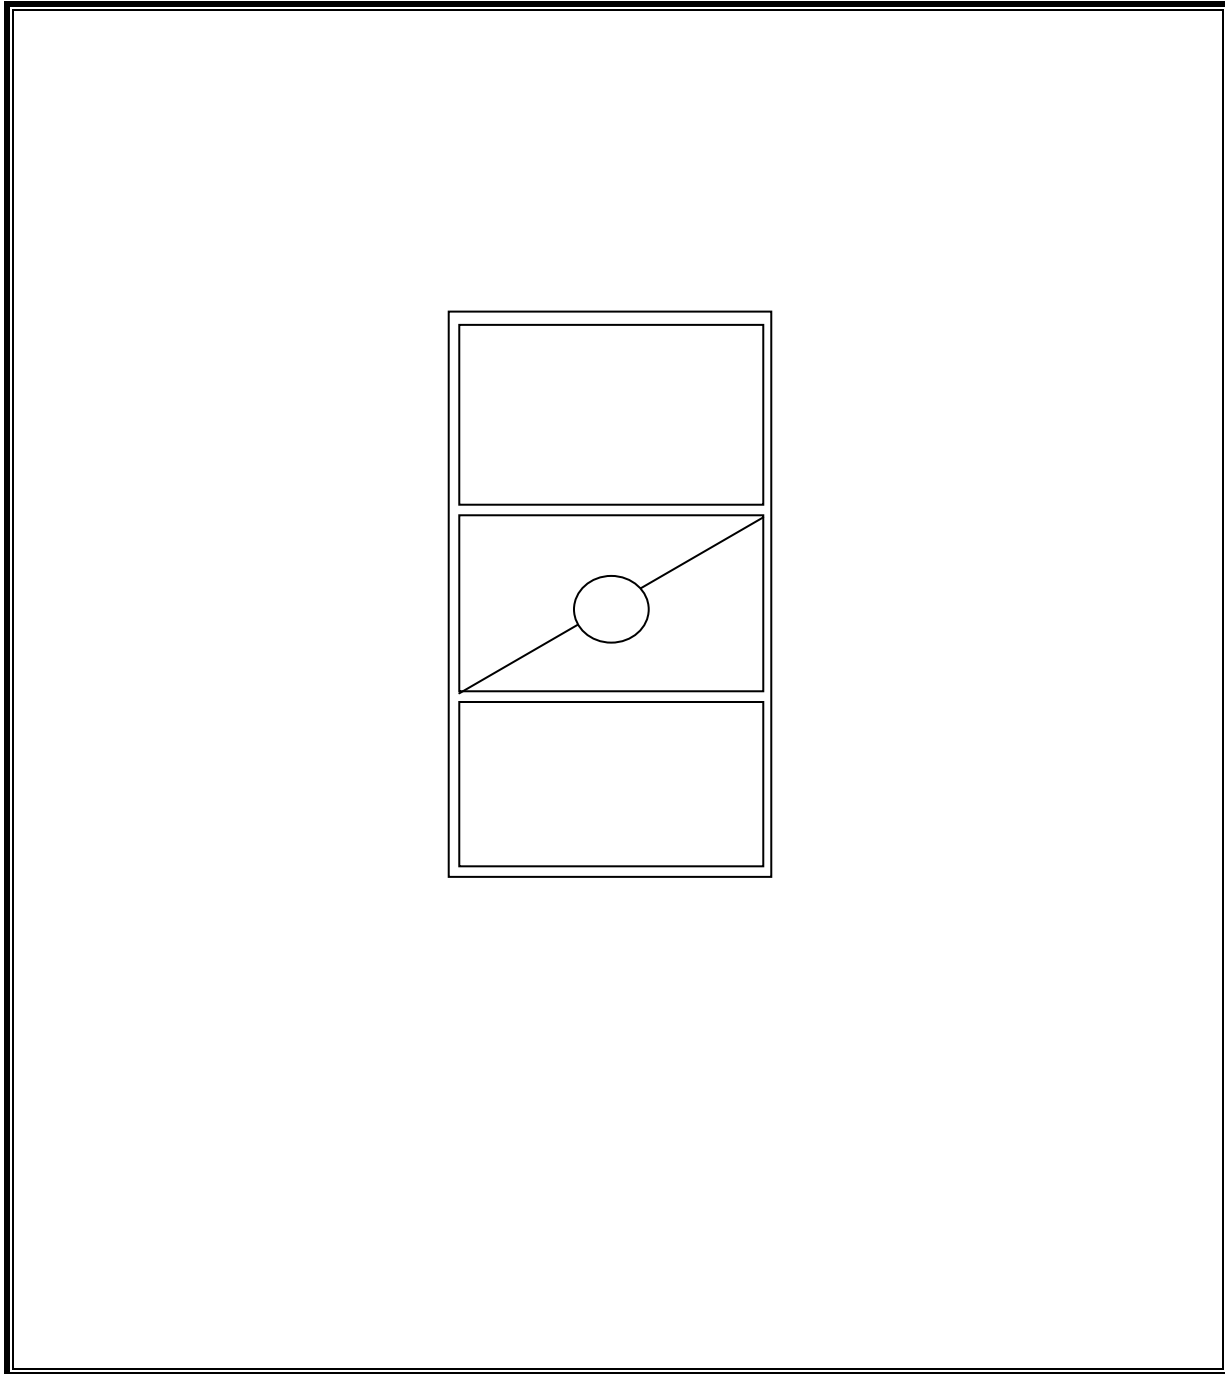



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Radiated Emissions					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
30-1000MHz					
EMI Receiver	Rohde & Schwarz	ESCI7	75141	2013-01-30	2014-01-31
Bicon Antenna	Schaffner	VBA6106A	54	2013-04-03	2014-04-03
Log-P Antenna	Schaffner	UPA6109	44067	2013-07-09	2014-07-09
Switch Driver	HP	11713A	ME7A-627	N/A	N/A
System Controller	Sunol Sciences	SC99V	44396	N/A	N/A
Camera Controller	Panasonic	WV-CU254	44395	N/A	N/A
RF Switch Box	UL	1	44398	N/A	N/A
Measurement Software	UL	Version 9.5	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2012-12-22	2014-12-22
Above 1GHz (Band Optimized System)					
Spectrum Analyzer	Agilent	E4446A	72822	2013-01-30	2014-01-31
Horn Antenna (1-2 GHz)	ETS	3161-01 (26°)**	51442	2008-03-28	See * below
Horn Antenna (2-4 GHz)	ETS	3161-02 (22°)**	48107	2007-09-27	See * below
Horn Antenna (4-8 GHz)	ETS	3161-03 (22°)**	48106	2007-09-27	See * below
Signal Path Controller	HP	11713A	50250	N/A	N/A
Gain Controller	HP	11713A	50251	N/A	N/A
RF Switch / Preamp Fixture	UL	BOMS1	50249	N/A	N/A
System Controller	UL	BOMS2	50252	N/A	N/A
Measurement Software	UL	Version 9.5	44740	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2012-12-22	2014-12-22
<p>* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration.</p> <p>Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than <math>2D^2/\lambda</math>. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances.</p> <p>** - Number in parentheses denotes antenna beam width.</p>					

## 7. RADIATED EMISSION TEST RESULTS

### 7.1. TX RADIATED SPURIOUS EMISSION

#### LIMITS

FCC §15.231 (b)

IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 <sup>1</sup>	125 to 375 <sup>1</sup>
174 - 260	3,750	375
260 - 470	3,750 to 12,500 <sup>1</sup>	375 to 1,250 <sup>1</sup>
Above 470	12,500	1,250

<sup>1</sup> Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.  
2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30 88	100 **	3
88 216	150 **	3
216 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


## **RESULTS**

No non-compliance noted.

## **DUTY CYCLE**

Note: The duty cycle data in this section is taken from the original UL report # 1001299939 as this part of the device has not changed from the original design.


**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz) – Low Channel**

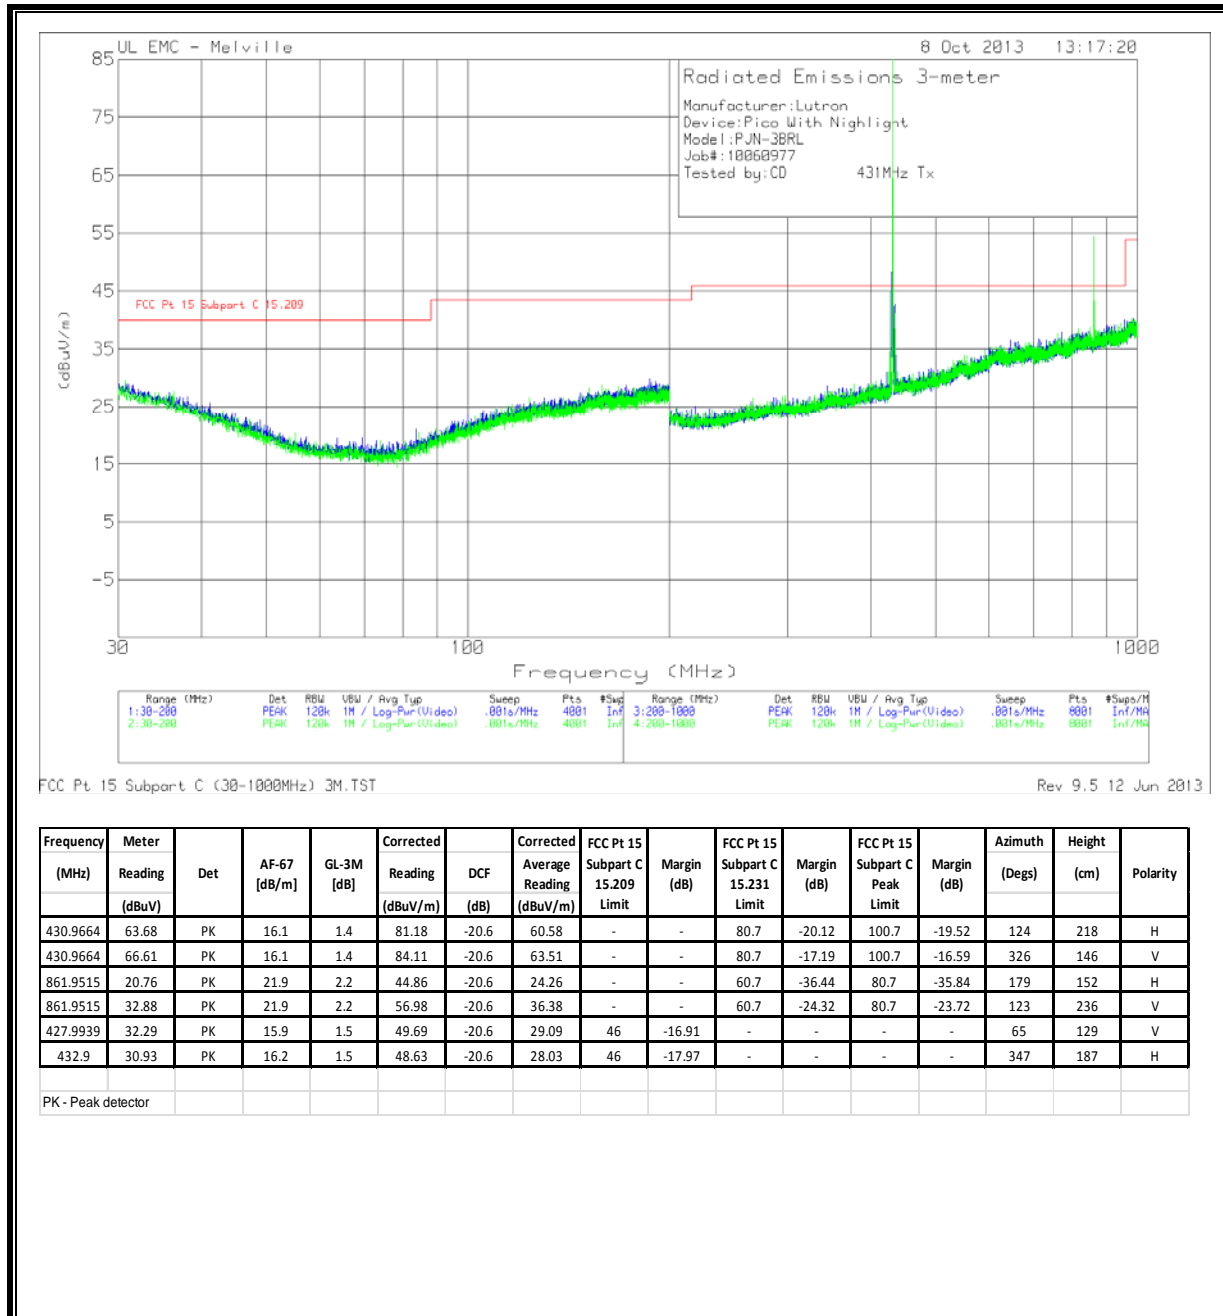


Frequency (MHz)	Meter Reading (dBuV)	Det	AF-67 [dB/m]	GL-3M [dB]	Corrected Reading (dBuV/m)	DCF (dB)	Average Reading (dBuV/m)	FCC Pt 15 Subpart C 15.209 Limit	Margin (dB)	FCC Pt 15 Subpart C 15.231 Limit	Margin (dB)	FCC Pt 15 Subpart C Peak Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
430.9664	63.68	PK	16.1	1.4	81.18	-20.6	60.58	-	-	80.7	-20.12	100.7	-19.52	124	218	H
430.9664	66.61	PK	16.1	1.4	84.11	-20.6	63.51	-	-	80.7	-17.19	100.7	-16.59	326	146	V
861.9515	20.76	PK	21.9	2.2	44.86	-20.6	24.26	-	-	60.7	-36.44	80.7	-35.84	179	152	H
861.9515	32.88	PK	21.9	2.2	56.98	-20.6	36.38	-	-	60.7	-24.32	80.7	-23.72	123	236	V
427.9939	32.29	PK	15.9	1.5	49.69	-20.6	29.09	46	-16.91	-	-	-	-	65	129	V
432.9	30.93	PK	16.2	1.5	48.63	-20.6	28.03	46	-17.97	-	-	-	-	347	187	H

PK - Peak detector


**FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz) – High Channel**

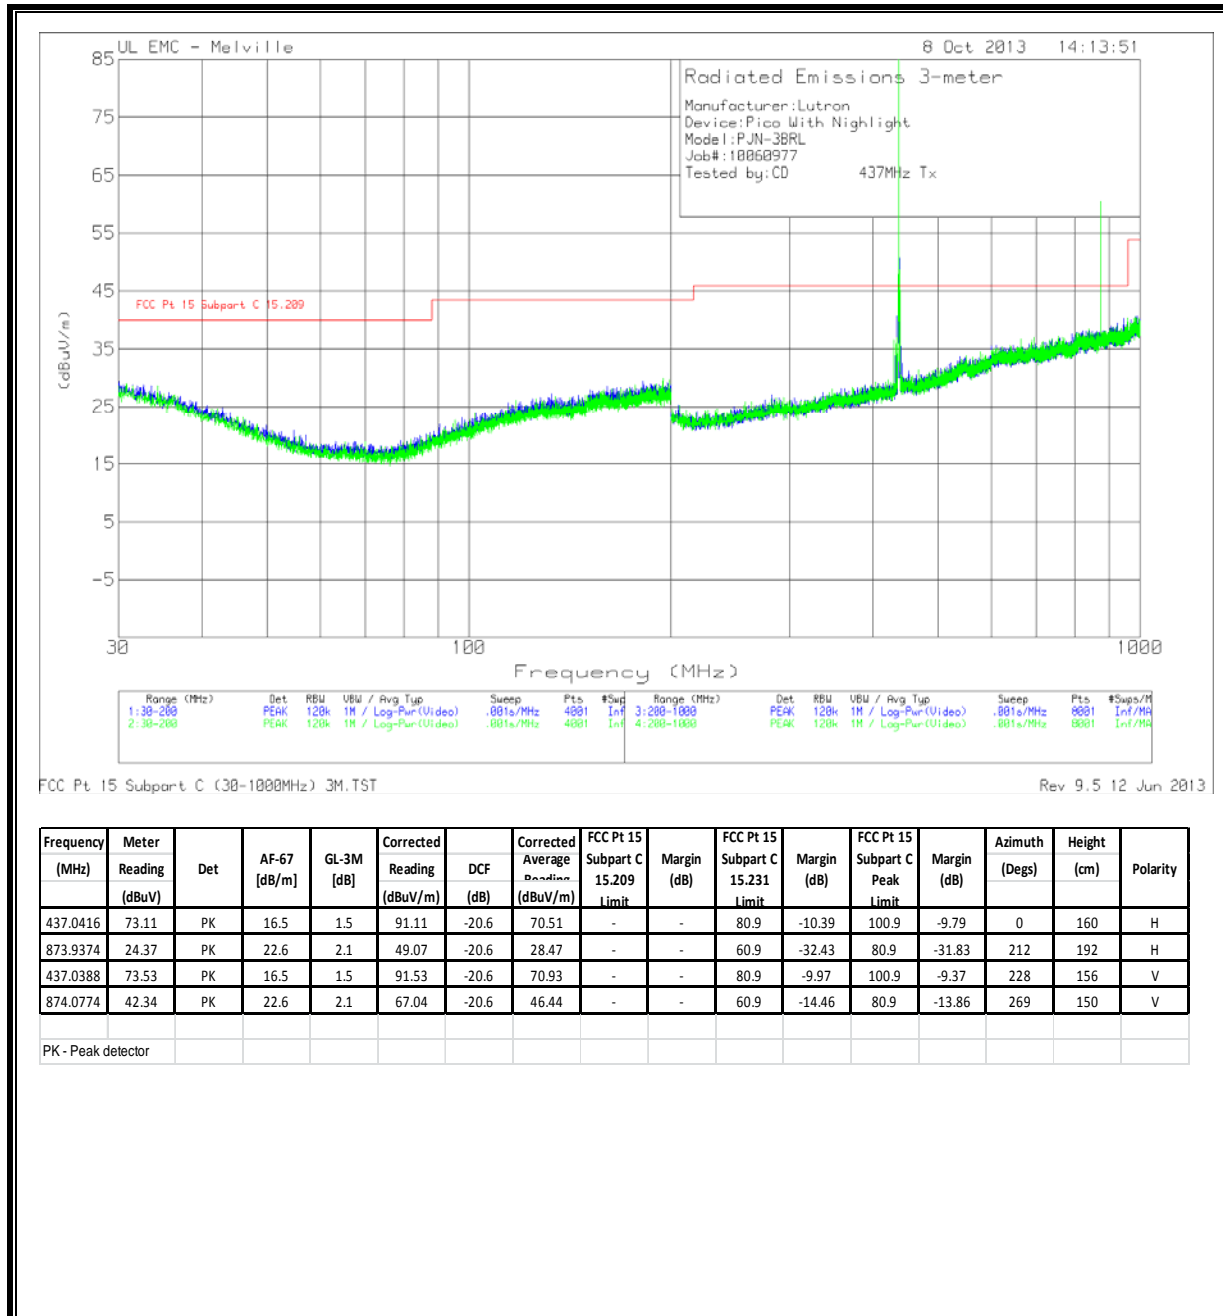

**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz – Low Channel**

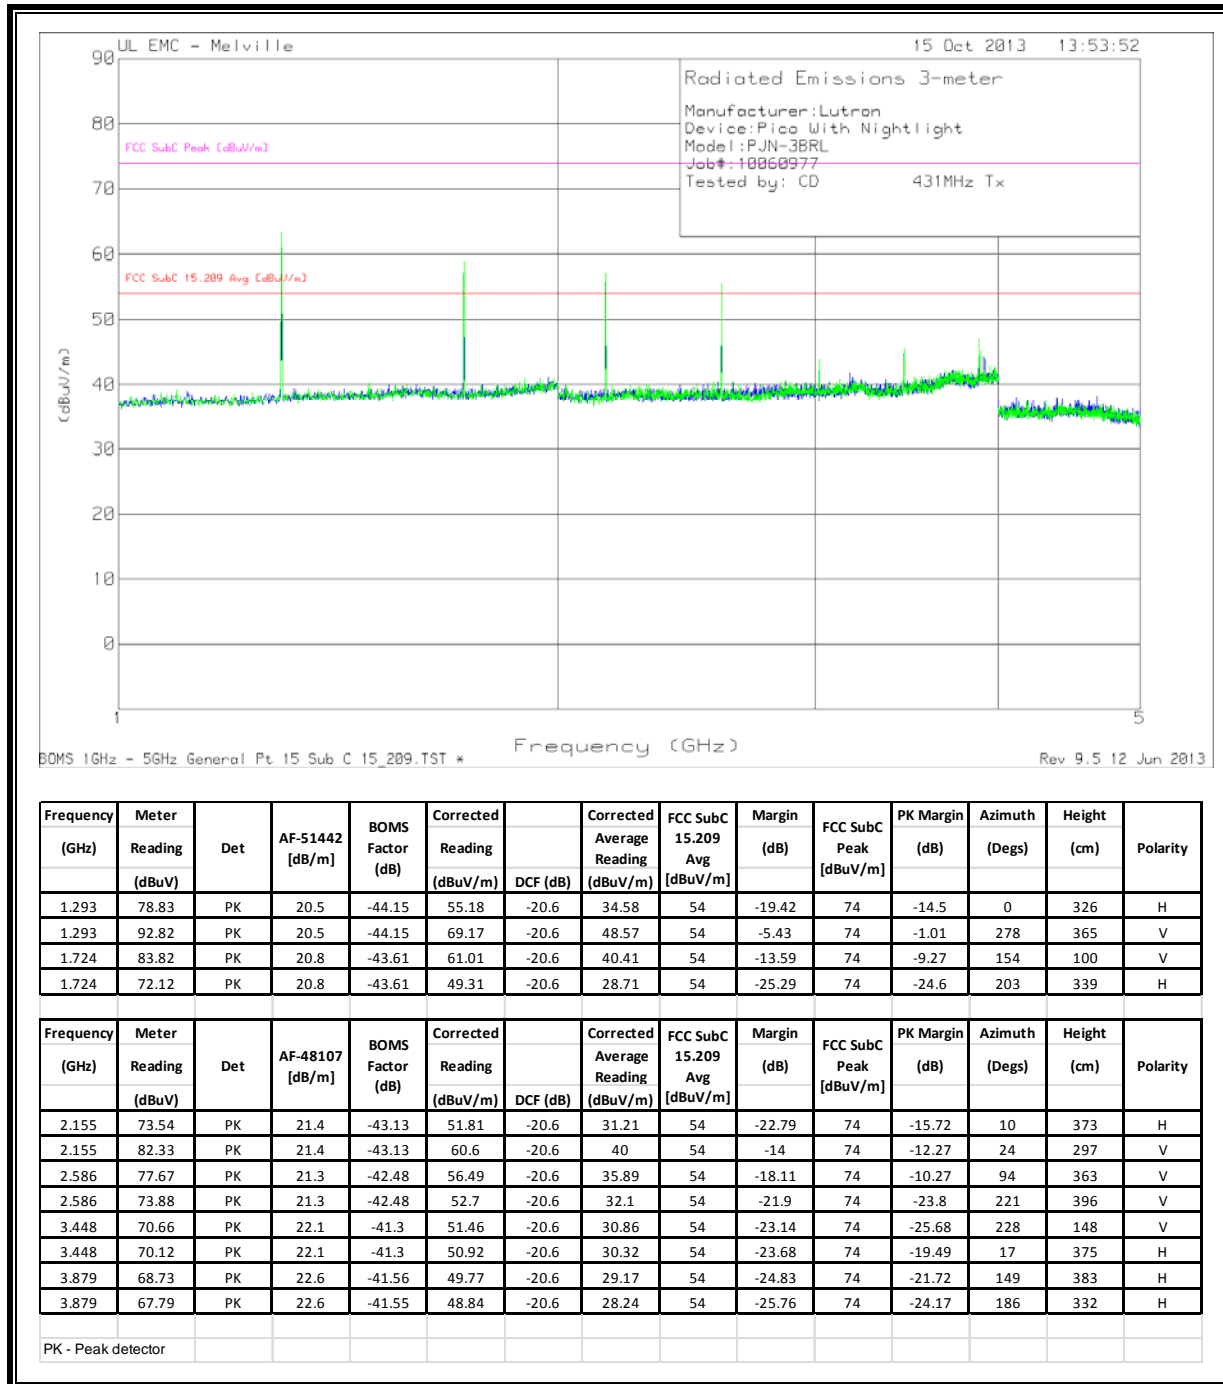

**HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz – High Channel**

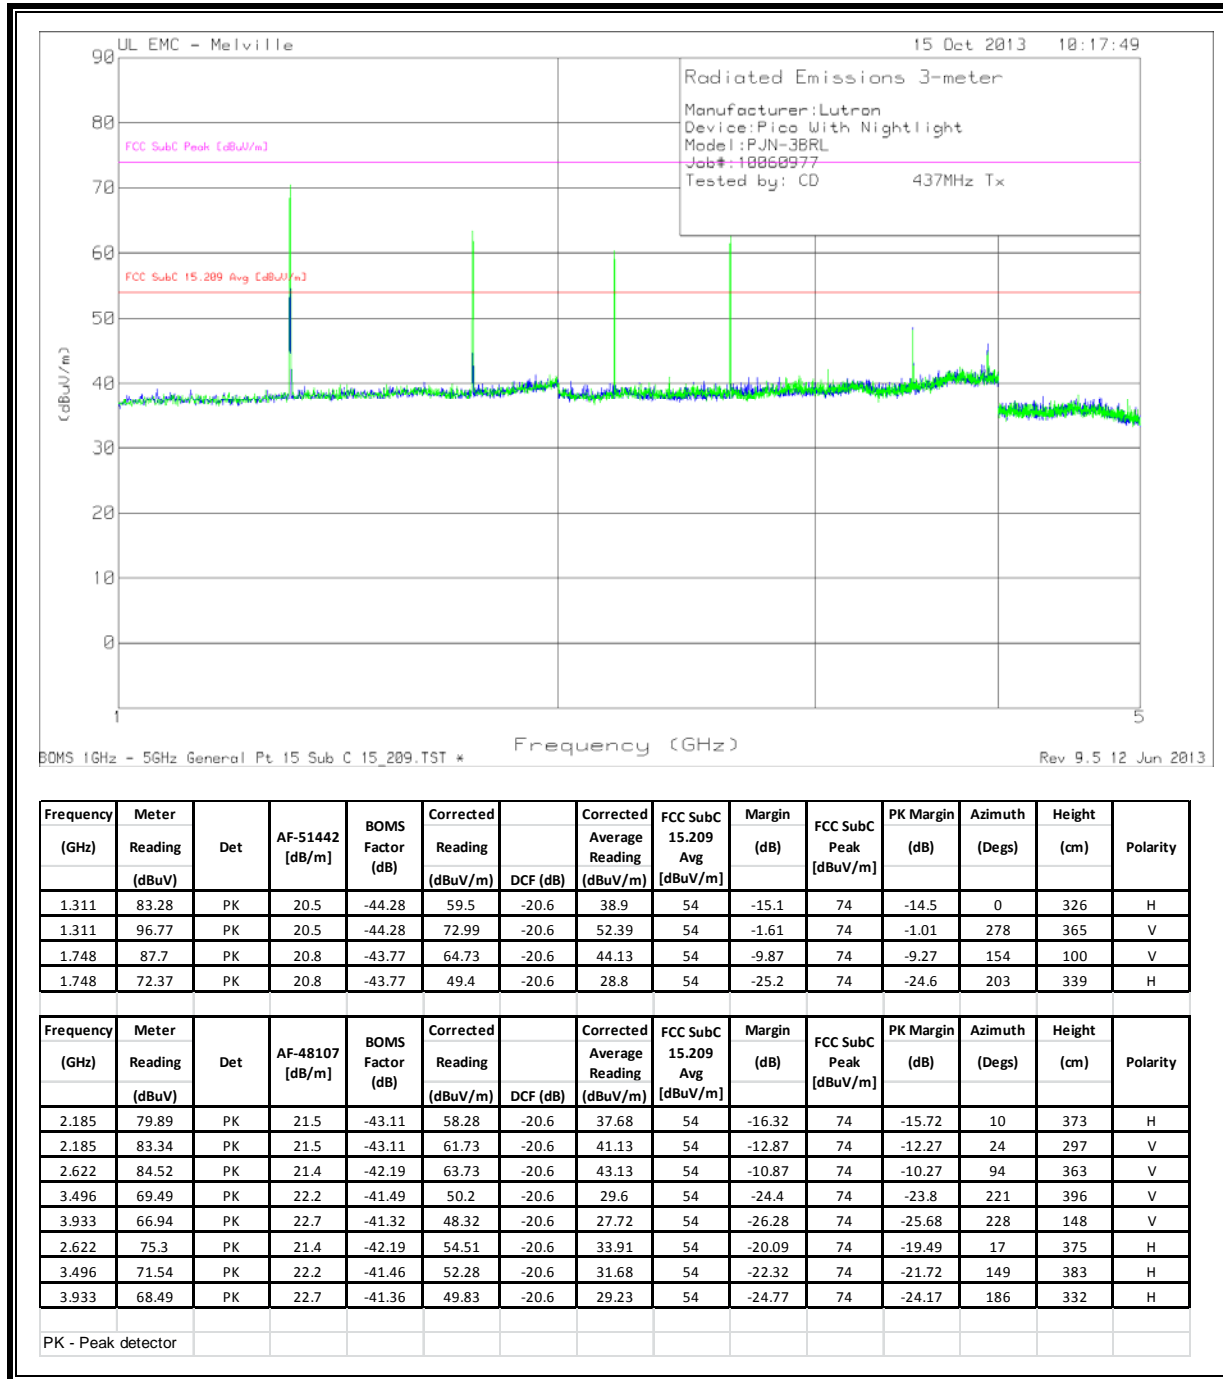



## 8. SETUP PHOTOS

### RADIATED EMISSION FOR PORTABLE CONFIGURATION – X ORIENTATION




**RADIATED EMISSION FOR PORTABLE CONFIGURATION – Y ORIENTATION**




**RADIATED EMISSION FOR PORTABLE CONFIGURATION – Z ORIENTATION**



**RADIATED EMISSION ABOVE 30 MHz**

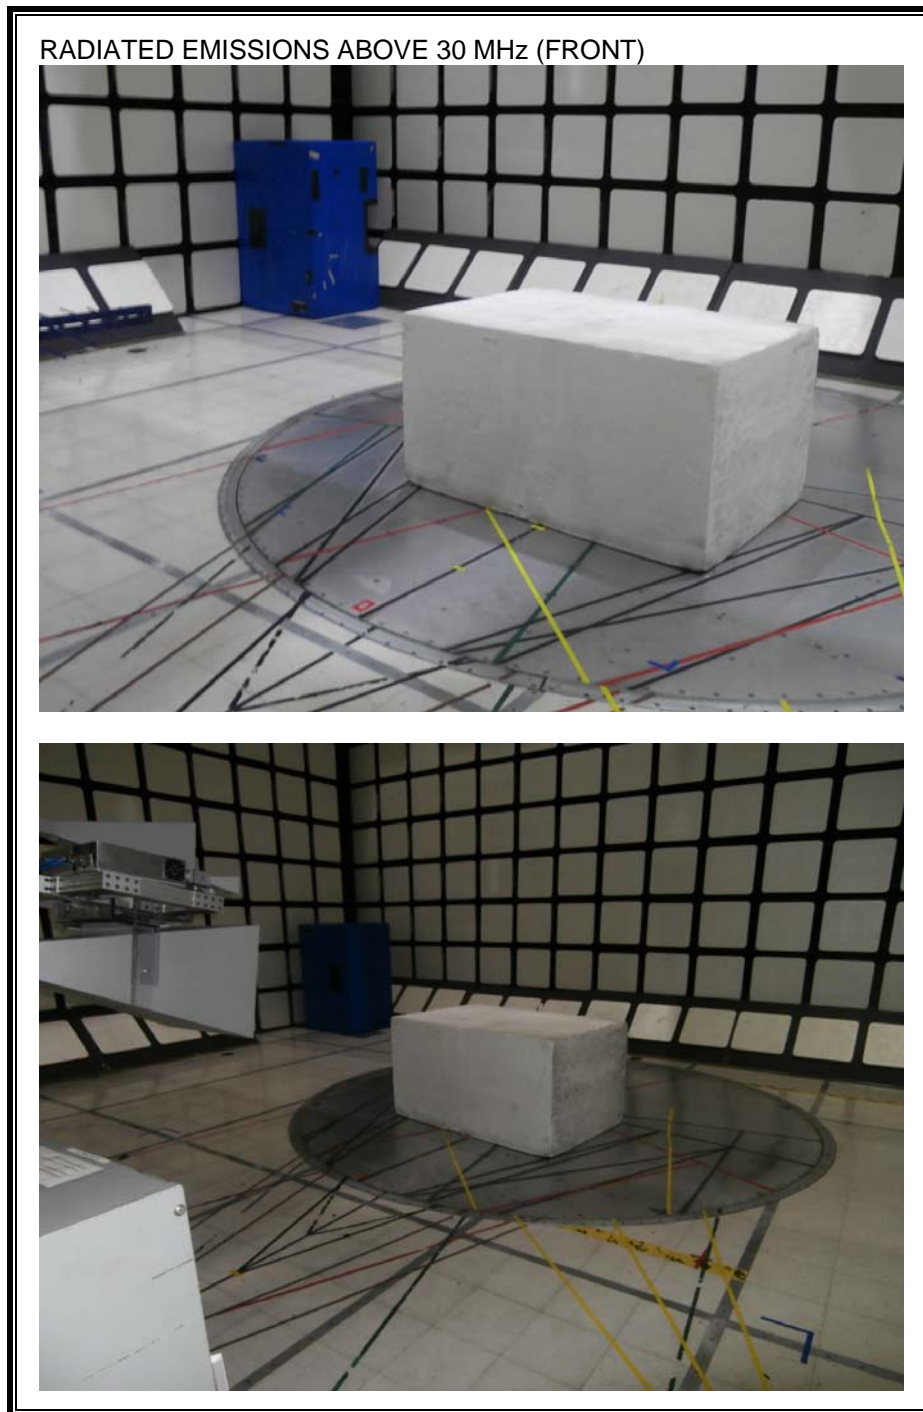

RADIATED EMISSIONS ABOVE 30 MHz (BACK)

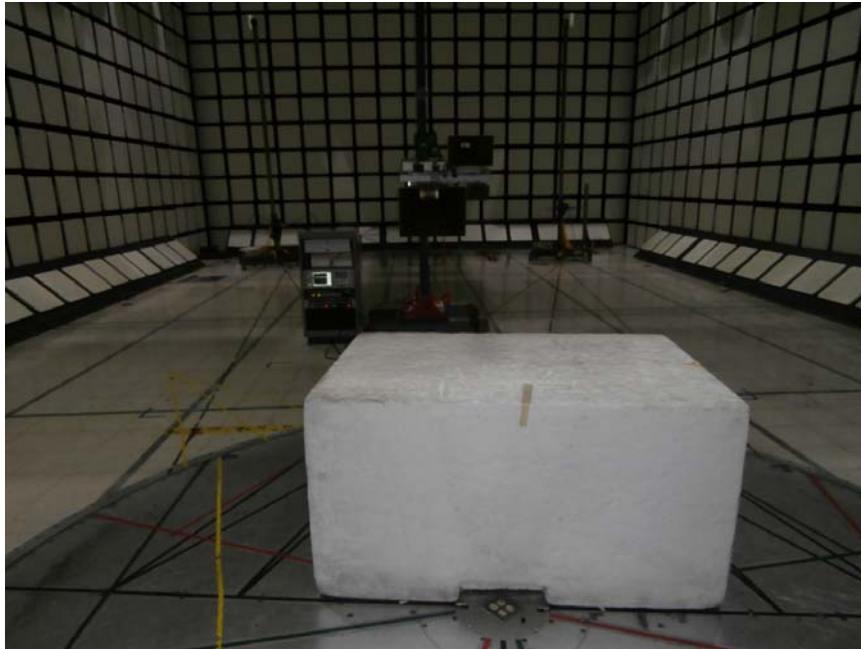

**END OF REPORT**