



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

LIGHTING CONTROLLER

MODEL NUMBER: QS Wireless

**FCC ID: JPZ0097
IC: 2851A-JPZ0097**

REPORT NUMBER: 10014723

ISSUE DATE: 2013-07-23

Prepared for
**LUTRON ELECTRONICS
7200 SUTER ROAD
COOPERSBURG
PA, 18036, USA**

Prepared by
**UL LLC
1285 WALT WHITMAN RD.
MELVILLE, NY 11747, U.S.A.
TEL: (631) 271-6200
FAX: (877) 854-3577**



NVLAP LAB CODE 100255-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	2013-07-23	Initial Issue	B. DeLisi

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>6</i>
5.3. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.5. <i>MODIFICATIONS</i>	<i>6</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS	11
7.1. <i>20 dB AND 99% BW</i>	<i>11</i>
7.2. <i>DUTY CYCLE.....</i>	<i>15</i>
7.3. <i>TRANSMISSION TIME.....</i>	<i>19</i>
8. RADIATED EMISSION TEST RESULTS.....	21
8.1. <i>TX RADIATED SPURIOUS EMISSION</i>	<i>21</i>
8.2. <i>RX RADIATED SPURIOUS EMISSION.....</i>	<i>28</i>
9. AC MAINS LINE CONDUCTED EMISSIONS.....	33
10. SETUP PHOTOS	46

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Lutron Electronics Inc
7200 Suter Road
Coopersburg, PA, 18036, USA

EUT DESCRIPTION: Lighting Controller

MODEL: QS Wireless

SERIAL NUMBER: 00e9 00DC

DATE TESTED: 2013-07-15 through 2013-07-23


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	Pass
INDUSTRY CANADA RSS-210 Issue 8, Annex 1	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards, using test results reported in the test report documents referenced below and/or documentation furnished by the applicant. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations of these calculations. The results show that the equipment is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation, as described by the referenced documents. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL By:

Tested By:



Michael Antola
WiSE Project Lead
UL LLC

Bob DeLisi
WiSE Principal Engineer
UL LLC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 1285 Walt Whitman Rd. Melville, NY 11747, USA.

UL Melville is accredited by NVLAP, Laboratory Code 100255-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/1002550.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	± 3.3 dB
Radiated Disturbance, 30 to 1000 MHz	± 4.00 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a lighting system controller with wireless communication capability for scene settings.

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal integral antenna.

5.3. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 8-017 Rev A.

The test utility software used during testing was F-CC 3523 Rev A.

5.4. WORST-CASE CONFIGURATION AND MODE

Testing for radiated and conducted tests were performed on the lowest and highest operating channels. All other tests were conducted on the default channel

5.5. MODIFICATIONS

No modifications were made during testing.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Powe Supply	Lutron	QSPA-1-50	N/A	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identica Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	IEC	Unshielded	>3m	None
2	24Vdc/Contro	1	4pin	Unshielded	>3m	None

TEST SETUP

The EUT is a limited module installed in the standard faceplate. It was tested in a stand-alone configuration without an enclosure.

SETUP DIAGRAM FOR TESTS

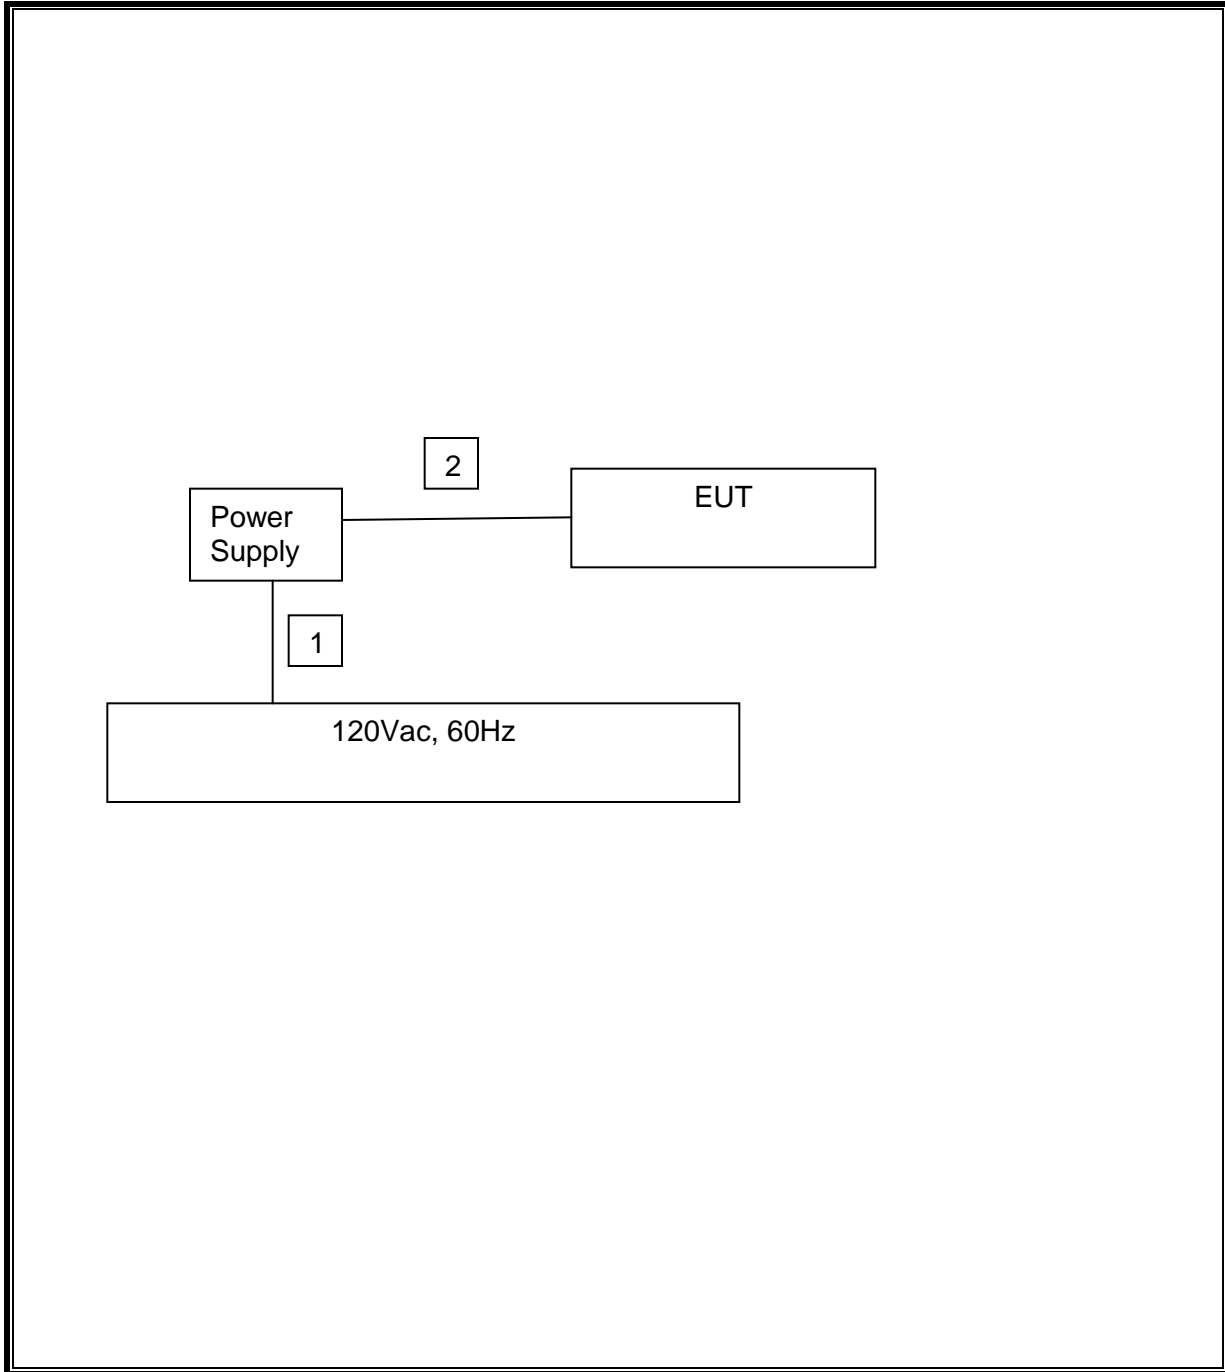

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Radiated Emissions					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
30-1000MHz					
EMI Receiver	Rohde & Schwarz	ESCI7	75141	2013-01-30	2014-01-31
Bicon Antenna	Schaffner	VBA6106A	43441	2012-11-12	2013-11-12
Log-P Antenna	Schaffner	UPA6109	44068	2013-04-03	2014-04-03
Switch Driver	HP	11713A	ME7A-627	N/A	N/A
System Controller	Sunol Sciences	SC99V	44396	N/A	N/A
Camera Controller	Panasonic	WV-CU254	44395	N/A	N/A
RF Switch Box	UL	1	44398	N/A	N/A
Measurement Software	UL	Version 9.5	44740	N/A	N/A
Multimeter	Fluke	83III	ME5B-305	2013-01-28	2014-01-31
Above 1GHz (Band Optimized System)					
Spectrum Analyzer	Agilent	E4446A	72823	2013-01-30	2014-01-31
Horn Antenna (1-2 GHz)	ETS	3161-01 (26°)**	51442	2008-03-28	See * below
Horn Antenna (2-4 GHz)	ETS	3161-02 (22°)**	48107	2007-09-27	See * below
Horn Antenna (4-8 GHz)	ETS	3161-03 (22°)**	48106	2007-09-27	See * below
Signal Path Controller	HP	11713A	50250	N/A	N/A
Gain Controller	HP	11713A	50251	N/A	N/A
RF Switch / Preamp Fixture	UL	BOMS1	50249	N/A	N/A
System Controller	UL	BOMS2	50252	N/A	N/A
Measurement Software	UL	Version 9.5	44740	N/A	N/A
<p>* - Note: As allowed by the calibration standard ANSI C63.4 Section 4.4.2, standard gain horns need only a one-time calibration. Only if physical damage occurs will the horn antenna require re-calibration.</p> <p>Gain standard horn antennas (sometimes called standard gain horn antennas) need not be calibrated beyond that which is provided by the manufacturer unless they are damaged or deterioration is suspected, or they are used at a distance closer than $2D^2/\lambda$. Gain standard horn antennas have gains that are fixed by their dimensions and dimensional tolerances.</p> <p>** - Number in parentheses denotes antenna beam width.</p>					

Conducted Emissions					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
Conducted Emissions – GP 1					
EMI Receiver	Rohde & Schwarz	ESIB26	ME5B-081	2013-01-29	2014-01-31
LISN	Solar	9252-50-R-24-BNC	ME5A-636	2013-01-31	2014-01-31
Switch Driver	HP	11713A	44397	N/A	N/A
RF Switch Box	UL	4	44404	N/A	N/A
Measurement Software	UL	Version 9.5	44736	N/A	N/A
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	43734	2012-03-13	2014-03-13
Multimeter	Fluke	83III	ME5B-305	2013-01-28	2014-01-31

Antenna Port Tests					
Description	Manufacturer	Model	Identifier	Cal Date	Cal Due Date
EMI Receiver	Rohde & Schwarz	ESCI7	75141	2013-01-30	2014-01-31
Dipole Antenna	EMCO	3121C	3359	2012-12-27	2013-12-13
Temp/Humidity/Pressure Meter	Cole Parmer	99760-00	4268	2013-12-22	2014-12-22
Multimeter	Fluke	83III	ME5B-305	2013-01-28	2014-01-31

7. ANTENNA PORT TEST RESULTS

7.1. 20 dB AND 99% BW

LIMITS

FCC §15.231 (c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

IC A1.1.3

For the purpose of Section A1.1, the 99% Bandwidth shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

TEST PROCEDURE

ANSI C63.4

The transmitter output is connected to the spectrum analyzer.

20dB Bandwidth: The RBW is set to 10 KHz. The VBW is set to 30 KHz. The sweep time is coupled. Bandwidth is determined at the points 20 dB down from the modulated carrier.

99% Bandwidth: The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


20dB Bandwidth

Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
431	148	1077.5	-929.5


99% Bandwidth

Frequency (MHz)	99% Bandwidth (kHz)	Limit (kHz)	Margin (kHz)
431	128	1077.5	-949.5

20dB BANDWIDTH

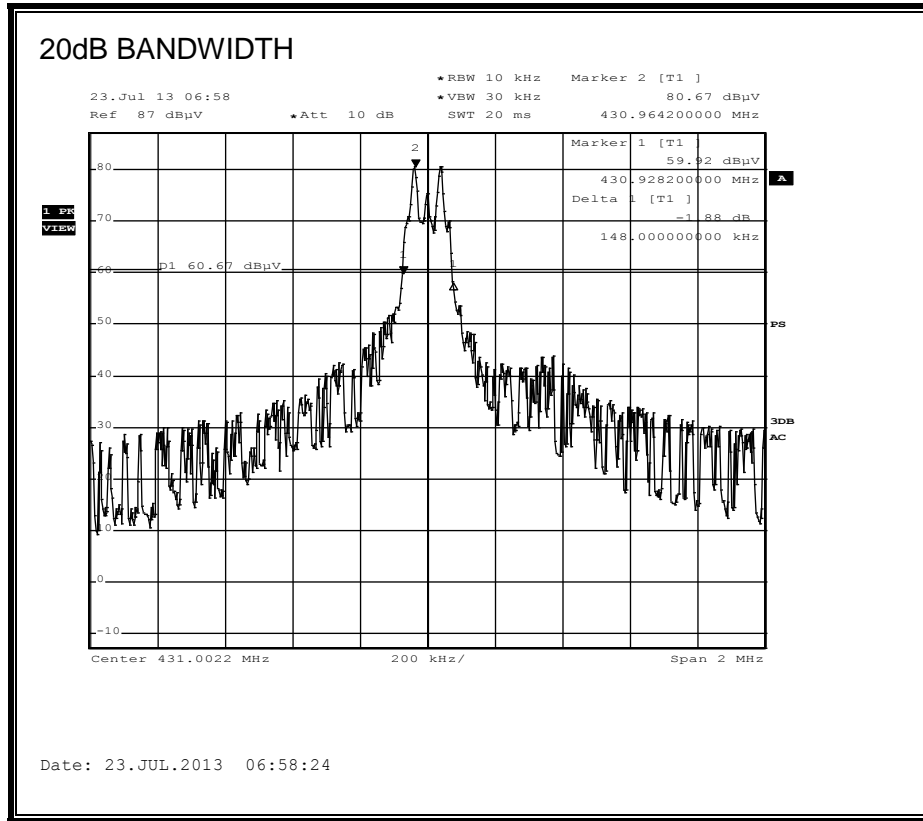

99% BANDWIDTH

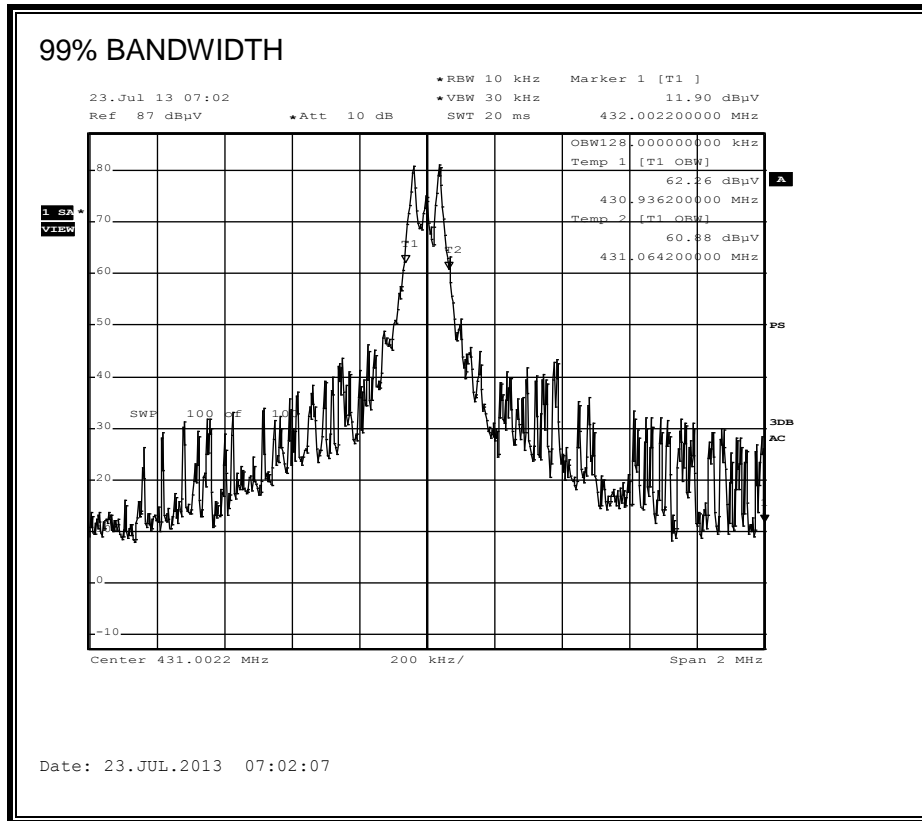

7.2. DUTY CYCLE

LIMITS

FCC §15.35 (c)

The measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is coupled and the span is set to 0 Hz. The number of pulses is measured and calculated in a 100 ms scan.

CALCULATION


Average Reading = Peak Reading (dBuV/m) + 20log (Duty Cycle), Where Duty Cycle is (# of long pulses * long pulse width) + (# of short pulses * short pulse width) / 100 or T

RESULTS


No non-compliance noted:

One Period (ms)	Long Pulse Width (ms)	# of Long Pulses	Short Width (ms)	# of Short Pulses	Duty Cycle	20*Log Duty Cycle (dB)
100	4.6	1	4.20	1	0.088	-21.11


ONE PERIOD

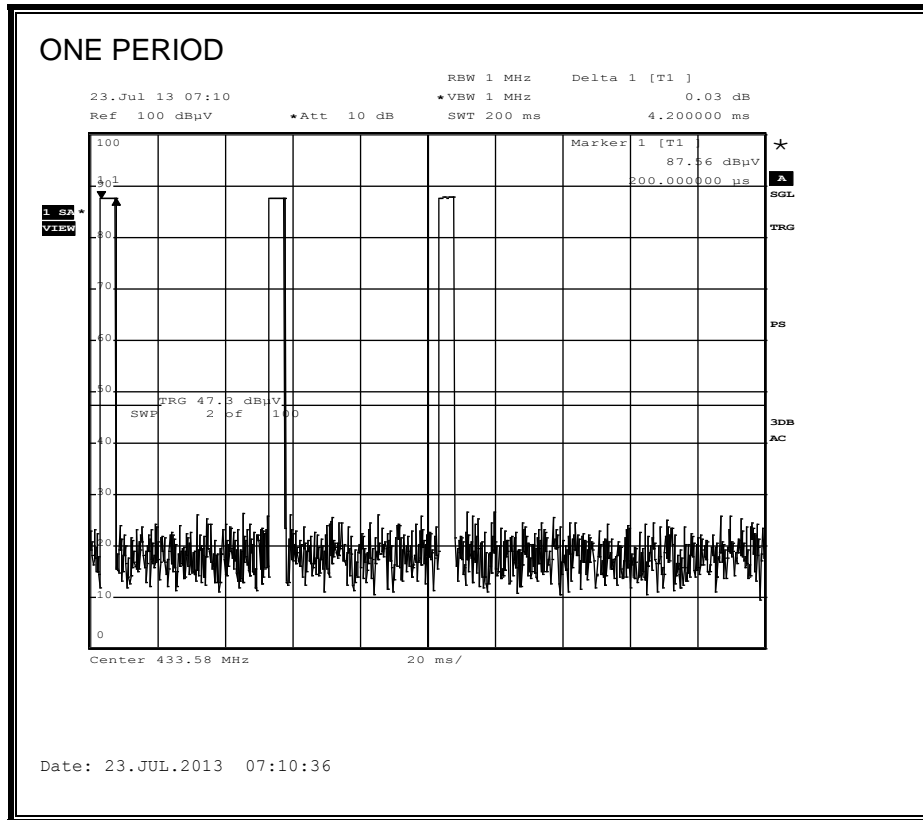

LONG PULSE WIDTH

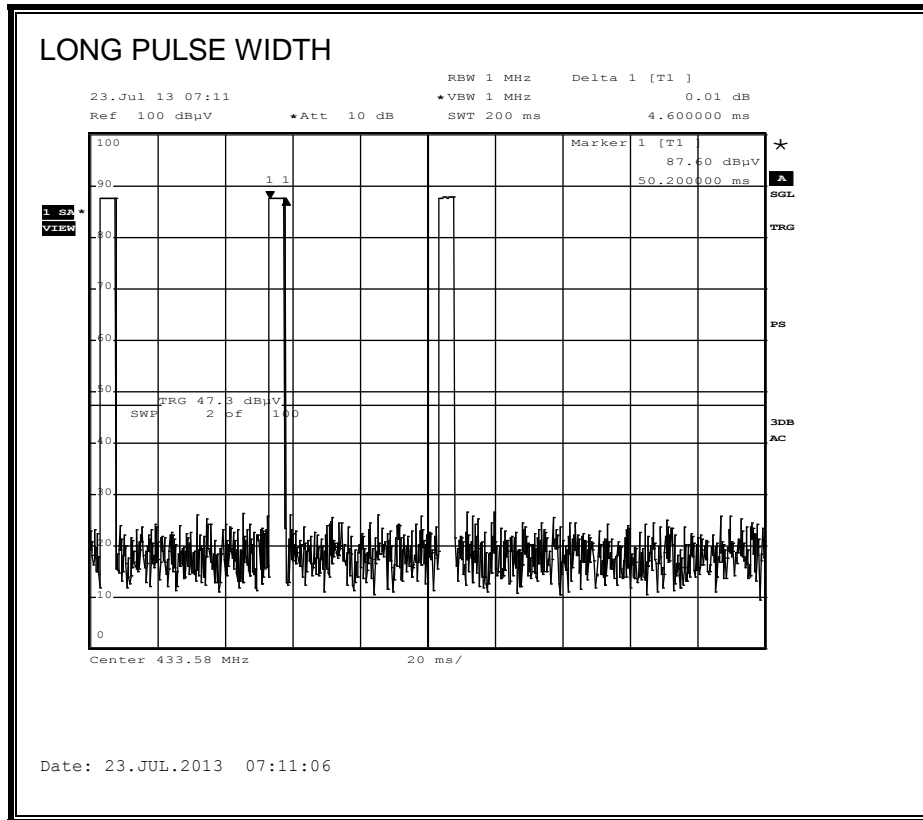

SHORT PULSE WIDTH

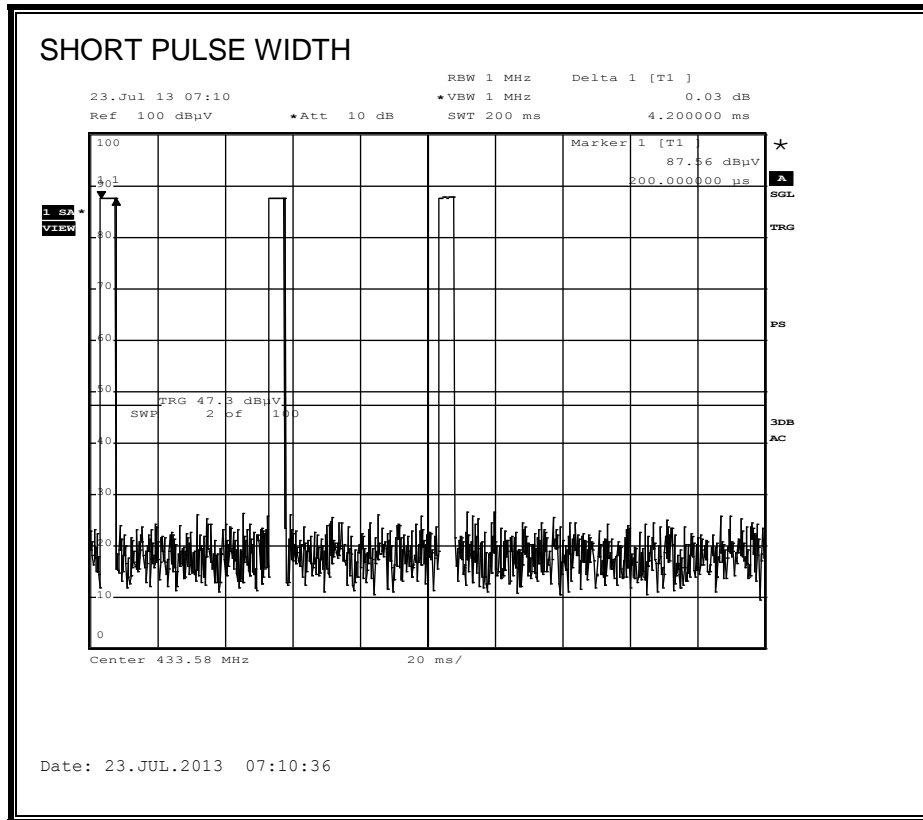

7.3. TRANSMISSION TIME

LIMITS

FCC §15.231 (a) (2)

IC A1.1.1 (b)


A transmitter activated automatically shall cease transmission within 5 seconds after activation.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is set to 10 seconds and the span is set to 0 Hz.

RESULTS

No non-compliance noted:

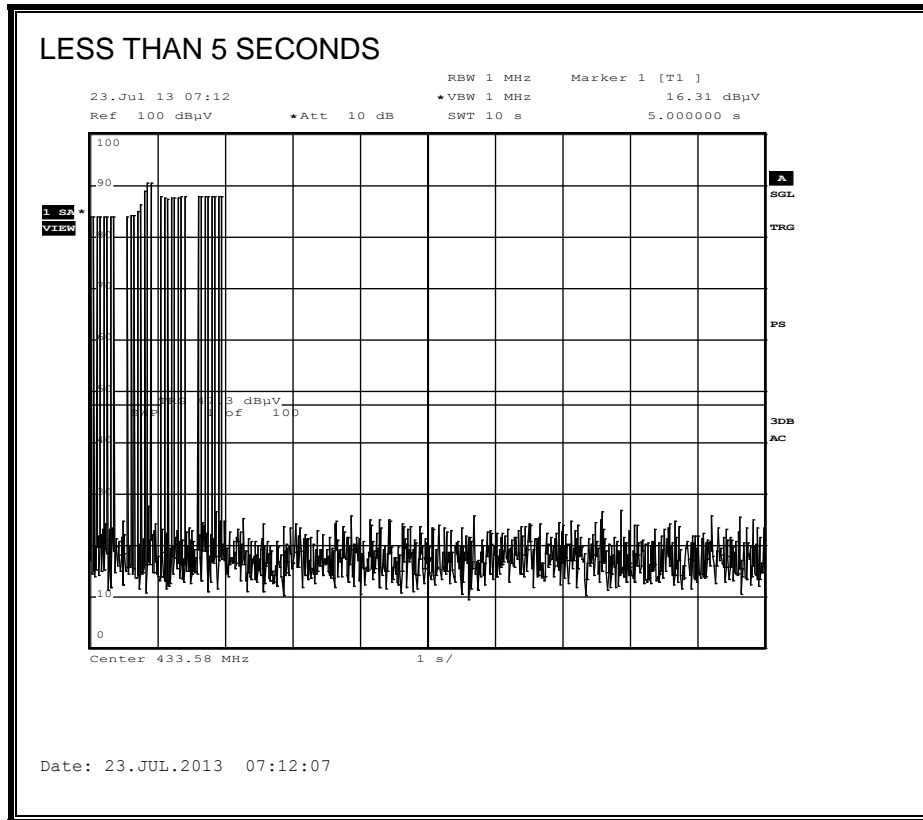

8. RADIATED EMISSION TEST RESULTS

8.1. TX RADIATED SPURIOUS EMISSION

LIMITS

FCC §15.231 (b)
 IC A1.1.2

In addition to the provisions of § 15.205, the field strength of emissions from Intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental Frequency (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66 - 40.70	2,250	225
70 - 130	1,250	125
130 - 174	1,250 to 3,750 ¹	125 to 375 ¹
174 - 260	3,750	375
260 - 470	3,750 to 12,500 ¹	375 to 1,250 ¹
Above 470	12,500	1,250

¹ Linear interpolation

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2 Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 88	100 **	3
88 216	150 **	3
216 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 72 MHz, 76 88 MHz, 174 216 MHz or 470 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


RESULTS

No non-compliance noted:


FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz) – Low Channel

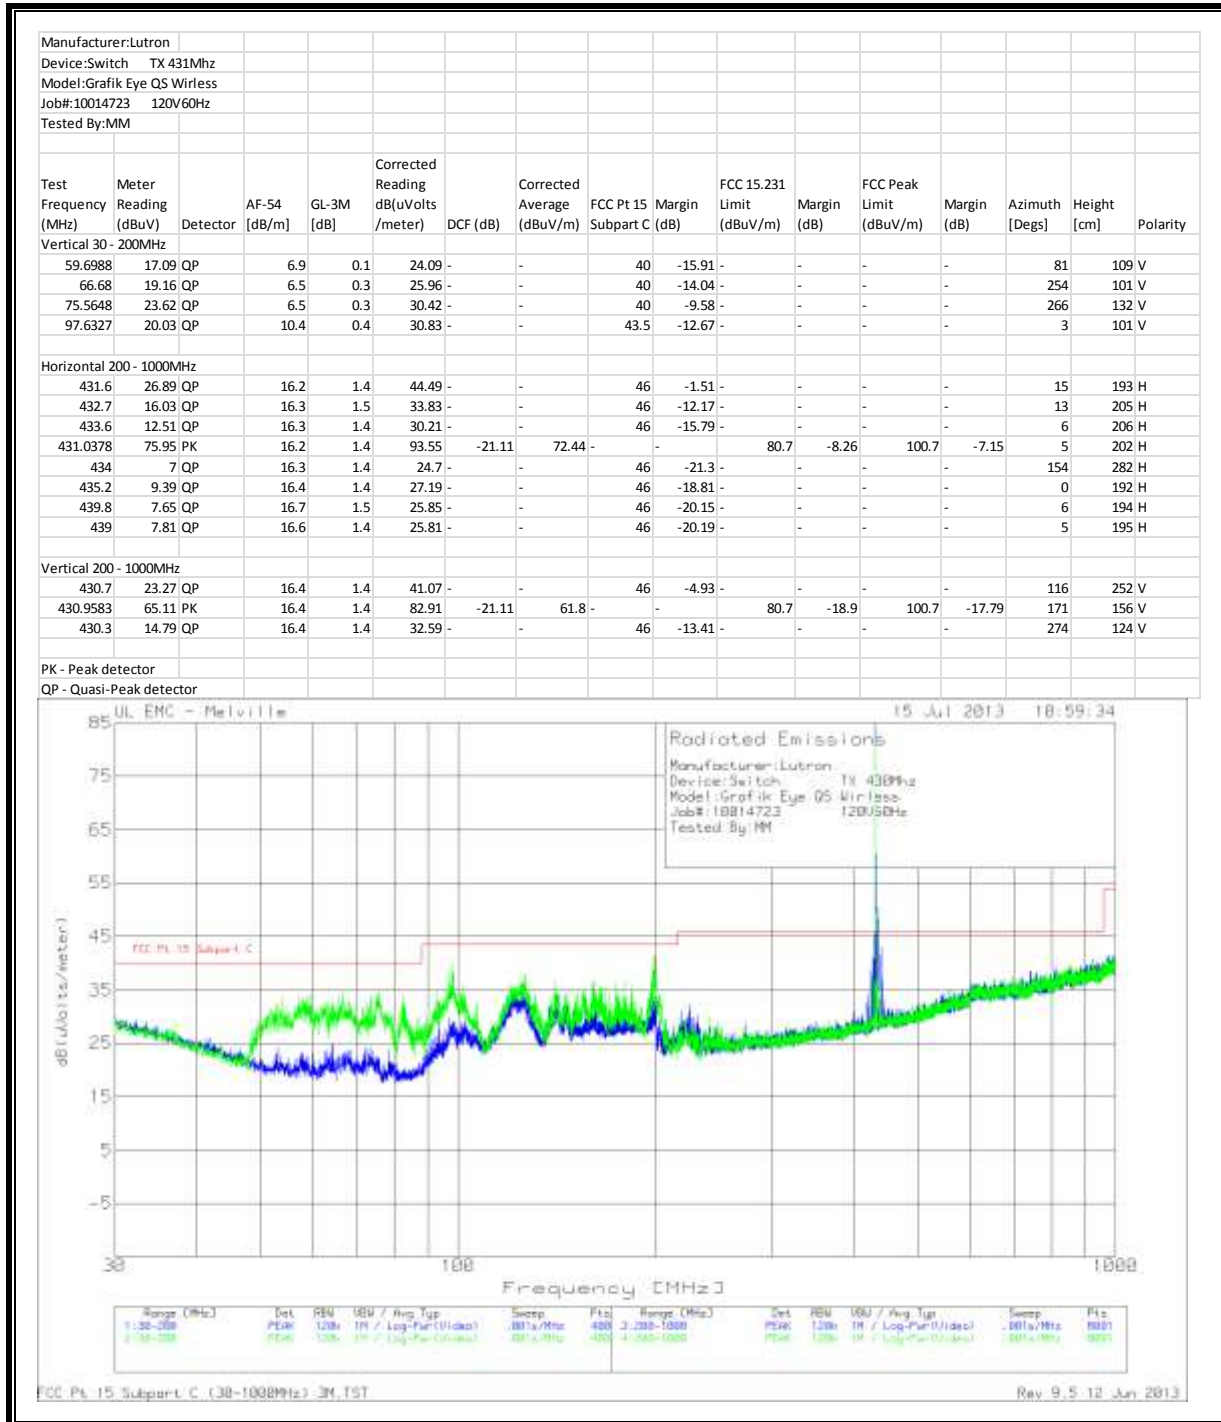


HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz- Low Channel

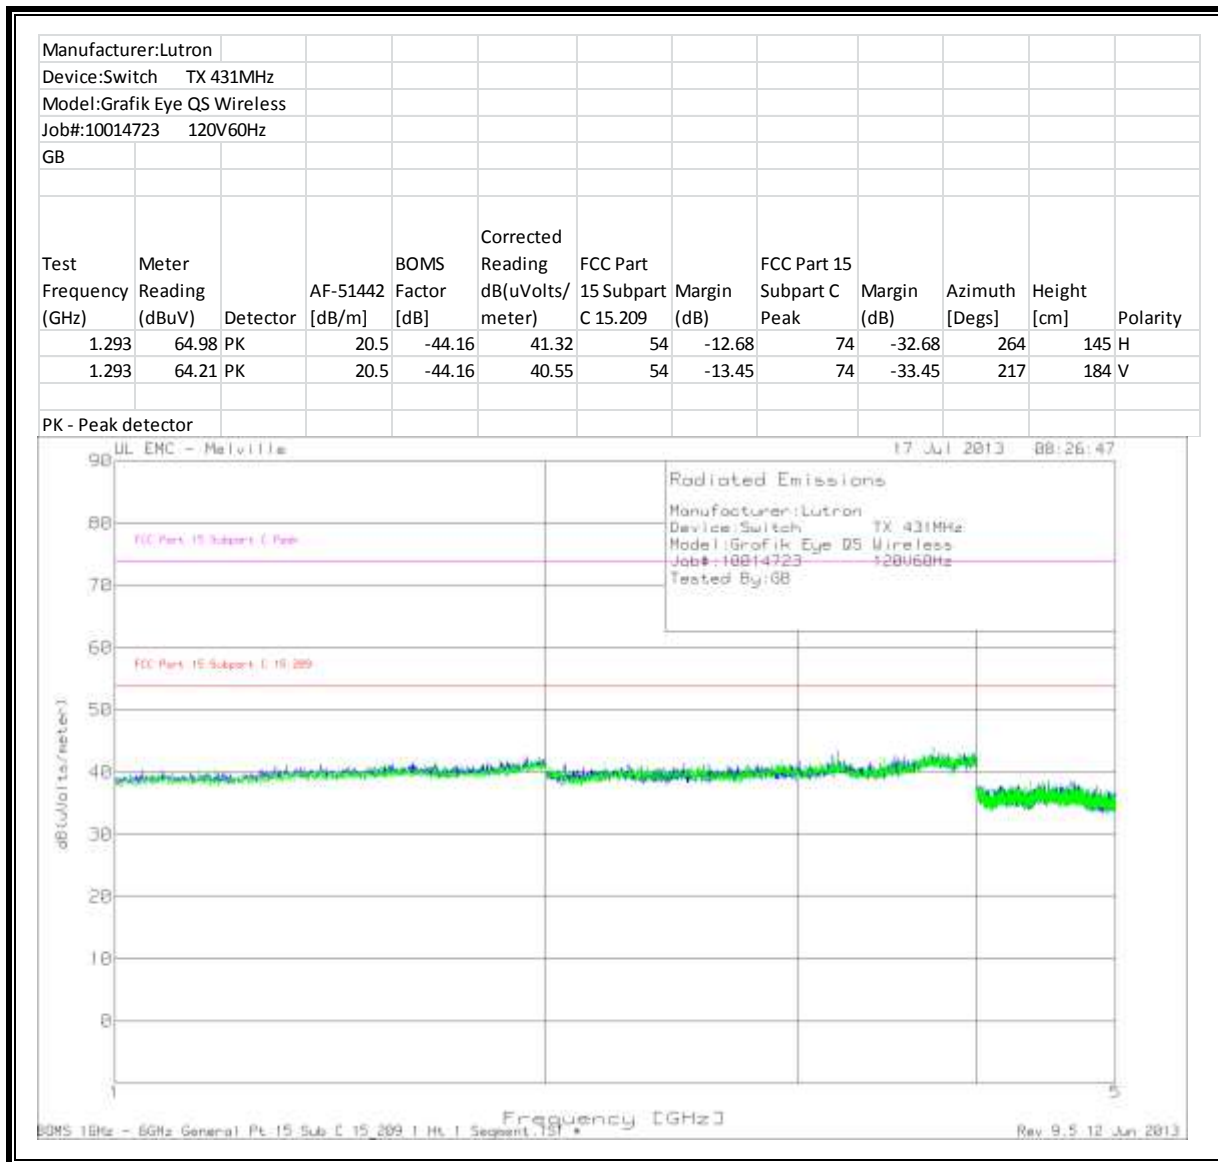

FUNDAMENTAL, HARMONICS AND TX SPURIOUS EMISSION (30 – 1000 MHz) – High Channel

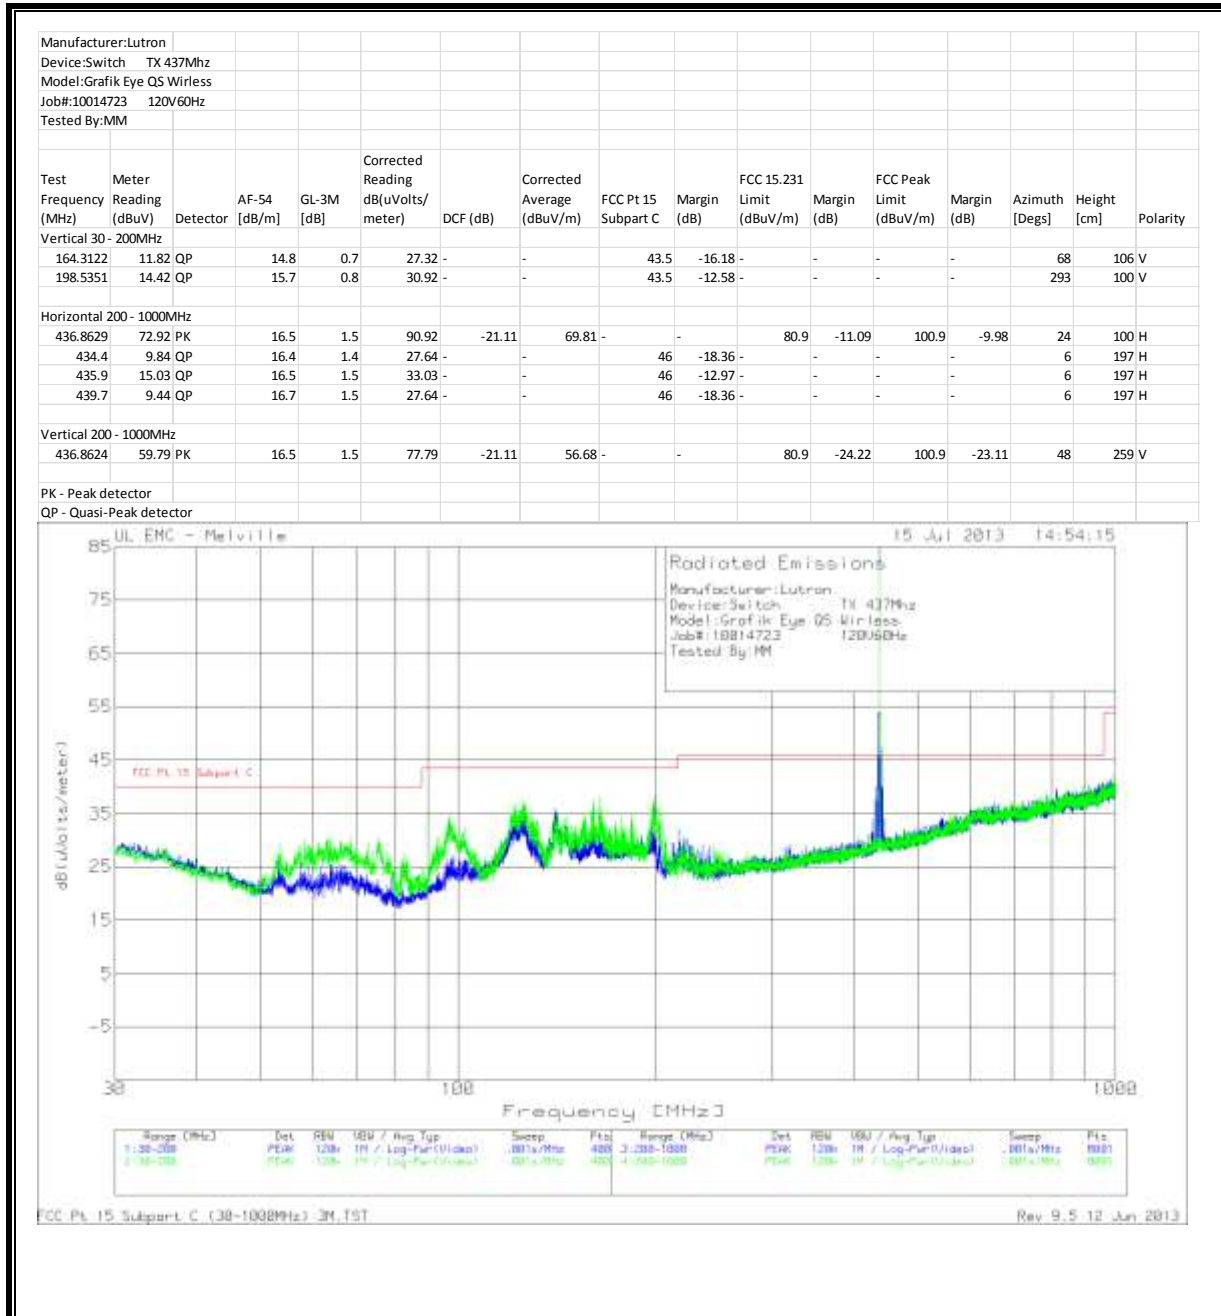

HARMONICS AND TX SPURIOUS EMISSIONS ABOVE 1GHz- High Channel

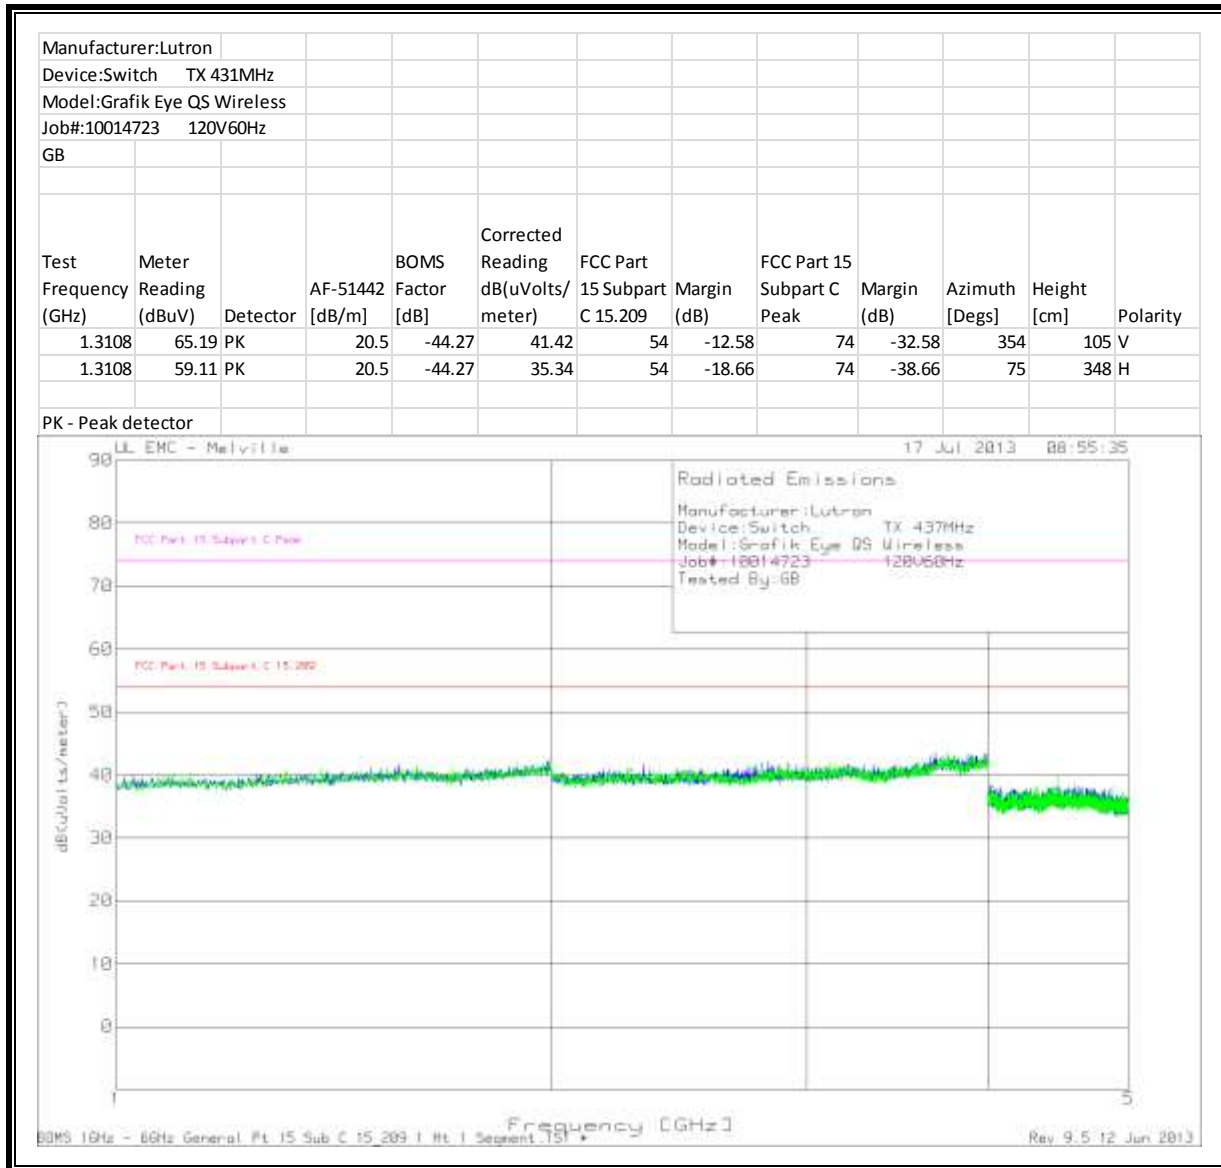

8.2. RX RADIATED SPURIOUS EMISSION

LIMITS

IC RSS-Gen Issue 2, section 7.2.3.2

All spurious emissions shall comply with the limits shown below:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to receive in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 5th harmonic is investigated with the transmitter set to the middle channel.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


RESULTS

No non-compliance noted:


RECEIVER SPURIOUS EMISSION (30MHz - 1GHz) – Low Channel

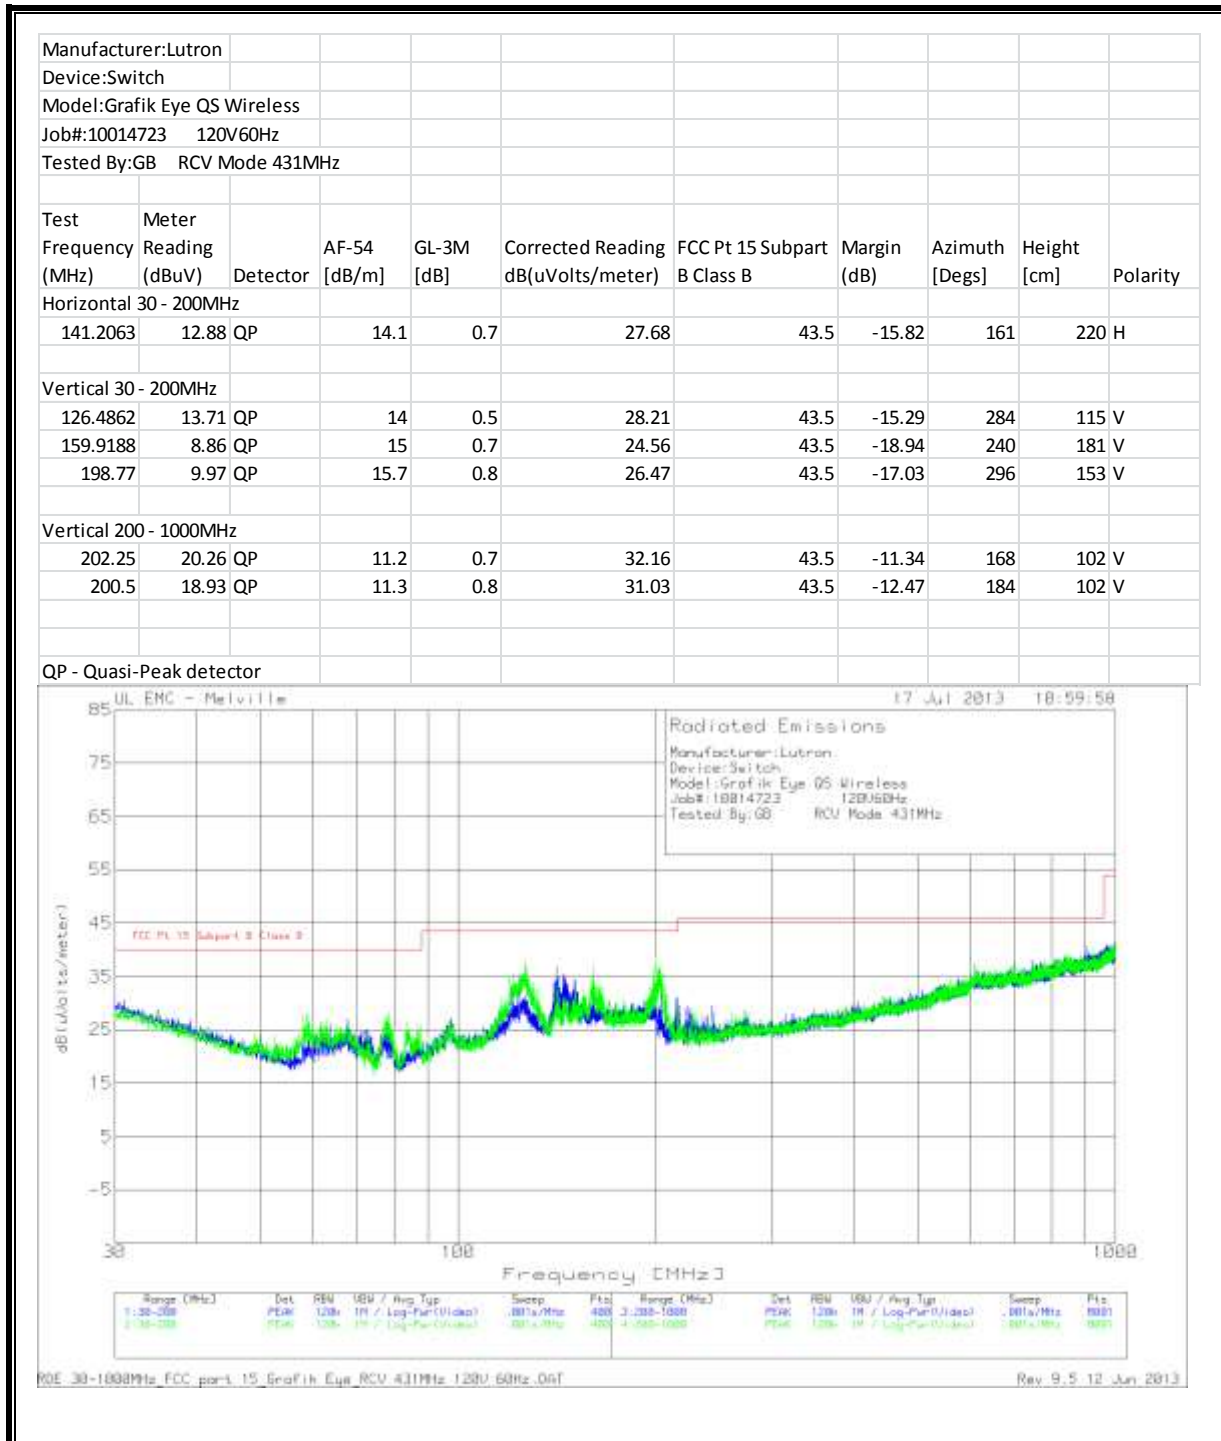


RECEIVER SPURIOUS EMISSION ABOVE 1GHz

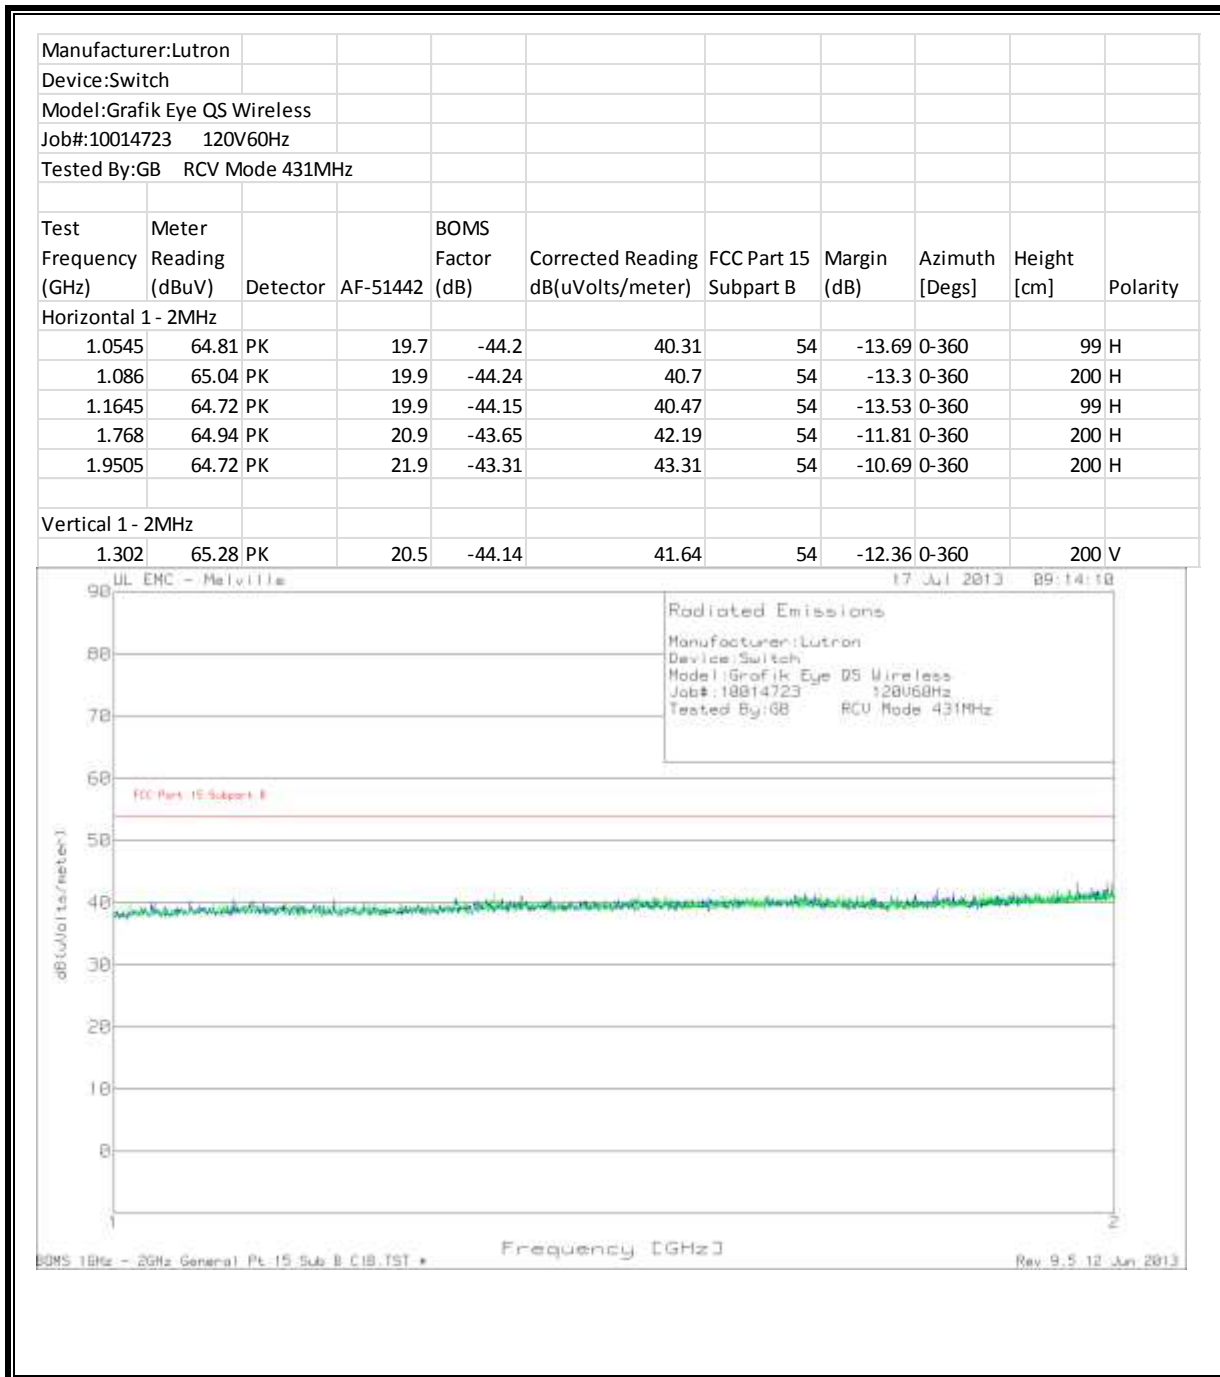

RECEIVER SPURIOUS EMISSION (30MHz - 1GHz) – High Channel

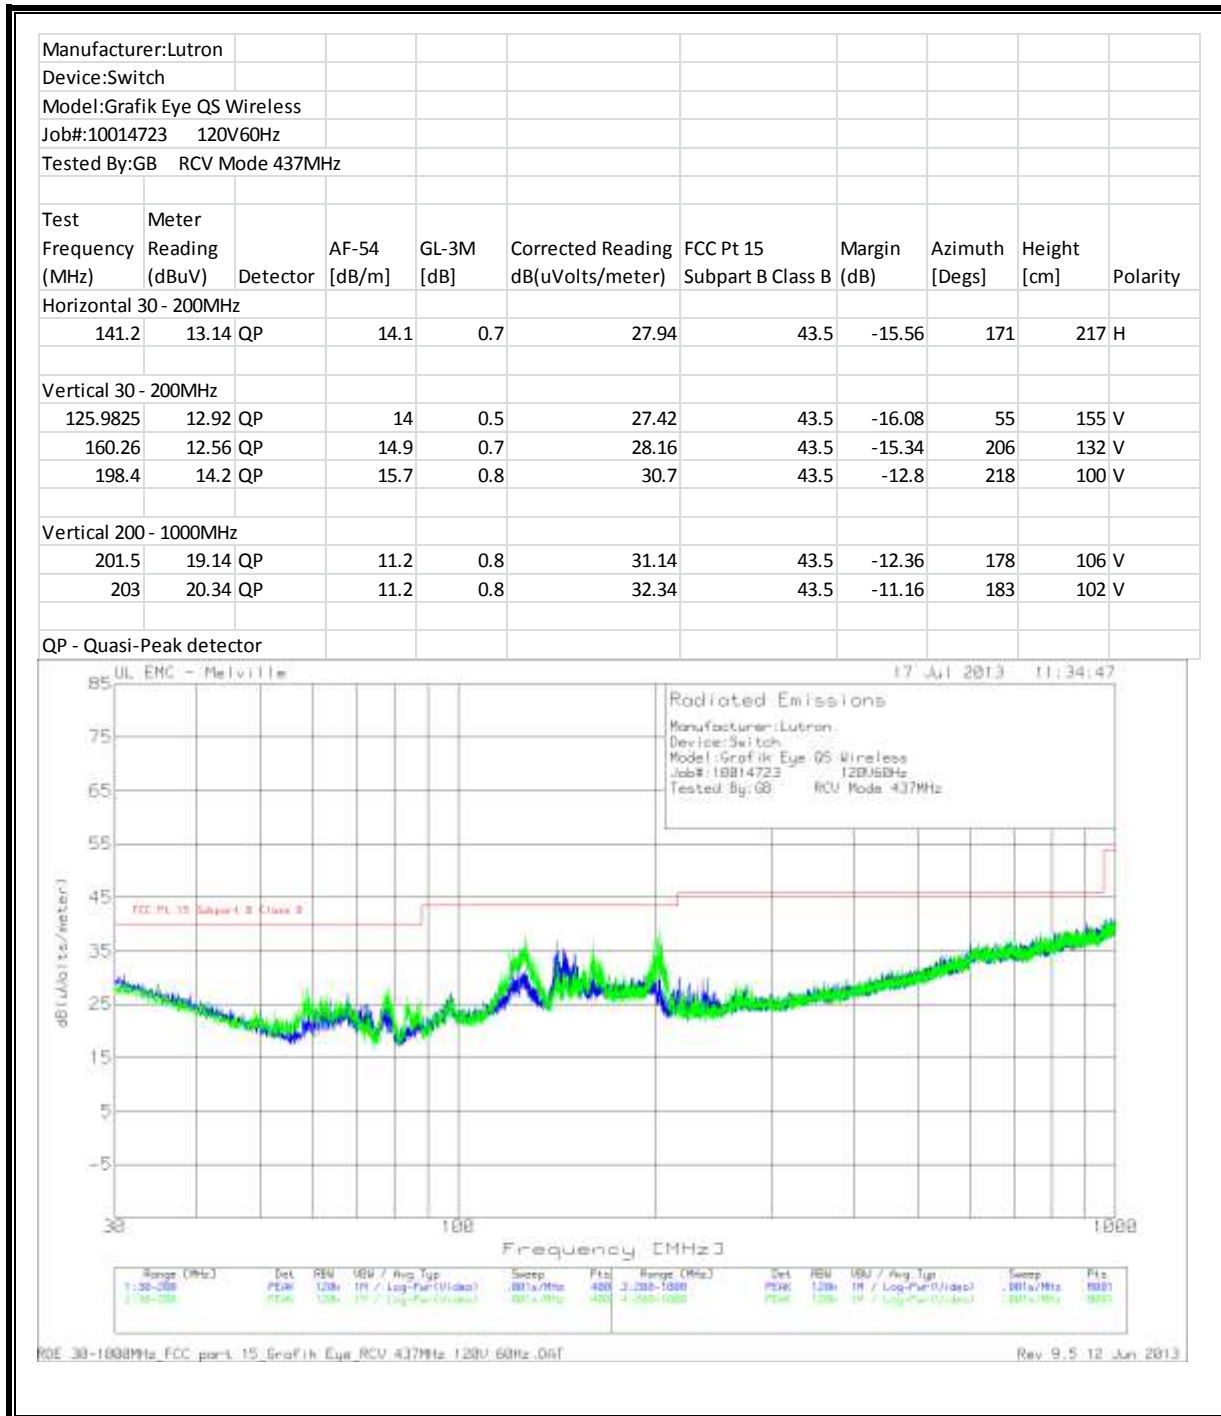

RECEIVER SPURIOUS EMISSION ABOVE 1GHz

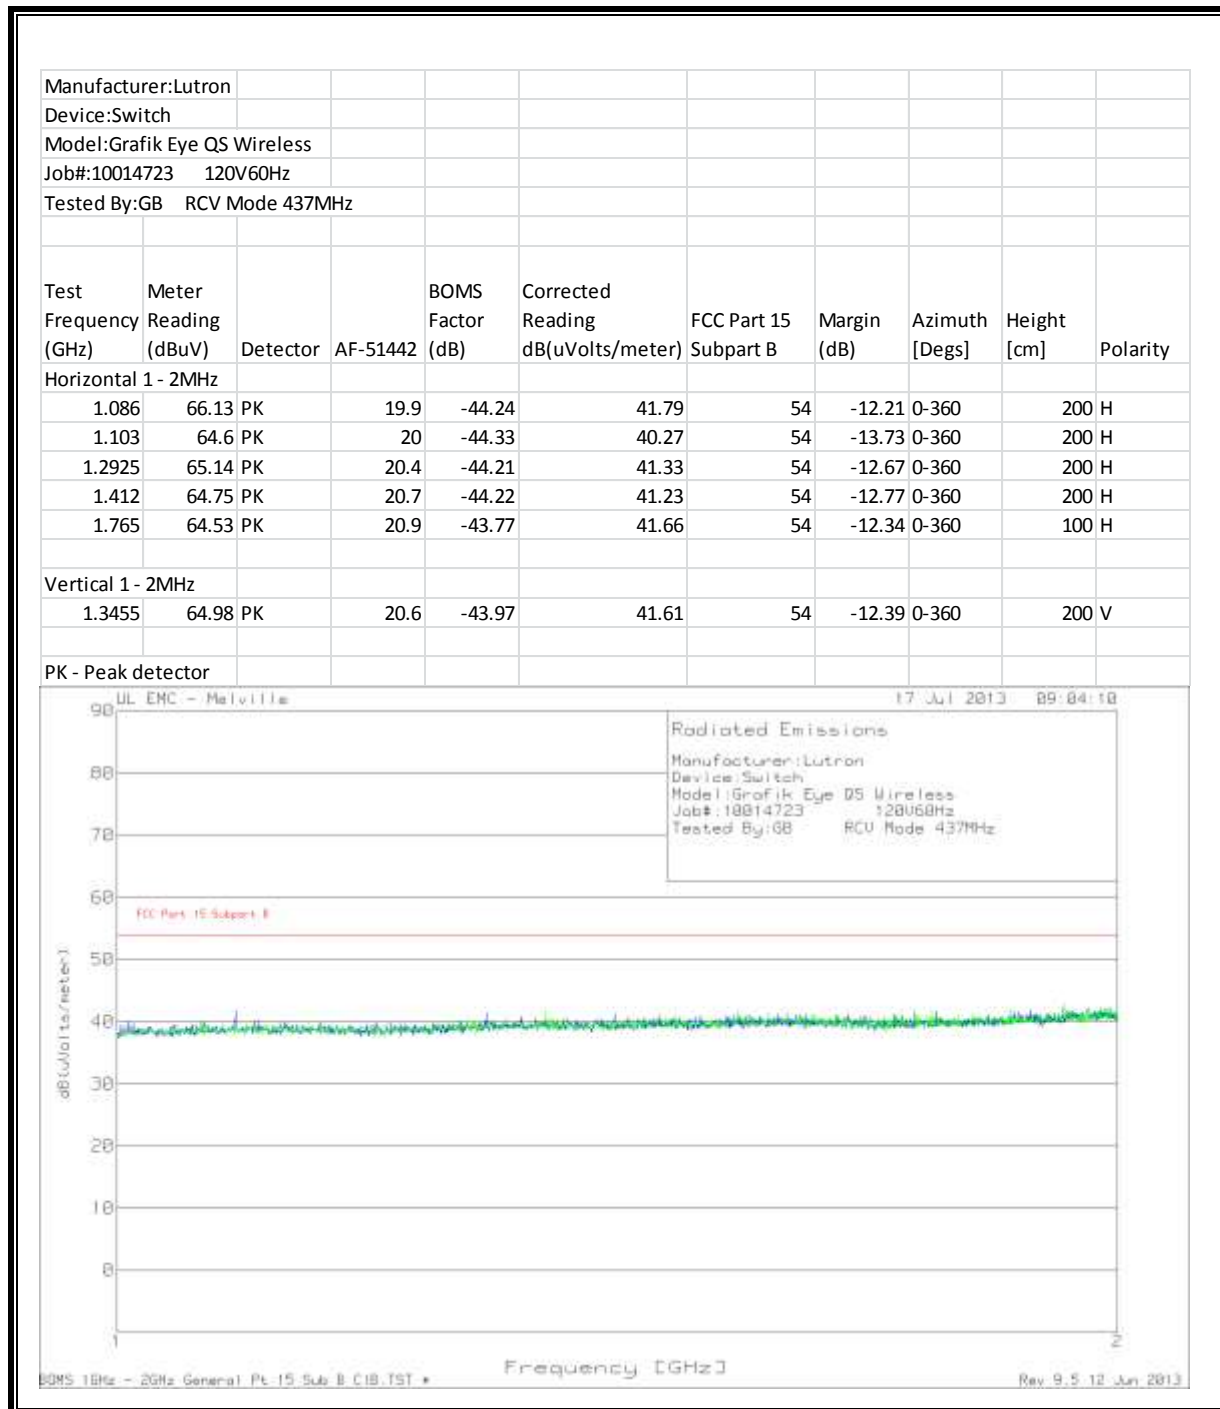

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207 (a)
IC RSS-GEN, Section 7.2.2

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4


RESULTS

No non-compliance noted:


6 WORST EMISSIONS – TX Low Channel

Manufacturer:Lutron									
Device:Switch									
Model:Grafik Eye QS Wireless									
Job:10014723 120V60Hz									
Tested by:RM/RA TxMode 431MHz									
Test Frequency (MHz)	Meter Reading (dBuV)	Detector	5A636 L1 (dB)	Corrected Reading (dBuV)	Class B QPK Limit (dBuV)	Margin (dB)	Class B Avg Limit (dBuV)	Margin (dB)	
Line - L1 .15 - 30MHz									
0.162665	43.65	QP	10	53.65	65.33	-11.68	55.33	-1.68	
0.281735	36.19	QP	10	46.19	60.76	-14.57	50.76	-4.57	
0.308723	31.17	QP	10	41.17	60	-18.83	50	-8.83	
0.319845	31.82	QP	10	41.82	59.71	-17.89	49.71	-7.89	
0.849325	29.49	QP	10	39.49	56	-16.51	46	-6.51	
4.402038	26.1	QP	10.2	36.3	56	-19.7	46	-9.7	
Neutral .15 - 30MHz									
0.153075	45.31	QP	10.1	55.41	65.83	-10.42	55.83	-0.42	
0.162113	43.44	QP	10.1	53.54	65.36	-11.82	55.36	-1.82	
0.23694	35.61	QP	10	45.61	62.2	-16.59	52.2	-6.59	
0.27002	32.62	QP	10	42.62	61.12	-18.5	51.12	-8.5	
0.842525	29.15	QP	10.1	39.25	56	-16.75	46	-6.75	
4.599088	25.17	QP	10.2	35.37	56	-20.63	46	-10.63	
0.474655	20.14	QP	10	30.14	56.43	-26.29	46.43	-16.29	
Line - L1 .15 - 30MHz									
0.162665	25.95	Av	10	35.95	65.33	-29.38	55.33	-19.38	
0.281735	21.51	Av	10	31.51	60.76	-29.25	50.76	-19.25	
0.308723	16.95	Av	10	26.95	60	-33.05	50	-23.05	
0.319845	16.93	Av	10	26.93	59.71	-32.78	49.71	-22.78	
0.849325	21.52	Av	10	31.52	56	-24.48	46	-14.48	
4.402038	12.22	Av	10.2	22.42	56	-33.58	46	-23.58	
Neutral .15 - 30MHz									
0.153075	26.94	Av	10.1	37.04	65.83	-28.79	55.83	-18.79	
0.162113	25.28	Av	10.1	35.38	65.36	-29.98	55.36	-19.98	
0.23694	20.08	Av	10	30.08	62.2	-32.12	52.2	-22.12	
0.27002	17.72	Av	10	27.72	61.12	-33.4	51.12	-23.4	
0.842525	20.68	Av	10.1	30.78	56	-25.22	46	-15.22	
4.599088	8.25	Av	10.2	18.45	56	-37.55	46	-27.55	
0.474655	8.5	Av	10	18.5	56.43	-37.93	46.43	-27.93	
QP - Quasi-Peak detector									
Av - Average detector									

LINE 1 RESULTS

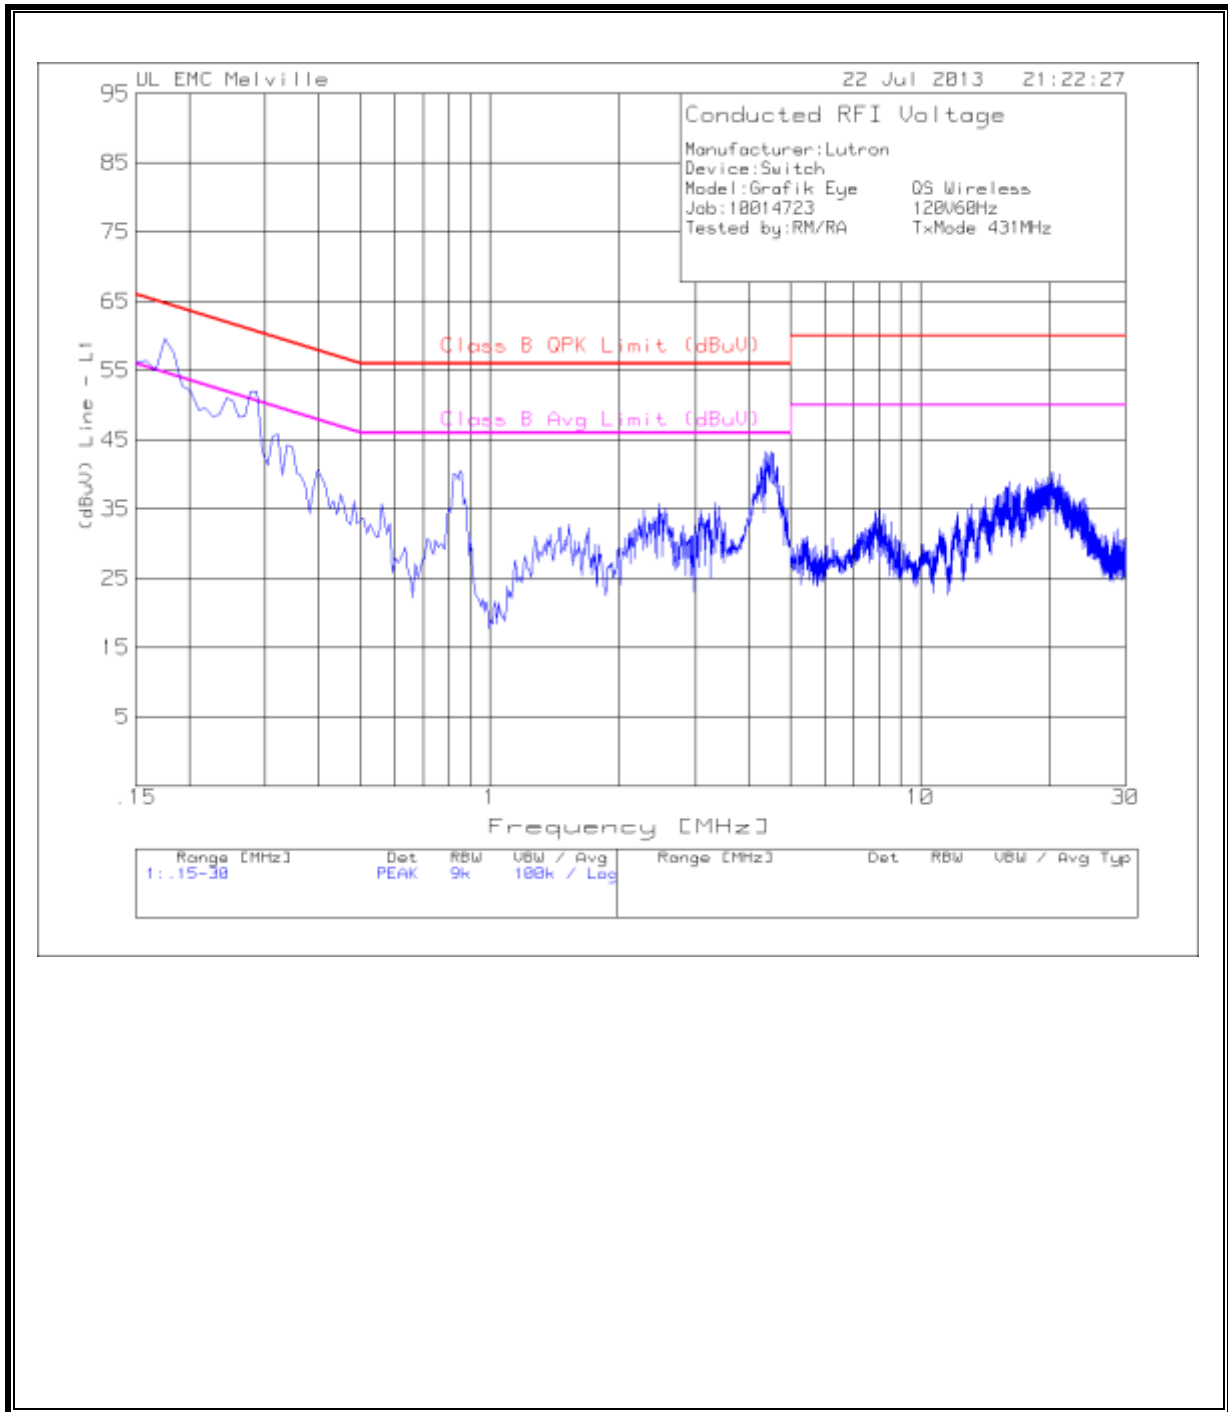


LINE 2 RESULTS

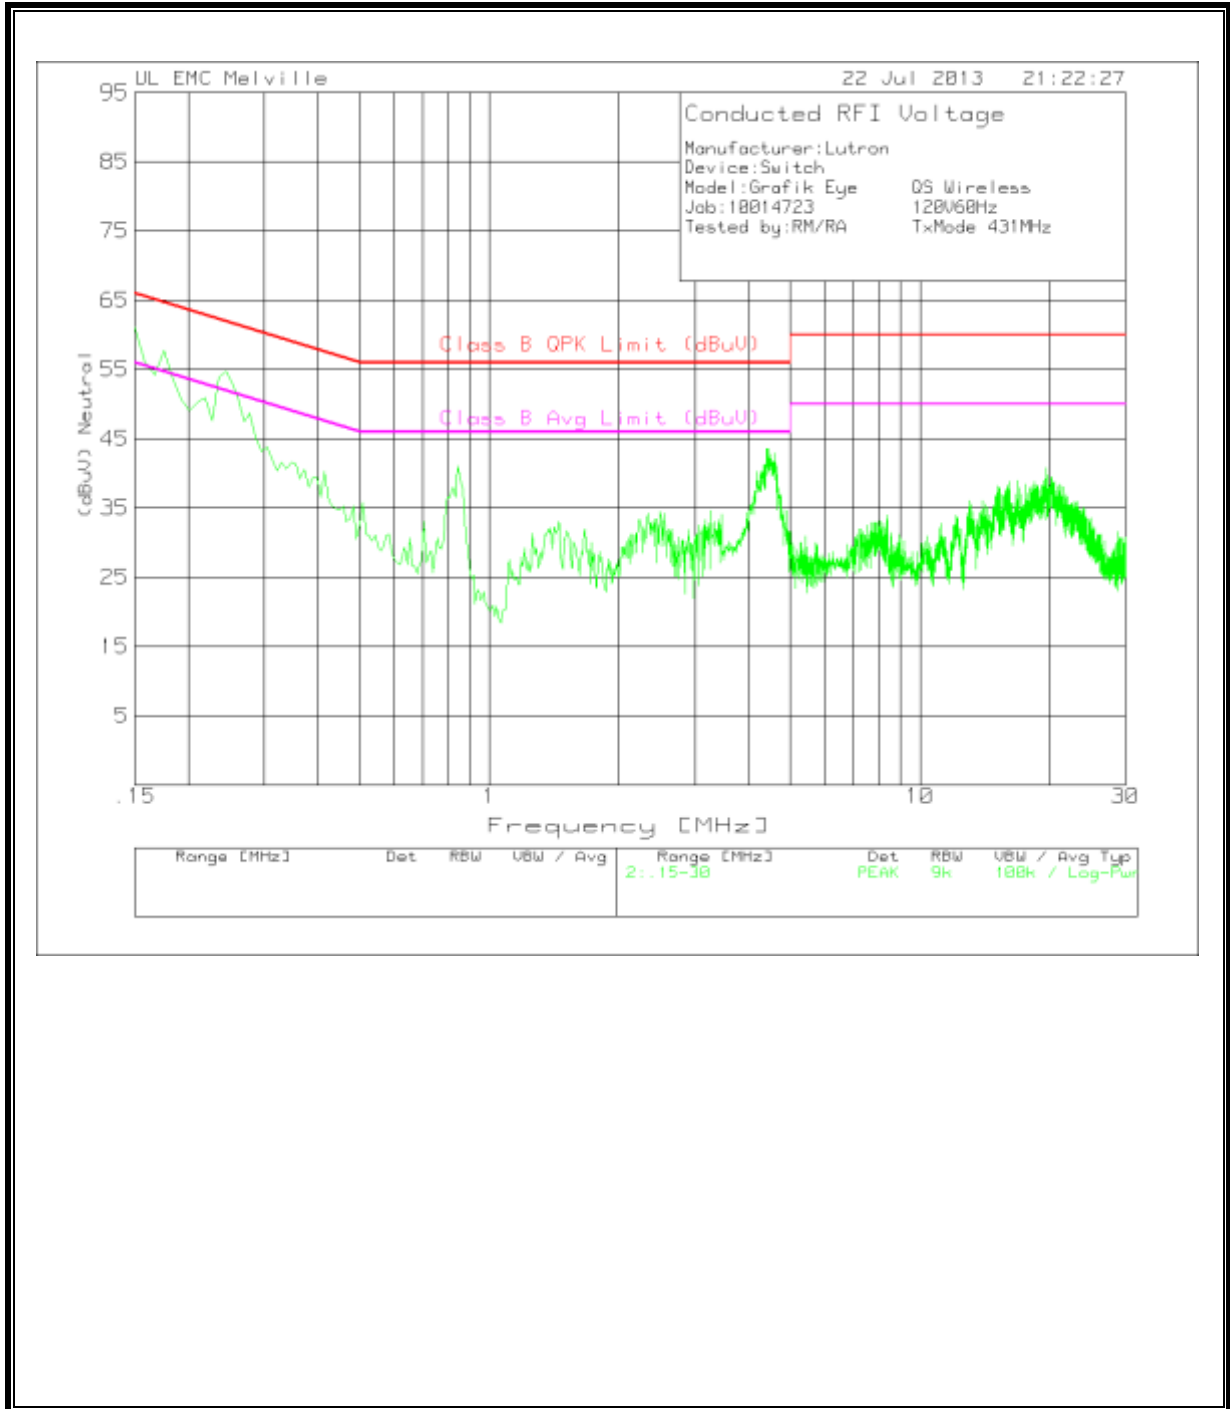


6 WORST EMISSIONS – TX High Channel

Manufacturer:Lutron								
Device:Switch								
Model:Grafik Eye QS Wireless								
Job:10014723 120V60Hz								
Tested by:RM/RA TxMode 437MHz								
Test Frequency (MHz)	Meter Reading (dBuV)	Detector	5A636 L1 (dB)	Corrected Reading (dBuV)	Class B QPK Limit (dBuV)	Margin (dB)	Class B Avg Limit (dBuV)	Margin (dB)
Line - L1 .15 - 30MHz								
0.16181	44.02	QP	10	54.02	65.37	-11.35	55.37	-1.35
0.280648	36.08	QP	10	46.08	60.8	-14.72	50.8	-4.72
0.306478	31.22	QP	10	41.22	60.07	-18.85	50.07	-8.85
0.317793	31.52	QP	10	41.52	59.76	-18.24	49.76	-8.24
0.848365	29.64	QP	10	39.64	56	-16.36	46	-6.36
4.404303	26.12	QP	10.2	36.32	56	-19.68	46	-9.68
Neutral .15 - 30MHz								
0.159273	44.04	QP	10	54.04	65.5	-11.46	55.5	-1.46
0.159525	43.8	QP	10	53.8	65.49	-11.69	55.49	-1.69
0.22846	36.21	QP	10	46.21	62.51	-16.3	52.51	-6.3
0.277373	35.58	QP	10	45.58	60.89	-15.31	50.89	-5.31
0.846138	29.34	QP	10.1	39.44	56	-16.56	46	-6.56
4.588773	24.86	QP	10.2	35.06	56	-20.94	46	-10.94
0.468463	20.69	QP	10	30.69	56.54	-25.85	46.54	-15.85
Line - L1 .15 - 30MHz								
0.16181	25.44	Av	10	35.44	65.37	-29.93	55.37	-19.93
0.280648	20.56	Av	10	30.56	60.8	-30.24	50.8	-20.24
0.306478	16.58	Av	10	26.58	60.07	-33.49	50.07	-23.49
0.317793	17.05	Av	10	27.05	59.76	-32.71	49.76	-22.71
0.848365	21.5	Av	10	31.5	56	-24.5	46	-14.5
4.404303	11.85	Av	10.2	22.05	56	-33.95	46	-23.95
Neutral .15 - 30MHz								
0.159273	25.23	Av	10	35.23	65.5	-30.27	55.5	-20.27
0.159525	25.39	Av	10	35.39	65.49	-30.1	55.49	-20.1
0.22846	20.31	Av	10	30.31	62.51	-32.2	52.51	-22.2
0.277373	18.94	Av	10	28.94	60.89	-31.95	50.89	-21.95
0.846138	20.87	Av	10.1	30.97	56	-25.03	46	-15.03
4.588773	8.93	Av	10.2	19.13	56	-36.87	46	-26.87
0.468463	8.83	Av	10	18.83	56.54	-37.71	46.54	-27.71
QP - Quasi-Peak detector								
Av - Average detector								

LINE 1 RESULTS

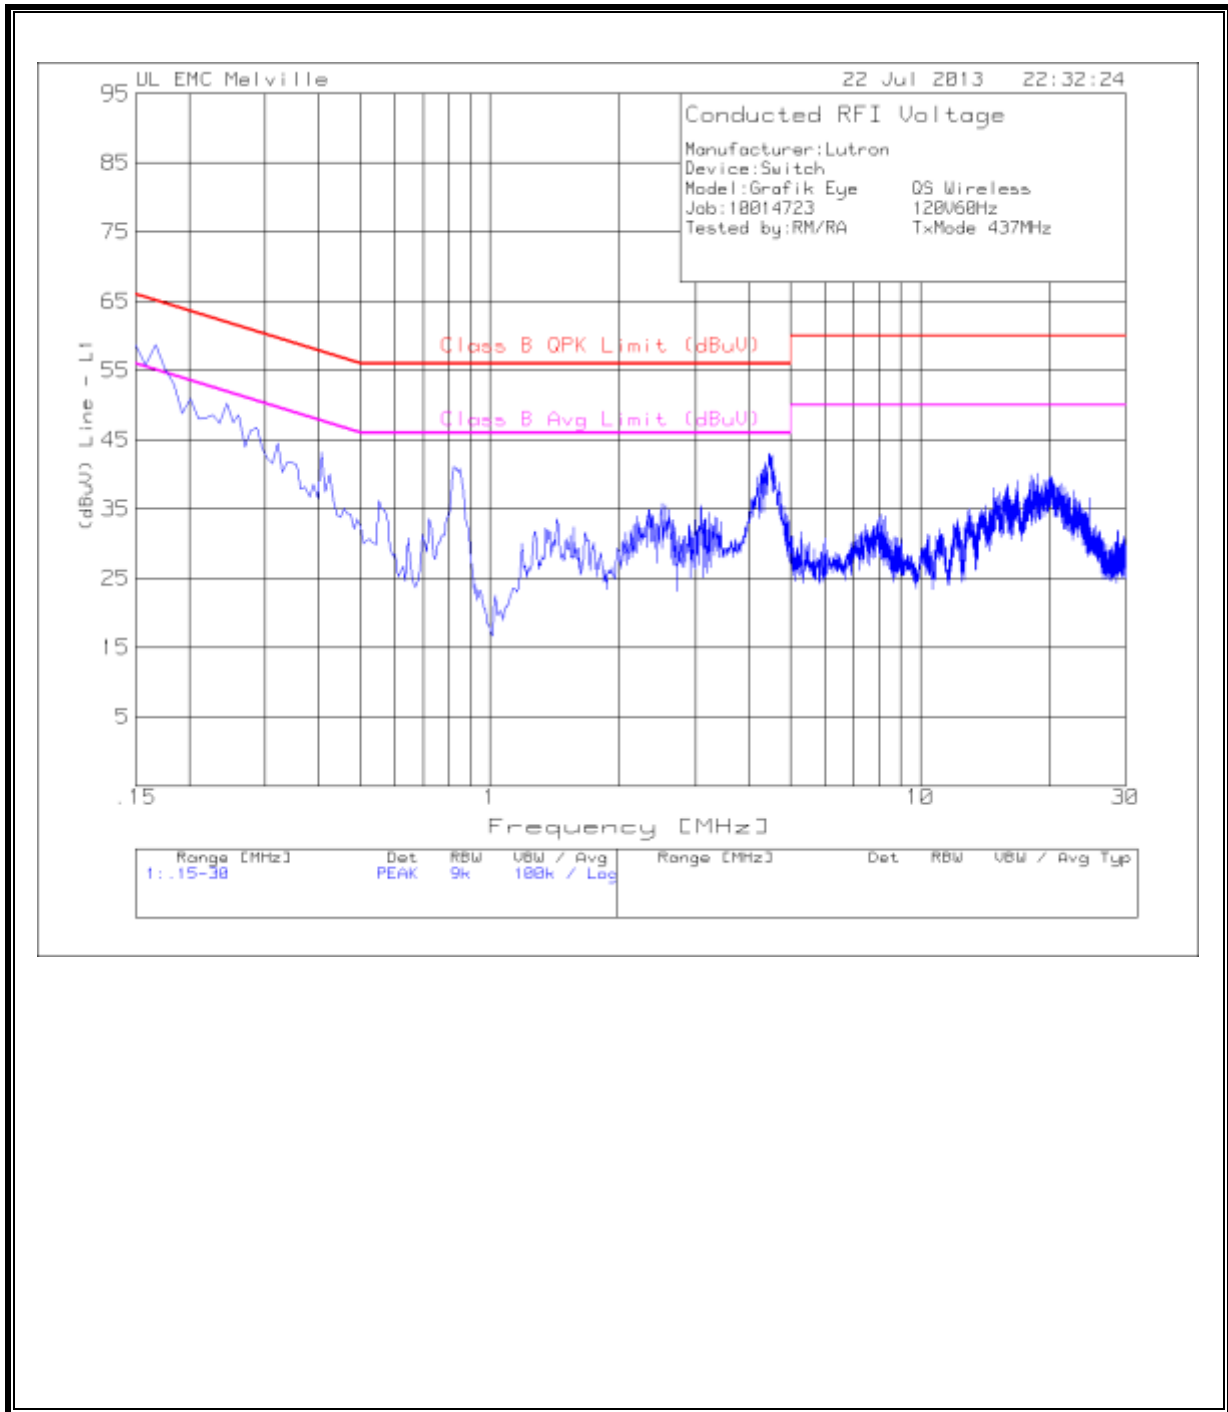


LINE 2 RESULTS

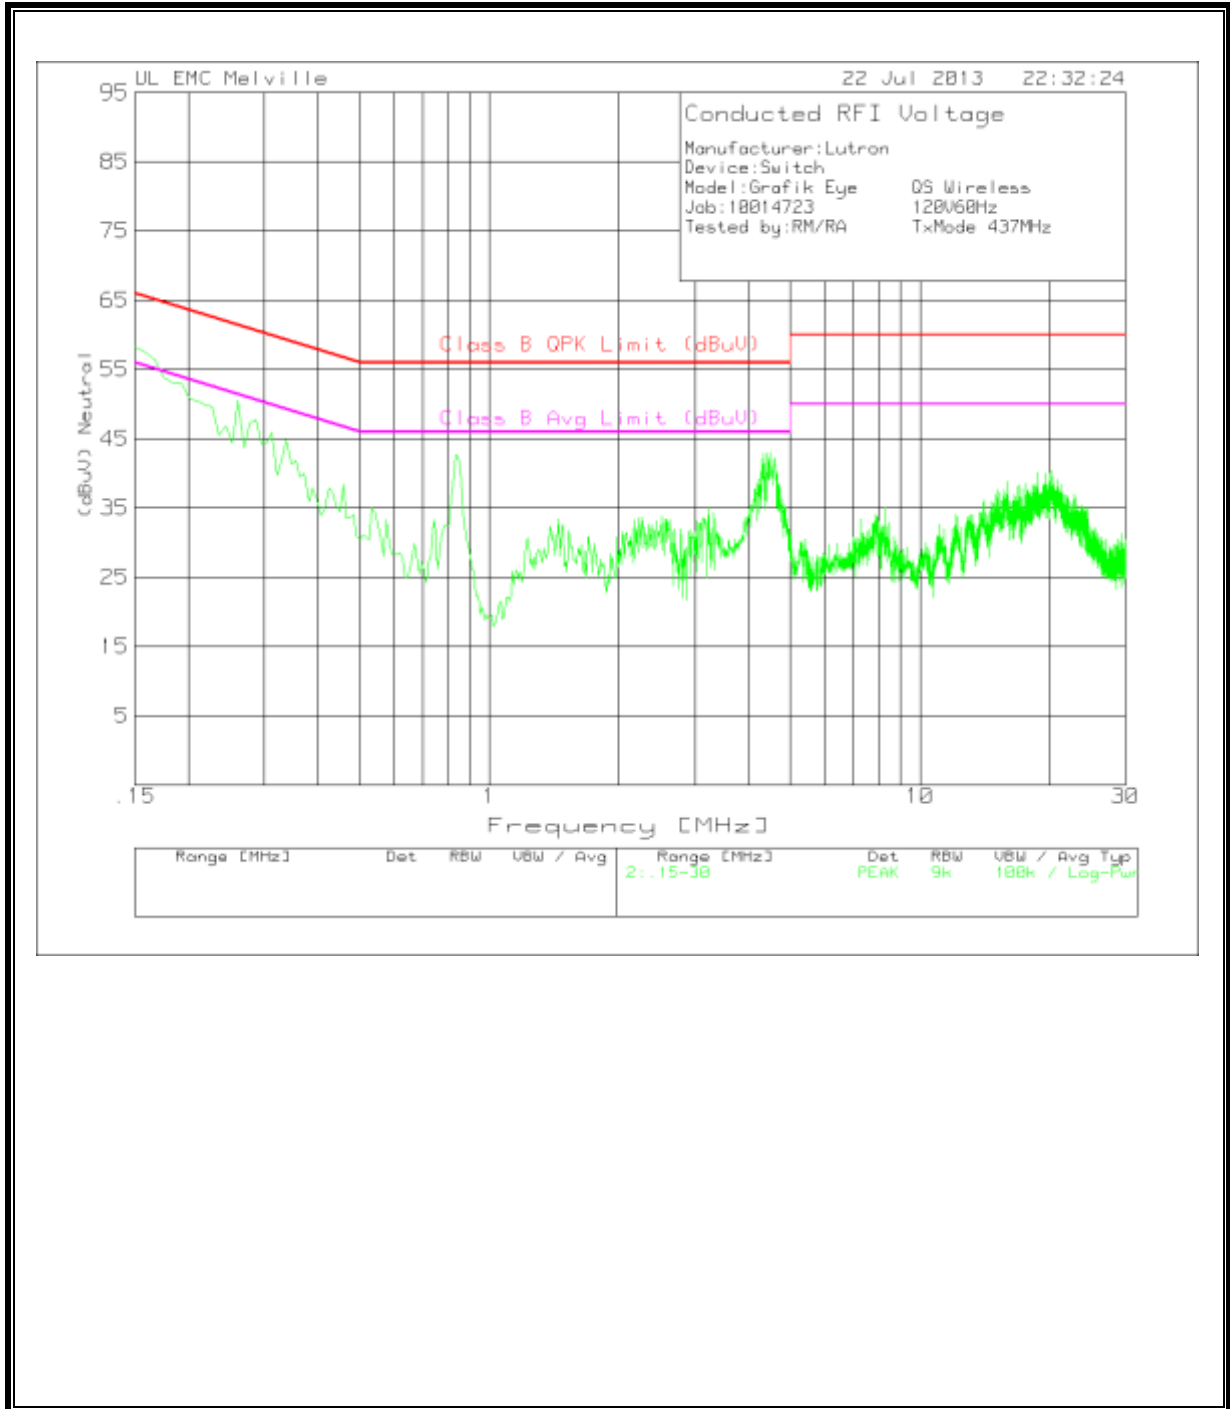


6 WORST EMISSIONS – RX Low Channel

Manufacturer:Lutron								
Device:Switch								
Model:Grafik Eye QS Wireless								
Job:10014723 120V60Hz								
Tested by:RM/RA RxMode 431MHz								
Test	Meter			Corrected	Class B		Class B Avg	
Frequency	Reading		5A636 L1	Reading	QPK Limit	Margin	Limit	Margin
(MHz)	(dBuV)	Detector	(dB)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dB)
Line - L1 .15 - 30MHz								
0.160273	44.32	QP	10	54.32	65.45	-11.13	55.45	-1.13
0.282208	35.98	QP	10	45.98	60.75	-14.77	50.75	-4.77
0.303768	32.11	QP	10	42.11	60.14	-18.03	50.14	-8.03
0.318925	31.78	QP	10	41.78	59.73	-17.95	49.73	-7.95
0.844753	29.64	QP	10	39.64	56	-16.36	46	-6.36
4.396375	25.89	QP	10.2	36.09	56	-19.91	46	-9.91
Neutral .15 - 30MHz								
0.156025	44.44	QP	10.1	54.54	65.67	-11.13	55.67	-1.13
0.157345	44.49	QP	10.1	54.59	65.6	-11.01	55.6	-1.01
0.224423	37.54	QP	10	47.54	62.65	-15.11	52.65	-5.11
0.276175	35.04	QP	10	45.04	60.93	-15.89	50.93	-5.89
0.845965	29.26	QP	10.1	39.36	56	-16.64	46	-6.64
4.594988	24.73	QP	10.2	34.93	56	-21.07	46	-11.07
0.46769	20.88	QP	10	30.88	56.55	-25.67	46.55	-15.67
Line - L1 .15 - 30MHz								
0.160273	25.75	Av	10	35.75	65.45	-29.7	55.45	-19.7
0.282208	20.86	Av	10	30.86	60.75	-29.89	50.75	-19.89
0.303768	18.25	Av	10	28.25	60.14	-31.89	50.14	-21.89
0.318925	17.24	Av	10	27.24	59.73	-32.49	49.73	-22.49
0.844753	21.49	Av	10	31.49	56	-24.51	46	-14.51
4.396375	12.35	Av	10.2	22.55	56	-33.45	46	-23.45
Neutral .15 - 30MHz								
0.156025	25.89	Av	10.1	35.99	65.67	-29.68	55.67	-19.68
0.157345	25.74	Av	10.1	35.84	65.6	-29.76	55.6	-19.76
0.224423	21.44	Av	10	31.44	62.65	-31.21	52.65	-21.21
0.276175	18.57	Av	10	28.57	60.93	-32.36	50.93	-22.36
0.845965	21.07	Av	10.1	31.17	56	-24.83	46	-14.83
4.594988	9.35	Av	10.2	19.55	56	-36.45	46	-26.45
0.46769	8.88	Av	10	18.88	56.55	-37.67	46.55	-27.67
QP - Quasi-Peak detector								
Av - Average detector								

LINE 1 RESULTS

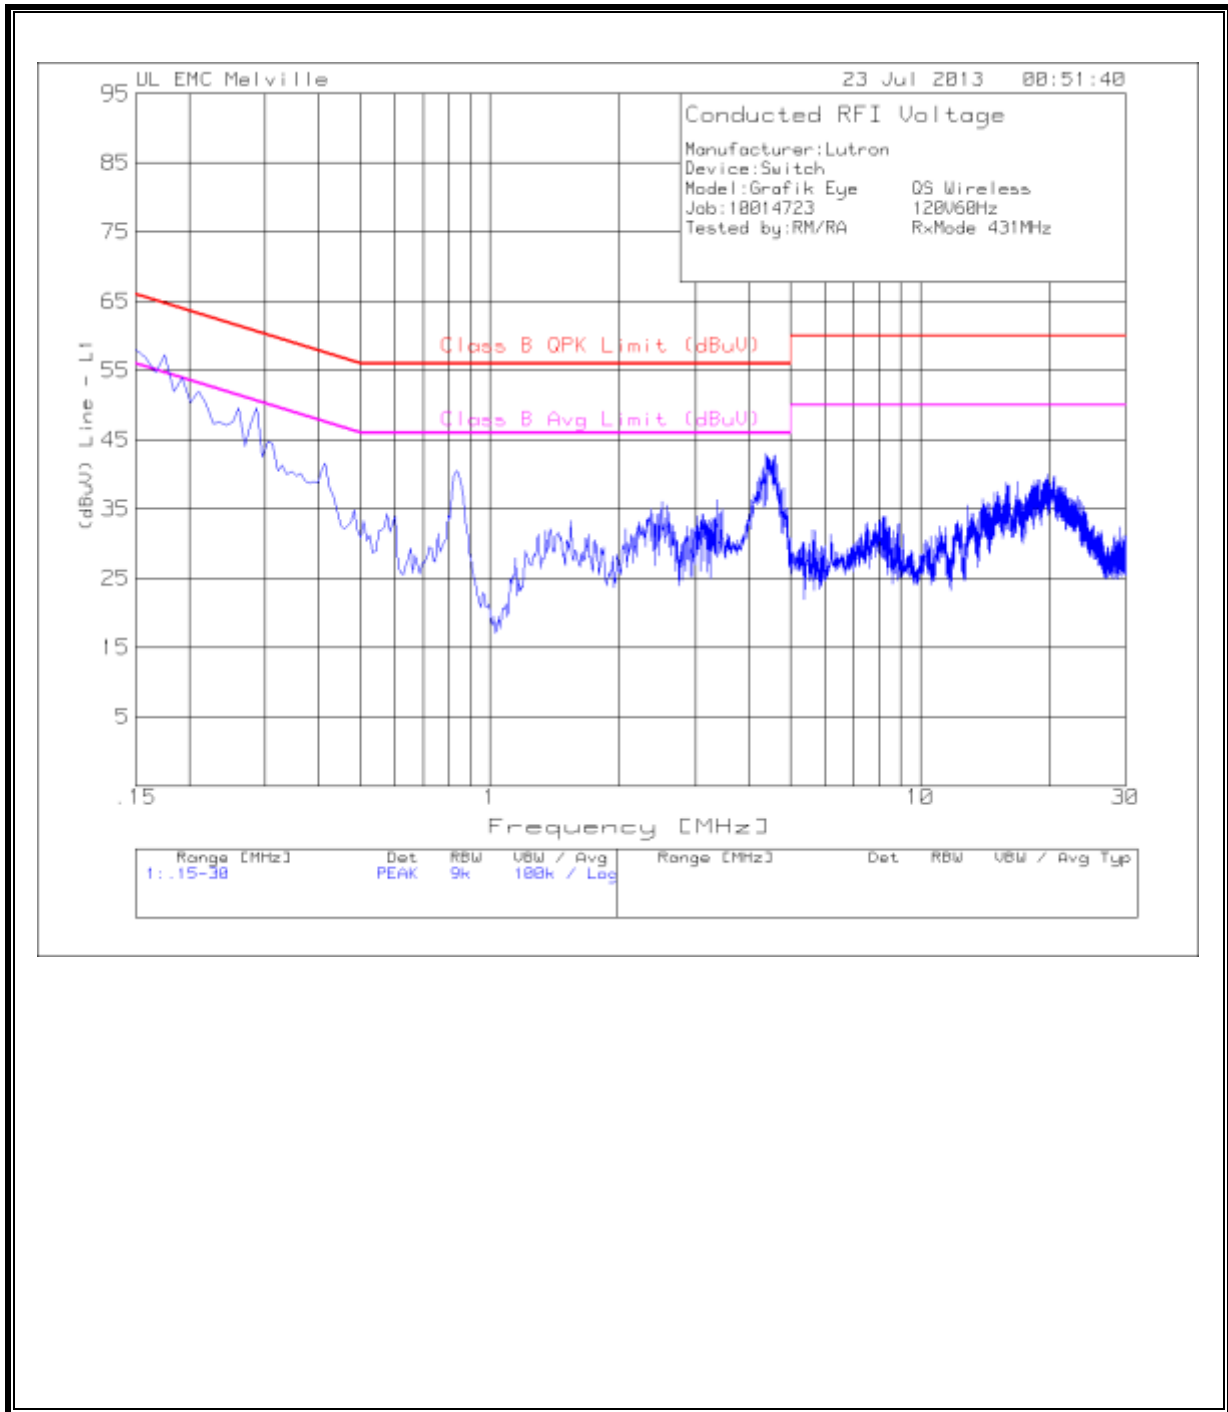


LINE 2 RESULTS

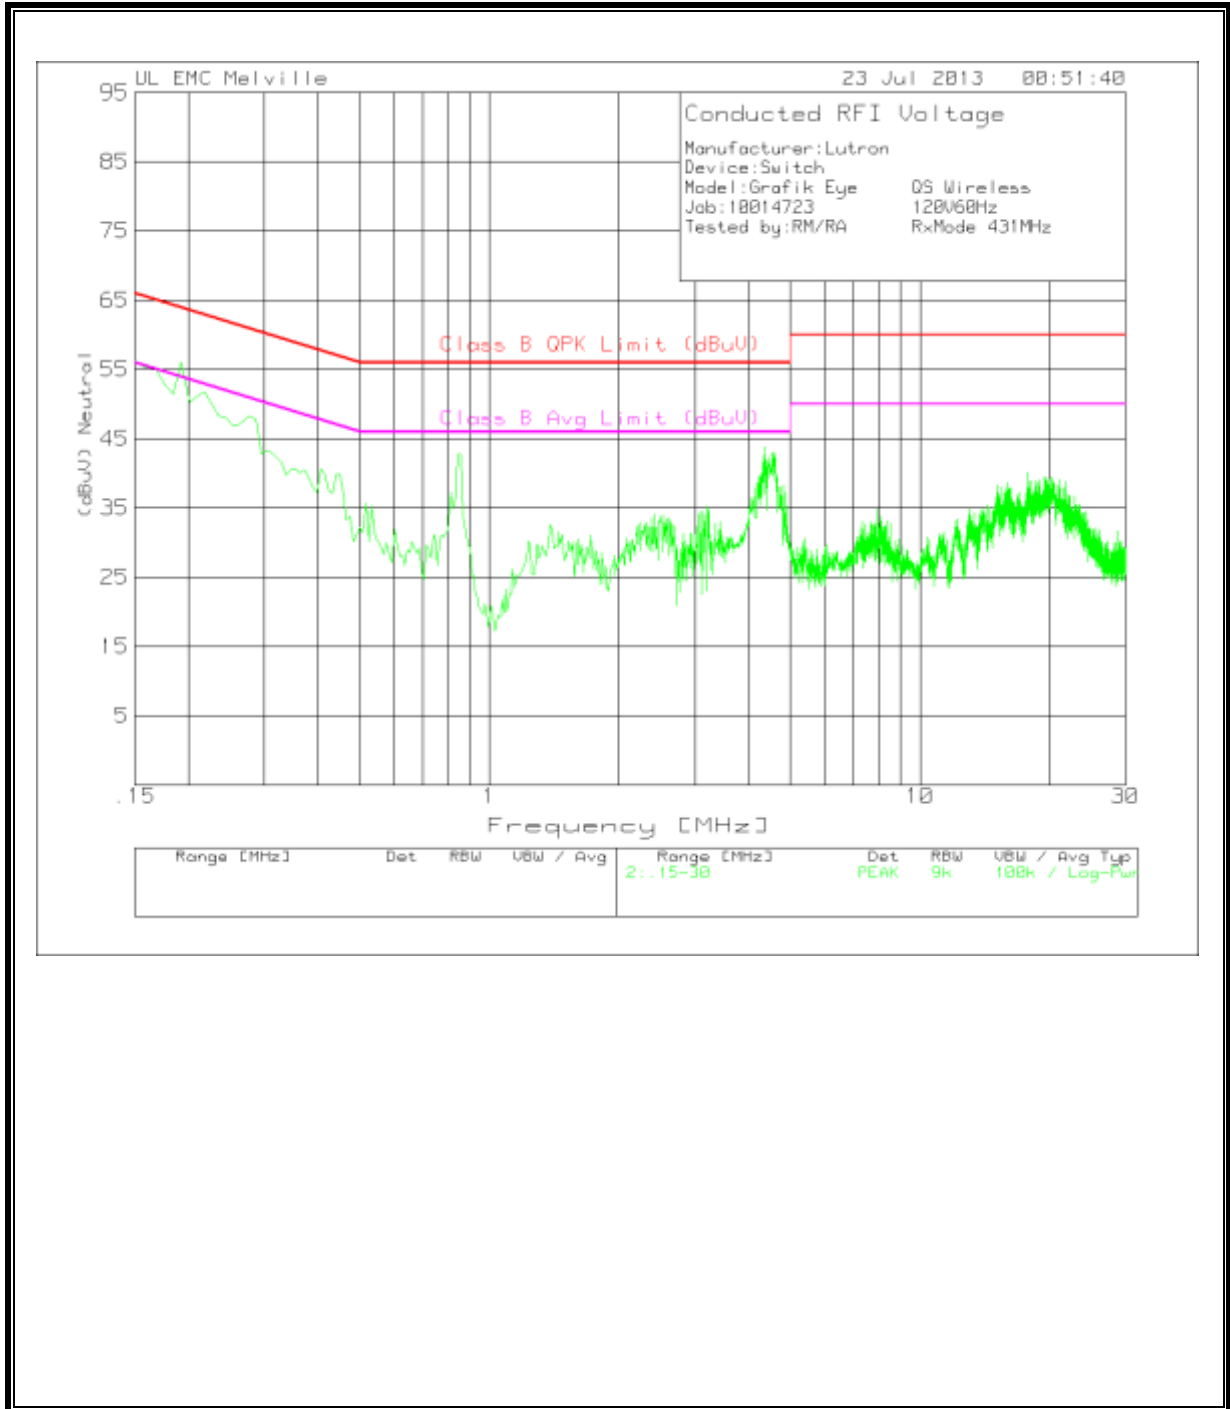


6 WORST EMISSIONS – RX High Channel

Manufacturer:Lutron								
Device:Switch								
Model:Grafik Eye QS Wireless								
Job:10014723 120V60Hz								
Tested by:RM/RA RxMode 437MHz								
Test Frequency (MHz)	Meter Reading (dBuV)	Detector	5A636 L1 (dB)	Corrected Reading (dBuV)	Class B QPK Limit (dBuV)	Margin (dB)	Class B Avg Limit (dBuV)	Margin (dB)
Line - L1 .15 - 30MHz								
0.16743	43.53	QP	10	53.53	65.09	-11.56	55.09	-1.56
0.282568	35.75	QP	10	45.75	60.74	-14.99	50.74	-4.99
0.30116	32.07	QP	10	42.07	60.21	-18.14	50.21	-8.14
0.3192	31.52	QP	10	41.52	59.73	-18.21	49.73	-8.21
0.846873	29.73	QP	10	39.73	56	-16.27	46	-6.27
4.39849	25.92	QP	10.2	36.12	56	-19.88	46	-9.88
Neutral .15 - 30MHz								
0.15718	44.21	QP	10.1	54.31	65.61	-11.3	55.61	-1.3
0.155808	44.29	QP	10.1	54.39	65.68	-11.29	55.68	-1.29
0.22365	37.34	QP	10	47.34	62.68	-15.34	52.68	-5.34
0.282778	35.89	QP	10	45.89	60.73	-14.84	50.73	-4.84
0.8474	29.2	QP	10.1	39.3	56	-16.7	46	-6.7
4.595348	25.19	QP	10.2	35.39	56	-20.61	46	-10.61
0.467758	20.96	QP	10	30.96	56.55	-25.59	46.55	-15.59
Line - L1 .15 - 30MHz								
0.16743	25.39	Av	10	35.39	65.09	-29.7	55.09	-19.7
0.282568	21.39	Av	10	31.39	60.74	-29.35	50.74	-19.35
0.30116	17.87	Av	10	27.87	60.21	-32.34	50.21	-22.34
0.3192	17.2	Av	10	27.2	59.73	-32.53	49.73	-22.53
0.846873	21.5	Av	10	31.5	56	-24.5	46	-14.5
4.39849	12.31	Av	10.2	22.51	56	-33.49	46	-23.49
Neutral .15 - 30MHz								
0.15718	25.57	Av	10.1	35.67	65.61	-29.94	55.61	-19.94
0.155808	25.91	Av	10.1	36.01	65.68	-29.67	55.68	-19.67
0.22365	21.32	Av	10	31.32	62.68	-31.36	52.68	-21.36
0.282778	20.44	Av	10	30.44	60.73	-30.29	50.73	-20.29
0.8474	21.08	Av	10.1	31.18	56	-24.82	46	-14.82
4.595348	9.04	Av	10.2	19.24	56	-36.76	46	-26.76
0.467758	8.87	Av	10	18.87	56.55	-37.68	46.55	-27.68
QP - Quasi-Peak detector								
Av - Average detector								

LINE 1 RESULTS

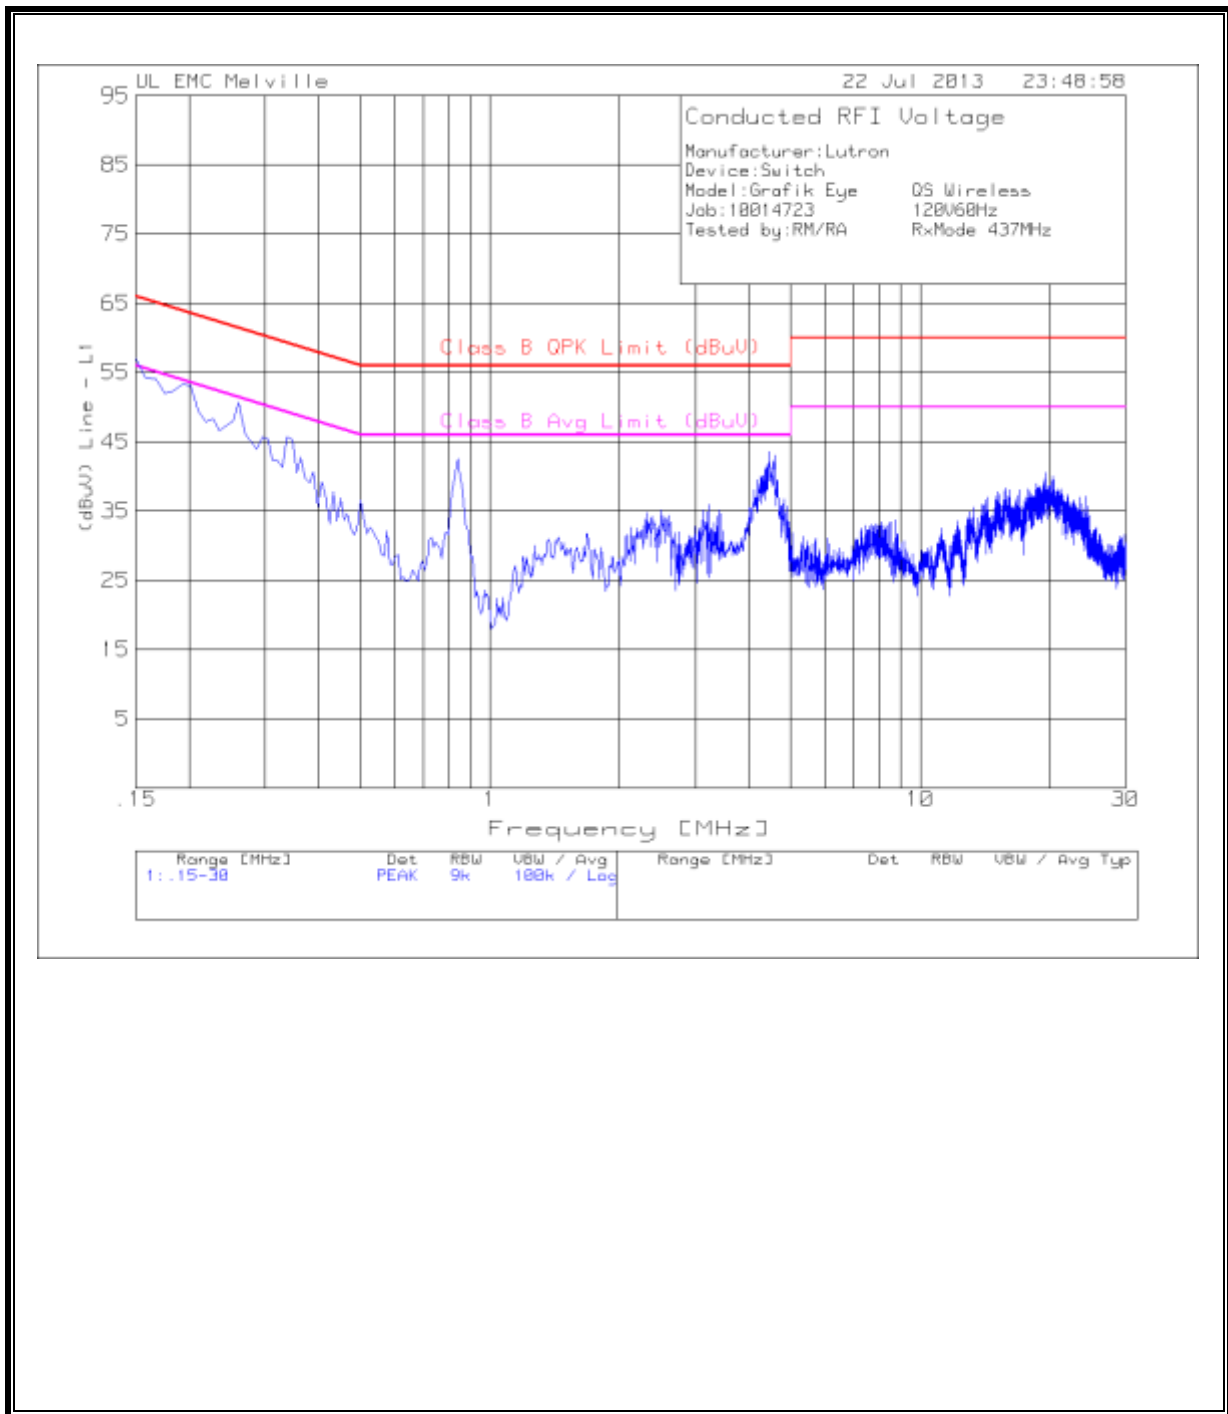


LINE 2 RESULTS

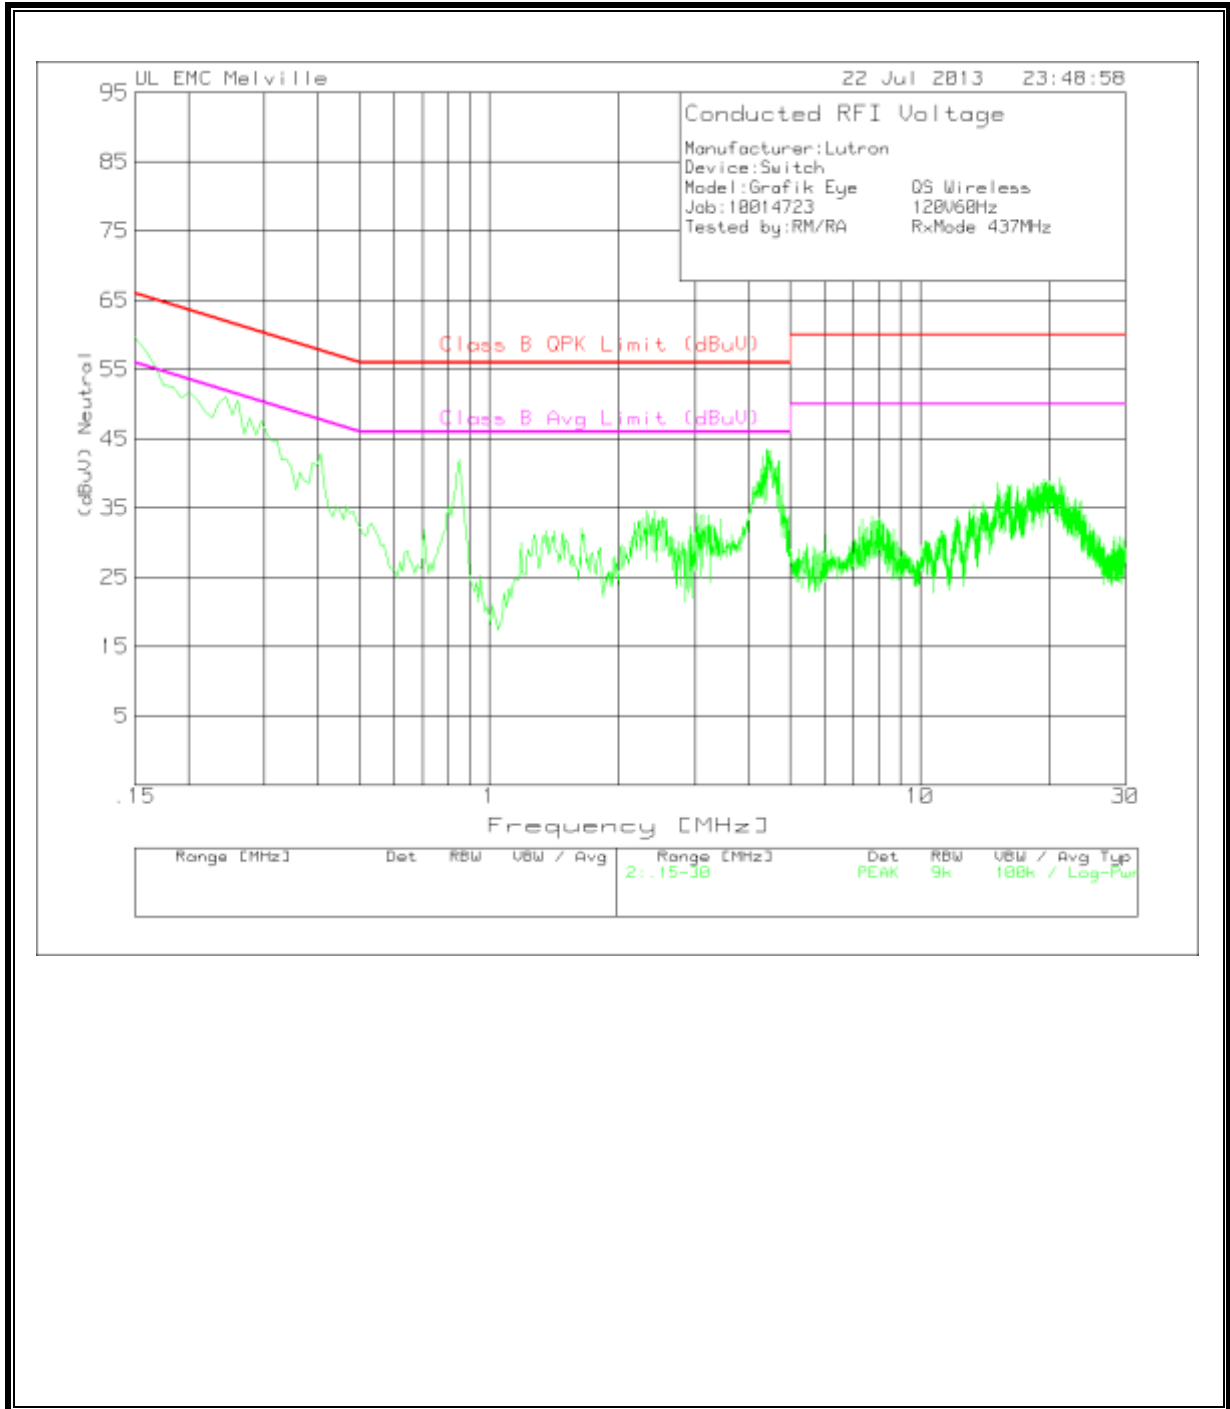


10. SETUP PHOTOS

ANTENNA PORT

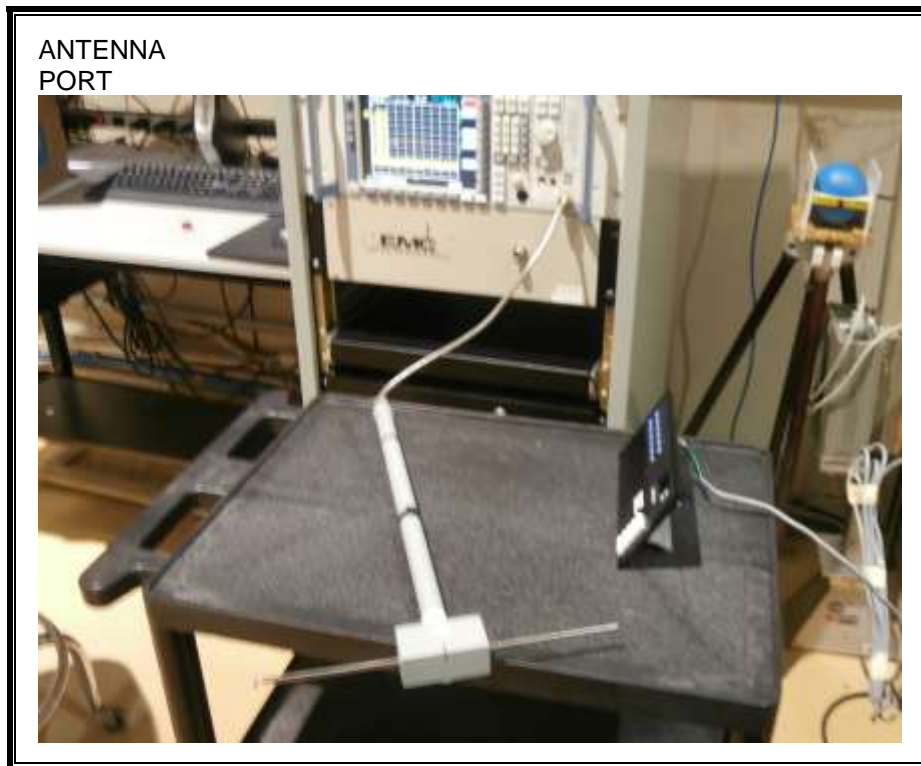


RADIATED EMISSION ABOVE 30 MHz

RADIATED EMISSIONS ABOVE 30 MHz (FRONT)

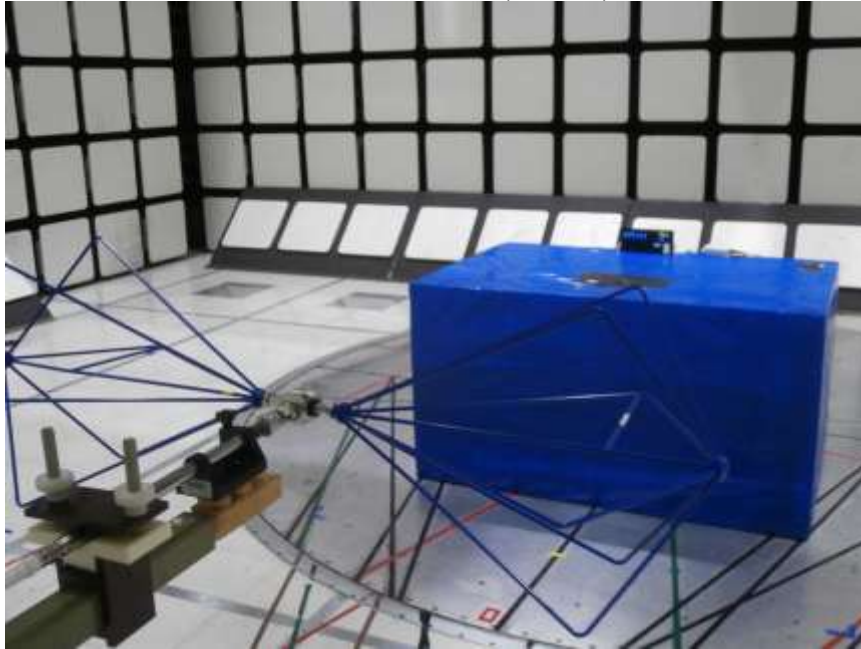

RADIATED EMISSIONS ABOVE 30 MHz (BACK)

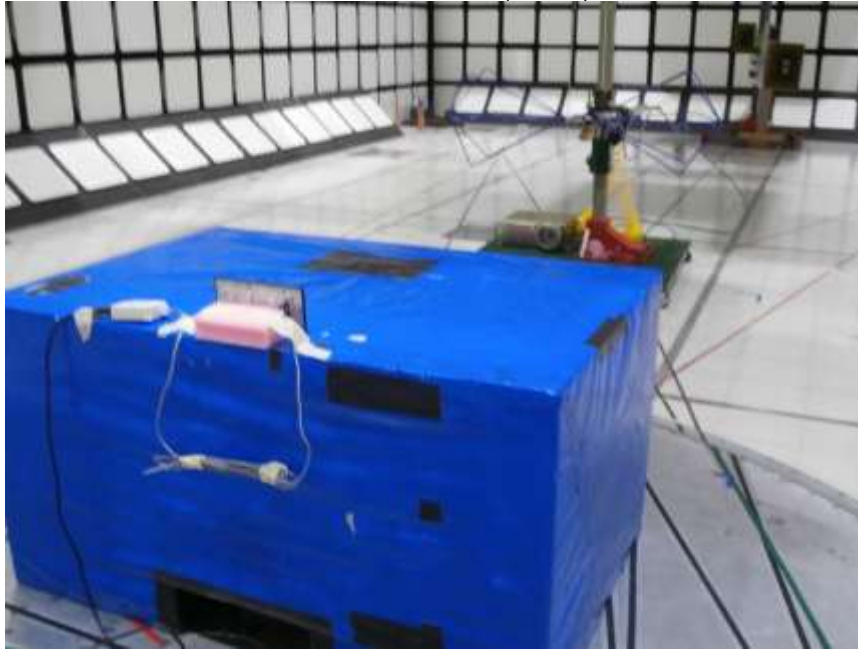

AC MAINS LINE CONDUCTED EMISSION



LINE CONDUCTED EMISSION (BACK)



END OF REPORT