



RF TEST REPORT



Report No.: FCC-IC_RF_SL14021101-HID-004 (R90)
Supersede Report No.: NONE

Applicant	HID Global Corporation		
Product Name	iCLASS R90 SE RFID Reader		
Model No.	R90E		
Test Standard	47CFR15.225: 2013 RSS210 Issue 8: 2010		
Test Method	ANSI C63.4: 2009 RSS Gen Issue 3: 2010		
Date of test	01/30/2014 - 02/28/2014		
Issue Date	04/04/2014		
Test Result	<u>Pass</u> Fail		
Equipment complied with the specification			[x]
Equipment did not comply with the specification			[]
			
David Zhang		Nima Molaei	
Test Engineer		Engineer Reviewer	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only			

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:    

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF , Telecom
HongKong	OFTA (US002)	RF , Telecom

CONTENTS

1 REPORT REVISION HISTORY4

2 EXECUTIVE SUMMARY5

3 CUSTOMER INFORMATION5

4 TEST SITE INFORMATION5

5 MODIFICATION5

6 EUT INFORMATION6

6.1 EUT Description6

6.2 Radio Description7

6.3 EUT test modes/configuration Description.....7

6.4 EUT Photos - External8

6.5 EUT Photos - Internal9

6.6 EUT Test Setup Photos10

7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....11

7.1 Supporting Equipment11

7.2 Test Software Description11

8 TEST SUMMARY12

9 MEASUREMENT UNCERTAINTY13

10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS14

10.1 Antenna Requirement.....14

10.2 Conducted Emissions.....15

10.3 Radiated Measurement below 30MHz.....18

10.4 Occupied bandwidth23

10.5 Frequency Stability25

10.6 Radiated Emissions below 1GHz.....27

ANNEX A. TEST INSTRUMENT29

ANNEX B. USER MANUAL, BLOCK & CIRCUIT DIAGRAM30

ANNEX C. SIEMIC ACCREDITATION31

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC-IC_RF_SL14021101-HID-004 (R90)	Original	Original	04/04/2014

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: HID Global Corporation
Product: iCLASS R90 SE RFID Reader
Model: R90E

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	HID Global Corporation
Applicant Address	15370 Barranca Parkway, Irvine, CA 92618
Manufacturer Name	HID Global Corporation
Manufacturer Address	10385 Westmoor Drive, Suite 300, Westminster, CO 80021

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	iCLASS R90 SE RFID Reader
Model No.	R90E
Trade Name	HID
Serial No.	N/A
Input Power	12 Volts DC
Power Adapter Manu/Model	-
Power Adapter SN	-
Hardware version	N/A
Software version	N/A
Date of EUT received	01/30/2014
Equipment Class/ Category	DXX
Clock Frequencies	27.12 MHz (Clock), 13.56 MHz (Radio)
Port/Connectors	-
Remark	-
AC Power Cord Type	-
DC Power Cable Type	-

6.2 Radio Description

Spec for Radio –

Radio Type	RFID
Operating Frequency	13.56MHz
Modulation	AM
Antenna Type	Mag Loop Antenna Integral
Antenna Gain	1dBi

6.3 EUT test modes/configuration Description


Test mode

Final Test Mode	Note
Final_test_mode_1	Continuous TX at 13.56MHz
Final_test_mode_2	-
Final_test_mode_3	-
Final_test_mode_4	-
Final_test_mode_5	-
Final_test_mode_6	-
Final_test_mode_7	-
Final_test_mode_8	-
Final_test_mode_9	-
Remark:	

6.4 EUT Photos - External



EUT – Front View

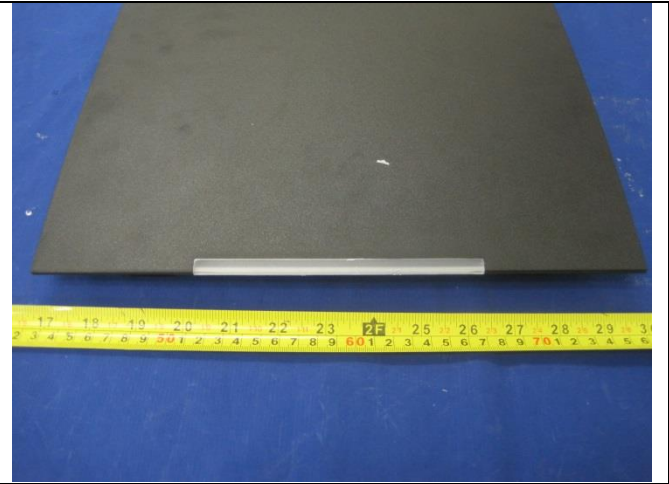


EUT – Rear View



EUT – Left View



EUT – Right View

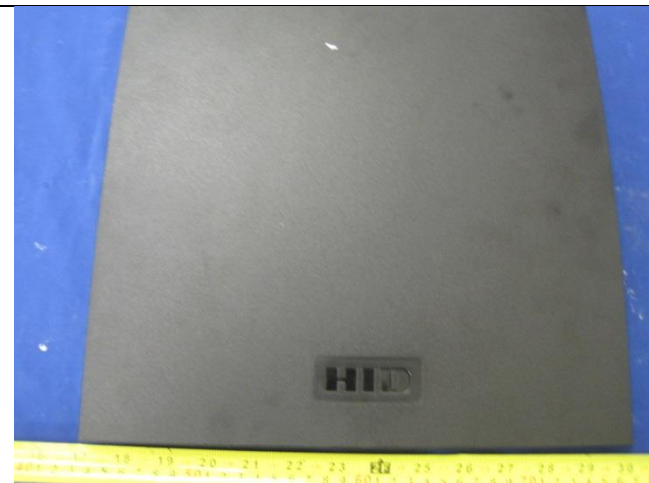

EUT – Top View




EUT – Bottom View


6.5 EUT Photos - Internal




PCB1 Top View

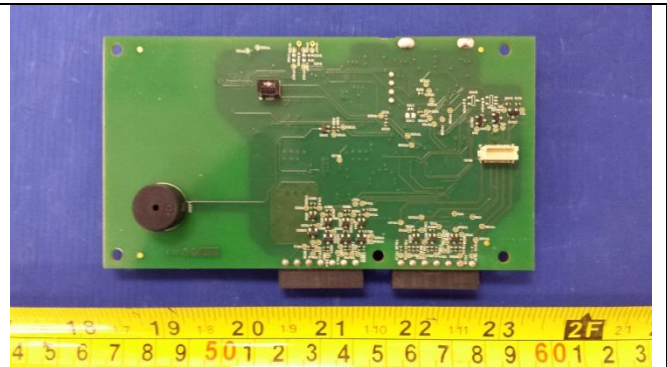


PCB1 Bottom View

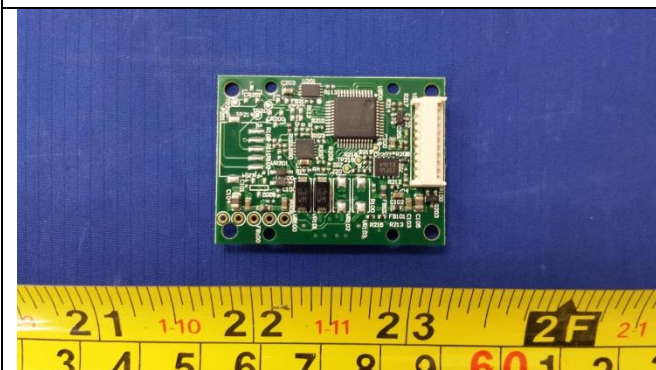


PCB2 Top View

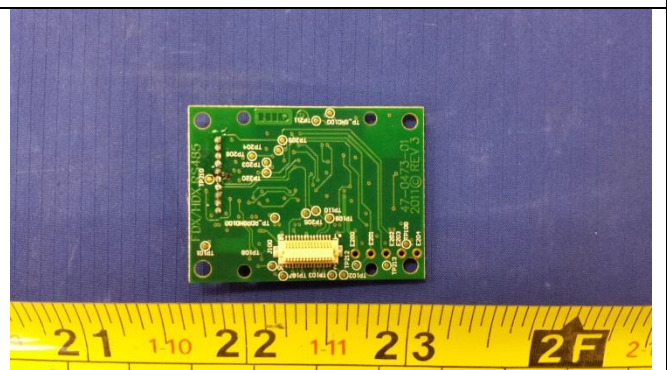

PCB2 Bottom View

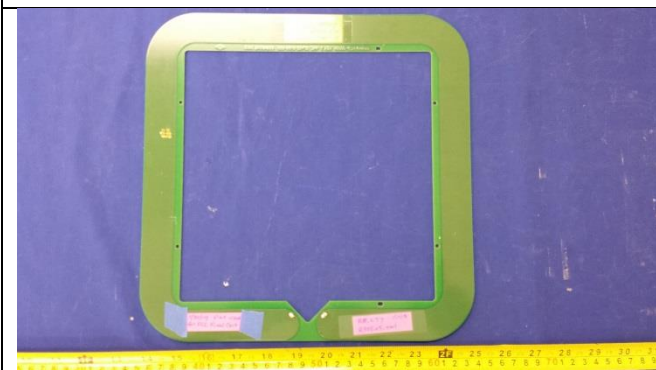

Antenna Top View

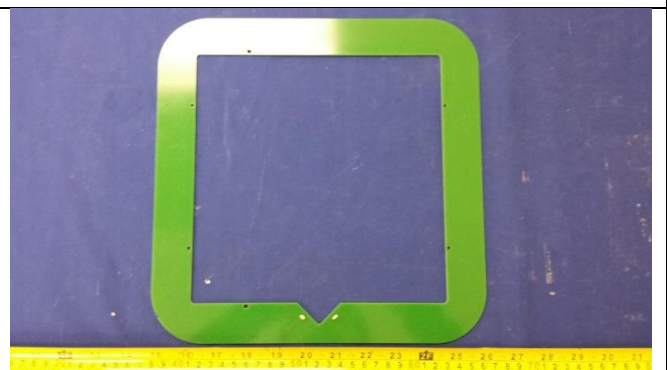

Antenna Bottom View


6.6 EUT Test Setup Photos




AC Line Conducted Emissions – Front View



AC Line Conducted Emissions – Rear View

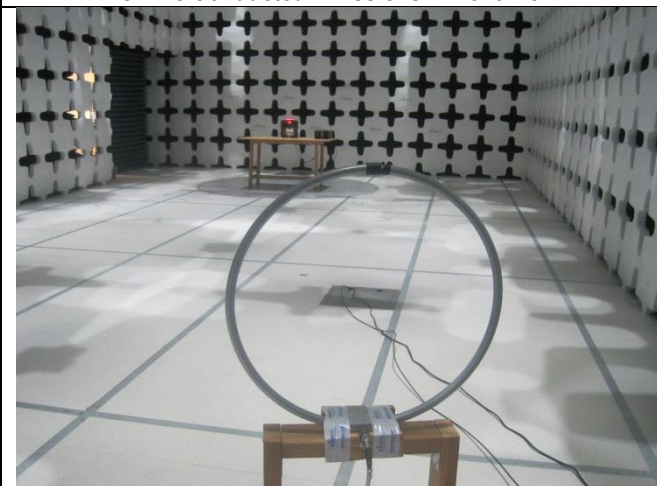


Radiated Emissions (<30MHz) – Front View

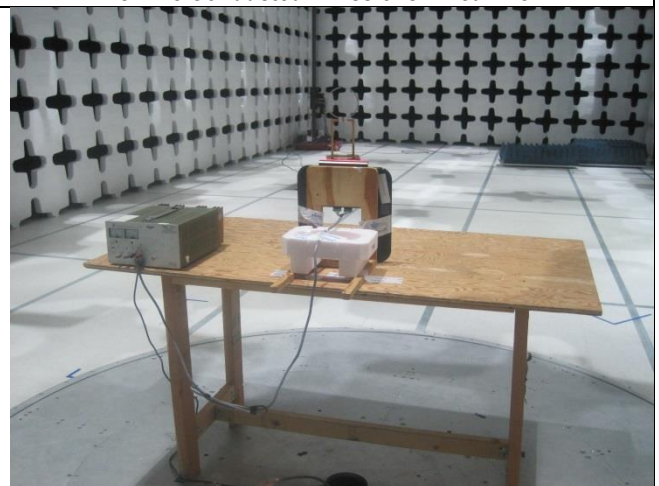

Radiated Emissions (<30MHz) – Rear View



Radiated Emissions (<1GHz) – Front View

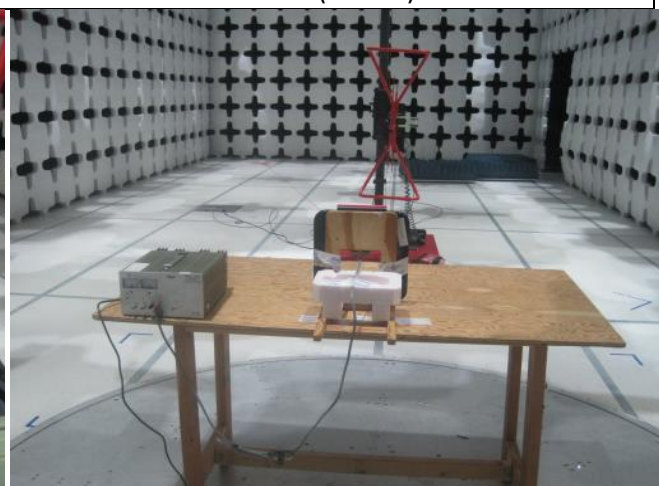

Radiated Emissions (<1GHz) – Rear View

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Antenna Requirement	FCC	15.203	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen (7.1.2)	IC	-	<input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.4 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen (7.2.2)	IC	RSS Gen (7.2.2)	<input type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Limit in the band of 13.553 – 13.567 MHz	FCC	15.225(a)	FCC	ANSI C63.4 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	FCC	15.225(b)	FCC	ANSI C63.4 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	FCC	15.225(c)	FCC	ANSI C63.4 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Limit outside the band of 13.110 – 14.010 MHz	FCC	15.225(d), 15.209	FCC	ANSI C63.4 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Frequency Stability	FCC	15.225(e)	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.7	<input type="checkbox"/> N/A
Occupied Bandwidth	FCC	-	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS-210(5.9.1)	IC	RSS Gen 4.6	<input type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. Test Method: ANSI C63.4: 2009 / RSS – Gen Issue 3: 2010 				

9 Measurement Uncertainty

Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions Voltage	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±3.5dB
Limit in the band of 13.553 – 13.567 MHz	13.553 – 13.567 MHz		+5.6dB/-4.5dB
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	13.410 – 13.553 MHz and 13.567 – 13.710 MHz		+5.6dB/-4.5dB
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	13.110 – 13.410 MHz and 13.710 – 14.010 MHz		+5.6dB/-4.5dB
Limit outside the band of 13.110 – 14.010 MHz	9KHz – 30MHz		+5.6dB/-4.5dB
Radiated Spurious Emissions	30MHz – 1GHz		+5.6dB/-4.5dB

10 Measurements, Examination and Derived Results


10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p>	<input checked="" type="checkbox"/>
Remark	The RFID antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

10.2 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

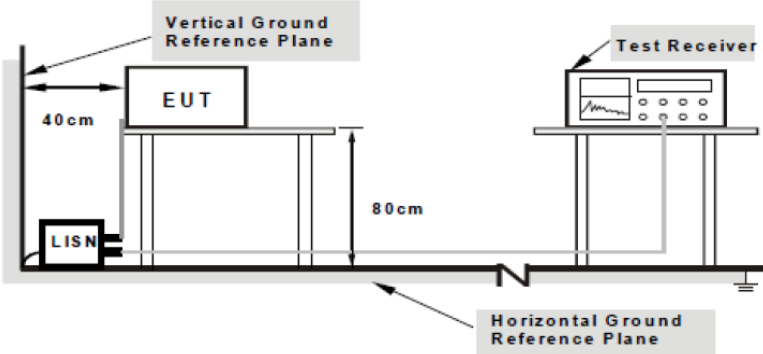
Spec	Item	Requirement	Applicable
47CFR§15.207, RSS210(A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup	 <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>		
Procedure	<ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment were powered separately from another main supply. 		
Remark	Testing is performed with dummy load on antenna port.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A


Conducted Emission Test Results (AC Line Test Result)

Environmental Conditions:	Temp (°C):	25	Result	Pass
	Humidity (%)	45		
	Atmospheric (mPa):	1008		
Mains Power:	12VDC			
Tested by:	David Zhang			
Test Date:	02/27/2014			
Remarks:	The frequency at 13.56MHz is fundamental			

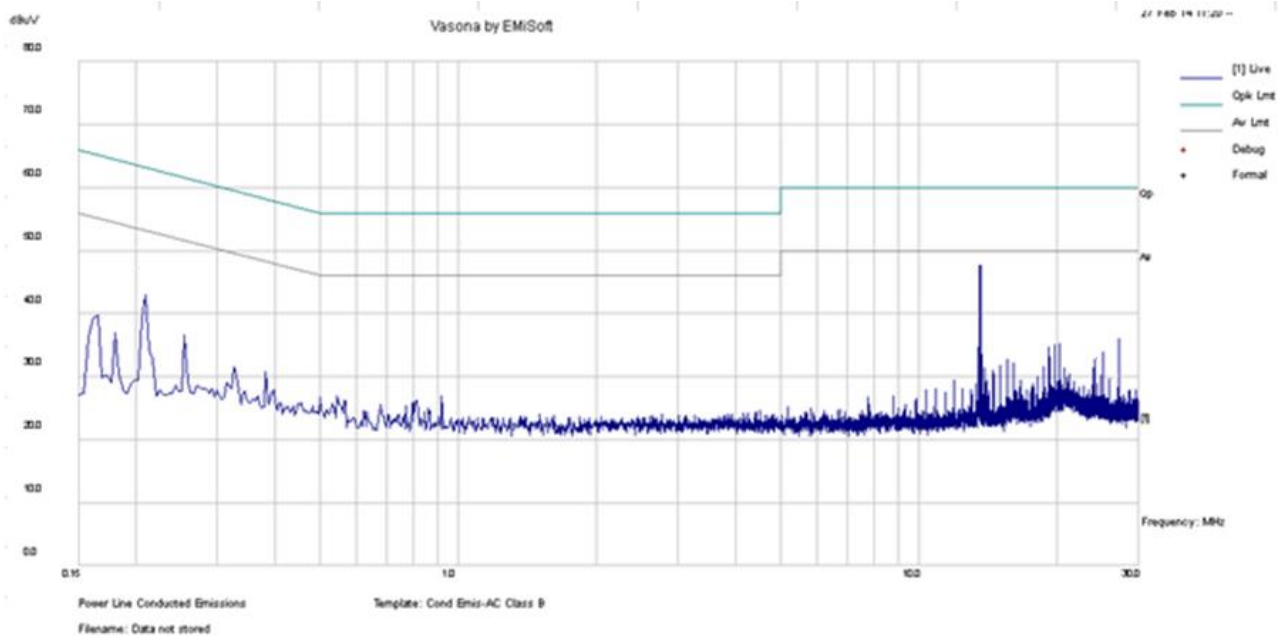

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
0.19	12.55	10.00	0.74	23.29	Quasi Peak	Live	63.88	-40.58	Pass
27.12	18.03	10.08	2.27	30.39	Quasi Peak	Live	60.00	-29.61	Pass
20.19	7.67	10.07	2.27	20.01	Quasi Peak	Live	60.00	-39.99	Pass
25.06	20.79	10.08	2.27	33.14	Quasi Peak	Live	60.00	-26.86	Pass
0.27	11.29	10.00	0.72	22.01	Quasi Peak	Live	61.11	-39.10	Pass
0.16	17.41	10.00	0.75	28.16	Quasi Peak	Live	65.33	-37.17	Pass
0.19	1.11	10.00	0.74	11.86	Average	Live	53.88	-42.02	Pass
27.12	6.22	10.08	2.27	18.57	Average	Live	50.00	-31.43	Pass
20.19	3.12	10.07	2.27	15.46	Average	Live	50.00	-34.54	Pass
25.06	20.83	10.08	2.27	33.18	Average	Live	50.00	-16.82	Pass
0.27	-7.03	10.00	0.72	3.69	Average	Live	51.11	-47.41	Pass
0.16	-0.62	10.00	0.75	10.13	Average	Live	55.33	-45.20	Pass

Environmental Conditions:	Temp (°C):	25	Result	Pass
	Humidity (%)	45		
	Atmospheric (mPa):	1008		
Mains Power:	12VDC			
Tested by:	David Zhang			
Test Date:	02/27/2014			
Remarks:	The frequency at 13.56MHz is fundamental			

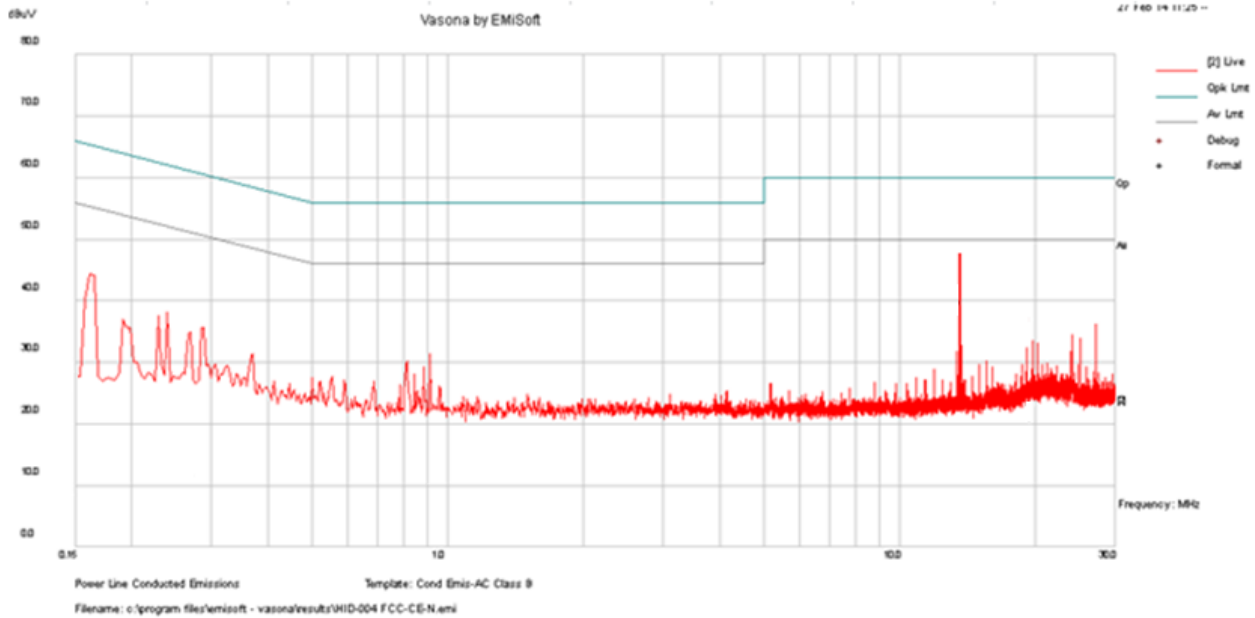

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line	Limit dBuV	Margin dB	Pass /Fail
0.15	17.76	10.00	0.76	28.51	Quasi Peak	N	65.96	-37.45	Pass
27.12	18.89	10.08	2.27	31.24	Quasi Peak	N	60.00	-28.76	Pass
0.22	13.39	10.00	0.74	24.13	Quasi Peak	N	62.75	-38.62	Pass
0.90	0.23	10.01	0.77	11.02	Quasi Peak	N	56.00	-44.98	Pass
0.27	8.08	10.00	0.72	18.81	Quasi Peak	N	61.04	-42.23	Pass
19.67	11.09	10.07	2.24	23.40	Quasi Peak	N	60.00	-36.60	Pass
0.15	-3.09	10.00	0.76	7.67	Average	N	55.96	-48.29	Pass
27.12	6.89	10.08	2.27	19.24	Average	N	50.00	-30.76	Pass
0.22	-4.99	10.00	0.74	5.75	Average	N	52.75	-47.00	Pass
0.90	-6.73	10.01	0.77	4.06	Average	N	46.00	-41.94	Pass
0.27	1.18	10.00	0.72	11.90	Average	N	51.04	-39.14	Pass
19.67	8.95	10.07	2.24	21.26	Average	N	50.00	-28.74	Pass

10.3 Radiated Measurement below 30MHz

Requirement(s):

Spec	Item	Requirement	Applicable
47 CFR §15.225 RSS-210 (A2.6)	a)	Operation within the band 13.110–14.010 MHz. (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.	<input checked="" type="checkbox"/>
Test Setup	1. 2. 3.	The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable. The relevant loop antenna was set at the required test distance away from the EUT and supporting equipment boundary.	
Procedure		For < 30MHz, Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set 10 meters away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10 kHz. The limit is converted from microvolt/meter to decibel microvolt/meter.	
Remark		-	
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	


Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A


Radiated Emission Test Results (Below 30MHz)

Plot: 100 kHz – 30 MHz emission @ 10m

Loop Antenna at 0 & 90 degree

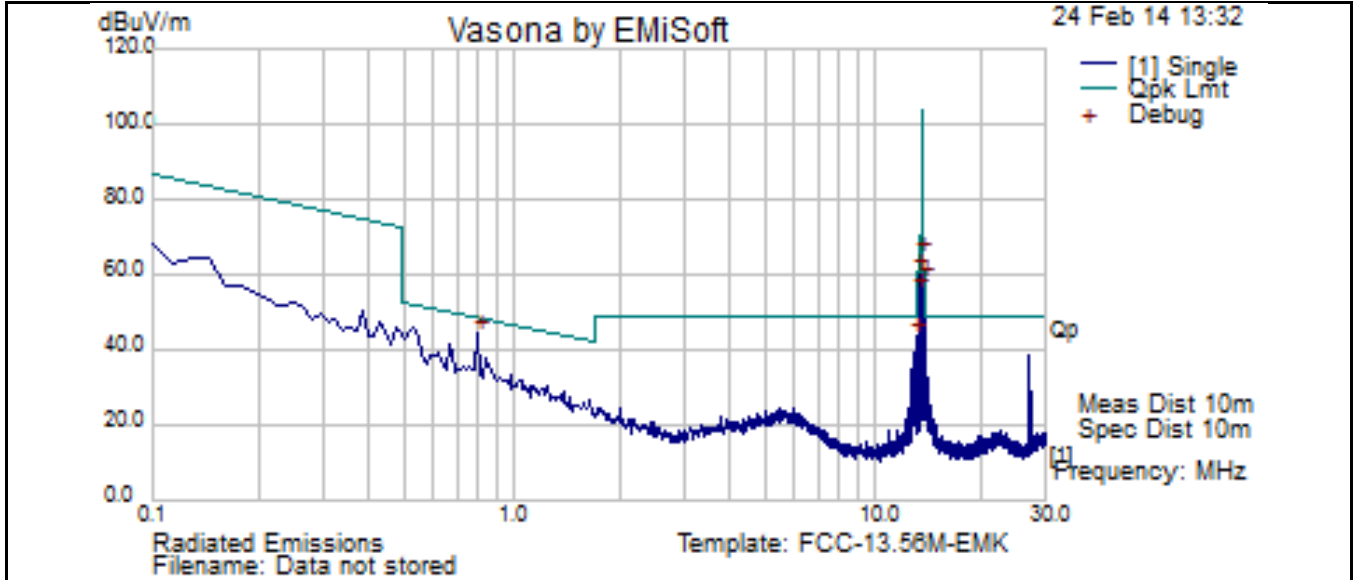


FCC 15.225-13.56MHz-TX-RSE-0 deg

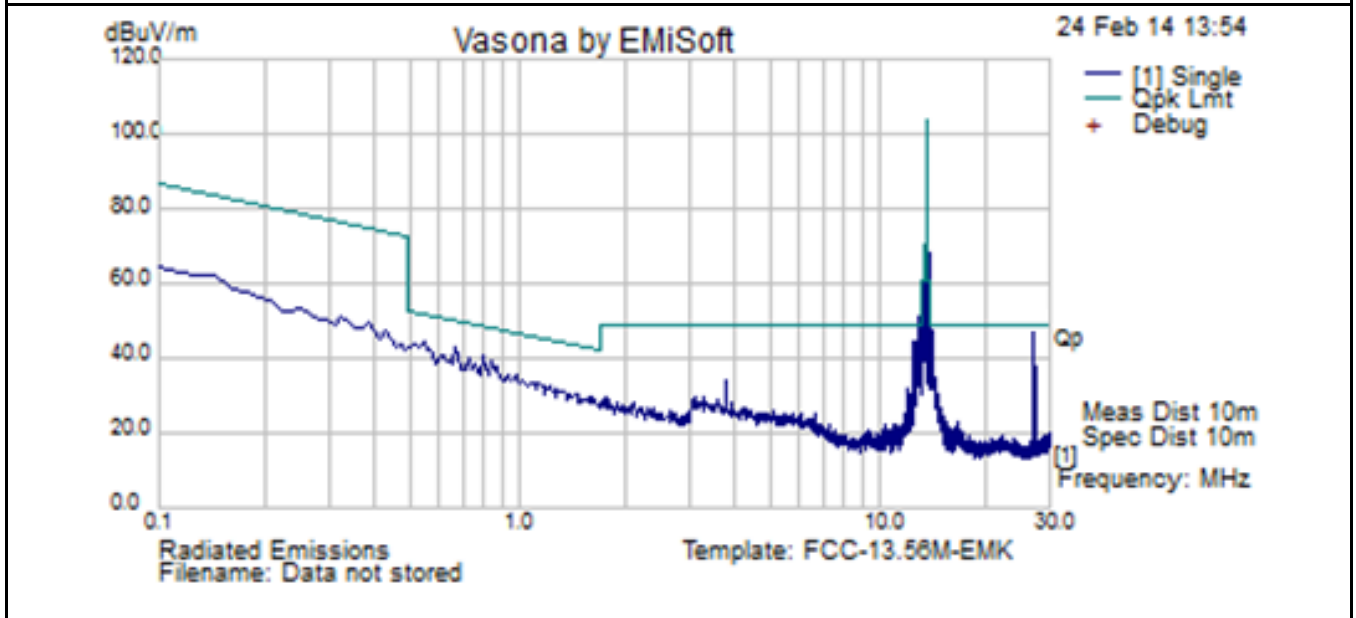

FCC 15.225-13.56MHz-TX-RSE-90 deg

Plot: Prescan Emission Mask Measurement @ 3m between 13.06 MHz – 14.06 MHz

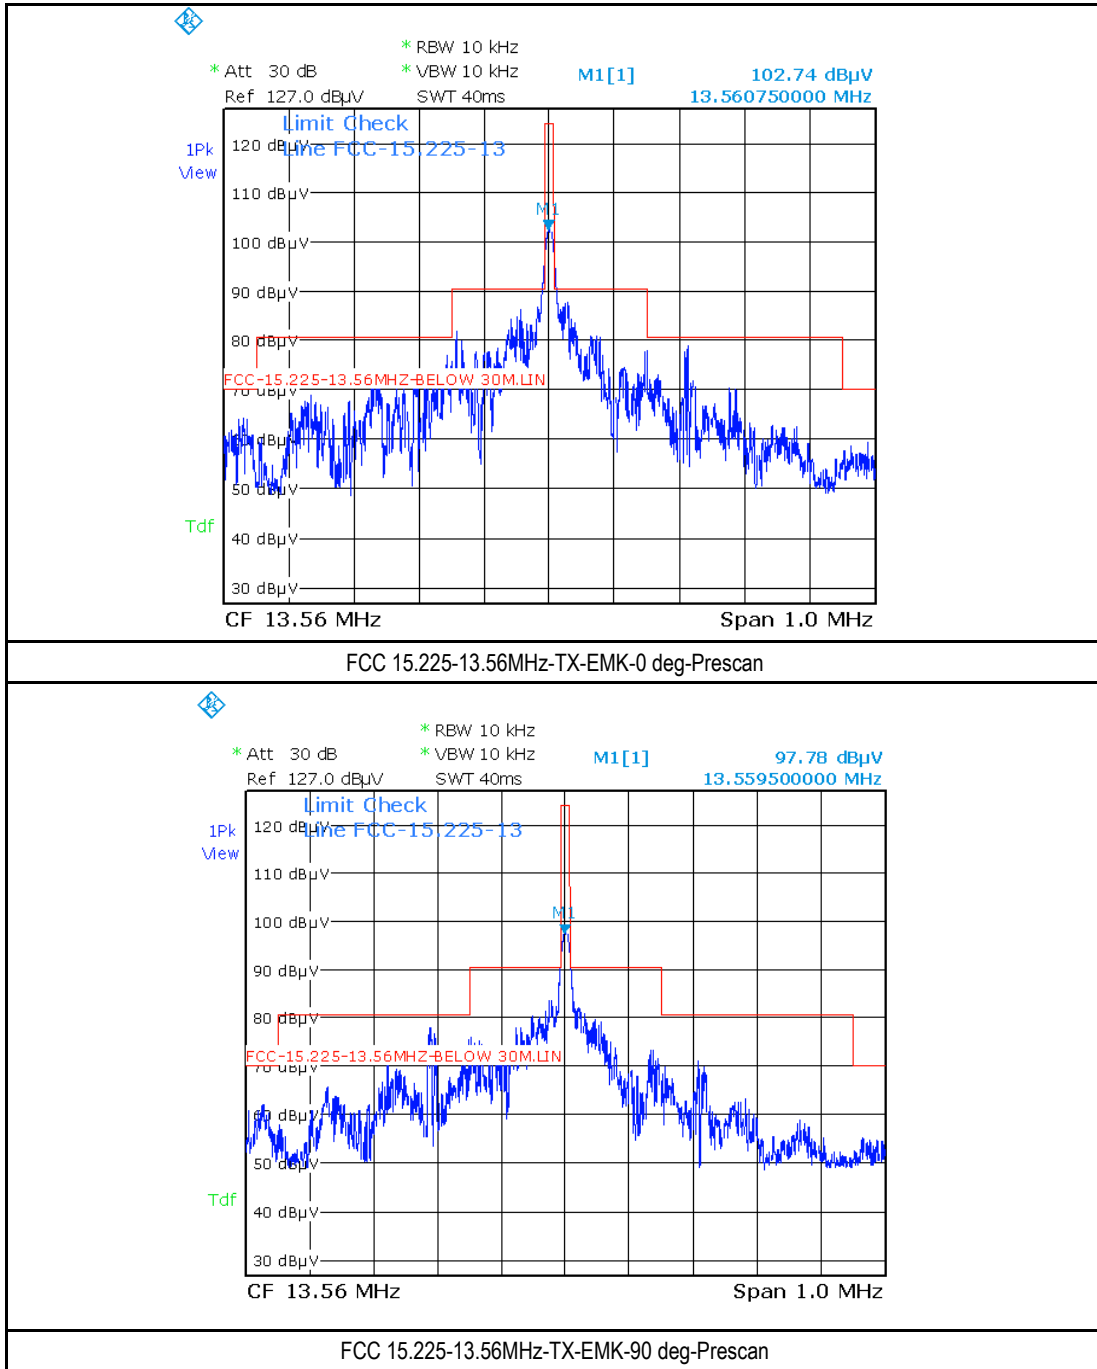


Note:

1. The measurement shown on above plots were made at 10m distance but the result was corrected to 3m due to the limit setting on the instrument was using 3 m emission limit.

Plot: Final Emission Mask Measurement @ 10m between 13.46 MHz – 13.66 MHz

Loop Antenna at 0 degree


Test specification	Emission Mask		Result	Pass
Environmental Conditions:	Temp (°C):	22		
	Humidity (%):	48		
	Atmospheric (mbar):	1008		
Mains Power:	12VDC			
Tested by:	David Zhang			
Test Date:	02/24/2014			
Remarks:	Cont -TX			

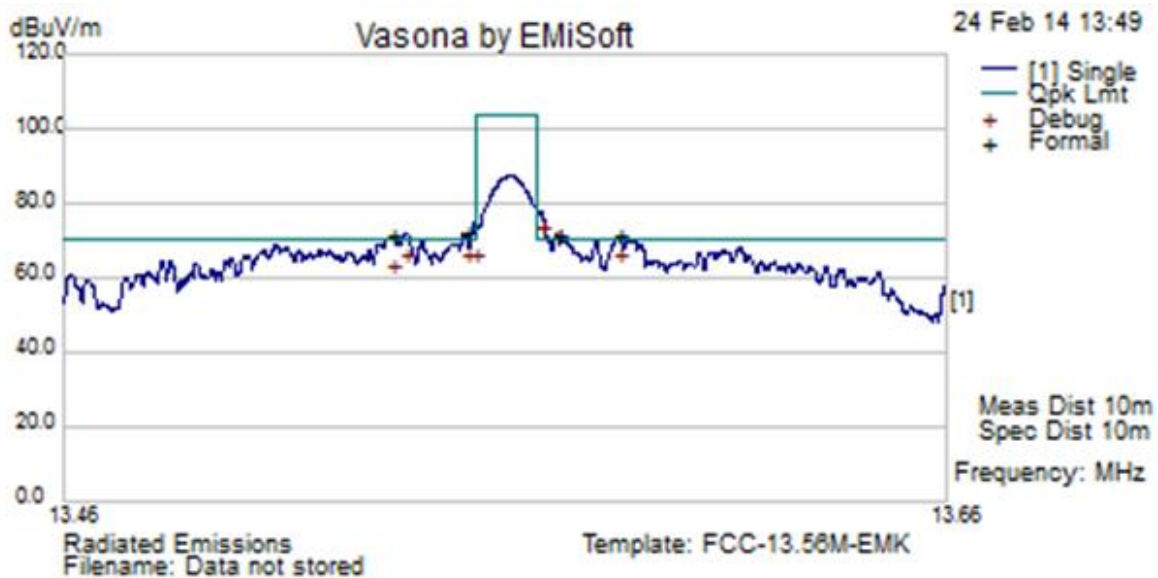

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
13.537	65.0	0.1	-2.4	62.7	Quasi-Peak	0 deg	100	102	70.5	-7.8	Pass
13.571	70.1	0.1	-2.4	67.8	Quasi-Peak	0 deg	100	102	70.5	-2.7	Pass
13.585	64.8	0.1	-2.4	62.5	Quasi-Peak	0 deg	100	102	70.5	-8.0	Pass
13.551	64.9	0.1	-2.4	62.6	Quasi-Peak	0 deg	100	102	70.5	-7.9	Pass
13.534	62.4	0.1	-2.4	60.1	Quasi-Peak	0 deg	100	102	70.5	-10.4	Pass
13.553	65.4	0.1	-2.4	63.1	Quasi-Peak	0 deg	100	102	70.5	-7.4	Pass
13.560	87.3	0.1	-2.37	85.03	Quasi-Peak	0 deg	100	235	104.0	-12.99	Pass

Loop Antenna at 90 degree

Test specification	Emission Mask		Result	Pass
Environmental Conditions:	Temp (°C):	22		
	Humidity (%)	48		
	Atmospheric (mbar):	1008		
Mains Power:	12VDC			
Tested by:	David Zhang			
Test Date:	02/24/2014			
Remarks:	Cont -TX			

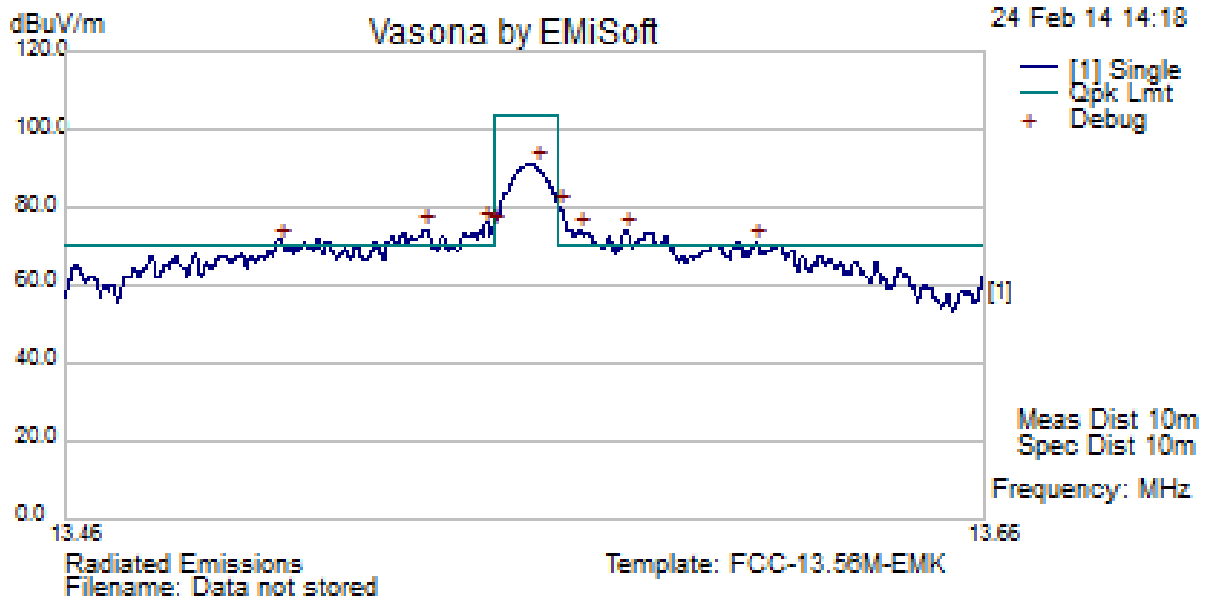

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
13.568	72.1	0.1	-2.4	69.8	Quasi-Peak	90 deg	100	235	70.5	-0.7	Pass
13.572	71.0	0.1	-2.4	68.7	Quasi-Peak	90 deg	100	235	70.5	-1.8	Pass
13.610	68.4	0.1	-2.4	66.1	Quasi-Peak	90 deg	100	235	70.5	-4.4	Pass
13.553	69.8	0.1	-2.4	67.5	Quasi-Peak	90 deg	100	235	70.5	-3.0	Pass
13.551	70.9	0.1	-2.4	68.6	Quasi-Peak	90 deg	100	235	70.5	-1.9	Pass
13.582	72.5	0.1	-2.4	70.2	Quasi-Peak	90 deg	100	235	70.5	-0.3	Pass
13.507	68.9	0.1	-2.4	66.6	Quasi-Peak	90 deg	100	235	70.5	-3.9	Pass
13.538	70.7	0.1	-2.4	68.4	Quasi-Peak	90 deg	100	235	70.5	-2.1	Pass
13.560	93.28	0.1	-2.37	91.01	Quasi-Peak	90 deg	100	235	104.0	-12.99	Pass
27.123	48.5	0.1	-3.4	45.2	Quasi-Peak	90 deg	100	235	48.6	-3.4	Pass

10.4 Occupied bandwidth


Requirement(s):

Spec	Requirement	Applicable									
RSS-Gen 4.6.1	The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.	<input checked="" type="checkbox"/>									
Test Setup	<ol style="list-style-type: none"> The EUT was set up inside a semi-anechoic chamber in accordance with the standard. The EUT was placed on top of a 0.8m high, non-metallic table in a typical configuration. 										
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. To measure conducted, a SMA cable was used to replace the EUT antenna. To measure radiated, an external antenna was used to detect EUT transmission signal. Measurement of the 99% Occupied Bandwidth of EUT transmission signal and make record. 										
Test Date	02/26/2014	<table border="1"> <tr> <td>Environmental conditions</td> <td>Temperature</td> <td>22°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>46%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1008mbar</td> </tr> </table>	Environmental conditions	Temperature	22°C		Relative Humidity	46%		Atmospheric Pressure	1008mbar
Environmental conditions	Temperature	22°C									
	Relative Humidity	46%									
	Atmospheric Pressure	1008mbar									
Remark	-										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test Plots

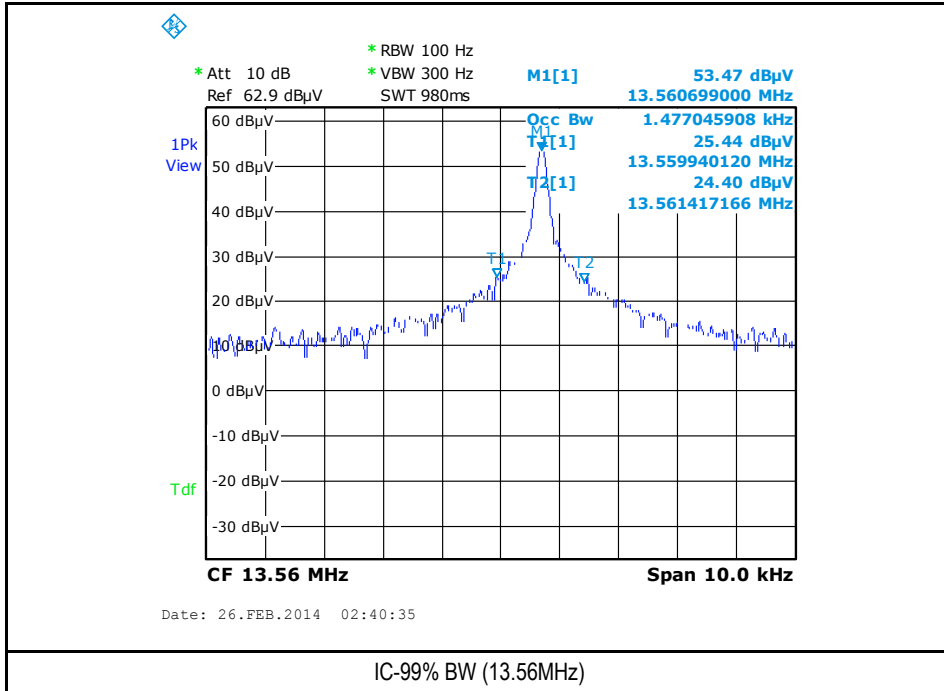

10.5 Frequency Stability

Requirement(s):

Spec	Requirement	Applicable
47 CFR §15.225 e) RSS-210 (A2.6)	Limit: $\pm 0.01\%$ of 13.56 MHz = 1356 Hz	<input checked="" type="checkbox"/>
Test Setup	1. The EUT was set up inside an environmental chamber. 2. The EUT was placed in the centre of the environmental.	
Procedure	Frequency Stability was measured according to 47 CFR §2.1055. Measurement was taken with spectrum analyzer. The spectrum analyzer bandwidth and span was set to read in hertz. A voltmeter was used to monitor when varying the voltage.	
Test Date	02/26/2014	Environmental conditions
		Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1008mbar
Remark	None	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test Result

Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage.

Reference Frequency: 13.5606300 MHz at -20°C and $+50^{\circ}\text{C}$

Temperature (°C)	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
50	13.560482	147.8	<0.01	Pass
40	13.560502	127.7	<0.01	Pass
30	13.560535	95.2	<0.01	Pass
20	Reference (13.560630 MHz)			
10	13.560628	2.5	<0.01	Pass
0	13.560710	-80.2	<0.01	Pass
-10	13.560768	-137.8	<0.01	Pass
-20	13.560790	-160.3	<0.01	Pass


Frequency Stability versus Input Voltage: The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$, the frequency of the transmitter was measured at 85% and at 115% of the rated power supply voltage at a 20°C environmental temperature.

Carrier Frequency: 13.5606300 MHz at 20°C at 12VDC

Measured Voltage $\pm 15\%$ of nominal (VDC)	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
10.2	13.5606300	0	<0.01	Pass
13.8	13.5606300	0	<0.01	Pass

10.6 Radiated Emissions below 1GHz

Requirement(s):

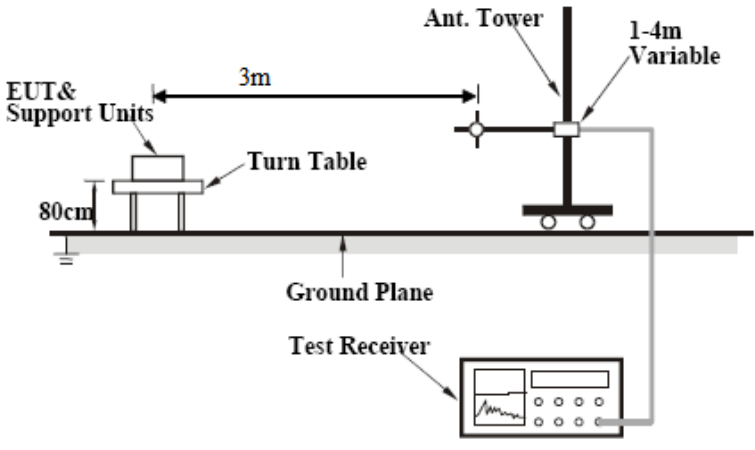
Spec	Item	Requirement	Applicable										
47 CFR §15.225 RSS-210 (A2.6)	a)	<p>Operation within the band 13.110–14.010 MHz.</p> <p>(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p> <table border="1" data-bbox="453 685 1262 846"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
	Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup													
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 												
Remark	-												
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail												

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	22		
	Humidity (%)	50		
	Atmospheric (mbar):	1009		
Mains Power:	12VDC			
Tested by:	Angel Escamilla			
Test Date:	01/29/2014			
Remarks:	Both Horizontal and vertical polarization have been investigated and only the worst case test data is presented here.			

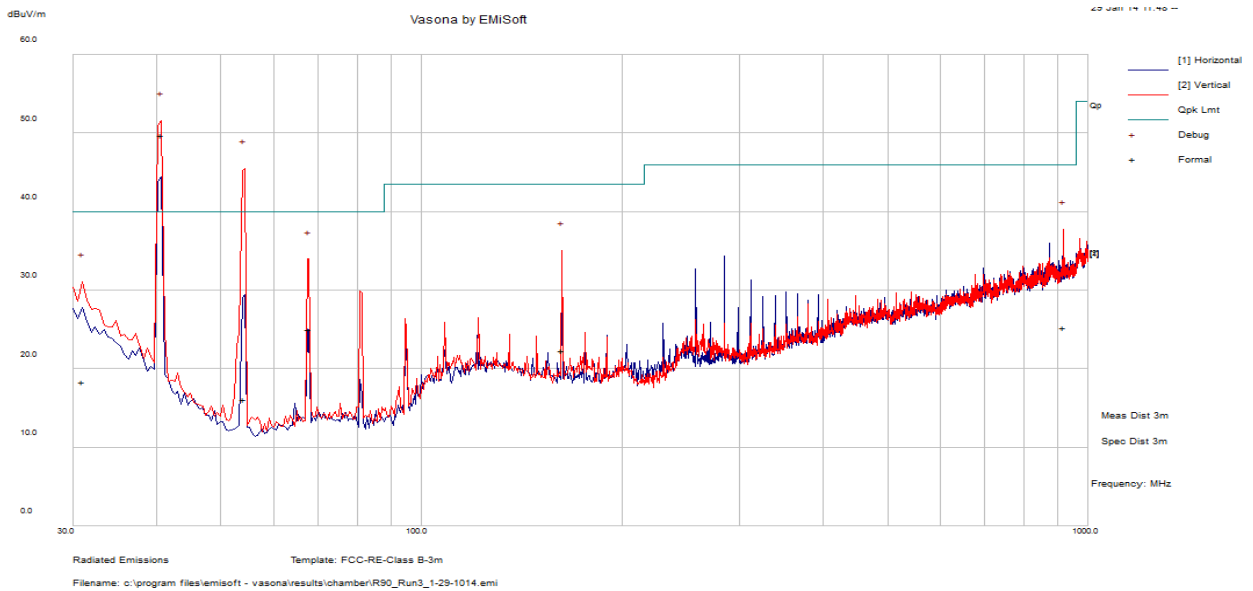

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
31.025	18.46	1.27	-1.41	18.32	Quasi Max	V	384	273	40	-21.68	Pass
40.685*	29.9	1.42	0.90	32.22	Quasi Max	V	106	213	40	-7.78	Pass
54.248	28.96	1.59	-14.45	16.09	Quasi Max	V	305	217	40	-23.91	Pass
67.803	36.66	1.74	-13.4	25.00	Quasi Max	V	207	190	40	-15.00	Pass
162.642	29.36	2.53	-9.60	22.29	Quasi Max	V	109	357	43.5	-21.21	Pass
917.358	18.97	6.24	-0.01	25.20	Quasi Max	V	331	96	46	-20.80	Pass

*Note: The prescan for this frequency was using broadband antenna and result was shown on the above plot. A dipole tuned to 80MHz per ANSI C63.4-2009, clause 4.5.3, was used to measure the final QP and the data was recorded in above table.

Annex A. TEST INSTRUMENT
















Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	04/20/2013	1 Year	04/20/2014	<input checked="" type="checkbox"/>
R&S LISN	ESH2-Z5	861741/013	05/18/2013	1 Year	05/18/2014	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	07/24/2013	1 Year	07/24/2014	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2013	1 Year	05/25/2014	<input checked="" type="checkbox"/>
Radiated Emissions						
R & S Receiver	ESL6	100178	03/01/2013	1 Year	03/01/2014	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2013	1 Year	04/20/2014	<input type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	05/13/2013	1 Year	05/13/2014	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	07/13/2013	1 Year	07/13/2014	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	04/26/2013	1 Year	04/26/2014	<input type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	04/23/2013	1 Year	04/23/2014	<input type="checkbox"/>
Amplifier (100kHz - 1.3GHz)	Agilent/HP	8447F	04/24/2013	1 Year	04/24/2014	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	05/30/2013	1 Year	05/30/2014	<input type="checkbox"/>
Microwave Preamplifier (18-40 GHz)	PA-840	181251	05/30/2013	1 Year	05/30/2014	<input type="checkbox"/>
3 Meters SAC	3M	N/A	10/13/2012	1 Year	10/13/2013	<input type="checkbox"/>
10 Meters SAC	10M	N/A	06/05/2013	1 Year	06/05/2014	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2013	1 Year	05/25/2014	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	MY50210206	05/30/2013	1 Year	05/30/2014	<input type="checkbox"/>
Spectrum Analyzer	E4407B	US88441016	05/31/2013	1 Year	05/31/2014	<input type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2013	1 Year	04/20/2014	<input type="checkbox"/>








Test report No.	FCC-IC_RF_SL14021101-HID-004 (R90)
Page	30 of 32

Annex B. USER MANUAL, BLOCK & CIRCUIT DIAGRAM

Please see attachment

Annex C. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
HongKong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio : A1. Terminal equipment for purpose of calling</p> <p>Telecom : B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement
		T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radiocommunications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2