

# RF TEST REPORT



Report No.: FCC\_IC\_RF\_SL15120101-HID-031 Co-Location  
 Supersede Report No.: NONE

Applicant	:	HID Global Corporation
Product Name	:	Color Card Printer
Model No.	:	X002100
Test Standard	:	FCC 15.225 RSS-210 Issue 8: 2010
Test Method	:	FCC 15.225 ANSI C63.10 2013 RSS Gen Issue 4 2014
FCC ID	:	JQ6-OK5127FARGO
FCC ID	:	JQ6-X002100
IC ID	:	2236B-OK5127FARGO
IC ID	:	2236B-X002100
Dates of test	:	12/28/2015 to 03/10/2016
Issue Date	:	03/18/2016
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification		[X]
Equipment did not comply with the specification		[ ]

This Test Report is Issued Under the Authority of:	
<b>Teody Manansala</b>	<b>Chen Ge</b>
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:  
**SIEMIC Laboratories**  
 775 Montague Expressway, Milpitas, CA 95035



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	EMC, RF/Wireless, Telecom, Safety
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY .....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION .....5**

**5 MODIFICATION .....5**

**6 EUT INFORMATION .....6**

6.1 EUT Description .....6

6.2 Radio Description .....6

6.3 EUT test modes/configuration Description.....7

6.4 EUT Photos – External .....8

6.5 EUT Photos – Internal.....9

6.6 EUT Test Setup Photos .....15

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....16**

7.1 Supporting Equipment .....16

7.2 Cabling Description .....16

7.3 Test Software Description .....16

**8 TEST SUMMARY.....17**

**9 MEASUREMENT UNCERTAINTY .....18**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....19**

10.1 Antenna Requirement.....19

10.2 Conducted Emissions Test Result .....20

10.3 Radiated Measurements.....23

10.3.1 Radiated Measurements below 1GHz.....23

10.3.2 Radiated Measurements below 30MHz.....25

**ANNEX A. TEST INSTRUMENT.....30**

**ANNEX B. SIEMIC ACCREDITATION .....31**

## 1 Report Revision History

Report No.	Version	Description	Issue Date
FCC_IC_RF_SL15120101-HID-031 Co-Location	-	Original	03/18/2016

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: HID Global Corporation  
Product: Color Card Printer  
Model: X002100

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	:	HID Global Corporation
Applicant Address	:	15370 Barranca Parkway, Irvine, CA 92618 USA
Manufacturer Name	:	HID Global Corporation
Manufacturer Address	:	15370 Barranca Parkway, Irvine, CA 92618 USA

## 4 Test site information

Lab performing tests	:	SIEMIC Laboratories
Lab Address	:	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	:	881796
IC Test Site No.	:	4842D-2
VCCI Test Site No.	:	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	:	Color Card Printer
Model No.	:	X002100
Trade Name	:	HID
Serial No.	:	N/A
Input Power	:	110-240VAC
Product hardware version	:	Rev-B
Product software version	:	Rev-1.0.9.3/ Rev-1.0.1.6
Radio hardware version	:	Rev-J1/ Rev-B1
Radio software version	:	Rev-1.0.9.3/ Rev-1.0.1.6
Test SW Version	:	Rev-1.0
Date of EUT received	:	December 28, 2015
Equipment Class/ Category	:	DXX, DCD
Working Frequencies	:	125 kHz, 13.56MHz
Port/Connectors	:	USB

### 6.2 Radio Description

#### Specifications for Radio:

Radio Type	RFID
Operating Frequency	125KHz, 13.56MHz
Modulation	ASK (125KHz), ASK (13.56MHz)
Channel Spacing	None
Antenna Type	Mag Integrated Loop Antenna
Antenna Gain	1 dBi
Antenna Connector Type	N/A

#### Channel List:

Type	Mode	Channel No.	Frequency (MHz)	Available (Y/N)
RFID	125KHz	1	0.125	Y
RFID	13.56MHz	1	13.56	Y
RFID	13.56MHz	1	13.56	Y
RFID	13.56MHz	1	13.56	Y

### 6.3 EUT test modes/configuration Description

Mode	Note
RF test	EUT is set to continuously transmit at 13.56MHz and 125kHz for 5125
	EUT is set to continuously transmit at 13.56MHz for laminator
	EUT is set to continuously transmit at 13.56MHz for ribbon

**Note:** All radios transmitting simultaneously


Test Item	Operating mode	Tested antenna port	Test frequencies
Antenna Requirement	N/A	-	125kHz 13.56MHz
Conducted Emissions Voltage	Continuous Transmit	-	
Limit in the band of 13.553 – 13.567 MHz	Continuous Transmit	-	
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	Continuous Transmit	-	
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	Continuous Transmit	-	
Limit outside the band of 13.110 – 14.010 MHz	Continuous Transmit	-	
Frequency Stability	Continuous Transmit	-	
Occupied Bandwidth	Continuous Transmit	-	

**Note:** EUT uses a PCB trace antenna attached to the PCB board. Only radiated measurements were performed during the test.


**6.4 EUT Photos – External**




**EUT – Front View**

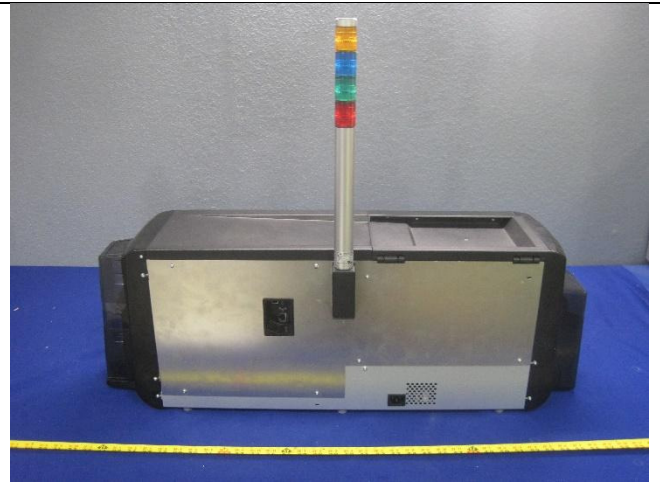

**EUT – Rear View**

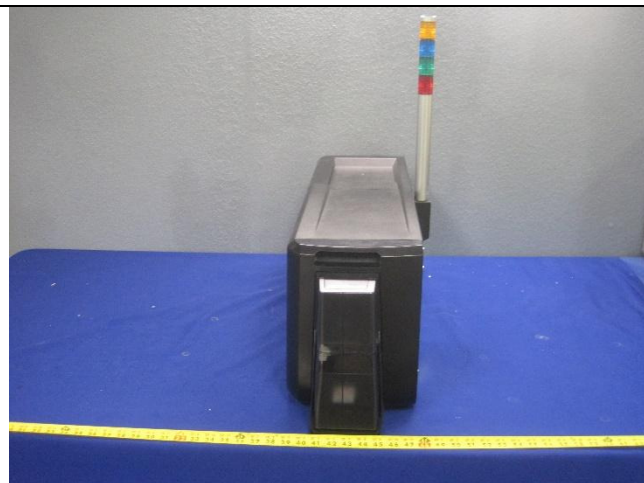

**EUT – Left View**

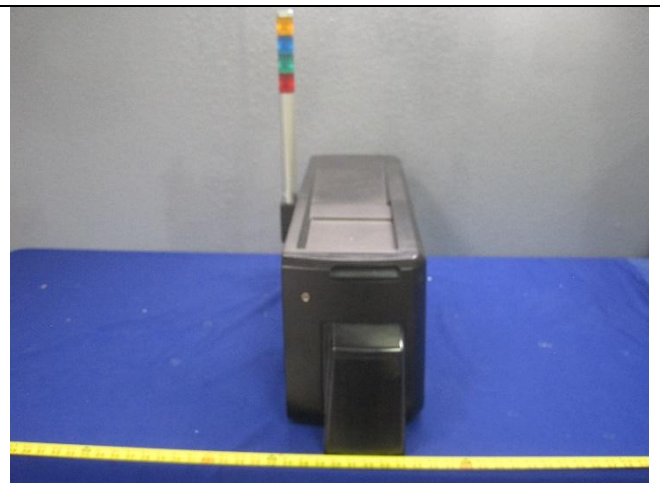

**EUT – Right View**



**EUT – Top View**




**EUT – Bottom View**




**6.5 EUT Photos – Internal**




**EUT With Enclosure**

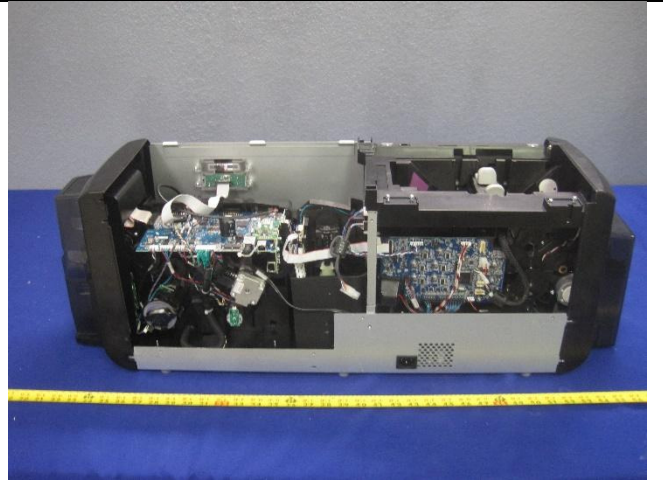


**EUT Without Enclosure**

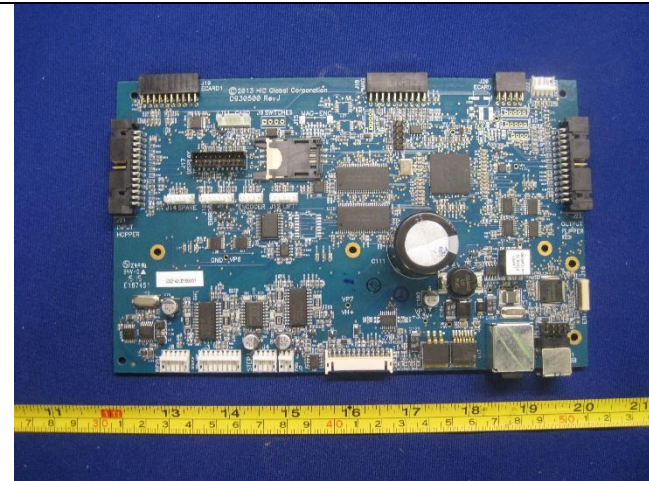


**PCBA1 – Top View**

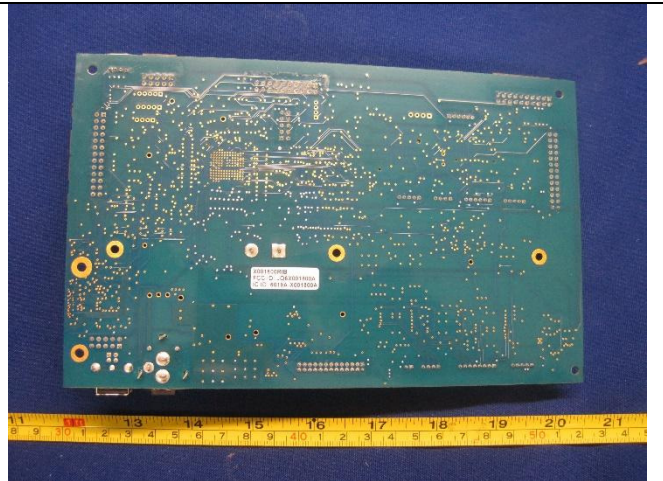


**PCBA1 – Bottom View**

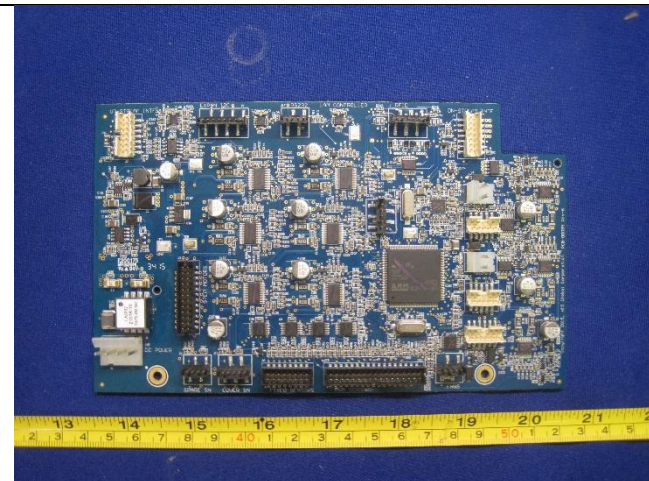


**PCBA2 – Top View**

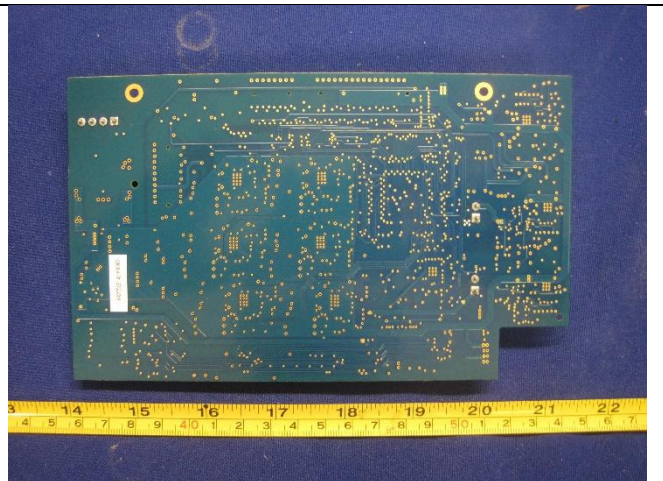


**PCBA2 – Bottom View**

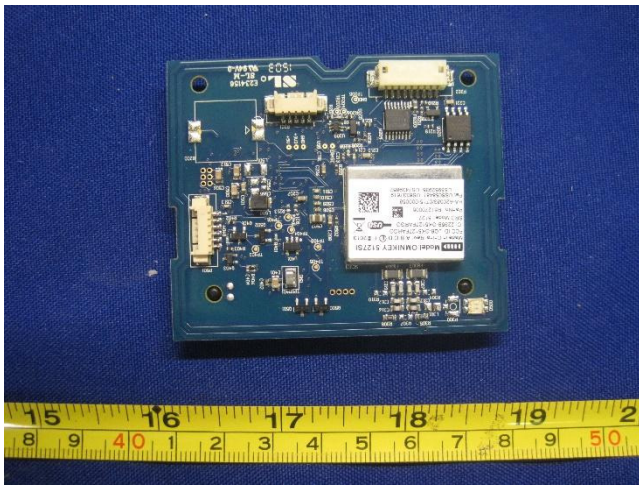


**PCBA3 – Top View**

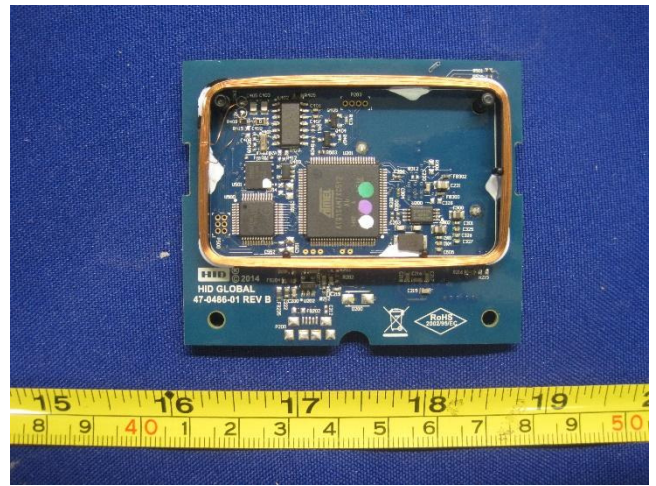


**PCBA3 – Bottom View**

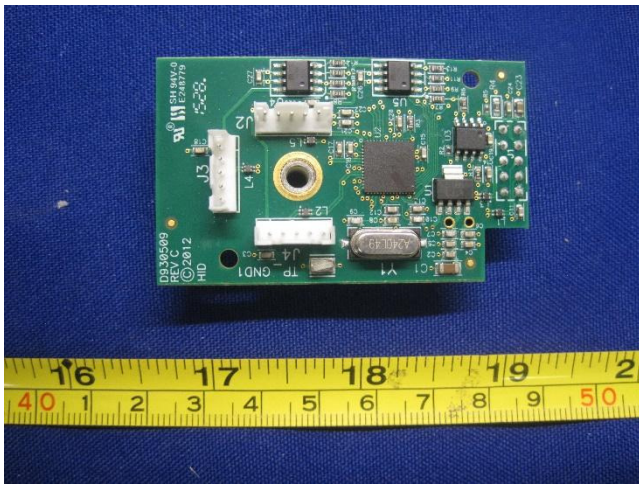


**PCBA4 – Top View**

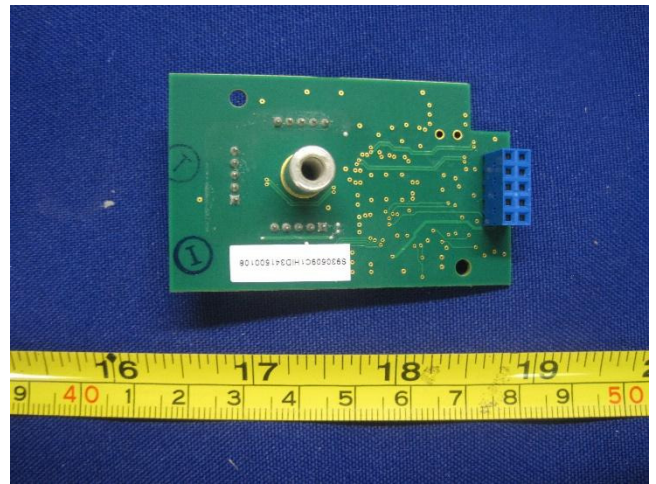


**PCBA4 – Bottom View**

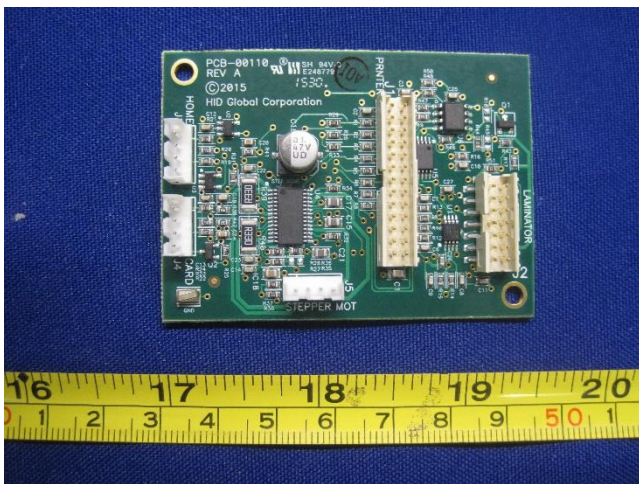


**PCBA5 – Top View**

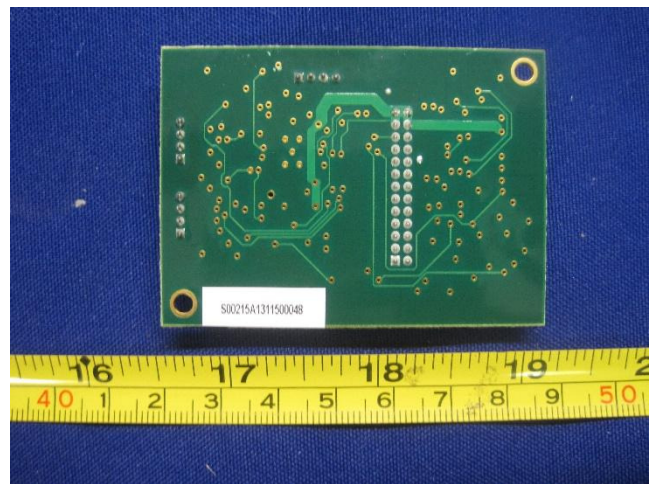


**PCBA5 – Bottom View**

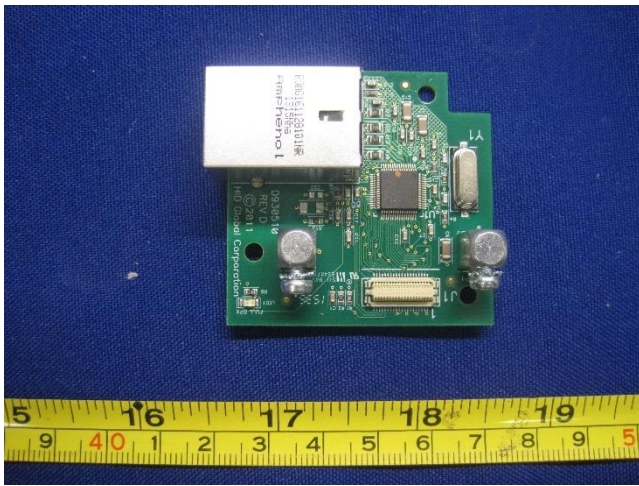


**PCBA6 – Top View**

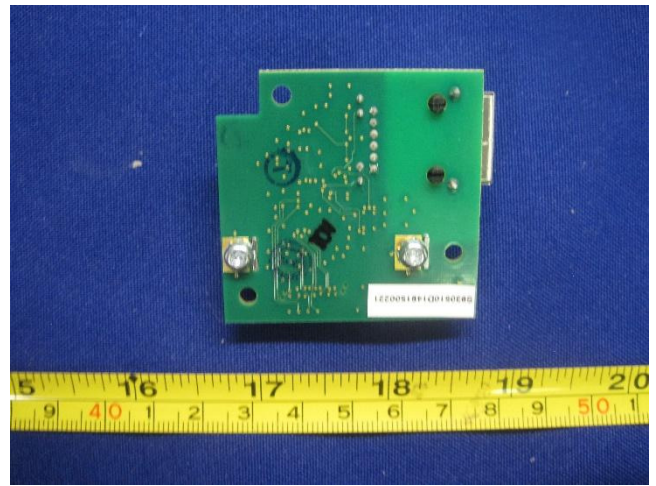


**PCBA6 – Bottom View**

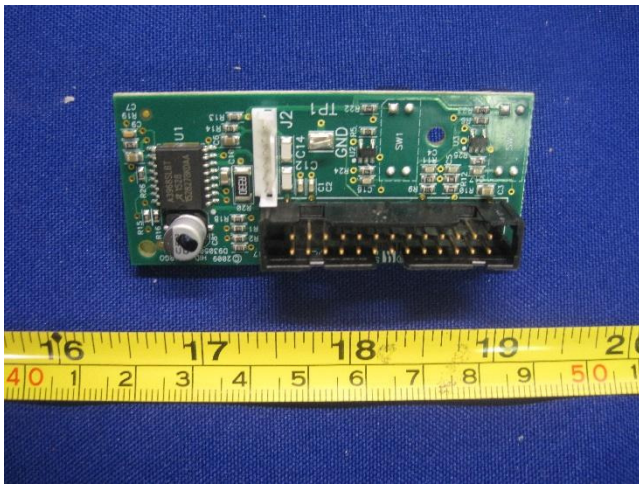

**PCBA7 – Top View**

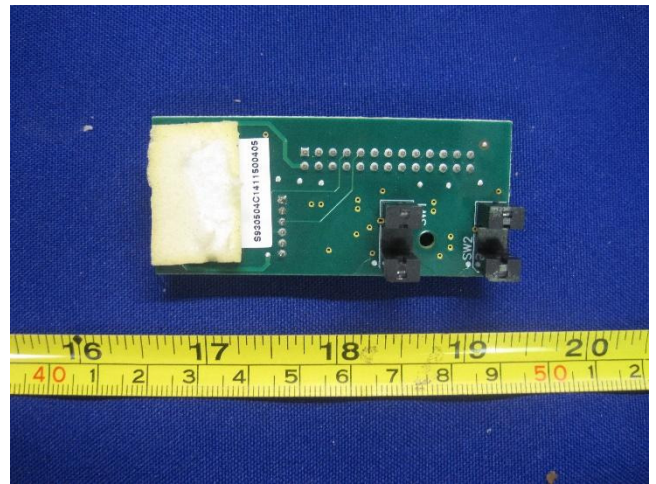


**PCBA7 – Bottom View**

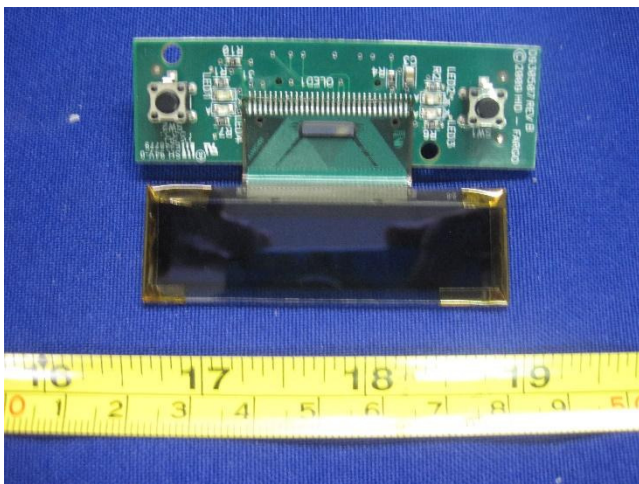


**PCBA8 – Top View**




**PCBA8 – Bottom View**

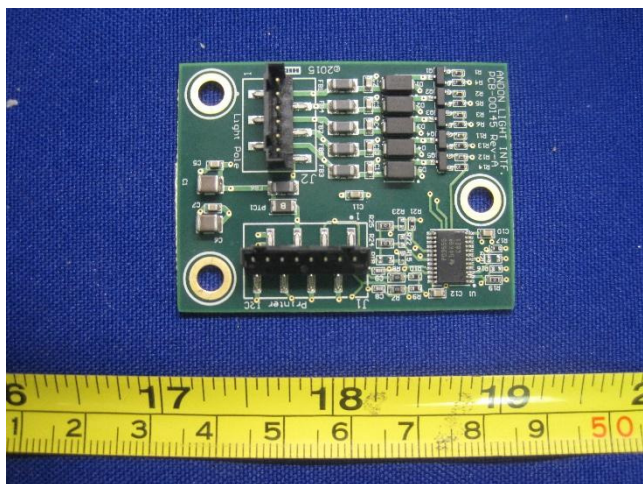


**PCBA9 – Top View**

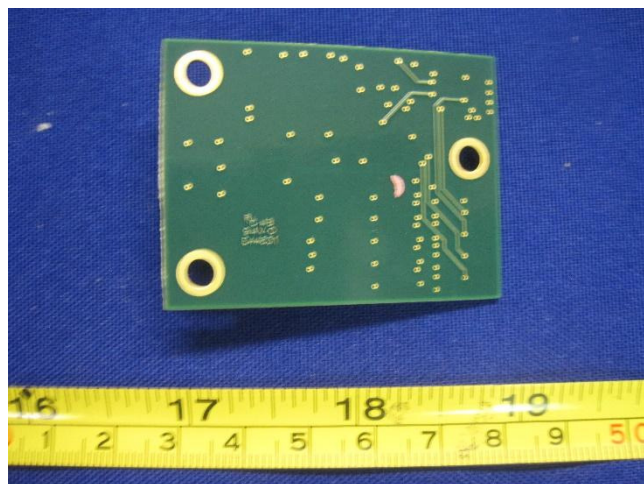


**PCBA9 – Bottom View**

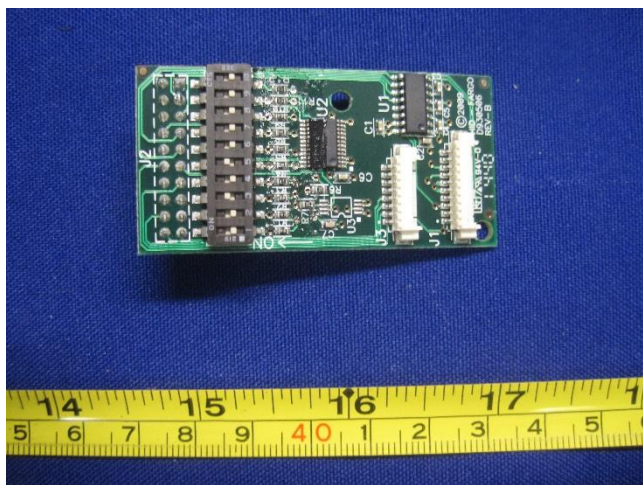


**PCBA10 – Top View**

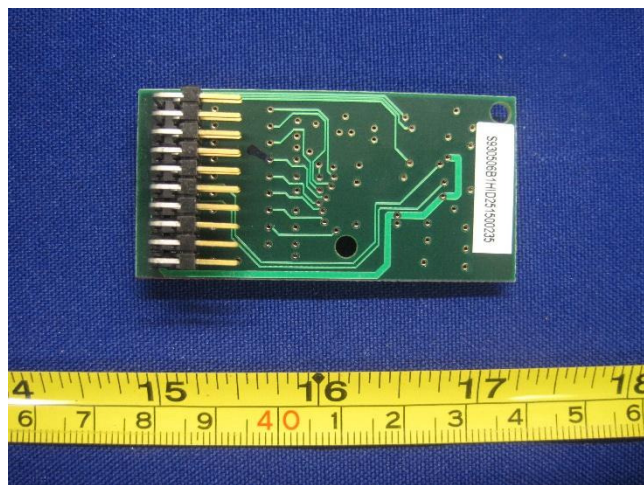


**PCBA10 – Bottom View**

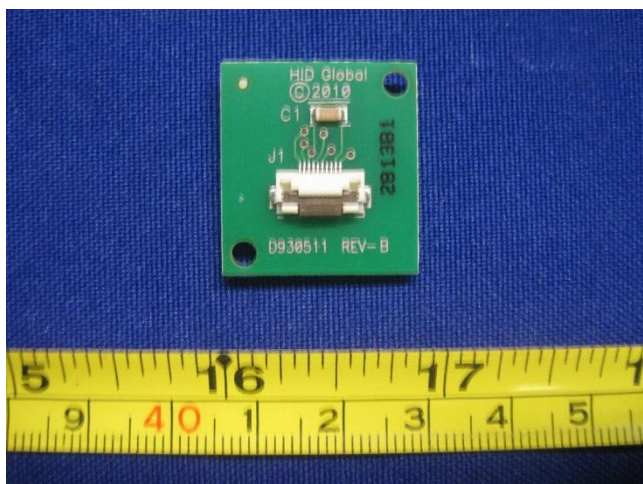


**PCBA11 – Top View**

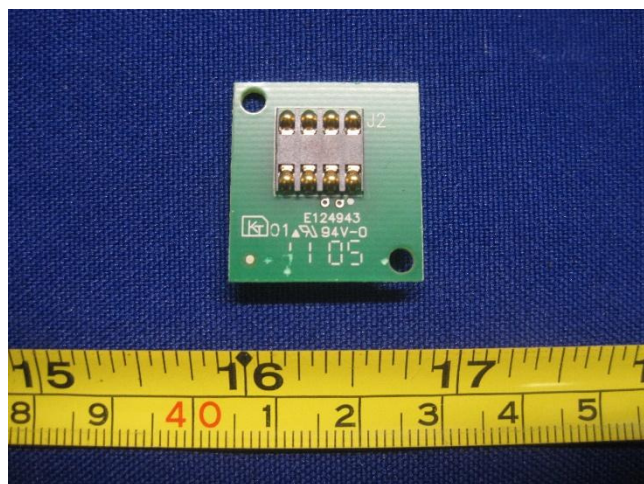


**PCBA11 – Bottom View**

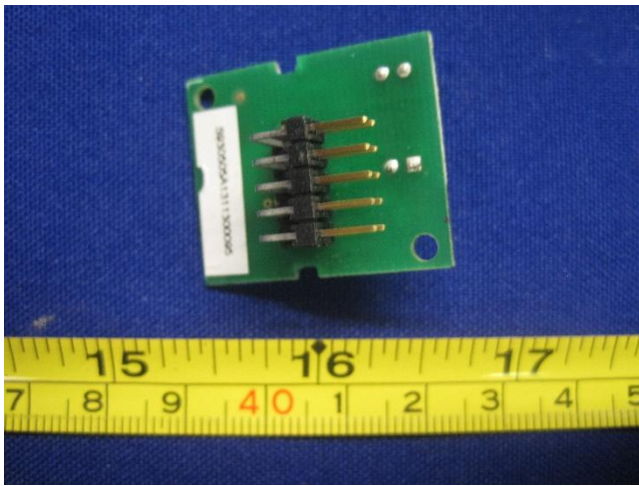


PCBA12 – Top View

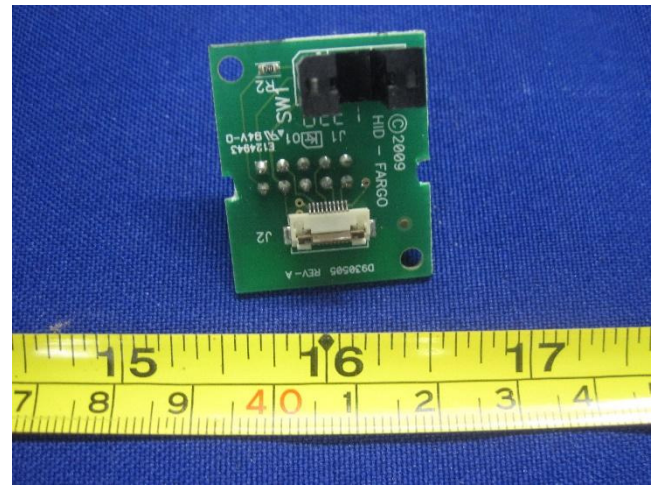


PCBA12 – Bottom View

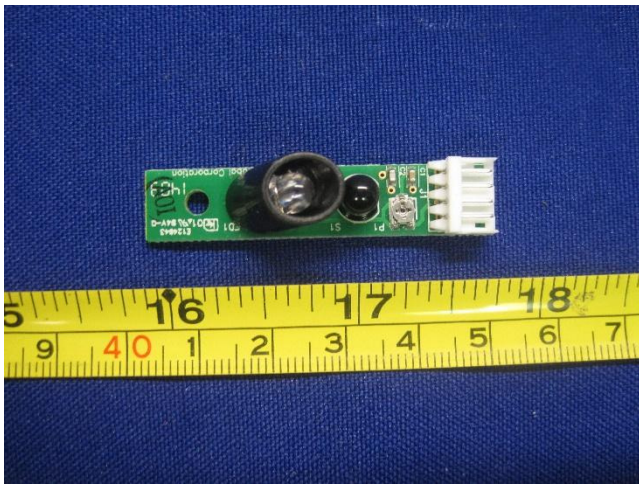


PCBA13 – Top View

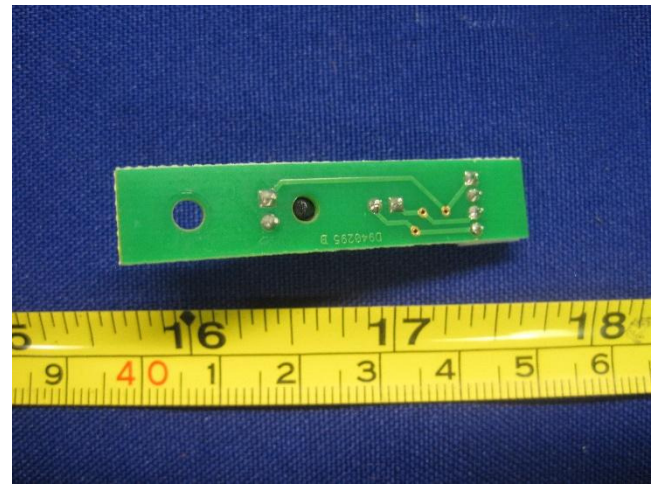


PCBA13 – Bottom View

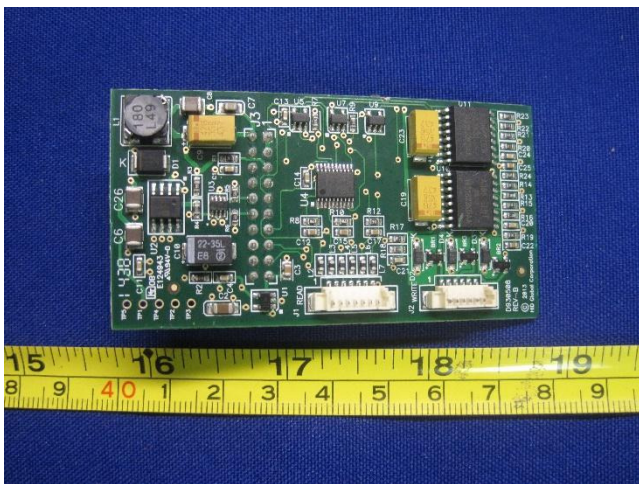


PCBA14 – Top View

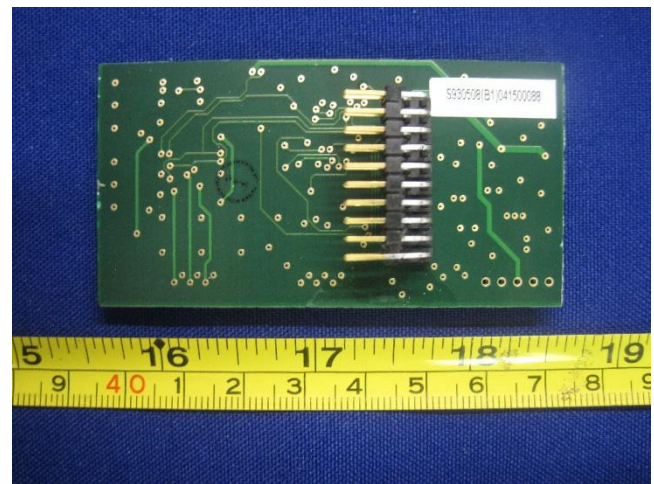

PCBA14 – Bottom View

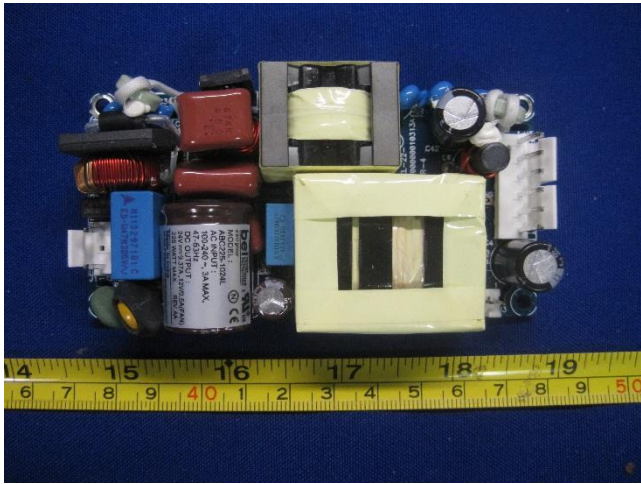

**PCBA15 – Top View**

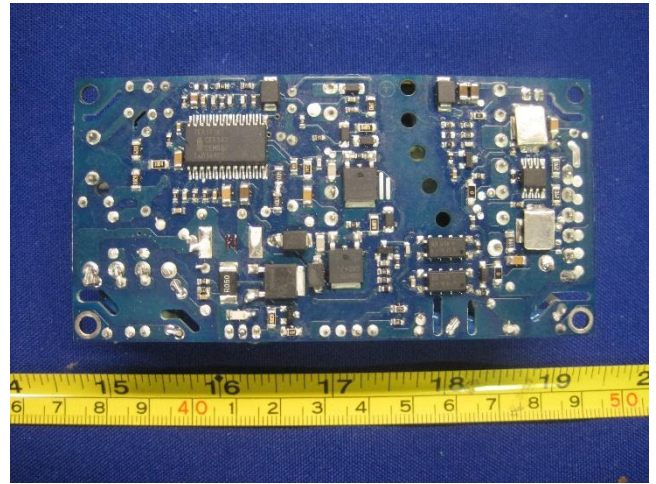

**PCBA15 – Bottom View**


**6.6 EUT Test Setup Photos**




**AC Line Conducted Emissions– Front View**




**AC Line Conducted Emissions– Rear View**

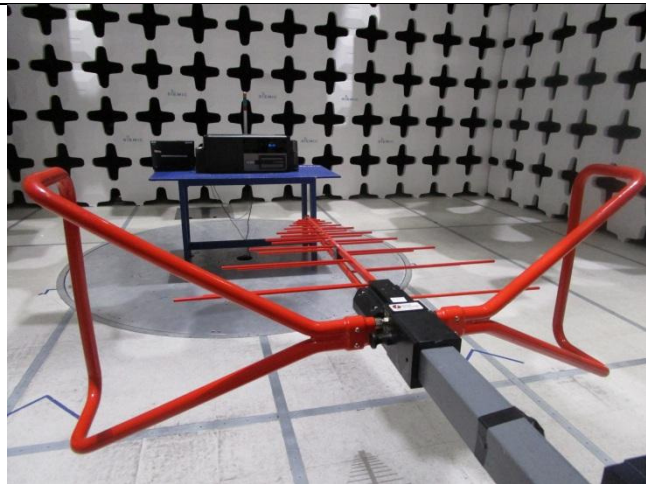


**Radiated Emissions (<1GHz) – Front View**

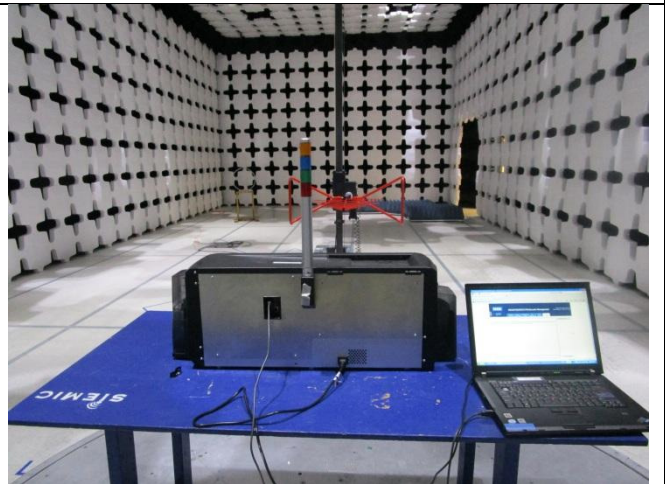

**Radiated Emissions (<1GHz) – Rear View**

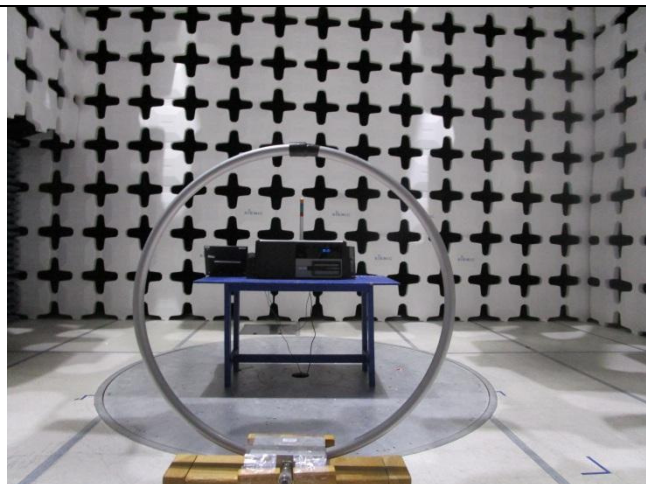

**Radiated Emissions (<30MHz) – Front View**

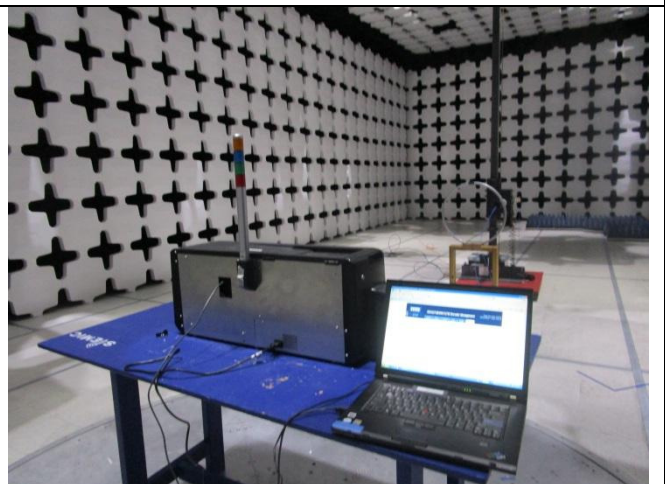

**Radiated Emissions (<30MHz) – Rear View**

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

Index	Supporting Equipment Description	Model	Serial No	Manu	Note
1	Laptop	Lenovo	R9-NP0D4 12/04	ThinkPad	-

### 7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	USB	Laptop	USB	2.0	Unshielded	-

### 7.3 Test Software Description

Test Item	Software	Description
RF Testing	Internet Explorer	Set the EUT to transmit continuously at 125KHz and 13.56MHz
RF Testing	HostControl_Lite	Set the EUT to transmit continuously at 13.56MHz



## 8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Antenna Requirement	FCC	15.203	ANSI C63.10 – 2013 558074 D01 DTS Meas. Guidance v03r02	<input type="checkbox"/> Pass
	IC			<input checked="" type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.225(a)	ANSI C63.10 2013 RSS Gen. 8.8	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen (7.2.2)		<input type="checkbox"/> N/A
Remark	1. AC Line tests were performed on the support equipment's power adapter, laptop.			

Test Item	Test standard		Test Method/Procedure	Pass / Fail	
Limit in the band of 13.553 – 13.567 MHz	FCC	15.225(a)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 6.13	<input type="checkbox"/> N/A
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	FCC	15.225(b)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 6.13	<input type="checkbox"/> N/A
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	FCC	15.225(c)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 6.13	<input type="checkbox"/> N/A
Limit outside the band of 13.110 – 14.010 MHz	FCC	15.225(d), 15.209	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 6.13	<input type="checkbox"/> N/A
Receiver Spurious Emission	IC	-	IC	RSS Gen 7.1	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Frequency Stability	FCC	15.225(e)	FCC	-	<input type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 6.11	<input checked="" type="checkbox"/> N/A
Occupied Bandwidth	FCC	-	FCC	-	<input type="checkbox"/> Pass
	IC	RSS-210(5.9.1)	IC	RSS Gen 6.6	<input checked="" type="checkbox"/> N/A
Remark	2. All measurement uncertainties are not taken into consideration for all presented test result. 3. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. 4. Test Method: ANSI C63.10: 2013 / RSS – Gen Issue 4: November 2014.				

## 9 Measurement Uncertainty

Test Item	Description	Uncertainty
AC Conducted Emissions Voltage	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
Limit in the band of 13.553 – 13.567 MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz		+5.6dB/-4.5dB
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz		+5.6dB/-4.5dB
Limit outside the band of 13.110 – 14.010 MHz		+5.6dB/-4.5dB
Radiated Spurious Emissions		+5.6dB/-4.5dB

## 10 Measurements, examination and derived results


### 10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device.  b) The antenna must use a unique type of connector to attach to the device.  c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p>	☒
Remark	The RFID antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).	
Result	☒ PASS      ☐ FAIL	

## 10.2 Conducted Emissions Test Result

### Conducted Emission Limit

Section	Frequency ranges (MHz)	Limit (dBuV)	
		QP	Average
Class B devices	0.15 ~ 0.5	66 – 56	56 – 46
	0.5 ~ 5	56	46
	5 ~ 30	60	50

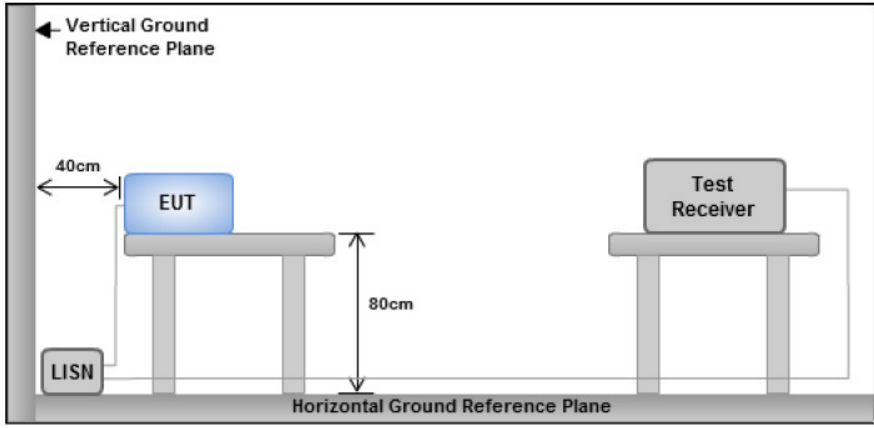Spec	Item	Requirement	Applicable
§ 15.207, RSS210(A8.1)	a)	For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits set in § 15.207, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN).  AC Line conducted emission within the band 150kHz to 30MHz	<input checked="" type="checkbox"/>
Test Setup		 <p style="text-align: center;"><b>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</b></p>	
Procedure		<ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50<math>\Omega</math>/50<math>\mu</math>H EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment was powered separately from another main supply.</li> </ul>	
Test Date	02/05/2016	Environmental conditions	Temperature 21°C Relative Humidity 38 % Atmospheric Pressure 1025 mbar
Remark	The EUT was tested at 120VAC, 60Hz.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data     Yes                       N/A

Test Plot     Yes                       N/A

Test was done by Teody Manansala at Conducted Emission test site.

Test specification:	Conducted Emissions		
Mains Power:	120VAC, 60Hz		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Teody Manansala		
Test Date:	03/10/2016		
Remarks:	AC Line @ Line		

Neutral Plot at V=120VAC, f=60Hz

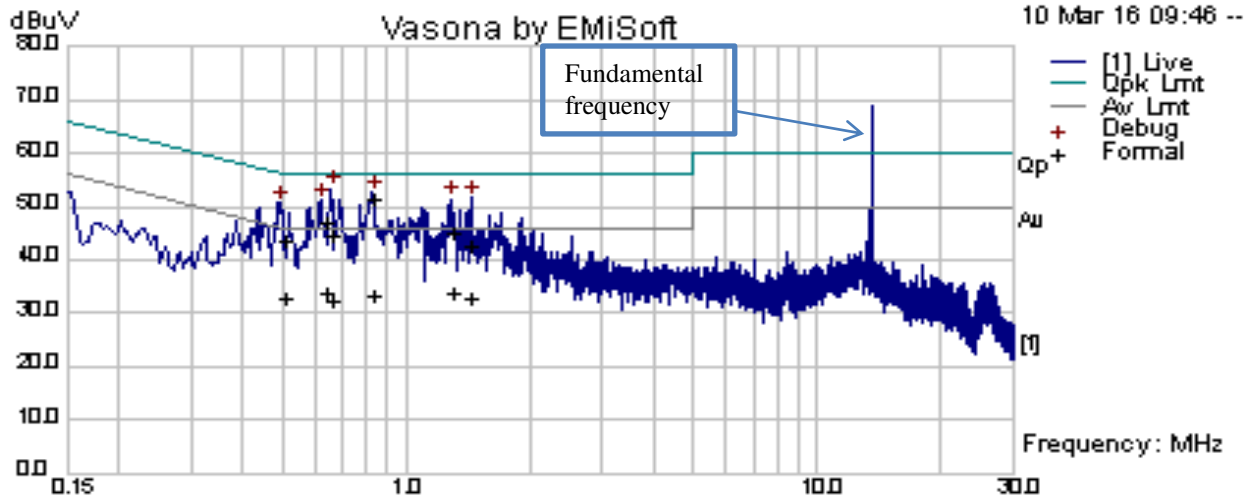


Neutral Measurements

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line/Neutral	Limit dBuV	Margin dB	Pass /Fail
0.66	34.08	10.01	0.62	44.72	Quasi Peak	Line	56.00	-11.28	Pass
0.83	40.99	10.01	0.59	51.60	Quasi Peak	Line	56.00	-4.40	Pass
1.45	31.92	10.02	0.56	42.50	Quasi Peak	Line	56.00	-13.50	Pass
1.29	34.62	10.02	0.57	45.20	Quasi Peak	Line	56.00	-10.80	Pass
0.64	36.30	10.01	0.63	46.94	Quasi Peak	Line	56.00	-9.06	Pass
0.51	32.99	10.01	0.68	43.67	Quasi Peak	Line	56.00	-12.33	Pass
0.66	21.55	10.01	0.62	32.18	Average	Line	46.00	-13.82	Pass
0.83	22.94	10.01	0.59	33.55	Average	Line	46.00	-12.45	Pass
1.45	22.40	10.02	0.56	32.99	Average	Line	46.00	-13.01	Pass
1.29	23.50	10.02	0.57	34.09	Average	Line	46.00	-11.91	Pass
0.64	23.26	10.01	0.63	33.90	Average	Line	46.00	-12.10	Pass
0.51	22.33	10.01	0.68	33.01	Average	Line	46.00	-12.99	Pass

Test specification:	Conducted Emissions		
Mains Power:	120VAC, 60Hz		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Teody Manansala		
Test Date:	03/10/2016		
Remarks:	AC Line @ Neutral		

Line Plot at V=120VAC, f=60Hz

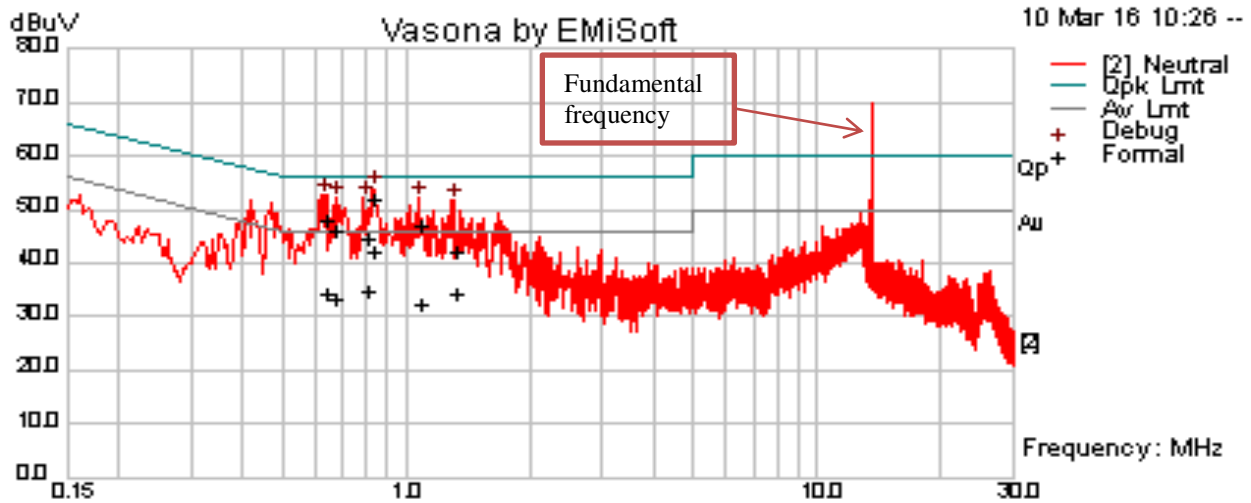

Line Measurements


Frequency MHz	Raw dB $\mu$ V	Cable Loss	Factors dB	Level dB $\mu$ V	Measurement Type	Line/ Neutral	Limit dB $\mu$ V	Margin dB	Pass /Fail
0.833206	41.37	10.01	0.59	51.98	Quasi Peak	Neutral	56	-4.02	Pass
0.642409	37.44	10.01	0.63	48.08	Quasi Peak	Neutral	56	-7.92	Pass
0.671182	35.38	10.01	0.62	46.01	Quasi Peak	Neutral	56	-9.99	Pass
1.080842	36.53	10.02	0.58	47.12	Quasi Peak	Neutral	56	-8.88	Pass
0.801246	34.16	10.01	0.6	44.77	Quasi Peak	Neutral	56	-11.23	Pass
1.319928	31.38	10.02	0.57	41.97	Quasi Peak	Neutral	56	-14.03	Pass
0.833206	31.78	10.01	0.59	42.39	Average	Neutral	46	-3.61	Pass
0.642409	23.64	10.01	0.63	34.28	Average	Neutral	46	-11.72	Pass
0.671182	22.52	10.01	0.62	33.15	Average	Neutral	46	-12.85	Pass
1.080842	21.97	10.02	0.58	32.56	Average	Neutral	46	-13.44	Pass
0.801246	24.18	10.01	0.6	34.79	Average	Neutral	46	-11.21	Pass
1.319928	23.57	10.02	0.57	34.15	Average	Neutral	46	-11.85	Pass

### 10.3 Radiated Measurements

#### 10.3.1 Radiated Measurements below 1GHz

Requirement(s):

Spec	Requirement	Applicable										
47 CFR §15.225 RSS-210 (A2.6)	<p>Operation within the band 13.110–14.010 MHz:</p> <p>(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											

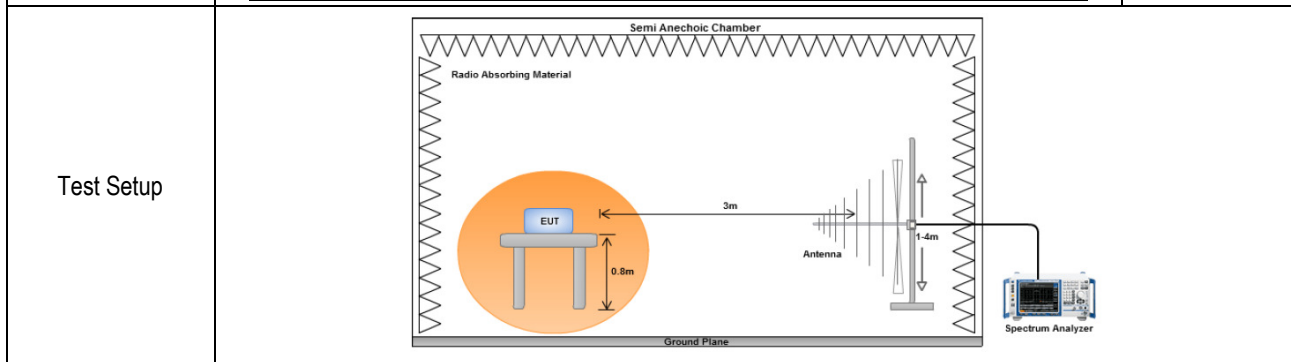

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>
-----------	--

Test Date	03/06/2015	Environmental conditions	Temperature 20.1°C Relative Humidity 36% Atmospheric Pressure 1026mbar
Remark	-		
Result	☒ Pass      ☐ Fail		


Test Data    ☒ Yes (See below)      ☐ N/A

Test Plot    ☒ Yes (See below)      ☐ N/A

Test was done by Teody Manansala at 10 meter chamber.

Test specification:	Radiated Emissions		
Mains Power:	120VAC, 60Hz		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Teody Manansala		
Test Date:	03/06/2016		
Remarks:	All radios Transmitting at 13.56MHz and 125MHz		

**f=30MHz – 1000MHz plot at V=120VAC, f=60Hz and 3 meter distance**

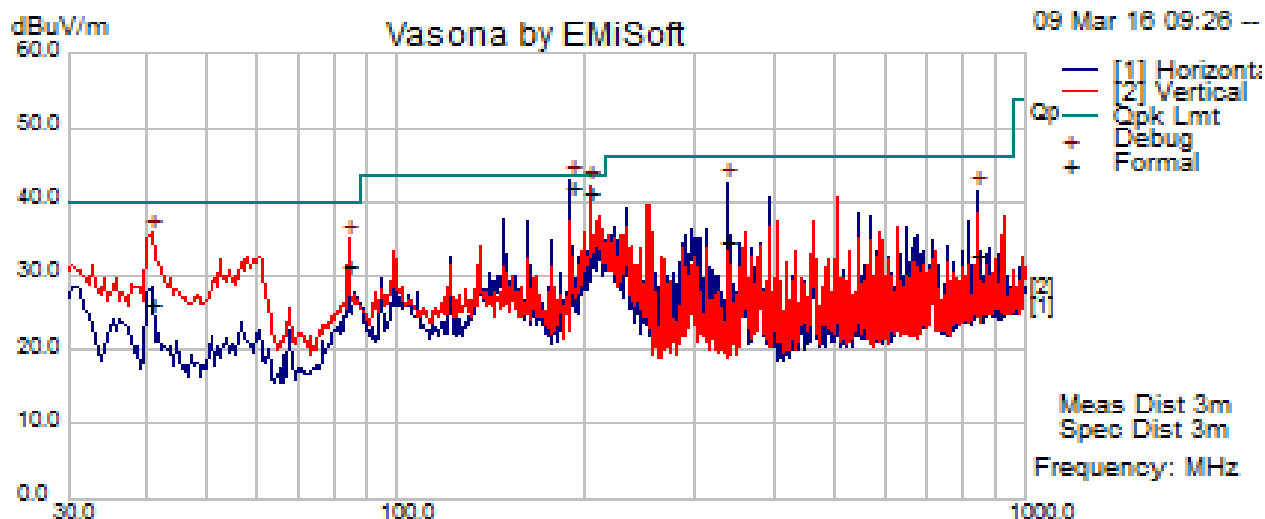


**f=30MHz – 1000MHz Measurements**

Frequency MHz	Raw dBuV/m	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
189.81	67.94	2.03	-28.19	41.78	Quasi Max	H	122.00	346.00	43.52	-1.74	Pass
203.39	66.29	2.13	-27.07	41.35	Quasi Max	V	234.00	26.00	43.52	-2.17	Pass
336.01	57.01	2.80	-25.14	34.67	Quasi Max	H	264.00	45.00	46.02	-11.35	Pass
40.90	49.58	0.94	-24.40	26.12	Quasi Max	V	129.00	128.00	40.00	-13.88	Pass
840.68	45.30	4.63	-17.06	32.87	Quasi Max	H	180.00	117.00	46.02	-13.15	Pass
84.03	61.47	1.32	-31.46	31.32	Quasi Max	V	114.00	309.00	40.00	-8.68	Pass



### 10.3.2 Radiated Measurements below 30MHz

**Requirement(s):**

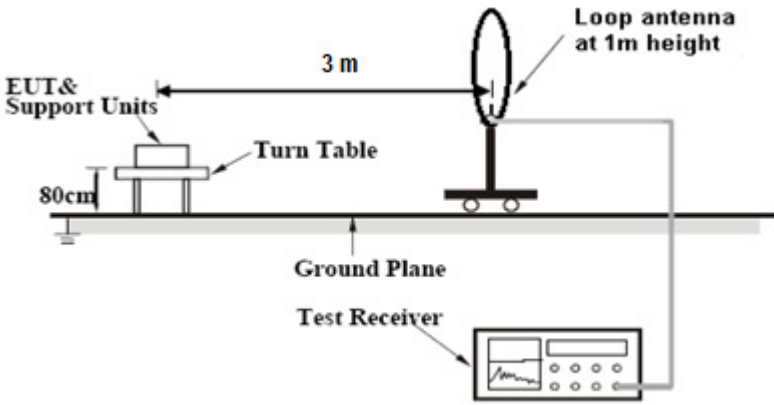
Spec	Requirement	Applicable									
47 CFR §15.225 RSS-210 (A2.6)	<p>Operation within the band 13.110–14.010 MHz</p> <p>(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p>	☒									
Test Setup											
Procedure	<p>For &lt; 30MHz, Radiated emissions were measured according to ANSI C63.10. The EUT was set to transmit at the highest output power.</p> <p>The EUT was set 3 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the centre of the loop. The measuring bandwidth was set to 10 kHz.</p> <p>The limit is converted from microvolt/meter to decibel microvolt/meter.</p>										
Test Date	02/02/2015	<table border="1"> <tr> <td>Environmental conditions</td> <td>Temperature</td> <td>22°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>40%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1026mbar</td> </tr> </table>	Environmental conditions	Temperature	22°C		Relative Humidity	40%		Atmospheric Pressure	1026mbar
Environmental conditions	Temperature	22°C									
	Relative Humidity	40%									
	Atmospheric Pressure	1026mbar									
Remark	-										
Result	☒ Pass      ☐ Fail										

**Test Data**    ☒ Yes (See below)      ☐ N/A

**Test Plot**    ☒ Yes (See below)      ☐ N/A

**Test was done by Teody Manansala at 10 meter Chamber.**


Test specification:	Radiated Spurious Emissions		
Mains Power:	110VAC, 60Hz		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Teody Manansala		
Test Date:	12/28/2015		
Remarks:	<b>f= 100kHz – 30MHz plot, and loop antenna at 0 degree</b>		

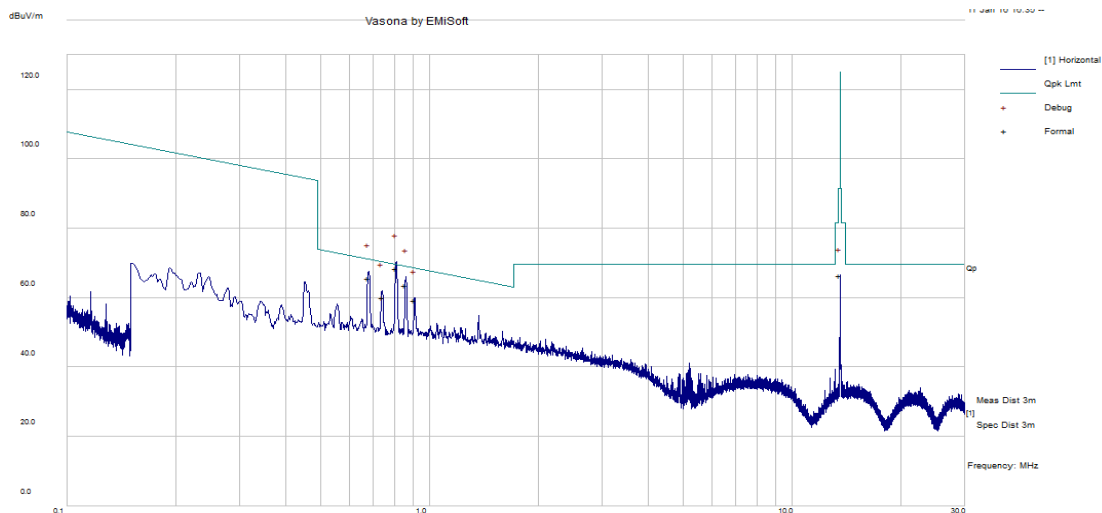

**Quasi Max Measurement**

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
0.68	49.81	0.14	15.71	65.67	Quasi Max	H	100.00	148.00	70.96	-5.30	Pass
0.74	44.80	0.15	15.01	59.96	Quasi Max	H	100.00	7.00	70.21	-10.25	Pass
0.81	53.91	0.16	14.30	68.36	Quasi Max	H	100.00	220.00	69.45	-1.09	Pass
0.86	49.69	0.17	13.83	63.68	Quasi Max	H	100.00	40.00	68.92	-5.24	Pass
0.91	45.68	0.18	13.38	59.24	Quasi Max	H	100.00	20.00	68.42	-9.18	Pass
13.56	66.13	0.48	-0.16	66.45	Quasi Max	H	100.00	70.00	124.92	-58.46	Pass


Test specification:	Radiated Spurious Emissions		
Mains Power:	110VAC, 60Hz		Result: <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Teody Manansala		
Test Date:	12/28/2015		
Remarks:	<b>f= 100kHz – 30MHz plot, and loop antenna at 90 degree</b>		

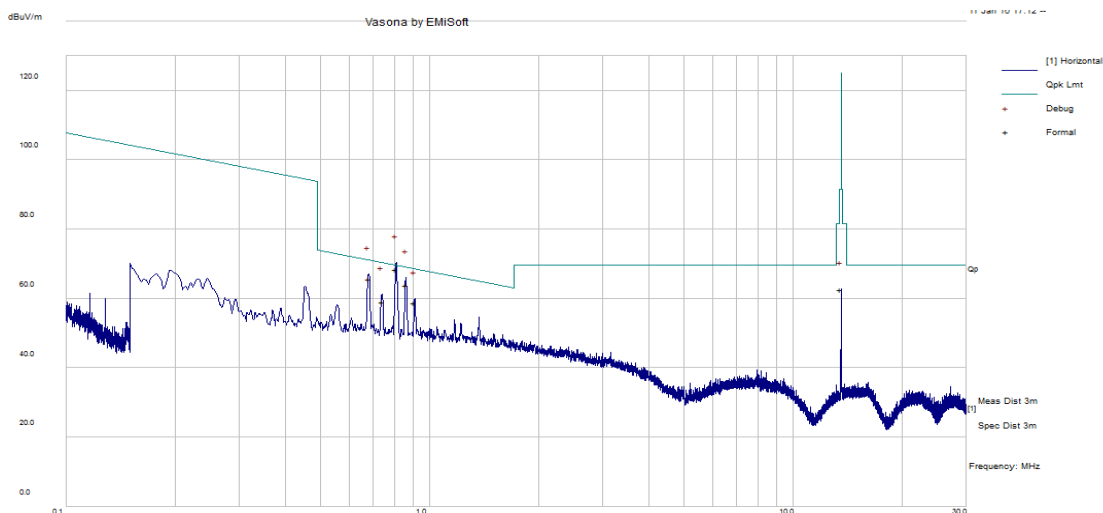

### Quasi Max Measurement


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
0.68	49.77	0.14	15.70	65.61	Quasi Max	H	100.00	19.00	70.95	-5.33	Pass
0.74	43.77	0.15	15.00	58.92	Quasi Max	H	100.00	141.00	70.20	-11.28	Pass
0.81	53.98	0.15	14.29	68.42	Quasi Max	H	100.00	158.00	69.44	-1.02	Pass
0.86	49.89	0.17	13.83	63.89	Quasi Max	H	100.00	6.00	68.91	-5.03	Pass
0.91	45.28	0.17	13.39	58.85	Quasi Max	H	100.00	38.00	68.43	-9.59	Pass
13.56	62.29	0.48	-0.16	62.62	Quasi Max	H	100.00	357.00	124.92	-62.30	Pass

Loop antenna at 0 degree

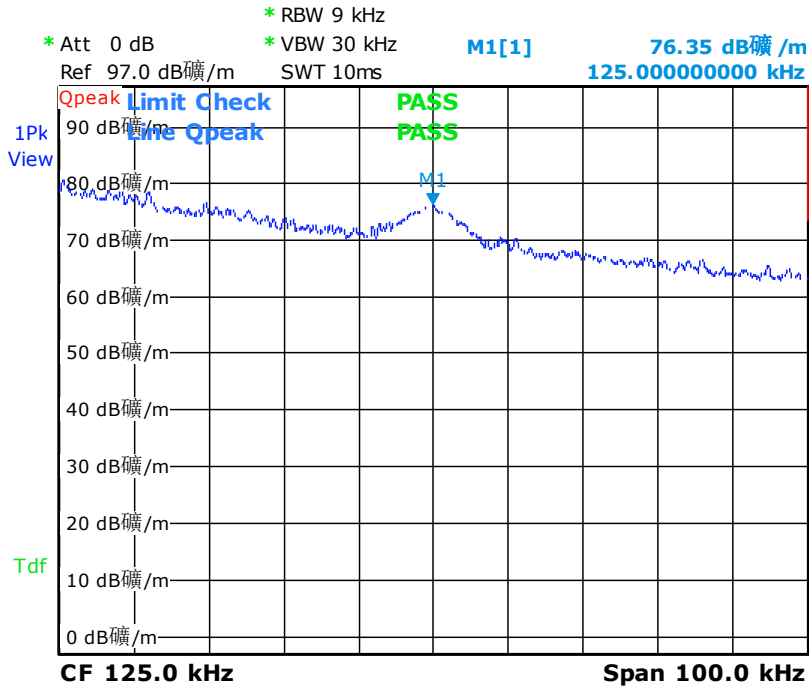


Frequency (kHz)	Amplitude (dB $\mu$ V/m)
125.00	76.35

Loop antenna at 90 degree

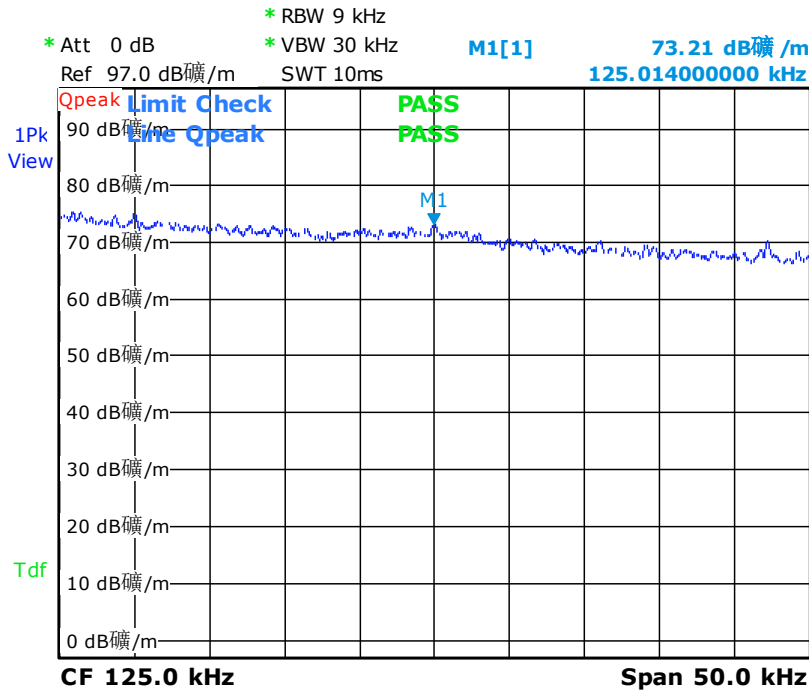

Frequency (kHz)	Amplitude (dB $\mu$ V/m)
125.014	73.21


**Loop antenna at 0 degree**

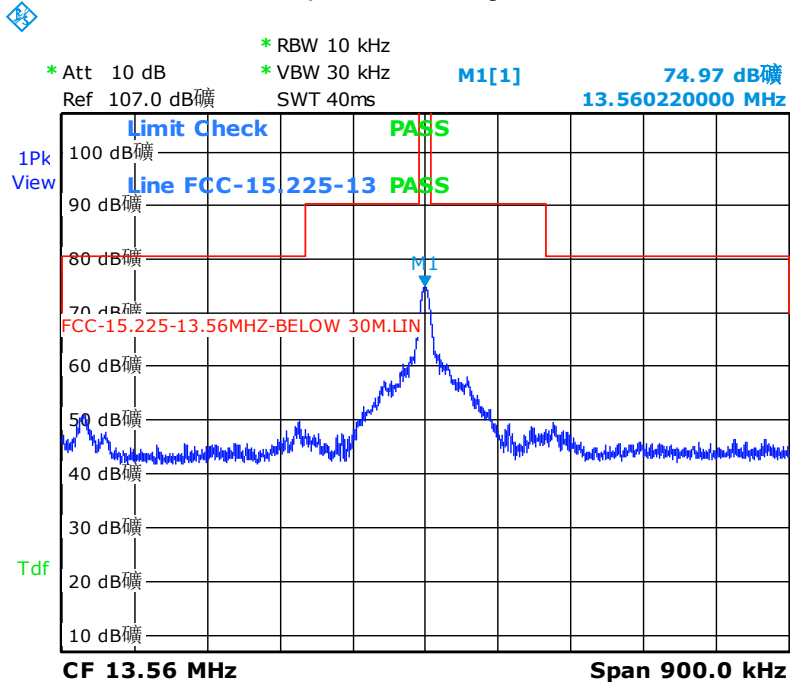

Date: 12.JAN.2016 01:18:22

Frequency (MHz)	Amplitude (dBμV/m)
13.56045	74.97

**Loop antenna at 90 degree**

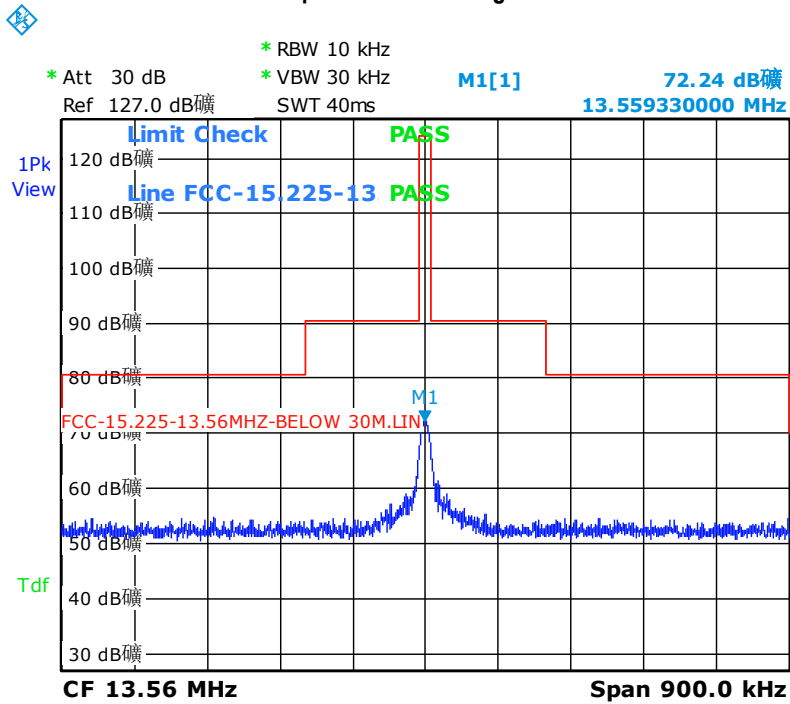

Date: 12.JAN.2016 01:50:37

Frequency (MHz)	Amplitude (dBμV/m)
13.56045	72.24

















## Annex A. TEST INSTRUMENT








Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>						
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>						
R & S Receiver	ESL6	100178	05/27/2015	1 Year	05/27/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	03/04/2016	1 Year	03/04/2017	<input type="checkbox"/>
Preamplifier (100KHz-7GHz)	LPA-6-30	11140711	02/19/2016	1 Year	02/19/2017	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	05/12/2015	1 Year	05/12/2016	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2015	1 Year	08/12/2016	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	08/25/2015	1 Year	08/25/2016	<input type="checkbox"/>
Tuned Dipole Antenna 30 - 1000 MHz (4pcs set)	AD-100	40133	10/02/2015	1 Year	10/02/2016	<input type="checkbox"/>
3 Meters SAC	3M	N/A	08/08/2015	1 Year	08/08/2016	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	<input type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	10SL0219	08/20/2015	1 Year	08/20/2016	<input type="checkbox"/>
Agilent Signal Generator	MXG N5182A	MY47071065	04/06/2015	1 Year	04/06/2016	<input type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input type="checkbox"/>
Test Equity Environment Chamber	1007H	61201	07/31/2015	1 Year	07/31/2016	<input type="checkbox"/>
USB RF Power Sensor	7002-006	10SL0190	09/03/2015	1 Year	09/03/2016	<input type="checkbox"/>

## Test Software Version

Test Item	Vendor	Software	Version
Radiated Emission	EMISoft	EMISoft Vasona	V5.0
Conducted Emission	EMISoft	EMISoft Vasona	V5.0

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1, A2, A3, A4, B1, B2, B3, B4, C</a>
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	<a href="#">Phase I, Phase II</a>
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio:</b> A1. Terminal equipment for purpose of calling</p> <p><b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p><b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurements</p>
Australia CAB Recognition		<p><b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p><b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2