



ADDENDUM TO CERTIFICATION TEST REPORT FC99-012

FOR THE

PROX PROGRAMMER, 1050A (1050-300)

FCC PART 15 SUBPART C

COMPLIANCE

DATE OF ISSUE: NOVEMBER 17, 2000

PREPARED FOR:

HID Corporation
9292 Jeronimo
Irvine, CA 92618-1905

P.O. No: 007530
W.O. No: 70939

Report No: FC99-012A

DOCUMENTATION CONTROL:

Tracy Phillips
Documentation Control Supervisor
CKC Laboratories, Inc.

PREPARED BY:

Joyce Walker
CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

Date of test: February 18, 1999

APPROVED BY:

Dennis Ward
Director of Laboratories
CKC Laboratories, Inc.

This report contains a total of 25 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Summary Of Results.....	4
Equipment Under Test (EUT) Description.....	4
Measurement Uncertainty.....	4
EUT Operating Frequency.....	4
Peripheral Devices	4
Report Of Measurements.....	5
Table 1: Six Highest Radiated Emission Levels 9Khz-30Mhz	5
Table 2: Six Highest Radiated Emission Levels 30Mhz-1Ghz	6
Table 3: Six Highest Conducted Emission Levels	7
Table A : List Of Test Equipment	8
EUT Setup	9
Test Instrumentation And Analyzer Settings.....	9
Table B : Analyzer Bandwidth Settings Per Frequency Range.....	10
Spectrum Analyzer Detector Functions.....	10
Peak	10
Quasi-Peak.....	10
Average.....	11
Test Methods	11
Radiated Emissions Testing.....	11
Conducted Emissions Testing	12
Sample Calculations	12
Appendix A : Information About The Equipment Under Test.....	14
I/O Ports.....	15
Crystal Oscillators	15
Printed Circuit Boards	15
Required EUT Changes To Comply.....	15
Photograph Showing Radiated Emissions	16
Photograph Showing Radiated Emissions.....	17
Photograph Showing Conducted Emissions.....	18
Appendix B : Measurement Data Sheets.....	19

CKC Laboratories, Inc. has Certificates of Accreditation from the following agencies:
DATEch (Germany); A2LA (USA); FCC (USA); VCCI (Japan); BSMI (Taiwan); HOKLAS (Hong Kong).
CKC Laboratories, Inc. has Letters of Acceptance through an MRA for the following agencies:
ACA/NATA (Australia); SABS (South Africa); SWEDAC (Sweden); TUV Rheinland-Germany; TUV Rheinland-Korea; TUV Rheinland-Russia; Radio Communication Agency (RA); NEMKO (Norway).

ADMINISTRATIVE INFORMATION

DATE OF TEST: February 18, 1999

PURPOSE OF TEST: To demonstrate the compliance of the Prox Programmer, 1050A, with the requirements for FCC Part 15, Subpart C devices.
The addendum is reflects model name changes.

MANUFACTURER: HID Corporation
9292 Jeronimo
Irvine, CA 92618-1905

REPRESENTATIVE: Ken Long

TEST LOCATION: CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

TEST PERSONNEL: Dustin Oaks

TEST METHOD: ANSI C63.4 1992

FREQUENCY RANGE TESTED: 9 kHz - 1000 MHz

EQUIPMENT UNDER TEST: **Proxcard Programmer**
Manuf: HID Corporation
Model: 1050A (1050-300)
Serial: N/A
FCC ID: JQ61050 (pending)

SUMMARY OF RESULTS

The HID Corporation Prox Programmer, 1050A, was tested in accordance with ANSI C63.4 1992 for compliance with FCC 15, Subpart C of the FCC Rules.

As received, the above equipment was found to be fully compliant with the limits of FCC 15, Subpart C. The results in this report apply only to the items tested, as identified herein.

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

RFID Transponder Programmer

MEASUREMENT UNCERTAINTY

Associated with data in this report is a ± 4 dB measurement uncertainty.

EUT OPERATING FREQUENCY

The EUT was operating at 125 kHz.

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within $+15^{\circ}\text{C}$ and $+35^{\circ}\text{C}$.
The relative humidity was between 20% and 75%.

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device:

Lap Top Computer

Manuf: Toshiba
Model: PA1241U VCD
Serial: X7344472
FCC ID: N/A

Power Supply

Manuf: Elpac
Model: W1512
Serial: N/A
FCC ID: N/A

REPORT OF MEASUREMENTS

The following tables report the six highest worst case levels recorded during the tests performed on the Prox Programmer, 1050A. All readings taken are peak readings unless otherwise noted by a “Q” or “A”. The data sheets from which these tables were compiled are contained in Appendix B.

Table 1: Six Highest Radiated Emission Levels 9kHz-30MHz

FREQUENCY MHz	METER READING dBµV	CORRECTION FACTORS				CORRECTED READING dBµV/m	SPEC LIMIT dBµV/m	MARGIN dB	NOTES
		Mag L dB	Cable dB	15.31 Corr dB					
0.125	29.9	12.2	0.1	-40.0		2.2	25.7	-23.5	N
0.250	14.3	14.7	0.1	-40.0		-10.9	19.6	-30.5	N
0.500	6.4	12.8	0.2	0.0		19.4	33.6	-14.2	N
0.625	8.4	11.6	0.2	0.0		20.2	31.7	-11.5	N
0.750	2.5	10.7	0.2	0.0		13.4	30.1	-16.7	N
0.875	2.7	10.0	0.2	0.0		12.9	28.7	-15.8	N

Test Method: ANSI C63.4 1992
 Spec Limit : FCC 15.209 IAW 15.31
 Test Distance: 30 Meters

NOTES: H = Horizontal Polarization
 V = Vertical Polarization
 N = No Polarization
 D = Dipole Reading
 Q = Quasi Peak Reading
 A = Average Reading

COMMENTS: EUT is operating in Continuous program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter. 40dB/Dec correction used IAW 15.31.

Table 2: Six Highest Radiated Emission Levels 30MHz-1GHz

FREQUENCY MHz	METER READING dB μ V	CORRECTION FACTORS				CORRECTED READING dB μ V/m	SPEC LIMIT dB μ V/m	MARGIN DB	NOTES
		Amp dB	Bico n dB	Cable dB	Dist dB				
34.561	43.9	-27.3	12.4	1.0	0.0	30.0	40.0	-10.0	V
119.976	45.5	-27.2	13.8	2.0	0.0	34.1	43.5	-9.4	V
168.043	42.0	-26.9	14.8	2.4	0.0	32.3	43.5	-11.2	V
180.041	40.4	-26.9	15.9	2.5	0.0	31.9	43.5	-11.6	V
188.025	42.0	-26.8	16.7	2.6	0.0	34.5	43.5	-9.0	V
192.037	41.4	-26.8	17.1	2.6	0.0	34.3	43.5	-9.2	V

Test Method: ANSI C63.4 1992
 Spec Limit : FCC 15.209
 Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
 V = Vertical Polarization
 N = No Polarization
 D = Dipole Reading
 Q = Quasi Peak Reading
 A = Average Reading

COMMENTS: EUT is operating in Continuous program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter.

Table 3: Six Highest Conducted Emission Levels

FREQUENCY MHz	METER READING dB μ V	CORRECTION FACTORS				CORRECTED READING dB μ V	SPEC LIMIT dB μ V	MARGIN dB	NOTES
		Lisn dB							
11.977100	36.7	0.0				36.7	48.0	-11.3	W
22.939720	36.6	0.0				36.6	48.0	-11.4	W
23.686840	36.6	0.0				36.6	48.0	-11.4	W
27.173400	36.4	0.0				36.4	48.0	-11.6	B
27.422440	36.6	0.0				36.6	48.0	-11.4	W
29.427210	36.6	0.0				36.6	48.0	-11.4	B

Test Method:
Spec Limit :
Test Distance:

ANSI C63.4 1992
FCC 15.207
No Distance

NOTES: Q = Quasi Peak Reading
A = Average Reading
B = Black Lead
W = White Lead

COMMENTS: EUT is operating in Continuous program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter.

TABLE A

LIST OF TEST EQUIPMENT

VCCI Acceptance No. R-565 & C-580

1. Spectrum Analyzer, Hewlett Packard, Model No. 8566B, S/N 2209A01404. Calibration date: June 12, 1998. Calibration due date: June 12, 1999.
2. Preamp, Hewlett Packard, Model No. 8447D, S/N 1937A02604. Calibration date: April 10, 1998. Calibration due date: April 10, 1999.
3. Quasi-Peak Adapter, Hewlett Packard, Model No. 85650A, S/N 2811A01267. Calibration date: June 12, 1998. Calibration due date: June 12, 1999.
4. Biconical Antenna, A & H Systems, Model No. SAS-200/542, S/N 156. Calibration date: June 9, 1998. Calibration due date: June 9, 1999.
5. Log Periodic Antenna, A & H Systems, Model No. SAS-200/512, S/N 154. Calibration date: June 9, 1998. Calibration due date: June 9, 1999.
6. Magnetic Loop Antenna, EMCO, Model No. 6502, S/N 1074. Calibration date: May 11, 1998. Calibration due date: May 11, 1999.
7. LISN (FCC), Solar Electronics, S/N 855996, 992. Calibration date: May 28, 1998. Calibration due date: May 28, 1999.
8. Site B (Barn) Calibration date: June 18, 1998. Site B (Barn) Calibration due date: June 18 1999.
9. Test software, EMI Test 2.91.

EUT SETUP

The equipment under test (EUT) and the peripheral listed were set up in a manner that represented their normal use. Any special conditions required for the EUT to operate normally are identified in the comments that accompany Table 1-3 for radiated and conducted emissions. Additionally, a complete description of all the ports and I/O cables is included on the information sheets contained in Appendix A.

During radiated emissions testing, the EUT was mounted on a nonconductive, rotating table 80 cm above the conductive grid. The nonconductive table dimensions were 1 meter by 1.5 meters. This configuration is typical for radiated emissions testing of table top devices.

I/O cables were connected to the EUT and peripherals in the manner required for normal operation of the system. Excess cabling was bundled in the center in a serpentine fashion using 30-40 centimeter lengths.

During conducted emissions testing, the EUT was located on a wooden table measuring approximately 80 cm high, 1 meter deep, and 1.5 meters in length. One wall of the room where the EUT is located, has a minimum 2 meter by 2 meter conductive plane. The EUT was mounted on the wooden table 40 cm away from the conductive plane, and 80 cm from any other conductive surface.

The vertical metal plane used for conducted emissions was grounded to the earth. Power to the EUT was provided through a LISN. The LISN was grounded to the ground plane. All other objects were kept a minimum of 80 cm away from the EUT during the conducted test. Conducted emissions tests required the use of the LISN's listed in Table A.

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed in Table A were used to collect both the radiated and conducted emissions data for the Prox Programmer, 1050A. For frequencies below 30 MHz, the magnetic loop antenna was used. For radiated measurements below 300 MHz, the biconical antenna was used. For frequencies from 300 to 1000 MHz, the log periodic antenna was used. All antennas were located at a distance of 30 meters from the edge of the EUT while doing testing from 9kHz to 30M Hz, and 3 meters while doing testing from 30 MHz to 1 GHz. Conducted emissions tests required the use of the FCC type LISN's.

The HP spectrum analyzer was used for all measurements. Table B shows the analyzer bandwidth settings that were used in designated frequency bands. For conducted emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. A 10 dB external attenuator was also used during conducted tests, with internal offset correction in the analyzer. During radiated testing, the measurements were made with 0 dB of attenuation, a reference level of 97 dB μ V, and a vertical scale of 10 dB per division.

TABLE B : ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9k Hz	150 kHz	200 MHz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz

SPECTRUM ANALYZER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in Tables 1, 2 and 3 indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the six highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data for the Prox Programmer, 1050A.

Peak

In this mode, the Spectrum Analyzer or test engineer recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the analyzer called "peak hold," the analyzer had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the analyzer made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the HP Quasi-Peak Adapter for the HP Spectrum Analyzer. The detailed procedure for making quasi peak measurements contained in the HP Quasi-Peak Adapter manual were followed.

Average

When the frequencies are less than 30 MHz, average measurements may be made using the spectrum analyzer. To make these measurements, the test engineer reduces the video bandwidth on the analyzer until the modulation of the signal is filtered out. At this point the analyzer is set into the linear mode and the scan time is reduced.

TEST METHODS

The radiated and conducted emissions data of the Prox Programmer, 1050A, was taken with the HP Spectrum Analyzer. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the "Sample Calculations". The corrected data was then compared to the FCC Part 15, Subpart C emissions limits to determine compliance.

Preliminary and final measurements were taken in order to better ensure that all emissions from the EUT were found and maximized.

Radiated Emissions Testing

During the preliminary radiated scan, the EUT was powered up and operating in its defined FCC test mode with the I/O cables and line cords facing the antenna. The frequency range of 9 kHz to 30 MHz was scanned with the magnetic loop antenna. The frequency range of 30 MHz - 88 MHz was then scanned with the biconical antenna located about 1.5 meter above the ground plane in the vertical configuration. During this scan, the turntable was rotated and all peaks, which were at or near the limit, were recorded. The frequency range of 100 - 300 MHz was scanned with the biconical antenna in the same manner, and the peaks recorded. Lastly, a scan of the FM band from 88 - 110 MHz was made, using a reduced resolution bandwidth and a reduced frequency span. The biconical antenna was changed to the horizontal polarity and the above steps were repeated. After changing to the log periodic antenna in the horizontal configuration, the frequency range of 300 - 1000 MHz was scanned. The log periodic antenna was changed to the vertical polarity and the frequency range of 300 - 1000 MHz was again scanned. Care was taken to ensure that no frequencies were missed within the FM and TV bands. An analysis was performed to determine if the signals that were at or near the limit were caused by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

For the final radiated scan, the equipment was again positioned with its I/O and power cables facing the antenna. A thorough scan of all frequencies was manually made using a small frequency span, rotating the turntable as needed. Comparison with the previously recorded measurements was then made.

Using the peak readings from both scans as a guide, the test engineer then maximized the readings with respect to the table rotation, antenna height and configuration of the peripherals and cables. Maximizing of the cables was achieved by monitoring the spectrum analyzer on a closed circuit television monitor while the EUT cables were being moved and rearranged on the EUT table for maximum emissions. Photographs showing the final worst case configuration of the EUT are contained in Appendix A.

Conducted Emissions Testing

For conducted emissions testing, a 30 to 50 second sweep time was used for automated measurements in the frequency bands of 450 kHz to 1.705 MHz, 1.705 MHz to 3 MHz, and 3 MHz to 30 MHz. All readings within 20 dB of the limit were recorded. At frequencies where the recorded emissions were close to the limit, further investigation was performed manually at a slower sweep rate.

SAMPLE CALCULATIONS

The basic spectrum analyzer reading was converted using correction factors as shown in the emissions readings in Tables 1, 2 and 3. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula:

$$\begin{aligned} & \text{Meter reading (dB}\mu\text{V)} \\ & + \text{Antenna Factor (dB)} \\ & + \text{Cable Loss (dB)} \\ & - \text{Distance Correction (dB)} \\ & - \text{Pre-amplifier Gain (dB)} \\ & = \text{Corrected Reading(dB}\mu\text{V/m)} \end{aligned}$$

This reading was then compared to the applicable specification limit to determine compliance.

A typical data sheet will display the following in column format:

#	Freq MHz	Rdng dBuV	Cable	Amp.	Bicon	Mag L	15.31 Corr	Dist	Corr dBuV/m	Spec	Margin	Polar
---	-------------	--------------	-------	------	-------	-------	---------------	------	----------------	------	--------	-------

means reading number

Freq MHz is the frequency in MHz of the obtained reading.

Rdng dBuV is the reading obtained on the spectrum analyzer in dB μ V.

Amp. is short for the preamplifier factor or gain in dB.

Bicon is the biconical antenna factor in dB.

15.31 Corr is 40dB/Dec correction used IAW 15.31.

Mag L is the magnetic loop antenna factor in dB.

Cable is the cable loss in dB of the coaxial cable on the OATS.

Dist is the distance factor (in dB). It is used when testing at a different test distance than the one stated in the spec.

Corr dB μ V/m is the corrected reading which is now in dB μ V/m (field strength).

Spec is the specification limit (dB) stated in the agency's regulations.

Margin is the closeness to the specified limit in dB; + is over and - is under the limit.

Polar is the Polarity of the antenna with respect to earth.

APPENDIX A
INFORMATION ABOUT THE EQUIPMENT UNDER TEST

INFORMATION ABOUT THE EQUIPMENT UNDER TEST

Test Software/Firmware: **None**
 CRT was displaying: **NA**
 Power Supply Manufacturer: **Elpac**
 Power Supply Part Number: **W152-760**
 AC Line Filter Manufacturer: **NA**
 AC Line Filter Part Number: **NA**
 Line voltage used during testing: **120V power adapter converted power to 12VDC**

I/O PORTS

Type	#
RS-232 Serial Interface	1
DC Power	1

CRYSTAL OSCILLATORS

Type	Freq In MHz
Ceramic Resonator	4Mhz

PRINTED CIRCUIT BOARDS

Function	Model & Rev	Clocks, MHz	Layers	Location
All Electronics	Rev. B	4 MHz	4	

CABLE INFORMATION

Cable #: HID 43-0001-05	Cable(s) of this type:
Cable Type: Shielded Construction: Multiconductor Connected To End (1): Reader Connector At End (1): None Shield Grounded At (1): Shield Ground Part Number:	Shield Type: Foil with Drain Length In Meters: 2.44 Connected To End (2): PC Connector At End (2): DB-9 Shield Grounded At (2): NC Number of Conductors:
Notes:	

Cable #:	Cable(s) of this type:
Cable Type: DC Power Construction: Multiconductor Connected To End (1): Reader Connector At End (1): NA Shield Grounded At (1): Part Number:	Shield Type: None Length In Meters: 1.83 Connected To End (2): Power Supply Connector At End (2): NA Shield Grounded At (2): NA Number of Conductors: 2
Notes:	

REQUIRED EUT CHANGES TO COMPLY:

None.

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Front View

NOTES:

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Back View

NOTES:

PHOTOGRAPH SHOWING CONDUCTED EMISSIONS



Conducted Emissions

NOTES:

APPENDIX B
MEASUREMENT DATA SHEETS

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest Rd, Barn • Mariposa, CA 95338 • (800)-500-4EMC

Customer: **HID Corporation** Date: Feb-18-99
 Specification: Time: 11:45
 Test Type: **Maximized Emissions** Sequence#: 19
 Equipment: **Proxcard Programmer**
 Manufacturer: **HID** Tested By: Dustin Oaks
 Model: 1050A
 S/N: N/A

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Proxcard Programmer*	HID	1050A	N/A

Support Devices:

Function	Manufacturer	Model #	S/N
Lap Top	Toshiba	PA1241U VCD	X7344472
Power Supply	Elpac	2306	920035

Test Conditions / Notes:

EUT is operating in Continuous program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter. 40dB/Dec correction used IAW 15.31.

Measurement Data:

Sorted by Margin

Test Distance: 30 Meters

#	Freq	Rdng dBµV	Mag L dB	Cable dB	15.31		Dist dB	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar
					Corr dB	dB					
1	625.000k	8.4	+11.6	+0.2	+0.0		+0.0	20.2	31.7	-11.5	None
2	500.000k	6.4	+12.8	+0.2	+0.0		+0.0	19.4	33.6	-14.2	None
3	875.000k	2.7	+10.0	+0.2	+0.0		+0.0	12.9	28.7	-15.8	None
4	750.000k	2.5	+10.7	+0.2	+0.0		+0.0	13.4	30.1	-16.7	None
5	125.000k	29.9	+12.2	+0.1	-40.0		+0.0	2.2	25.7	-23.5	None
6	250.000k	14.3	+14.7	+0.1	-40.0		+0.0	-10.9	19.6	-30.5	None
7	375.000k	10.1	+14.3	+0.1	-40.0		+0.0	-15.5	16.1	-31.6	None

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest Rd, Barn • Mariposa, CA 95338 • (800)-500-4EMC

Customer: **HID Corporation** Date: Feb-18-99
 Specification: Time: 15:02
 Test Type: **Maximized Emissions** Sequence#: 25
 Equipment: **Proxcard Programmer**
 Manufacturer: **HID** Tested By: Dustin Oaks
 Model: 1050A
 S/N: N/A

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Proxcard Programmer*	HID	1050A	N/A

Support Devices:

Function	Manufacturer	Model #	S/N
Lap Top	Toshiba	PA1241U VCD	X7344472
Power Supply	Elpac	2306	920035

Test Conditions / Notes:

EUT is operating in Continuos program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter.

Measurement Data: Sorted by Margin Test Distance: 3 Meters

#	Freq MHz	Rdng dBµV	Amp dB	Bicon dB	dB	Cable dB	Dist dB	Corr dBµV/m	Spec dBµV/m	Margin dB	Polar
1	188.025	42.0	-26.8	+16.7		+2.6	+0.0	34.5	43.5	-9.0	Vert
2	192.036	41.4	-26.8	+17.1		+2.6	+0.0	34.3	43.5	-9.2	Vert
3	119.976	45.5	-27.2	+13.8		+2.0	+0.0	34.1	43.5	-9.4	Vert
4	34.561	43.9	-27.3	+12.4		+1.0	+0.0	30.0	40.0	-10.0	Vert
5	168.043	42.0	-26.9	+14.8		+2.4	+0.0	32.3	43.5	-11.2	Vert
6	180.041	40.4	-26.9	+15.9		+2.5	+0.0	31.9	43.5	-11.6	Vert
7	57.026	39.3	-27.2	+10.0		+1.3	+0.0	23.4	40.0	-16.6	Vert
8	69.029	40.4	-27.2	+8.3		+1.4	+0.0	22.9	40.0	-17.1	Vert

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest Rd, Barn • Mariposa, CA 95338 • (800)-500-4EMC

Customer: **HID Corporation** Date: Mar-15-99
 Specification: **FCC 15.207** Time: 09:17
 Test Type: **Conducted Emissions** Sequence#: 26
 Equipment: **Proxcard Programmer**
 Manufacturer: **HID** Tested By: Dustin Oaks
 Model: 1050A
 S/N: N/A

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Proxcard Programmer*	HID	1050A	N/A

Support Devices:

Function	Manufacturer	Model #	S/N
Lap Top	Toshiba	PA1241U VCD	X7344472
Power Supply	Elpac Power Systems	W1512	N/A

Test Conditions / Notes:

EUT is operating in Continuos program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter.


Measurement Data: Sorted by Margin Test Lead: Black

#	Freq	Rdng dB μ V	dB	dB	dB	dB	Dist dB	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar
1	29.427M	36.6					+0.0	36.6	48.0	-11.4	Black
2	27.173M	36.4					+0.0	36.4	48.0	-11.6	Black
3	28.668M	35.9					+0.0	35.9	48.0	-12.1	Black
4	27.921M	35.9					+0.0	35.9	48.0	-12.1	Black
5	25.679M	35.8					+0.0	35.8	48.0	-12.2	Black
6	14.821M	35.7					+0.0	35.7	48.0	-12.3	Black
7	11.961M	35.7					+0.0	35.7	48.0	-12.3	Black
8	20.275M	35.6					+0.0	35.6	48.0	-12.4	Black
9	475.024k	35.6					+0.0	35.6	48.0	-12.4	Black
10	26.426M	35.5					+0.0	35.5	48.0	-12.5	Black

CKC Laboratories, Inc. Date: Mon Mar-15-1999 Time: 09:17:35 WO#: 70939

Test Lead: Black Sequence#: 26

1050A Connected to LISN

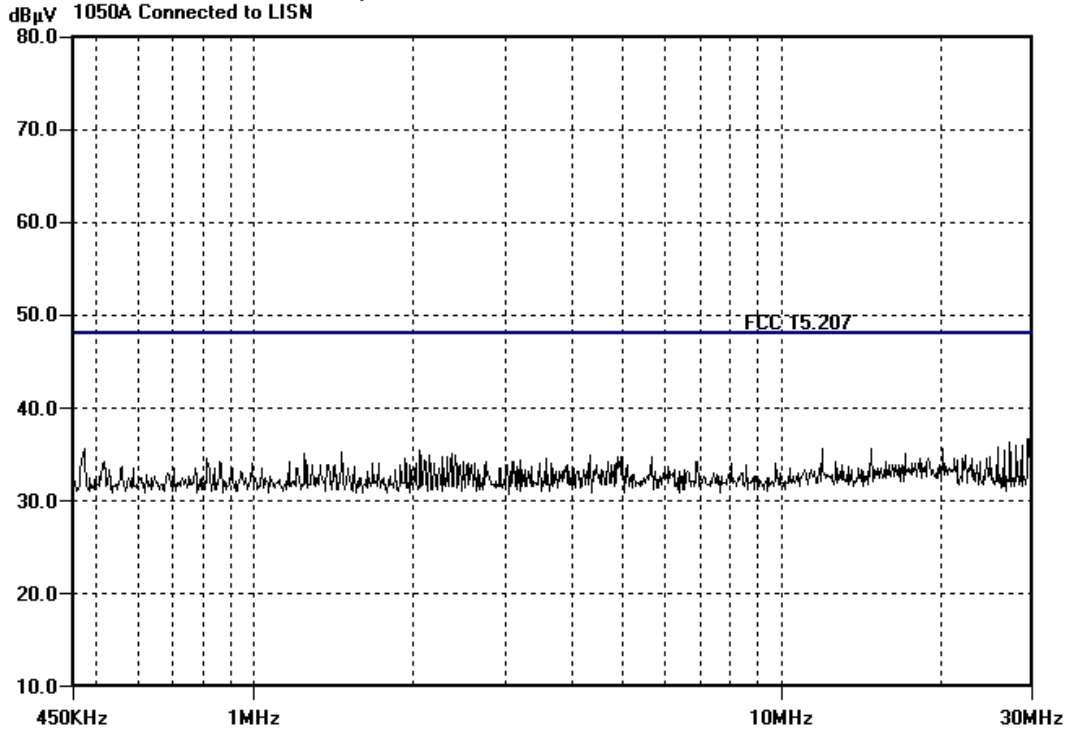

Test Location: CKC Laboratories, Inc. • 5473A Clouds Rest Rd, Barn • Mariposa, CA 95338 • (800)-500-4EMC

Customer: **HID Corporation** Date: Mar-15-99
 Specification: **FCC 15.207** Time: 09:17
 Test Type: **Conducted Emissions** Sequence#: 27
 Equipment: **Proxcard Programmer**
 Manufacturer: **HID** Tested By: Dustin Oaks
 Model: 1050A
 S/N: N/A

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Proxcard Programmer*	HID	1050A	N/A

Support Devices:

Function	Manufacturer	Model #	S/N
Lap Top	Toshiba	PA1241U VCD	X7344472
Power Supply	Elpac Power Systems	W1512	N/A

Test Conditions / Notes:

EUT is operating in Continuos program card mode, Proxcard located in field. EUT is connected to the PC via an RS232 cable. EUT received operating voltage of 12VDC via power adapter.

Measurement Data:

Sorted by Margin

Test Lead: White

#	Freq MHz	Rdng dB μ V	dB				Dist dB	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar
1	11.977	36.7					+0.0	36.7	48.0	-11.3	White
2	27.422	36.6					+0.0	36.6	48.0	-11.4	White
3	23.687	36.6					+0.0	36.6	48.0	-11.4	White
4	22.940	36.6					+0.0	36.6	48.0	-11.4	White
5	29.166	36.3					+0.0	36.3	48.0	-11.7	White
6	29.664	36.1					+0.0	36.1	48.0	-11.9	White
7	28.419	36.0					+0.0	36.0	48.0	-12.0	White
8	27.671	36.0					+0.0	36.0	48.0	-12.0	White
9	25.181	36.0					+0.0	36.0	48.0	-12.0	White
10	19.578	36.0					+0.0	36.0	48.0	-12.0	White

CKC Laboratories, Inc. Date: Mon Mar-15-1999 Time: 09:17:16 WO#: 70939
FCC 15.207 Test Lead: White Sequence#: 27

