



HID GLOBAL CORPORATION TEST REPORT
FOR THE
6136AXN MULTICLASS RPK40 READER
FCC PART 15 SUBPART C SECTIONS 15.207, 15.209, 15.225 AND RSS-210
COMPLIANCE

DATE OF ISSUE: APRIL 20, 2007

PREPARED FOR:

HID Global Corporation
9292 Jeronimo Road
Irvine, CA 92618-1905

P.O. No.: 11009776
W.O. No.: 86371

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Date of test: March 22 - April 11, 2007

Report No.: FC07-028

This report contains a total of 27 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

Administrative Information	3
Approvals	3
FCC to Canada Standard Correlation Matrix.....	4
Conditions for Compliance	4
FCC 15.33(a) Frequency Ranges Tested	5
FCC 15.35 Analyzer Bandwidth Settings	5
FCC 15.203 Antenna Requirements	5
EUT Operating Frequency	5
Temperature And Humidity During Testing.....	5
Equipment Under Test (EUT) Description	6
Equipment Under Test	6
Peripheral Devices	6
Report of Emissions Measurements.....	7
Testing Parameters	7
FCC 15.207 Conducted Emissions	9
FCC 15.209 Radiated Emissions	14
FCC 15.225 Radiated Emissions	17
RSS-210 Occupied Bandwidth	21
FCC 15.225/RSS-210 Emissions Mask	24
Frequency Stability	26

ADMINISTRATIVE INFORMATION

DATE OF TEST: March 22 - April 11, 2007

DATE OF RECEIPT: March 22, 2007

MANUFACTURER: HID Global Corporation
9292 Jeronimo Road
Irvine, CA 92618-1905

REPRESENTATIVE: Mat Aschenberg

TEST LOCATION: CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

TEST METHOD: ANSI C63.4 (2003), RSS GEN and RSS-210

PURPOSE OF TEST: To demonstrate the compliance of the 6136AxN multiCLASS RPK40 Reader with the requirements for FCC Part 15 Subpart C Sections 15.207, 15.209, 15.225 and RSS-210 devices.

APPROVALS


Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:



Joyce Walker, Quality Assurance Administrative Manager

TEST PERSONNEL:



Mike Wilkinson, EMC Engineer/Lab Manager



Randy Clark, EMC Engineer

FCC TO CANADA STANDARD CORRELATION MATRIX

Canadian Standard	Canadian Section	FCC Standard	FCC Section	Test Description
RSS GEN	7.1.4	47CFR	15.203	Antenna Connector Requirements
RSS GEN	7.2.1	47CFR	15.35(c)	Pulsed Operation
RSS GEN	7.2.2	47CFR	15.207	AC Mains Conducted Emissions Requirement
RSS 210	2.1	47CFR	15.215(c)	Frequency Stability Recommendation
RSS 210	2.2	47CFR	15.205	Restricted Bands of Operation
RSS 210	2.6	47CFR	15.209	General Radiated Emissions Requirement
RSS 210	A2.6	47CFR	15.225(a-c)	Fundamental and Emissions Mask Requirements
RSS 210	A2.6	NA	NA	$\pm 150\text{kHz}$ to $\pm 450\text{kHz}$ Emissions Requirement
RSS 210	A2.6	47CFR	15.225(d)	Out of band emissions
RSS 210	A2.6	47CFR	15.225(e)	Carrier Stability
	3082A-1		784962	Site File No.

CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply.

FCC 15.33(a) Frequency Ranges Tested

15.207 Conducted Emissions: 150 kHz – 30 MHz

15.209 Radiated Emissions: 9 kHz – 1000 MHz

FCC SECTION 15.35: ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz

FCC 15.203 Antenna Requirements

The antenna is an integral part of the EUT and is non-removable; therefore the EUT complies with Section 15.203 of the FCC rules.

EUT Operating Frequency

The EUT was operating at 13.56 MHz and 125 kHz.

Temperature And Humidity During Testing

The temperature during testing was within +15°C and + 35°C.

The relative humidity was between 20% and 75%.

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The customer declares the EUT tested by CKC Laboratories was representative of a production unit. This reader includes a 3126B Prox Expansion Module.

EQUIPMENT UNDER TEST

multiCLASS Reader

Manuf: HID Global Corporation
Model: 6136AxN multiCLASS RPK40 Reader
Serial: 021207
FCC ID: pending

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

DC Power Supply

Manuf: Topward Electric Instruments Co., Ltd.
Model: TPS-2000
Serial: 920035
FCC ID: NA

REPORT OF EMISSIONS MEASUREMENTS

TESTING PARAMETERS

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits to determine compliance. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit to determine compliance.

SAMPLE CALCULATIONS		
	Meter reading	(dB μ V)
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. The following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. When conducted emissions testing was performed, a 10 dB external attenuator was used with internal offset correction in the analyzer.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer/receiver readings were recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the measuring device called "peak hold," the measuring device had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the quasi-peak detector.

Average

For certain frequencies, average measurements may be made using the spectrum analyzer/receiver. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

FCC 15.207 CONDUCTED EMISSIONS

Test Setup Photos



Test Data Sheets

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID Global Corporation**

Specification: **FCC 15.207 - AVE**

Work Order #: **86371**

Date: 3/27/2007

Test Type: **Conducted Emissions**

Time: 14:15:45

Equipment: **multiCLASS Reader**

Sequence#: 13

Manufacturer: HID Global Corporation

Tested By: Mike Wilkinson

Model: 6136AxN multiCLASS RPK40 Reader

120V 60Hz

S/N: 021207

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
150kHz HP Filter TTE	G7754	03/09/2006	03/09/2008	02608
LISN, 8028-50-TS-24-BNC	8379276, 280	06/03/2005	06/03/2007	1248 & 1249

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
multiCLASS Reader*	HID Global Corporation	6136AxN multiCLASS RPK40 Reader	021207

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035

Test Conditions / Notes:

Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 21°C, Relative Humidity: 43%. 125 kHz transmitter module installed is Prox Module II.

Transducer Legend:

T1=LISN Insertion Loss s/n276	T2=Filter 150kHz HP AN02608
T3=Cable - Site D LISN 100k-30M	

Measurement Data:


Reading listed by margin.

Test Lead: Black

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	13.561M	30.3	+0.5	+0.1	+10.9		+0.0	41.8	50.0	-8.2	Black
Ave											
^	13.560M	47.6	+0.5	+0.1	+10.9		+0.0	59.1	50.0	+9.1	Black
3	160.000k	22.8	+0.4	+1.9	+11.6		+0.0	36.7	55.5	-18.8	Black
4	9.430M	17.1	+0.5	+0.1	+10.8		+0.0	28.5	50.0	-21.5	Black

5	17.650M	16.9	+0.4	+0.2	+10.9	+0.0	28.4	50.0	-21.6	Black
6	176.000k	17.2	+0.4	+0.3	+11.7	+0.0	29.6	54.7	-25.1	Black
7	27.123M	12.9	+0.4	+0.1	+11.0	+0.0	24.4	50.0	-25.6	Black
8	9.990M	8.4	+0.5	+0.1	+10.8	+0.0	19.8	50.0	-30.2	Black

CKC Laboratories Date: 3/27/2007 Time: 14:15:45 HID Global W/O#: 86371
 FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 13
 HID Global M/N 6136AxN multiCLASS RPK40 Reader

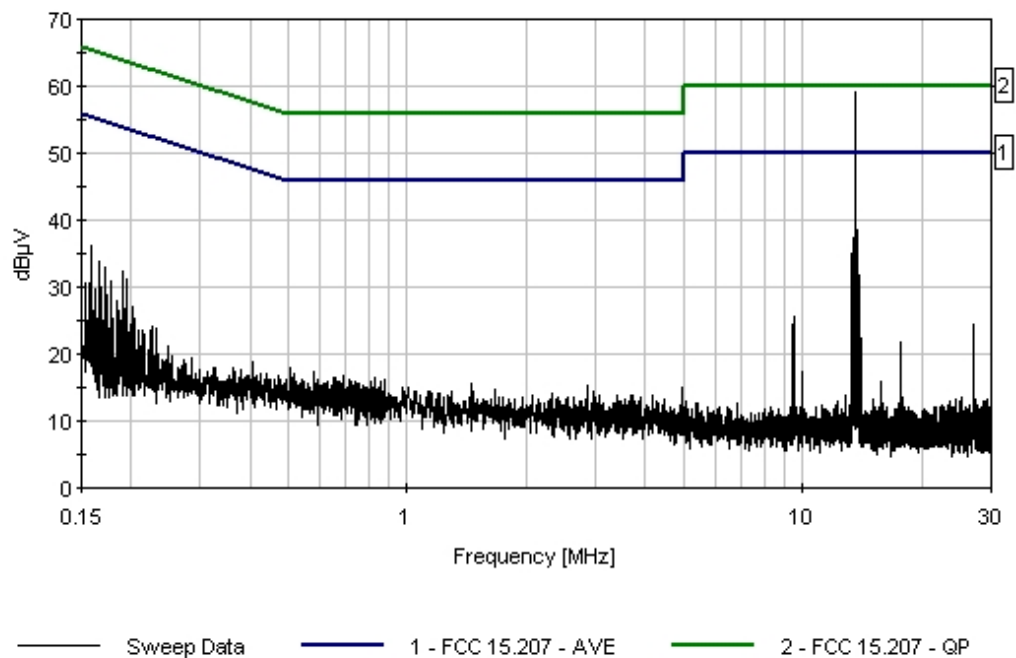

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID Global Corporation**

Specification: **FCC 15.207 - AVE**

Work Order #: **86371**

Date: 3/27/2007

Test Type: **Conducted Emissions**

Time: 14:28:36

Equipment: **multiCLASS Reader**

Sequence#: 14

Manufacturer: HID Global Corporation

Tested By: Mike Wilkinson

Model: 6136AxN multiCLASS RPK40 Reader

120V 60Hz

S/N: 021207

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
150kHz HP Filter TTE	G7754	03/09/2006	03/09/2008	02608
LISN, 8028-50-TS-24-BNC	8379276, 280	06/03/2005	06/03/2007	1248 & 1249

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
multiCLASS Reader*	HID Global Corporation	6136AxN multiCLASS RPK40 Reader	021207

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035

Test Conditions / Notes:

Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. Frequency Range Investigated: 150 kHz to 30 MHz. Temperature: 21°C, Relative Humidity: 43%. 125 kHz transmitter module installed is Prox Module II.

Transducer Legend:

T1=LISN Insertion Loss s/n280	T2=Filter 150kHz HP AN02608
T3=Cable - Site D LISN 100k-30M	

Measurement Data:


Reading listed by margin.

Test Lead: White

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	Dist dB	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	13.561M	24.0	+0.4	+0.1	+10.9	+0.0	35.4	50.0	-14.6	White
	Ave									
^	13.561M	46.0	+0.4	+0.1	+10.9	+0.0	57.4	50.0	+7.4	White
3	155.600k	21.7	+0.3	+2.4	+11.6	+0.0	36.0	55.7	-19.7	White
4	181.000k	17.6	+0.3	+0.3	+11.7	+0.0	29.9	54.4	-24.5	White
5	27.120M	11.0	+0.5	+0.1	+11.0	+0.0	22.6	50.0	-27.4	White

6	9.500M	8.7	+0.4	+0.1	+10.8	+0.0	20.0	50.0	-30.0	White
7	17.790M	7.0	+0.4	+0.2	+10.9	+0.0	18.5	50.0	-31.5	White
8	15.820M	6.7	+0.4	+0.1	+10.8	+0.0	18.0	50.0	-32.0	White

CKC Laboratories Date: 3/27/2007 Time: 14:28:36 HID Global W/O#: 86371
 FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 14
 HID Global M/N 6136AxN multiCLASS RPK40 Reader

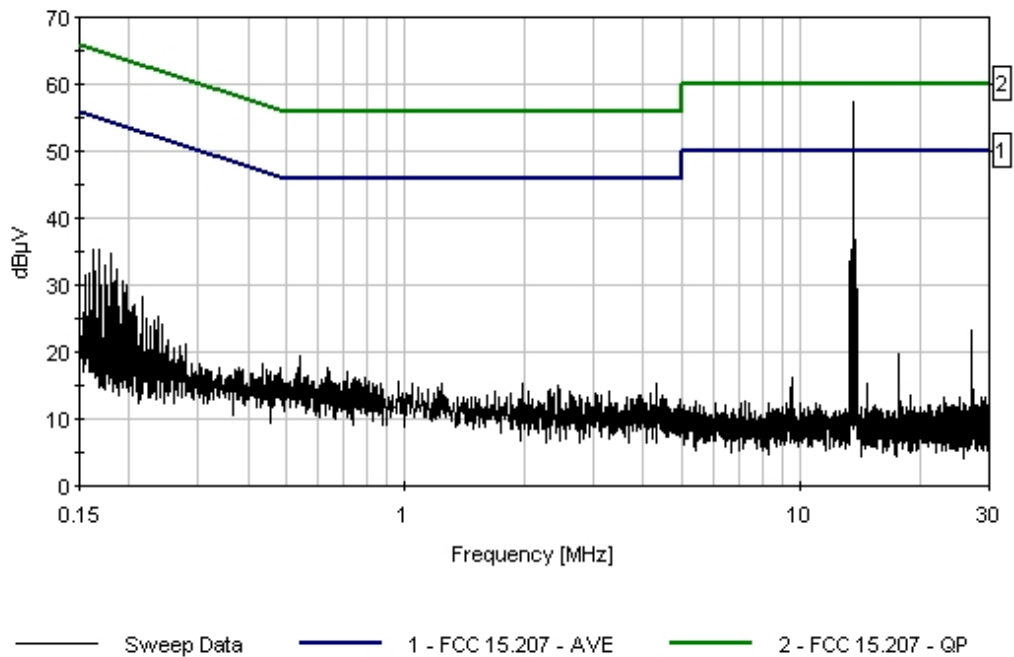

FCC 15.209 RADIATED EMISSIONS

Test Setup Photos



Test Data Sheets

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID Global Corporation**
 Specification: **FCC 15.209**
 Work Order #: **86371** Date: 3/27/2007
 Test Type: **Maximized Emissions** Time: 11:59:24
 Equipment: **multiCLASS Reader** Sequence#: 11
 Manufacturer: HID Global Corporation Tested By: Mike Wilkinson
 Model: 6136AxN multiCLASS RPK40 Reader
 S/N: 021207

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/13/2005	05/13/2007	00226

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
multiCLASS Reader*	HID Global Corporation	6136AxN multiCLASS RPK40 Reader	021207

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035

Test Conditions / Notes:

Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. Test data is corrected for proper test distance using 40dB per decade correction factor in accordance with 15.31. Frequency Range Investigated: Carrier. Temperature: 21°C, Relative Humidity: 43%. 125 kHz transmitter module installed is Prox Module II.

Transducer Legend:

T1=Cable - Site D 10m 9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
T3=15.31 10m 40dB/Dec Correction	

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	125.463k	50.2	+0.2	+10.2	-60.0		+0.0	0.6	25.6	-25.0	Horiz
2	125.483k	41.4	+0.2	+10.2	-60.0		+0.0	-8.2	25.6	-33.8	Horiz

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID Global Corporation**

Specification: **FCC 15.209**

Work Order #: **86371**

Date: 3/27/2007

Test Type: **Maximized Emissions**

Time: 13:42:09

Equipment: **multiCLASS Reader**

Sequence#: 12

Manufacturer: HID Global Corporation

Tested By: Mike Wilkinson

Model: 6136AxN multiCLASS RPK40 Reader

S/N: 021207

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/13/2005	05/13/2007	00226

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
multiCLASS Reader*	HID Global Corporation	6136AxN multiCLASS RPK40 Reader	021207

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035

Test Conditions / Notes:

Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. Test data is corrected for proper test distance using 40dB per decade correction factor in accordance with 15.31. Frequency Range Investigated: 9 kHz to 30 MHz. Temperature: 21°C, Relative Humidity: 43%. 125 kHz transmitter module installed is Prox Module II.

Transducer Legend:

T1=Cable - Site D 10m 9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
T3=15.31 10m 40dB/Dec Correction	

Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	Dist Table dB	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	27.122M	23.1	+1.4	+6.6	-20.0	+0.0	11.1	29.5	-18.4	Horiz
2	27.122M	15.0	+1.4	+6.6	-20.0	+0.0	3.0	29.5	-26.5	Vert
3	250.936k	41.0	+0.2	+10.2	-60.0	+0.0	-8.6	19.6	-28.2	Vert
4	253.200k	38.4	+0.2	+10.2	-60.0	+0.0	-11.2	19.5	-30.7	Horiz

FCC 15.225 RADIATED EMISSIONS

Test Setup Photos



Test Data Sheets

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID Global Corporation**

Specification: **15.225/15.209**

Work Order #: **86371**

Date: 3/23/2007

Test Type: **Maximized Emissions**

Time: 10:33:22

Equipment: **multiCLASS Reader**

Sequence#: 1

Manufacturer: HID Global Corporation

Tested By: Mike Wilkinson

Model: 6136AxN multiCLASS RPK40 Reader

S/N: 021207

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
Chase CBL6111C Bilog	2456	12/30/2006	12/30/2008	01991
HP 8447D Preamp	1937A02604	03/14/2007	03/14/2009	00099

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
multiCLASS Reader*	HID Global Corporation	6136AxN multiCLASS RPK40 Reader	021207

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035

Test Conditions / Notes:

Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. Frequency Range Investigated: 30-1000 MHz. Temperature: 21°C, Relative Humidity: 43%. 125 kHz transmitter module installed is Prox Module II.

Transducer Legend:

T1=AMP AN00099	T2=Bilog Site D
T3=Cable - Site D 10m 9k-1G	

Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	40.685M	41.5	-27.2	+12.0	+1.7		+10.0	38.0	40.0	-2.0	Verti
QP											
^	40.690M	43.8	-27.2	+12.0	+1.7		+10.0	40.3	40.0	+0.3	Verti
3	298.340M	40.3	-26.4	+12.8	+5.5		+10.0	42.2	46.0	-3.8	Verti
4	230.544M	42.1	-26.5	+10.7	+4.7		+10.0	41.0	46.0	-5.0	Verti
5	284.783M	37.9	-26.4	+12.6	+5.4		+10.0	39.5	46.0	-6.5	Verti

6	203.424M	40.5	-26.7	+8.6	+4.2	+10.0	36.6	43.5	-6.9	Verti
	QP									
^	203.424M	41.9	-26.7	+8.6	+4.2	+10.0	38.0	43.5	-5.5	Verti
8	176.303M	40.5	-26.8	+8.4	+3.9	+10.0	36.0	43.5	-7.5	Verti
	QP									
^	176.303M	41.5	-26.8	+8.4	+3.9	+10.0	37.0	43.5	-6.5	Verti
10	40.699M	34.9	-27.2	+12.0	+1.7	+10.0	31.4	40.0	-8.6	Horiz
11	311.905M	34.9	-26.5	+13.2	+5.5	+10.0	37.1	46.0	-8.9	Verti
12	298.349M	34.9	-26.4	+12.8	+5.5	+10.0	36.8	46.0	-9.2	Horiz
13	284.786M	34.4	-26.4	+12.6	+5.4	+10.0	36.0	46.0	-10.0	Horiz
14	54.250M	36.9	-27.1	+7.3	+2.0	+10.0	29.1	40.0	-10.9	Verti
15	325.475M	32.1	-26.6	+13.5	+5.6	+10.0	34.6	46.0	-11.4	Verti
16	135.623M	33.7	-27.0	+11.0	+3.4	+10.0	31.1	43.5	-12.4	Verti
17	271.215M	31.8	-26.4	+12.4	+5.3	+10.0	33.1	46.0	-12.9	Verti
18	311.909M	30.7	-26.5	+13.2	+5.5	+10.0	32.9	46.0	-13.1	Horiz
19	203.419M	34.1	-26.7	+8.6	+4.2	+10.0	30.2	43.5	-13.3	Horiz
20	108.503M	34.0	-27.1	+10.1	+3.0	+10.0	30.0	43.5	-13.5	Verti
21	230.539M	32.5	-26.5	+10.7	+4.7	+10.0	31.4	46.0	-14.6	Horiz
22	257.659M	30.1	-26.4	+12.1	+5.1	+10.0	30.9	46.0	-15.1	Horiz
23	149.183M	28.3	-26.9	+10.4	+3.6	+10.0	25.4	43.5	-18.1	Verti
24	216.984M	28.2	-26.6	+9.7	+4.4	+10.0	25.7	46.0	-20.3	Verti

Test Location: CKC Laboratories •4933 Sierra Pines Dr. • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID Global Corporation**

Specification: **47 CFR 15.225 Mask**

Work Order #: **86371**

Date: 3/27/2007

Test Type: **Maximized Emissions**

Time: 10:42:11

Equipment: **multiCLASS Reader**

Sequence#: 10

Manufacturer: HID Global Corporation

Tested By: Mike Wilkinson

Model: 6136AxN multiCLASS RPK40 Reader

S/N: 021207

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/13/2005	05/13/2007	00226

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
multiCLASS Reader*	HID Global Corporation	6136AxN multiCLASS RPK40 Reader	021207

Support Devices:

Function	Manufacturer	Model #	S/N
DC Power Supply	Topward Electric Instruments Co., Ltd.	TPS-2000	920035

Test Conditions / Notes:

Equipment is a multiCLASS Reader operating on a frequency of 13.56MHz and 125kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. Test data is corrected for proper test distance using 40dB per decade correction factor in accordance with 15.31. Frequency Range Investigated: Carrier. Temperature: 21°C, Relative Humidity: 43%. 125 kHz transmitter module installed is Prox Module II.

Transducer Legend:

T1=Cable - Site D 10m 9k-1G	T2=Mag Loop - AN 00226 - 9kHz-30M
-----------------------------	-----------------------------------

Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	Margin dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	13.561M	48.1	+1.0	+9.6		-19.0	39.7	84.0	-44.3	Vert
2	13.561M	44.7	+1.0	+9.6		-19.0	36.3	84.0	-47.7	Horiz

RSS-210 OCCUPIED BANDWIDTH

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/13/2005	05/13/2007	00226


Test Setup Photos






Test Conditions: Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. 125 kHz transmitter module installed is Prox Module II.

RSS-210 OCCUPIED BANDWIDTH 125 kHz

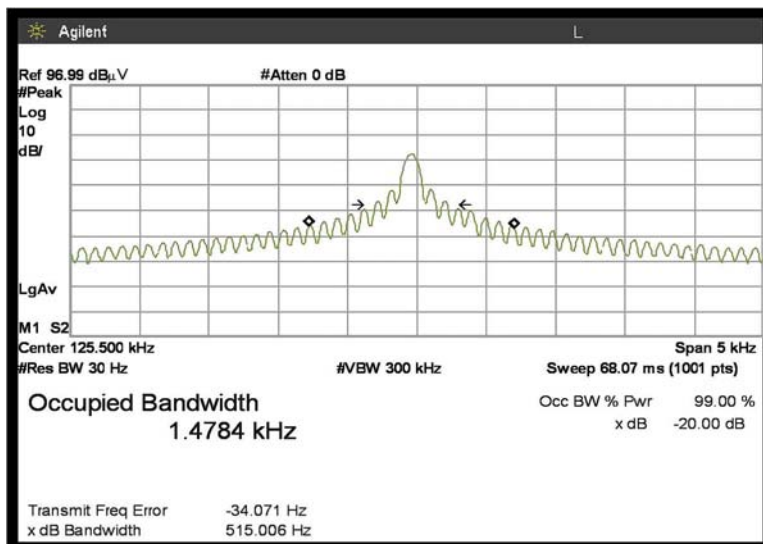

Tested By: Mike Wilkinson

RSS-210 OCCUPIED BANDWIDTH 13.56MHz

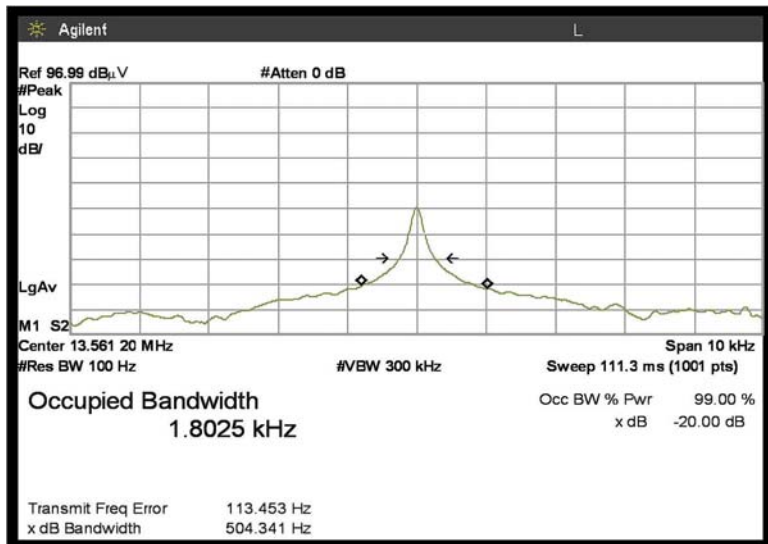

Tested By: Mike Wilkinson

FCC 15.225/RSS-210 EMISSIONS MASK

Test Equipment

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	01/03/2007	01/03/2009	02660
EMCO Loop Antenna	1074	05/13/2005	05/13/2007	00226


Test Setup Photos





Test Conditions: Equipment is a multiCLASS Reader operating on a frequency of 13.56 MHz and 125 kHz. The EUT is mounted vertically on a support structure to simulate normal installation. DC power supply is bonded to ground. 125 kHz transmitter module installed is Prox Module II.

Plot

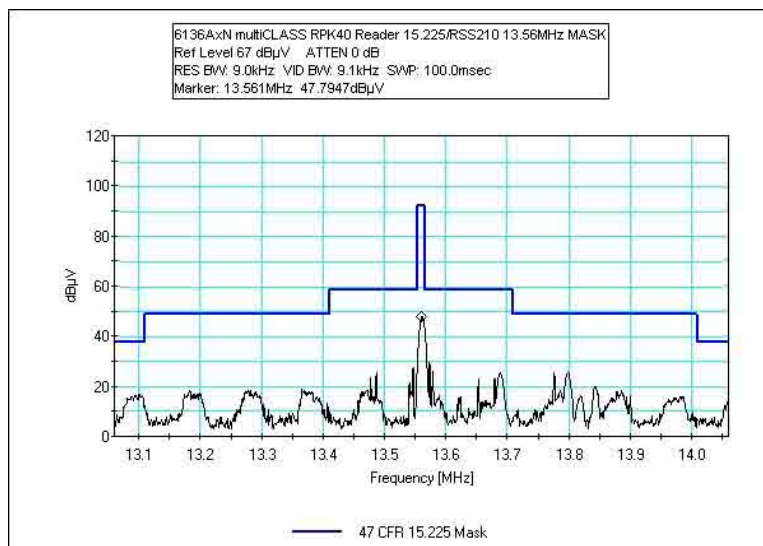

Tested By: Mike Wilkinson

FREQUENCY STABILITY

Test Equipment

Function	S/N	Cal Date	Cal Due Date	Asset #
Agilent E4446A SA	US44300407	1/3/2007	1/3/2009	2660
Solar Loop Sensor	N/A	3/4/2007	3/4/2009	170
Thermotron Temperature Chamber	11899	12/21/2006	12/21/2008	1879
HP 6205C Dual DC Power Supply	2228A01775	8/15/2005	8/15/2007	762

Test Setup Photos



Test Conditions: Equipment is placed inside of a temperature chamber. EUT power is provided via bench supply. Power variations are performed while monitoring with a digital volt meter.

Device Model #: multiCLASS RPK40 Reader
Operating Voltage: 12 VDC
Frequency Limit: 0.01 %

Temperature Variations

Channel Frequency:		6136AxN	Dev. (MHz)
		13.561196	
Temp (C)	Voltage		
-30	12		
-20	12	13.56112	0.00008
-10	12	13.56112	0.00008
0	12	13.56115	0.00005
10	12	13.56118	0.00001
20	12	13.56120	0.00000
30	12	13.56120	0.00001
40	12	13.56119	0.00001
50	12	13.56137	0.00017

Voltage Variations (±15%)

20	10.2	13.56120	0.00000
20	12	13.56120	0.00000
20	13.8	13.56120	0.00000

Max Deviation (MHz)	0.00017
Max Deviation (%)	0.00128
PASS	

Tested By: Randal Clark