



HID CORPORATION TEST REPORT
FOR THE
ICLASS LONG RANGE READER, 6150A
FCC PART 15 SUBPART C SECTIONS 15.207, 15.209 & 15.225
COMPLIANCE

DATE OF ISSUE: JULY 20, 2005

PREPARED FOR:

HID Corporation
9292 Jeronimo Road
Irvine, CA 92718

P.O. No.: 10003694
W.O. No.: 83674

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Date of test: June 1 - July 19, 2005

Report No.: FC05-024

This report contains a total of 38 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

| | |
|--|----|
| Administrative Information | 3 |
| FCC to Canada Standard Correlation Matrix..... | 4 |
| Conditions for Compliance | 4 |
| Approvals..... | 4 |
| FCC 15.33(a) Frequency Ranges Tested | 5 |
| FCC 15.35 Analyzer Bandwidth Settings..... | 5 |
| FCC 15.203 Antenna Requirements | 5 |
| FCC 15.205 Restricted Bands..... | 5 |
| EUT Operating Frequency | 5 |
| Temperature And Humidity During Testing..... | 5 |
| Equipment Under Test (EUT) Description | 6 |
| Equipment Under Test | 6 |
| Peripheral Devices | 6 |
| Report of Measurements | 7 |
| Table 1: FCC 15.207 Six Highest Conducted Emission Levels | 7 |
| Table 2: FCC 15.209 Fundamental Emission Levels | 8 |
| Table 3: FCC 15.209 Highest Radiated Emission Levels: 9kHz - 30 MHz | 9 |
| Table 4: FCC 15.209 Six Highest Radiated Emission Levels: 30-1000 MHz..... | 10 |
| Occupied Bandwidth..... | 11 |
| FCC 15.225 Emissions Mask..... | 12 |
| Frequency Stability and Voltage Variations | 13 |
| EUT Setup..... | 14 |
| Correction Factors..... | 14 |
| Table A: Sample Calculations | 14 |
| Test Instrumentation and Analyzer Settings | 15 |
| Spectrum Analyzer Detector Functions | 15 |
| Peak..... | 15 |
| Quasi-Peak | 15 |
| Average | 15 |
| EUT Testing..... | 16 |
| Mains Conducted Emissions..... | 16 |
| Radiated Emissions..... | 16 |
| Appendix A: Test Setup Photographs..... | 17 |
| Photograph Showing Mains Conducted Emissions | 18 |
| Photograph Showing Mains Conducted Emissions | 19 |
| Photograph Showing Radiated Emissions | 20 |
| Photograph Showing Radiated Emissions | 21 |
| Photograph Showing Temperature Testing | 22 |
| Appendix B: Test Equipment List | 23 |
| Appendix C: Measurement Data Sheets | 24 |

ADMINISTRATIVE INFORMATION

DATE OF TEST: June 1 - July 19, 2005

DATE OF RECEIPT: June 1, 2005

MANUFACTURER: HID Corporation
9292 Jeronimo Road
Irvine, CA 92718

REPRESENTATIVE: Frank de Vall

TEST LOCATION: CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

TEST METHOD: ANSI C63.4 (2003)

PURPOSE OF TEST: To demonstrate the compliance of the iClass Long Range Reader, 6150A with the requirements for FCC Part 15 Subpart C Sections 15.207, 15.209 and 15.225 devices.

FCC TO CANADA STANDARD CORRELATION MATRIX

| Canadian Standard | Canadian Section | FCC Standard | FCC Section | Test Description |
|-------------------|------------------|--------------|-------------|--|
| RSS 210 | 5.5 | 47CFR | 15.203 | Antenna Connector Requirements |
| RSS 210 | 6.2.1 | 47CFR | 15.209 | General Radiated Emissions Requirement |
| RSS 210 | 6.2.2(e) | 47CFR | 15.225(a)* | Fundamental Requirements |
| RSS 210 | 6.2.2(e) | NA | NA | ±150kHz to ±450kHz Emissions Requirement |
| RSS 210 | 6.2.2(e) | 47CFR | 15.225(b)* | Out of band emissions |
| RSS 210 | 6.2.2(e) | 47CFR | 15.225(c)* | Carrier Stability |
| RSS 210 | 6.3 | 47CFR | 15.205 | Restricted Bands of Operation |
| RSS 210 | 6.4 | 47CFR | 15.215(c) | Frequency Stability Recommendation |
| RSS 210 | 6.5 | 47CFR | 15.35(c) | Pulsed Operation |
| RSS 210 | 6.6 | 47CFR | 15.207 | AC Mains Conducted Emissions Requirement |
| | IC 3082-D | | 784962 | Site File No. |

* Indicates that FCC Requirements are more stringent than the Canadian Equivalent.

CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply.

APPROVALS

Steve Behm, Director of Engineering Services

QUALITY ASSURANCE:



Joyce Walker, Quality Assurance Administrative Manager

TEST PERSONNEL:



Randy Clark, EMC Engineer



Mike Wilkinson, Lab Manager

FCC 15.33(a) Frequency Ranges Tested

15.207 Conducted Emissions: 150 kHz – 30 MHz

15.209/15.225 Radiated Emissions: 9 kHz – 1000 MHz

| FCC SECTION 15.35: ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE | | | |
|---|---------------------|------------------|-------------------|
| TEST | BEGINNING FREQUENCY | ENDING FREQUENCY | BANDWIDTH SETTING |
| CONDUCTED EMISSIONS | 150 kHz | 30 MHz | 9 kHz |
| RADIATED EMISSIONS | 9 kHz | 150 kHz | 200 Hz |
| RADIATED EMISSIONS | 30 MHz | 1000 MHz | 120 kHz |

FCC 15.203 Antenna Requirements

The antenna is an integral part of the EUT and is non-removable; therefore the EUT complies with Section 15.203 of the FCC rules.

FCC 15.205 Restricted Bands

The fundamental operating frequency lies outside the restricted bands and therefore complies with the requirements of Section 15.205 of the FCC rules. Any spurious emission coming from the EUT was investigated to determine if any portion lies inside the restricted band. If any portion of a spurious emissions signal was found to be within a restricted band, investigation was performed to ensure compliance with Section 15.209.

EUT Operating Frequency

The EUT was operating at 13.56 MHz.

Temperature And Humidity During Testing

The temperature during testing was within +15°C and + 35°C.

The relative humidity was between 20% and 75%.

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

EQUIPMENT UNDER TEST

iClass Long Range Reader

Manuf: HID
Model: 6150A
Serial: 6150A-060105

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

DC Power Supply

Manuf: Topward Electric Instruments Co., Ltd.
Model: TPS-2000
Serial: 920035

REPORT OF MEASUREMENTS

The following tables report the worst case emissions levels recorded during the tests performed on the EUT. All readings taken were peak readings unless otherwise stated. The data sheets from which the emissions tables were compiled are contained in Appendix C.

Table 1: FCC 15.207 Six Highest Conducted Emission Levels

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V | SPEC LIMIT dB μ V | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|--|------------------------------------|-----------------------------|--------------|-------|
| | | Lisn dB | HPF dB | Cable dB | | | | | |
| 13.170000 | 45.3 | 0.4 | 0.1 | 0.4 | | 46.2 | 50.0 | -3.8 | W-1 |
| 13.562000 | 33.9 | 0.4 | 0.1 | 0.4 | | 34.8 | 50.0 | -15.2 | WA-2 |
| 13.562000 | 33.8 | 0.5 | 0.1 | 0.4 | | 34.8 | 50.0 | -15.2 | BA-2 |
| 19.700000 | 33.6 | 0.4 | 0.2 | 0.5 | | 34.7 | 50.0 | -15.3 | W-2 |
| 27.122400 | 43.5 | 0.4 | 0.2 | 0.5 | | 44.6 | 50.0 | -5.4 | B-1 |
| 27.129200 | 40.8 | 0.5 | 0.2 | 0.5 | | 42.0 | 50.0 | -8.0 | W-1 |

Test Method: ANSI C63.4 (2003)
Spec Limit: FCC Part 15 Subpart C Section 15.207

NOTES:
B = Black Lead
W = White Lead
1 = 12VDC
2 = 24VDC

COMMENTS: EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Power Supply adjusted to +12 VDC. Power Supply adjusted to +24 VDC. Carrier frequency investigated with the antenna terminals terminated into a dummy load. All other measurements are performed with the integral antenna attached. Frequency Range Investigated: 150kHz to 30MHz. Temperature: 25°C, Relative Humidity: 35%.

Table 2: FCC 15.209 Fundamental Emission Levels

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN DB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | Dist dB | | | | |
| 13.561 | 80.5 | 9.6 | | 0.8 | -19.0 | 71.9 | 84.0 | -12.1 | H |
| 13.561 | 75.6 | 9.6 | | 0.8 | -19.0 | 67.0 | 84.0 | -17.0 | V |

Test Method: ANSI C63.4 (2003)
 Spec Limit: FCC Part 15 Subpart C Section 15.225
 Test Distance: 10 Meters

NOTES: H = Horizontal Polarization
 V = Vertical Polarization

COMMENTS: EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Test distance correction factor used in accordance with 15.31, 40dB per decade to correct test data for comparison with the limit at 30 meters. Frequency Range Investigated: Carrier. Temperature: 28°C, Relative Humidity: 45%.

Table 3: FCC 15.209 Highest Radiated Emission Levels: 9kHz - 30 MHz

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN DB | NOTES |
|------------------|--------------------------------|--------------------|-------------|------------|-------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Cable dB | Corr dB | | | | | |
| 27.123 | 36.4 | 6.6 | | 1.1 | -20.0 | 24.1 | 29.5 | -5.4 | VQ |
| 27.123 | 35.6 | 6.6 | | 1.1 | -20.0 | 23.3 | 29.5 | -6.2 | HQ |

Test Method: ANSI C63.4 (2003)
 Spec Limit: FCC Part 15 Subpart C Section 15.209
 Test Distance: 10 Meters

NOTES: H = Horizontal Polarization
 V = Vertical Polarization
 Q = Quasi Peak Reading

COMMENTS: EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Test distance correction factor used in accordance with 15.31, 40dB per decade to correct test data for comparison with the limit at 30 and 300 meters as appropriate. Frequency Range Investigated: 9kHz - 30MHz. Temperature: 28°C. Relative Humidity: 45%.

Table 4: FCC 15.209 Six Highest Radiated Emission Levels: 30-1000 MHz


| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN DB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | Dist dB | | | | |
| 40.689 | 43.2 | 12.0 | -27.0 | 1.4 | 10.0 | 39.6 | 40.0 | -0.4 | VQ |
| 54.245 | 43.0 | 7.3 | -26.8 | 1.6 | 10.0 | 35.1 | 40.0 | -4.9 | V |
| 81.369 | 42.7 | 6.9 | -27.0 | 2.0 | 10.0 | 34.6 | 40.0 | -5.4 | V |
| 108.489 | 45.4 | 10.1 | -26.8 | 2.4 | 10.0 | 41.1 | 43.5 | -2.4 | VQ |
| 122.057 | 42.2 | 11.0 | -26.7 | 2.5 | 10.0 | 39.0 | 43.5 | -4.5 | V |
| 189.866 | 44.5 | 8.3 | -26.6 | 3.2 | 10.0 | 39.4 | 43.5 | -4.1 | HQ |

Test Method: ANSI C63.4 (2003)
 Spec Limit: FCC Part 15 Subpart C Section 15.209
 Test Distance: 10 Meters


NOTES: H = Horizontal Polarization
 V = Vertical Polarization
 Q = Quasi Peak Reading

COMMENTS: EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Test distance correction factor used in accordance with 15.31, 20dB per decade to correct test data for comparison with the limit at 3 meters. Frequency Range Investigated: 30-1000MHz. Temperature: 28°C, Relative Humidity: 45%.

OCCUPIED BANDWIDTH

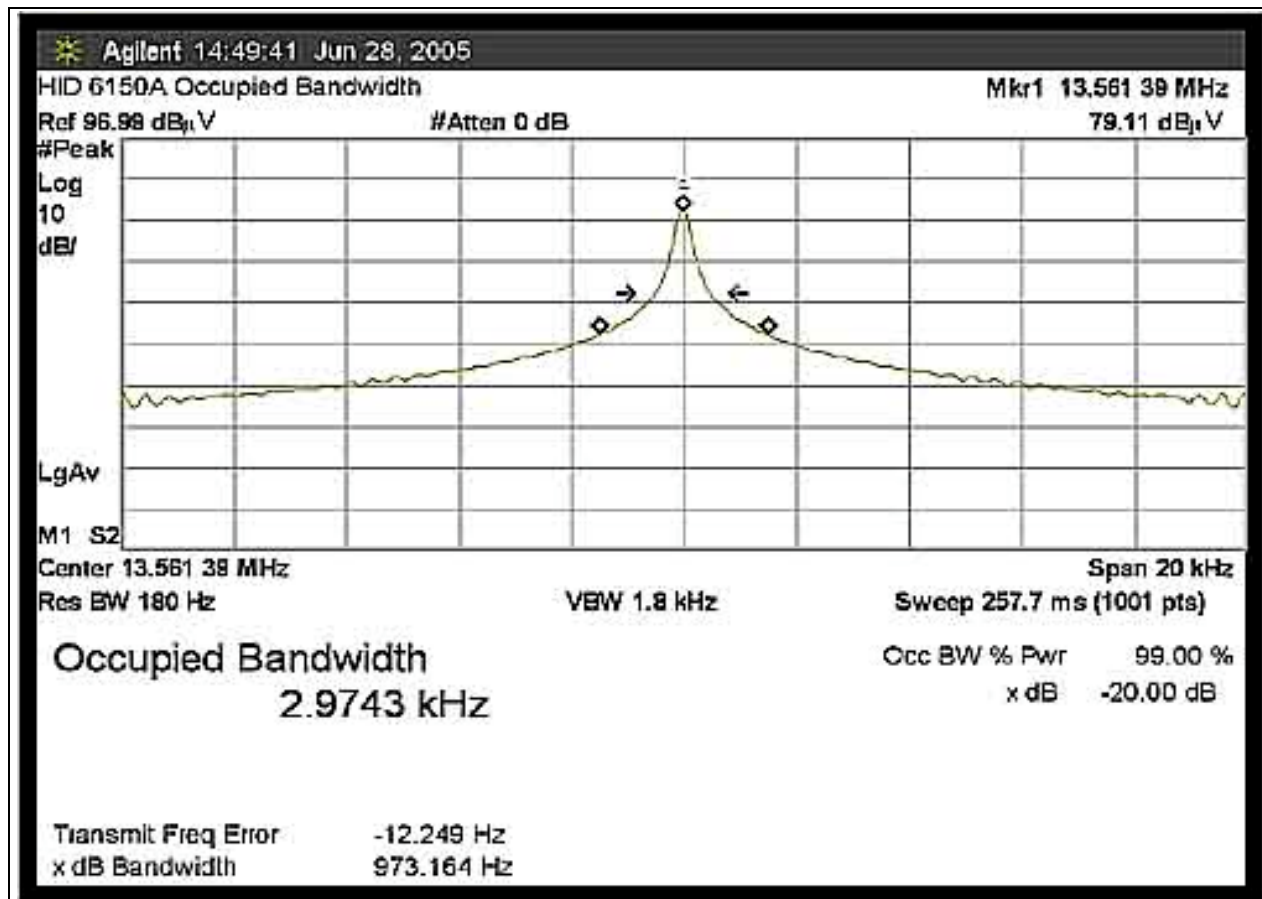

FCC 15.225 EMISSIONS MASK

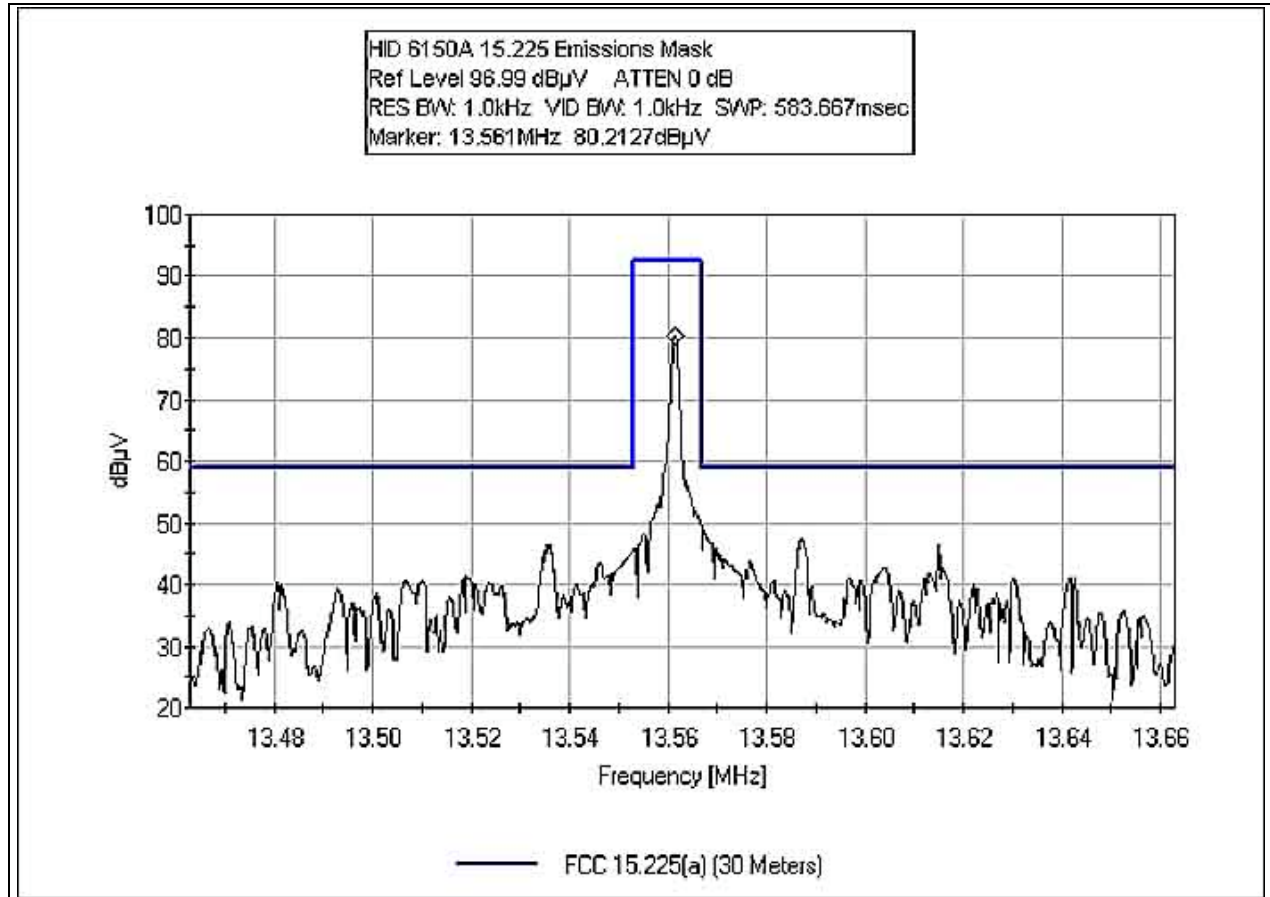

FREQUENCY STABILITY AND VOLTAGE VARIATIONS

Test Conditions: EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. EUT was placed into the Temp Chamber and performance and input was monitored by the equipment listed.

| | |
|---------------------------|----------------|
| Customer: | HID |
| WO#: | 83674 |
| Test Engineer: | Mike Wilkinson |
| | |
| Device Model #: | 6150A |
| Operating Voltage: | 24 VDC |
| Frequency Limit: | 0.01 % |

Temperature Variations

| | | Channel 1 (MHz Dev. (MHz)) | |
|--------------------|---------|----------------------------|---------|
| Channel Frequency: | | 13.5614 | |
| Temp (C) | Voltage | | |
| -20 | 24 | 13.56145 | 0.00005 |
| -10 | 24 | 13.56143 | 0.00003 |
| 0 | 24 | 13.56142 | 0.00002 |
| 10 | 24 | 13.56140 | 0.00000 |
| 20 | 24 | 13.56139 | 0.00001 |
| 30 | 24 | 13.56137 | 0.00003 |
| 40 | 24 | 13.56135 | 0.00005 |
| 50 | 24 | 13.56133 | 0.00007 |

Voltage Variations (±15%)

| | | | |
|----|------|----------|---------|
| 20 | 20.4 | 13.56139 | 0.00001 |
| 20 | 24 | 13.56139 | 0.00001 |
| 20 | 27.6 | 13.56139 | 0.00001 |

| | |
|----------------------------|----------------|
| Max Deviation (MHz) | 0.00007 |
| Max Deviation (%) | 0.00052 |
| PASS | |

EUT SETUP

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the photographs in Appendix A. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables. The corrected data was then compared to the applicable emission limits to determine compliance.

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available I/O ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. I/O cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The radiated and conducted emissions data of the EUT was taken with the HP Spectrum Analyzer. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in Table A.

Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula in Table A. This reading was then compared to the applicable specification limit to determine compliance.

| TABLE A: SAMPLE CALCULATIONS | | |
|-------------------------------------|---------------------|----------------|
| | Meter reading | (dB μ V) |
| + | Antenna Factor | (dB) |
| + | Cable Loss | (dB) |
| - | Distance Correction | (dB) |
| - | Preamplifier Gain | (dB) |
| = | Corrected Reading | (dB μ V/m) |

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed in Appendix B were used to collect both the radiated and conducted emissions data. For radiated measurements from 9 kHz to 30 MHz, the magnetic loop antenna was used. For frequencies from 30 to 1000 MHz, the biconilog antenna was used. The horn antenna was used for frequencies above 1000 MHz. Conducted emissions tests required the use of the FCC type LISNs.

The HP spectrum analyzer was used for all measurements. Table B shows the analyzer bandwidth settings that were used in designated frequency bands. For conducted emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. A 10 dB external attenuator was also used during conducted tests, with internal offset correction in the analyzer. During radiated testing, the measurements were made with 0 dB of attenuation, a reference level of 97 dB μ V, and a vertical scale of 10 dB per division.

SPECTRUM ANALYZER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the Tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the six highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the Spectrum Analyzer or test engineer recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the analyzer called "peak hold," the analyzer had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the analyzer made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the HP Quasi-Peak Adapter for the HP Spectrum Analyzer. The detailed procedure for making quasi peak measurements contained in the HP Quasi-Peak Adapter manual were followed.

Average

For certain frequencies, average measurements may be made using the spectrum analyzer. To make these measurements, the test engineer reduces the video bandwidth on the analyzer until the modulation of the signal is filtered out. At this point the analyzer is set into the linear mode and the scan time is reduced.

EUT TESTING

Mains Conducted Emissions

During conducted emissions testing, the EUT was located on a wooden table measuring approximately 80 cm high, 1 meter deep, and 1.5 meters in length. One wall of the room where the EUT was located has a minimum 2 meter by 2 meter conductive plane. The EUT was mounted on the wooden table 40 cm away from the conductive plane, and 80 cm from any other conductive surface.

The vertical metal plane used for conducted emissions was grounded to the earth. Power to the EUT was provided through a LISN. The LISN was grounded to the ground plane. All other objects were kept a minimum of 80 cm away from the EUT during the conducted test.

The LISNs used were 50 μ H/+50 ohms. Above 150 kHz, a 0.15 μ F series capacitor was added in-line prior to connecting the analyzer to restore the proper impedance for the range. A 30 to 50 second sweep time was used for automated measurements in the frequency bands of 150 kHz to 500 kHz, and 500 kHz to 30 MHz. All readings within 20 dB of the limit were recorded, and those within 6 dB of the limit were examined with additional measurements using a slower sweep time.

Radiated Emissions

The EUT was mounted on a nonconductive, rotating table 80 cm above the conductive grid. The nonconductive table dimensions were 1 meter by 1.5 meters.

During the preliminary radiated scan, the EUT was powered up and operating in its defined FCC test mode. For radiated measurements from 9 kHz to 30 MHz, the magnetic loop antenna was used. The frequency range of 30 MHz to 1000 MHz was scanned with the biconilog antenna located about 1.5 meter above the ground plane in the vertical polarity. During this scan, the turntable was rotated and all peaks at or near the limit were recorded. A scan of the FM band from 88 to 110 MHz was then made using a reduced resolution bandwidth and frequency span. The biconilog antenna was changed to the horizontal polarity and the above steps were repeated. Care was taken to ensure that no frequencies were missed within the FM and TV bands. An analysis was performed to determine if the signals that were at or near the limit were caused by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

A thorough scan of all frequencies was made manually using a small frequency span, rotating the turntable and raising and lowering the antenna from one to four meters as needed. The test engineer maximized the readings with respect to the table rotation, antenna height, and configuration of EUT. Maximizing of the EUT was achieved by monitoring the spectrum analyzer on a closed circuit television monitor.

APPENDIX A

TEST SETUP PHOTOGRAPHS

PHOTOGRAPH SHOWING MAINS CONDUCTED EMISSIONS



Mains Conducted Emissions

PHOTOGRAPH SHOWING MAINS CONDUCTED EMISSIONS



Mains Conducted Emissions - With Dummy Load

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Front View

PHOTOGRAPH SHOWING RADIATED EMISSIONS



Radiated Emissions - Back View

PHOTOGRAPH SHOWING TEMPERATURE TESTING



Temperature Testing

APPENDIX B

TEST EQUIPMENT LIST

15.207

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|-------------------------|--------------|------------------|--------------|-------------|
| Agilent E4446A SA | US44300407 | 01/12/2005 | 01/12/2007 | 02660 |
| 150kHz HP Filter TTE | G7754 | 04/20/2004 | 04/20/2006 | 02608 |
| LISN, 8028-50-TS-24-BNC | 8379276, 280 | 06/03/2005 | 06/03/2007 | 1248 & 1249 |

15.225 Carrier and 9 kHz – 30 MHz

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|-------------------------|------------|------------------|--------------|---------|
| Agilent E4446A SA | US44300407 | 01/12/2005 | 01/12/2007 | 02660 |
| Antenna, Loop EMCO 6502 | 1074 | 05/13/2005 | 05/13/2007 | 226 |

15.225 30-1000 MHz

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|----------------------|------------|------------------|--------------|---------|
| Agilent E4446A SA | US44300407 | 01/12/2005 | 01/12/2007 | 02660 |
| Chase CBL6111C Bilog | 2456 | 06/07/2005 | 06/07/2007 | 01991 |
| HP 8447D Preamp | 1937A02604 | 03/11/2005 | 03/11/2007 | 00099 |

Frequency Stability

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|--|------------|------------------|--------------|---------|
| Agilent E4446A SA | US44300407 | 01/12/2005 | 01/12/2007 | 02660 |
| Antenna, Loop EMCO 6502 | 1074 | 05/13/2005 | 05/13/2007 | 226 |
| Temp Chamber Thermotron S-1.2 MiniMax | 11899 | 01/24/2005 | 01/24/2007 | 1879 |
| Thermometer Omega HH-26K | T-202884 | 08/15/2003 | 08/14/2005 | 2242 |
| Multimeter Fluke 8520A | 2905006 | 04/25/2005 | 04/25/2007 | 2369 |

APPENDIX C:
MEASUREMENT DATA SHEETS

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.207 - AVE**
 Work Order #: **83674**
 Test Type: **Conducted Emissions**
 Equipment: **iClass Long Range Reader**
 Manufacturer: **HID**
 Model: **6150A**
 S/N: **6150A-060105**

Date: 07/19/2005
 Time: 16:34:59
 Sequence#: 71
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Power Supply adjusted to +12 VDC. Carrier frequency investigated with the antenna terminals terminated into a dummy load. All other measurements are performed with the integral antenna attached. Frequency Range Investigated: 150kHz to 30MHz. Temperature: 25°C, Relative Humidity: 35%.


Transducer Legend:

| | |
|---------------------------|-------------------------------|
| T1=HP Filter AN02608 | T2=LISN Insertion Loss s/n276 |
| T3=Cable - Internal + cab | |

Measurement Data: Reading listed by margin. Test Lead: Black

| # | Freq MHz | Rdng dB μ V | T1 dB | T2 dB | T3 dB | Dist Table dB | Corr dB μ V | Spec dB μ V | Margin dB | Polar Ant |
|---|-------------|-----------------|-------|-------|-------|---------------|-----------------|-----------------|-----------|-----------|
| 1 | 27.122M | 43.5 | +0.2 | +0.4 | +0.5 | +0.0 | 44.6 | 50.0 | -5.4 | Black |
| 2 | 13.561M Ave | 28.4 | +0.1 | +0.5 | +0.4 | +0.0 | 29.4 | 50.0 | -20.6 | Black |
| ^ | 13.561M | 102.0 | +0.1 | +0.5 | +0.4 | +0.0 | 103.0 | 50.0 | +53.0 | Black |
| ^ | 13.562M | 55.0 | +0.1 | +0.5 | +0.4 | +0.0 | 56.0 | 50.0 | +6.0 | Black |
| 5 | 160.300k | 31.6 | +1.8 | +0.4 | +0.1 | +0.0 | 33.9 | 55.4 | -21.5 | Black |
| 6 | 9.974M | 22.4 | +0.1 | +0.5 | +0.3 | +0.0 | 23.3 | 50.0 | -26.7 | Black |
| 7 | 9.924M | 20.2 | +0.1 | +0.5 | +0.3 | +0.0 | 21.1 | 50.0 | -28.9 | Black |
| 8 | 10.025M | 19.0 | +0.1 | +0.5 | +0.3 | +0.0 | 19.9 | 50.0 | -30.1 | Black |

CKC Laboratories Date: 07/19/2005 Time: 16:34:59 HID W/O#: 83674
FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 71
HID MN 6150A

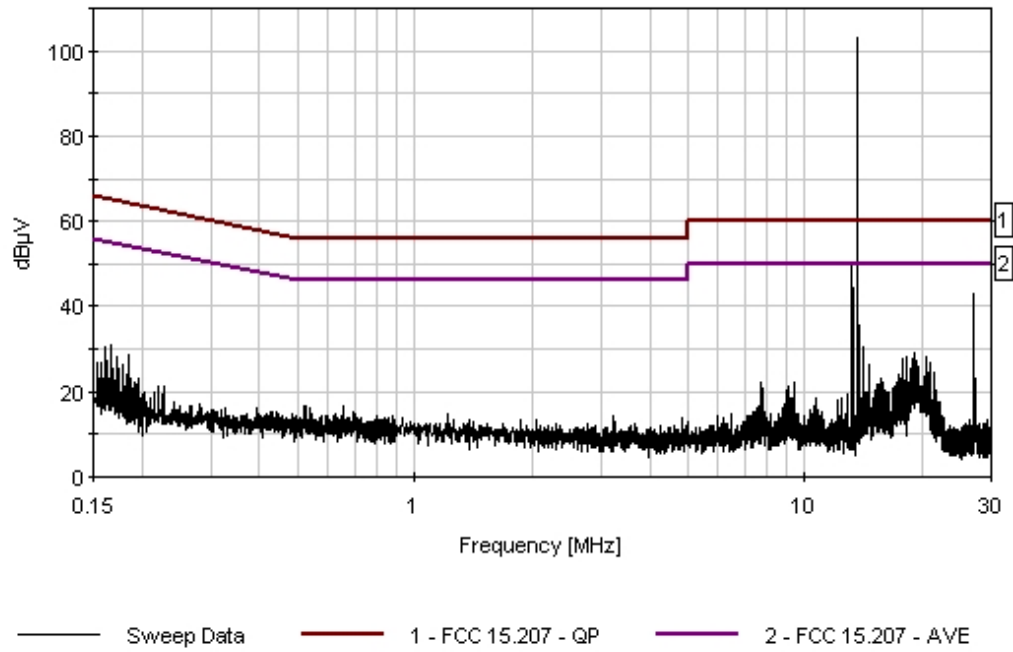

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.207 - AVE**
 Work Order #: **83674**
 Test Type: **Conducted Emissions**
 Equipment: **iClass Long Range Reader**
 Manufacturer: **HID**
 Model: **6150A**
 S/N: **6150A-060105**

Date: 07/19/2005
 Time: 16:31:01
 Sequence#: 72
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Power Supply adjusted to +12 VDC. Carrier frequency investigated with the antenna terminals terminated into a dummy load. All other measurements are performed with the integral antenna attached. Frequency Range Investigated: 150kHz to 30MHz. Temperature: 25°C, Relative Humidity: 35%.


Transducer Legend:

| | |
|---------------------------|-------------------------------|
| T1=HP Filter AN02608 | T2=LISN Insertion Loss s/n280 |
| T3=Cable - Internal + cab | |

Measurement Data: Reading listed by margin. Test Lead: White

| # | Freq MHz | Rdng dBµV | T1 dB | T2 dB | T3 dB | Dist Table dB | Corr dBµV | Spec dBµV | Margin dB | Polar Ant |
|---|-------------|-----------|-------|-------|-------|---------------|-----------|-----------|-----------|-----------|
| 1 | 13.170M | 45.3 | +0.1 | +0.4 | +0.4 | +0.0 | 46.2 | 50.0 | -3.8 | White |
| 2 | 27.129M | 40.8 | +0.2 | +0.5 | +0.5 | +0.0 | 42.0 | 50.0 | -8.0 | White |
| 3 | 19.750M | 32.0 | +0.2 | +0.4 | +0.5 | +0.0 | 33.1 | 50.0 | -16.9 | White |
| 4 | 13.561M Ave | 28.5 | +0.1 | +0.4 | +0.4 | +0.0 | 29.4 | 50.0 | -20.6 | White |
| ^ | 13.561M | 105.0 | +0.1 | +0.4 | +0.4 | +0.0 | 105.9 | 50.0 | +55.9 | White |
| ^ | 13.561M | 54.7 | +0.1 | +0.4 | +0.4 | +0.0 | 55.6 | 50.0 | +5.6 | White |
| 7 | 9.975M | 25.8 | +0.1 | +0.4 | +0.3 | +0.0 | 26.6 | 50.0 | -23.4 | White |
| 8 | 166.000k | 29.9 | +1.3 | +0.3 | +0.1 | +0.0 | 31.6 | 55.2 | -23.6 | White |

CKC Laboratories Date: 07/19/2005 Time: 16:31:01 HID W/O#: 83674
FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 72
HID MN 6150A

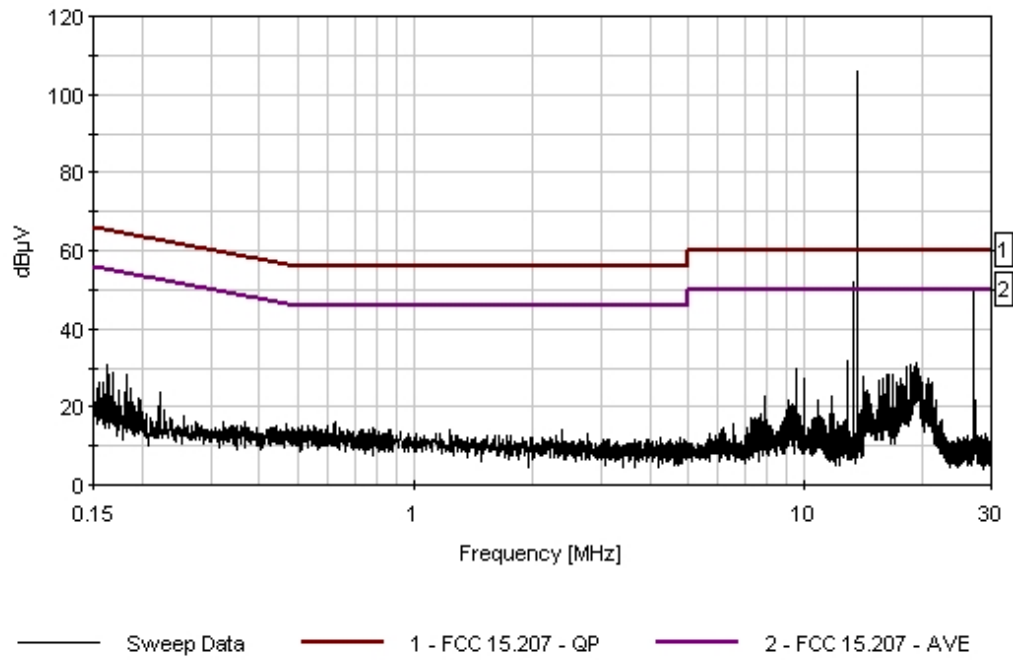

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.207 - AVE**
 Work Order #: **83674**
 Test Type: **Conducted Emissions**
 Equipment: **iClass Long Range Reader**
 Manufacturer: **HID**
 Model: **6150A**
 S/N: **6150A-060105**

Date: 07/19/2005
 Time: 16:18:29
 Sequence#: 74
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Power Supply adjusted to +24 VDC. Carrier frequency investigated with the antenna terminals terminated into a dummy load. All other measurements are performed with the integral antenna attached. Frequency Range Investigated: 150kHz to 30MHz. Temperature: 25°C, Relative Humidity: 35%.


Transducer Legend:

| | |
|---------------------------|-------------------------------|
| T1=HP Filter AN02608 | T2=LISN Insertion Loss s/n276 |
| T3=Cable - Internal + cab | |

Measurement Data: Reading listed by margin. Test Lead: Black

| # | Freq MHz | Rdng dB μ V | T1 dB | T2 dB | T3 dB | Dist Table dB | Corr dB μ V | Spec dB μ V | Margin dB | Polar Ant |
|---|----------|-----------------|-------|-------|-------|---------------|-----------------|---|-----------|-----------|
| 1 | 13.562M | 33.8 | +0.1 | +0.5 | +0.4 | +0.0 | 34.8 | 50.0 | -15.2 | Black |
| | Ave | | | | | | | Carrier with dummy load attached | | |
| ^ | 13.561M | 105.7 | +0.1 | +0.5 | +0.4 | +0.0 | 106.7 | 50.0 | +56.7 | Black |
| | | | | | | | | Carrier with integral antenna attached. | | |
| ^ | 13.562M | 53.1 | +0.1 | +0.5 | +0.4 | +0.0 | 54.1 | 50.0 | +4.1 | Black |
| | | | | | | | | Carrier with dummy load attached | | |
| 4 | 9.977M | 30.7 | +0.1 | +0.5 | +0.3 | +0.0 | 31.6 | 50.0 | -18.4 | Black |
| 5 | 18.883M | 27.4 | +0.2 | +0.4 | +0.5 | +0.0 | 28.5 | 50.0 | -21.5 | Black |
| 6 | 155.700k | 30.6 | +2.2 | +0.4 | +0.1 | +0.0 | 33.3 | 55.7 | -22.4 | Black |
| 7 | 27.121M | 2.9 | +0.2 | +0.4 | +0.5 | +0.0 | 4.0 | 50.0 | -46.0 | Black |
| | Ave | | | | | | | | | |
| ^ | 27.121M | 51.6 | +0.2 | +0.4 | +0.5 | +0.0 | 52.7 | 50.0 | +2.7 | Black |

CKC Laboratories Date: 07/19/2005 Time: 16:18:29 HID W/O#: 83674
 FCC 15.207 - AVE Test Lead: Black 120V 60Hz Sequence#: 74
 HID MN 6150A

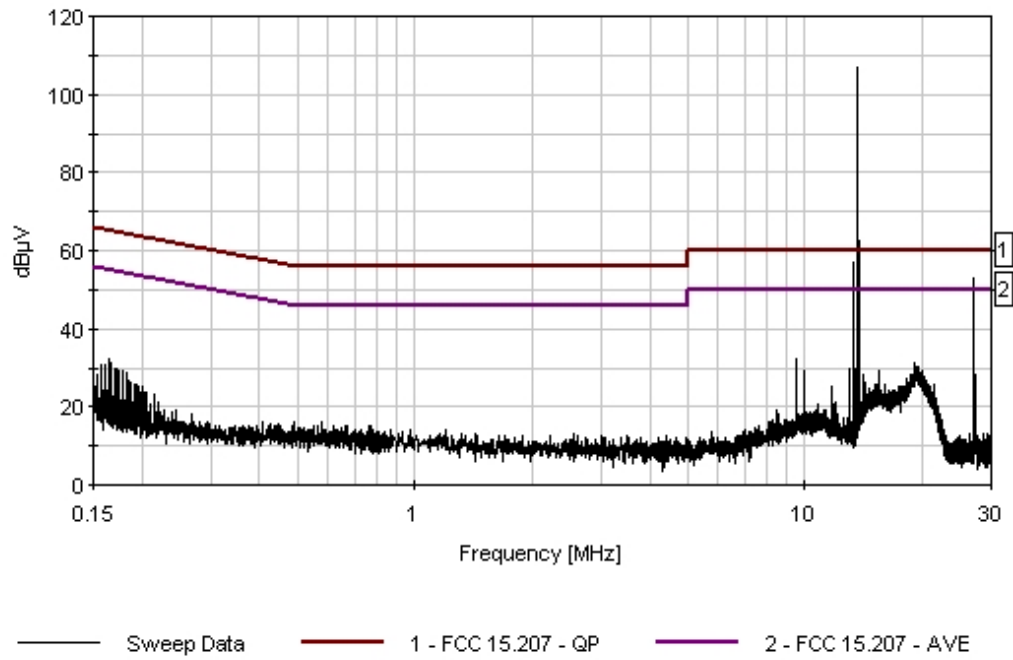

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.207 - AVE**
 Work Order #: **83674**
 Test Type: **Conducted Emissions**
 Equipment: **iClass Long Range Reader**
 Manufacturer: **HID**
 Model: **6150A**
 S/N: **6150A-060105**

Date: 07/19/2005
 Time: 16:25:05
 Sequence#: 73
 Tested By: Mike Wilkinson
 120V 60Hz

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Power Supply adjusted to +24 VDC. Carrier frequency investigated with the antenna terminals terminated into a dummy load. All other measurements are performed with the integral antenna attached. Frequency Range Investigated: 150kHz to 30MHz. Temperature: 25°C, Relative Humidity: 35%.


Transducer Legend:

| | |
|---------------------------|-------------------------------|
| T1=HP Filter AN02608 | T2=LISN Insertion Loss s/n280 |
| T3=Cable - Internal + cab | |

Measurement Data: Reading listed by margin. Test Lead: White

| # | Freq MHz | Rdng dB μ V | T1 dB | T2 dB | T3 dB | Dist Table dB | Corr dB μ V | Spec dB μ V | Margin dB | Polar Ant |
|---|----------|-----------------|-------|-------|-------|---------------|-----------------|---|-----------|-----------|
| 1 | 13.562M | 33.9 | +0.1 | +0.4 | +0.4 | +0.0 | 34.8 | 50.0 | -15.2 | White |
| | Ave | | | | | | | Carrier with dummy load attached | | |
| ^ | 13.561M | 108.9 | +0.1 | +0.4 | +0.4 | +0.0 | 109.8 | 50.0 | +59.8 | White |
| | | | | | | | | Carrier with integral antenna attached. | | |
| ^ | 13.561M | 53.6 | +0.1 | +0.4 | +0.4 | +0.0 | 54.5 | 50.0 | +4.5 | White |
| | | | | | | | | Carrier with dummy load attached | | |
| 4 | 19.700M | 33.6 | +0.2 | +0.4 | +0.5 | +0.0 | 34.7 | 50.0 | -15.3 | White |
| 5 | 155.600k | 31.1 | +2.2 | +0.3 | +0.1 | +0.0 | 33.7 | 55.7 | -22.0 | White |
| 6 | 27.121M | 11.8 | +0.2 | +0.5 | +0.5 | +0.0 | 13.0 | 50.0 | -37.0 | White |
| | Ave | | | | | | | | | |
| ^ | 27.121M | 54.2 | +0.2 | +0.5 | +0.5 | +0.0 | 55.4 | 50.0 | +5.4 | White |

CKC Laboratories Date: 07/19/2005 Time: 16:25:05 HID W/O#: 83674
FCC 15.207 - AVE Test Lead: White 120V 60Hz Sequence#: 73
HID MN 6150A

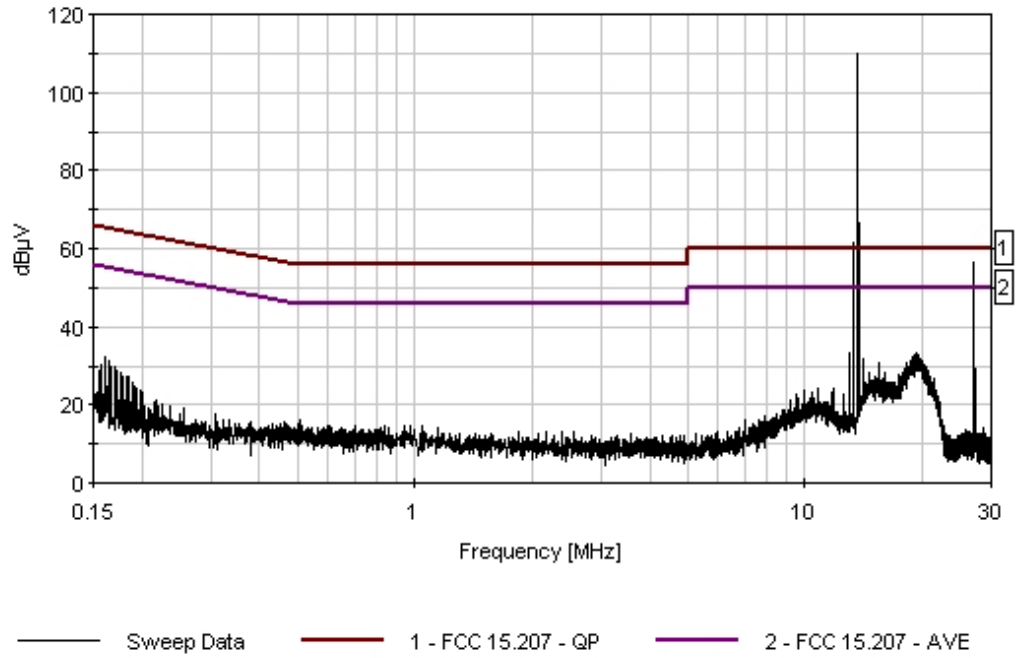

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.225(a) (30 Meters)**
 Work Order #: **83674** Date: 06/28/2005
 Test Type: **Maximized Emissions** Time: 14:35:03
 Equipment: **iClass Long Range Reader** Sequence#: 58
 Manufacturer: **HID** Tested By: Randal Clark
 Model: 6150A
 S/N: 6150A-060105

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Test distance correction factor used in accordance with 15.31, 40dB per decade to correct test data for comparison with the limit at 30 meters. Frequency Range Investigated: Carrier. Temperature: 28°C, Relative Humidity: 45%.

Transducer Legend:

| | |
|---------------------|-----------------------------------|
| T1=Cable - 10 Meter | T2=Mag Loop - AN 00226 - 9kHz-30M |
|---------------------|-----------------------------------|

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

| # | Freq MHz | Rdng dB μ V | T1 dB | T2 dB | Dist dB | Corr dB | Spec dB μ V/m | Margin dB | Polar Ant |
|---|-------------|--------------------|----------|----------|------------|------------|----------------------|--------------|--------------|
| 1 | 13.561M | 80.5 | +0.8 | +9.6 | -19.0 | 71.9 | 84.0 | -12.1 | Horiz 100 |
| 2 | 13.561M | 75.6 | +0.8 | +9.6 | -19.0 | 67.0 | 84.0 | -17.0 | Verti 100 |

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.209**
 Work Order #: **83674** Date: 06/28/2005
 Test Type: **Maximized Emissions** Time: 14:12:28
 Equipment: **iClass Long Range Reader** Sequence#: 57
 Manufacturer: **HID** Tested By: Randal Clark
 Model: 6150A
 S/N: 6150A-060105

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Test distance correction factor used in accordance with 15.31, 40dB per decade to correct test data for comparison with the limit at 30 and 300 meters as appropriate. Frequency Range Investigated: 9kHz - 30MHz. Temperature: 28°C, Relative Humidity: 45%.

Transducer Legend:

| | |
|----------------------------------|-----------------------------------|
| T1=Cable - 10 Meter | T2=Mag Loop - AN 00226 - 9kHz-30M |
| T3=15.31 10m 40dB/Dec Correction | |

Measurement Data: Reading listed by margin. Test Distance: 10 Meters

| # | Freq MHz | Rdng dBµV | T1 dB | T2 dB | T3 dB | Dist Table dB | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|----|----------|-----------|-------|-------|-------|---------------|-------------|-------------|-----------|-----------|
| 1 | 27.123M | 36.4 | +1.1 | +6.6 | -20.0 | +0.0 | 24.1 | 29.5 | -5.4 | Verti 100 |
| QP | | | | | | | | | | |
| ^ | 27.123M | 40.1 | +1.1 | +6.6 | -20.0 | +0.0 | 27.8 | 29.5 | -1.7 | Verti 100 |
| 3 | 27.123M | 35.6 | +1.1 | +6.6 | -20.0 | +0.0 | 23.3 | 29.5 | -6.2 | Horiz 100 |
| QP | | | | | | | | | | |
| ^ | 27.123M | 39.2 | +1.1 | +6.6 | -20.0 | +0.0 | 26.9 | 29.5 | -2.6 | Horiz 100 |
| ^ | 27.123M | 28.5 | +1.1 | +6.6 | -20.0 | +0.0 | 16.2 | 29.5 | -13.3 | Horiz 100 |

Test Location: CKC Laboratories •5473A Clouds Rest • Mariposa, CA 95338 • 1-800-500-4EMC (4362)

Customer: **HID**
 Specification: **FCC 15.209**
 Work Order #: **83674** Date: 06/28/2005
 Test Type: **Maximized Emissions** Time: 12:06:21
 Equipment: **iClass Long Range Reader** Sequence#: 54
 Manufacturer: **HID** Tested By: Randal Clark
 Model: 6150A
 S/N: 6150A-060105

Test Equipment:

| Function | S/N | Calibration Date | Cal Due Date | Asset # |
|-------------------------|--------------|------------------|--------------|-------------|
| Agilent E4446A SA | US44300407 | 01/12/2005 | 01/12/2007 | 02660 |
| 150kHz HP Filter | G7754 | 04/20/2004 | 04/20/2006 | 02608 |
| TTE | | | | |
| LISN, 8028-50-TS-24-BNC | 8379276, 280 | 06/03/2005 | 06/03/2007 | 1248 & 1249 |

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|---------------------------|--------------|---------|--------------|
| iClass Long Range Reader* | HID | 6150A | 6150A-060105 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|--|----------|--------|
| DC Power Supply | Topward Electric Instruments Co., Ltd. | TPS-2000 | 920035 |

Test Conditions / Notes:

EUT is an iClass Long Range Reader operating on a frequency of 13.56MHz. Power supply is bonded to ground plane. EUT drain wire disconnected. Test distance correction factor used in accordance with 15.31, 20dB per decade to correct test data for comparison with the limit at 3 meters. Frequency Range Investigated: 30-1000MHz. Temperature: 28°C, Relative Humidity: 45%.

Transducer Legend:

| | |
|---------------------|-----------------|
| T1=Amp - S/N 604 | T2=Bilog Site D |
| T3=Cable - 10 Meter | |

Measurement Data:

Reading listed by margin.

Test Distance: 10 Meters

| # | Freq MHz | Rdng dB μ V | T1 dB | T2 dB | T3 dB | Dist Table dB | Corr dB μ V/m | Spec dB μ V/m | Margin dB | Polar Ant |
|----|----------|-----------------|-------|-------|-------|---------------|-------------------|-------------------|-----------|-----------|
| 1 | 40.689M | 43.2 | -27.0 | +12.0 | +1.4 | +10.0 | 39.6 | 40.0 | -0.4 | Verti 124 |
| QP | | | | | | | | | | |
| ^ | 40.693M | 49.1 | -27.0 | +12.0 | +1.4 | +10.0 | 45.5 | 40.0 | +5.5 | Verti 124 |
| 3 | 108.489M | 45.4 | -26.8 | +10.1 | +2.4 | +10.0 | 41.1 | 43.5 | -2.4 | Verti 124 |
| QP | | | | | | | | | | |
| ^ | 108.495M | 47.4 | -26.8 | +10.1 | +2.4 | +10.0 | 43.1 | 43.5 | -0.4 | Verti 124 |
| 5 | 189.866M | 44.5 | -26.6 | +8.3 | +3.2 | +10.0 | 39.4 | 43.5 | -4.1 | Horiz 347 |
| QP | | | | | | | | | | |
| ^ | 189.866M | 46.7 | -26.6 | +8.3 | +3.2 | +10.0 | 41.6 | 43.5 | -1.9 | Horiz 347 |

| | | | | | | | | | | |
|----|----------|------|-------|-------|------|-------|------|------|-------|--------------|
| 7 | 122.057M | 42.2 | -26.7 | +11.0 | +2.5 | +10.0 | 39.0 | 43.5 | -4.5 | Verti 123 |
| 8 | 54.245M | 43.0 | -26.8 | +7.3 | +1.6 | +10.0 | 35.1 | 40.0 | -4.9 | Verti 124 |
| 9 | 81.369M | 42.7 | -27.0 | +6.9 | +2.0 | +10.0 | 34.6 | 40.0 | -5.4 | Verti 100 |
| 10 | 352.598M | 37.7 | -26.5 | +14.3 | +4.5 | +10.0 | 40.0 | 46.0 | -6.0 | Horiz 218 |
| 11 | 325.478M | 38.4 | -26.4 | +13.5 | +4.3 | +10.0 | 39.8 | 46.0 | -6.2 | Horiz 235 |
| 12 | 339.038M | 37.3 | -26.4 | +13.9 | +4.4 | +10.0 | 39.2 | 46.0 | -6.8 | Horiz 218 |
| 13 | 352.600M | 36.5 | -26.5 | +14.3 | +4.5 | +10.0 | 38.8 | 46.0 | -7.2 | Verti 100 |
| 14 | 691.608M | 29.2 | -27.7 | +20.2 | +6.7 | +10.0 | 38.4 | 46.0 | -7.6 | Horiz 218 |
| 15 | 366.158M | 35.4 | -26.6 | +14.6 | +4.7 | +10.0 | 38.1 | 46.0 | -7.9 | Horiz 218 |
| 16 | 433.972M | 33.4 | -27.1 | +16.1 | +5.0 | +10.0 | 37.4 | 46.0 | -8.6 | Horiz 218 |
| 17 | 311.924M | 36.3 | -26.3 | +13.2 | +4.2 | +10.0 | 37.4 | 46.0 | -8.6 | Horiz 235 |
| 18 | 271.232M | 37.1 | -26.0 | +12.4 | +3.8 | +10.0 | 37.3 | 46.0 | -8.7 | Horiz 235 |
| 19 | 406.837M | 32.9 | -26.9 | +15.6 | +5.1 | +10.0 | 36.7 | 46.0 | -9.3 | Horiz 218 |
| 20 | 298.353M | 35.9 | -26.2 | +12.8 | +4.1 | +10.0 | 36.6 | 46.0 | -9.4 | Horiz 235 |
| 21 | 556.019M | 29.7 | -27.5 | +18.4 | +6.0 | +10.0 | 36.6 | 46.0 | -9.4 | Horiz 218 |
| 22 | 379.722M | 33.4 | -26.7 | +14.9 | +4.9 | +10.0 | 36.5 | 46.0 | -9.5 | Horiz 218 |
| 23 | 203.426M | 37.8 | -26.5 | +8.6 | +3.3 | +10.0 | 33.2 | 43.5 | -10.3 | Horiz 347 |
| 24 | 488.240M | 30.0 | -27.3 | +17.2 | +5.4 | +10.0 | 35.3 | 46.0 | -10.7 | Horiz 218 |
| 25 | 420.397M | 31.1 | -27.0 | +15.8 | +5.1 | +10.0 | 35.0 | 46.0 | -11.0 | Horiz 218 |
| 26 | 203.415M | 37.1 | -26.5 | +8.6 | +3.3 | +10.0 | 32.5 | 43.5 | -11.0 | Verti 100 |
| 27 | 474.646M | 30.0 | -27.3 | +16.9 | +5.3 | +10.0 | 34.9 | 46.0 | -11.1 | Verti 105 |
| 28 | 149.170M | 35.6 | -26.7 | +10.4 | +2.8 | +10.0 | 32.1 | 43.5 | -11.4 | Verti 100 |
| 29 | 67.808M | 37.4 | -26.8 | +5.8 | +1.9 | +10.0 | 28.3 | 40.0 | -11.7 | Verti 135 |
| 30 | 678.027M | 25.2 | -27.6 | +20.1 | +6.6 | +10.0 | 34.3 | 46.0 | -11.7 | Verti 123 |
| 31 | 135.613M | 34.7 | -26.7 | +11.0 | +2.6 | +10.0 | 31.6 | 43.5 | -11.9 | Verti 123 |
| 32 | 176.295M | 36.6 | -26.7 | +8.4 | +3.0 | +10.0 | 31.3 | 43.5 | -12.2 | Verti 100 |

| | | | | | | | | | | |
|----|----------|------|-------|-------|------|-------|------|------|-------|--------------|
| 33 | 569.549M | 26.6 | -27.6 | +18.6 | +6.0 | +10.0 | 33.6 | 46.0 | -12.4 | Verti 123 |
| 34 | 325.472M | 32.1 | -26.4 | +13.5 | +4.3 | +10.0 | 33.5 | 46.0 | -12.5 | Verti 140 |
| 35 | 257.652M | 33.6 | -26.0 | +12.1 | +3.7 | +10.0 | 33.4 | 46.0 | -12.6 | Verti 155 |
| 36 | 339.039M | 31.5 | -26.4 | +13.9 | +4.4 | +10.0 | 33.4 | 46.0 | -12.6 | Verti 140 |
| 37 | 40.709M | 30.8 | -27.0 | +12.0 | +1.4 | +10.0 | 27.2 | 40.0 | -12.8 | Horiz 256 |
| 38 | 366.158M | 30.4 | -26.6 | +14.6 | +4.7 | +10.0 | 33.1 | 46.0 | -12.9 | Verti 156 |
| 39 | 352.598M | 30.7 | -26.5 | +14.3 | +4.5 | +10.0 | 33.0 | 46.0 | -13.0 | Verti 156 |
| 40 | 501.765M | 27.4 | -27.3 | +17.4 | +5.5 | +10.0 | 33.0 | 46.0 | -13.0 | Verti 105 |
| 41 | 528.869M | 26.6 | -27.4 | +17.9 | +5.8 | +10.0 | 32.9 | 46.0 | -13.1 | Verti 105 |
| 42 | 515.312M | 26.9 | -27.4 | +17.7 | +5.7 | +10.0 | 32.9 | 46.0 | -13.1 | Verti 105 |
| 43 | 393.278M | 29.4 | -26.8 | +15.2 | +5.0 | +10.0 | 32.8 | 46.0 | -13.2 | Horiz 218 |
| 44 | 488.201M | 27.4 | -27.3 | +17.2 | +5.4 | +10.0 | 32.7 | 46.0 | -13.3 | Verti 105 |
| 45 | 311.920M | 31.4 | -26.3 | +13.2 | +4.2 | +10.0 | 32.5 | 46.0 | -13.5 | Verti 140 |
| 46 | 461.055M | 27.8 | -27.3 | +16.7 | +5.1 | +10.0 | 32.3 | 46.0 | -13.7 | Horiz 218 |
| 47 | 583.107M | 25.0 | -27.6 | +18.8 | +5.9 | +10.0 | 32.1 | 46.0 | -13.9 | Verti 123 |
| 48 | 542.425M | 25.4 | -27.5 | +18.2 | +5.9 | +10.0 | 32.0 | 46.0 | -14.0 | Horiz 218 |
| 49 | 257.672M | 32.2 | -26.0 | +12.1 | +3.7 | +10.0 | 32.0 | 46.0 | -14.0 | Horiz 313 |
| 50 | 379.715M | 28.7 | -26.7 | +14.9 | +4.9 | +10.0 | 31.8 | 46.0 | -14.2 | Verti 156 |
| 51 | 230.542M | 33.8 | -26.2 | +10.7 | +3.4 | +10.0 | 31.7 | 46.0 | -14.3 | Verti 100 |
| 52 | 433.954M | 27.2 | -27.1 | +16.1 | +5.0 | +10.0 | 31.2 | 46.0 | -14.8 | Verti 105 |
| 53 | 244.092M | 31.9 | -26.0 | +11.6 | +3.6 | +10.0 | 31.1 | 46.0 | -14.9 | Verti 100 |
| 54 | 216.975M | 34.3 | -26.3 | +9.7 | +3.4 | +10.0 | 31.1 | 46.0 | -14.9 | Verti 100 |
| 55 | 420.394M | 27.0 | -27.0 | +15.8 | +5.1 | +10.0 | 30.9 | 46.0 | -15.1 | Verti 105 |
| 56 | 67.806M | 33.6 | -26.8 | +5.8 | +1.9 | +10.0 | 24.5 | 40.0 | -15.5 | Verti 124 |
| 57 | 406.826M | 26.4 | -26.9 | +15.6 | +5.1 | +10.0 | 30.2 | 46.0 | -15.8 | Verti 105 |
| 58 | 54.267M | 31.8 | -26.8 | +7.3 | +1.6 | +10.0 | 23.9 | 40.0 | -16.1 | Horiz 256 |

| | | | | | | | | | | |
|----|----------|------|-------|-------|------|-------|------|------|-------|--------------|
| 59 | 122.057M | 30.6 | -26.7 | +11.0 | +2.5 | +10.0 | 27.4 | 43.5 | -16.1 | Horiz 278 |
| 60 | 298.360M | 29.1 | -26.2 | +12.8 | +4.1 | +10.0 | 29.8 | 46.0 | -16.2 | Verti 140 |
| 61 | 461.086M | 24.4 | -27.3 | +16.7 | +5.1 | +10.0 | 28.9 | 46.0 | -17.1 | Verti 105 |
| 62 | 216.987M | 31.8 | -26.3 | +9.7 | +3.4 | +10.0 | 28.6 | 46.0 | -17.4 | Horiz 347 |
| 63 | 271.227M | 28.1 | -26.0 | +12.4 | +3.8 | +10.0 | 28.3 | 46.0 | -17.7 | Verti 155 |
| 64 | 162.735M | 29.5 | -26.7 | +9.8 | +2.9 | +10.0 | 25.5 | 43.5 | -18.0 | Verti 100 |
| 65 | 135.617M | 28.5 | -26.7 | +11.0 | +2.6 | +10.0 | 25.4 | 43.5 | -18.1 | Horiz 278 |
| 66 | 149.177M | 28.1 | -26.7 | +10.4 | +2.8 | +10.0 | 24.6 | 43.5 | -18.9 | Horiz 278 |
| 67 | 230.547M | 26.0 | -26.2 | +10.7 | +3.4 | +10.0 | 23.9 | 46.0 | -22.1 | Horiz 347 |