


Linx RF Module Block/Signal Diagram

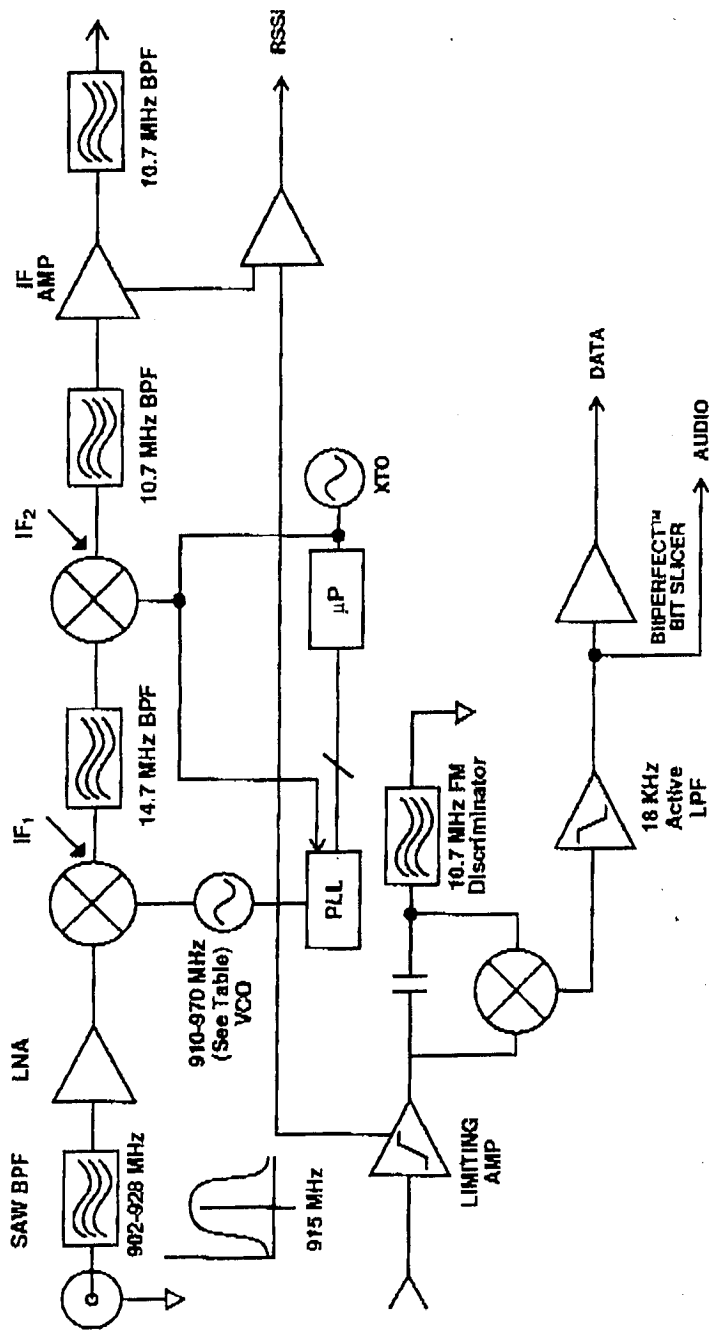

LO Frequency Table

Channel	Frequency
0	868.68
1	877.68
2	873.18
3	874.68
4	877.68
5	880.68
6	885.18
7	886.68


LINX
TECHNOLOGIES
WIRELESS MADE SIMPLE

575 SE ASHLEY PLACE • GRANTS PASS, OR 97526
PHONE: (800) 736-6677 • FAX: (541) 471-6251

Module Series	HP RXM	Architecture	Dual Conversion Superhet
Modulation Method		Duty Cycle	Continuous Carrier
Frequency	902-928MHz	Overall Accuracy	

This product utilizes a modular hybrid RF stage manufactured by Linx Technologies Inc. The module contains all RF components excepting antennas. While each module is inherently designed to meet or exceed all FCC requirements, external factors such as antenna selection, transmission content, and intended application may affect its use. A block diagram of the module's internal architecture and signal path is shown above. Additional information regarding the use, construction or testing of Linx modules may be obtained by calling (541) 471-6256, from 8-4 PST or addressing a written e-mail request to info@linxtechnologies.com.

Linx RF Module Block/Signal Diagram

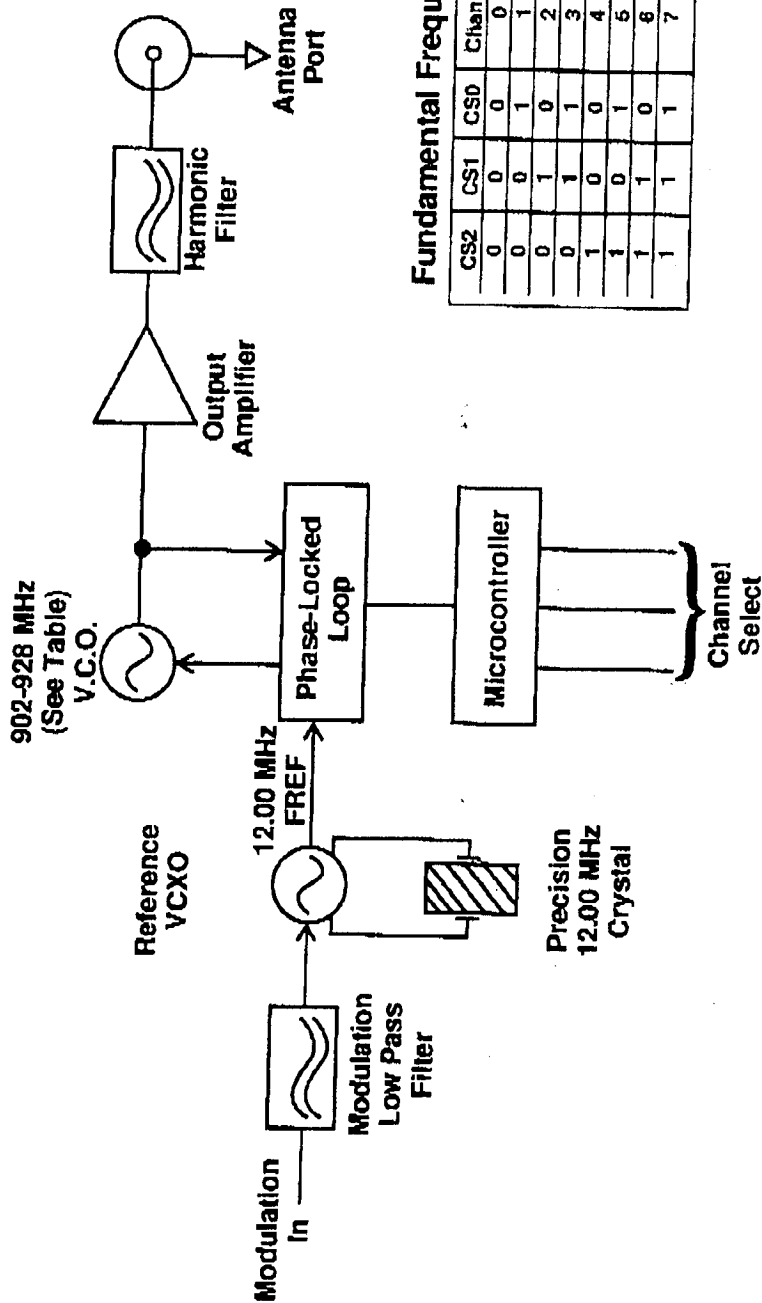

Fundamental Frequency Table


CS2	CS1	CSD	Channel	Frequency
0	0	0	0	903.37
0	0	1	1	906.37
0	1	0	2	907.87
0	1	1	3	909.37
1	0	0	4	912.37
1	0	1	5	915.37
1	1	0	6	919.87
1	1	1	7	921.37

LINX
TECHNOLOGIES
WIRELESS COMMUNICATIONS

575 SE ASHLEY PLACE • GRANTS PASS, OR 97526
PHONE: (800) 736-6677 • FAX: (541) 471-6251

Module Series HP TXM Architecture
Modulation Method FM/FSK Duty Cycle Continuous Carrier
Frequency 902-928MHz Overall Accuracy ±50KHz
Occupied Bandwidth 32KHz

This product utilizes a modular hybrid RF stage manufactured by Linx Technologies Inc. The module contains all RF components excepting antennas. While each module is inherently designed to meet or exceed all FCC requirements, external factors such as antenna selection, transmission content, and intended application may affect its use. A block diagram of the module's internal architecture and signal path is shown above. Additional information regarding the use, construction or testing of Linx modules may be obtained by calling (541) 471-6256, from 8-4 PST or addressing a written e-mail request to info@linxtechnologies.com.

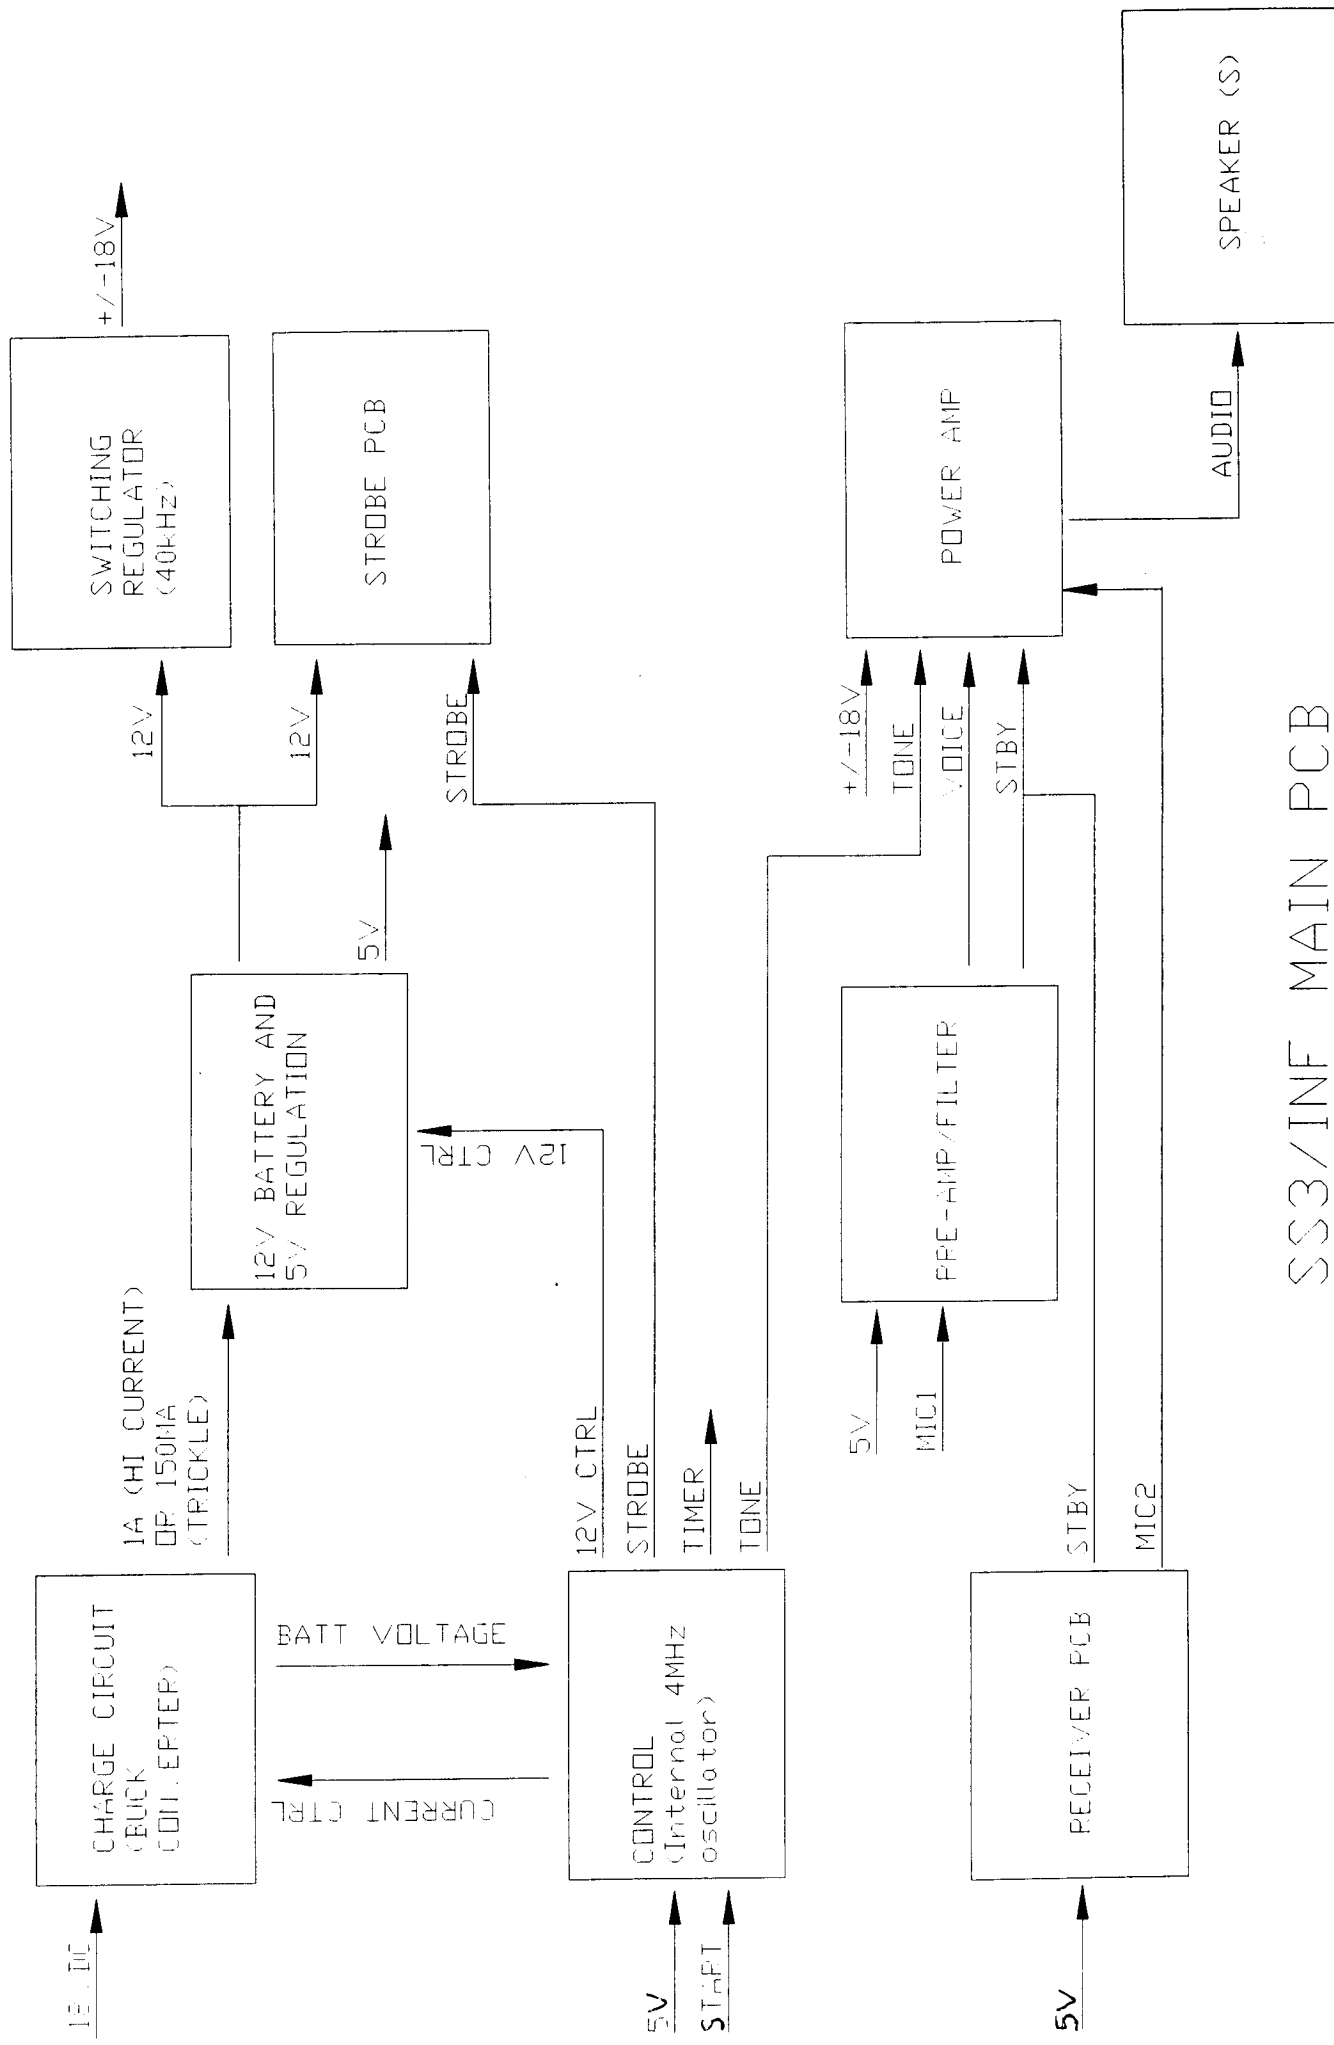

SS3/INF MAIN PCB
BLOCK DIAGRAM