



FCC PART 15, SUBPART C  
ISED C RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

**Trimble Inc.**

935 Stewart Drive,  
Sunnyvale, CA 94085, USA

**FCC ID: JUP-106900**  
**IC: 1756A-106900**

<b>Report Type:</b> Original Report	<b>Product Type:</b> GNSS Smart Antenna
<b>Prepared By:</b> Vincent Licata Test Engineer	<i>Vincent Licata</i>
<b>Report Number:</b> R1705012-247	
<b>Report Date:</b> 2017-10-20	
<b>Reviewed By:</b> Frank Wang RF Engineer	<i>Frank Wang</i>
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*" sec. 2

## TABLE OF CONTENTS

<b>1</b>	<b>General Description.....</b>	<b>5</b>
1.1	Product Description for Equipment Under Test (EUT) .....	5
1.2	Objective.....	5
1.3	Related Submittal(s)/Grant(s) .....	5
1.4	Test Methodology .....	5
1.5	Measurement Uncertainty .....	5
1.6	Test Facility Registrations .....	6
1.7	Test Facility Accreditations .....	6
<b>2</b>	<b>System Test Configuration.....</b>	<b>9</b>
2.1	Justification .....	9
2.2	EUT Exercise Software.....	9
2.3	Duty Cycle Correction Factor .....	9
2.4	Equipment Modifications.....	10
2.5	Local Support Equipment .....	10
2.6	Support Equipment .....	10
2.7	Interface Ports and Cabling.....	10
<b>3</b>	<b>Summary of Test Results .....</b>	<b>11</b>
<b>4</b>	<b>FCC §15.203 &amp; ISEDC RSS-Gen §8.3 - Antenna Requirements .....</b>	<b>12</b>
4.1	Applicable Standards .....	12
4.2	Antenna Description .....	12
<b>5</b>	<b>FCC §2.1091, §15.247(i) &amp; ISEDC RSS-102 - RF Exposure.....</b>	<b>13</b>
5.1	Applicable Standards .....	13
5.2	MPE Prediction.....	14
5.3	MPE Results .....	14
5.4	RF exposure evaluation for IC .....	15
<b>6</b>	<b>FCC §15.207 &amp; ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions.....</b>	<b>17</b>
6.1	Applicable Standards .....	17
6.2	Test Setup .....	17
6.3	Test Procedure .....	17
6.4	Corrected Amplitude and Margin Calculation .....	18
6.5	Test Setup Block Diagram .....	18
6.6	Test Equipment List and Details.....	19
6.7	Test Environmental Conditions .....	19
6.8	Summary of Test Results.....	20
6.9	Conducted Emissions Test Plots and Data.....	21
<b>7</b>	<b>FCC §15.209, §15.247(d) &amp; ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions.....</b>	<b>25</b>
7.1	Applicable Standards .....	25
7.2	Test Setup .....	27
7.3	Test Procedure .....	27
7.4	Corrected Amplitude and Margin Calculation.....	27
7.5	Test Equipment List and Details.....	28
7.6	Test Environmental Conditions .....	28
7.7	Summary of Test Results.....	29
7.8	Radiated Emissions Test Results.....	30
<b>8</b>	<b>FCC §15.247(a) (1) &amp; ISEDC RSS-247 §5.1 (c) - Emission Bandwidth.....</b>	<b>34</b>
8.1	Applicable Standards .....	34
8.2	Measurement Procedure.....	34
8.3	Test Equipment List and Details.....	34
8.4	Test Environmental Conditions .....	34
8.5	Test Results.....	35

<b>9</b>	<b>FCC §15.247(b) (2) &amp; ISEDC RSS-247 §5.4 (a) - Output Power .....</b>	<b>36</b>
9.1	Applicable Standards .....	36
9.2	Measurement Procedure.....	36
9.3	Test Equipment List and Details.....	36
9.4	Test Environmental Conditions .....	36
9.5	Test Results.....	37
<b>10</b>	<b>FCC §15.247(d) &amp; ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges.....</b>	<b>38</b>
10.1	Applicable Standards .....	38
10.2	Measurement Procedure.....	38
10.3	Test Equipment List and Details.....	38
10.4	Test Environmental Conditions .....	39
10.5	Test Results.....	39
<b>11</b>	<b>FCC §15.247(a) (1) (i) &amp; ISEDC RSS-247 §5.1 (c) - Dwell Time.....</b>	<b>40</b>
11.1	Applicable Standards .....	40
11.2	Measurement Procedure.....	40
11.3	Test Equipment List and Details.....	40
11.4	Test Environmental Conditions .....	41
11.5	Test Results.....	41
<b>12</b>	<b>FCC §15.247(a)(1)(i) &amp; ISEDC RSS-247 §5.1(c) - Number of Hopping Channels .....</b>	<b>44</b>
12.1	Applicable Standards .....	44
12.2	Test Procedure .....	44
12.3	Test Equipment List and Details.....	44
12.4	Test Environmental Conditions .....	44
12.5	Test Results.....	45
<b>13</b>	<b>FCC §15.247(a) (1) &amp; ISEDC RSS-247 §5.1(b) - Hopping Channel Separation .....</b>	<b>46</b>
13.1	Applicable Standards .....	46
13.2	Test Procedure .....	46
13.3	Test Equipment List and Details.....	46
13.4	Test Environmental Conditions .....	46
13.5	Test Results.....	47
<b>14</b>	<b>FCC §15.247(d) &amp; ISEDC RSS-247 §5.5 - Spurious Emissions at Antenna Terminals .....</b>	<b>48</b>
14.1	Applicable Standards .....	48
14.2	Test Procedure .....	48
14.3	Test Equipment List and Details.....	48
14.4	Test Environmental Conditions .....	48
14.5	Test Results.....	49
<b>15</b>	<b>Annex A (Informative) - A2LA Electrical Testing Certificate.....</b>	<b>51</b>

**DOCUMENT REVISION HISTORY**

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	R1705012-247	Original Report	2017-10-09
1	R1705012-247	Updated per TE comments	2017-10-20

# 1 General Description

---

## 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Trimble Navigation Limited*, and their product model: *SPS986-WFBTR9*, FCC ID: JUP-106900, IC: 1756A-106900 or the “EUT” as referred to in this report. It is a GNSS smart antenna with 900 MHz FHSS radio works in the frequency range from 902.6 to 927.6 MHz.

## 1.2 Objective

This report is prepared on behalf of *Trimble Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commission’s rules and ISEDC RSS-247 Issue 2, February 2017.

The objective is to determine compliance with FCC Part 15.247 and ISEDC RSS-247 rules for Output Power, Antenna Requirements, 20 dB Bandwidth, 100 kHz Bandwidth of Band Edges Measurement, Conducted and Radiated Spurious Emissions, Number of Hopping Channels, Dwell Time, and Hopping Channel Separation.

## 1.3 Related Submittal(s)/Grant(s)

N/A

## 1.4 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

## 1.5 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

## 1.6 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

## 1.7 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

**A- An independent, 3<sup>rd</sup>-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3279.02)**, in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (\*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

**B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.03)** to certify

- For the USA (Federal Communications Commission):
  - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
  - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
  - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
  - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
  - 2 All Scope 2-Licensed Personal Mobile Radio Services;
  - 3 All Scope 3-Licensed General Mobile and Fixed Radio Services;
  - 4 All Scope 4-Licensed Maritime and Aviation Radio Services;
  - 5 All Scope 5-Licensed Fixed Microwave Radio Services
  - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
  - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
  2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
  - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
  - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
  - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
  - 1 MIC Telecommunication Business Law (Terminal Equipment):
    - All Scope A1 - Terminal Equipment for the Purpose of Calls;
    - All Scope A2 - Other Terminal Equipment
  - 2 Radio Law (Radio Equipment):
    - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
    - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
    - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

**C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3279.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:**

- 1 Electronics and Office Equipment:
  - for Telephony (ver. 3.0)
  - for Audio/Video (ver. 3.0)
  - for Battery Charging Systems (ver. 1.1)
  - for Set-top Boxes and Cable Boxes (ver. 4.1)
  - for Televisions (ver. 6.1)
  - for Computers (ver. 6.0)
  - for Displays (ver. 6.0)
  - for Imaging Equipment (ver. 2.0)
  - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
  - for Commercial Dishwashers (ver. 2.0)
  - for Commercial Ice Machines (ver. 2.0)
  - for Commercial Ovens (ver. 2.1)
  - for Commercial Refrigerators and Freezers
- 3 Lighting Products

- For Decorative Light Strings (ver. 1.5)
- For Luminaires (including sub-components) and Lamps (ver. 1.2)
- For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
- For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
  - for Residential Ceiling Fans (ver. 3.0)
  - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
  - For Water Coolers (ver. 3.0)

**D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:**

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Industry Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I and Phase II;
- Chinese Taipei (Republic of China – Taiwan):
  - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
  - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
  - o EMC Directive 2004/108/EC US-EU EMC and Telecom MRA CAB
  - o Radio and Teleterminal Equipment (Rand TTE) Directive 1995/5/EC US -EU EMC and Telecom MRA CAB
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I and Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Development Authority - IDA) APEC Tel MRA -Phase I and Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-USA:
  - o ENERGY STAR Recognized Test Laboratory – US EPA
  - o Telecommunications Certification Body (TCB) – US FCC;
- Vietnam: APEC Tel MRA -Phase I;



## 2 System Test Configuration

### 2.1 Justification

The EUT was configured for testing in accordance to ANSI C63.10-2013

The worst-case data rates are determined by measuring the peak power across all data rates.

### 2.2 EUT Exercise Software

The test firmware used was CSGTestSuite and CommSet provided by *Trimble Navigation Limited*, the software is complying with the standard requirements being tested against.

Frequency (MHz)	Power Setting
902.6	Max
915.4	Max
927.6	Max

### 2.3 Duty Cycle Correction Factor

According to ANSI C63.10-2013 section 7.5:

Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 s (100 ms). In cases where the pulse train exceeds 0.1 s, the measured field strength shall be determined during a 0.1 s interval. The following procedure is an example of how the average value may be determined. The average field strength may be found by measuring the peak pulse amplitude (in log equivalent units) and determining the duty cycle correction factor (in dB) associated with the pulse modulation as shown in following equation:

$$\delta(\text{dB}) = 20\log(\Delta)$$

where


$\delta$  is the duty cycle correction factor (dB)

$\Delta$  is the duty cycle (dimensionless)

Duty Cycle (%)	Duty Cycle Correction Factor (dB)
100	0.00

$$\text{Duty Cycle} = \text{On Time (ms)} / \text{Period (ms)}$$

Please refer to the following graph

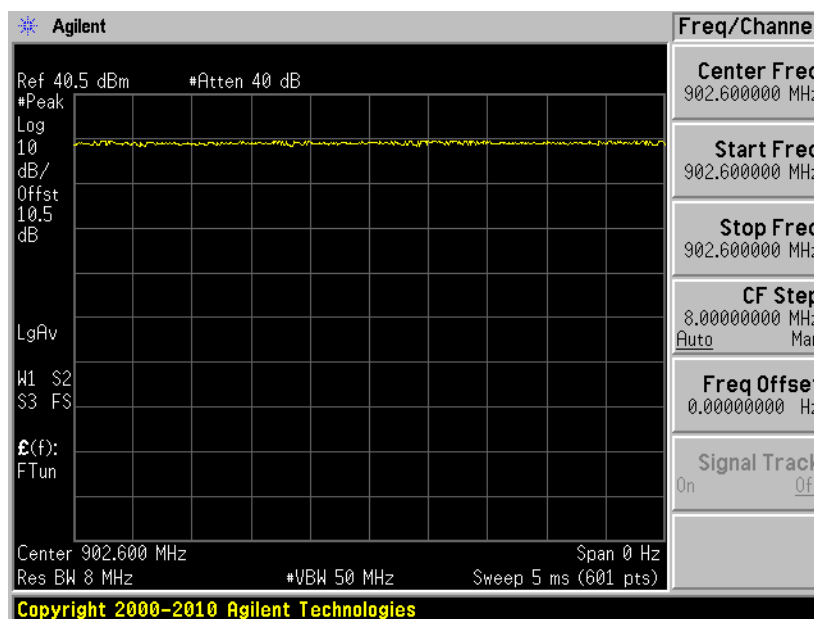

## 2.4 Equipment Modifications

N/A

## 2.5 Local Support Equipment

Manufacturer	Description	Model
Dell	Laptop	Latitude D830

## 2.6 Support Equipment

There was no support equipment included, or intended for use with EUT during these tests.

## 2.7 Interface Ports and Cabling

Cable Description	Length (m)	To	From
USB Cable	1.5 m	Laptop	EUT
AC Adapter	3.4 m	EUT	Plug
RF Cable	< 1 m	EUT	PSA

### 3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen §8.3	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1091, §15.247(i) ISEDC RSS-102	RF Exposure	Compliant
FCC §2.1051, §15.247 (d) ISEDC RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1053, §15.205, §15.209, §15.247(d) ISEDC RSS-247 §5.5 ISEDC RSS-Gen §8.9, §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1) ISEDC RSS-247 §5.1 (c)	20 dB and 99% Emission Bandwidth	Compliant
FCC §15.247(b)(2) ISEDC RSS-247 §5.4(a)	Maximum Peak Output Power	Compliant
FCC §15.247(d) ISEDC RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
FCC §15.247(a)(1)(i) ISEDC RSS-247 §5.1(c)	Number of Hopping Channels	Compliant
FCC §15.247(a)(1) ISEDC RSS-247 §5.1 (b)	Hopping Channel Separation	Compliant
FCC §15.247(a)(1)(i) ISEDC RSS-247 §5.1 (c)	Dwell Time	Compliant

## 4 FCC §15.203 & ISEDC RSS-Gen §8.3 - Antenna Requirements

### 4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §8.3: Transmitter Antenna

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the license-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

License-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the license-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of license-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

### 4.2 Antenna Description

The antennas use non-standard equipment to attach to the EUT<sup>1</sup>.

*Note<sup>1</sup>: Refer to Annex C.*

Antenna usage	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
900 MHz Radio	902.6-927.6	2.5

## 5 FCC §2.1091, §15.247(i) & ISEDC RSS-102 - RF Exposure

### 5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

#### Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF field

According to ISED RSS-102 Issue 5:

Table 4: RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)				
Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m <sup>2</sup> )	Reference Period (minutes)
0.003-10 <sup>21</sup>	83	90	-	Instantaneous*
0.1-10	-	0.73/ f	-	6**
1.1-10	87/ f <sup>0.5</sup>	-	-	6**
10-20	27.46	0.0728	-2	6
20-48	58.07/ f <sup>0.25</sup>	0.1540/ f <sup>0.25</sup>	8.944/ f <sup>0.5</sup>	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f <sup>0.3417</sup>	0.008335 f <sup>0.3417</sup>	0.02619 f <sup>0.8834</sup>	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ f <sup>1.2</sup>
150000-300000	0.158 f <sup>0.5</sup>	4.21 x 10 <sup>-4</sup> f <sup>0.5</sup>	6.67 x 10 <sup>-5</sup> f	616000/f <sup>1.2</sup>

**Note:** f is frequency in MHz.  
 \* Based on nerve stimulation (NS).  
 \*\* Based on specific absorption rate (SAR).

## 5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

## 5.3 MPE Results

### Host SPS986

#### Single Transmitter MPE Evaluation

900 MHz Radio:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>29.95</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>988.55</u>
<u>Prediction distance (cm):</u>	<u>25</u>
<u>Prediction frequency (MHz):</u>	<u>902.6</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.5</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.778</u>
<u>Power density of prediction frequency at 25 cm (mW/cm<sup>2</sup>):</u>	<u>0.2239</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>0.602</u>

2.4 GHz Bluetooth:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>11.64</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>14.588</u>
<u>Prediction distance (cm):</u>	<u>25</u>
<u>Prediction frequency (MHz):</u>	<u>2402</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.585</u>
<u>Power density of prediction frequency at 25 cm (mW/cm<sup>2</sup>):</u>	<u>0.0029</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>1.0</u>

2.4GHz Wi-Fi:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>23.86</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>243.2204</u>
<u>Prediction distance (cm):</u>	<u>25</u>
<u>Prediction frequency (MHz):</u>	<u>2437</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.585</u>
<u>Power density of prediction frequency at 25 cm (mW/cm<sup>2</sup>):</u>	<u>0.0491</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm<sup>2</sup>):</u>	<u>1.0</u>

Note: Bluetooth Module: JUP-WL18DBMOD, IC: 1756A-WL18DBMOD.  
 2.4 GHz Wi-Fi Module: JUP-WL18DBMOD, IC: 1756A-WL18DBMOD.

### Multi Transmitter MPE Evaluation

Wi-Fi+Bluetooth+900 MHz Radio =  $0.0491/1+0.0029/1+0.2239/0.602 = 0.4239 < 1.0$

### Conclusion

In order to meet the multi-transmitter RF Exposure requirement, all transceiver modules must be installed with a separation distance of no less than **25** cm from all persons.

## 5.4 RF exposure evaluation for IC

### Host SPS986

#### Single Transmitter MPE Evaluation

900 MHz Radio:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>29.95</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>988.55</u>
<u>Prediction distance (cm):</u>	<u>25</u>
<u>Prediction frequency (MHz):</u>	<u>902.6</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2.5</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.778</u>
<u>Power density of prediction frequency at 25 cm (W/m<sup>2</sup>):</u>	<u>2.2394</u>
<u>ISED MPE limit for uncontrolled exposure at prediction frequency (W/m<sup>2</sup>):</u>	<u>2.741</u>

2.4 GHz Bluetooth:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>11.64</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>14.588</u>
<u>Prediction distance (cm):</u>	<u>25</u>
<u>Prediction frequency (MHz):</u>	<u>2402</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.585</u>
<u>Power density of prediction frequency at 25 cm (W/m<sup>2</sup>):</u>	<u>0.02945</u>
<u>ISED MPE limit for uncontrolled exposure at prediction frequency (W/m<sup>2</sup>):</u>	<u>5.35</u>

## 2.4 GHz Wi-Fi:

<u>Maximum peak output power at antenna input terminal (dBm):</u>	<u>23.86</u>
<u>Maximum peak output power at antenna input terminal (mW):</u>	<u>243.2204</u>
<u>Prediction distance (cm):</u>	<u>25</u>
<u>Prediction frequency (MHz):</u>	<u>2437</u>
<u>Maximum Antenna Gain, typical (dBi):</u>	<u>2</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.585</u>
<u>Power density of prediction frequency at 25 cm (W/m<sup>2</sup>):</u>	<u>0.49106</u>
<u>ISED MPE limit for uncontrolled exposure at prediction frequency (W/m<sup>2</sup>):</u>	<u>5.404</u>

Note: Bluetooth Module: JUP-WL18DBMOD, IC: 1756A-WL18DBMOD.

2.4 GHz Wi-Fi Module: JUP-WL18DBMOD, IC: 1756A-WL18DBMOD.

**Multi Transmitter MPE Evaluation**

Wi-Fi+Bluetooth+900 MHz Radio =  $0.49106/5.404 + 0.02945/5.35 + 2.2394/2.741 = 0.9134 < 1.0$

**Conclusion**

In order to meet the multi-transmitter RF Exposure requirement, all transceiver modules must be installed with a separation distance of no less than **25** cm from all persons.



## 6 FCC §15.207 & ISEDC RSS-Gen §8.8 - AC Line Conducted Emissions

### 6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS-Gen §8.8 Conducted limits:

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 2</sup>
0.5-5	56	46
5-30	60	50

*Note 1: Decreases with the logarithm of the frequency.*

*Note 2: A linear average detector is required*

### 6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used was FCC §15.207 and ISEDC RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

### 6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak detection mode, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a "QP." Average readings are distinguished with an "Ave".

## 6.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = A_i + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 6.5 Test Setup Block Diagram

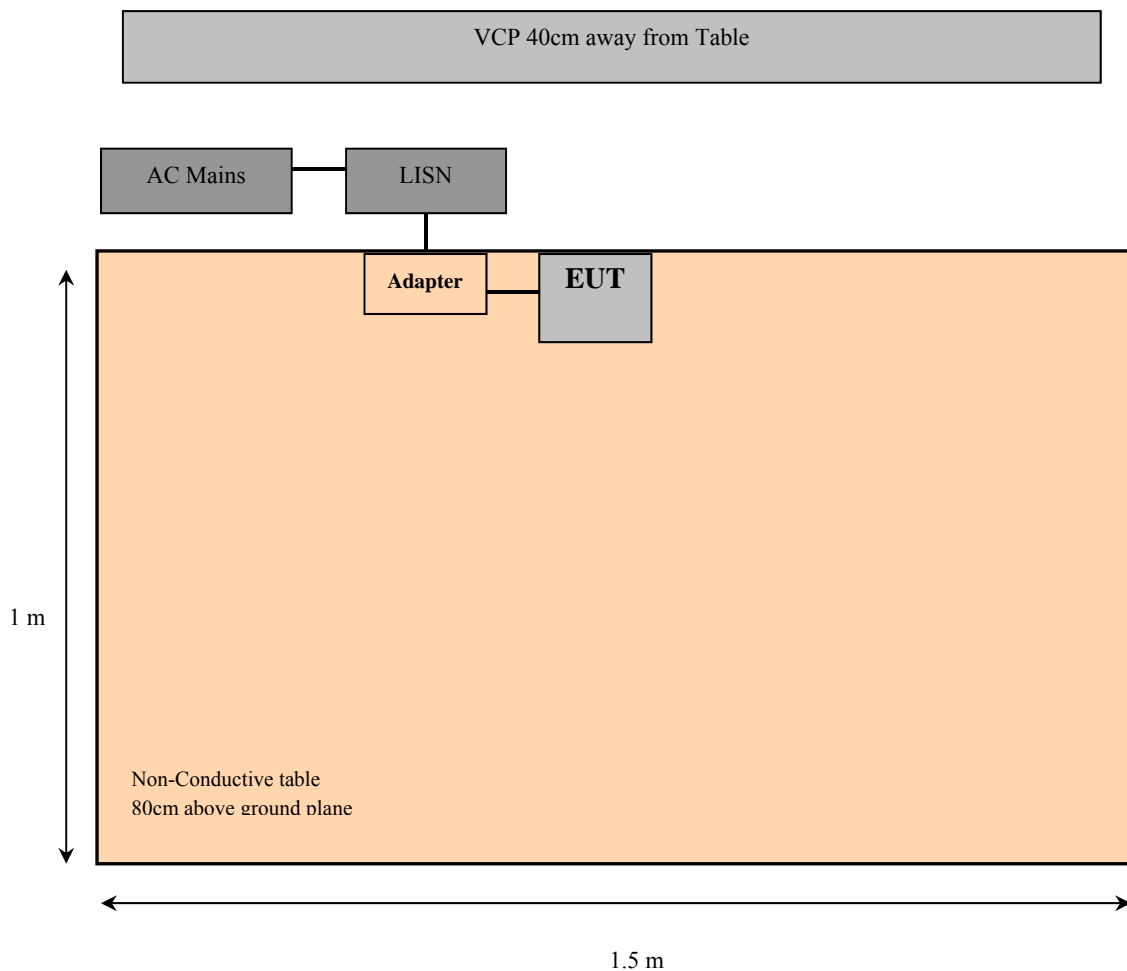

## 6.6 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Rohde and Schwarz	Impulse Limiter	ESH3-Z2	101964	2017-07-25	1 year
Keysight Technologies	RF Limiter	11867A	MY42242931	2017-01-12	1 year
Solar Electronics Company	High Pass Filter	Type 7930-100	7930150204	2017-03-13	1 year
Suirong	30 ft conductive emission cable	LMR 400	-	N/R	N/A
FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2017-04-24	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

## 6.7 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	43 %
<b>ATM Pressure:</b>	101.8 kPa

The testing was performed by Chin Ming Lui and Vincent Licata on 2017-09-27 in the 5m chamber 3.

## 6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISEDC RSS-Gen standard's conducted emissions limits, with the margin reading of:

### 902.6-927.6 MHz

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Live/Neutral)	Range (MHz)
-9.48	0.883574	Neutral	0.15 – 30 MHz


Co-location test is in the Worst Case: 2.4 GHz BT/Wi-Fi and 900MHz signal in Host SPS986

Connection: AC/DC adapter connected to 120 V/60 Hz, AC			
Margin (dB)	Frequency (MHz)	Conductor Mode (Live/Neutral)	Range (MHz)
-15.74	0.177327	Neutral	0.15 – 30 MHz

## 6.9 Conducted Emissions Test Plots and Data

### 900 MHz Radio


#### 120 V, 60 Hz – Line

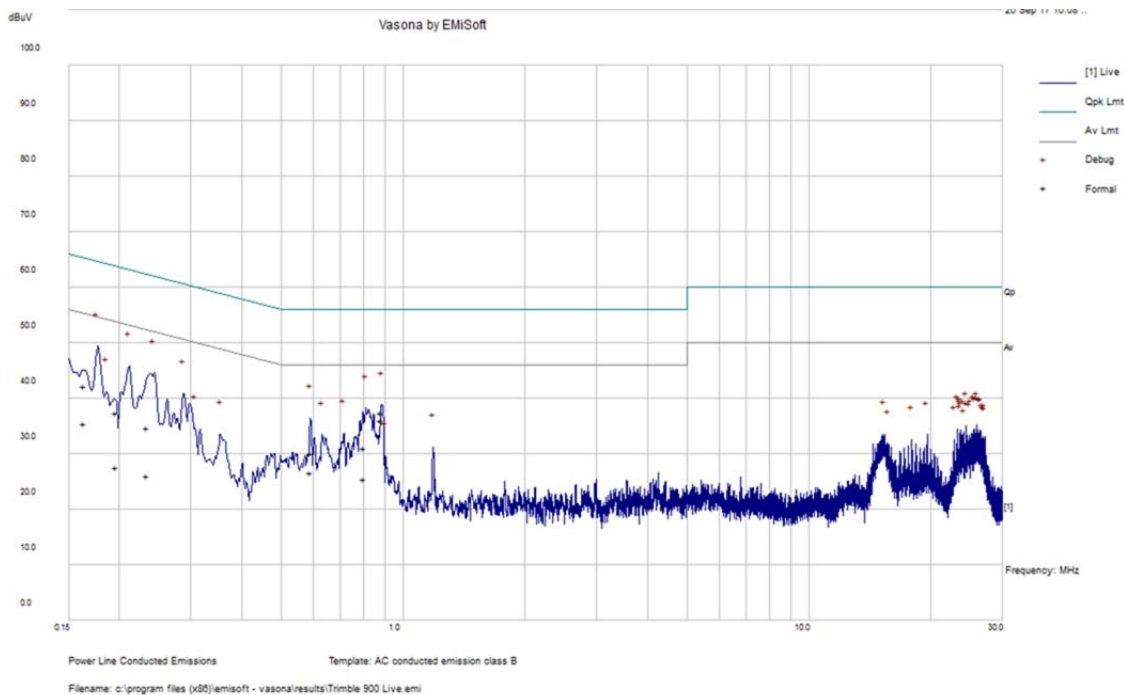

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.163769	42.17	Line	65.27	-23.1	QP
0.883219	37.37	Line	56	-18.63	QP
0.196082	37.49	Line	63.77	-26.28	QP
0.234041	34.72	Line	62.31	-27.58	QP
0.799522	31.09	Line	56	-24.91	QP
0.591932	30.22	Line	56	-25.78	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.163769	35.52	Line	55.27	-19.75	Ave.
0.883219	36.02	Line	46	-9.98	Ave.
0.196082	27.63	Line	53.77	-26.15	Ave.
0.234041	26.01	Line	52.31	-26.3	Ave.
0.799522	25.53	Line	46	-20.47	Ave.
0.591932	26.6	Line	46	-19.4	Ave.

### 120 V, 60 Hz – Neutral

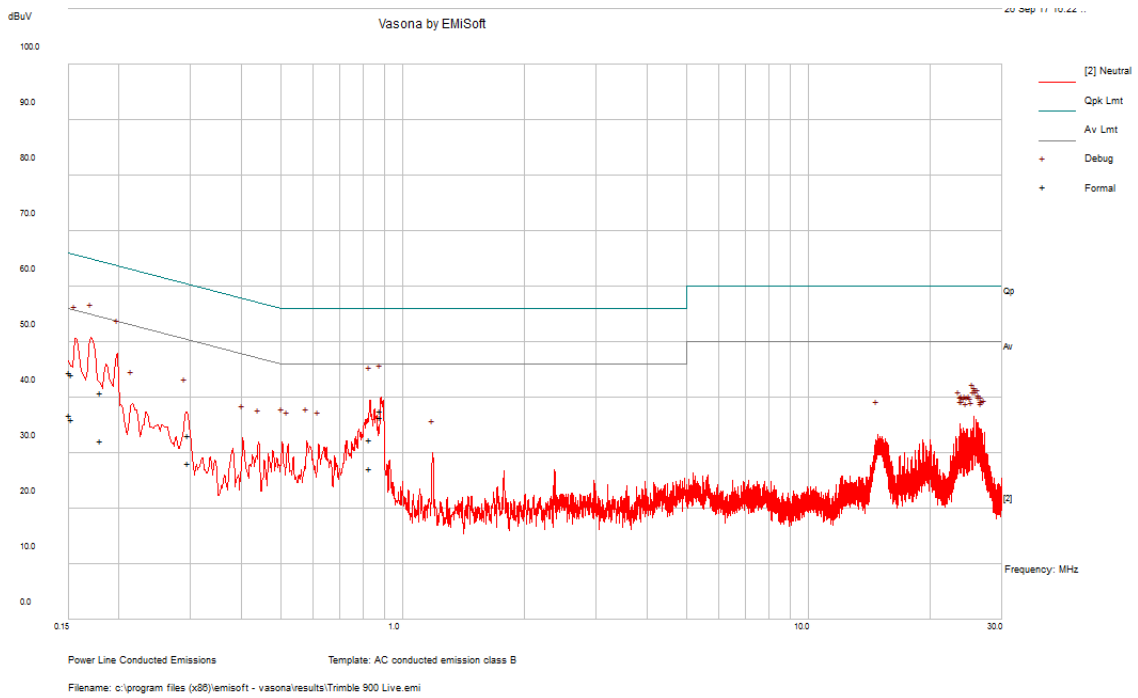


Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.153061	44.15	Neutral	65.83	-21.68	QP
0.151583	44.56	Neutral	65.91	-21.36	QP
0.180827	40.83	Neutral	64.45	-23.62	QP
0.883574	37.63	Neutral	56	-18.37	QP
0.828532	32.44	Neutral	56	-23.56	QP
0.29635	33.24	Neutral	60.34	-27.11	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.153061	36.05	Neutral	55.83	-19.78	Ave.
0.151583	36.9	Neutral	55.91	-19.01	Ave.
0.180827	32.32	Neutral	54.45	-22.13	Ave.
0.883574	36.52	Neutral	46	<b>-9.48</b>	Ave.
0.828532	27.2	Neutral	46	-18.8	Ave.
0.29635	28.27	Neutral	50.34	-22.07	Ave.

**Radio Co-location**  
**2.4 GHz BT/Wi-Fi and 900 MHz Radio**


**120 V, 60 Hz – Line**

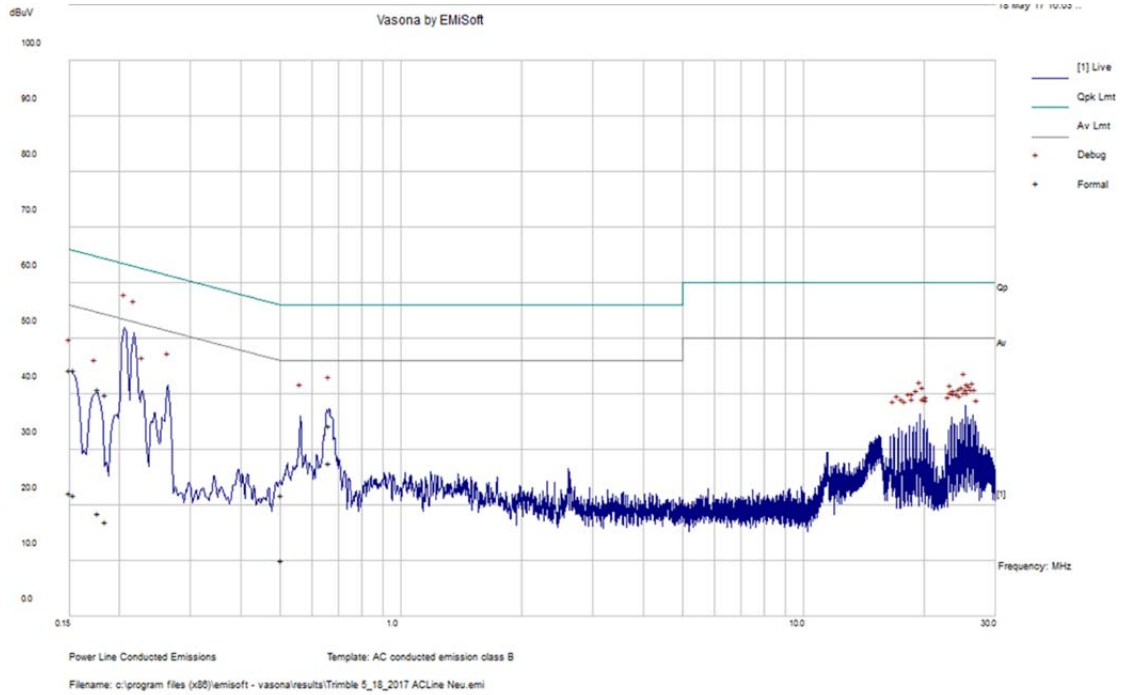

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.192933	39.14	Line	63.91	-24.77	QP
0.199932	39.01	Line	63.61	-24.6	QP
0.645697	32.25	Line	56	-23.75	QP
0.24612	34.87	Line	61.89	-27.02	QP
0.56647	25.1	Line	56	-30.9	QP
0.216327	37.16	Line	62.96	-25.8	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.192933	33.54	Line	53.91	-20.37	Ave.
0.199932	36.12	Line	53.61	-17.49	Ave.
0.645697	26.87	Line	46	-19.13	Ave.
0.24612	30.85	Line	51.89	-21.04	Ave.
0.56647	19.8	Line	46	-26.2	Ave.
0.216327	30.16	Line	52.96	-22.8	Ave.

### 120 V, 60 Hz – Neutral

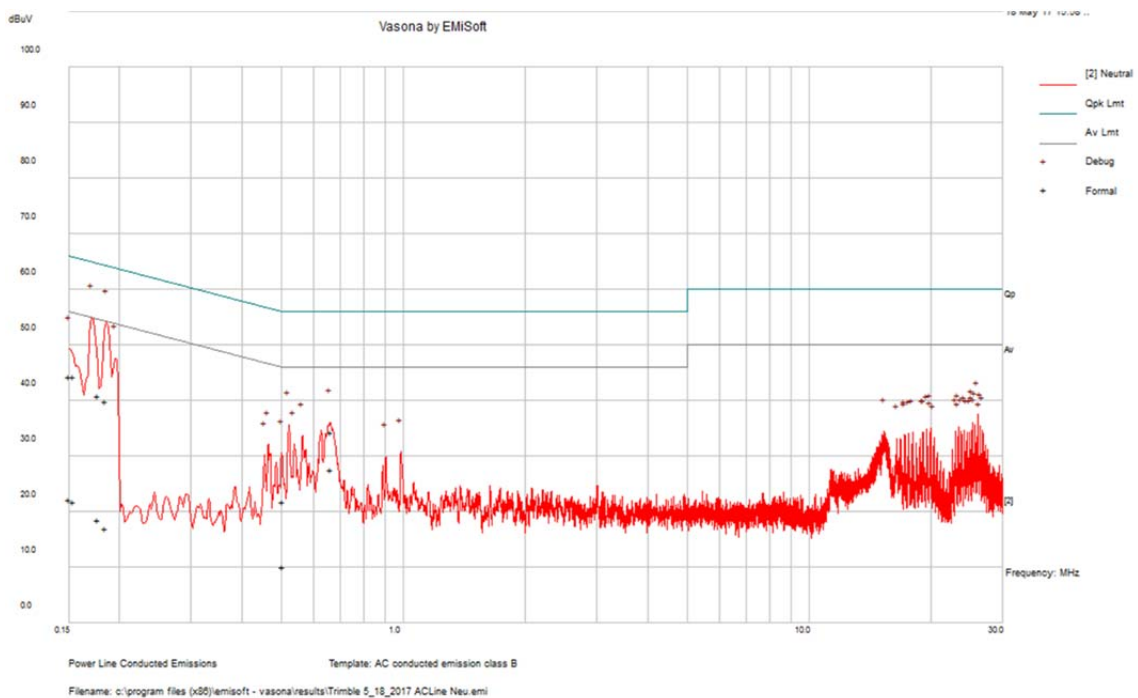

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.154159	44.4	Neutral	65.77	-21.37	QP
0.177327	40.97	Neutral	64.61	-23.64	QP
0.18435	40.01	Neutral	64.29	-24.27	QP
0.150295	44.36	Neutral	65.98	-21.62	QP
0.664927	34.43	Neutral	56	-21.57	QP
0.504333	21.85	Neutral	56	-34.15	QP

Frequency (MHz)	Corrected Amplitude (dBuV)	Conductor (Line/Neutral)	Limit (dBuV)	Margin (dB)	Detector (QP/Ave.)
0.154159	36.54	Neutral	55.77	-19.23	Ave.
0.177327	38.87	Neutral	54.61	<b>-15.74</b>	Ave.
0.18435	32.05	Neutral	54.29	-22.24	Ave.
0.150295	38.65	Neutral	55.98	-17.33	Ave.
0.664927	27.46	Neutral	46	-18.54	Ave.
0.504333	18.45	Neutral	46	-27.55	Ave.



## 7 FCC §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

### 7.1 Applicable Standards

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-Gen 8.9,

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 4 or Table 5 below. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 4 – General Field Strength Limits for Licence-Exempt Transmitters at Frequencies Above 30 MHz**

Frequency (MHz)	Field Strength (µv/m at 3 metres)
30-88	100
88-216	150
216-960	200
Above 960*	500

\* Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.

Note: Transmitting devices are not permitted in restricted frequency bands unless stated otherwise in the specific RSS.

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## 7.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 7.3 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

## 7.4 Corrected Amplitude and Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$\text{CA} = \text{Ai} + \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 7.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde and Schwarz	Receiver, EMI Test	ESCI 1166.5950K03	100338	2016-02-04	2 years
Agilent	Analyzer, Spectrum	E4446A	US44300386	2017-04-20	1 year
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Antenna, Biconi-Log	JB3	A020106-2	2015-07-11	27 Months
EMCO	Antenna, Horn	3115	9511-4627	2016-01-28	2 years
Agilent	Amplifier, Pre	8447D	2944A10187	2017-03-13	1 year
IW	AOBOR Hi frequency Co AX Cable	KPS-1501N-3960-KPS	-	2017-04-27	1 year
-	SMA cable	-	C0002	Each time <sup>1</sup>	N/A
-	N-Type Cable	-	C00012	Each time <sup>1</sup>	N/A
-	N-Type Cable	-	C00014	Each time <sup>1</sup>	N/A
Agilent	Pre-Amplifier	8449B	3147A00400	2017-06-15	1 year
Sunol Sciences	Antenna, Horn	DRH-118	A052704	2017-03-27	2 years
A.R.A.	Antenna, Horn	DRG-118/A	1132	2015-09-21	26 months
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

## 7.6 Test Environmental Conditions

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.7 kPa

The testing was performed by Chin Ming Lui on 2017-09-27 in 5m chamber 3.

## 7.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and ISEDC RSS-247 standard's radiated emissions limits, and had the worst margin of:

### 900 MHz Radio

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-13.99	666.205	Horizontal	Low Channel

### Colocation in SPS986 host


Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Mode
-2.10	4874	Vertical	Colocation

Please refer to the following table and plots for specific test result details.

### 7.8 Radiated Emissions Test Results

#### 1) 30 MHz – 1 GHz Worst Case, Measured at 3 meters

#### 900 MHz Radio

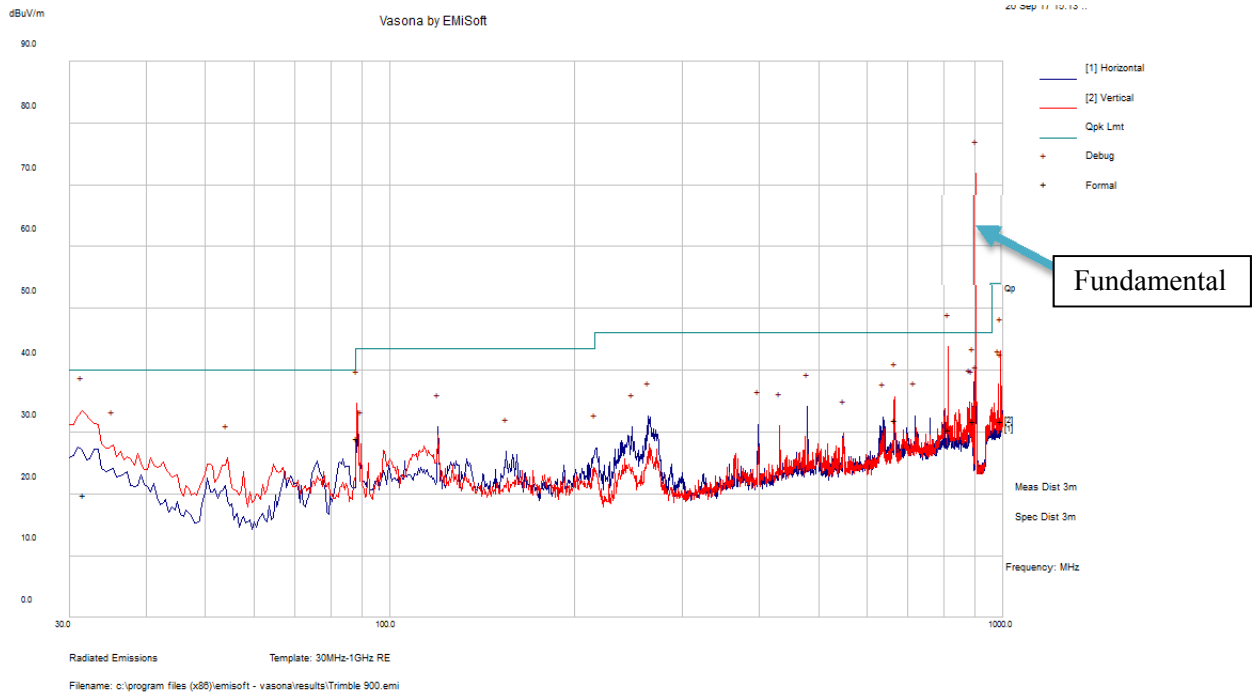


Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
814.107	30.37	145	H	11	46	-15.63	QP
31.60575	19.91	297	H	153	40	-20.09	QP
895.1505	31.7	144	H	120	46	-14.3	QP
88.483	29.04	159	H	354	43.5	-14.46	QP
666.205	32.01	103	H	143	46	<b>-13.99</b>	QP
991.108	31.77	99	V	211	54	-22.23	QP

### Radio Co-location

Radio Co-location configuration:

Co-Location test is in the worst case: 2.4 GHz BT/Wi-Fi and 900 MHz Radio in SPS986 host

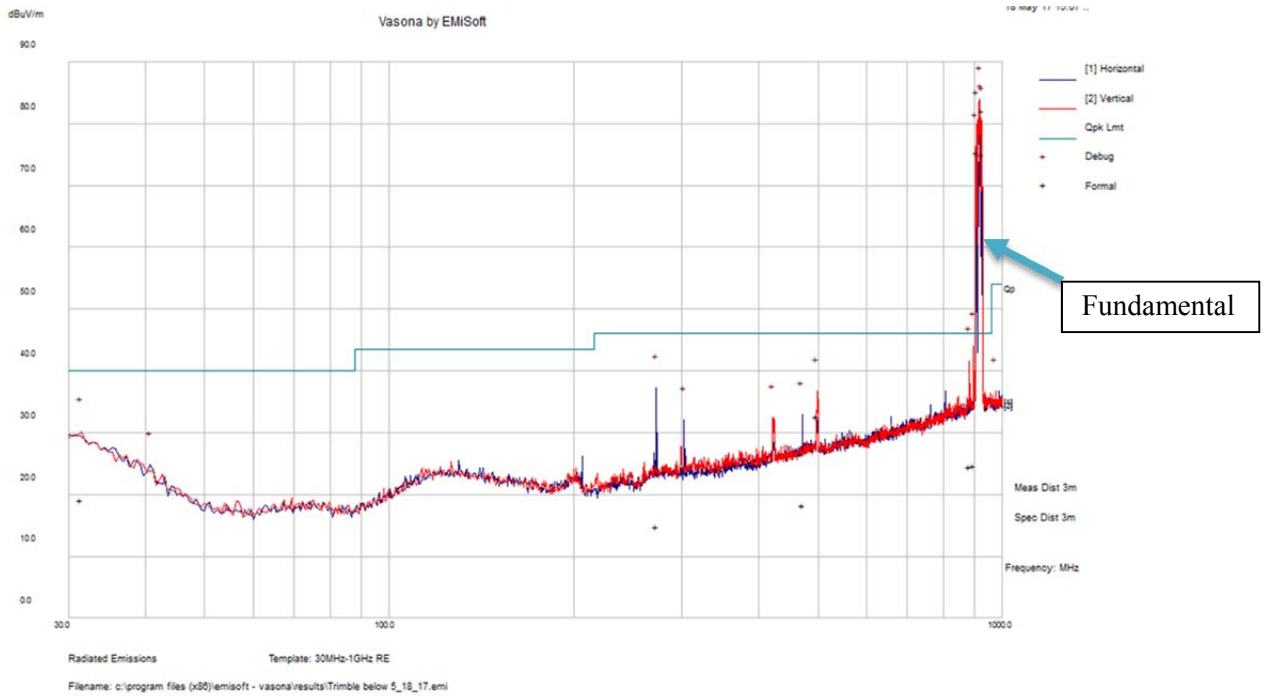

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
897.5405	24.74	121	V	0	46	-21.26	QP
883.253	24.61	101	V	79	46	-21.39	QP
272.3995	14.9	300	H	351	46	-31.1	QP
498.1868	32.68	101	V	75	46	-13.32	QP
31.341	19.2	210	V	23	40	-20.8	QP
471.5503	18.22	173	H	188	46	-27.78	QP

## 2) 900 MHz–10 GHz Measured at 3 meters

## 900 MHz Radio

Frequency (MHz)	S.A. Reading (dBµV)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dBµV/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dBµV/m)	Margin (dB)	
Low Channel, 902.6 MHz											
902.6	99.80	0	100	H	22.80	1.77	0	124.37	-	-	PK
902.6	97.38	0	100	H	22.80	1.77	0	121.95	-	-	AV
902.6	105.06	255	114	V	22.80	1.77	0	129.63	-	-	PK
902.6	102.52	255	114	V	22.80	1.77	0	127.09	-	-	AV
1805.2	50.26	0	100	H	27.14	6.96	36.799	47.56	104.37	-56.81	PK
1805.2	43.19	137	135	H	27.14	6.96	36.799	40.49	101.95	-61.46	AV
1805.2	54.73	264	100	V	27.14	6.96	36.799	52.03	109.63	-57.60	PK
1805.2	50.33	265	100	V	27.14	6.96	36.799	47.63	107.09	-59.46	AV
2707.8	46.48	275	100	V	29.33	7.04	36.632	46.22	74.00	-27.78	PK
2707.8	33.67	275	100	V	29.33	7.04	36.632	33.41	54.00	-20.59	AV
Middle Channel, 915.4 MHz											
915.4	97.93	0	100	H	22.90	1.79	0.00	122.62	-	-	PK
915.4	95.64	0	100	H	22.90	1.79	0.00	120.33	-	-	AV
915.4	102.59	265	175	V	22.90	1.79	0.00	127.28	-	-	PK
915.4	99.15	265	175	V	22.90	1.79	0.00	123.84	-	-	AV
1830.8	54.30	132	140	H	27.28	6.96	36.799	51.74	102.62	-50.88	PK
1830.8	49.08	127	130	H	27.28	6.96	36.799	46.52	100.33	-53.81	PK
1830.8	59.93	271	100	V	27.28	6.96	36.799	57.37	107.28	-49.91	PK
1830.8	57.27	271	100	V	27.28	6.96	36.799	54.71	103.84	-49.13	AV
2746.2	46.59	275	100	V	29.14	7.04	36.632	46.14	74.00	-27.87	PK
2746.2	34.61	275	100	V	29.14	7.04	36.632	34.16	54.00	-19.85	AV
High Channel, 927.6 MHz											
927.6	94.96	0	100	H	23.00	1.81	0.00	119.77	-	-	PK
927.6	92.87	0	100	H	23.00	1.81	0.00	117.68	-	-	AV
927.6	102.80	242	120	V	23.00	1.81	0.00	127.61	-	-	PK
927.6	99.89	242	120	V	23.00	1.81	0.00	124.70	-	-	AV
960	15.97	0	100	H	23.50	1.86	0.00	41.33	74.00	-32.67	PK
960	4.28	0	100	H	23.50	1.86	0.00	29.64	54.00	-24.36	AV
960	15.89	0	100	V	23.50	1.86	0.00	41.25	74.00	-32.75	PK
960	4.97	0	100	V	23.50	1.86	0.00	30.33	54.00	-23.67	AV
1855.2	55.21	145	100	H	27.28	6.93	36.761	52.66	99.77	-47.11	PK
1855.2	49.61	145	100	H	27.28	6.93	36.761	47.06	97.68	-50.62	AV
1855.2	62.58	275	100	V	27.28	6.93	36.761	60.03	107.61	-47.58	PK
1855.2	59.67	275	100	V	27.28	6.93	36.761	57.12	104.70	-47.58	AV
2782.8	48.93	0	100	V	29.22	7.12	36.664	48.60	74.00	-25.40	PK
2782.8	35.90	0	100	V	29.22	7.12	36.664	35.57	54.00	-18.43	AV



**Radio collocation**

Co-Location test is in the worst case: 2.4 GHz BT/Wi-Fi and 900 MHz Radio in SPS986 host

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/ISED		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Collocation											
902.6	99.8	60	149	H	22.8	1.77	0.00	124.37	-	-	PK
902.6	97.4	60	149	H	22.8	1.77	0.00	121.97	-	-	AV
902.6	102.5	168	120	V	22.8	1.77	0.00	127.07	-	-	PK
902.6	100.2	168	120	V	22.8	1.77	0.00	124.77	-	-	AV
1805.2	63.12	0	100	H	27.14	6.96	23.44	73.78	104.37	-30.59	PK
1805.2	57.32	0	100	H	27.14	6.96	23.44	67.98	101.97	-33.99	AV
1805.2	63.55	0	100	V	27.14	6.96	23.44	75.21	107.27	-32.06	PK
1805.2	58.38	0	100	V	27.14	6.96	23.44	69.04	104.77	-35.73	AV
2437	59.64	150	100	H	29.413	3.43	0.00	92.48	-	-	PK
2437	56.54	150	100	H	29.413	3.43	0.00	89.38	-	-	AV
2437	67.51	325	100	V	29.413	3.43	0.00	100.35	-	-	PK
2437	64.07	325	100	V	29.413	3.43	0.00	96.91	-	-	AV
4874	51.73	212	100	V	32.7	9.42	36.327	57.52	74	-16.48	PK
4874	46.11	212	100	V	32.7	9.42	36.327	51.90	54	<b>-2.10</b>	AV
7311	44.72	0	100	V	32.7	9.42	36.327	50.51	74	-23.49	PK
7311	33.27	0	100	V	32.7	9.42	36.327	39.06	54	-14.94	AV

## 8 FCC §15.247(a) (1) & ISEDC RSS-247 §5.1 (c) - Emission Bandwidth

### 8.1 Applicable Standards

According to FCC §15.247(a) (1) (i) and ISEDC RSS-247 §5.1 (c) For frequency hopping systems operating in the 902-928 MHz band: The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 8.2 Measurement Procedure

Span = approximately 2 to 5 times the 99% occupied bandwidth, centered on a hopping channel

RBW = 1% to 5 % of the 99% occupied bandwidth

VBW = 3RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10 dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 8.4 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	42 %
ATM Pressure:	102.6 KPa

The testing was performed by Vincent Licata on 2017-09-29 in RF site.

### 8.5 Test Results


Channel	Frequency (MHz)	99% OBW (kHz)	20 dB OBW (kHz)
Low	902.6	594.093	417.119
Middle	915.4	606.050	415.388
High	927.6	624.728	420.539

Please refer to the following plots for detailed test results.


Low Channel 902.6 MHz



Middle Channel 915.4 MHz

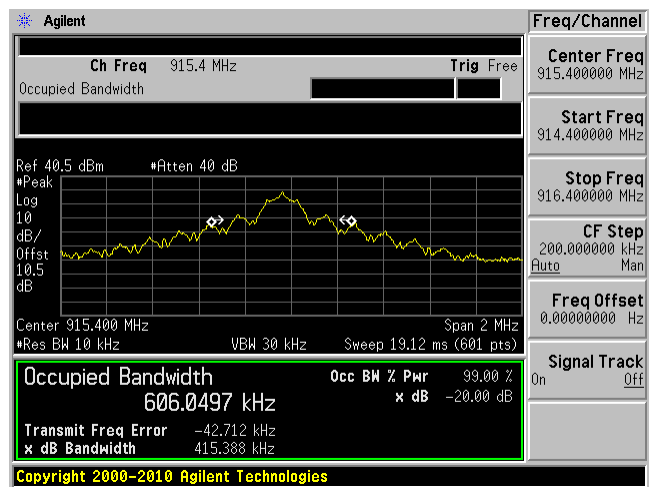

High Channel 927.6 MHz

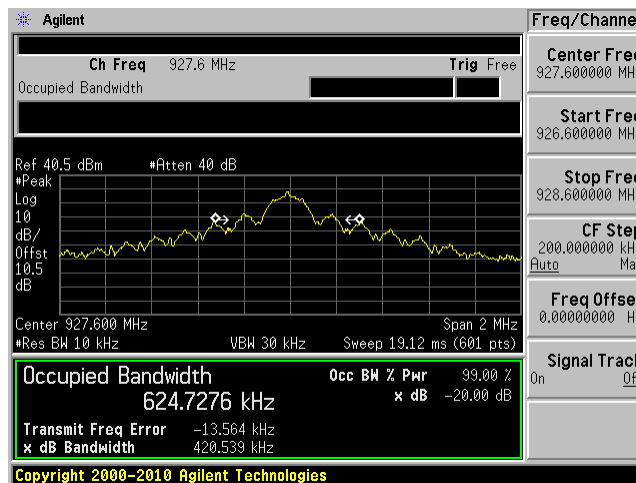

## 9 FCC §15.247(b) (2) & ISEDC RSS-247 §5.4 (a) - Output Power

### 9.1 Applicable Standards

According to FCC §15.247(b) (2): For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

According to RSS-247 §5.4 (a): For FHSs operating in the band 902-928 MHz, the maximum peak conducted output power shall not exceed 1.0 W, and the e.i.r.p. shall not exceed 4 W if the hopset uses 50 or more hopping channels; the maximum peak conducted output power shall not exceed 0.25 W and the e.i.r.p. shall not exceed 1 W if the hopset uses less than 50 hopping channels.

### 9.2 Measurement Procedure

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 9.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.9 KPa


The testing was performed by Vincent Licata on 2017-09-29 in RF site.

### 9.5 Test Results


Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	902.6	29.95	30
Middle	915.4	29.70	30
High	927.6	29.42	30

Please refer to the following plots for detailed test results.


Low Channel 902.6 MHz

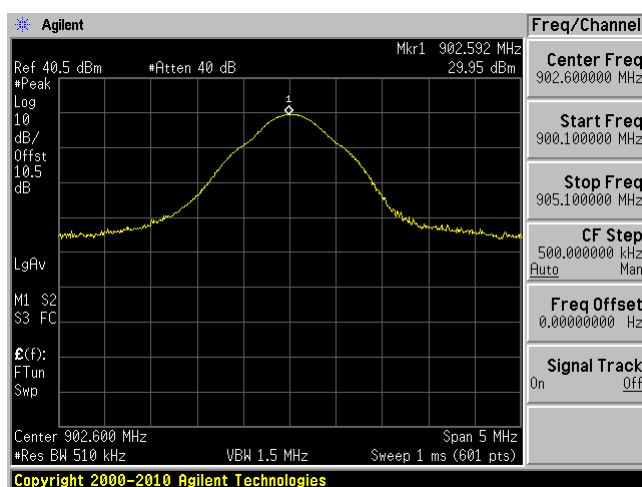

Middle Channel 915.4 MHz

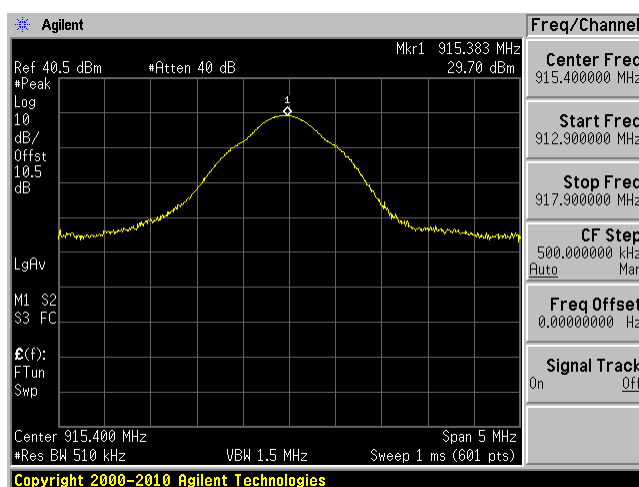

High Channel 927.6 MHz

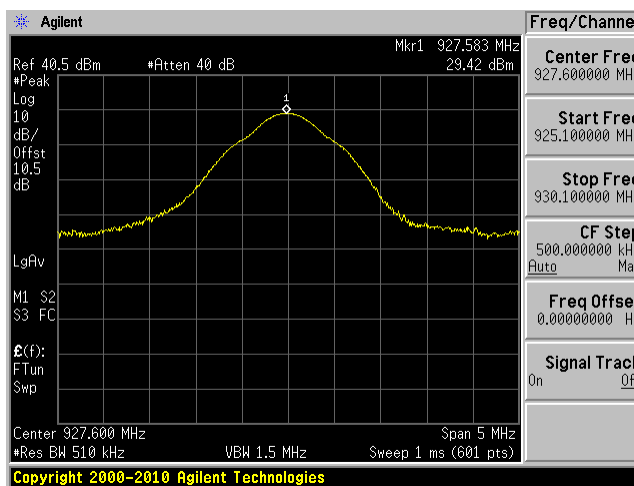

## 10 FCC §15.247(d) & ISEDC RSS-247 §5.5 - 100 kHz Bandwidth of Band Edges

### 10.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 10.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz

VBW = 300 kHz

Sweep = coupled

Detector function = peak

Trace = max hold

### 10.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF Cable	-	-	Each time <sup>1</sup>	N/A
-	10 dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.


### 10.4 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.6 KPa


The testing was performed by Vincent Licata on 2017-09-29 in RF site.

### 10.5 Test Results

Low Channel 902.6 MHz

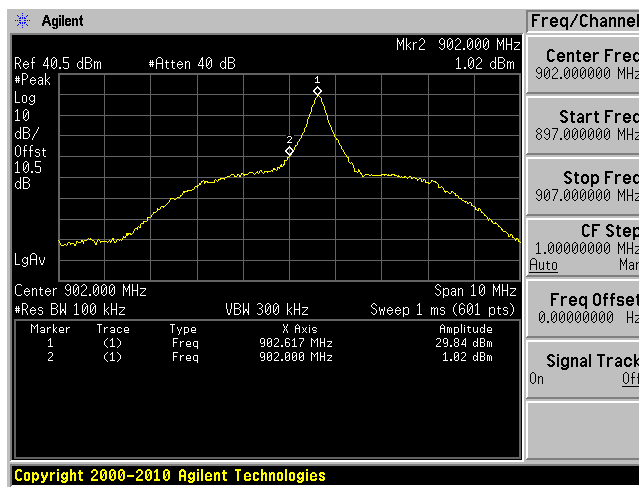

High Channel 927.6 MHz

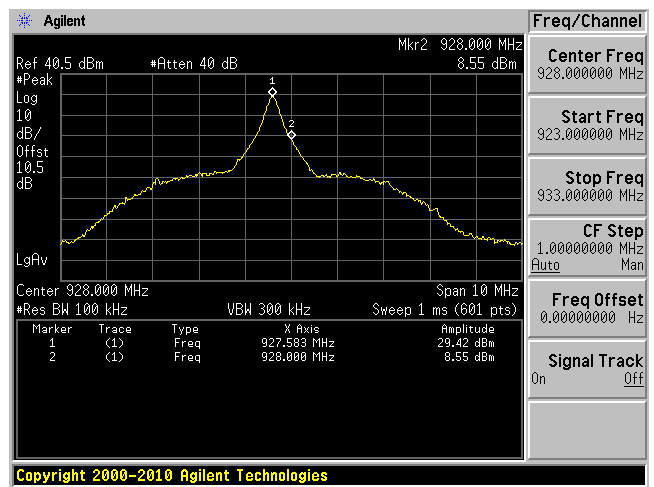

## 11 FCC §15.247(a) (1) (i) & ISEDC RSS-247 §5.1 (c) - Dwell Time

### 11.1 Applicable Standards

According to FCC §15.247(a) (1) (i) and RSS-247 §5.1 (c), For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 11.2 Measurement Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW  $\leq$  channel spacing and where possible RBW should be set  $\gg 1/T$ , where  $T$  is the expected dwell time per channel

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\text{(Number of hops in the period specified in the requirements)} = \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

### 11.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10 dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.



### 11.4 Test Environmental Conditions

<b>Temperature:</b>	22 °C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.5 KPa

The testing was performed by Vincent Licata on 2017-09-29 in RF site.


### 11.5 Test Results

Channel	Pulse Width (ms)	Number of Hops in the Specified Period in the Requirements	Average Time of Occupancy (s)	Limit (sec)	Results
Low	45.33	2	0.0907	0.4	compliant
Middle	45.67	3	0.1370	0.4	compliant
High	45.67	2	0.0913	0.4	compliant


Please refer to the following plots for detailed test results.

#### Pulse Width


Low Channel 902.6 MHz

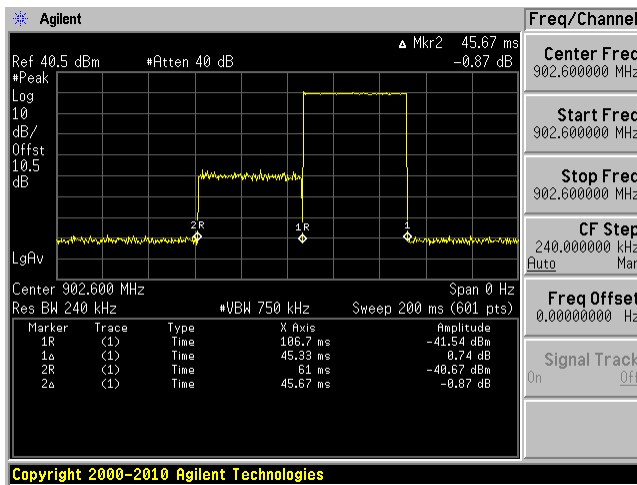

Middle Channel 915.4 MHz

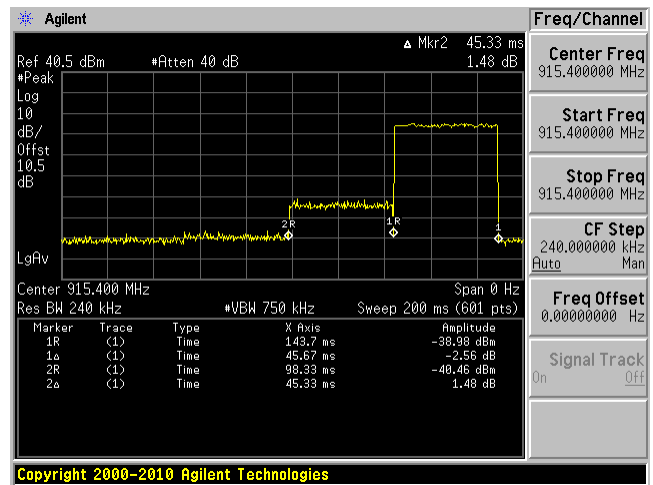


### High Channel 927.6 MHz

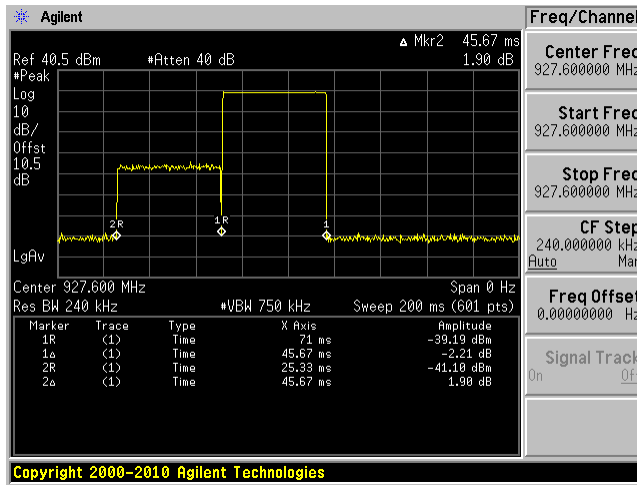


### Number of Pulses within a Specified Time


#### Low Channel 902.6 MHz

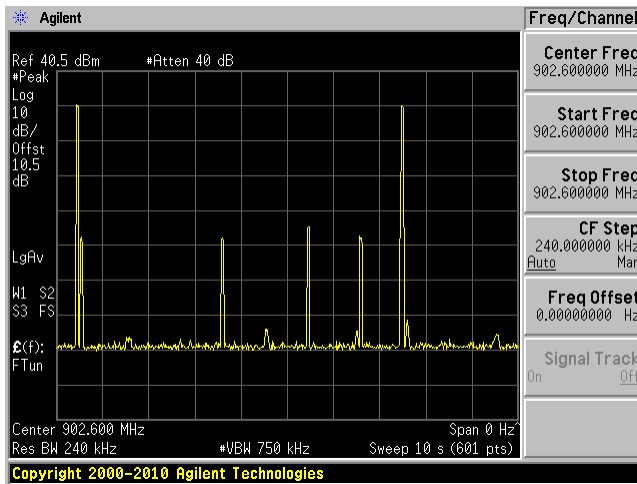

#### Middle Channel 915.4 MHz

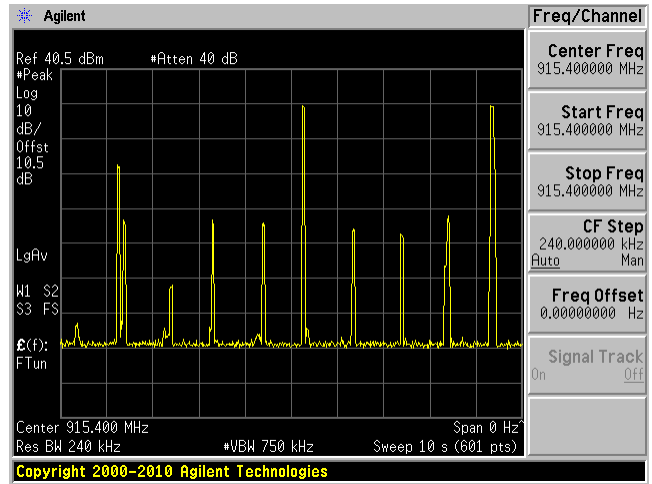

### High Channel 927.6 MHz

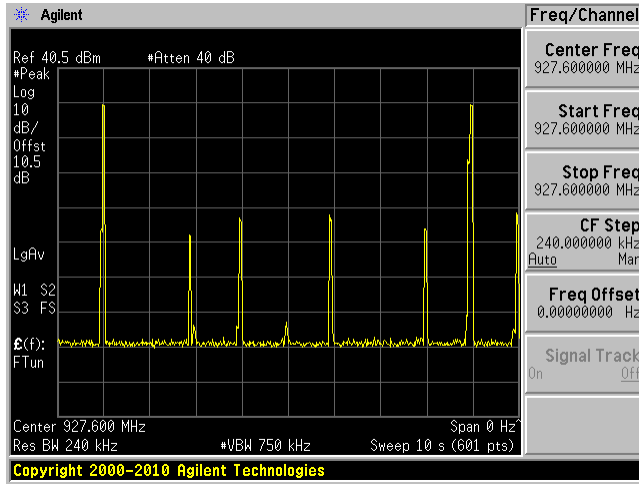

## 12 FCC §15.247(a)(1)(i) & ISEDC RSS-247 §5.1(c) - Number of Hopping Channels

### 12.1 Applicable Standards

According to FCC §15.247(a) (1) (i) and RSS-247 §5.1(c): For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 12.2 Test Procedure

Span = the frequency band of operation

RBW < 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 12.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10 dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 12.4 Test Environmental Conditions


Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.5 KPa

The testing was performed by Vincent Licata on 2017-09-29 in RF site.

### 12.5 Test Results

Total **50 channels**; please refer to the plots hereinafter.

Number of Hopping Channels

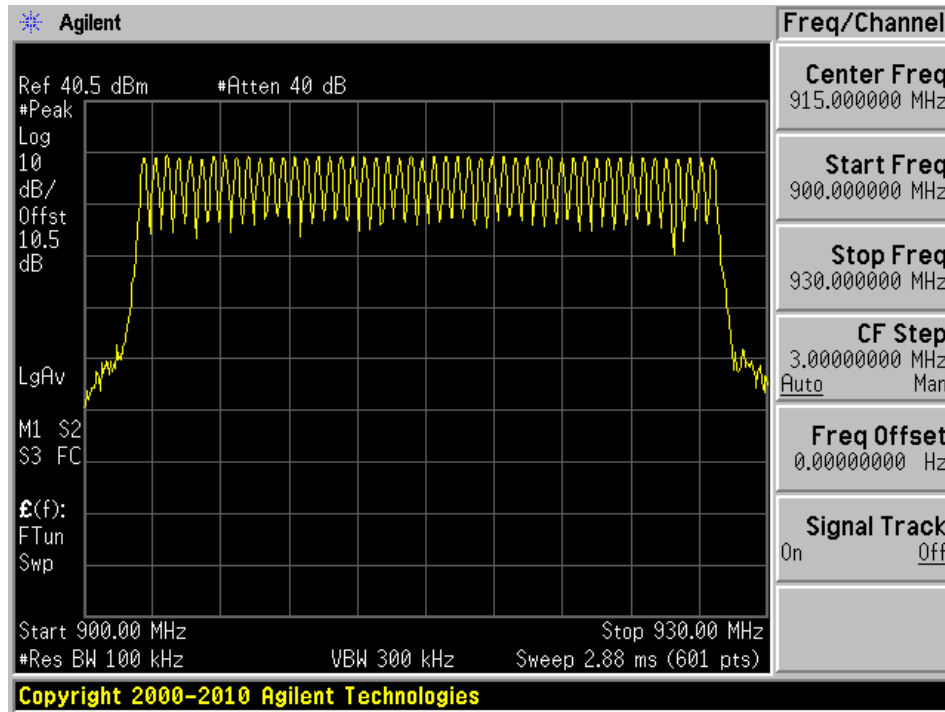

## 13 FCC §15.247(a) (1) & ISEDC RSS-247 §5.1(b) - Hopping Channel Separation

### 13.1 Applicable Standards

According to FCC §15.247(a) (1) and RSS-247 §5.1(b): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 13.2 Test Procedure

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW)  $\approx$  30% of the channel spacing, adjust as necessary to best identify the center of each individual channel

Video (or Average) Bandwidth (VBW)  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

### 13.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10 dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 13.4 Test Environmental Conditions

Temperature:	23 °C
Relative Humidity:	42 %
ATM Pressure:	102.5 KPa


*The testing was performed by Vincent Licata on 2017-09-29 in RF site.*

### 13.5 Test Results


Channel	Frequency (MHz)	Channel Separation (kHz)	Limit >20 dB OBW (kHz)
Low	902.6	513	417.119
Middle	915.4	500	415.388
High	927.6	513	420.539

Please refer to following plots.


Low Channel 902.6 MHz

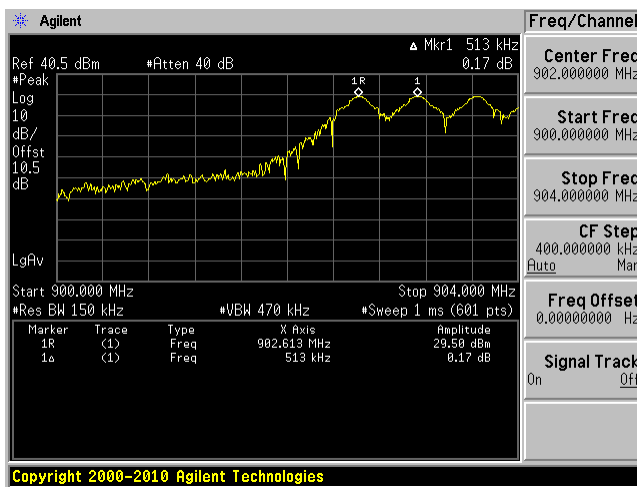

Middle Channel 915.4 MHz

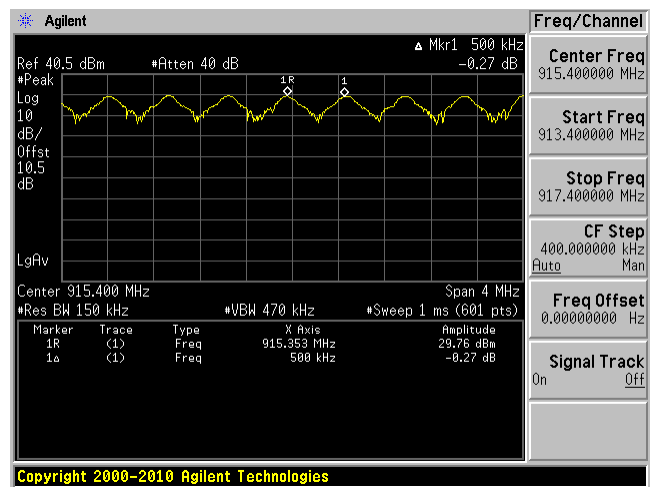

High Channel 927.6 MHz

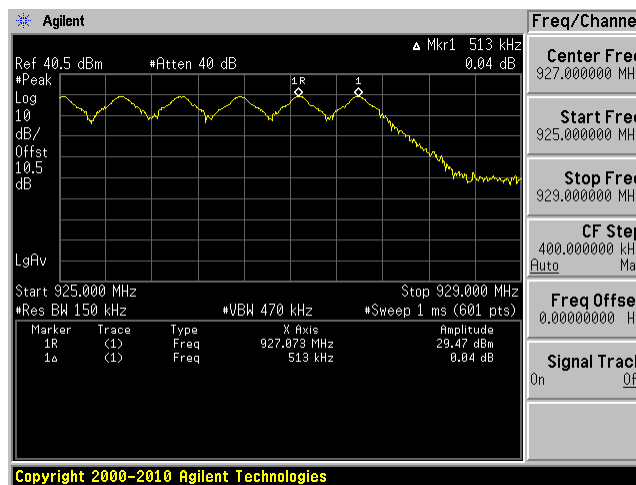

## 14 FCC §15.247(d) & ISEDC RSS-247 §5.5 - Spurious Emissions at Antenna Terminals

### 14.1 Applicable Standards

For FCC §15.247(d) in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISEDC RSS-247 §5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 14.2 Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

### 14.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Analyzer, Spectrum	E4440A	US45303156	2017-02-24	1 year
-	RF cable	-	-	Each time <sup>1</sup>	N/A
-	10 dB attenuator	-	-	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

### 14.4 Test Environmental Conditions

<b>Temperature:</b>	23° C
<b>Relative Humidity:</b>	42 %
<b>ATM Pressure:</b>	102.5 KPa


*The testing was performed by Vincent Licata on 2017-09-29 in RF site.*




### 14.5 Test Results

Please refer to following plots.


Low Channel 30 MHz – 1 GHz

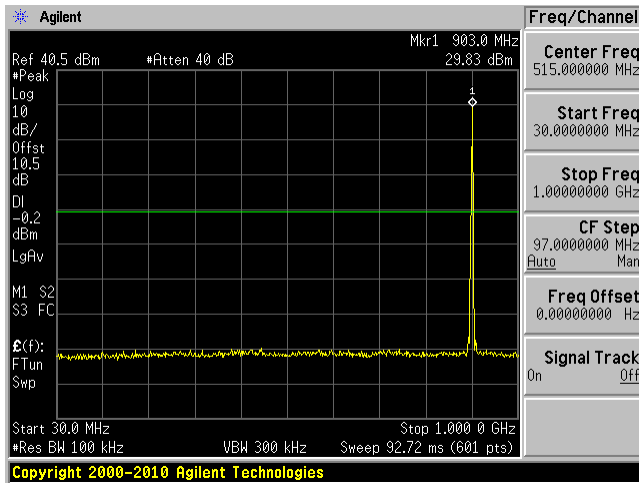


Low Channel 1 GHz – 26 GHz

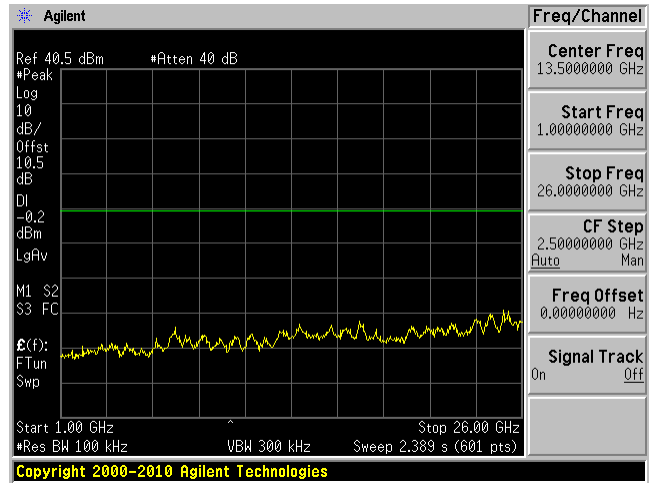


Middle Channel 30 MHz – 1 GHz

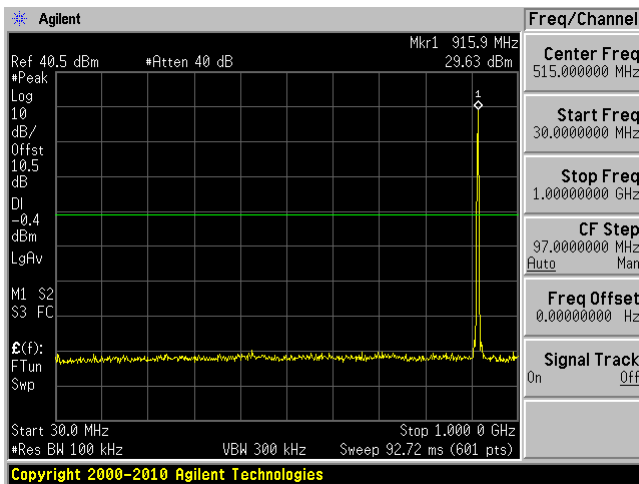


Middle Channel 1 GHz – 26 GHz

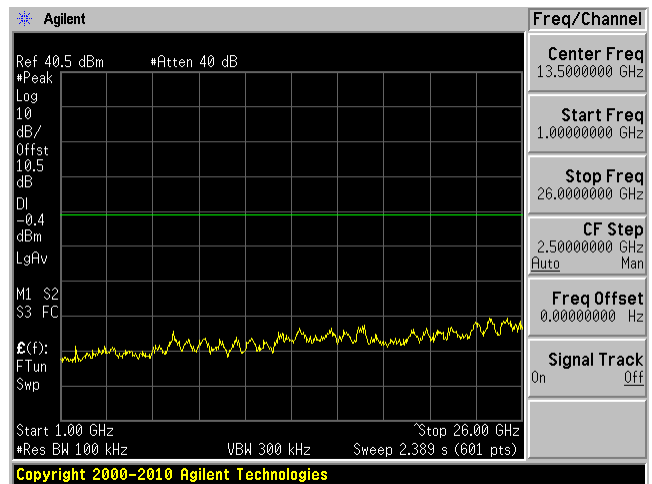

### High Channel 30 MHz – 1 GHz

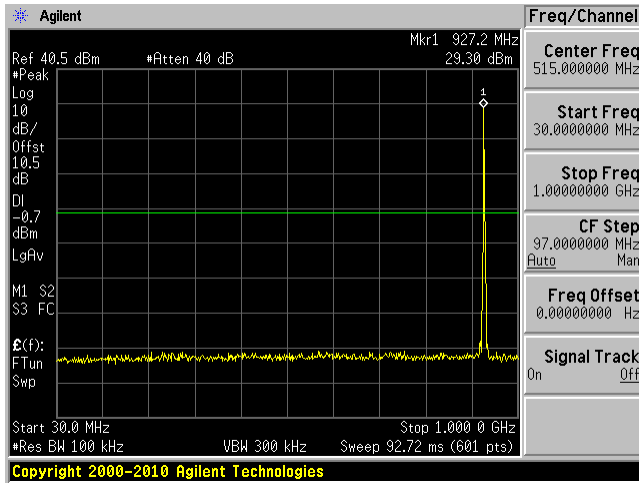

### High Channel 1 GHz – 26 GHz

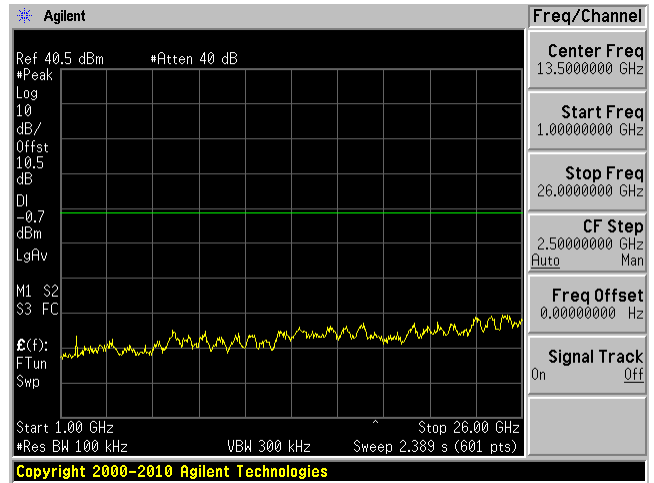

# 15 Annex A (Informative) - A2LA Electrical Testing Certificate



## Accredited Laboratory

A2LA has accredited

### BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of A2LA R222 - Specific Requirements - EPA ENERGY STAR Accreditation Program. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 30th day of August 2016.

Senior Director of Quality & Communications  
For the Accreditation Council  
Certificate Number 3297.02  
Valid to September 30, 2018

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

--- END OF REPORT ---