



FCC Test Report

FCC Part 15.247 for FHSS systems/ CANADA RSS-210

FOR:

MODEL #: R8-Model 2, SPS880

TRIMBLE NAVIGATION LTD.,
935 STEWART DR.
P.O BOX 3642
SUNNYVALE, CA 94088-3642
U.S.A

FCC ID: Q23 31307 / 09EQ2426-SK
IC ID: 1756A-50158

TEST REPORT #: EMC_1098_2005_BLUETOOTH
DATE: DECEMBER 05, 2005



TTI-P-G 081/94-A0

Accredited according to ISO/IEC 17025



Bluetooth Qualification
Test Facility
(BQTF)



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May



TABLE OF CONTENTS

1 Assessment _____ **4**

2 Administrative Data _____ **5**

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report _____ **5**

2.2 Identification of the Client _____ **5**

2.3 Identification of the Manufacturer _____ **5**

3 Equipment under Test (EUT) _____ **6**

3.1 Identification of the Equipment under Test _____ **6**

4 Subject Of Investigation _____ **7**

5 Measurements For Bluetooth Module _____ **8**

5.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (RADIATED) _____ **8**

 5.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1) (2) (3) (4) _____ **8**

 5.1.2 RESULTS: _____ **8**

5.2 MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED) _____ **12**

 5.2.1 LIMIT SUB CLAUSE § 15.247 (b) (1) _____ **12**

 5.2.2 RESULTS: _____ **12**

5.3 20dB BANDWIDTH _____ **16**

 5.3.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii) _____ **16**

 5.3.2 RESULTS: _____ **16**

5.4 CARRIER FREQUENCY SEPARATION _____ **20**

 5.4.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii) _____ **20**

 5.4.2 RESULTS: _____ **20**

5.5 NUMBER OF HOPPING CHANNELS _____ **22**

 5.5.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (iii) _____ **22**

 5.5.2 RESULTS: _____ **22**

5.6 TIME OF OCCUPANCY (DWELL TIME) _____ **27**

 5.6.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii) _____ **27**

 5.6.2 RESULTS: _____ **27**

5.7 CONDUCTED SPURIOUS EMISSIONS _____ **31**

 5.7.1 LIMIT SUB CLAUSE § 15.247 (d) _____ **31**

 5.7.2 RESULTS _____ **32**

5.8 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205 _____ **38**

 5.8.1 LIMITS _____ **38**

 5.8.2 RESULTS (2402MHz) _____ **39**

 5.8.3 RESULTS (2480MHz) _____ **41**

5.9 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209 _____ **43**

 5.9.1 LIMITS _____ **43**

 5.9.2 RESULTS _____ **44**

5.10 RECEIVER SPURIOUS RADIATION § 15.209/RSS210 _____ **56**

 5.10.1 LIMITS _____ **56**

 5.10.2 RESULTS _____ **57**



5.11	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	63
5.11.1	LIMITS	63
5.11.2	RESULTS	64
6	<i>Measurements For R8-MODEL 2, SPS880</i>	65
6.1	CO-LOCATION	65
6.1.1	RESULTS (PCS AND BLUETOOTH)	66
6.2	RECEIVER SPURIOUS RADIATION § 15.209/RSS210	72
6.2.1	LIMITS	72
6.2.2	RESULTS	73
6.3	AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	78
6.3.1	LIMITS	78
6.3.2	RESULTS	79
6.4	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	80
6.5	BLOCK DIAGRAMS	81



1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS210.

Company	Description	Model #
TRIMBLE NAVIGATION LTD	GPS RECEIVER WITH BLUETOOTH DEVICE AND CELLULAR MOBILE GSM (824-849MHz) PCS DEVICE (2GHz) RECEIVER	R8-MODEL 2, SPS880

2005-12-05
Neelesh Raj
Project Leader

2005-12-05
Lothar Schmidt
Test Lab Manager

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt
Responsible Project Leader:	Neelesh Raj
Date of test:	2005-11-22 to 2005-12-02

2.2 Identification of the Client

Applicant's Name:	Trimble Navigation Ltd
Street Address:	935 Stewart Dr. P.O. Box 3642
City/Zip Code	Sunnyvale 94088-3642
Country	USA
Contact Person:	Roy Urbach
Phone No.	408-481-8667
Fax:	408-481-7866
e-mail:	roy_urbach@trimble.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Trimble Navigation Ltd
Manufacturers Address:	935 Stewart Dr. P.O. Box 3642
City/Zip Code	Sunnyvale 94088-3642
Country	USA



3 Equipment under Test (EUT)

3.1 Identification of the Equipment under Test

Marketing Name:	R8-MODEL 2, SPS880
Description:	GPS Receiver with Bluetooth Device and Cellular Mobile GSM (824-849 MHz) PCS Device (2 GHz) Receiver
Model No:	R8-MODEL 2, SPS880
FCC ID:	Q23 31307 / 09EQ2426-SK
IC ID:	1756A-50158
Frequency Range:	2400-2483.5MHz
Type(s) of Modulation:	GFSK
Number of Channels:	79
Antenna Type:	INTERNAL
Output Power:	0.0019W CONDUCTED @ 2480MHz

4 Subject Of Investigation

FCC:

FCC ID#: JUP-50158-R8, applies to previous R8 with different BT module. This ID isn't being permissive changed, but will be replaced on the label with the BT module ID (Q23 31307) and the GPRS module ID (O9EQ2426-SK).

INDUSTRY CANADA:

We are requesting a permissive change to 1756A-50158, which currently is based on the previous version of the R8 (has different digital and GPS electronics) with a different BT module, but with the same GPRS module. We will continue to ship both the existing R8 and the new R8-Model 2 (also called SPS880), all with the same IC ID: 1756A-50158.

SUMMARY:

This report contains Full testing on the Bluetooth Module (testing was performed on a stand-alone module in a testjig) as per FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS210.

This report also contains tests that were performed on the R8-Model 2, SPS880 with the new Bluetooth Module, new CPU (MPC5200 CPU), and a second Maxwell V ASIC (GPS processing chip).

The following tests were performed on the R8-Model 2, SPS880:

- 30MHz – 25GHz RADIATED TRANSMITTER EMISSIONS as per FCC15.247 and RSS210 (Co-Location with Bluetooth and GPRS transmitting simultaneously)
- 30MHz – 25GHz RADIATED RECEIVER EMISSIONS as per RSS210 (with R8-Model 2, SPS880 in receive mode)
- 150KHz-30MHz AC POWERLINE CONDUCTED EMISSIONS as per FCC15.247 and RSS210 (Co-Location with Bluetooth and GPRS transmitting simultaneously)

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Industry Canada rules RSS210.



5 Measurements For Bluetooth Module

5.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (RADIATED)

5.1.1 LIMIT SUB CLAUSE § 15.247 (b) (1) (2) (3) (4)

Frequency range	RF power output
2400-2483.5 MHz	36dBm EIRP

*limit is based upon antenna gain of less than or equal to 6dBi.


5.1.2 RESULTS:

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2402 MHz	2441 MHz	2480 MHz
$T_{nom}(23)^{\circ}C$	$V_{nom} VDC$	-1.83	-2.23	-2.35
Measurement uncertainty		±0.5dBm		



EIRP (2402 MHz)


Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2397 MHz	2407 MHz	Max Peak	Coupled	3 MHz

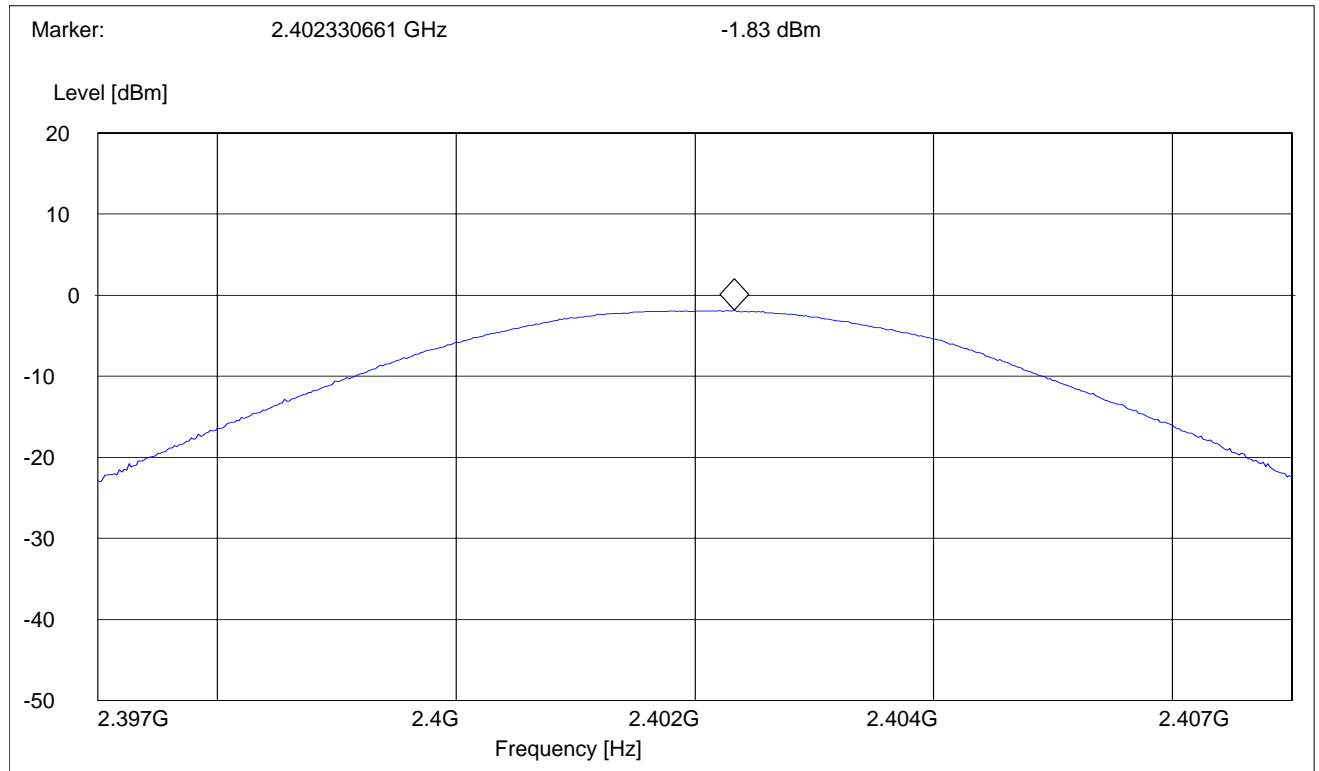



EIRP (2441 MHz)


Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2436 MHz	2446 MHz	Max Peak	Coupled	3 MHz

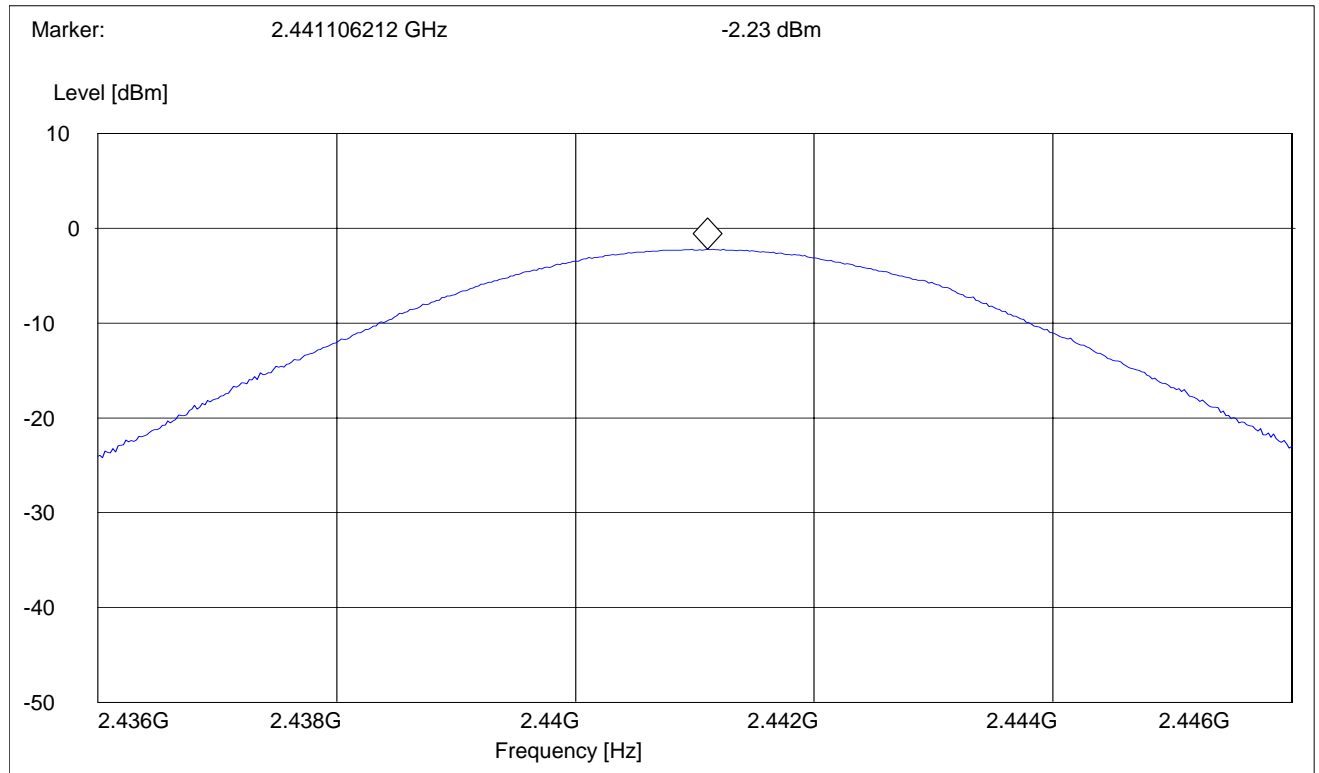



EIRP (2480 MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	IF BW
2475 MHz	2478 MHz	Max Peak	Coupled	3 MHz

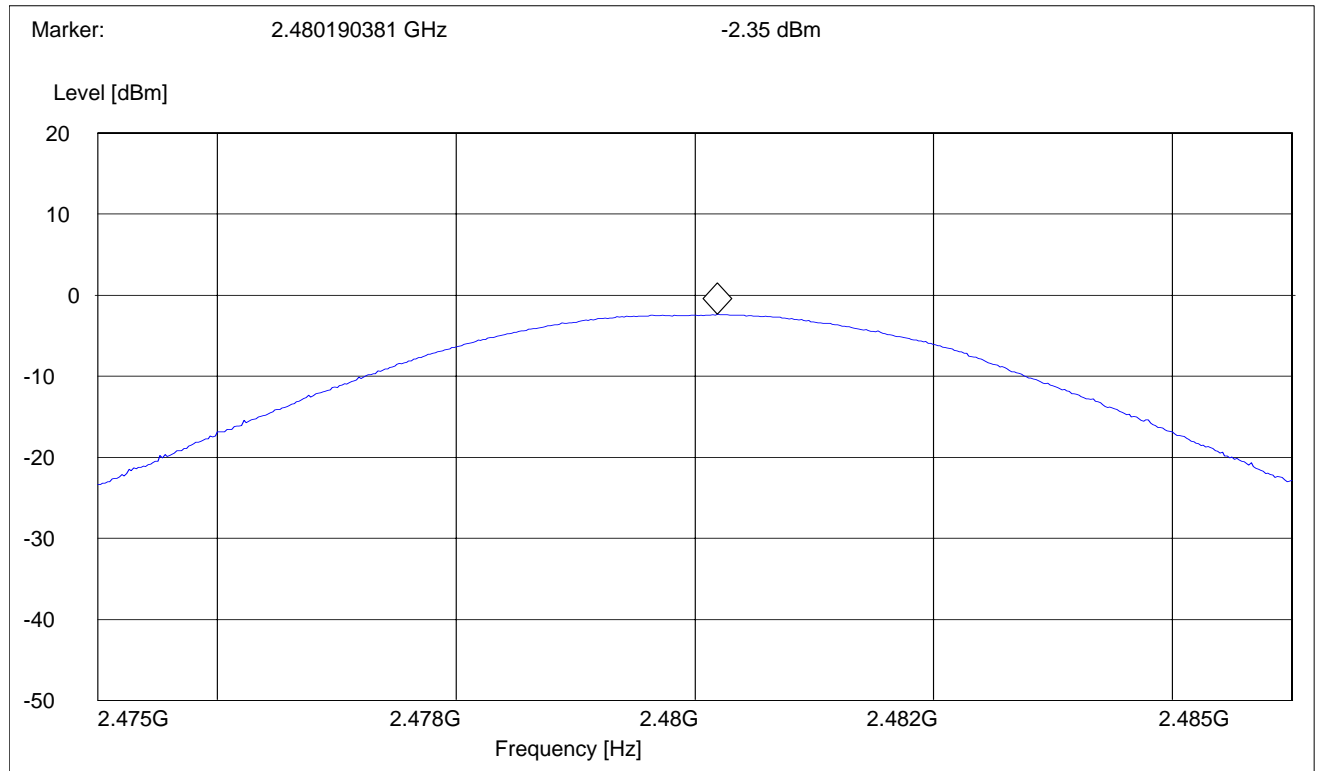



5.2 MAXIMUM PEAK OUTPUT POWER § 15.247 (CONDUCTED)

5.2.1 LIMIT SUB CLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	30dBm

*limit is based upon antenna gain of less than or equal to 6dBi.

5.2.2 RESULTS:


TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
		2402 MHz	2441 MHz	2480 MHz
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} VDC	2.43	2.30	2.81



(2402 MHz)



Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl 2.43 dBm VBW 3 MHz
 5 dBm 2.40184970 GHz SWT 5 ms Unit dBm

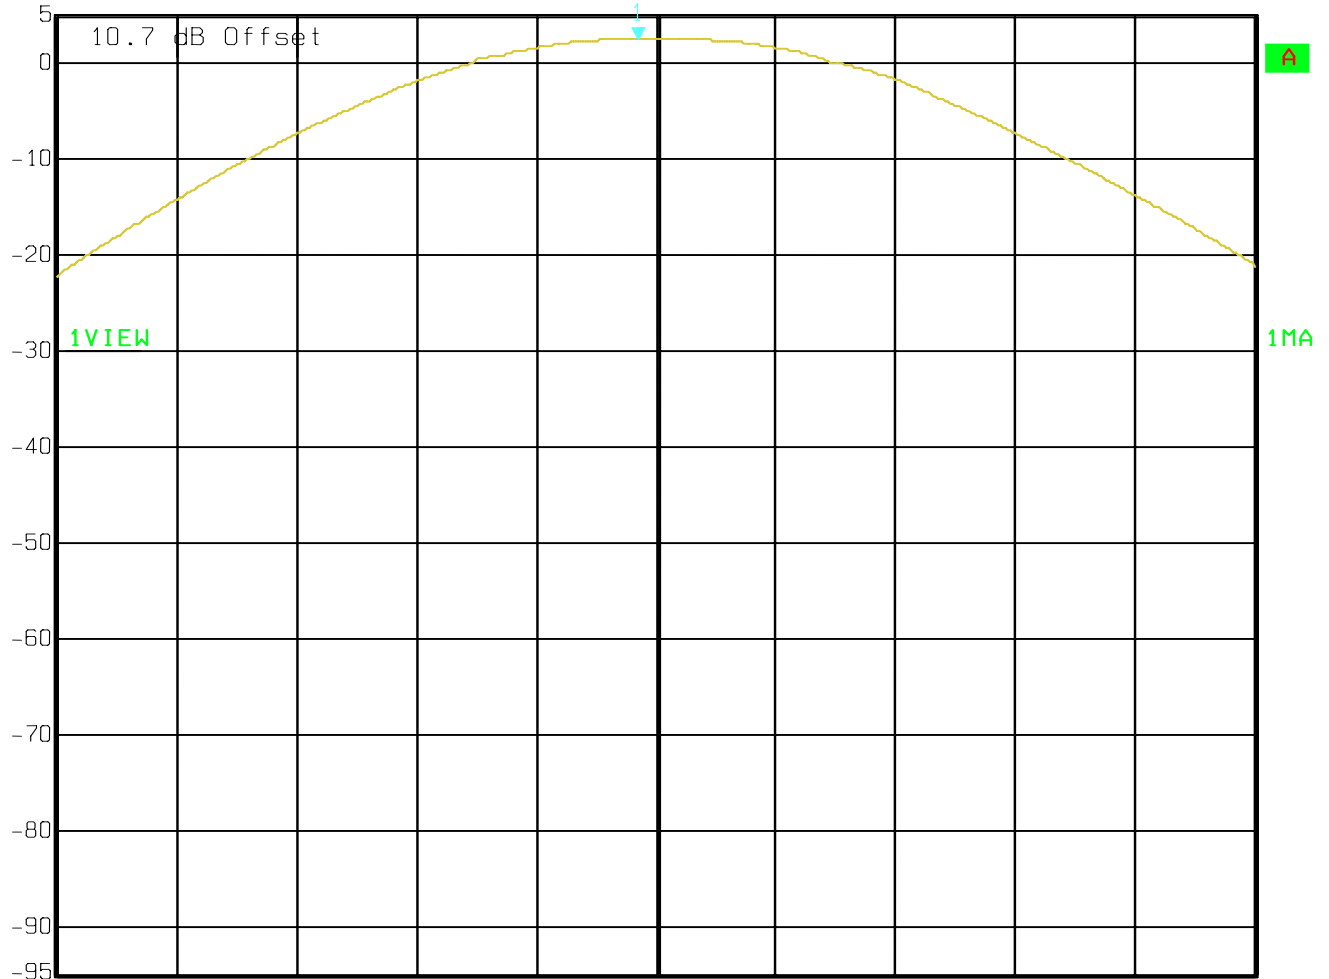

Center 2.402 GHz 1 MHz Span 10 MHz


Date: 02.DEC.2005 15:35:11



(2441 MHz)



Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl 2.30 dBm VBW 3 MHz
 5 dBm 2.44125050 GHz SWT 5 ms Unit dBm

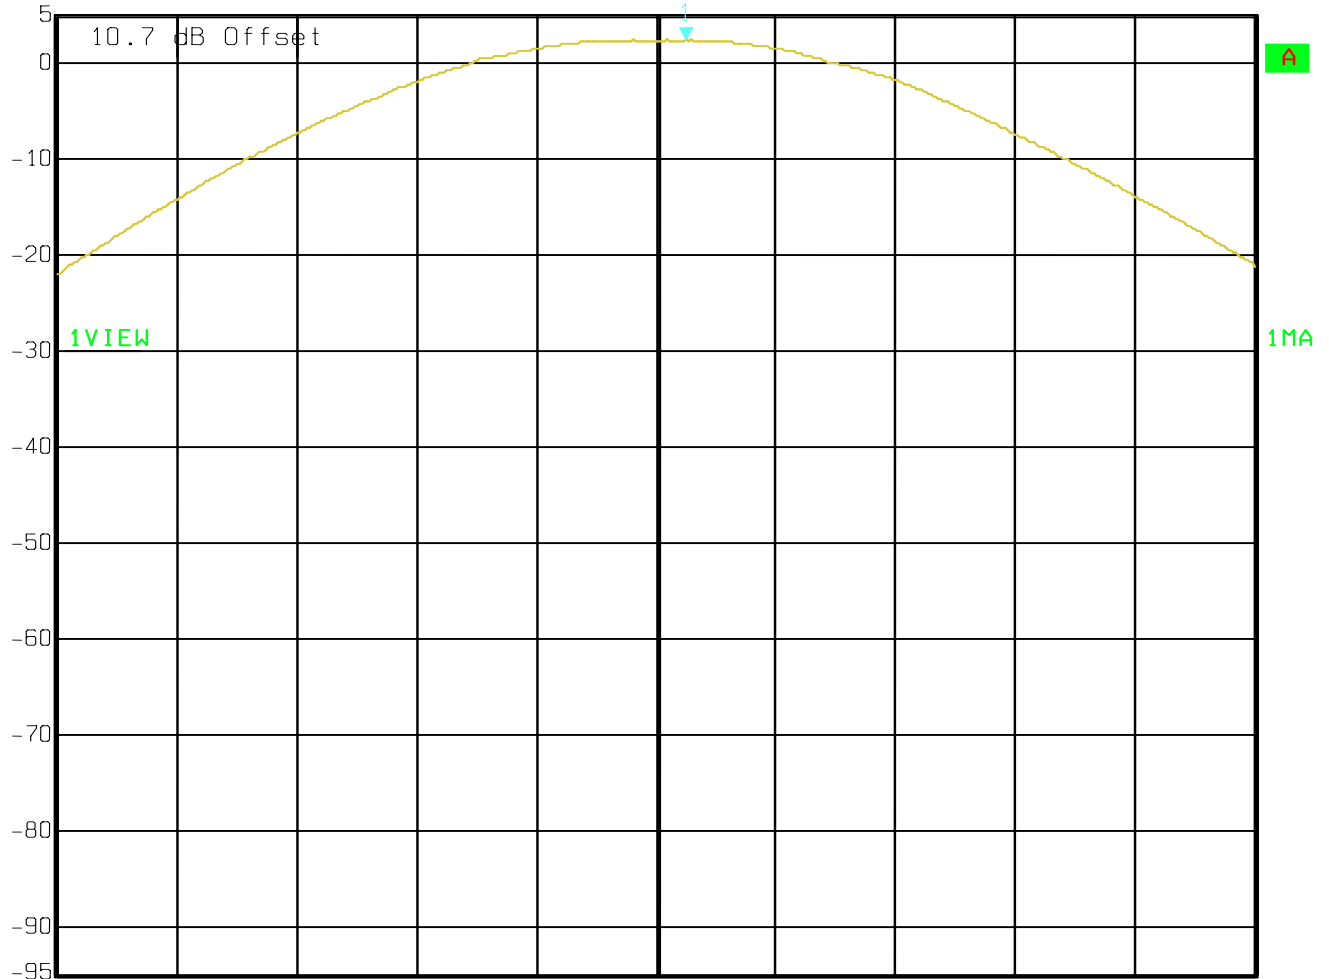

Center 2.441 GHz 1 MHz Span 10 MHz


Date: 02.DEC.2005 15:39:53



(2480 MHz)



Ref Lvl 5 dBm
 Marker 1 [T1] 2.81 dBm
 2.47992986 GHz
 RBW 3 MHz RF Att 20 dB
 VBW 3 MHz
 SWT 5 ms Unit dBm

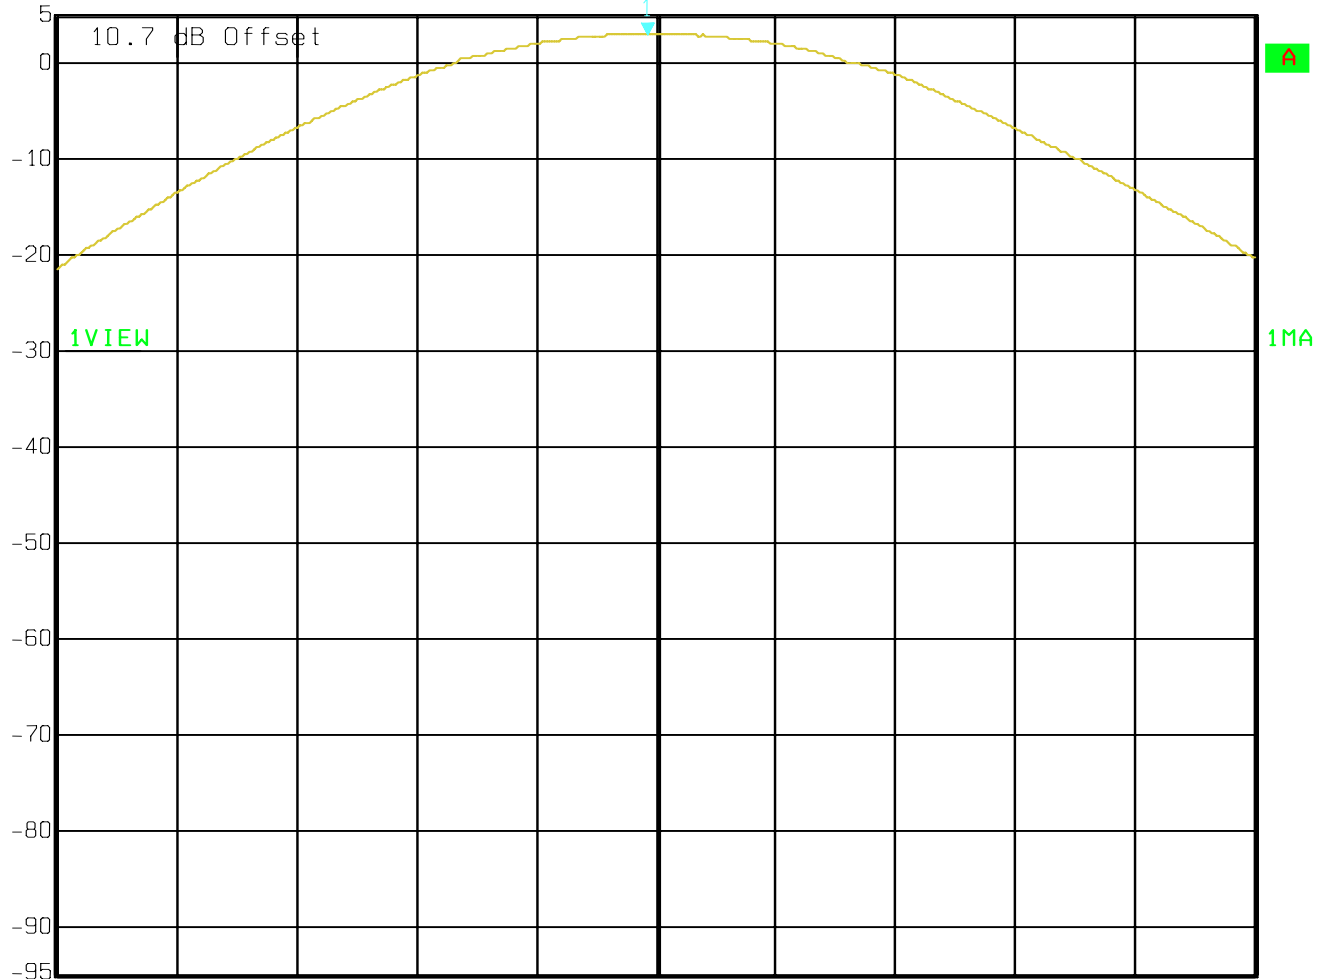

Center 2.48 GHz 1 MHz Span 10 MHz

Date: 02.DEC.2005 15:40:22



5.3 20dB BANDWIDTH

5.3.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

NUMBER OF CHANNELS	BANDWIDTH
79	<1MHz

5.3.2 RESULTS:


TEST CONDITIONS		BANDWIDTH (KHz)		
		2402 MHz	2441 MHz	2480 MHz
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} VDC	865.73	865.73	865.73



(2402 MHz)



Delta 2 [T1] RBW 10 kHz RF Att 20 dB
 Ref Lvl -0.36 dB VBW 30 kHz
 5 dBm 865.73146292 kHz SWT 50 ms Unit dBm

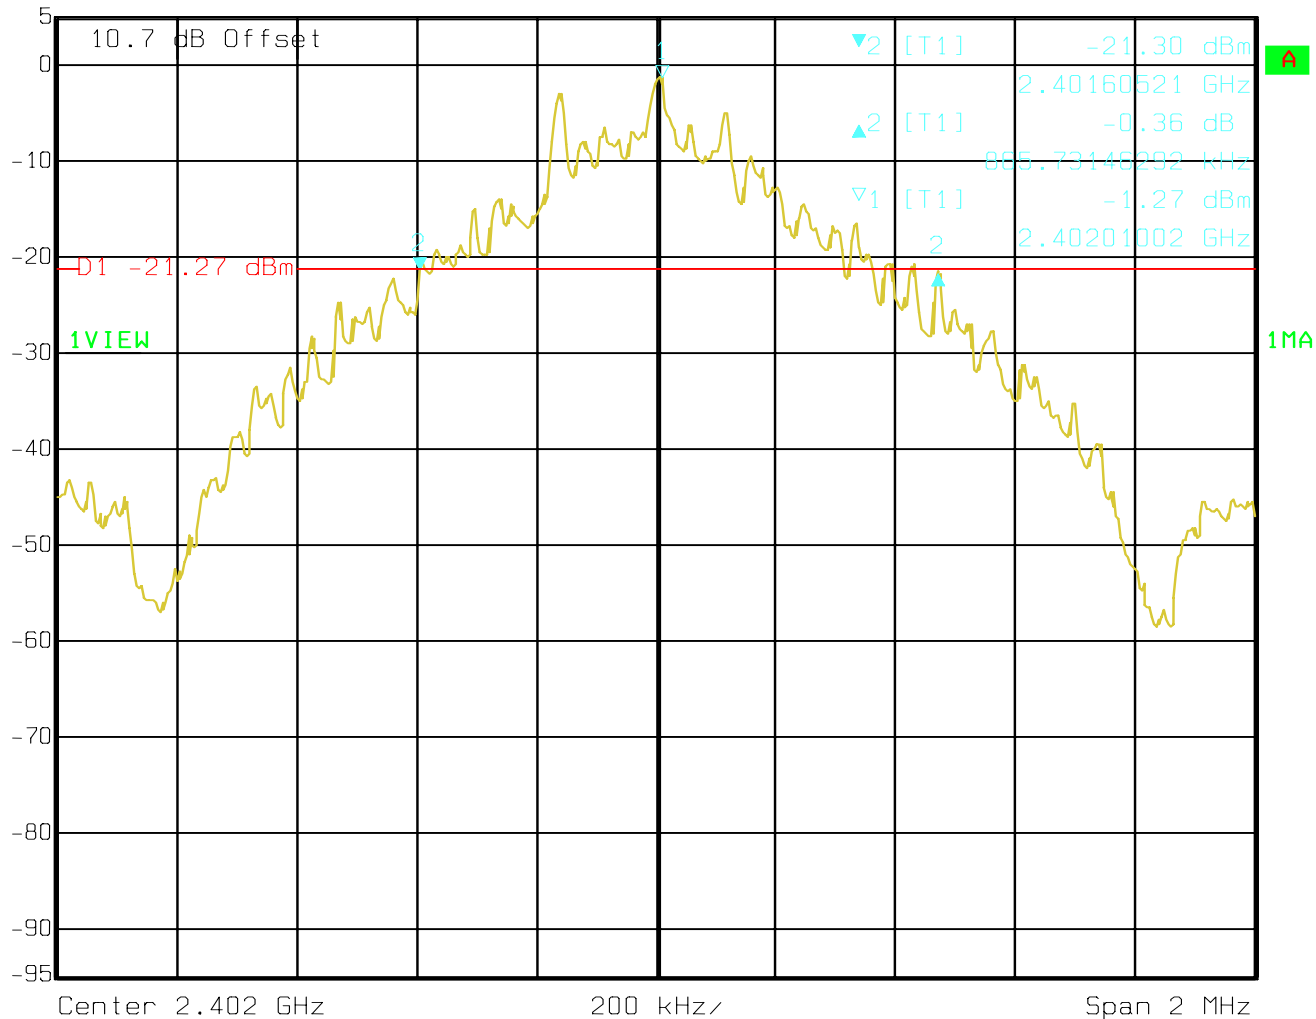


Date: 02.DEC.2005 15:44:12



(2441 MHz)



Delta 2 [T1] RBW 10 kHz RF Att 20 dB
Ref Lvl -0.71 dB VBW 30 kHz
5 dBm 865.73146292 kHz SWT 50 ms Unit dBm

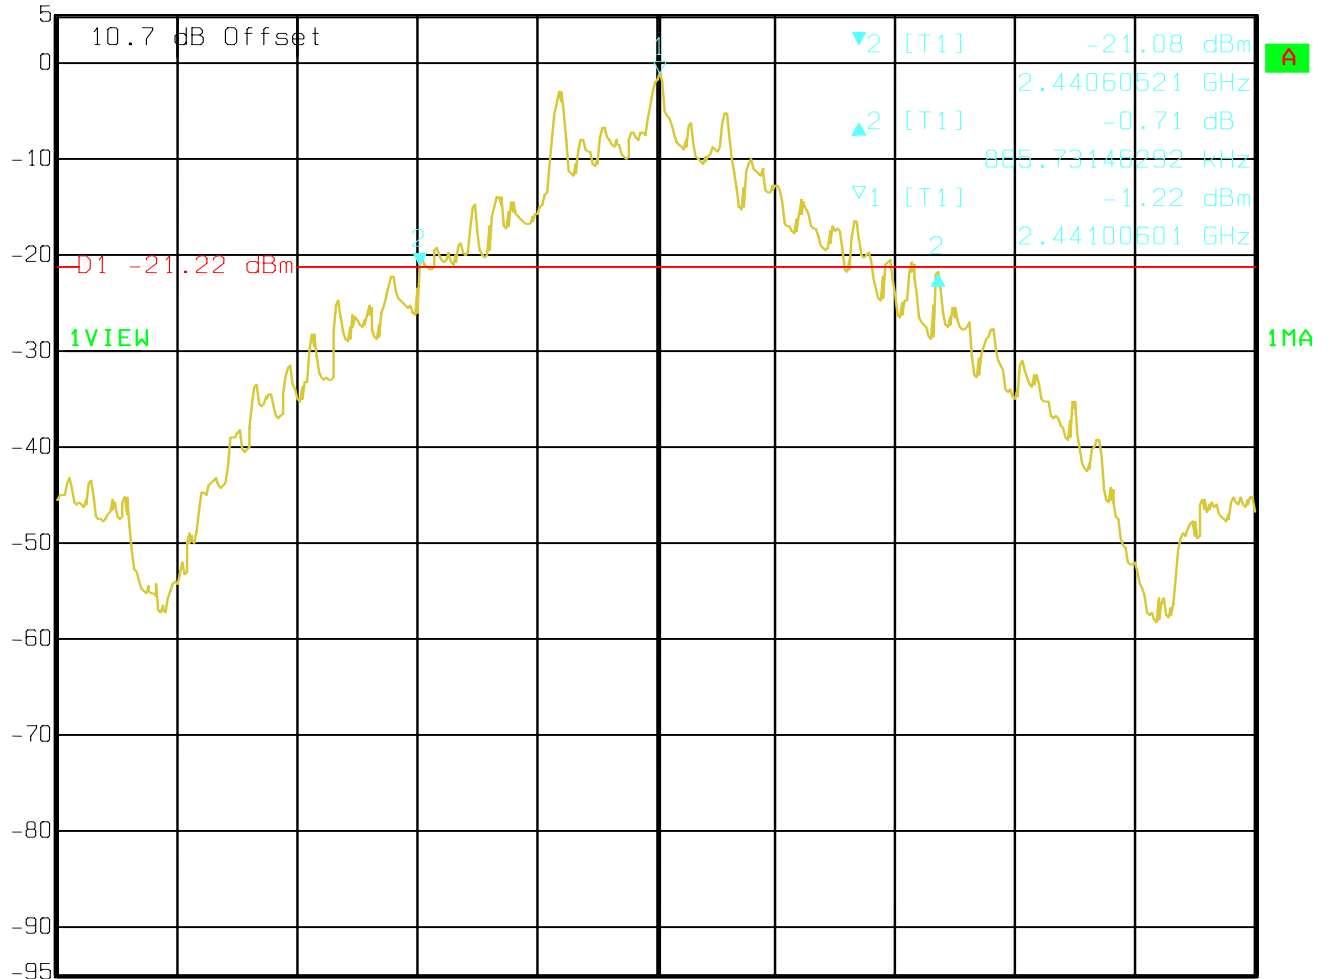

Center 2.441 GHz 200 kHz/ Span 2 MHz


Date: 02.DEC.2005 15:46:01



(2480 MHz)



Delta 2 [T1] RBW 10 kHz RF Att 20 dB
 Ref Lvl -0.16 dB VBW 30 kHz
 5 dBm 865.73146293 kHz SWT 50 ms Unit dBm

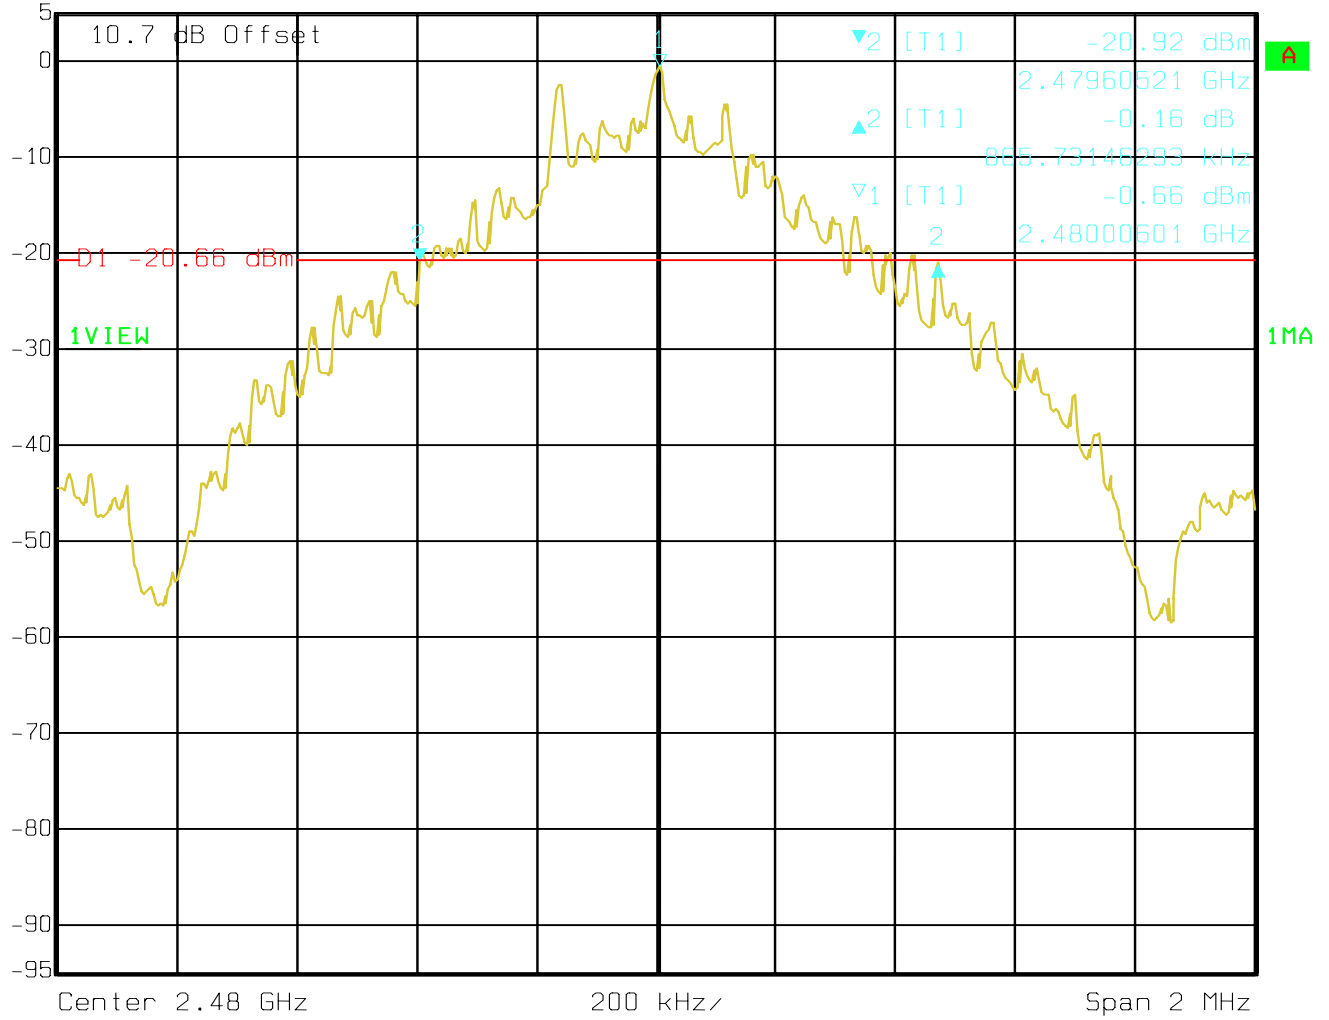

Date: 02.DEC.2005 15:47:12



5.4 CARRIER FREQUENCY SEPARATION

5.4.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

SEPARATION
> 25 KHz or > 20 dB BANDWIDTH

5.4.2 RESULTS:


TEST CONDITIONS		SEPARATION (MHz)
$T_{nom}(23)^{\circ}C$	V_{nom} VDC	1.006



(plot)



Delta 1 [T1] RBW 20 kHz RF Att 20 dB
Ref Lvl -0.04 dB VBW 50 kHz
5 dBm 1.00601202 MHz SWT 12.5 ms Unit dBm

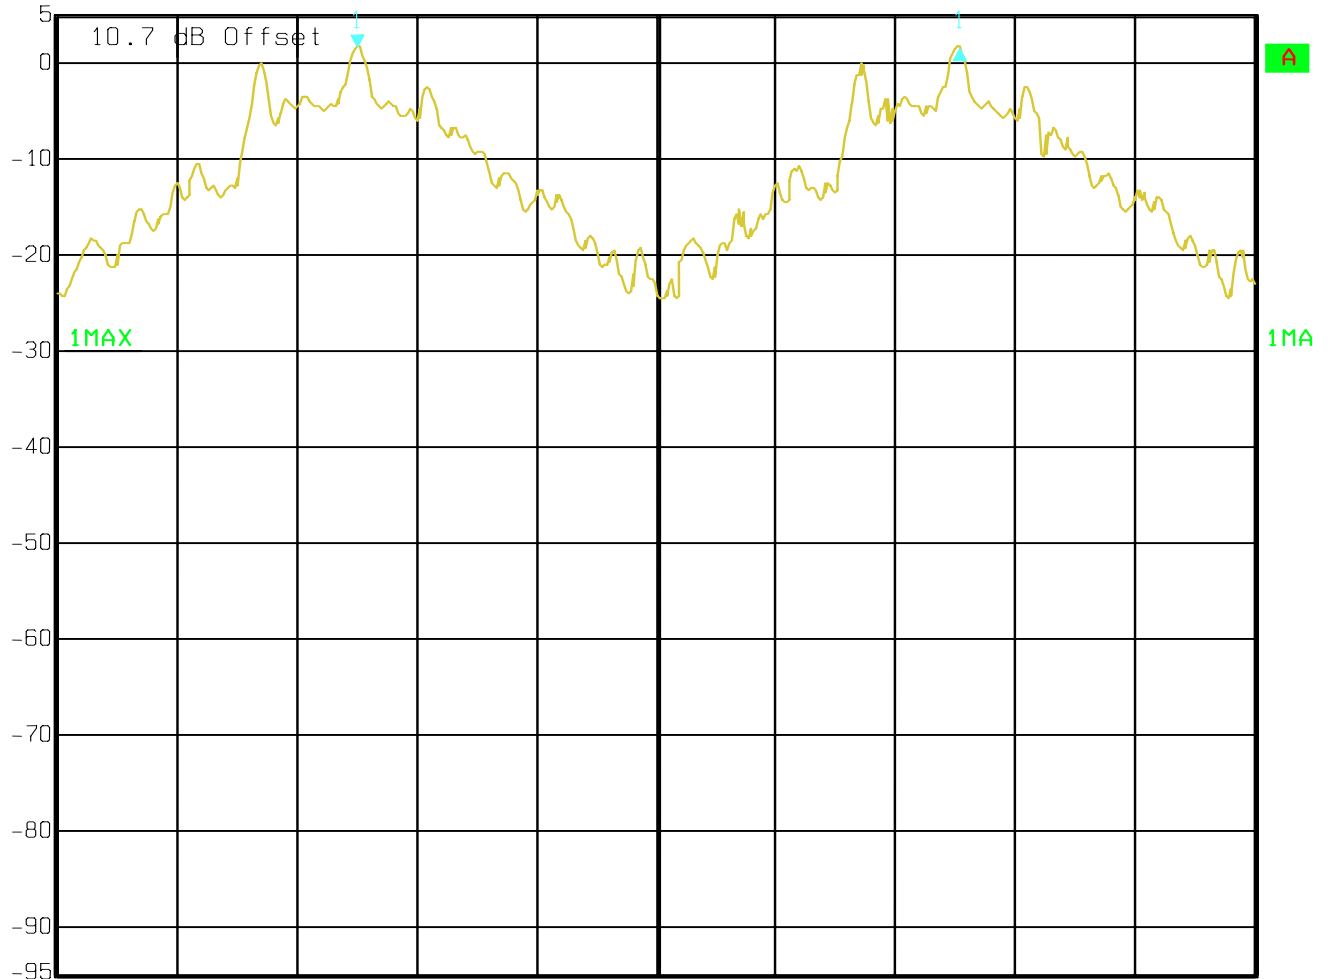

Center 2.4395 GHz 200 kHz/div Span 2 MHz

Date: 02.DEC.2005 15:49:19



5.5 NUMBER OF HOPPING CHANNELS

5.5.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (iii)

NUMBER OF CHANNELS
> 15


5.5.2 RESULTS:

TEST CONDITIONS		NUMBER OF CHANNELS
T_{nom}(23)°C	V_{nom} VDC	79



(PLOT 1)
 (F1-F2=2402MHz to 2425MHz)

 Ref Lvl 5 dBm
 RBW 300 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 5 ms Unit dBm

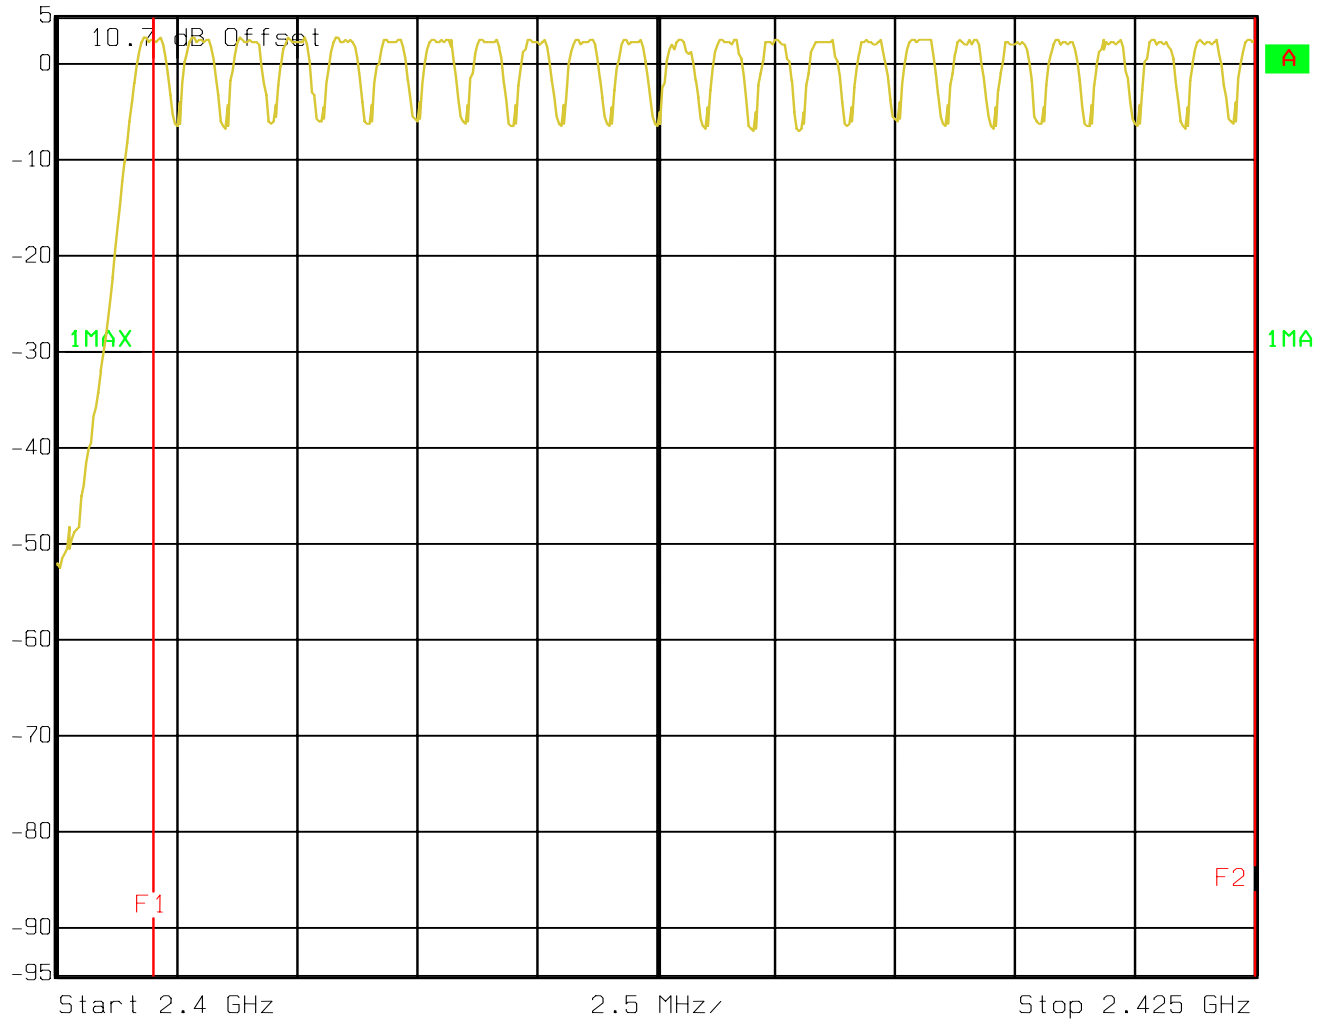

Date: 02.DEC.2005 16:30:09




(PLOT 2)
 (F1-F2=2425MHz to 2450MHz)



Ref Lvl
 5 dBm

RBW 300 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 5 ms Unit dBm

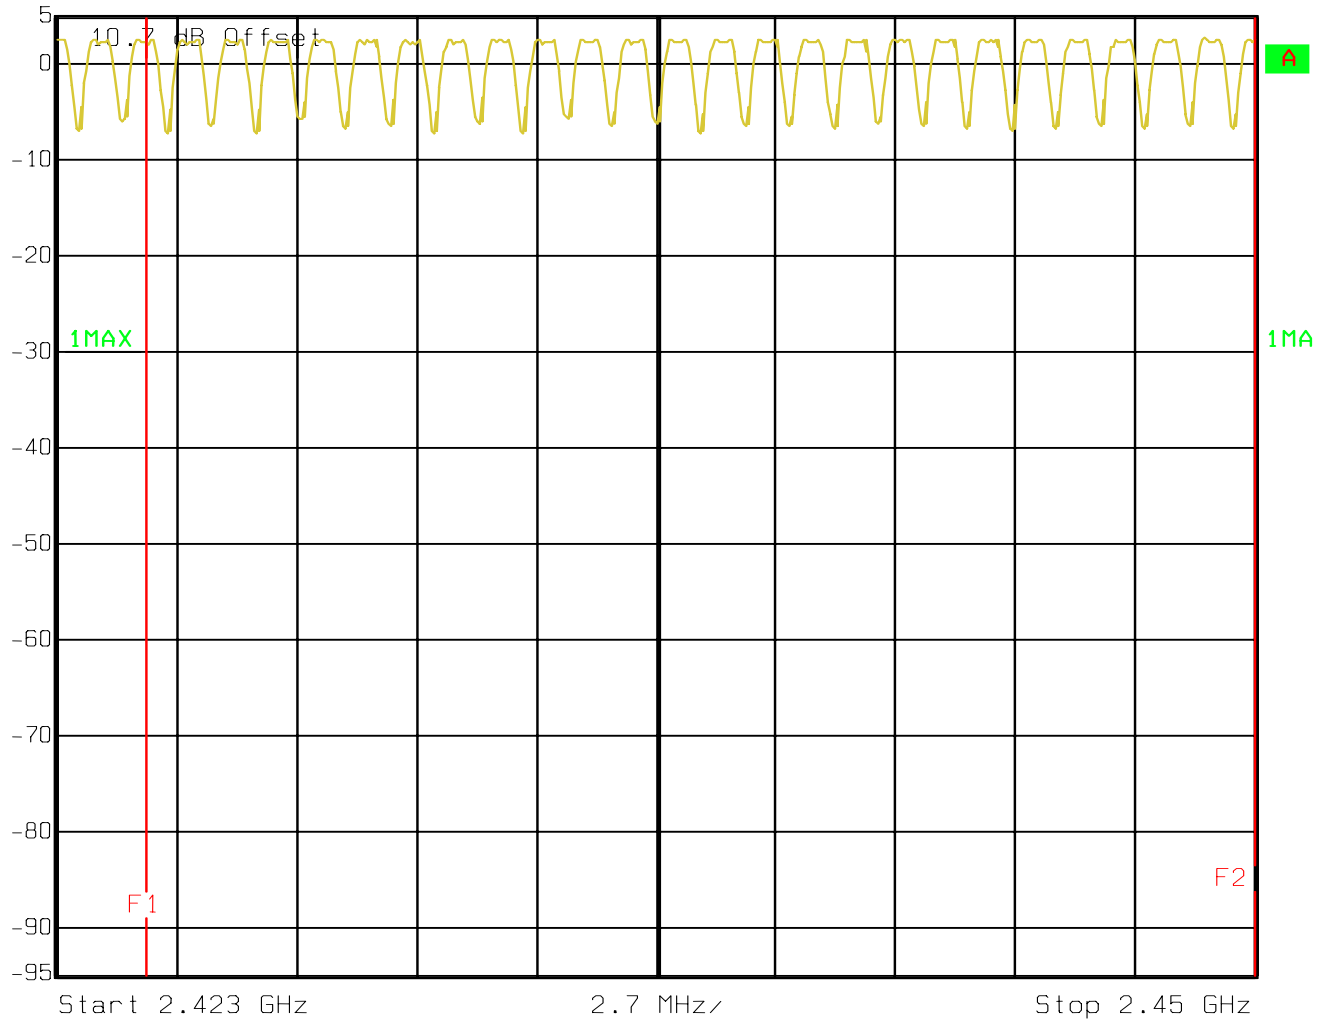

Date: 02.DEC.2005 16:25:20




(PLOT 3)
 (F1-F2=2450MHz to 2470MHz)



Ref Lvl
 5 dBm

RBW 300 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 5 ms Unit dBm

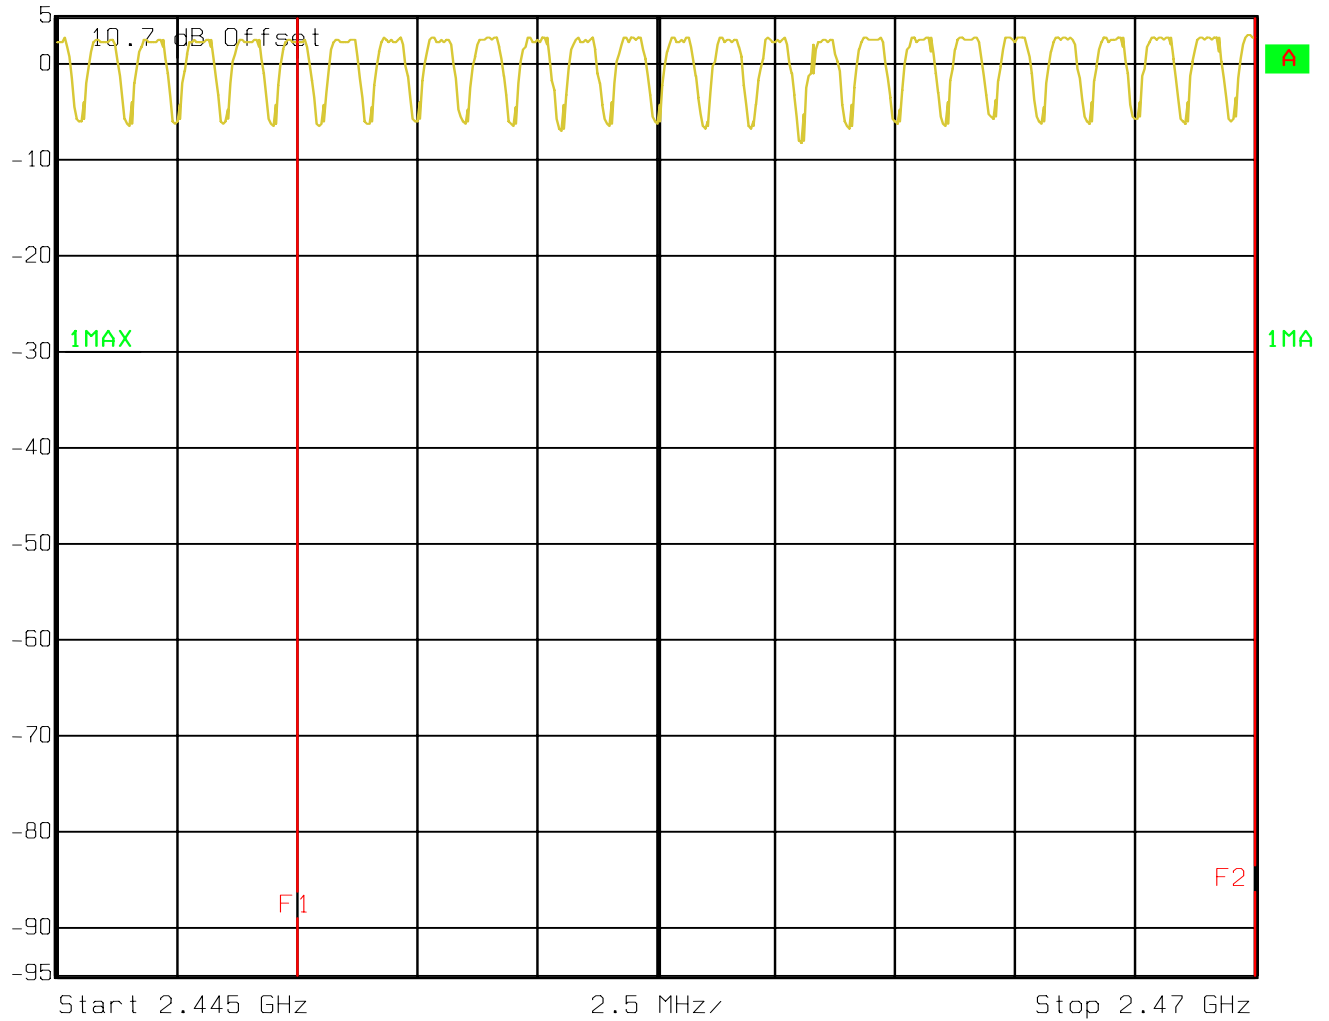


Date: 02.DEC.2005 16:26:21



(PLOT 4)
 (F1-F2=2470MHz to 2480MHz)

 Ref Lvl 5 dBm
 RBW 300 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 5 ms Unit dBm

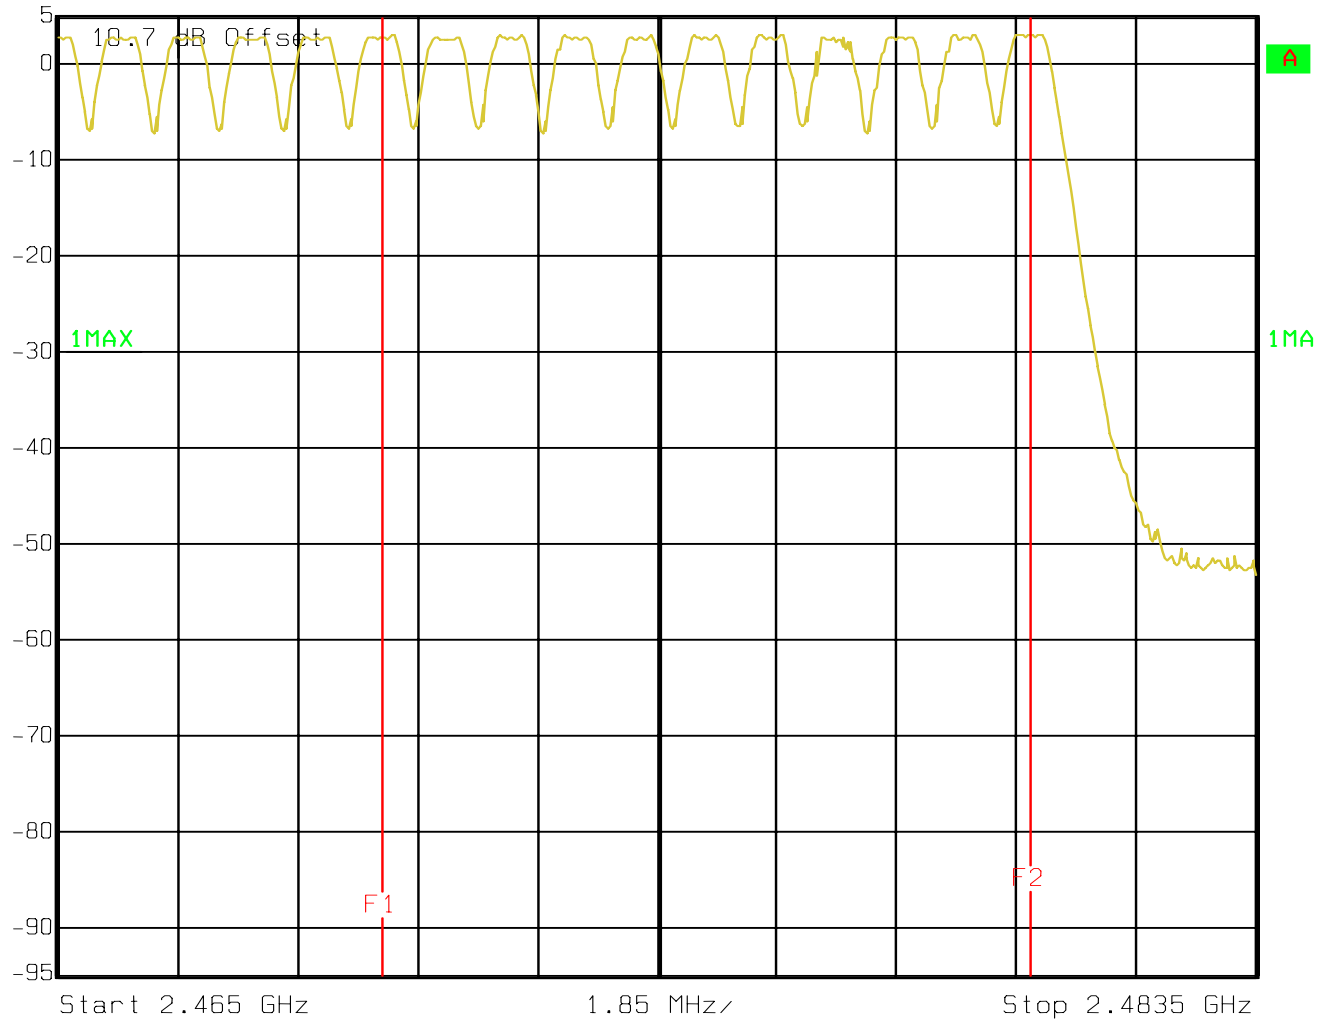

Date: 02.DEC.2005 16:28:47



5.6 TIME OF OCCUPANCY (DWELL TIME)

5.6.1 LIMIT SUB CLAUSE § 15.247 (a) (1) (i) (ii) (iii)

FREQUENCY RANGE	AVERAGE TIME OF OCCUPANCY PER 31.6 SECONDS (LIMIT)
2400-2483.5	0.4 SECONDS

5.6.2 RESULTS:

TEST CONDITIONS		TIME OF OCCUPANCY IN 31.6 SECONDS		
		DH1	DH3	DH5
PACKET TYPE				
$T_{nom}(23)^{\circ}C$	$V_{nom} VDC$	0.1338 Sec	0.271 Sec	0.311 Sec




(DH1)

The system makes worst case 1600 hops per second or 1 time slot has a length of 625μs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So you have each channel 10.13 times per second and so for 31.6 seconds you have 320.108 times of appearance.

Each Tx-time per appearance is 417.84μs.

So we have 320.108 * 417.84μs = 133.8ms per 31.6 seconds.

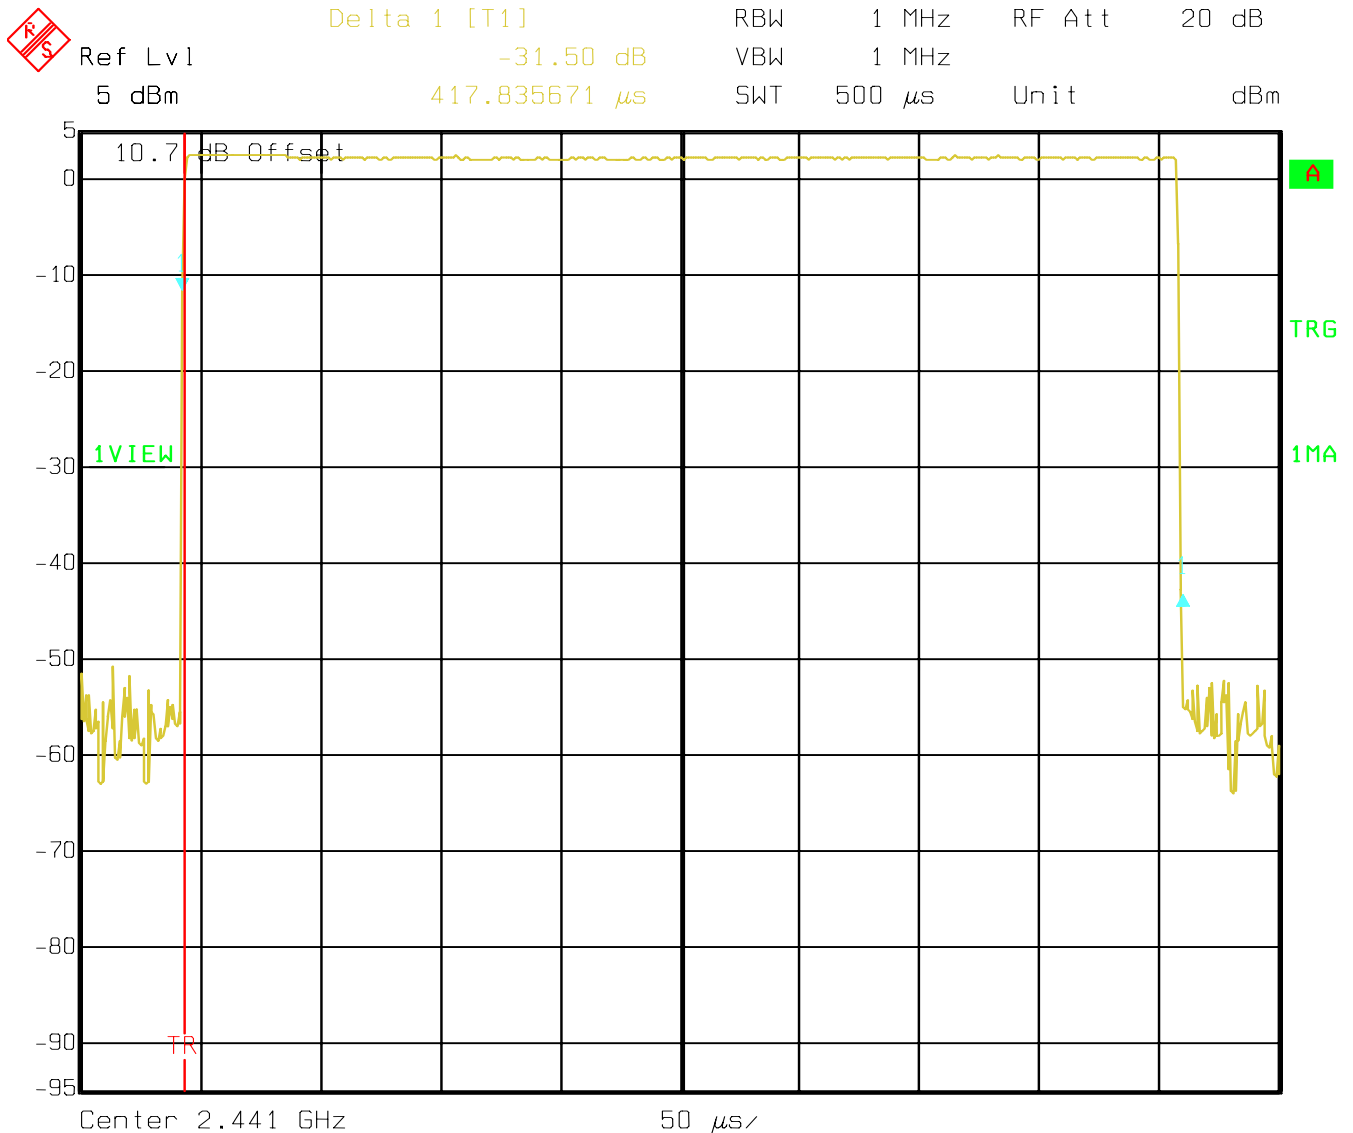




(DH3)

A DH3 Packets need 3 time slots for transmit and 1 for receiving, then the system makes worst case 400 hops per second with 79 channels. So you have each channel 5.1 times per second and so for 31.6 seconds you have 161.16 times of appearance.

Each Tx-time per appearance is 1.679ms.

So we have 161.16 * 1.679ms = 271ms per 31.6 seconds.

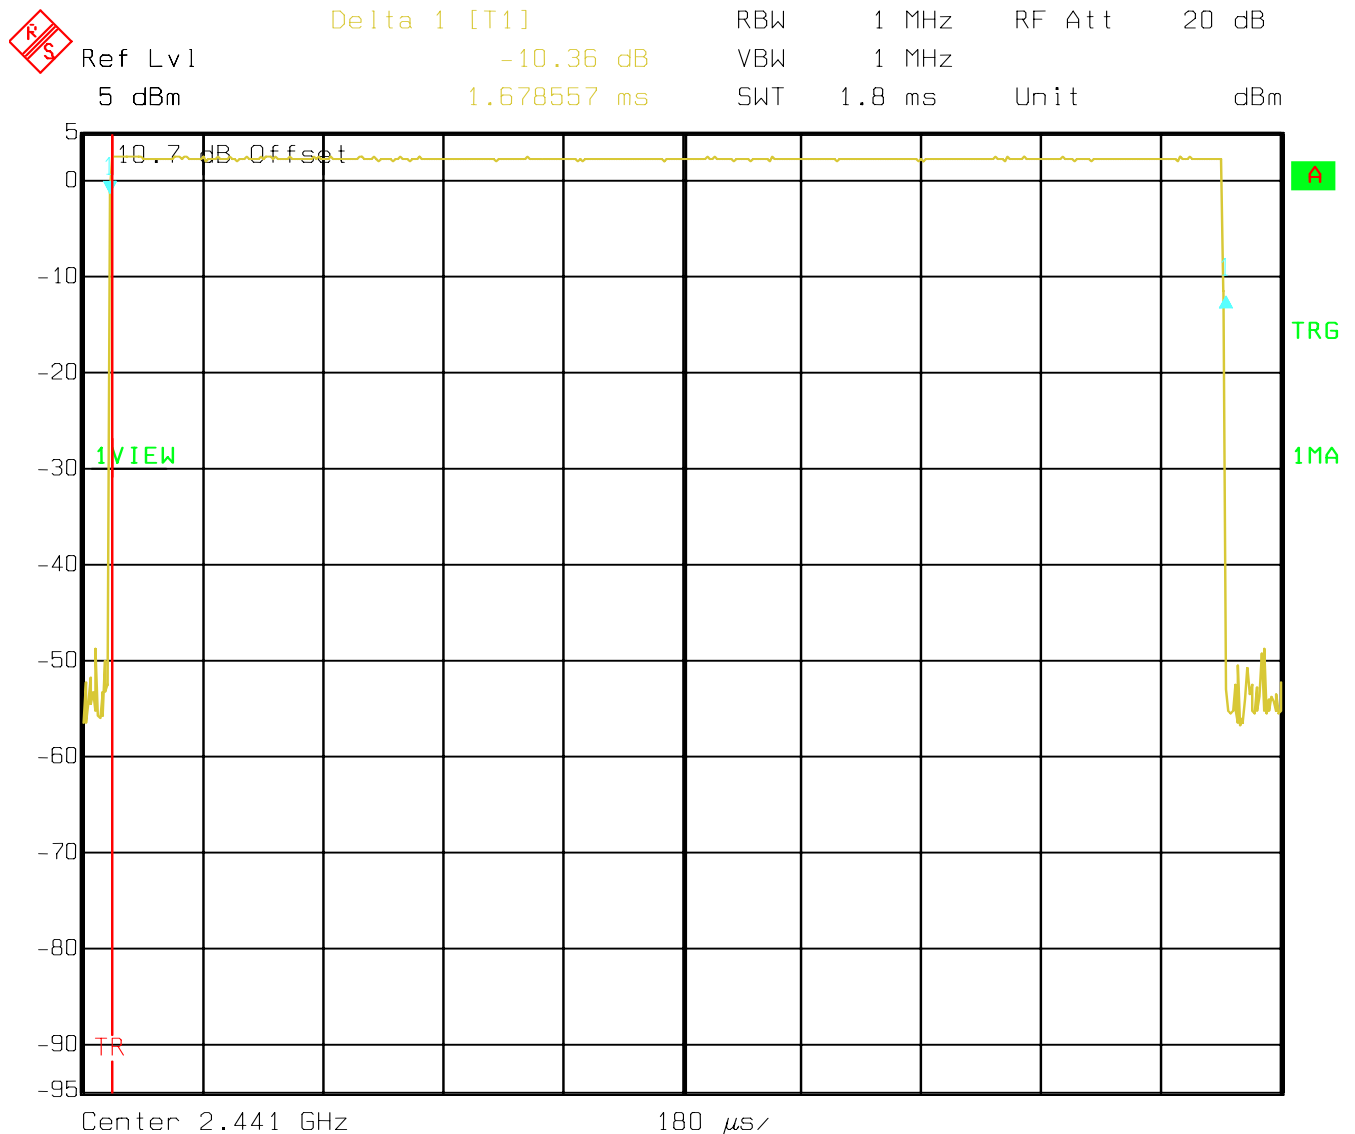

Date: 02.DEC.2005 16:19:09




(DH5)

At DH5 Packets you need 5 time slots for transmit and 1 for receiving, then the system makes worst case 266.7 hops per second with 79 channels. So you have each channel 3.36 times per second and so for 30 seconds you have 106.176 times of appearance.

Each Tx-time per appearance is 2.93ms.

So we have 106.176 * 2.93ms = 311ms per 31.6 seconds.

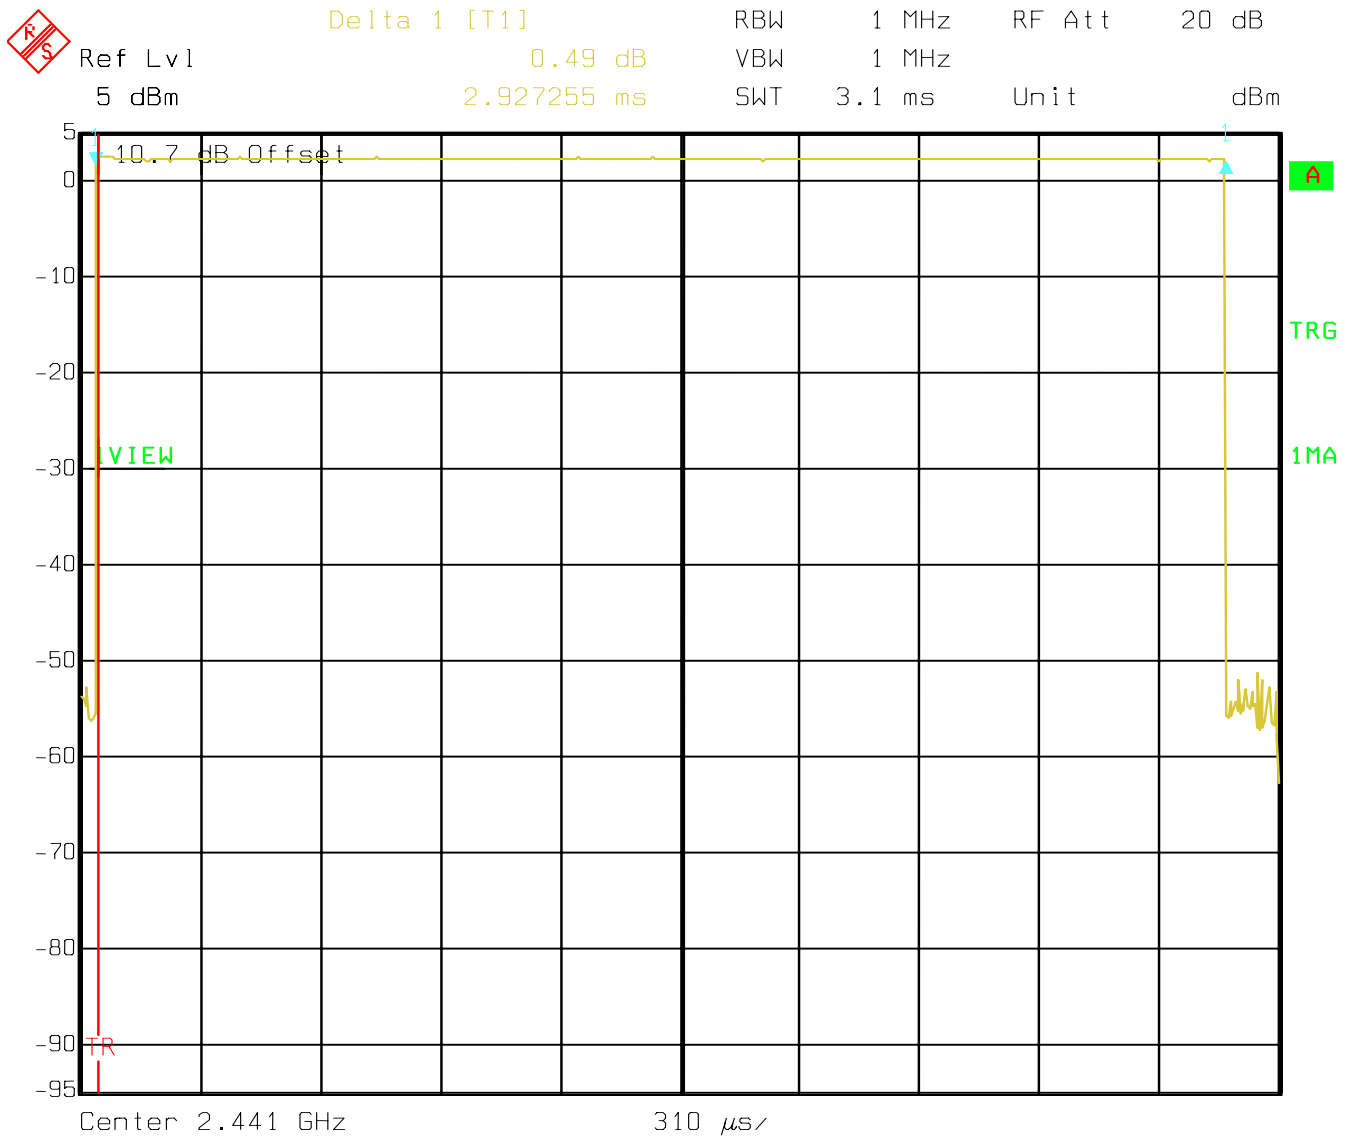

Date: 02.DEC.2005 16:21:11

5.7 CONDUCTED SPURIOUS EMISSIONS


5.7.1 LIMIT SUB CLAUSE § 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).



5.7.2 RESULTS
CONDUCTED BANDEGDE COMPLIANCE 2402 MHz


 Ref Lvl 5 dBm
 Marker 1 [T1] 2.40203013 GHz
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 5 ms Unit dBm

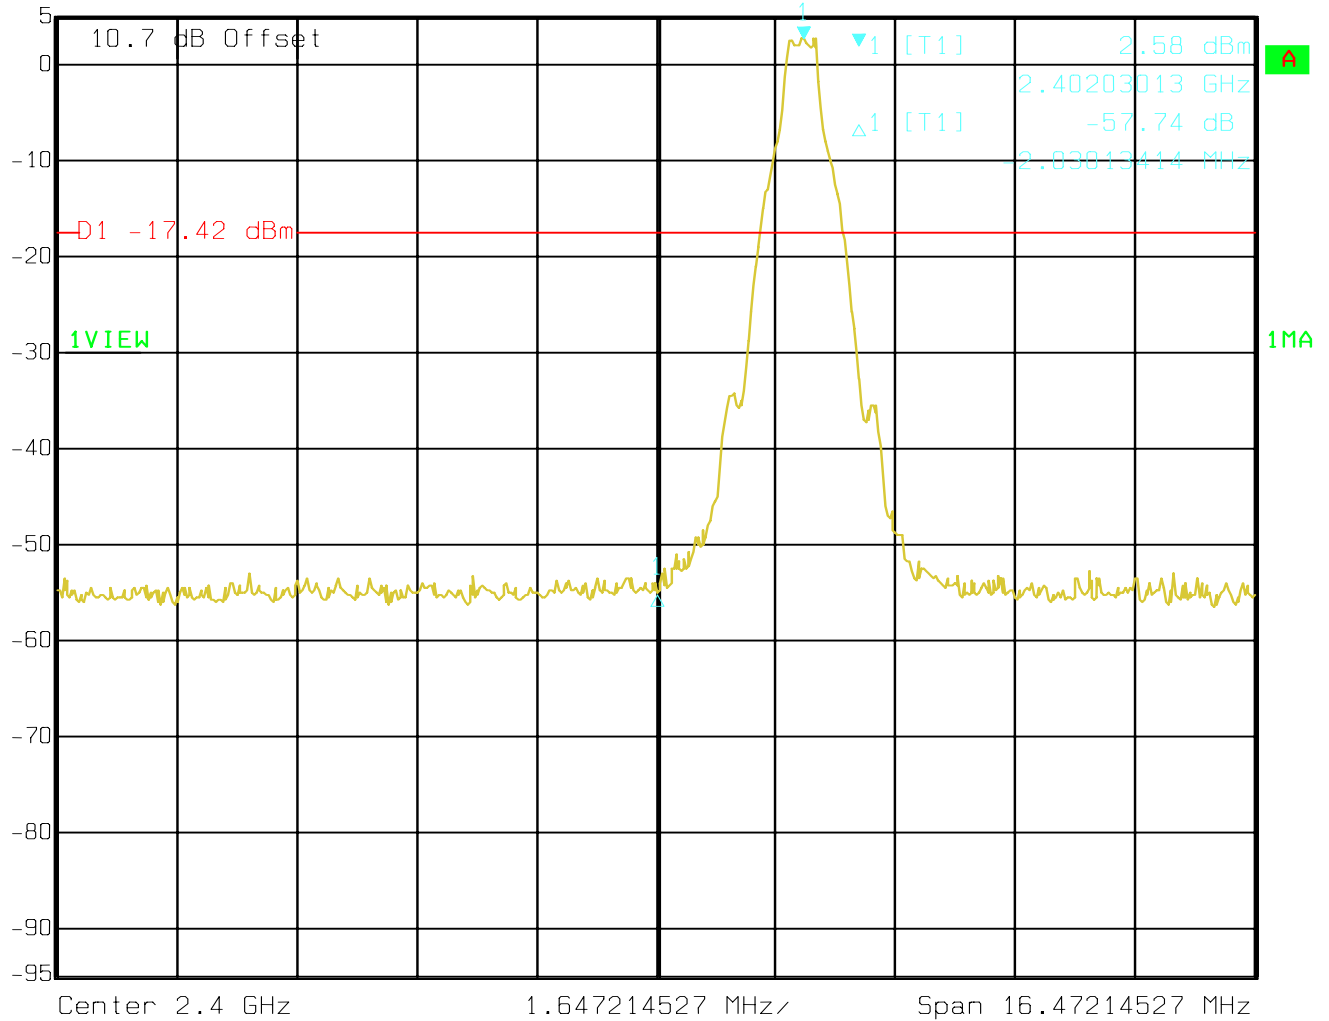


Date: 02.DEC.2005 16:37:37



CONDUCTED SPURIOUS 2402 MHz


⚠ Ref Lvl 5 dBm
 Marker 1 [T1] -47.86 dBm
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 6.4 s Unit dBm

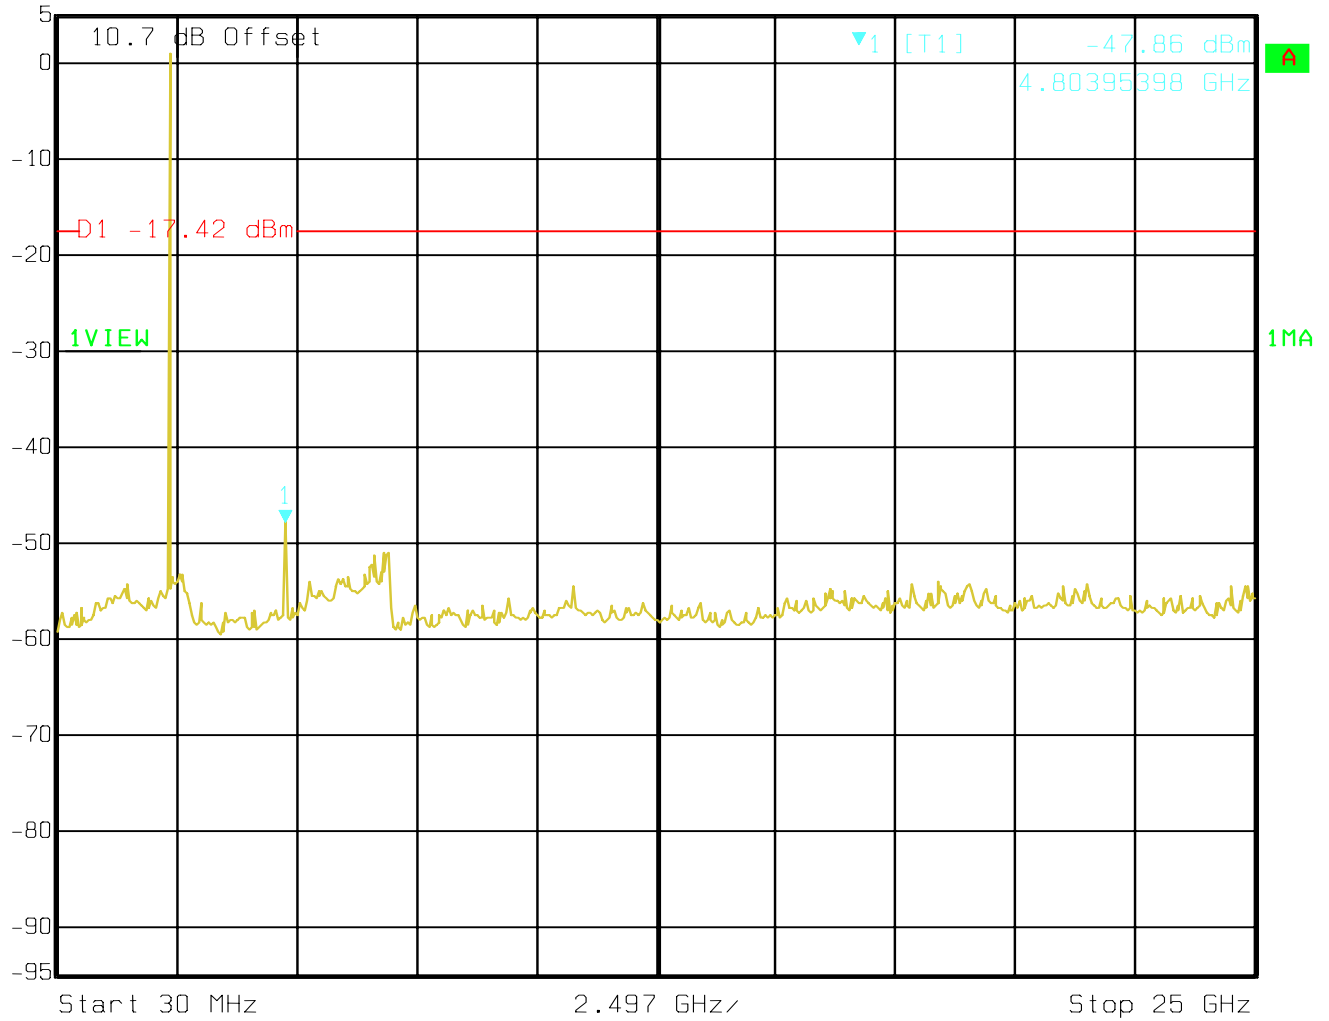

Date: 02.DEC.2005 16:39:00




REFERENCE 2441 MHz

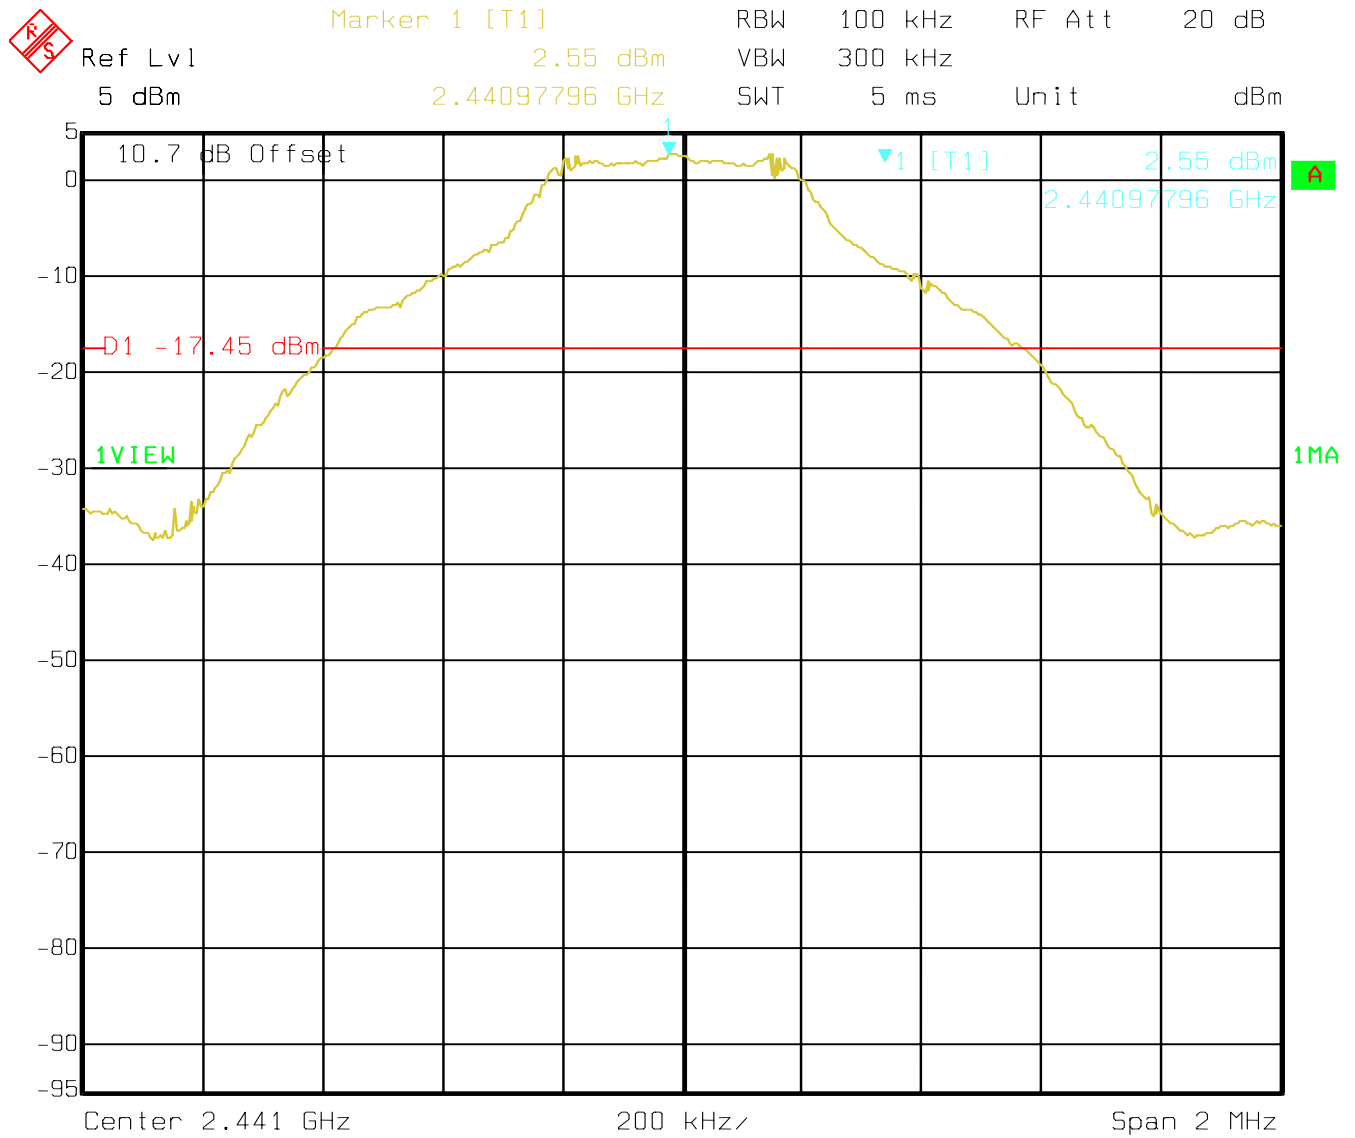

Date: 02.DEC.2005 16:40:35



CONDUCTED SPURIOUS 2441 MHz

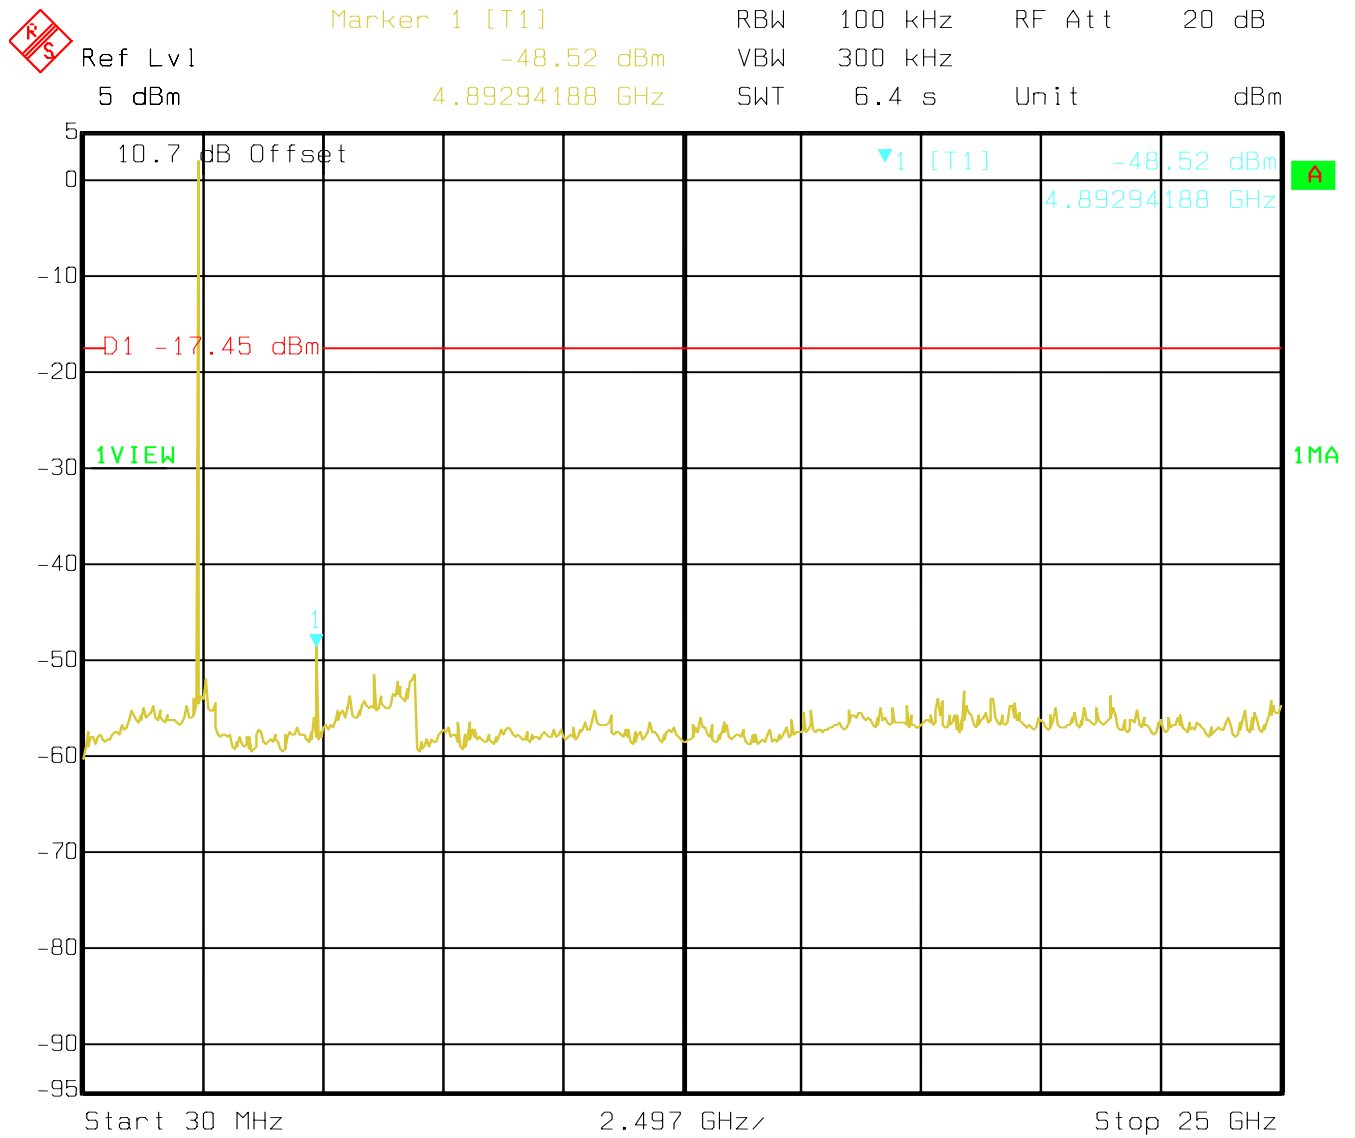


Date: 02.DEC.2005 16:41:31



CONDUCTED BANDEGDE COMPLIANCE 2480 MHz

⚠ Ref Lvl 5 dBm
 Marker 1 [T1] 3.08 dBm
 RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 2.47999086 GHz
 SWT 5 ms Unit dBm

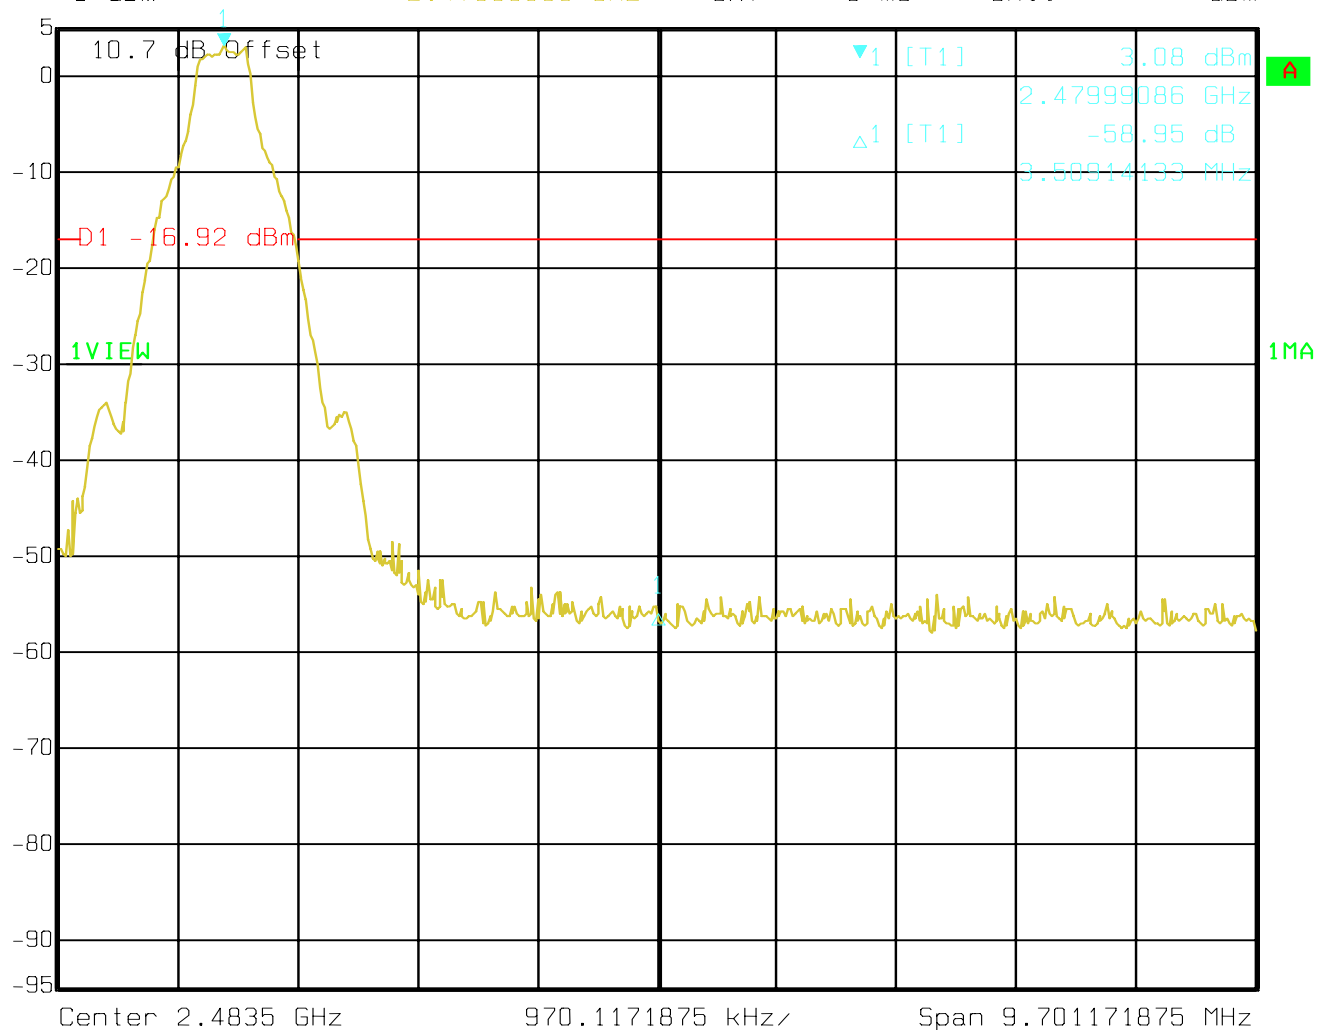


Date: 02.DEC.2005 16:45:31



CONDUCTED SPURIOUS 2480 MHz

 Ref Lvl 5 dBm Marker 1 [T1] -50.77 dBm RBW 100 kHz RF Att 20 dB
Unit dBm 4.93392786 GHz VBW 300 kHz SWT 6.4 s

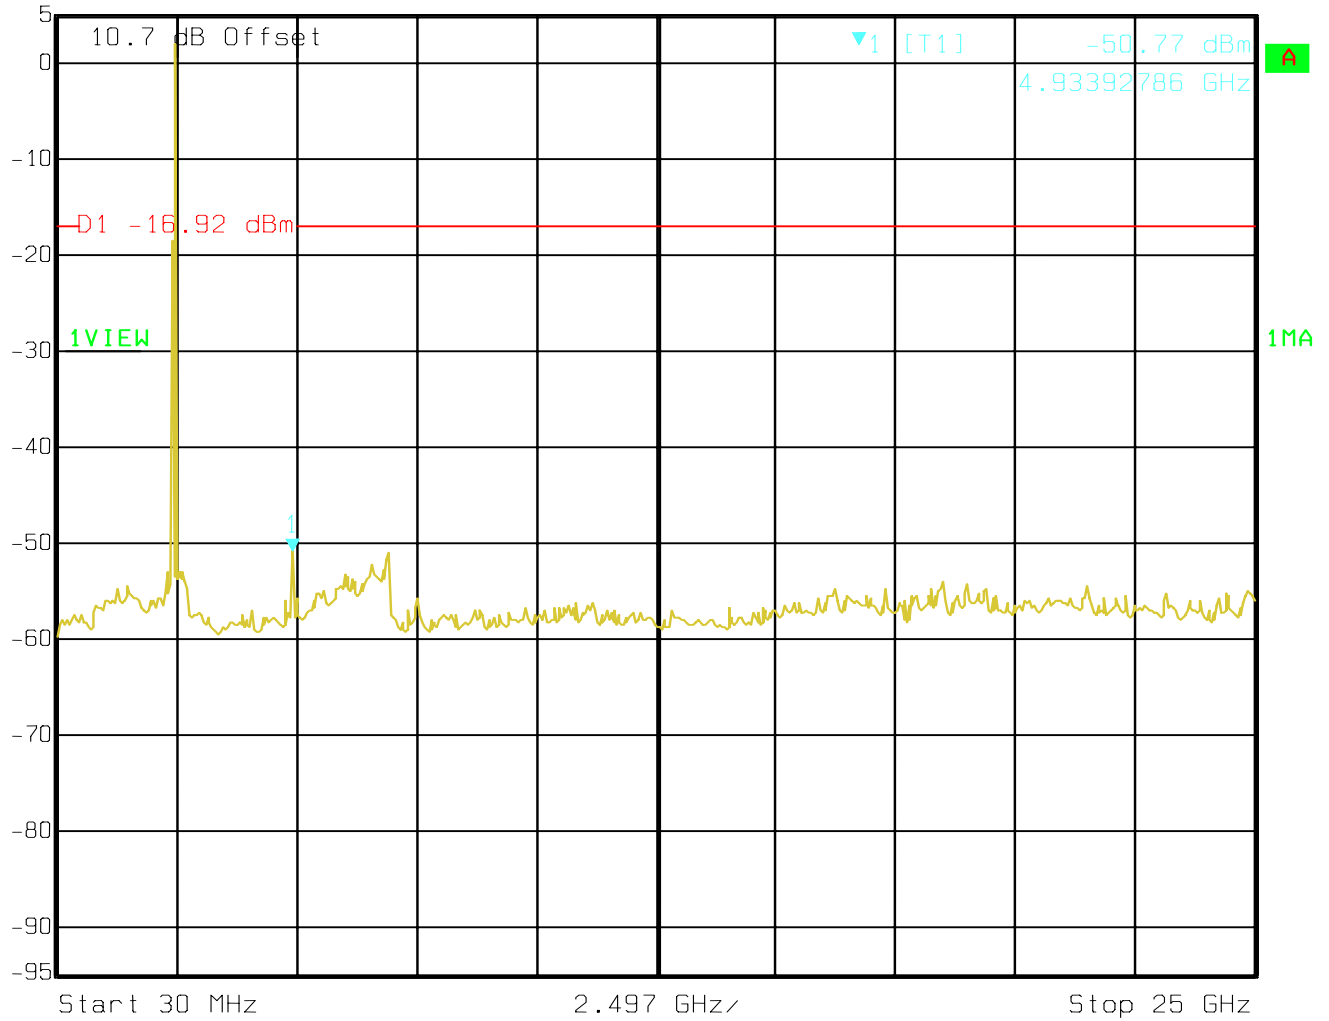

Date: 02.DEC.2005 16:46:19



5.8 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205

5.8.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV**


***AVG. LIMIT= 54dBuV**



5.8.2 RESULTS (2402MHz)

PEAK


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2310 MHz	2442 MHz	Max Peak	Coupled	1 MHz	1 MHz

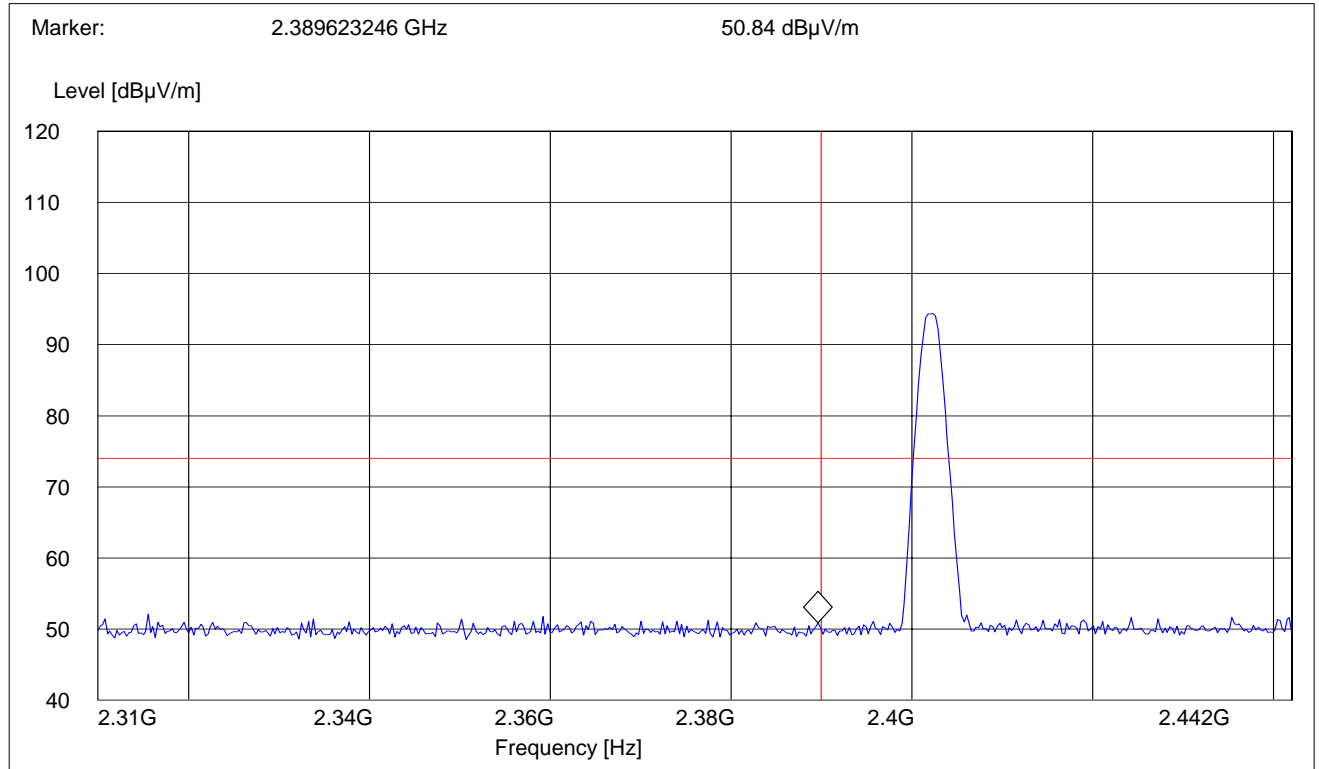



AVG

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2310 MHz	2420 MHz	Max Peak	Coupled	1 MHz	10 Hz

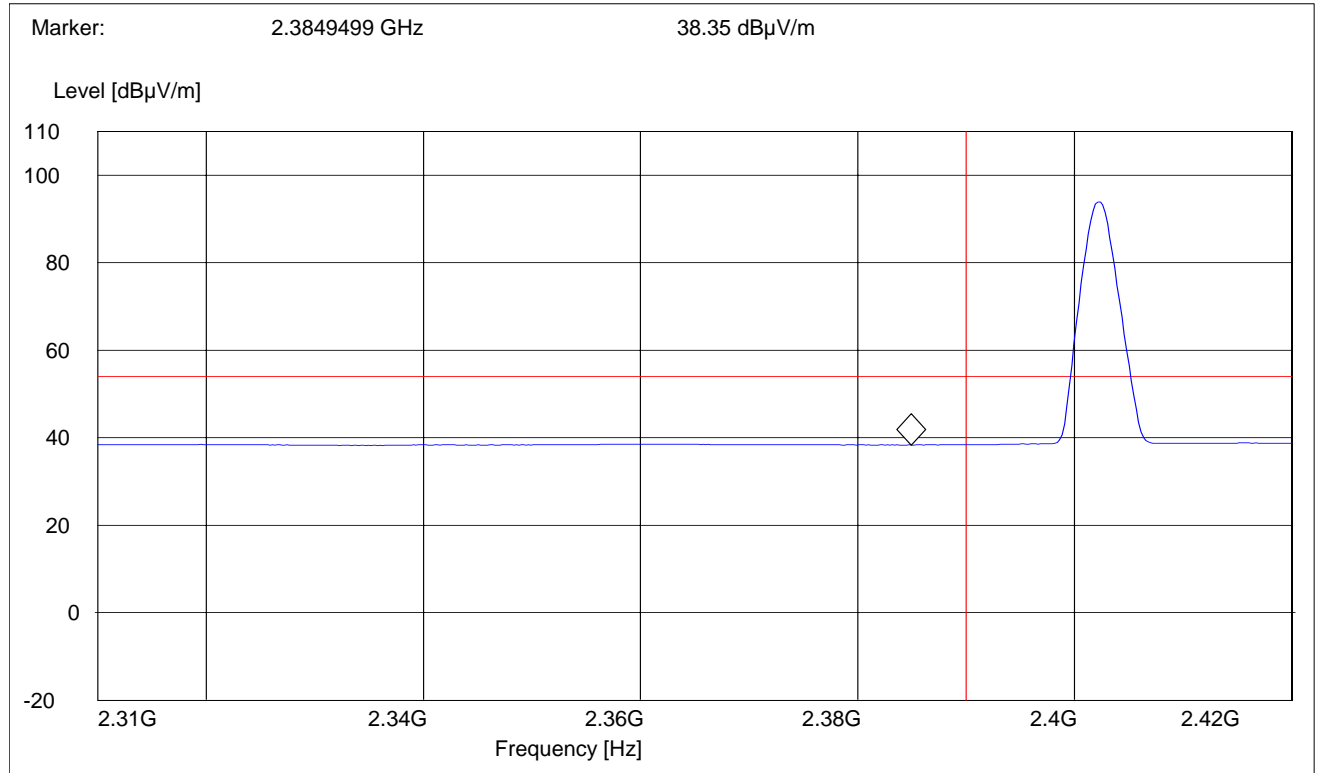




5.8.3 RESULTS (2480MHz)

PEAK


Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2462 MHz	2500 MHz	Max Peak	Coupled	1 MHz	1 MHz

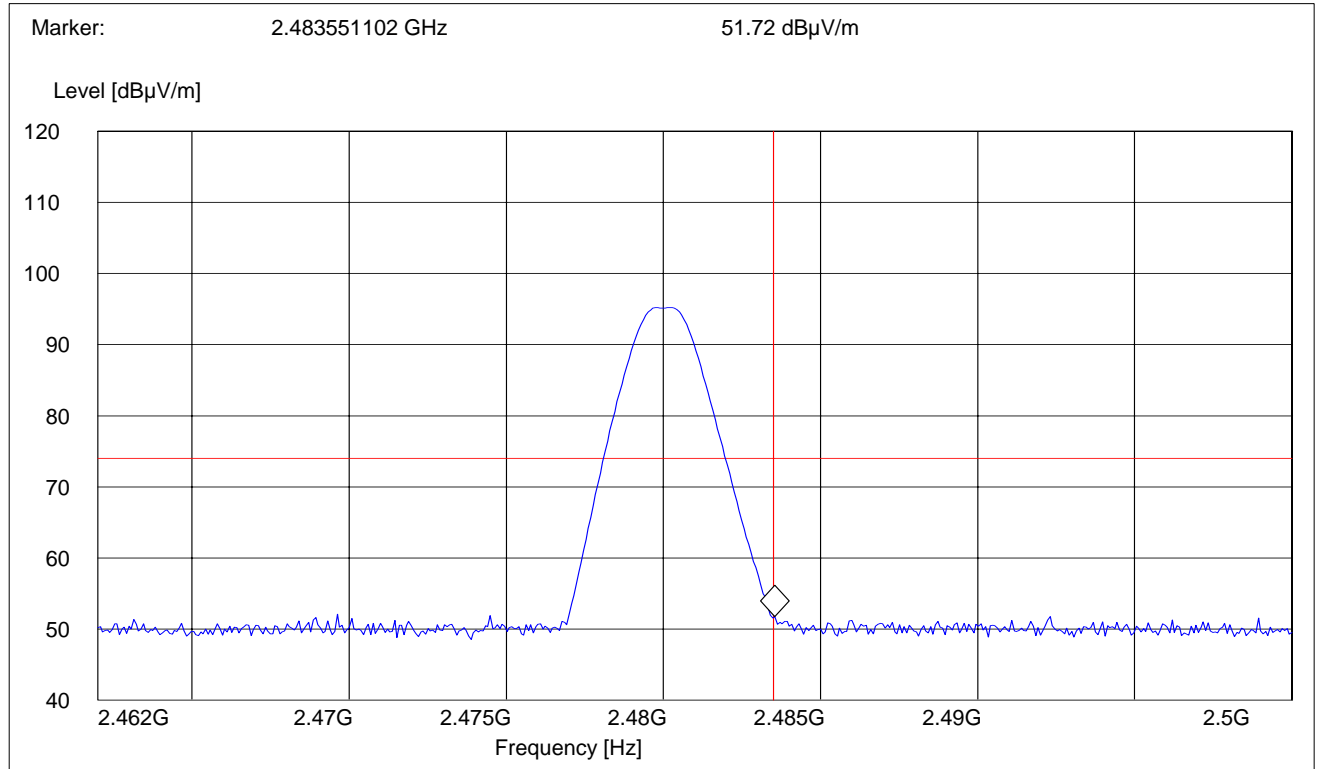



AVG

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
2462 MHz	2500 MHz	Max Peak	Coupled	1 MHz	10 Hz

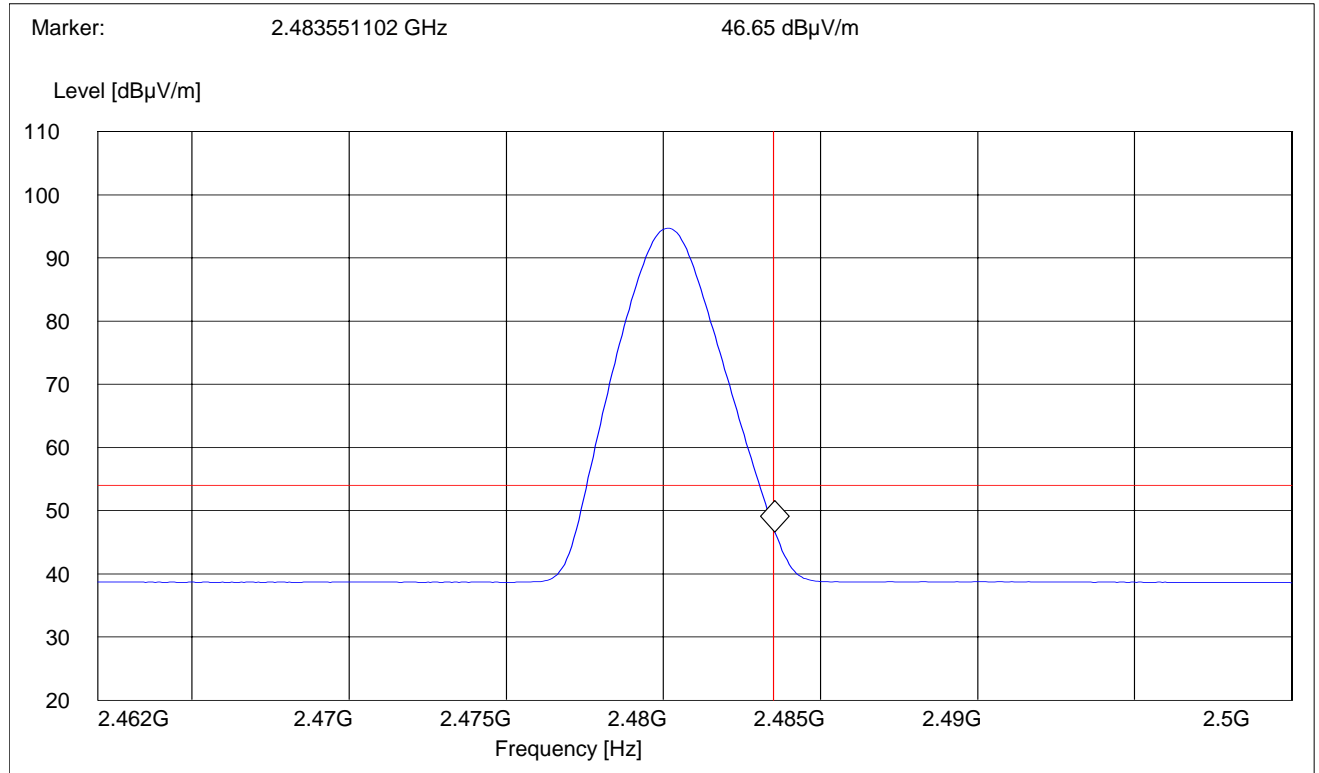



5.9 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209

5.9.1 LIMITS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV**

***AVG. LIMIT= 54dBuV**

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels




5.9.2 RESULTS

30MHz – 1GHz
Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: This plot is valid for low, mid, high channels (worst-case plot)
Note: Peak reading vs. Quasi-peak limit

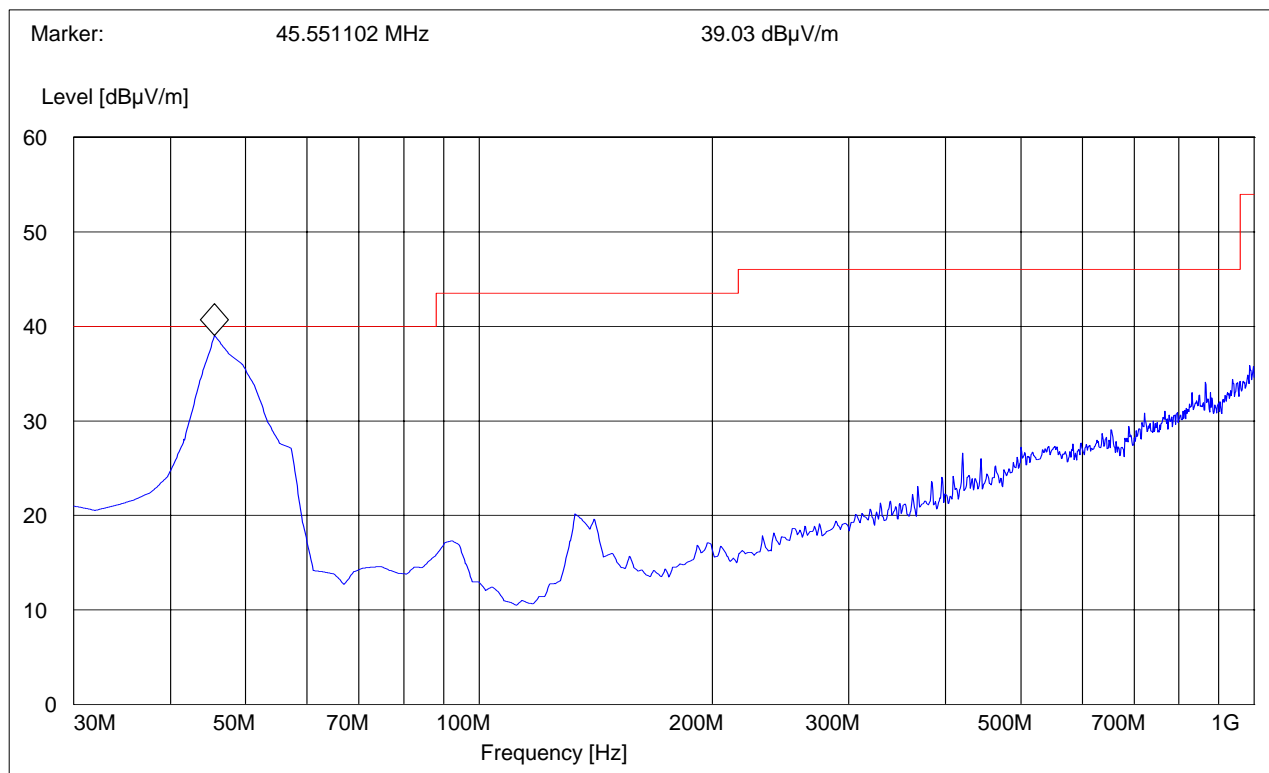




30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak reading vs. Quasi-peak limit

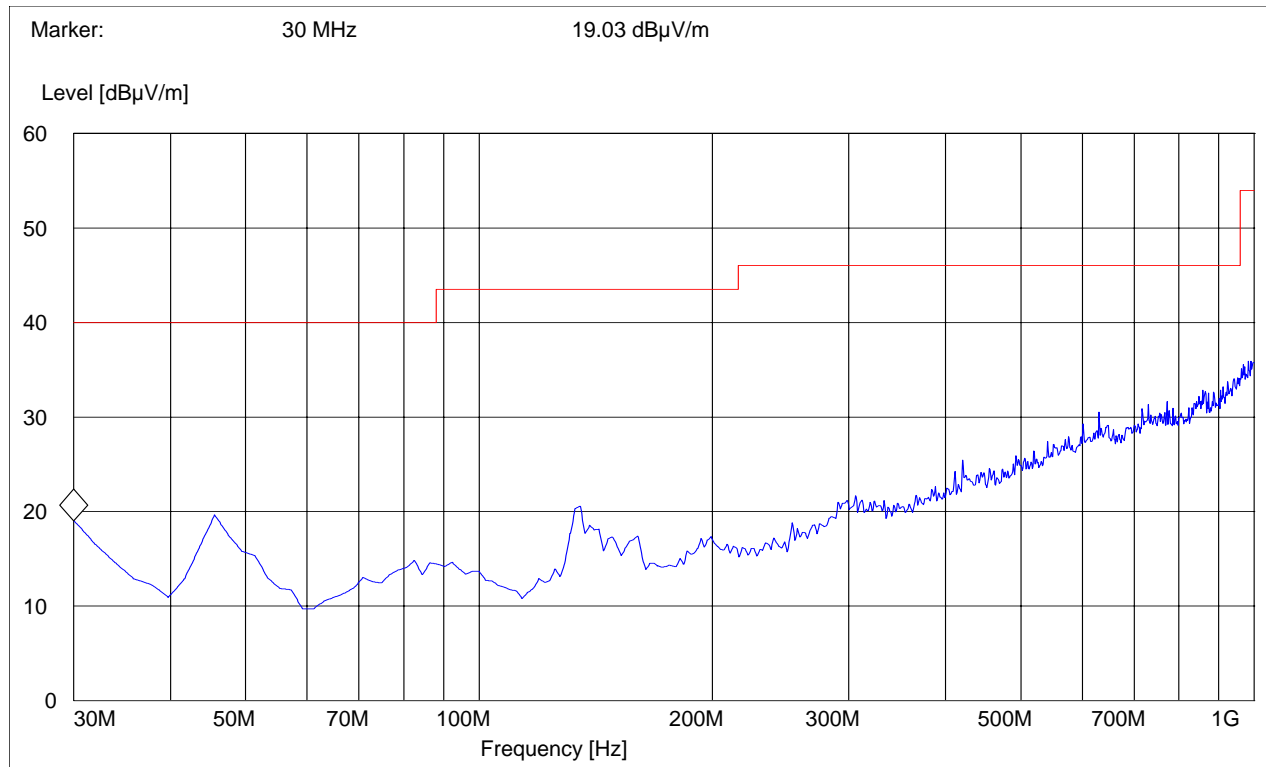




1-3GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

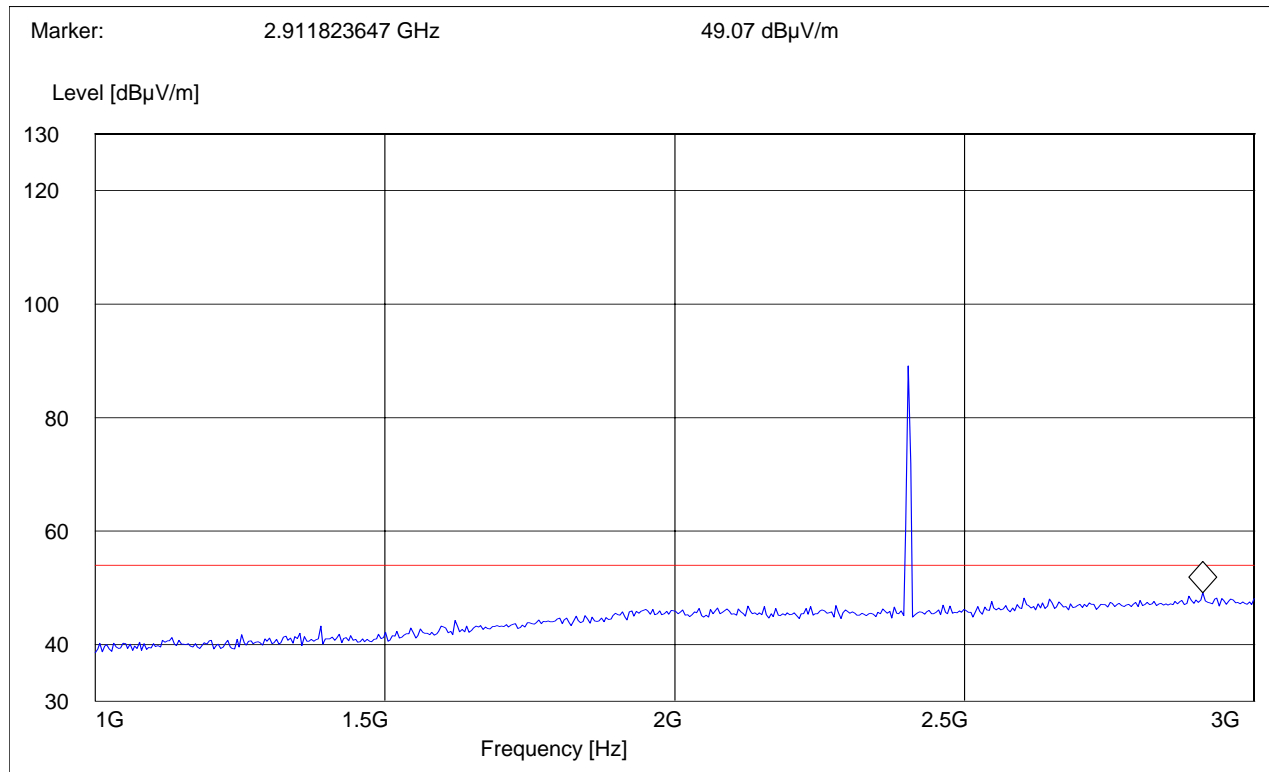




1-3GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

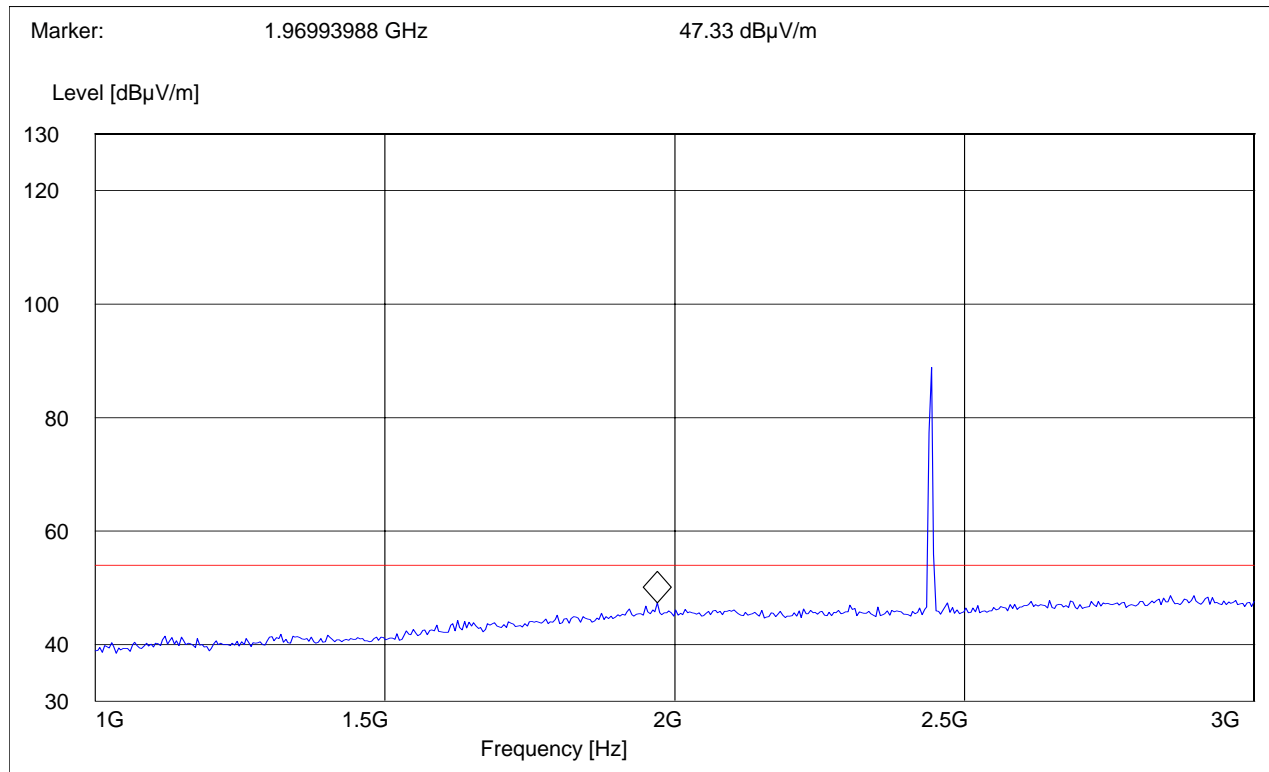




1-3GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq.

Note: Peak Reading vs. Average limit

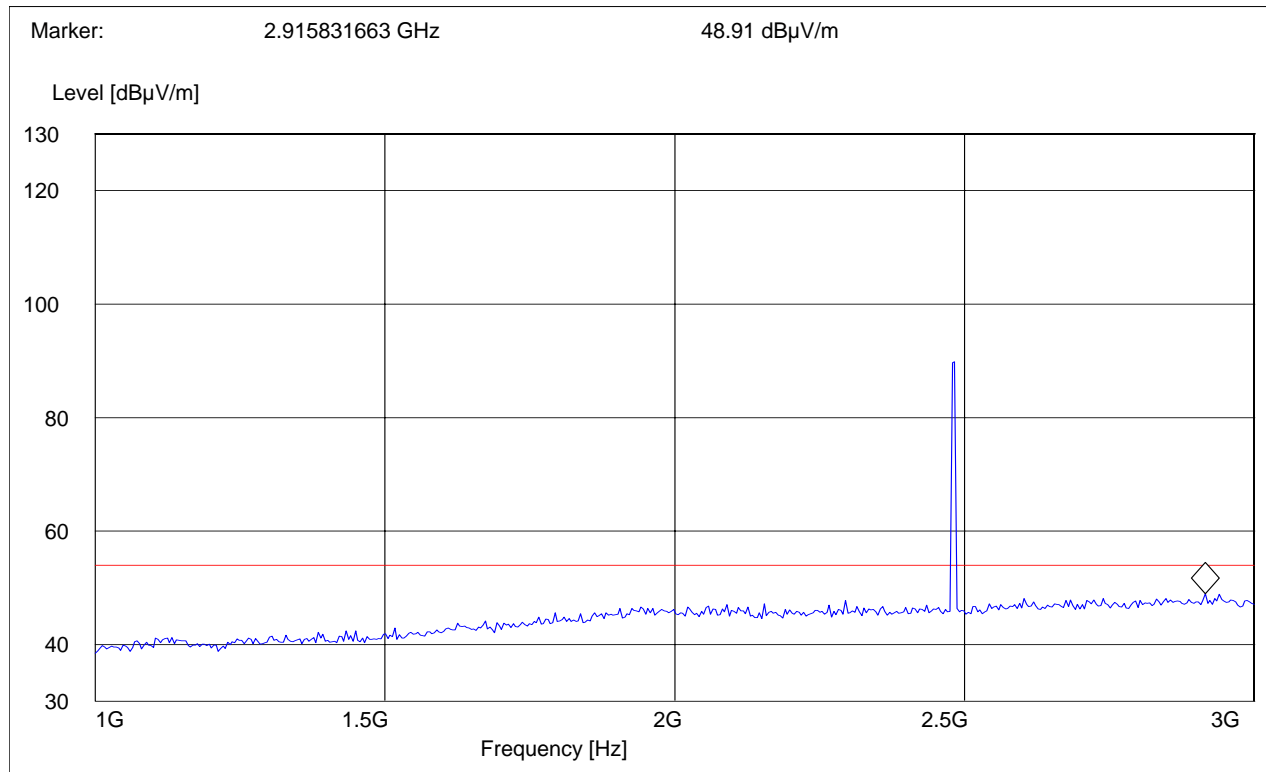




3-18GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit, see next page for Average Reading vs. Average limit

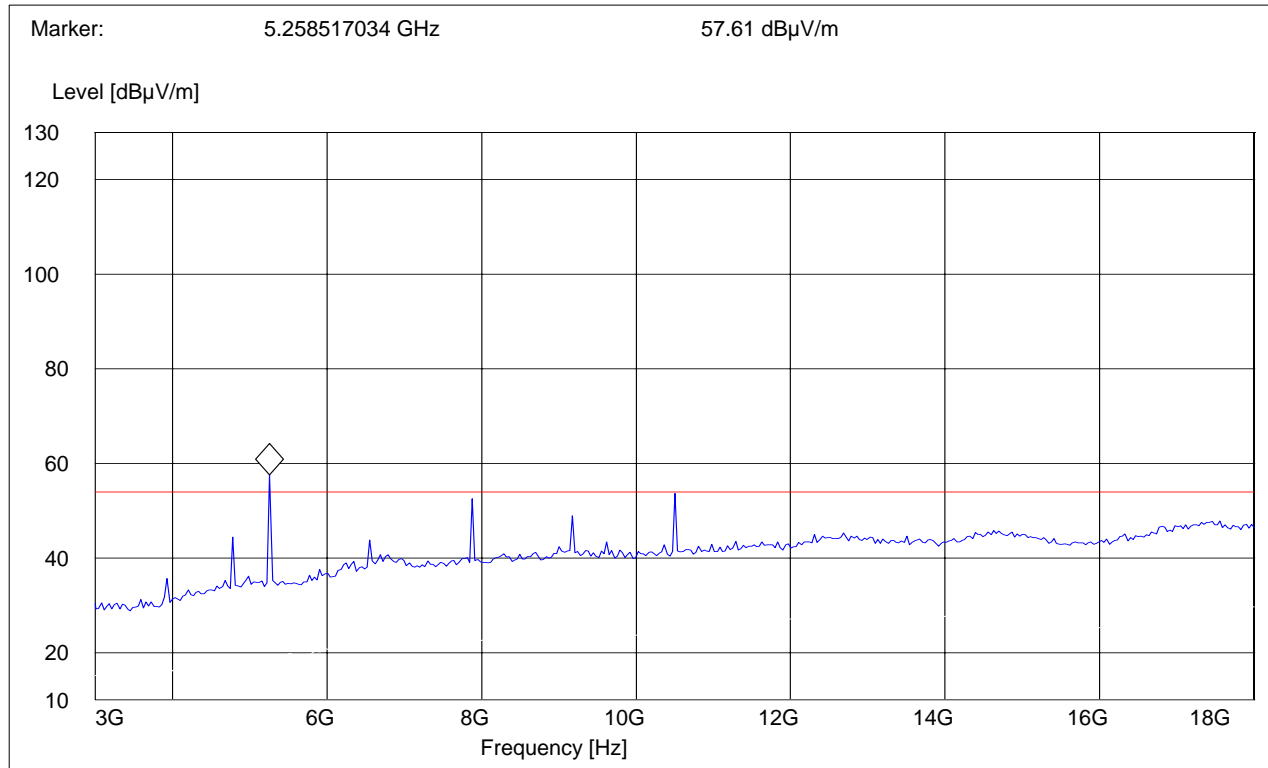




3-18GHz (2402MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average Reading vs. Average limit

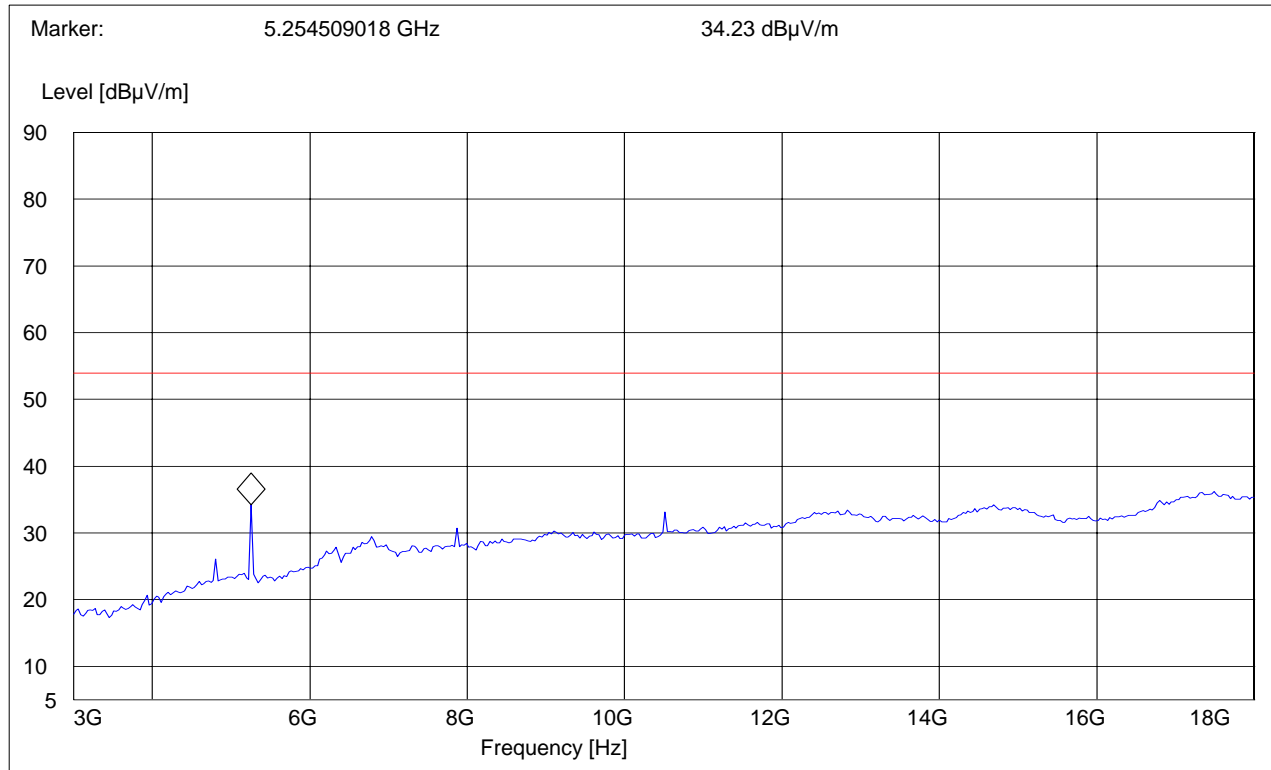




3-18GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit, see next page for Average Reading vs. Average limit

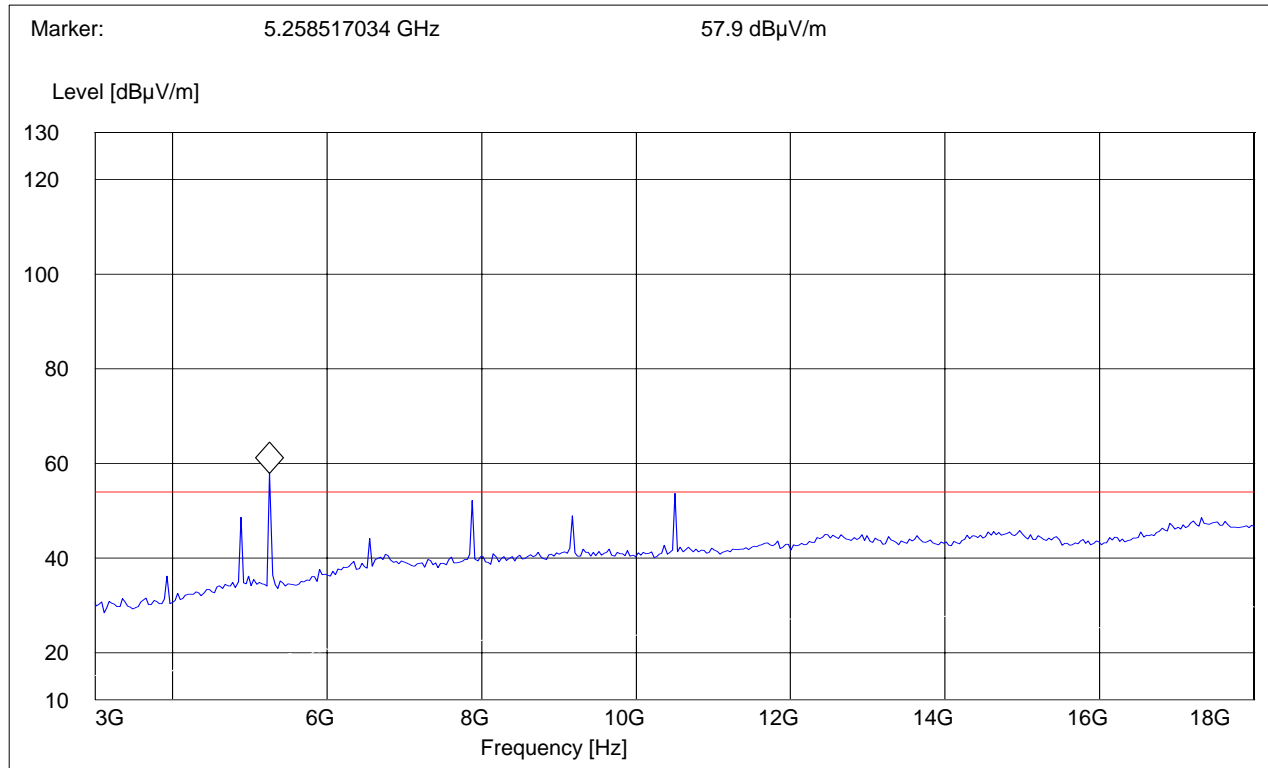




3-18GHz (2441MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average Reading vs. Average limit

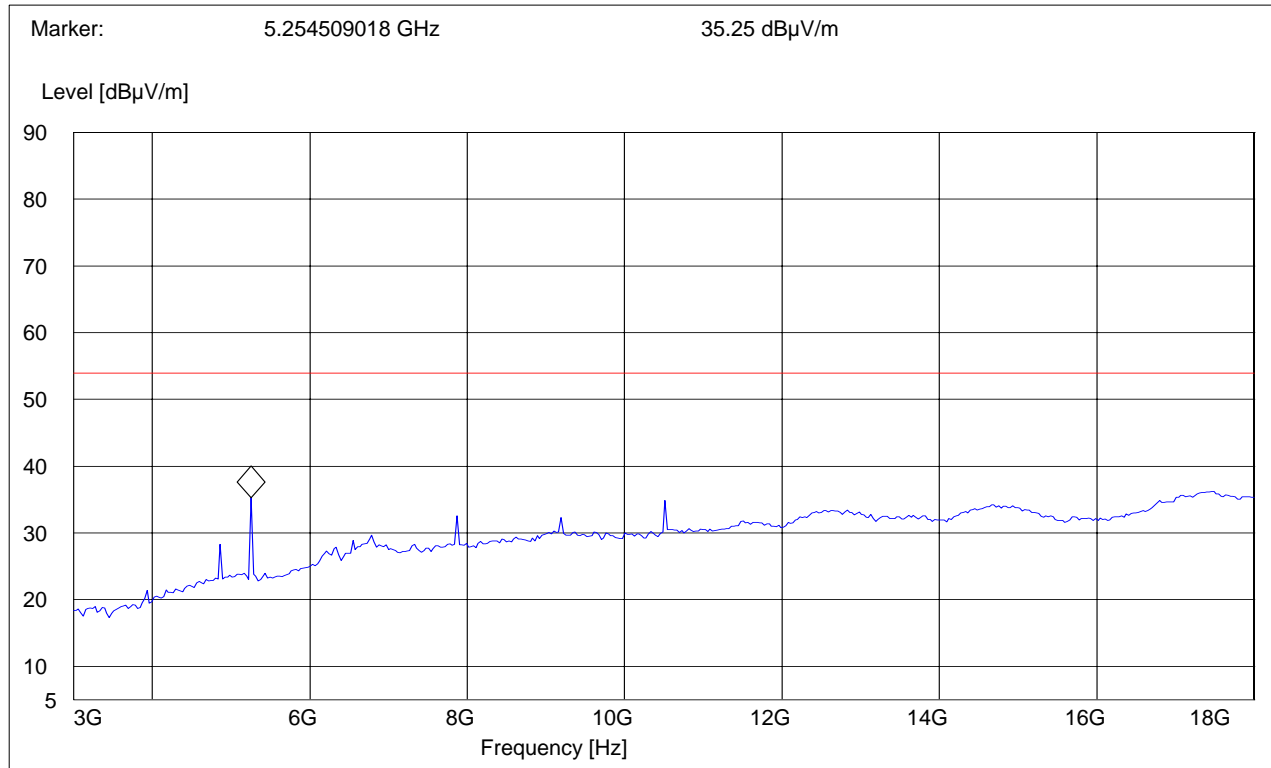




3-18GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit, see next page for Average Reading vs. Average limit

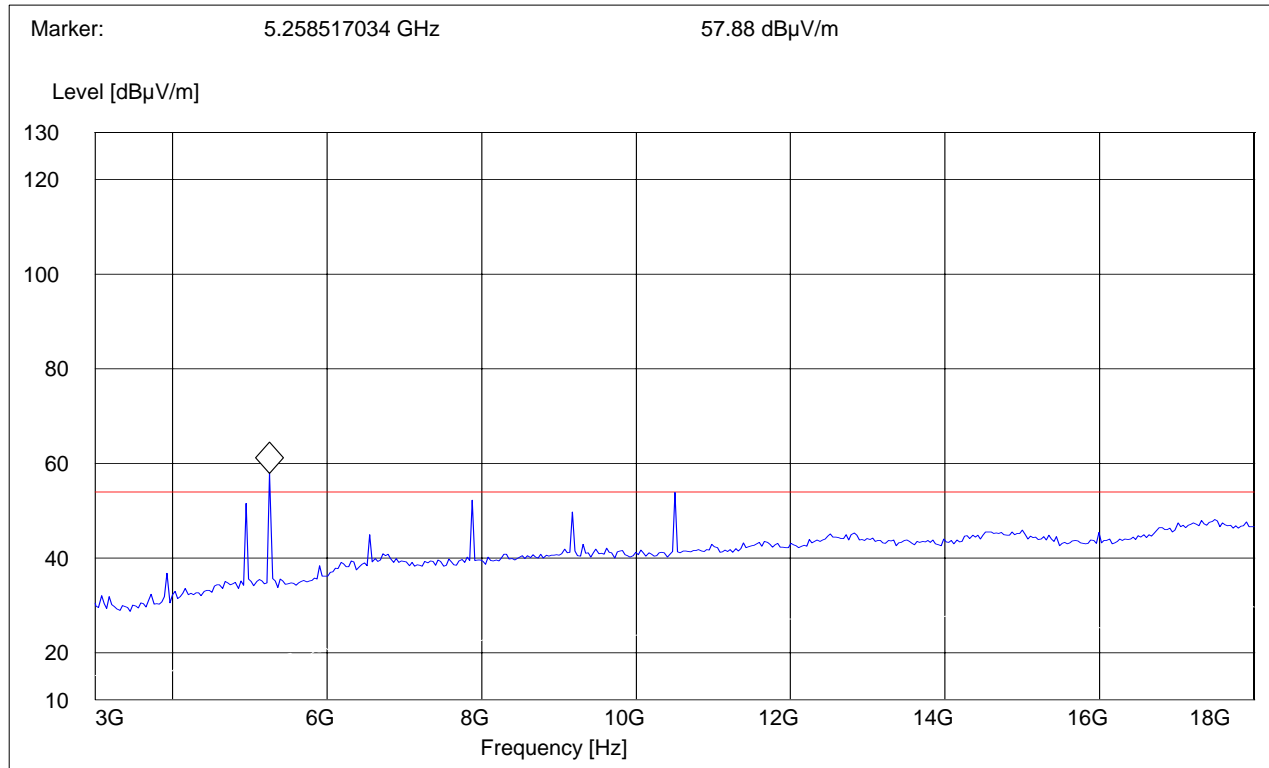




3-18GHz (2480MHz)

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average Reading vs. Average limit

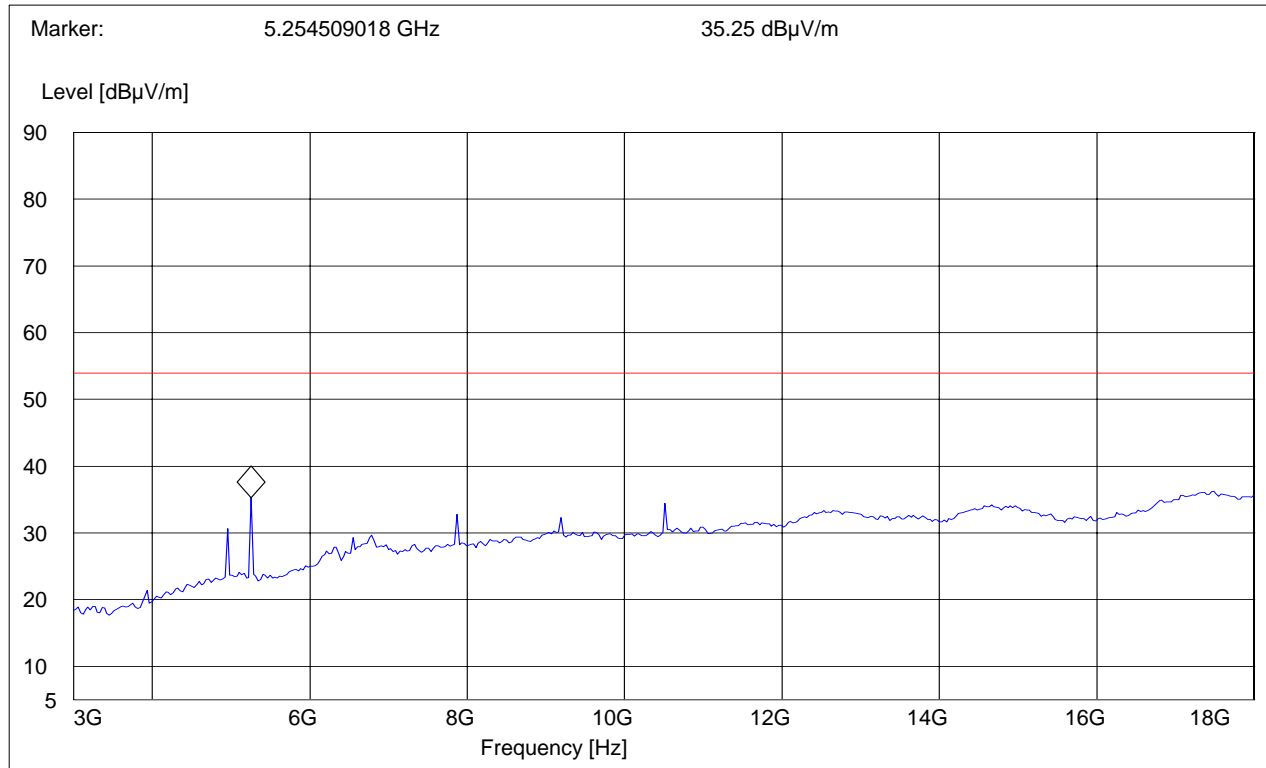




18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

Note: Peak Reading vs. Average limit

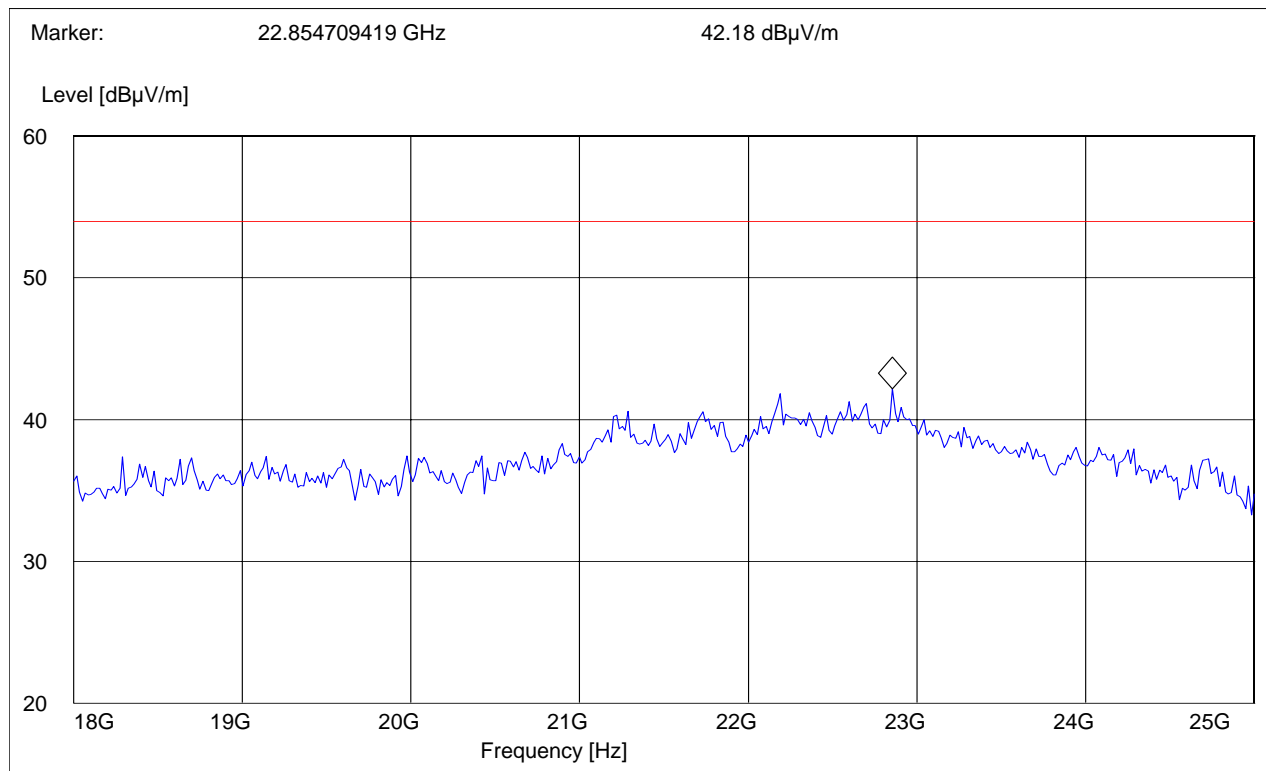



5.10 RECEIVER SPURIOUS RADIATION § 15.209/RSS210

5.10.1 LIMITS

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using a quasi-peak or average limit , unless specified with the plots.




5.10.2 RESULTS

30MHz – 1GHz
Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-peak limit

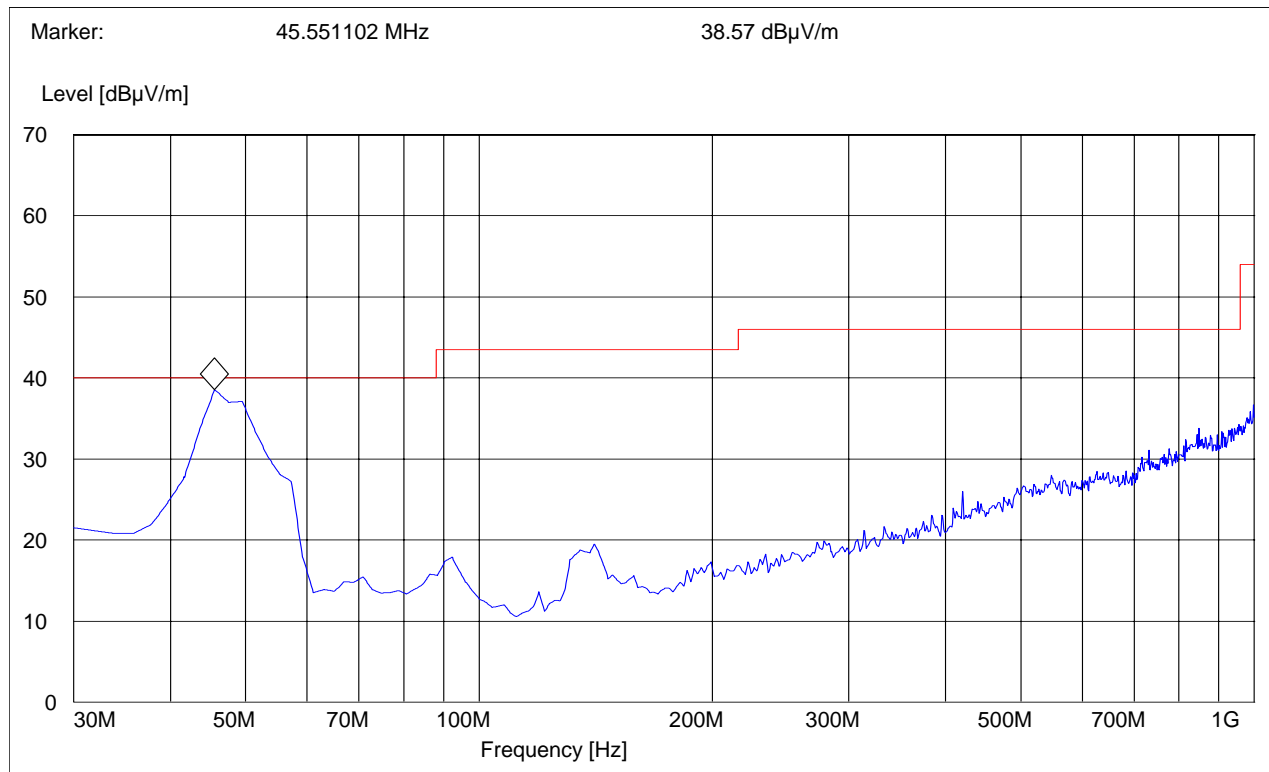




30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-peak limit

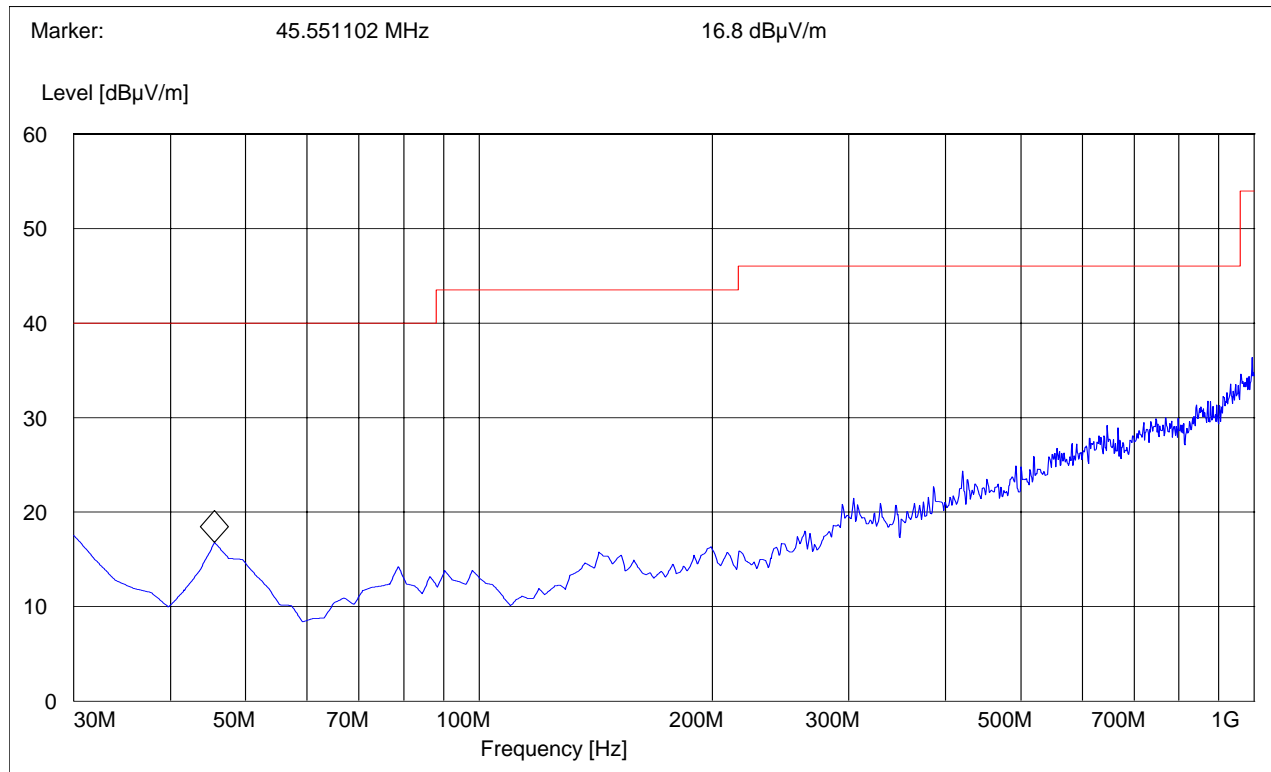




1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

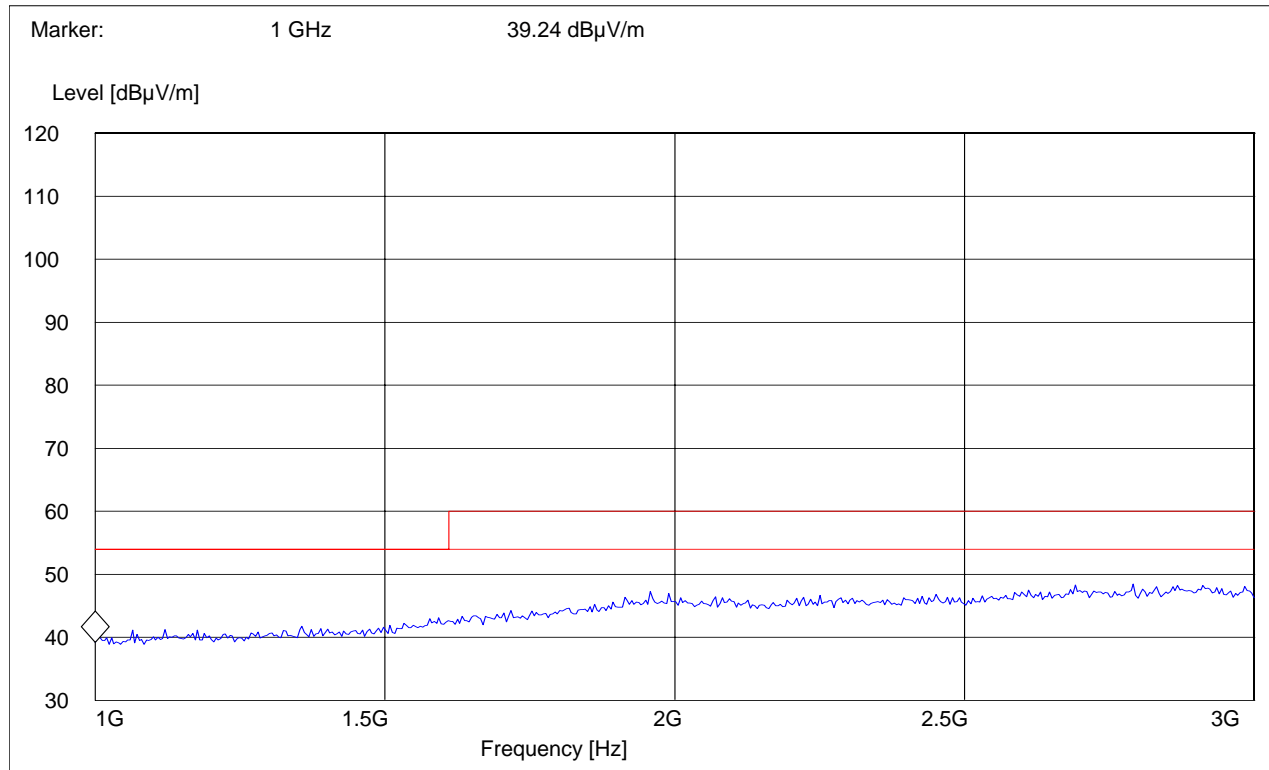




3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit, see next page for Average Reading vs. Average limit

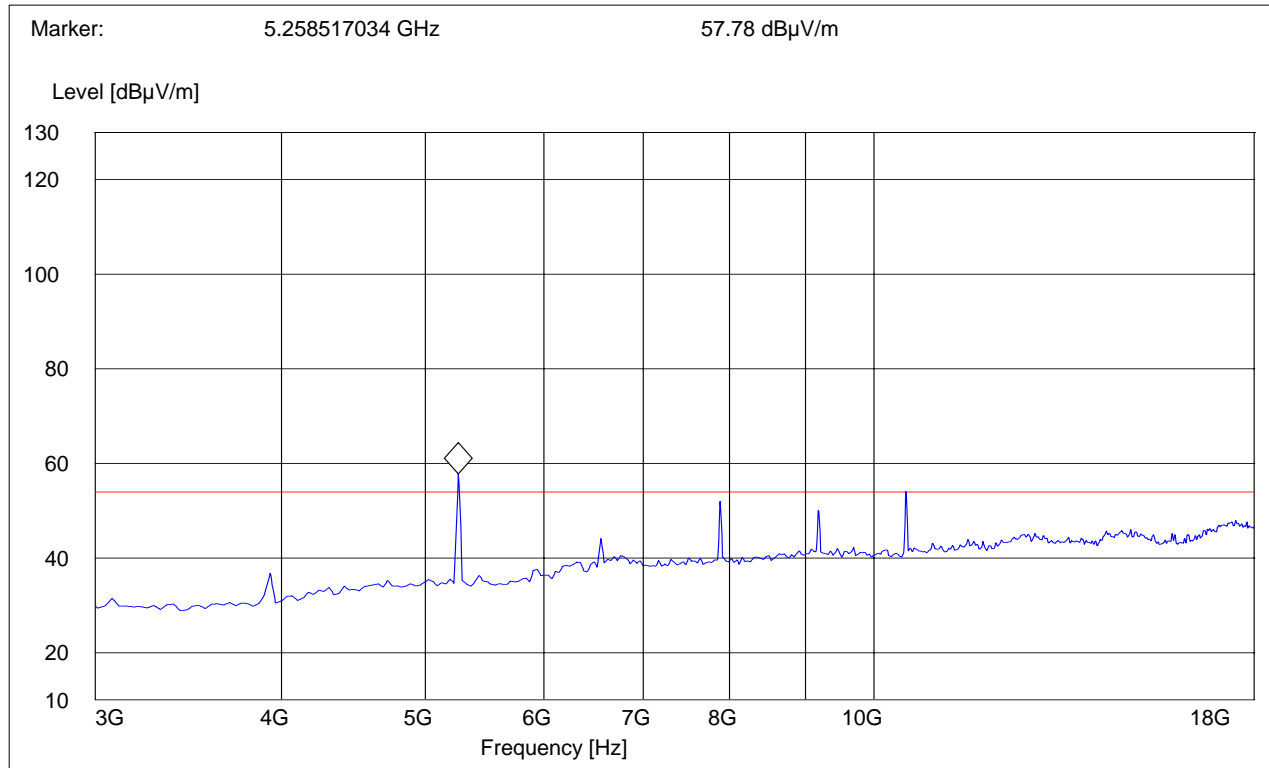




3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average Reading vs. Average limit

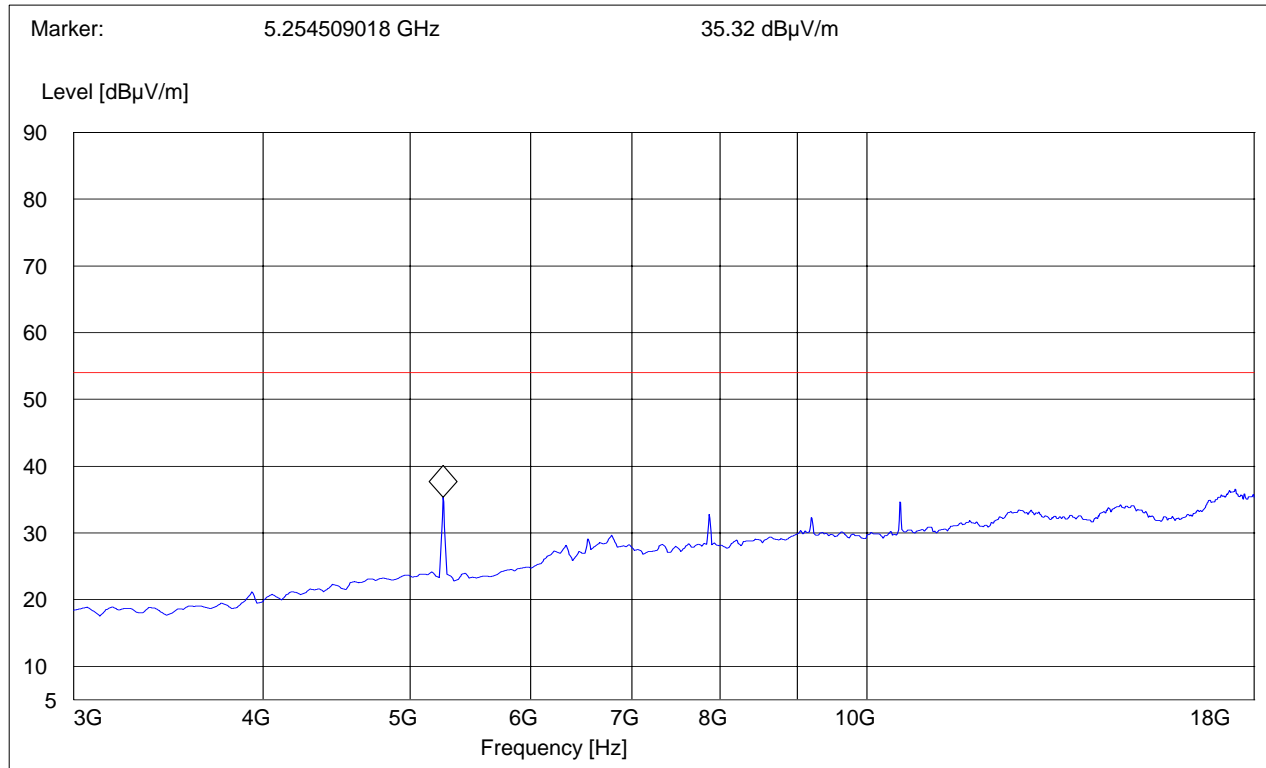




18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

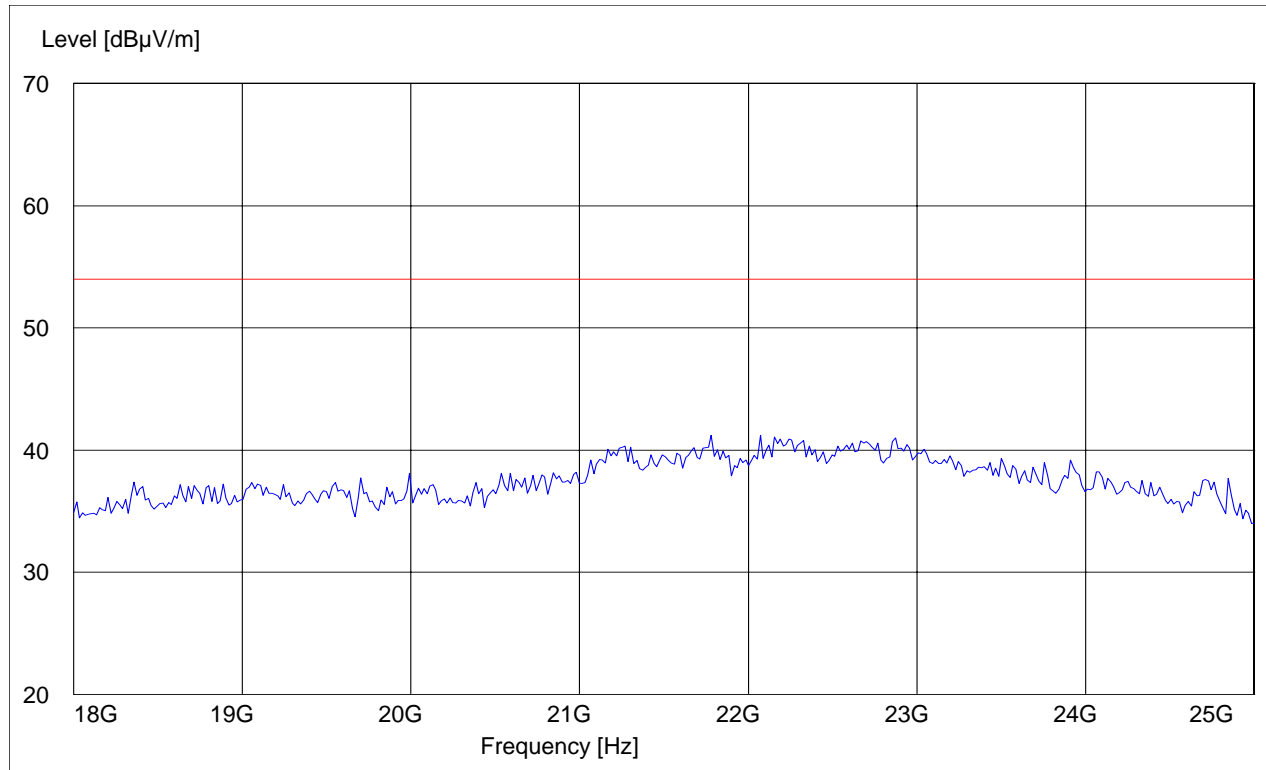



5.11 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

5.11.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz



5.11.2 RESULTS

Measured with AC/DC power adapter FRIWO model#:SDA5518
 LISN


411 Dixon Landing Road, CA 95035

EUT / Description: bluetooth
 Manufacturer: trimble nav
 Test mode: tx @ 2402
 Test Engineer: neesh
 Phase: L & N
 Comment: 110 volt

Start of Test: 11/23/2005 / 1:08:23PM

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage				
Start	Stop	Step	Detector	Meas.	IF	
Transducer						
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

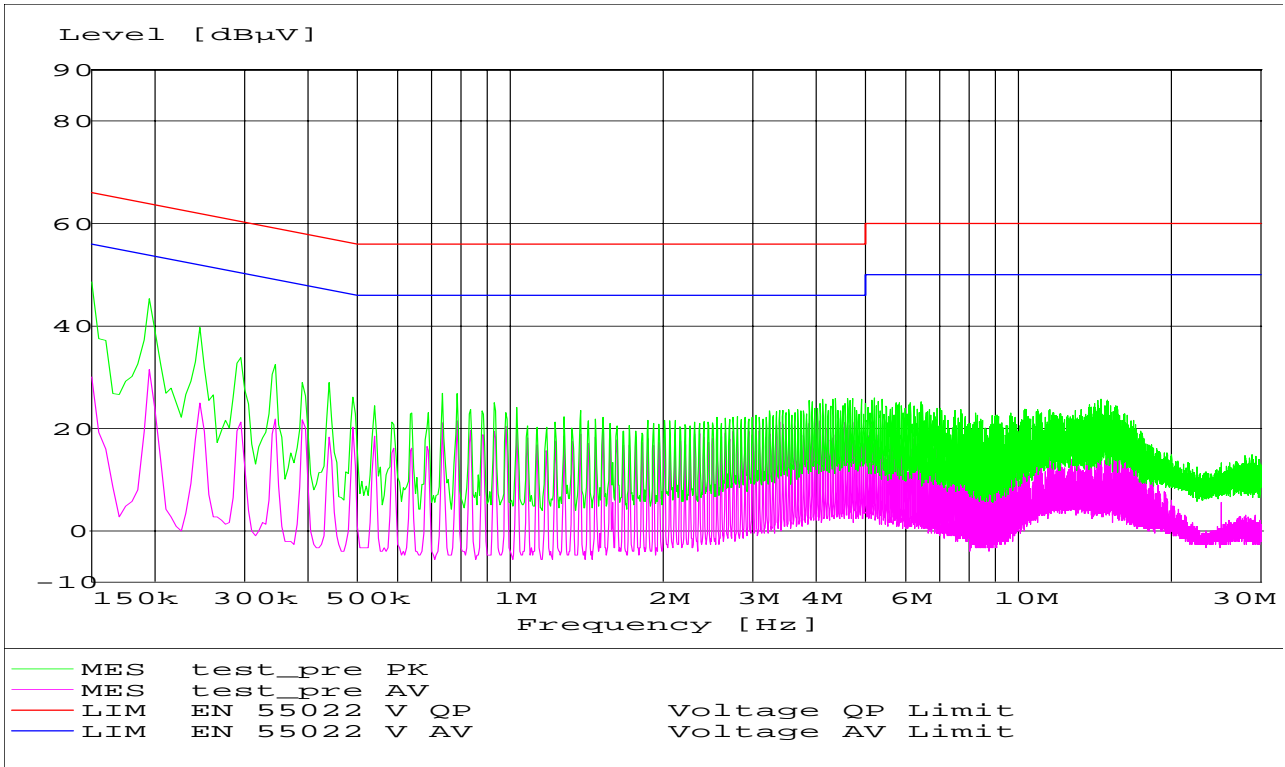



6 Measurements For R8-MODEL 2, SPS880

6.1 CO-LOCATION

All Co-location testing was performed with the EUT transmitting in the PCS band (1880MHz) and the EUT transmitting in Bluetooth mode(2402MHz).

These channels were deemed worst case due to there EIRP readings. All testing was performed using FCC 15.247 procedures/limits.

The attached graph (6.1.1) reflects peak measurements. If peak measurements exceeded the specified peak limits, additional quasi peak measurements have been conducted (if required by the standard). The quasi peak test result is then reflected in the result table below the graph, too.




6.1.1 RESULTS (PCS AND BLUETOOTH)

30MHz – 1GHz
Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-Peak limit

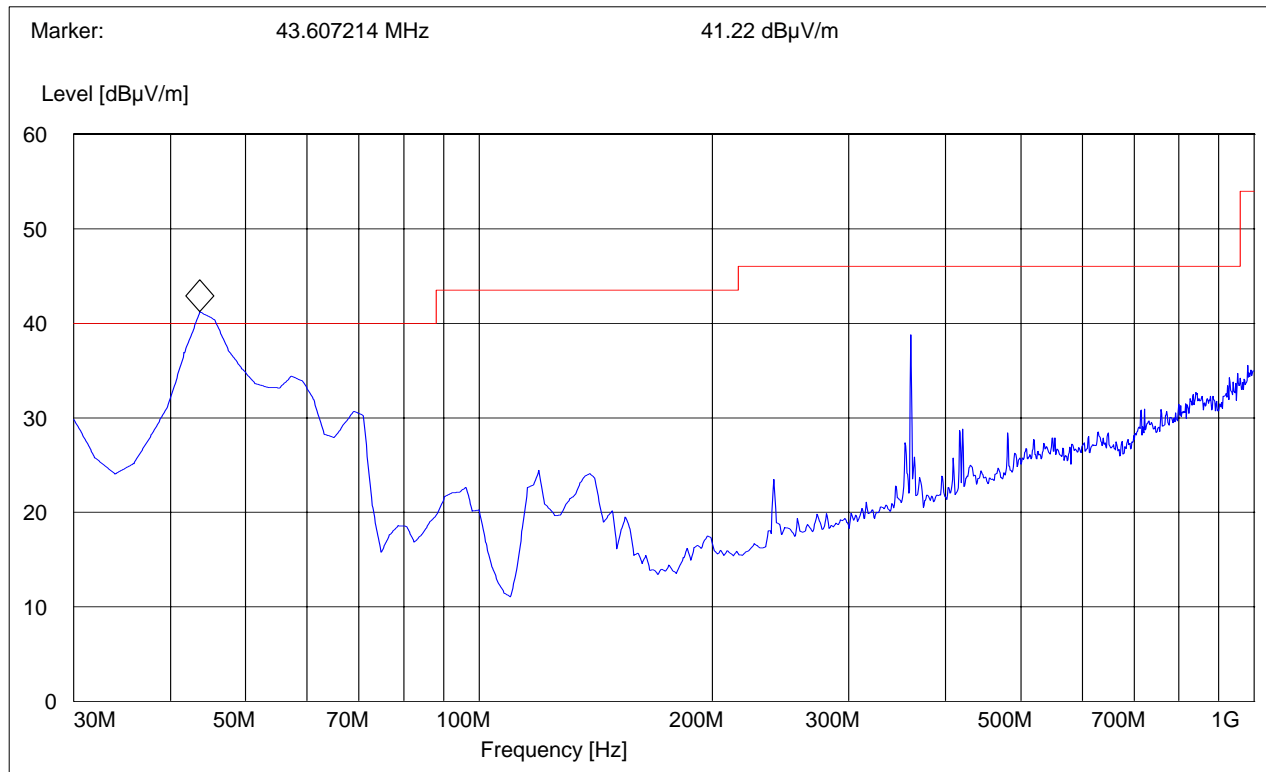


Frequency	Max Peak	Quasi-peak	Limit	Margin
43.6 MHz	41.22dBuV	36.22dBuV	40 dBuV	-3.78dB



30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-Peak limit

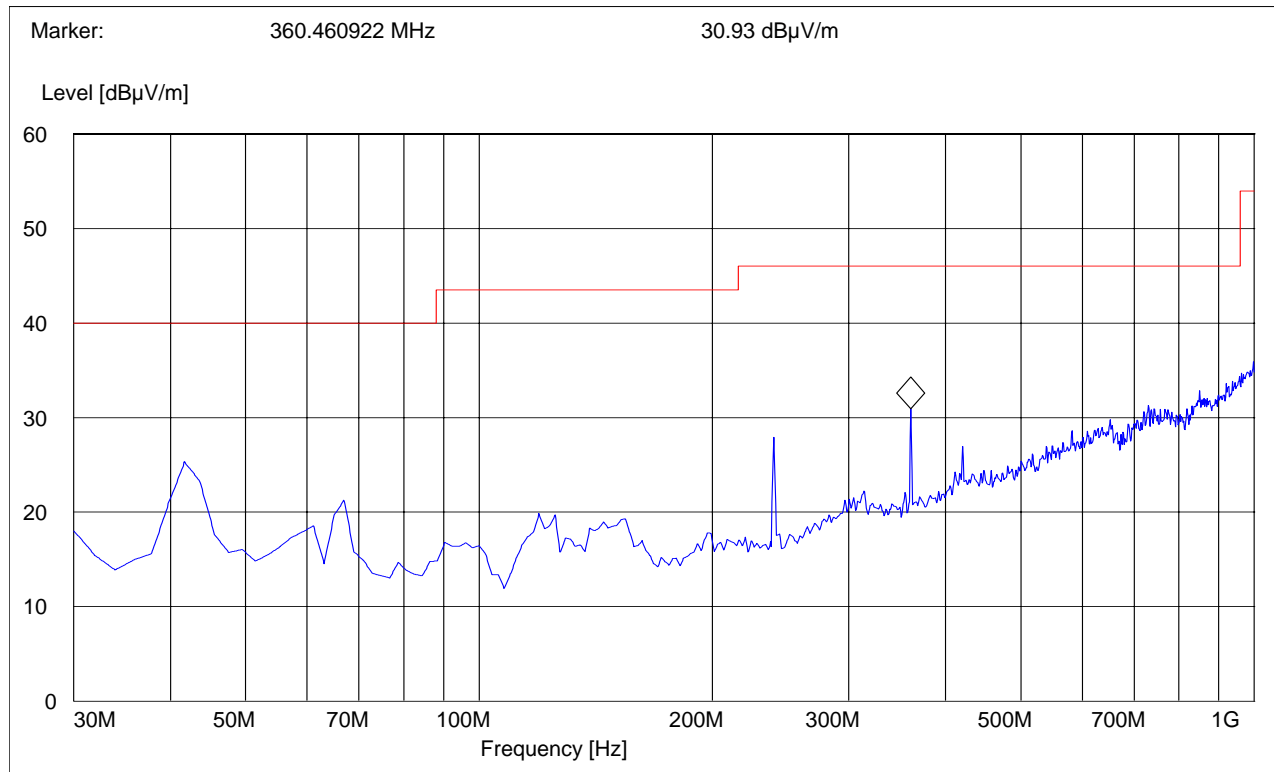




1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: The peaks above the limit line is the carrier freq of the Bluetooth and PCS transmitter.
Note: Peak Reading vs. Average limit

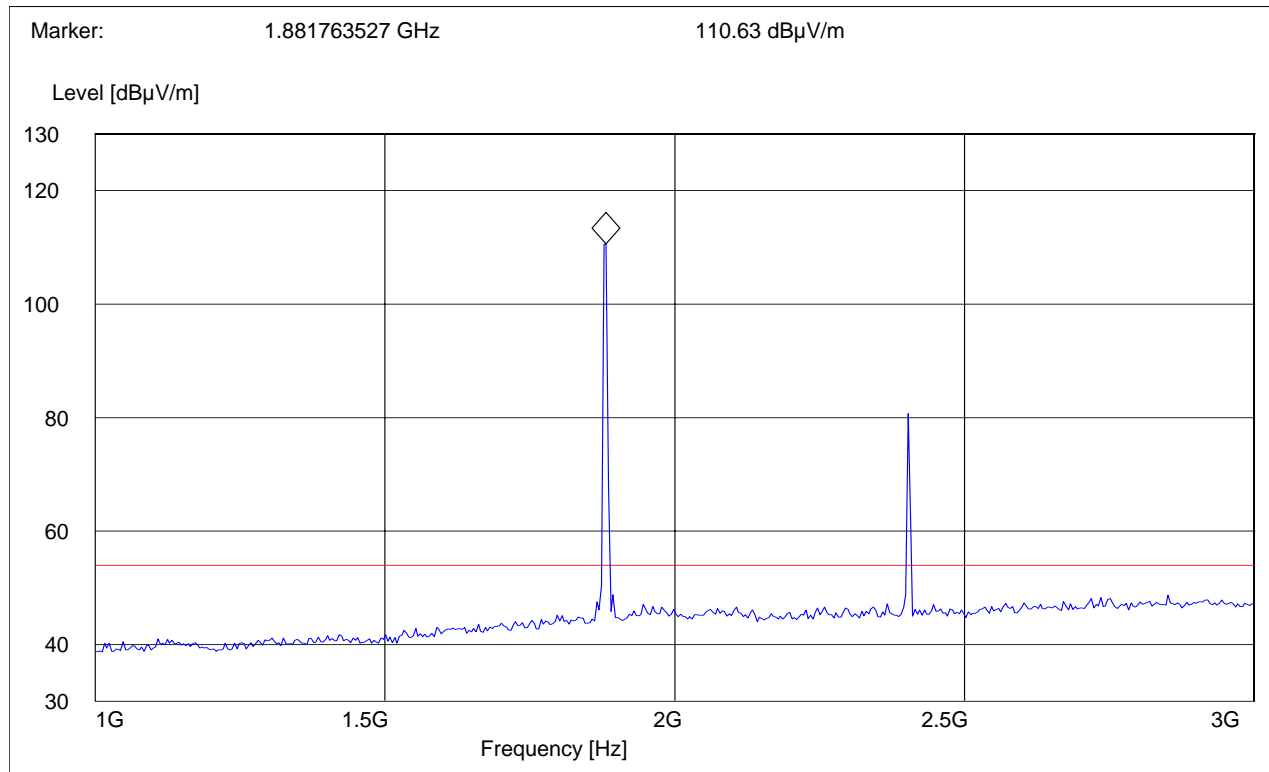




3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit, see next page for Average Reading vs. Average limit

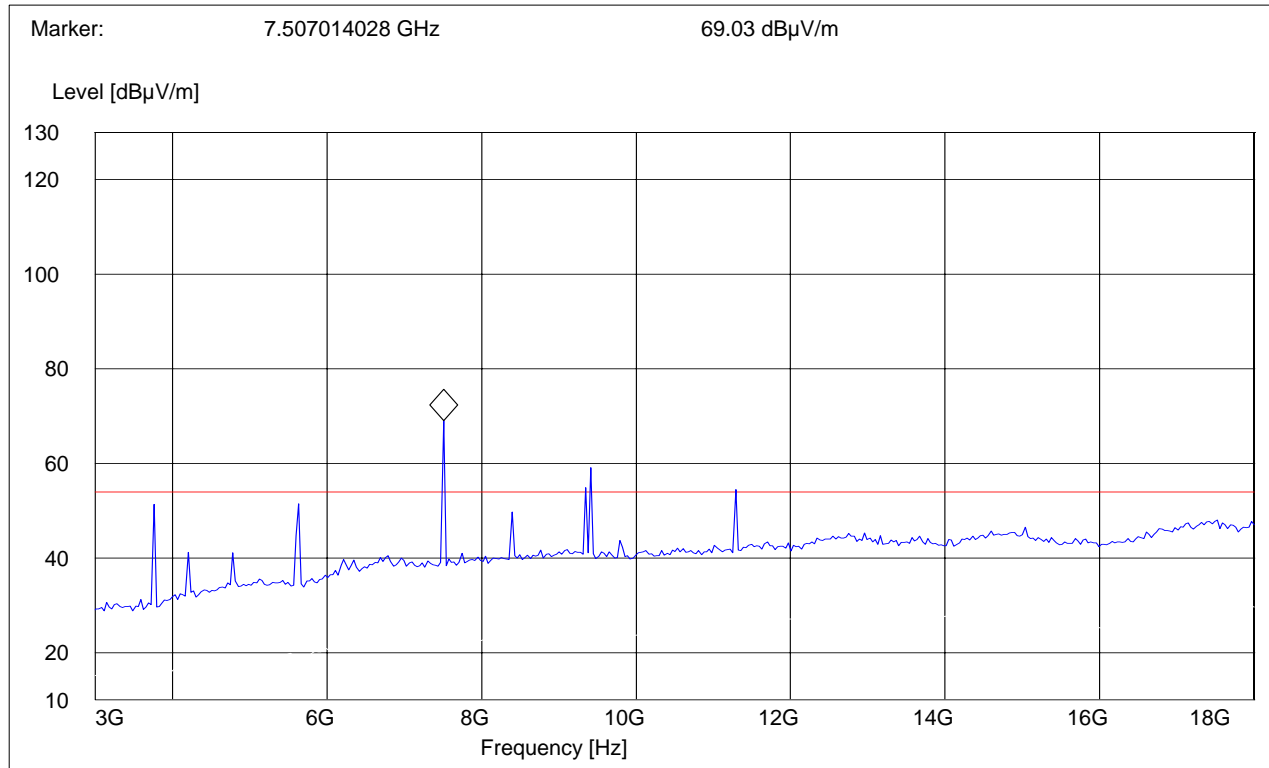




3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	10 Hz

Note: Average Reading vs. Average limit

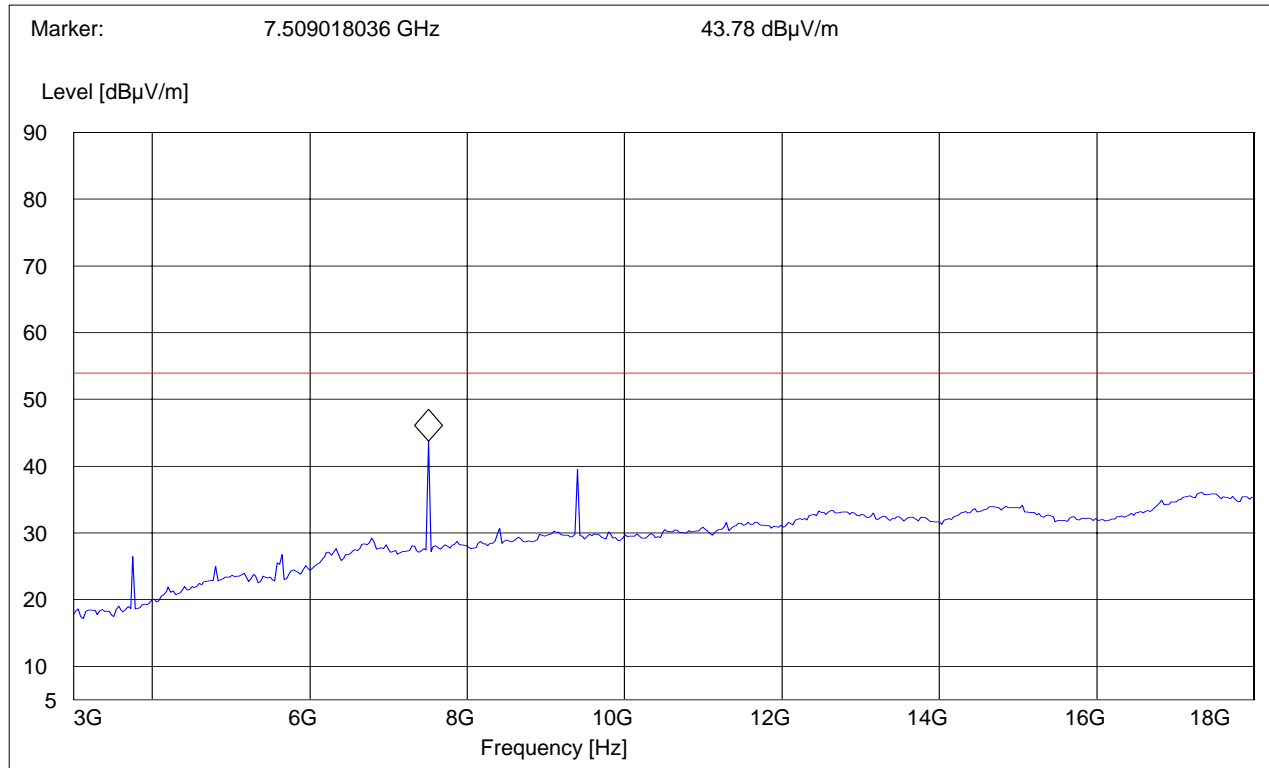




18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

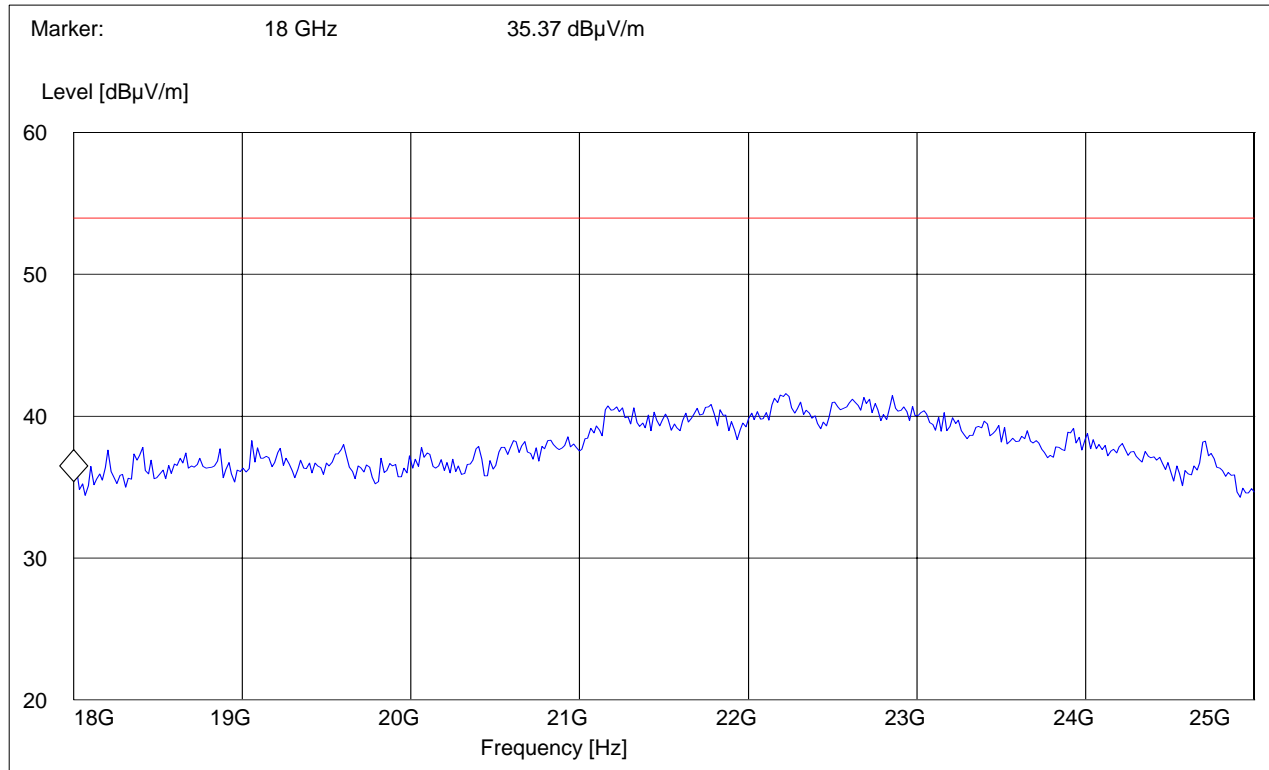



6.2 RECEIVER SPURIOUS RADIATION § 15.209/RSS210

6.2.1 LIMITS

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using a quasi-peak or average limit , unless specified with the plots.




6.2.2 RESULTS

30MHz – 1GHz
Antenna: vertical

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-peak limit

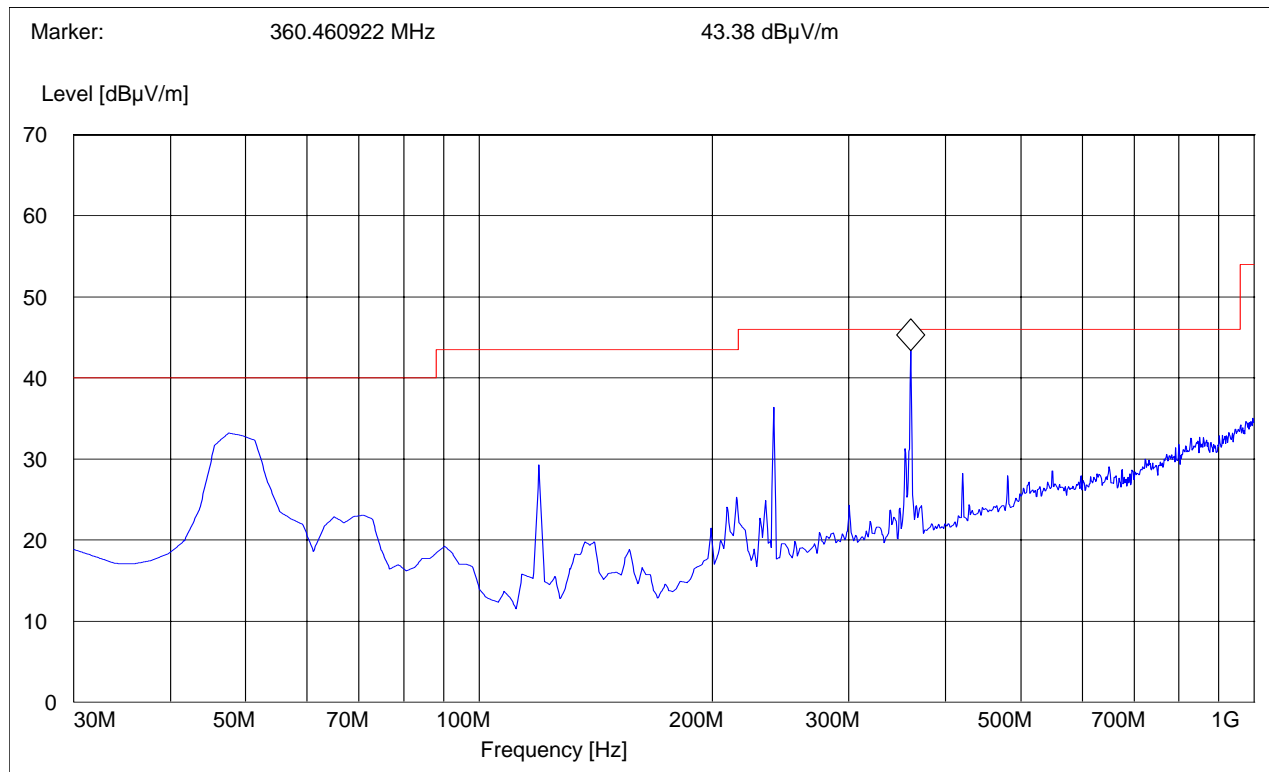




30MHz – 1GHz
Antenna: horizontal

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
30MHz	1GHz	Max Peak	Coupled	100 KHz	100 KHz

Note: Peak Reading vs. Quasi-peak limit

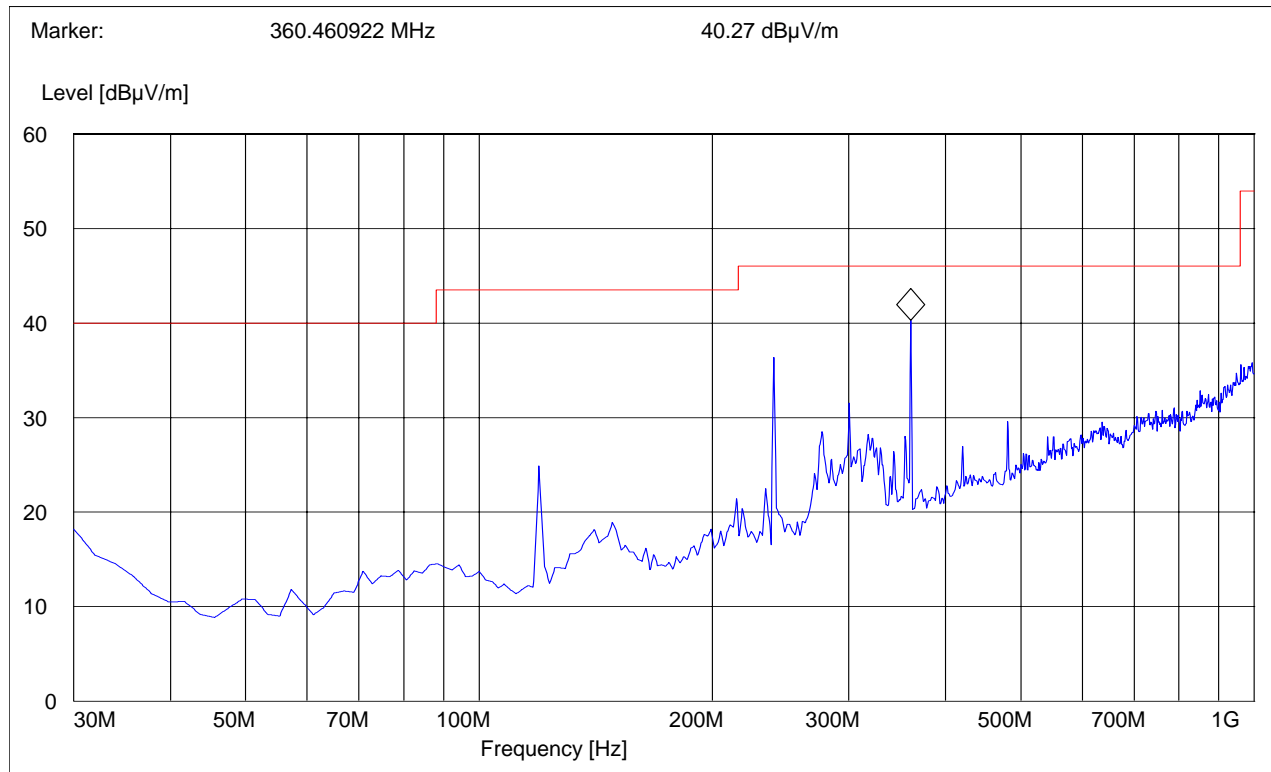




1-3GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
1GHz	3GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

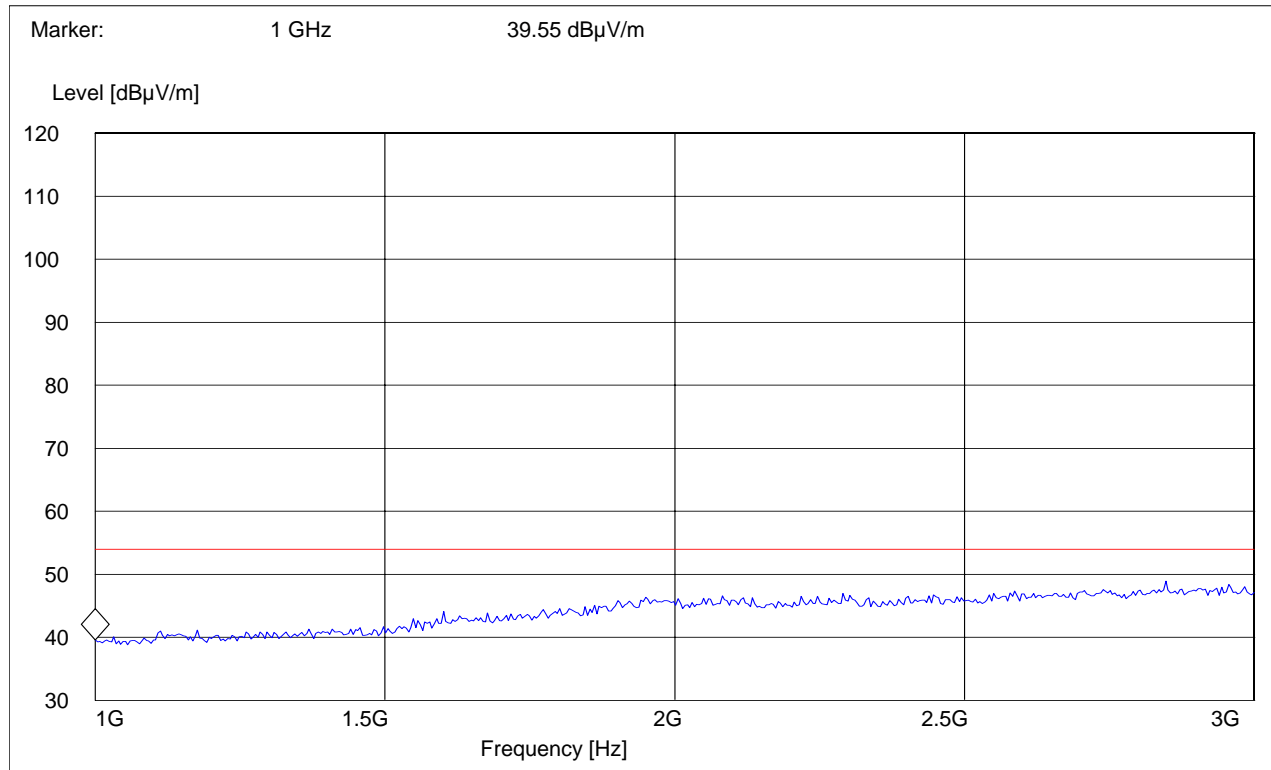




3-18GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
3GHz	18GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

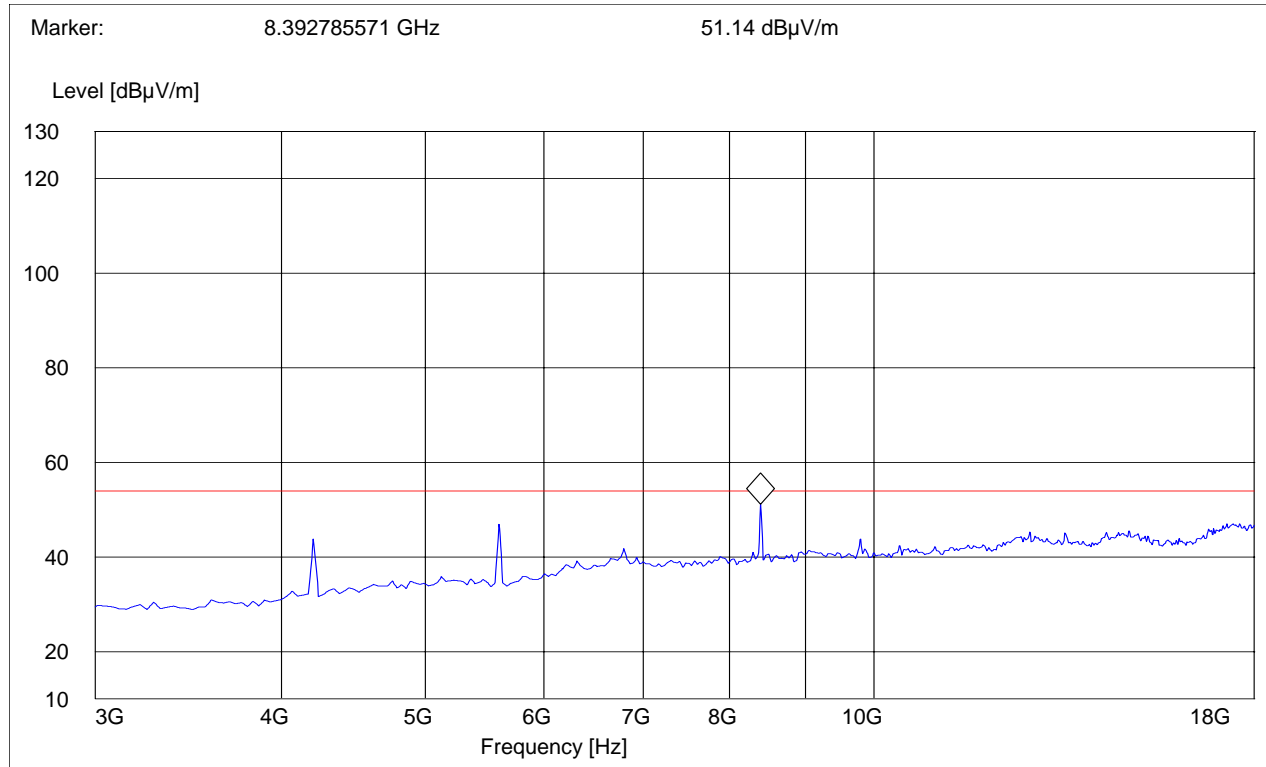




18-25GHz

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW
18GHz	25GHz	Max Peak	Coupled	1 MHz	1 MHz

Note: Peak Reading vs. Average limit

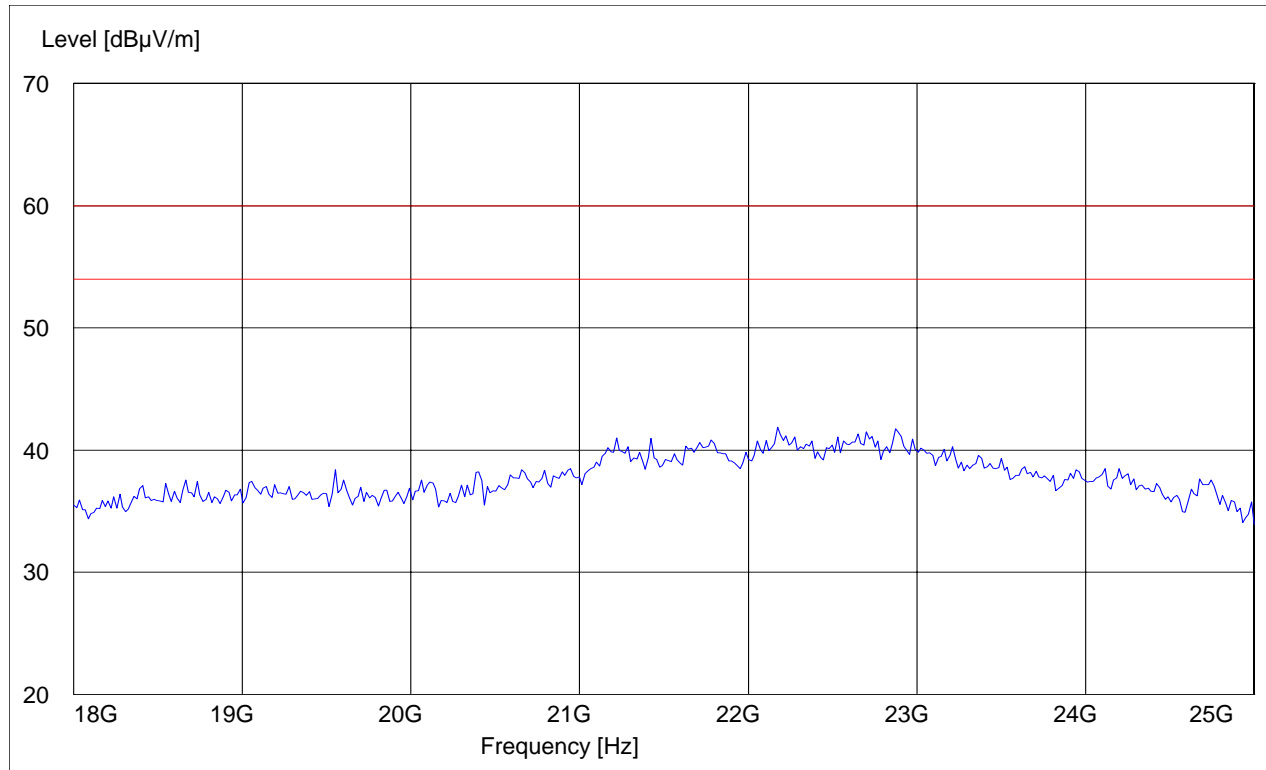



6.3 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207

6.3.1 LIMITS

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz

testing was performed with the EUT transmitting in the PCS band (1880MHz) and the EUT transmitting in Bluetooth mode(2402MHz).



6.3.2 RESULTS

Measured with AC/DC power adapter FRIWO model#:SDA5518
 LISN


411 Dixon Landing Road, CA 95035

EUT / Description: Bluetooth Module
 Manufacturer: Trimble Navigation
 Test mode: PCS 1900 channel-661; Bluetooth TX@2402MHz
 Test Engineer: mark
 Phase: L & N
 Comment: 110 volt

Start of Test: 11/28/2005 / 4:37:50PM

SCAN TABLE: "EN 55022 Voltage"

Short Description:		EN 55022 Voltage				
Start	Stop	Step	Detector	Meas.	IF	
Transducer						
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

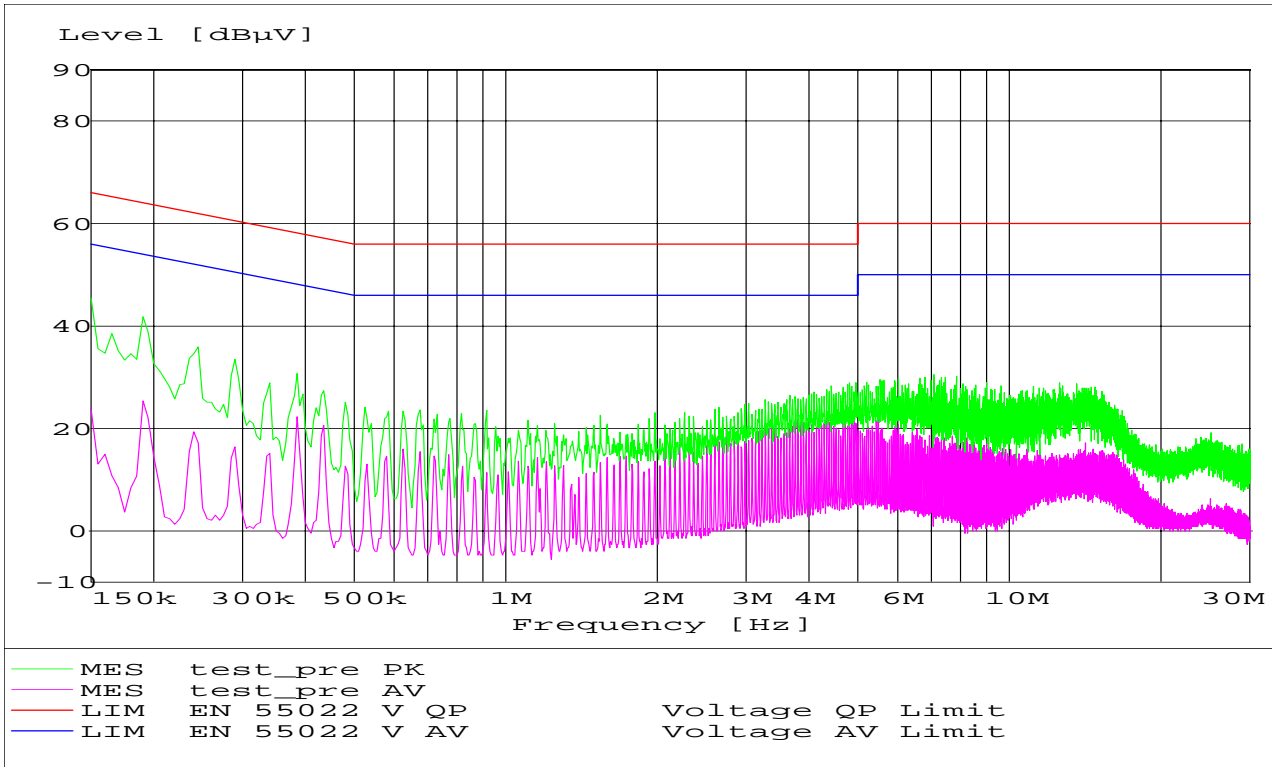

6.4 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	2-3GHz Band reject filter	BRM50701	Microtronics	6
07	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
08	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
09	Pre-Amplifier	JS4-00102600	Miteq	00616

6.5 BLOCK DIAGRAMS
Radiated Testing

ANECHOIC CHAMBER

