



REV.	LTR	DATE	UPDATE	DESCRIPTION	REMARK	SIGN	APPROVER
	△						

NOTES:

- 1 .Material: PC (t:0.178mm)
- 2 .Adhesive: 3M 467 (t: 0.05mm)
- 3 .Coating: N/A
- 4 .Background Color: C70/M62/Y64/K95
- 5 .Text Color:C33/M27/Y28/K0

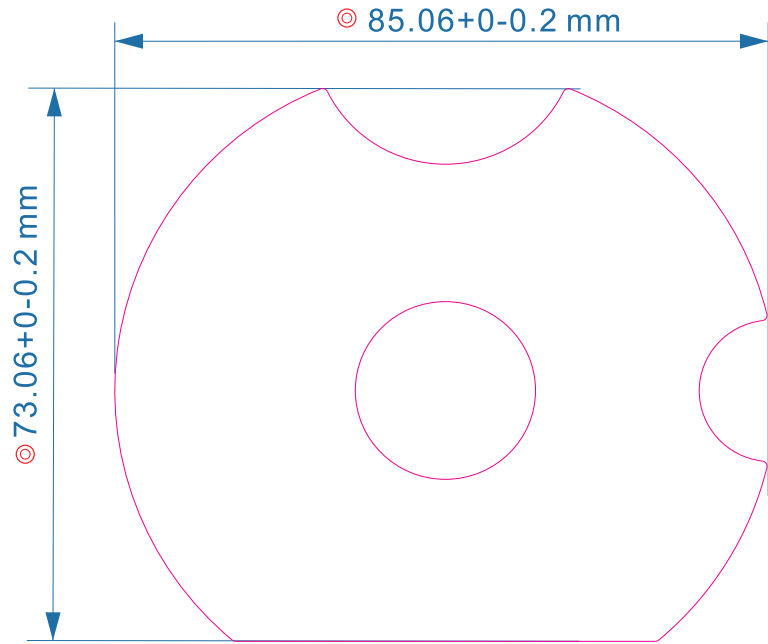

MATERIAL STRUCTURE



REMARK

1. ◎ SYMBOL MEANS IMPORTANT SIZE.
2. □ SYMBOL MEANS IMPORTANT ITEM.
3. ▲ SYMBOL MEANS ILLUSTRATE.
4. THIS PART SHOULD NOT CONTAIN ANY SUBSTANCES WHICH ARE SPECIFIED IN SPT-00001 OR SPT-00002 (WHEN SPECIFIED FOR HALOGEN FREE/ LOW HALOGEN), ISSUED BY PEGATRON.
5. - CUT LINE.

DATE



UNIT	MM	SIZE	A 4
SCALE	1:1		
SELECT	v	v	
DIM (mm)	TOL	A	B
~50	± 0.5	1.0	
51-100	± 1.0	2.0	
101-150	± 2.0	3.0	
151~	± 2.0	3.0	

PEGATRON Corporation

DESCRIPTION

BOTTOM LABEL PICKLE CYMMETRIK_R2

MODEL NO. PICKLE

DRAWING NO. 1510-XXXXXX

CHECKED

PARTS NO.

APPROVED

DESIGNED
Emma Tang

RevF


 **Trimble.**

R580

TRIMBLE INCORPORATED
WWW.TRIMBLE.COM

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES, OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

Contains:
FCC ID: JUP-R580
IC: 1756A-R580


 SEE OPERATIONS MANUAL
CAN ICES-3 (B) / NMB-3 (B)
CAN RSS-Gen / CNR-Gen

ASSEMBLED IN TAIWAN



INPUT VOLTAGE
5 VDC  2.0 A



code 碼: 
199020-01

