



FCC PART 15.247



TEST AND MEASUREMENT REPORT

For

Wi2Wi, Inc.

2107 N.1st Street, Ste.540,
San Jose, CA 95131, USA

FCC ID: U9R-W2CBW009DI
Model:W2CBW009-D

| | |
|--|--|
| Report Type: Original Report | Product Type: Wireless 802.11b/g and Bluetooth Module |
| Test Engineers: <u>Kevin Li</u> <i>Kevin Li</i> | |
| Report Number: <u>R1003233-247</u> | |
| Report Date: <u>2010-05-14</u> | |
| Reviewed By: <u>Victor Zhang</u> <i>Victor Zhang</i> | |
| Prepared By: <u>Test Engineer, RF Lead</u> | |
| (84) | Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164 |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

| | | |
|----------|--|-----------|
| 1 | General Description..... | 5 |
| 1.1 | Product Description for Equipment Under Test (EUT)..... | 5 |
| 1.2 | Mechanical Description of EUT..... | 5 |
| 1.3 | Objective..... | 5 |
| 1.4 | Related Submittal(s)/Grant(s)..... | 5 |
| 1.5 | Test Methodology..... | 5 |
| 1.6 | Measurement Uncertainty..... | 5 |
| 1.7 | Test Facility..... | 6 |
| 2 | System Test Configuration..... | 7 |
| 2.1 | Justification..... | 7 |
| 2.2 | EUT Exercise Software..... | 7 |
| 2.3 | Equipment Modifications..... | 7 |
| 2.4 | Special Accessories..... | 7 |
| 2.5 | Local Support Equipment..... | 7 |
| 2.6 | EUT Internal Configuration Details..... | 7 |
| 2.7 | Interface Ports and Cabling..... | 7 |
| 3 | Summary of Test Results..... | 8 |
| 4 | FCC §15.247 (i) & § 2.1091..... | 9 |
| 4.1 | Applicable Standard..... | 9 |
| 4.2 | MPE Prediction..... | 9 |
| 4.3 | MPE Results..... | 9 |
| 5 | FCC §15.203 – Antenna Requirements..... | 10 |
| 5.1 | Applicable Standard..... | 10 |
| 5.2 | Antenna Connector Construction..... | 10 |
| 6 | FCC §15.207 - Conducted Emissions..... | 11 |
| 6.1 | Applicable Standard..... | 11 |
| 6.2 | Test Setup..... | 11 |
| 6.3 | Test Equipment List and Details..... | 11 |
| 6.4 | Test Procedure..... | 12 |
| 6.5 | Test Setup Block Diagram..... | 12 |
| 6.6 | Corrected Amplitude & Margin Calculation..... | 12 |
| 6.7 | Test Environmental Conditions..... | 13 |
| 6.8 | Summary of Test Results..... | 13 |
| 6.9 | Conducted Emissions Test Plots and Data..... | 14 |
| 7 | FCC §2.1051 & §15.247(d) - Spurious Emissions at Antenna Terminals..... | 18 |
| 7.1 | Applicable Standard..... | 18 |
| 7.2 | Measurement Procedure..... | 18 |
| 7.3 | Test Equipment List and Details..... | 18 |
| 7.4 | Test Environmental Conditions..... | 18 |
| 7.5 | Measurement Result..... | 18 |
| 8 | FCC §15.205, §15.209 & §15.247(c) – Spurious Radiated Emissions..... | 28 |
| 8.1 | Applicable Standard..... | 28 |
| 8.2 | Test Setup..... | 29 |
| 8.3 | EUT Setup..... | 29 |
| 8.4 | Test Equipment List and Details..... | 29 |
| 8.5 | Test Procedure..... | 29 |
| 8.6 | Corrected Amplitude & Margin Calculation..... | 30 |
| 8.7 | Test Environmental Conditions..... | 30 |
| 8.8 | Summary of Test Results..... | 31 |
| | Radiated Emissions Test Result Data:..... | 32 |
| 9 | FCC §15.247(a)(2) – Channel Bandwidth..... | 47 |

9.1 Applicable Standard 47

9.2 Measurement Procedure 47

9.3 Test Equipment List and Details..... 47

9.4 Test Environmental Conditions 47

9.5 Summary of Test Results 48

10 FCC §15.247(b) - Peak Output Power Measurement 54

10.1 Applicable Standard 54

10.2 Measurement Procedure 54

10.3 Test Equipment List and Details..... 54

10.4 Test Environmental Conditions 54

10.5 Summary of Test Results 55

11 FCC §15.247(d) - 100 kHz Bandwidth of Band Edges..... 56

11.1 Applicable Standard 56

11.2 Measurement Procedure 56

11.3 Test Equipment List and Details..... 56

11.4 Test Environmental Conditions 56

11.5 Measurement Results..... 56

12 FCC §15.247(e) - Power Spectral Density..... 60

12.1 Applicable Standard 60

12.2 Measurement Procedure 60

12.3 Test Equipment List and Details..... 60

12.4 Test Environmental Conditions 60

12.5 Summary of Test Results 61

13 FCC §15.247(a)(1) - Hopping Channel Separation 65

13.1 Applicable Standard 65

13.2 Measurement Procedure 65

13.3 Test Equipment List and Details..... 65

13.4 Test Environmental Conditions 65

13.5 Measurement Results..... 66

14 FCC §15.247(a)(1)(iii) – Number of Hopping Frequencies Used 68

14.1 Applicable Standard 68

14.2 Measurement Procedure 68

14.3 Test Equipment List and Details..... 68

14.4 Test Environmental Conditions 68

14.5 Measurement Result 68

15 FCC §15.247(a)(1)(iii) - Dwell Time 70

15.1 Applicable Standard 70

15.2 Measurement Procedure 70

15.3 Test Equipment List and Details..... 70

15.4 Test Environmental Conditions 70

15.5 Measurement Results..... 71

16 Exhibit A - FCC Equipment Labeling Requirements..... 77

16.1 FCC ID Label Requirements 77

16.2 FCC ID Label and Label Location 77

17 Exhibit B - Test Setup Photographs 78

17.1 Radiated Emission below 1 GHz Front View @ 3 Meter..... 78

17.2 Radiated Emission below 1 GHz Rear View @ 3 Meter..... 78

17.3 Radiated Emission above 1 GHz Front View @ 3 Meter..... 79

17.4 Radiated Emission above 1 GHz Front View @ 3 Meter..... 79

17.5 AC Line Conducted Emission Front View 80

17.6 AC Line Conducted Emission Side View..... 80

18 Exhibit C - EUT Photographs..... 81

18.1 EUT – Top View 81

18.2 EUT – Bottom View 81

18.3 EUT on the Supporting Board View 1..... 82

18.4 EUT on the Supporting Board View 2..... 82

18.5 EUT without shielding View 83

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|------------------------|----------------------|--------------------------------|-------------------------|
| 0 | R1003233-247 | Original Report | 2010-05-14 |

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Wi2Wi, Inc.*, and their product FCC ID: U9R-W2CBW009DI, model: *W2CB2009-D* or the “EUT” as referred to in this report. The EUT is a Wireless 802.11b/g and Bluetooth module.

1.2 Mechanical Description of EUT

The “EUT” measures approximately *16.5mm (L) x 16.5mm (W) x 1mm (H)*.

** The test data gathered are from typical production sample, serial number: GCI-012067, provided by the manufacturer.*

1.3 Objective

This report is prepared on behalf of *Wi2Wi, Inc* in accordance with Part 2, Subpart J, and Part 15, Subparts B and C of the Federal Communication Commissions rules, June 2007.

The objective is to determine compliance with FCC rules.

1.4 Related Submittal(s)/Grant(s)

No Related Submittals.

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are: spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the values range from +2.0 for Conducted Emissions tests and +4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL.

Detailed instrumentation measurement uncertainties can be found in BACL report QAP-018.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.7 Test Facility

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test sites at BACL have been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission, Industry Canada, and Voluntary Control Council for Interference has the reports on file and is listed under FCC registration number: 90464, IC registration number: 3062A, and VCCI Registration Number: R-2463 and C-2698. The test site has been approved by the FCC, IC, and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2001670.htm>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.4-2003.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The EUT had been tested with the following data rate settings (worst case):

| Radio Mode | Frequency/Data rate | | |
|------------|---------------------|-------------------|---------------|
| | Low CH (MHz/Mbps) | Mid CH (MHz/Mbps) | High CH (MHz) |
| Bluetooth | 2402 | 2440 | 2480 |
| 802.11b | 2412/1 | 2437/1 | 2462/1 |
| 802.11g | 2412/6 | 2437/6 | 2462/6 |

2.3 Equipment Modifications

No modifications were made to the EUT.

2.4 Special Accessories

N/A

2.5 Local Support Equipment

| Manufacturer | Description | Model No. | Serial No. |
|--------------|-------------|-----------|------------|
| IBM | Laptop | T41 | - |

2.6 EUT Internal Configuration Details

| Manufacturers | Descriptions | Models | Serial Numbers |
|---------------|---------------------------------|------------|----------------|
| Wi2Wi, Inc | WiFi and Bluetooth PCB Assembly | W2CBW009-S | GCI-011958 |

2.7 Interface Ports and Cabling

| Cable Description | Length (m) | From | To |
|-------------------|------------|------|--------|
| USB cable | < 1m | EUT | Laptop |
| RF cable | < 1m | EUT | PSA |

3 Summary of Test Results

Results reported relate only to the product tested.

| FCC Rules | Description of Test | Results |
|----------------------------|--|-----------|
| §15.247 (i), §2.1091 | RF Exposure | Compliant |
| §15.203 | Antenna Requirement | Compliant |
| §15.207 (a) | Conducted Emissions | Compliant |
| §15.209, | Spurious Emissions at Antenna Port | Compliant |
| §15.205 | Restricted Bands | Compliant |
| §15.209 (a) §15.247 (d) | Radiated Spurious Emissions | Compliant |
| §15.247 (a)(2) | Channel Bandwidth | Compliant |
| §15.247 (b)(3) | Maximum Peak Output Power | Compliant |
| §15.247(a) (1) | Hopping Channel Separation | Compliant |
| §15.247(a)(1)(iii) | Number of Hopping Frequencies Used | Compliant |
| §15.247(a)(1)(iii) | Dwell Time | Compliant |
| §15.247 (d) | 100 kHz Bandwidth of Frequency Band Edge | Compliant |
| §15.247 (e) | Power Spectral Density | Compliant |

4 FCC §15.247 (i) & § 2.1091

4.1 Applicable Standard

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for General Population/Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

| | |
|---|--------------|
| <u>Maximum peak output power at antenna input terminal (dBm):</u> | <u>16.80</u> |
| <u>Maximum peak output power at antenna input terminal (mW):</u> | <u>47.86</u> |
| <u>Prediction distance (cm):</u> | <u>20</u> |
| <u>Prediction frequency (MHz):</u> | <u>2462</u> |
| <u>Maximum Antenna Gain, typical (dBi):</u> | <u>3.0</u> |
| <u>Maximum Antenna Gain (numeric):</u> | <u>1.995</u> |
| <u>Power density of prediction frequency at 20 cm (mW/cm²):</u> | <u>0.019</u> |
| <u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u> | <u>1.0</u> |

The device is compliant with the requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.019 mW/cm², limit is 1.0 mW/cm².

5 FCC §15.203 – Antenna Requirements

5.1 Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Antenna Connector Construction

EUT has one Transmitter/Receiver antennae which is permanent attachment to the EUT chassis as well as non-standard connector. The Transmitter antenna has a max gain of 3 dBi which fulfills the requirements of FCC §15.203.

| Frequency Band | Antenna Gain (dBi) |
|----------------------|--------------------|
| 2.4 GHz ~ 2.4835 GHz | 3.0 |

6 FCC §15.207 - Conducted Emissions

6.1 Applicable Standard

As per FCC Section 15.207, For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|--------------------------------|------------------------|------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 * | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.4-2003 measurement procedure. The specification used was FCC Part15.207 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the Supporting Laptop which connects the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|-------------------|-------------------|-------------------|------------|------------------|
| Solar Electronics | LISN | 9252-R-24-BNC | 511205 | 2009-07-31 |
| Rohde & Schwarz | EMI Test Receiver | ESCI 1166.5950K03 | 100337 | 2009-07-23 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.


6.4 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the peak detection mode, quasi-peak and average. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

6.5 Test Setup Block Diagram

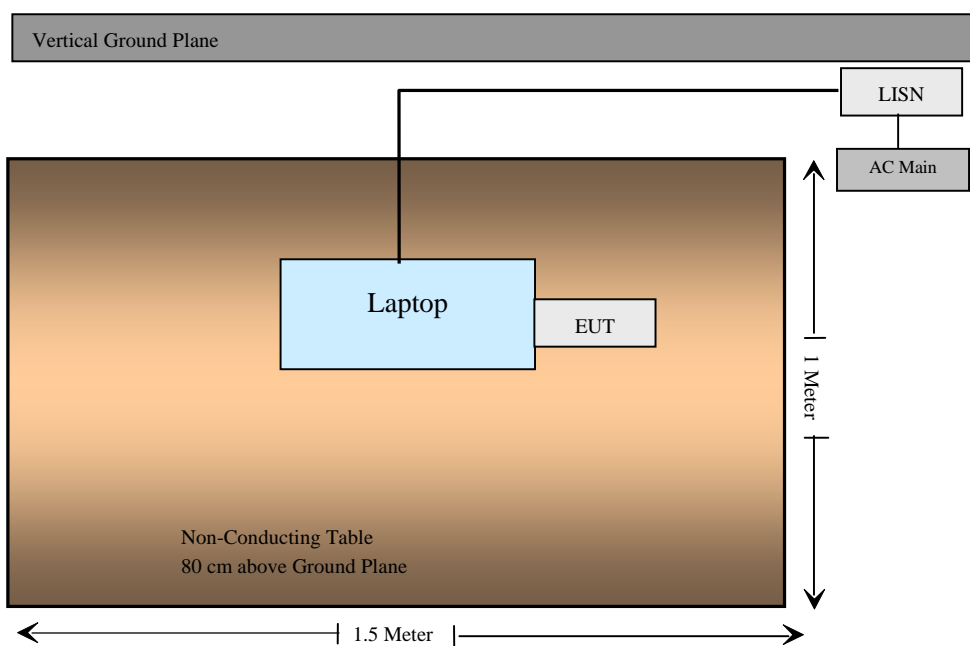

6.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Cable Loss, and Attenuator Factor adding to the Indicated Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Reading} + \text{Cable Loss} + \text{Attenuator Factor}$$

For example, a Corrected Amplitude of 34.08 dBuV/m = Indicated Reading (23.85 dBuV) + Cable Factor (0.22 dB) + Attenuator Factor (10 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.7 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

*The testing was performed by Kevin Li on 05-03-201 in 5 meter chamber 3.

6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC standard's conducted emissions limits, with the margin reading of:

Wi-Fi:

Worst case: 802.11b – High Channel, Transmitting Mode

| Connection: AC/DC adapter connected to 120 V/60 Hz, AC | | | |
|--|-----------------|--------------------------|-------------|
| Margin (dB) | Frequency (MHz) | Conductor (Line/Neutral) | Range (MHz) |
| -9.24 | 0.199254 | Line | 0.15 to 30 |

Bluetooth:


Worst Case: Bluetooth – High Channel Transmitting Mode

| Connection: AC/DC adapter connected to 120 V/60 Hz, AC | | | |
|--|-----------------|--------------------------|-------------|
| Margin (dB) | Frequency (MHz) | Conductor (Line/Neutral) | Range (MHz) |
| -9.62 | 0.197901 | Neutral | 0.15 to 30 |

6.9 Conducted Emissions Test Plots and Data

120 V, 60 Hz – Line

802.11 b mode High channel (2462 MHz)

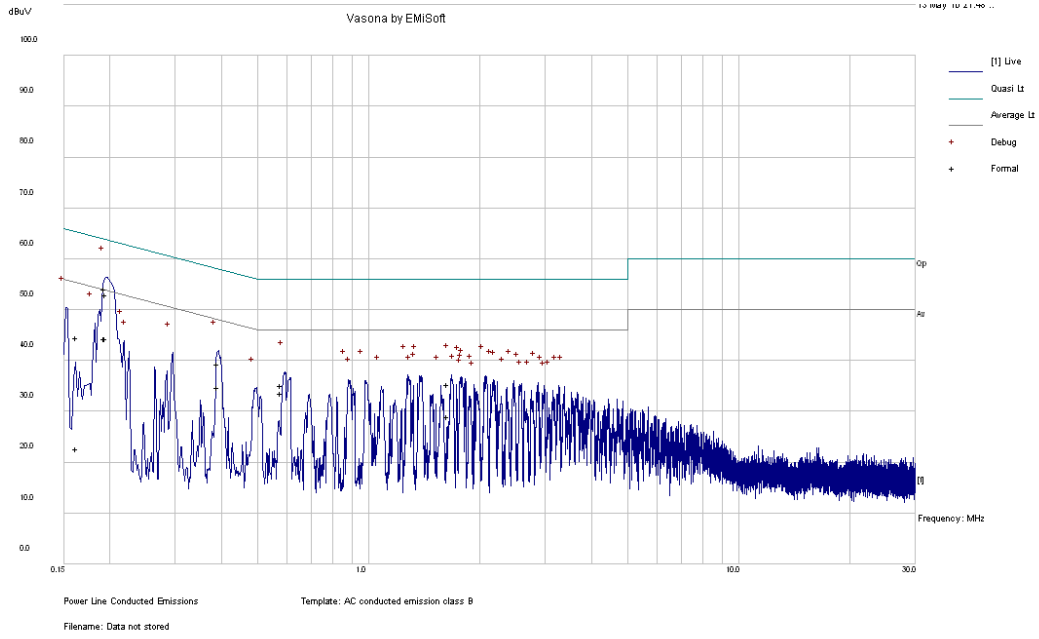

Quasi-Peak Measurements


| Frequency (MHz) | Corrected Amplitude (dBµV) | Conductor (Line/ Neutral) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.199254 | 53.01 | Line | 63.64 | -10.63 |
| 0.165348 | 44.51 | Line | 65.19 | -20.69 |
| 0.397915 | 39.37 | Line | 57.9 | -18.53 |
| 0.197086 | 54.11 | Line | 63.73 | -9.63 |
| 0.590065 | 35.16 | Line | 56 | -20.84 |
| 1.669627 | 35.44 | Line | 56 | -20.56 |

Average Measurements

| Frequency (MHz) | Corrected Amplitude (dBµV) | Conductor (Line/ Neutral) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.199254 | 44.4 | Line | 53.64 | -9.24 |
| 0.165348 | 22.71 | Line | 55.19 | -32.49 |
| 0.397915 | 34.75 | Line | 47.9 | -13.15 |
| 0.197086 | 44.3 | Line | 53.73 | -9.44 |
| 0.590065 | 33.56 | Line | 46 | -12.44 |
| 1.669627 | 28.97 | Line | 46 | -17.03 |

120 V, 60 Hz – Neutral

802.11 b mode High channel (2462 MHz)

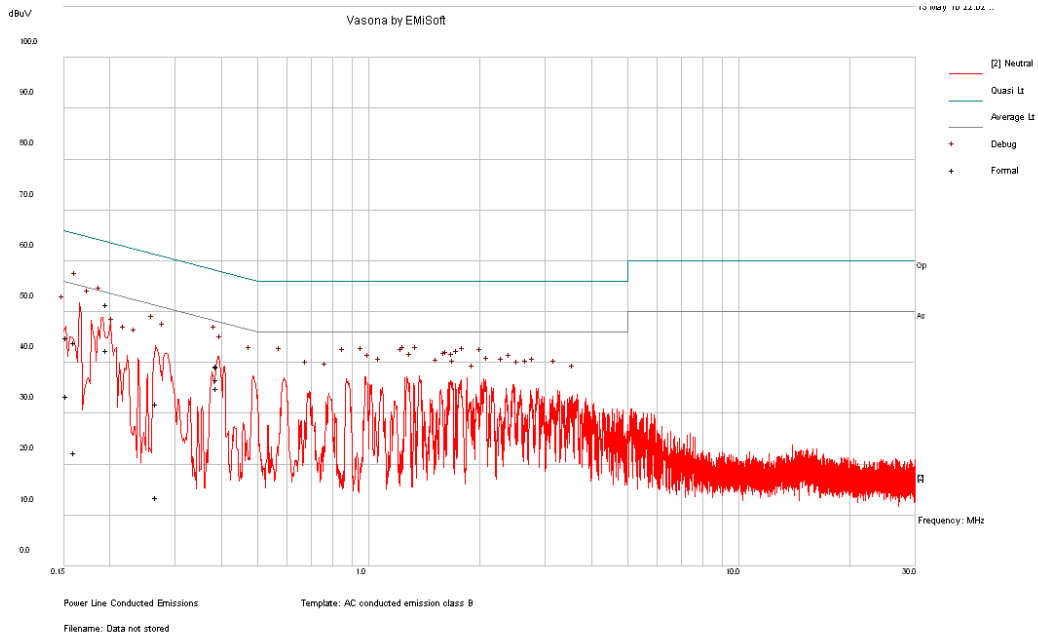

Quasi-Peak Measurements


| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/ Neutral) | Limit (dBμV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.155474 | 44.98 | Neutral | 65.7 | -20.72 |
| 0.199393 | 51.36 | Neutral | 63.64 | -12.27 |
| 0.163799 | 43.91 | Neutral | 65.27 | -21.36 |
| 0.396554 | 39.24 | Neutral | 57.93 | -18.69 |
| 0.271979 | 31.82 | Neutral | 61.06 | -29.23 |
| 0.395739 | 39.39 | Neutral | 57.94 | -18.55 |

Average Measurements

| Frequency (MHz) | Corrected Amplitude (dBμV) | Conductor (Line/ Neutral) | Limit (dBμV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.155474 | 33.41 | Neutral | 55.7 | -22.3 |
| 0.199393 | 42.51 | Neutral | 53.64 | -11.12 |
| 0.163799 | 22.26 | Neutral | 55.27 | -33.01 |
| 0.396554 | 34.89 | Neutral | 47.93 | -13.04 |
| 0.271979 | 13.6 | Neutral | 51.06 | -37.46 |
| 0.395739 | 36.68 | Neutral | 47.94 | -11.26 |

120 V, 60 Hz – Line

Bluetooth High channel (2480MHz)

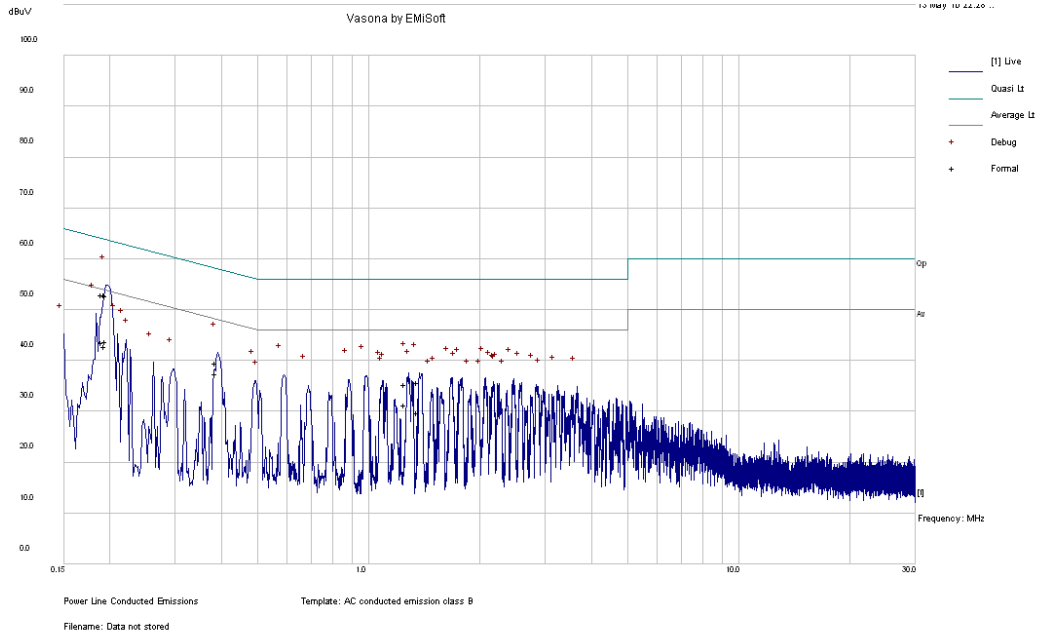

Quasi-Peak Measurements


| Frequency (MHz) | Corrected Amplitude (dBµV) | Conductor (Line/ Neutral) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.197088 | 53 | Line | 63.73 | -10.73 |
| 0.198357 | 52.83 | Line | 63.68 | -10.85 |
| 0.395042 | 39.54 | Line | 57.96 | -18.41 |
| 0.194468 | 52.99 | Line | 63.84 | -10.85 |
| 1.274157 | 35.42 | Line | 56 | -20.58 |
| 1.379458 | 35.79 | Line | 56 | -20.21 |

Average Measurements

| Frequency (MHz) | Corrected Amplitude (dBµV) | Conductor (Line/ Neutral) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.197088 | 42.88 | Line | 53.73 | -10.85 |
| 0.198357 | 43.7 | Line | 53.68 | -9.97 |
| 0.395042 | 37.49 | Line | 47.96 | -10.47 |
| 0.194468 | 43.59 | Line | 53.84 | -10.25 |
| 1.274157 | 31.39 | Line | 46 | -14.61 |
| 1.379458 | 29.87 | Line | 46 | -16.13 |

120 V, 60 Hz – Neutral

Bluetooth High channel (2480MHz)

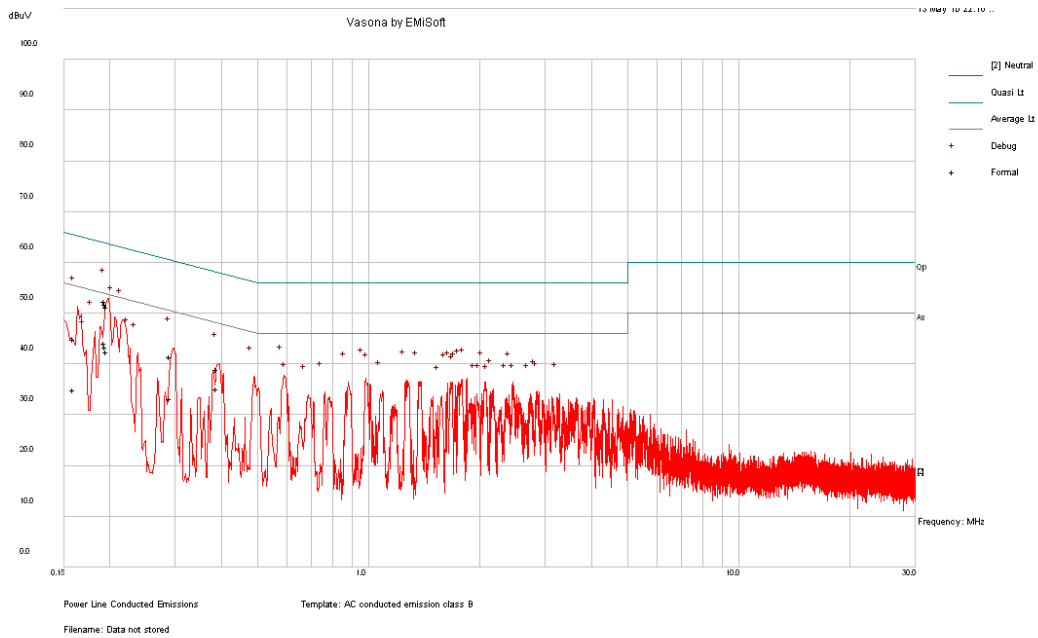

Quasi-Peak Measurements

| Frequency (MHz) | Corrected Amplitude (dBµV) | Conductor (Line/ Neutral) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.198672 | 51.91 | Neutral | 63.67 | -11.75 |
| 0.162933 | 44.91 | Neutral | 65.31 | -20.4 |
| 0.197901 | 52.34 | Neutral | 63.7 | -11.36 |
| 0.199572 | 51.3 | Neutral | 63.63 | -12.33 |
| 0.296499 | 41.45 | Neutral | 60.34 | -18.89 |
| 0.397477 | 39.08 | Neutral | 57.91 | -18.83 |

Average Measurements

| Frequency (MHz) | Corrected Amplitude (dBµV) | Conductor (Line/ Neutral) | Limit (dBµV) | Margin (dB) |
|-----------------|----------------------------|---------------------------|--------------|-------------|
| 0.198672 | 43.49 | Neutral | 53.67 | -10.17 |
| 0.162933 | 35.04 | Neutral | 55.31 | -20.27 |
| 0.197901 | 44.08 | Neutral | 53.7 | -9.62 |
| 0.199572 | 42.37 | Neutral | 53.63 | -11.26 |
| 0.296499 | 33.25 | Neutral | 50.34 | -17.09 |
| 0.397477 | 35.15 | Neutral | 47.91 | -12.76 |

7 FCC §2.1051 & §15.247(d) - Spurious Emissions at Antenna Terminals

7.1 Applicable Standard

As per FCC §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

7.2 Measurement Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

7.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|-------------------|-----------|------------|------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2009-07-23 |

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

7.4 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |



**The testing was performed by Kevin Li on 05-03-2010 in RF site.*

7.5 Measurement Result



Please refer to following plots of spurious emissions.

Wi-Fi 802.11 b/g mode:



802.11 b, Low Channel 2412 MHz

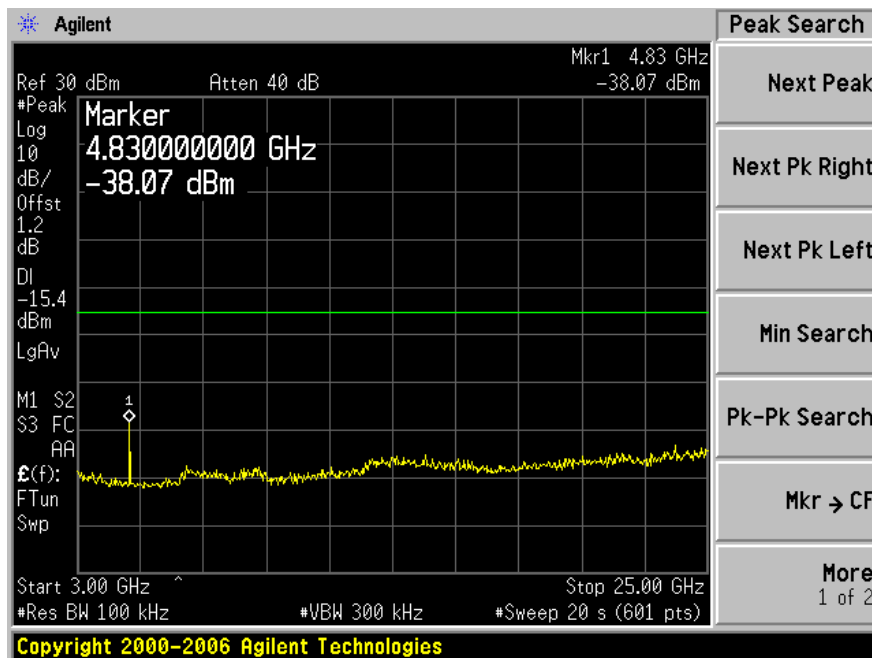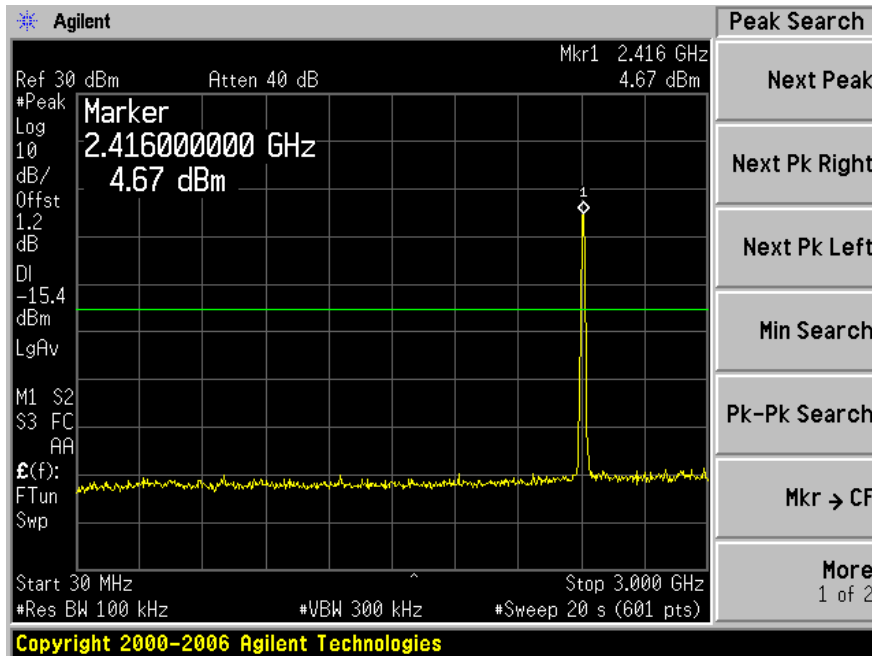



802.11 b, Middle Channel 2437 MHz

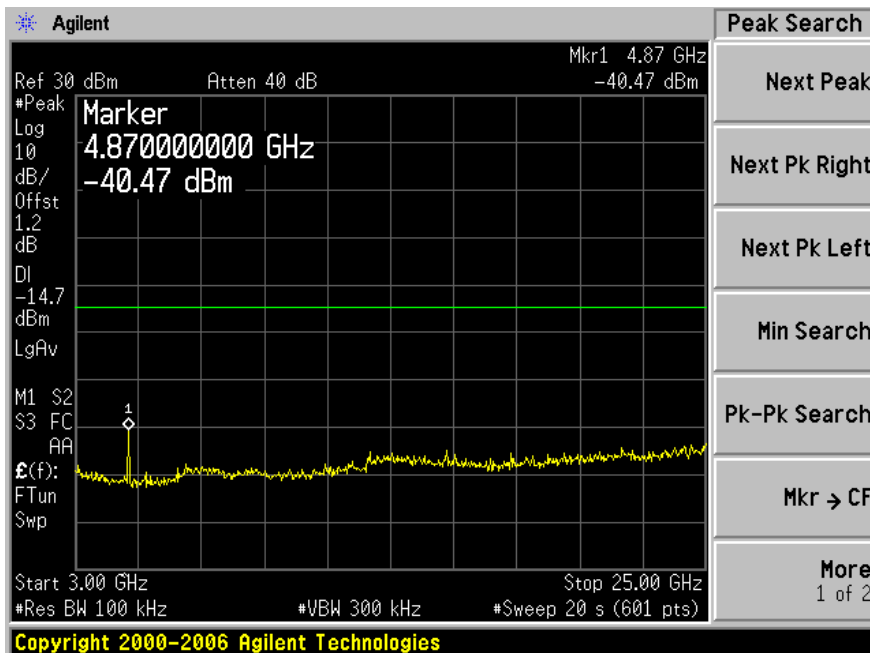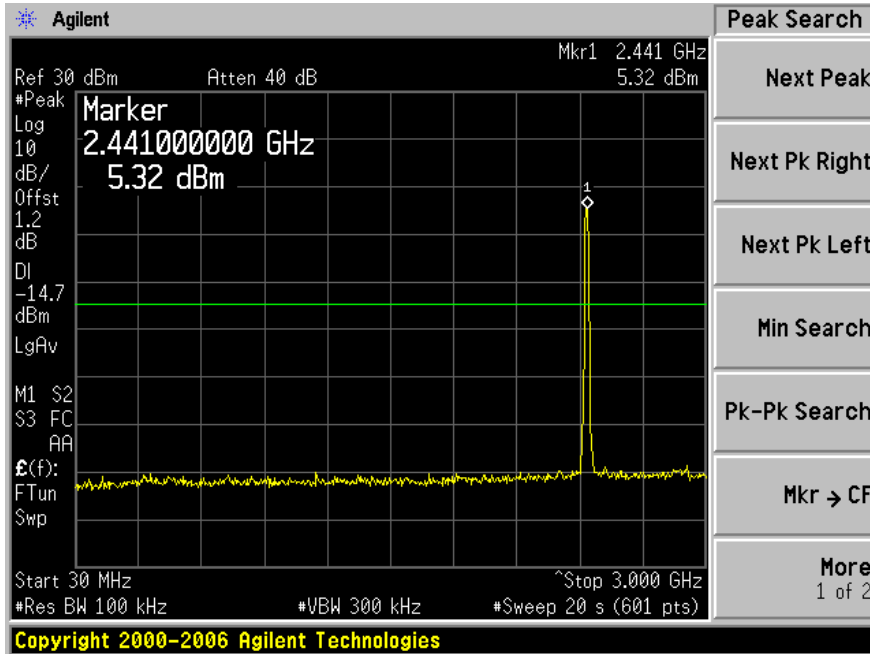



802.11 b, High Channel 2462 MHz

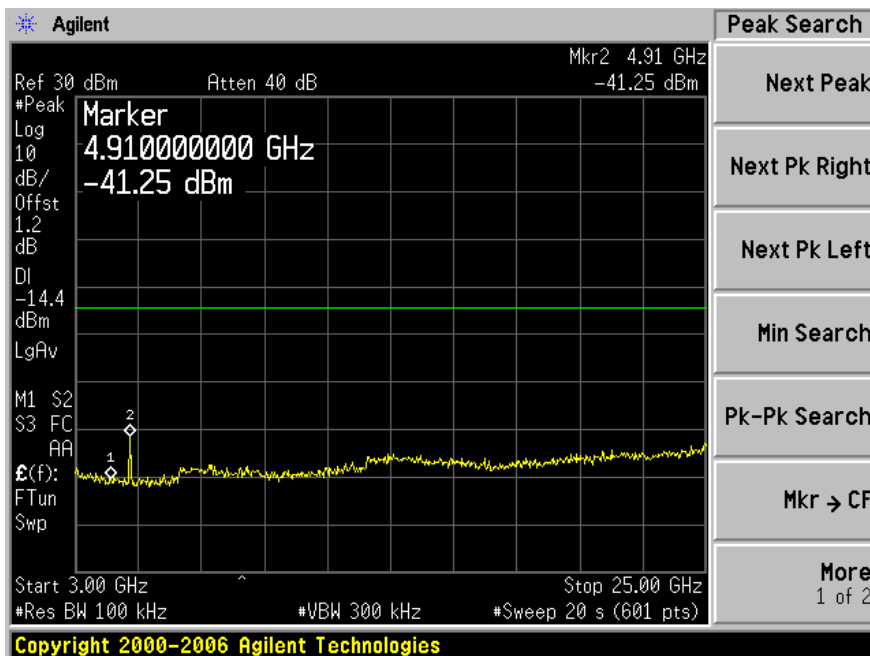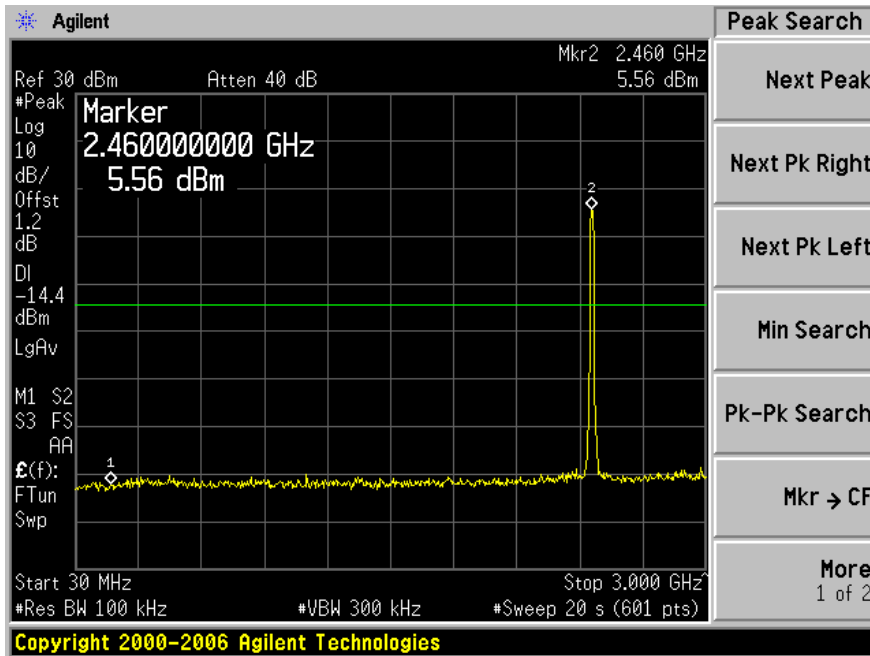



802.11 g, Low Channel 2412 MHz

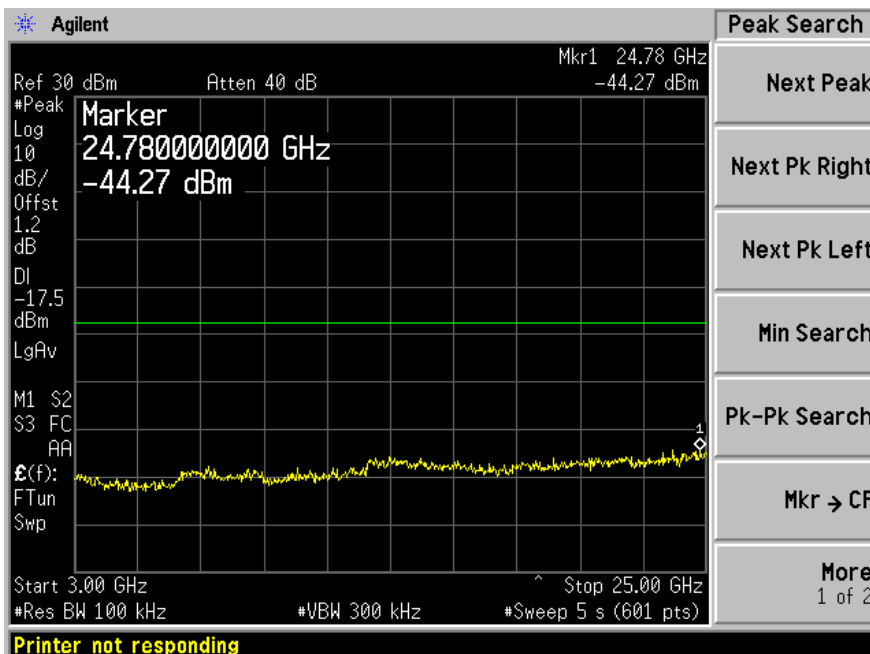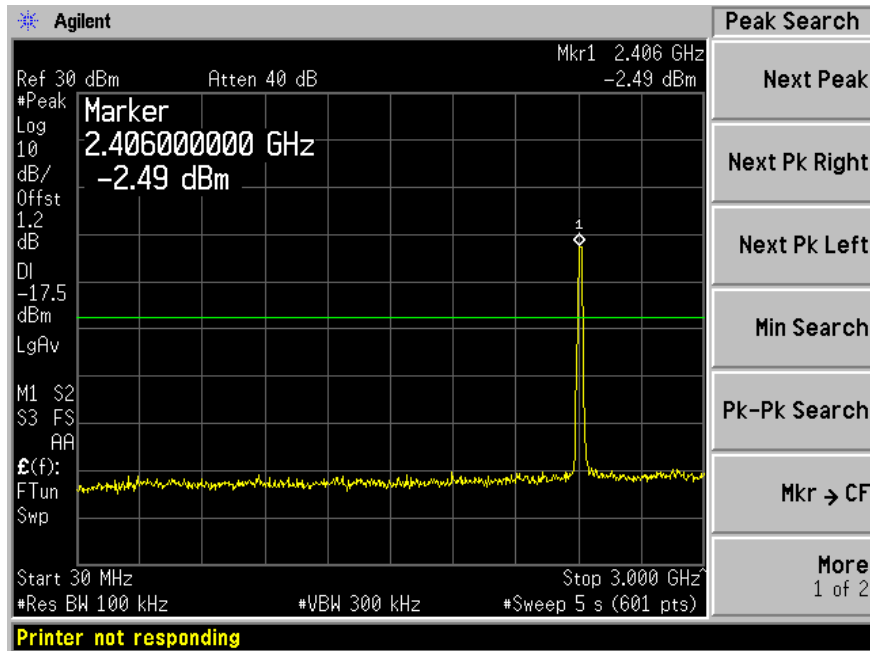

802.11 g, Middle Channel 2437 MHz

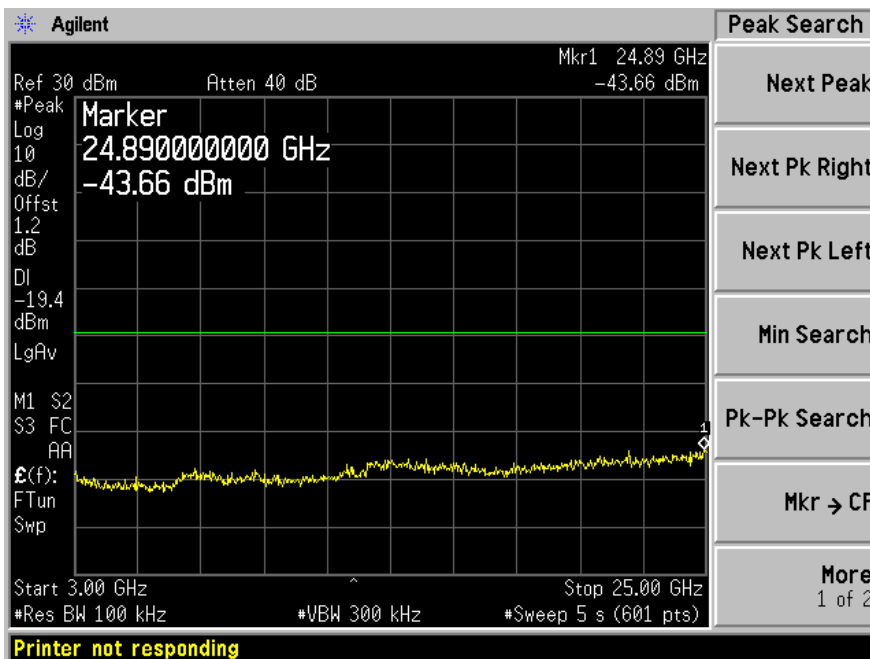
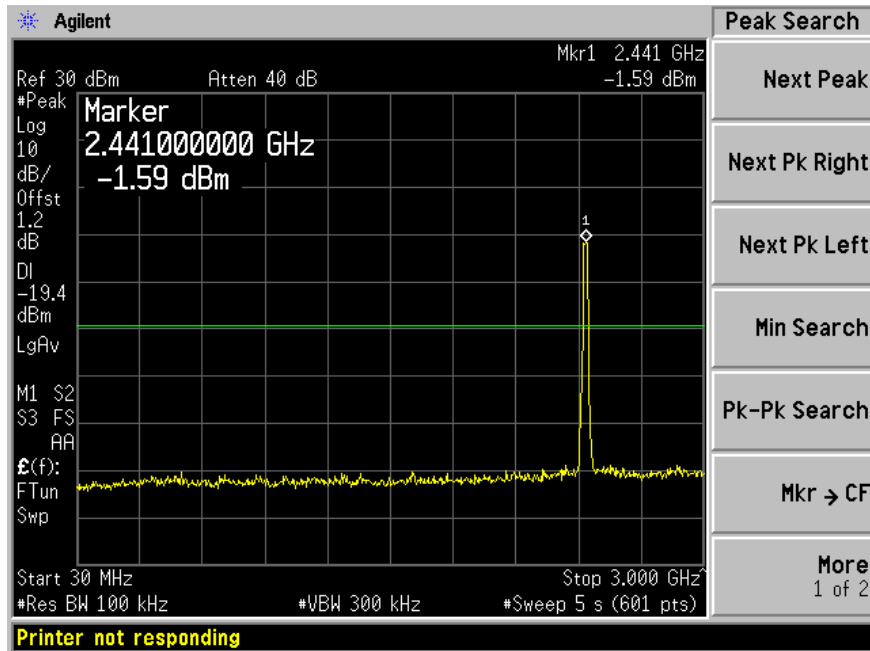


802.11 g, High Channel 2462 MHz

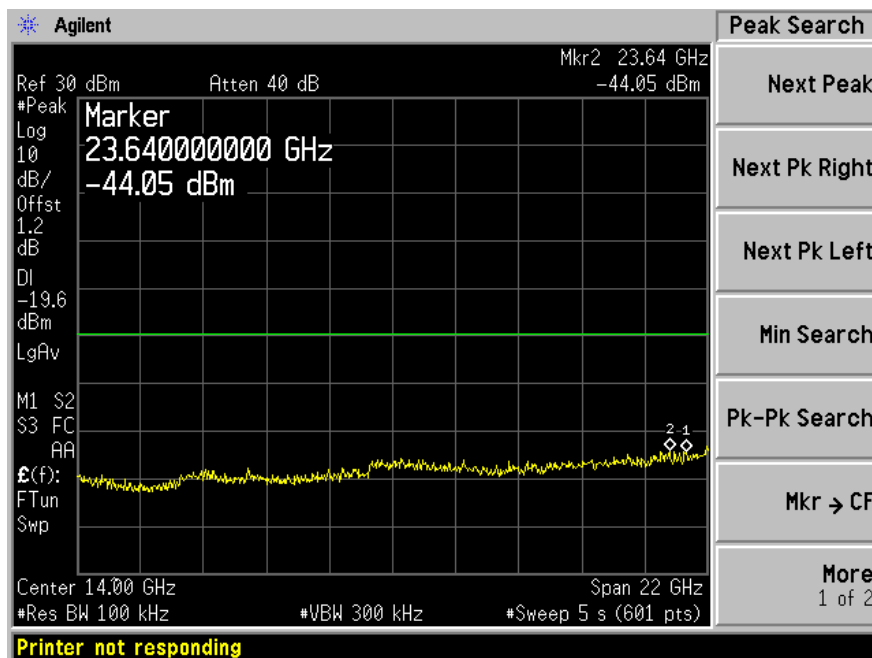
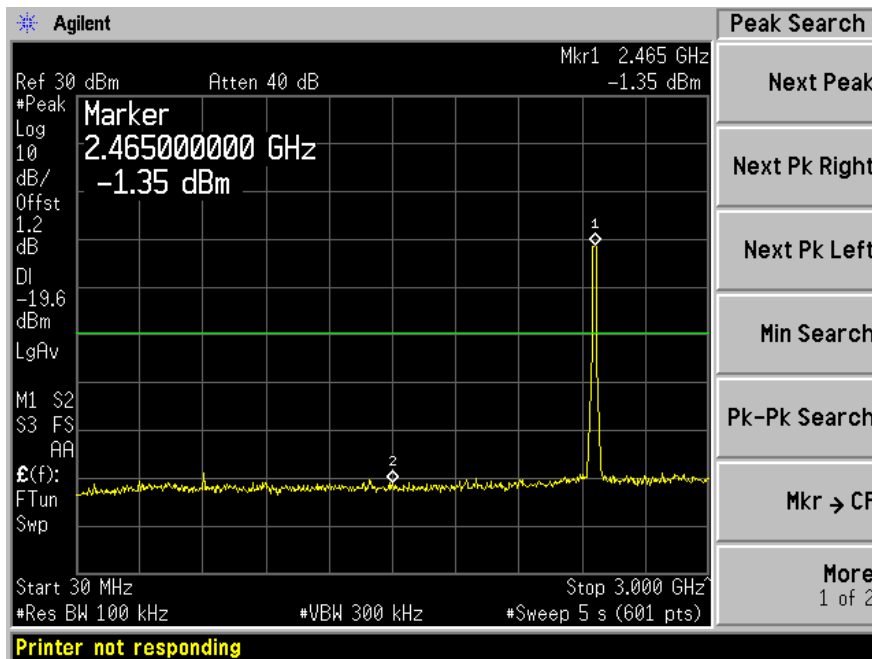


Bluetooth Mode:



Low Channel 2402 MHz

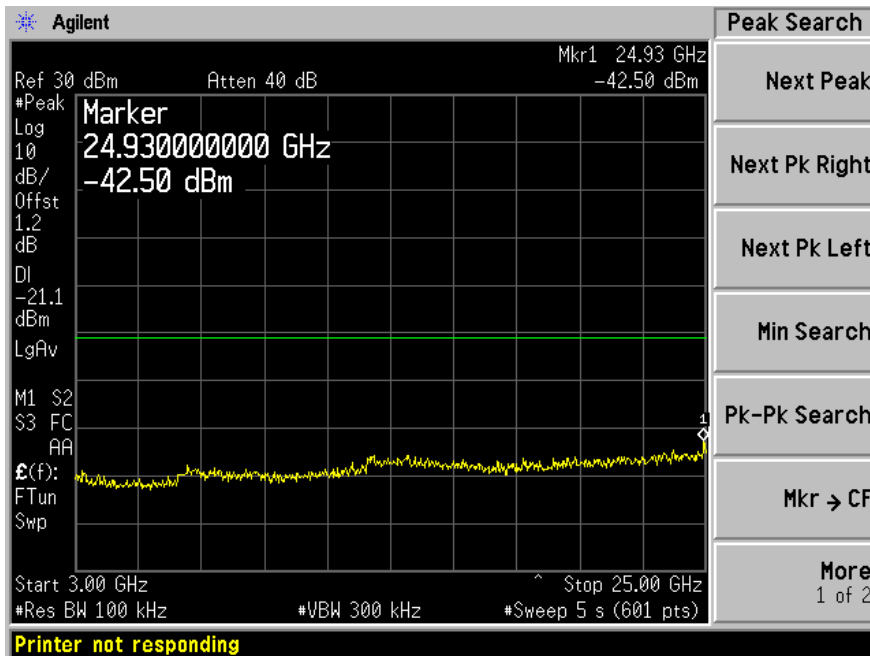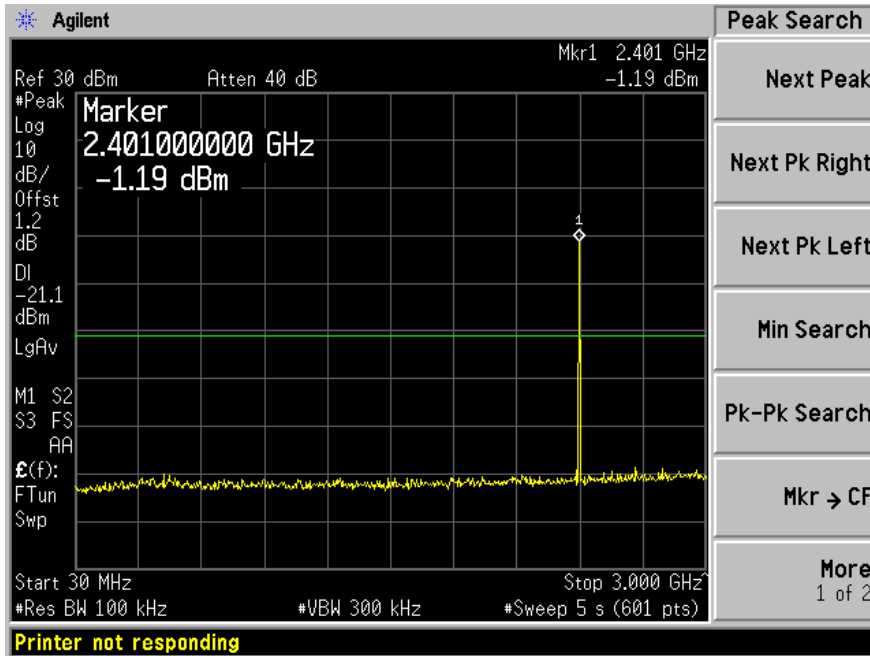

Middle Channel 2442 MHz

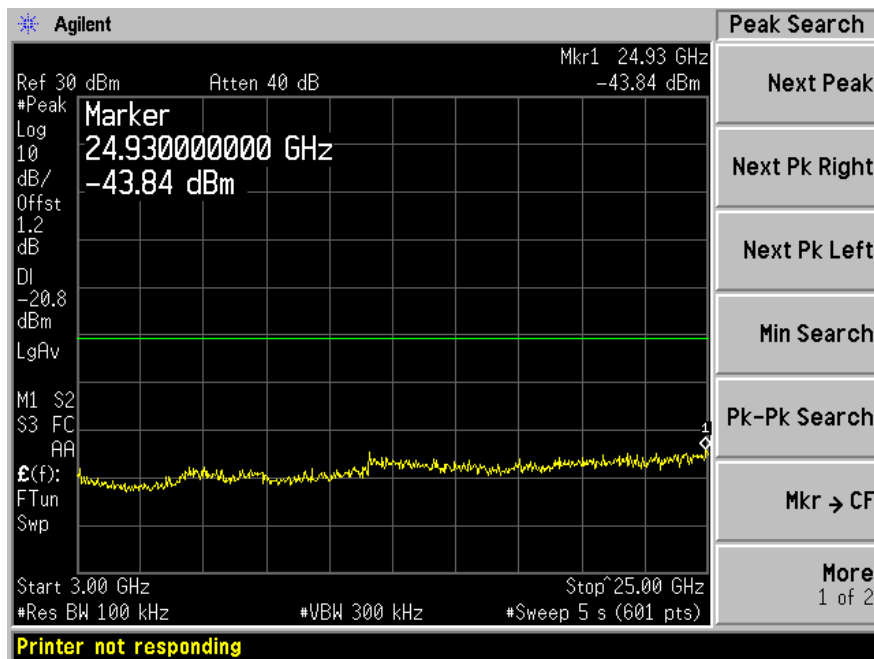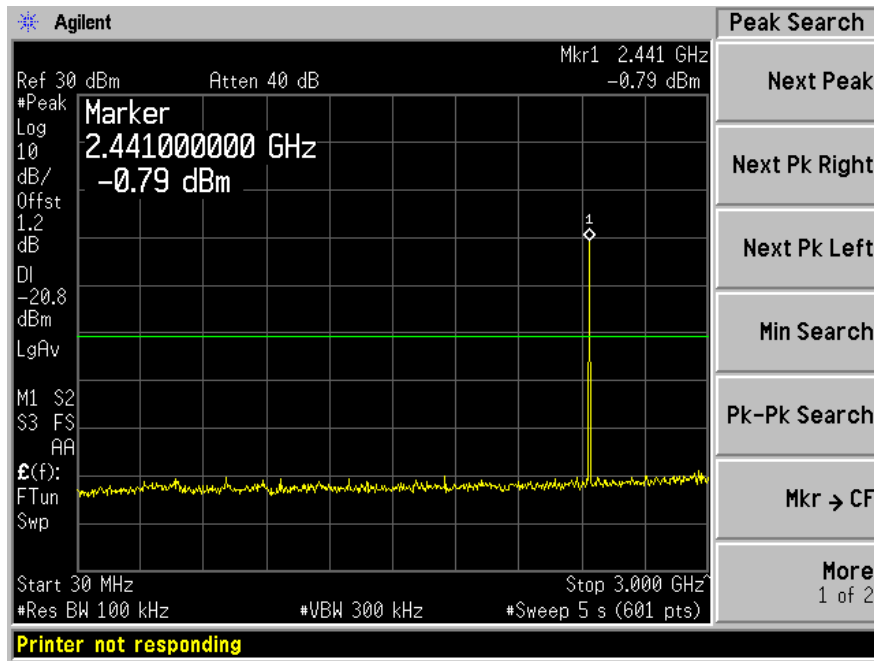

High Channel 2480 MHz

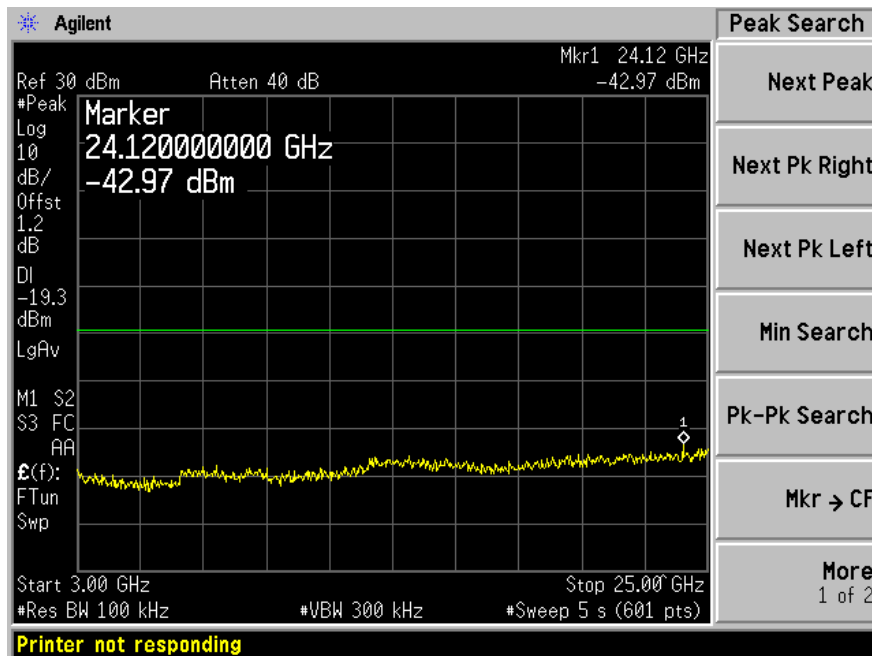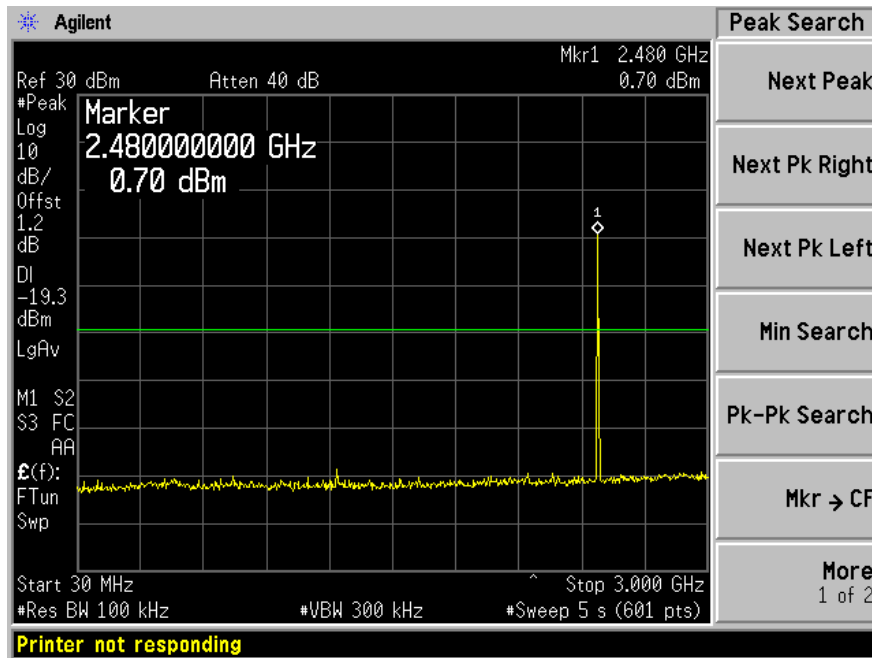

8 FCC §15.205, §15.209 & §15.247(c) – Spurious Radiated Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

| Frequency (MHz) | Field Strength (micro volts/meter) | Measurement Distance (meters) |
|-----------------|------------------------------------|-------------------------------|
| 0.009 - 0.490 | 2400/F(kHz) | 300 |
| 0.490 - 1.705 | 24000/F(kHz) | 30 |
| 1.705 - 30.0 | 30 | 30 |
| 30 - 88 | 100** | 3 |
| 88 - 216 | 150** | 3 |
| 216 - 960 | 200** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 – 0.110 | 16.42 – 16.423 | 960 – 1240 | 4.5 – 5.15 |
| 0.495 – 0.505 | 16.69475 – 16.69525 | 1300 – 1427 | 5.35 – 5.46 |
| 2.1735 – 2.1905 | 25.5 – 25.67 | 1435 – 1626.5 | 7.25 – 7.75 |
| 4.125 – 4.128 | 37.5 – 38.25 | 1645.5 – 1646.5 | 8.025 – 8.5 |
| 4.17725 – 4.17775 | 73 – 74.6 | 1660 – 1710 | 9.0 – 9.2 |
| 4.20725 – 4.20775 | 74.8 – 75.2 | 1718.8 – 1722.2 | 9.3 – 9.5 |
| 6.215 – 6.218 | 108 – 121.94 | 2200 – 2300 | 10.6 – 12.7 |
| 6.26775 – 6.26825 | 123 – 138 | 2310 – 2390 | 13.25 – 13.4 |
| 6.31175 – 6.31225 | 149.9 – 150.05 | 2483.5 – 2500 | 14.47 – 14.5 |
| 8.291 – 8.294 | 156.52475 – 156.52525 | 2690 – 2900 | 15.35 – 16.2 |
| 8.362 – 8.366 | 156.7 – 156.9 | 3260 – 3267 | 17.7 – 21.4 |
| 8.37625 – 8.38675 | 162.0125 – 167.17 | 3.332 – 3.339 | 22.01 – 23.12 |
| 8.41425 – 8.41475 | 167.72 – 173.2 | 3 3458 – 3 358 | 23.6 – 24.0 |
| 12.29 – 12.293 | 240 – 285 | 3.600 – 4.400 | 31.2 – 31.8 |
| 12.51975 – 12.52025 | 322 – 335.4 | | 36.43 – 36.5 |
| 12.57675 – 12.57725 | 399.9 – 410 | | Above 38.6 |
| 13.36 – 13.41 | 608 – 614 | | |

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the

intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.4-2003. The specification used was the FCC 15 Subpart C limits.

8.3 EUT Setup

The radiated emissions tests were performed using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

8.4 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|---------------------|---------------------|-------------|------------|------------------|
| HP | Pre amplifier | 8449B | 3147A00400 | 2010-02-01 |
| Sunol Science Corp. | Combination Antenna | JB1 Antenna | A103105-3 | 2009-06-25 |
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |
| A. H. Systems | Antenna, Horn | SAS-200/571 | 261 | 2009-09-23 |

* **Statement of Traceability:** BACL attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

8.5 Test Procedure

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

The spectrum analyzer or receiver is set as:

Below 1000 MHz:

$$RBW = 100 \text{ kHz} / VBW = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

8.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Cable Loss, and Attenuator Factor adding to the Indicated Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Indicated Reading} + \text{Cable Loss} + \text{Attenuator Factor}$$

For example, a Corrected Amplitude of 34.08 dBuV/m = Indicated Reading (23.85 dBuV) + Cable Factor (0.22 dB) + Attenuator Factor (10 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

8.7 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 21~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

**The testing was performed by Kevin Li on 05-08-2010 in 5 meter chamber 3.*

8.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247 standard's radiated emissions limits, and had the worst margin of:

802.11 b/g mode:

30-1000 MHz:

| Mode: Transmitting | | | |
|--------------------|-----------------|------------------------------------|--------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range |
| -0.02 | 182.2526 | Horizontal | High, 30MHz – 1GHz |

Above 1GHz:

| Mode: Transmitting | | | |
|--------------------|-----------------|------------------------------------|--------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range |
| -3.63 | 4924 | Vertical | High, 1GHz – 25GHz |

Bluetooth mode:

30-1000 MHz:

| Mode: Transmitting | | | |
|--------------------|-----------------|------------------------------------|-------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range |
| -3.7 | 182.2256 | Vertical | Low, 30MHz – 1GHz |

Above 1GHz:

| Mode: Transmitting | | | |
|--------------------|-----------------|------------------------------------|-------------------|
| Margin (dB) | Frequency (MHz) | Polarization (Horizontal/Vertical) | Channel, Range |
| -16.68 | 1330 | Vertical | Low, 1GHz – 25GHz |

Please refer to the following table and plots for specific test result details

Radiated Emissions Test Result Data:**Radiated Emission at 3 meters, 30 MHz – 1 GHz****Wi-Fi:**

802.11 b Mode -High channel (2462 MHz)

| Frequency (MHz) | Corrected Amplitude (dBµV/m) | Test Antenna | | Turntable Azimuth (degrees) | Limit (dBµV/m) | Margin (dB) |
|-----------------|------------------------------|--------------|----------------|-----------------------------|----------------|-------------|
| | | Height (cm) | Polarity (H/V) | | | |
| 182.2526 | 43.48 | 258 | H | 23 | 43.5 | -0.02 |
| 347.9334 | 34.96 | 234 | H | 145 | 46 | -11.04 |
| 381.1801 | 24.25 | 93 | H | 88 | 46 | -21.75 |
| 281.781 | 25.83 | 234 | H | 36 | 46 | -20.17 |
| 383.0387 | 16.09 | 270 | H | 290 | 46 | -29.91 |
| 149.3114 | 13.4 | 304 | H | 234 | 43.5 | -30.1 |

802.11g Mode - High channel (2462 MHz)

| Frequency (MHz) | Corrected Amplitude (dBµV/m) | Test Antenna | | Turntable Azimuth (degrees) | Limit (dBµV/m) | Margin (dB) |
|-----------------|------------------------------|--------------|----------------|-----------------------------|----------------|-------------|
| | | Height (cm) | Polarity (H/V) | | | |
| 182.2228 | 41.5 | 279 | H | 182 | 43.5 | -2.0 |
| 281.3661 | 22.16 | 248 | H | 222 | 46 | -23.84 |
| 347.855 | 20.92 | 230 | H | 62 | 46 | -25.08 |
| 349.8305 | 24.71 | 99 | H | 64 | 46 | -21.29 |
| 149.8725 | 35.73 | 101 | H | 120 | 43.5 | -7.77 |
| 382.1213 | 30.46 | 154 | H | 133 | 46 | -15.54 |

Bluetooth:

High Channel (2480 MHz)

| Frequency (MHz) | Corrected Amplitude (dBµV/m) | Test Antenna | | Turntable Azimuth (degrees) | Limit (dBµV/m) | Margin (dB) |
|-----------------|------------------------------|--------------|----------------|-----------------------------|----------------|-------------|
| | | Height (cm) | Polarity (H/V) | | | |
| 182.2256 | 39.8 | 279 | H | 182 | 43.5 | -3.7 |
| 281.749 | 21.49 | 248 | H | 222 | 46 | -24.51 |
| 347.908 | 18.33 | 230 | H | 62 | 46 | -27.67 |
| 349.2571 | 22.12 | 99 | H | 64 | 46 | -23.88 |
| 149.6718 | 32.28 | 101 | H | 120 | 43.5 | -11.22 |

Radiated Emission at 3 meters, 1 GHz – 25 GHz

802.11 b Mode

| Frequency (MHz) | S.A. Reading (dBµV) | Turntable Azimuth (degrees) | Test Antenna | | | Cable Loss (dB) | Pre-Amp. (dB) | Cord. Reading (dBµV/m) | Part 15C | | Comments |
|--|---------------------|-----------------------------|--------------|----------------|---------------|-----------------|---------------|------------------------|----------------|-------------|----------|
| | | | Height (m) | Polarity (H/V) | Factor (dB/m) | | | | Limit (dBµV/m) | Margin (dB) | |
| Low Channel 2412 MHz, measured at 3 meters | | | | | | | | | | | |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| Middle channel 2437 MHz measured at 3 meters | | | | | | | | | | | |
| 1330 | 60.69 | 152 | 100 | V | 28.61 | 5.34 | 36.47 | 58.17 | 74 | -15.83 | peak |
| 1330 | 52.17 | 264 | 100 | H | 28.61 | 5.34 | 36.47 | 49.65 | 74 | -24.35 | peak |
| 1330 | 33.5 | 152 | 100 | V | 28.61 | 5.34 | 36.47 | 30.98 | 54 | -23.02 | Ave |
| 1330 | 33.88 | 264 | 100 | H | 28.61 | 5.34 | 36.47 | 31.36 | 54 | -22.64 | Ave |
| High channel 2462 MHz measured at 3 meters | | | | | | | | | | | |
| 4924 | 53.35 | 27 | 141 | V | 33.3 | 8 | 36.54 | 58.11 | 74 | -15.89 | peak |
| 4924 | 51.05 | 216 | 100 | H | 33.3 | 8 | 36.54 | 55.81 | 74 | -18.19 | peak |
| 4924 | 29.93 | 27 | 141 | V | 33.3 | 8 | 36.54 | 50.37 | 54 | -3.63 | Ave |
| 4924 | 45.57 | 216 | 100 | H | 33.3 | 8 | 36.54 | 50.33 | 54 | -3.67 | Ave |

802.11g Mode:

| Frequency (MHz) | S.A. Reading (dBµV) | Turntable Azimuth (degrees) | Test Antenna | | | Cable Loss (dB) | Pre-Amp. (dB) | Cord. Reading (dBµV/m) | Part 15C | | Comments |
|--|---------------------|-----------------------------|--------------|----------------|---------------|-----------------|---------------|------------------------|----------------|-------------|----------|
| | | | Height (m) | Polarity (H/V) | Factor (dB/m) | | | | Limit (dBµV/m) | Margin (dB) | |
| Low Channel 2412 MHz, measured at 3 meters | | | | | | | | | | | |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| Middle channel 2437 MHz measured at 3 meters | | | | | | | | | | | |
| 1330 | 59.62 | 0 | 100 | V | 28.61 | 5.34 | 36.47 | 57.1 | 74 | -16.9 | peak |
| 1330 | 45.62 | 130 | 133 | H | 28.61 | 5.34 | 36.47 | 43.1 | 74 | -30.9 | peak |
| 1330 | 34.1 | 0 | 100 | V | 28.61 | 5.34 | 36.47 | 31.58 | 54 | -22.42 | Ave |
| 1330 | 32.8 | 262 | 100 | H | 28.61 | 5.34 | 36.47 | 30.28 | 54 | -23.72 | Ave |
| High channel 2462 MHz measured at 3 meters | | | | | | | | | | | |
| 1330 | 60.01 | 145 | 100 | V | 33.3 | 8 | 36.54 | 64.77 | 74 | -9.23 | peak |
| 1330 | 50.78 | 269 | 100 | H | 33.3 | 8 | 36.54 | 55.54 | 74 | -18.46 | peak |
| 1330 | 33.56 | 145 | 100 | V | 33.3 | 8 | 36.54 | 38.32 | 54 | -15.68 | Ave |
| 1330 | 32.76 | 269 | 100 | H | 33.3 | 8 | 36.54 | 37.52 | 54 | -16.48 | Ave |

Note: * All emissions are 20 dB below the limit and/or under the noise floor level.


Bluetooth:

| Frequency (MHz) | S.A. Reading (dBµV) | Turntable Azimuth (degrees) | Test Antenna | | | Cable Loss (dB) | Pre-Amp. (dB) | Cord. Reading (dBµV/m) | Part 15C | | Comments |
|--|---------------------|-----------------------------|--------------|----------------|---------------|-----------------|---------------|------------------------|----------------|-------------|----------|
| | | | Height (m) | Polarity (H/V) | Factor (dB/m) | | | | Limit (dBµV/m) | Margin (dB) | |
| Low Channel 2402 MHz, measured at 3 meters | | | | | | | | | | | |
| 1330 | 59.82 | 0 | 100 | V | 28.31 | 5.31 | 36.48 | 56.96 | 74 | -17.04 | peak |
| 1330 | 50.96 | 264 | 100 | H | 28.31 | 5.31 | 36.48 | 48.1 | 74 | -25.9 | peak |
| 1330 | 37.96 | 0 | 100 | V | 28.31 | 5.31 | 36.48 | 35.1 | 54 | -18.9 | Ave |
| 1330 | 34.37 | 264 | 100 | H | 28.31 | 5.31 | 36.48 | 31.51 | 54 | -22.49 | Ave |
| Middle channel 2442 MHz measured at 3 meters | | | | | | | | | | | |
| 1330 | 59.84 | 146 | 100 | V | 28.61 | 5.34 | 36.47 | 57.32 | 74 | -16.68 | peak |
| 1330 | 52.27 | 264 | 100 | H | 28.61 | 5.34 | 36.47 | 49.75 | 74 | -24.25 | peak |
| 1330 | 38.13 | 146 | 100 | V | 28.61 | 5.34 | 36.47 | 35.61 | 54 | -18.39 | Ave |
| 1330 | 34.23 | 264 | 100 | H | 28.61 | 5.34 | 36.47 | 31.71 | 54 | -22.29 | Ave |
| High channel 2480 MHz measured at 3 meters | | | | | | | | | | | |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |
| - | - | - | - | - | - | - | - | - | - | - | -* |


Note: * All emissions are 20 dB below the limit and/or under the noise floor level.

Restricted Band Emissions


802.11 b, Lowest Channel at Horizontal, Peak

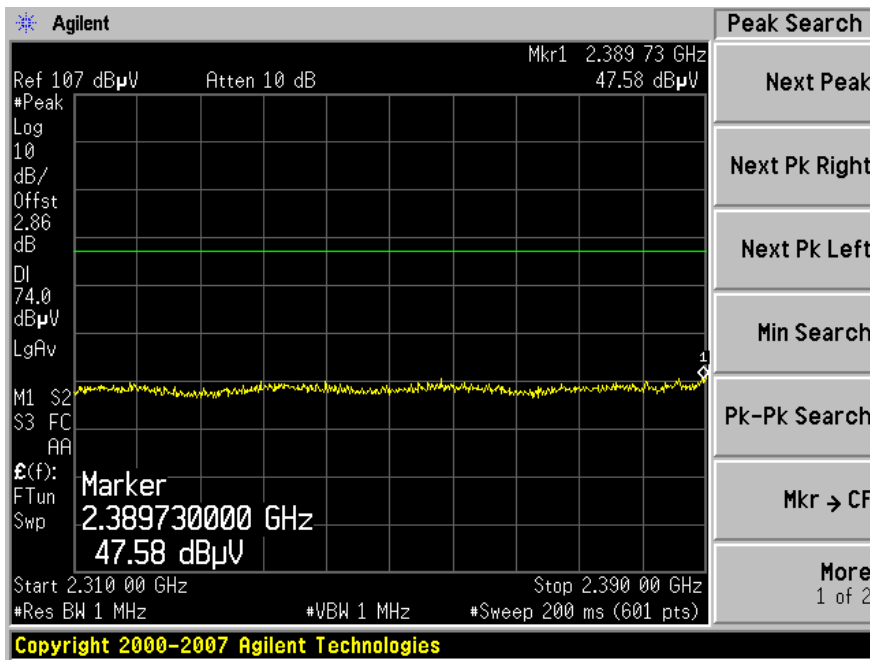


802.11b, Lowest Channel at Horizontal, Average

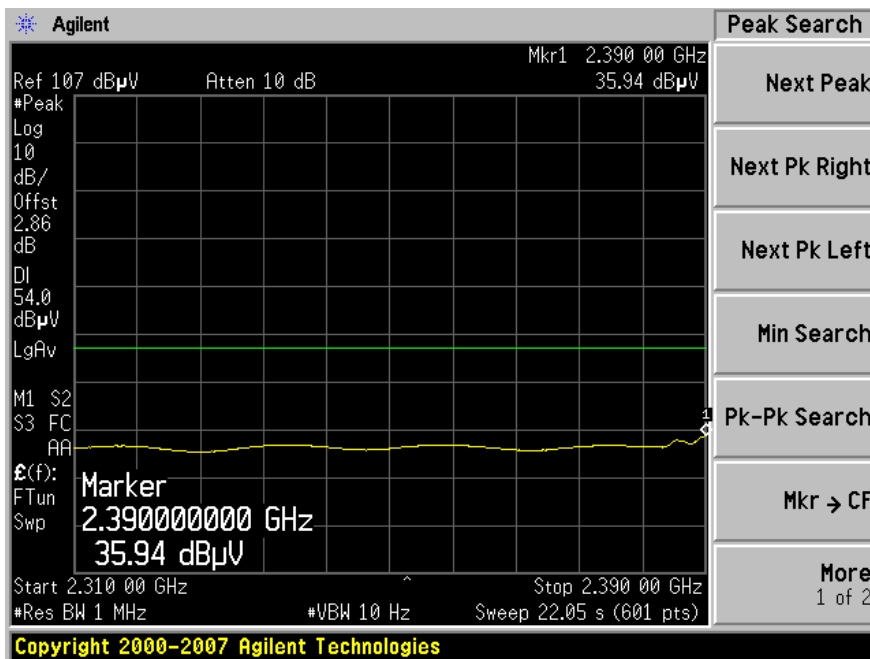


802.11b, Lowest Channel at Vertical, Peak

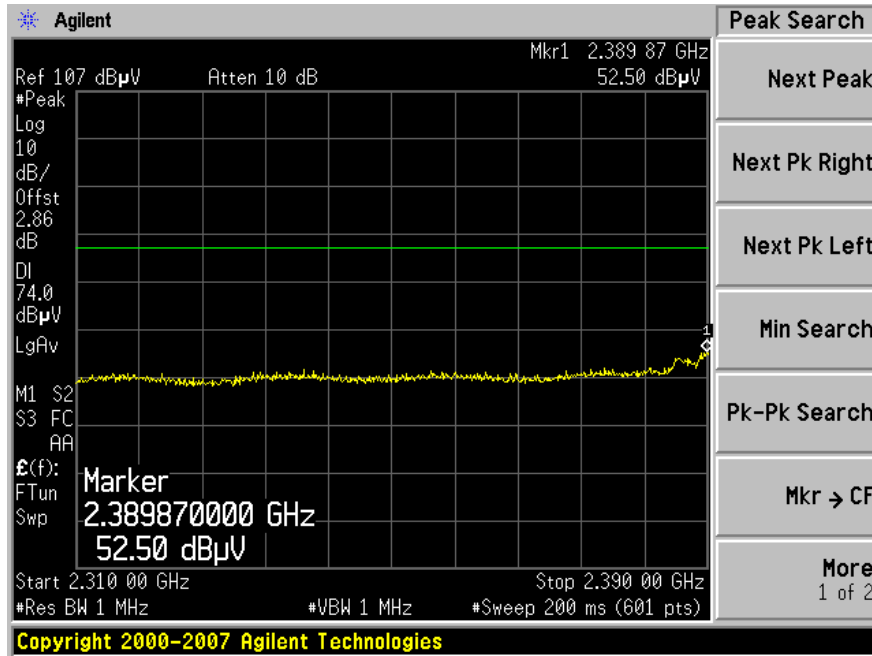


802.11b, Lowest Channel at Vertical, Average

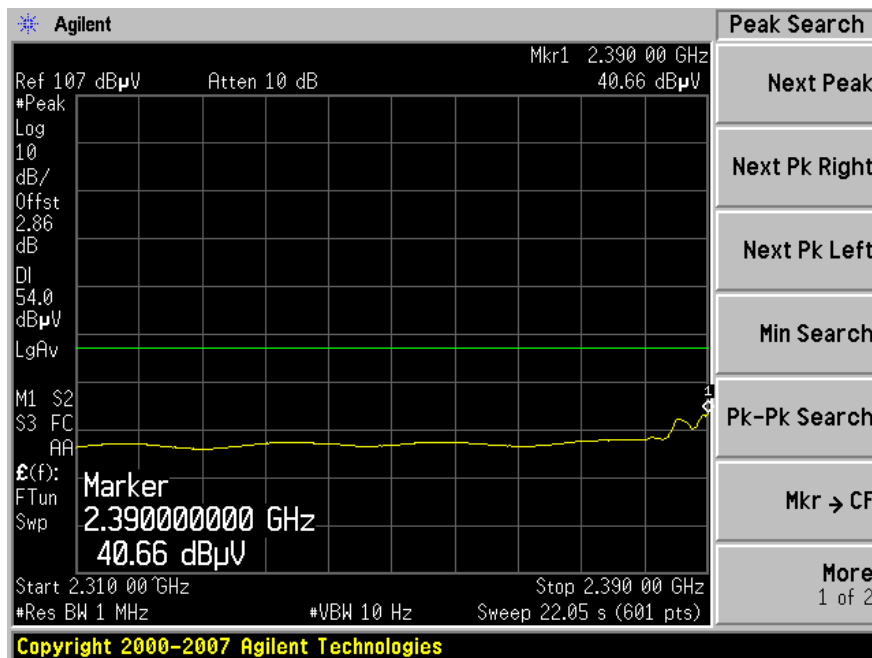


802.11b, Highest Channel at Horizontal, Peak

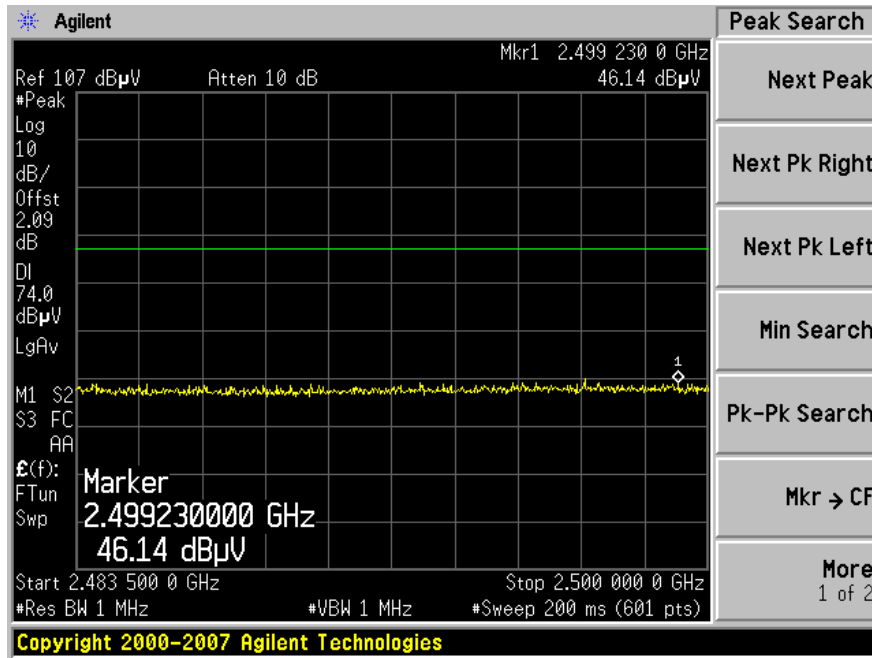


802.11b, Highest Channel at Horizontal, Average

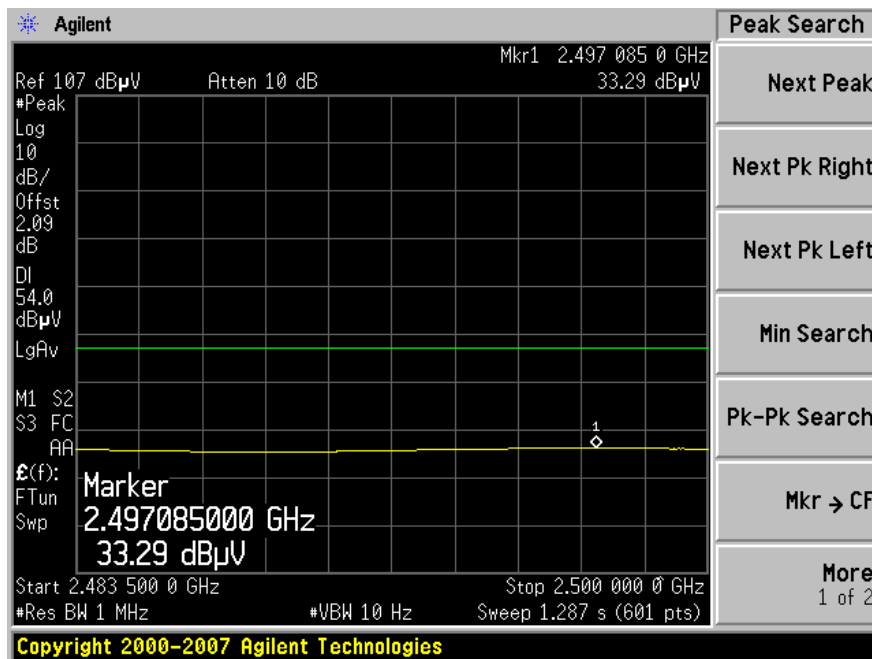


802.11b, Highest Channel at Vertical, Peak

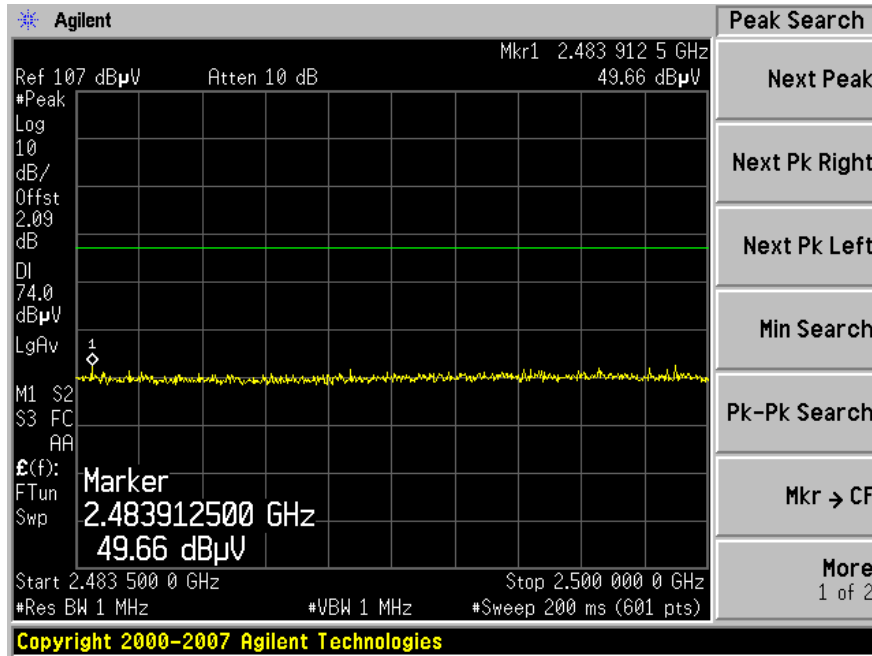


802.11b, Highest Channel at Vertical, Average

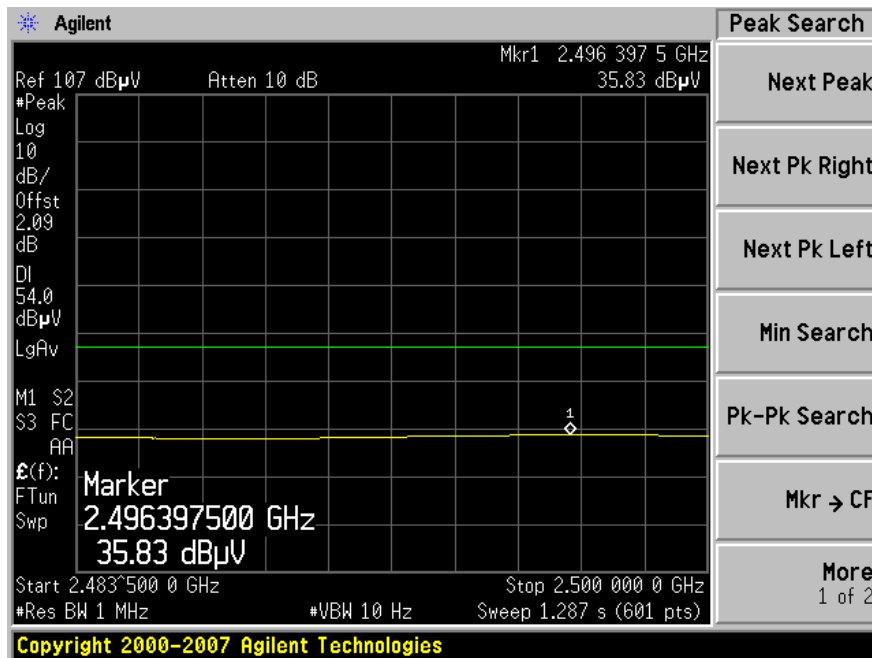


802.11 g, Lowest Channel at Horizontal, Peak

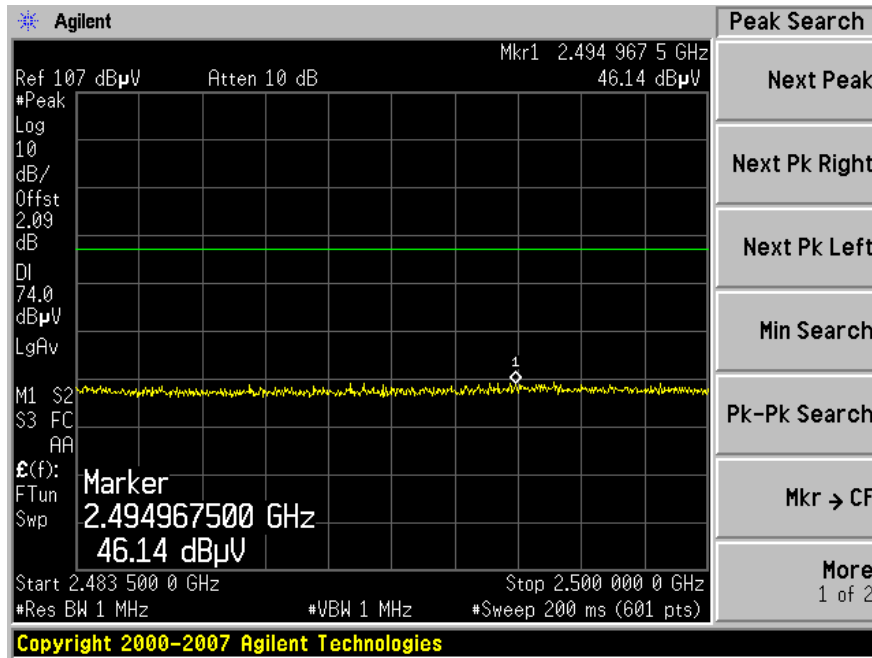


802.11g, Lowest Channel at Horizontal, Average

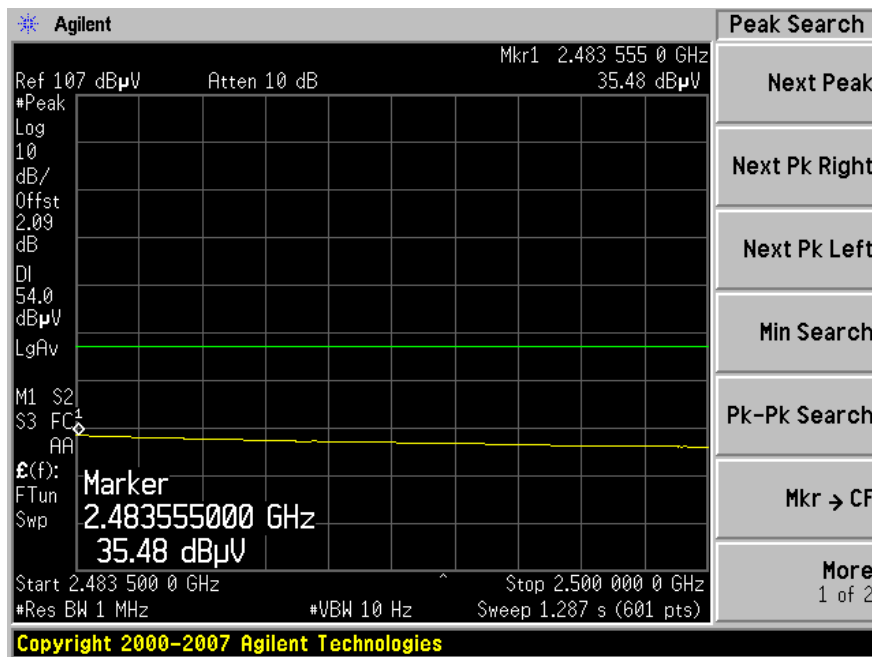


802.11g, Lowest Channel at Vertical, Peak

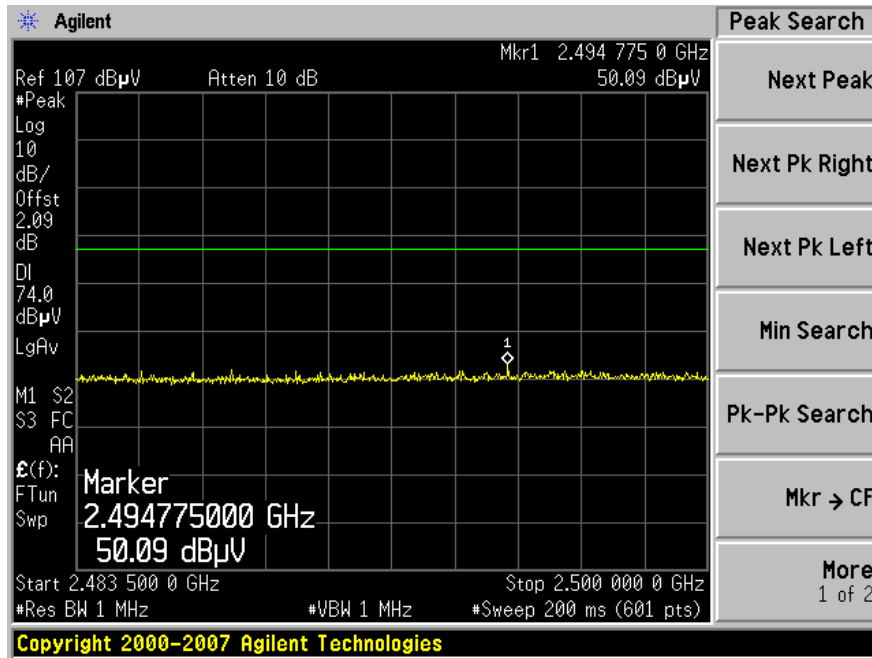


802.11g, Lowest Channel at Vertical, Average

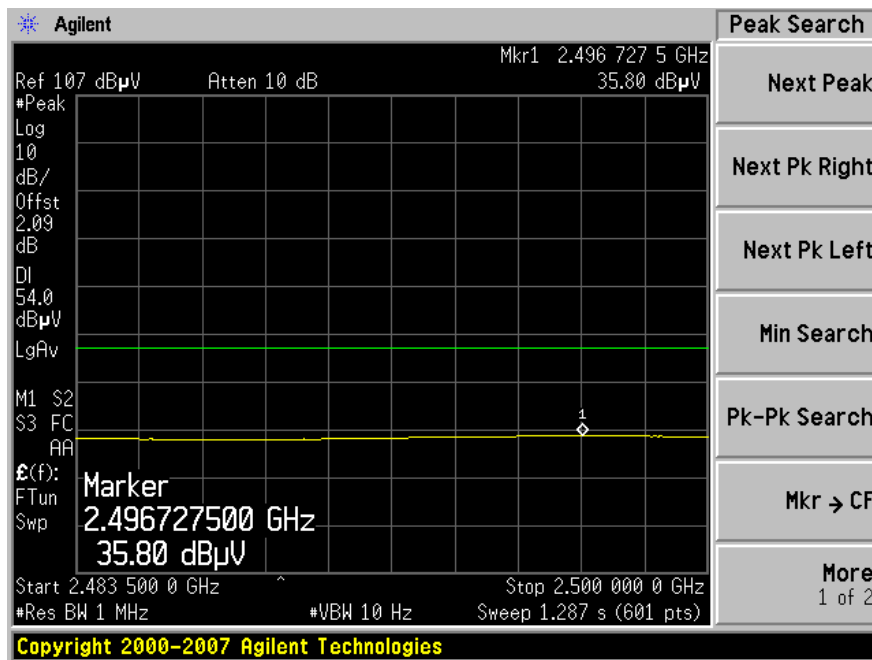


802.11g, Highest Channel at Horizontal, Peak

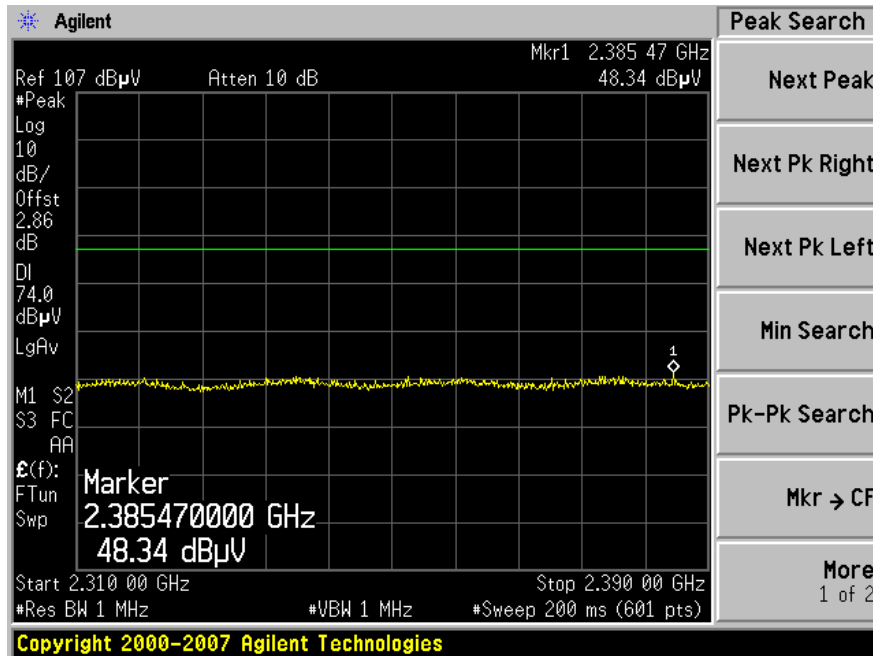


802.11g, Highest Channel at Horizontal, Average

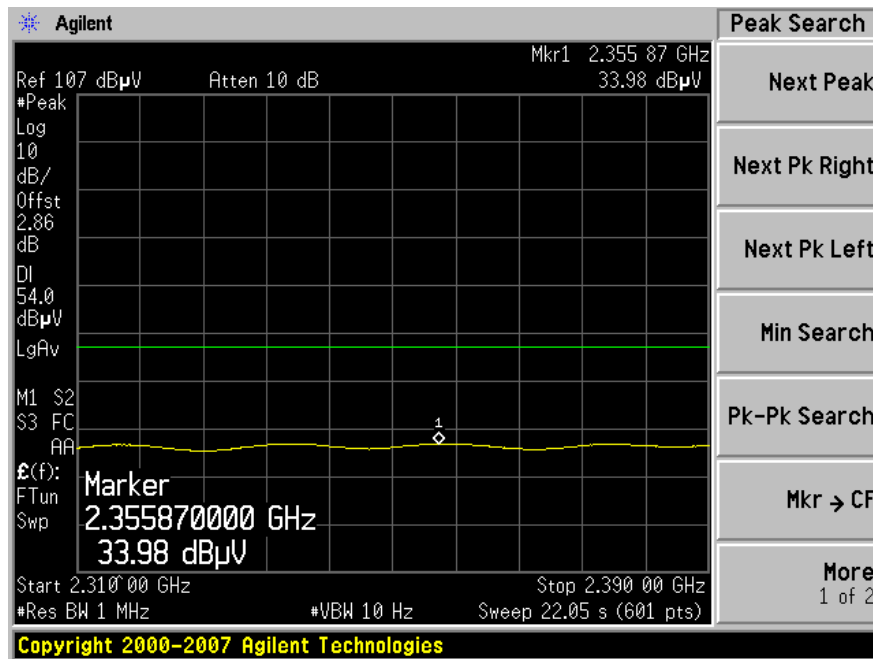


802.11g, Highest Channel at Vertical, Peak

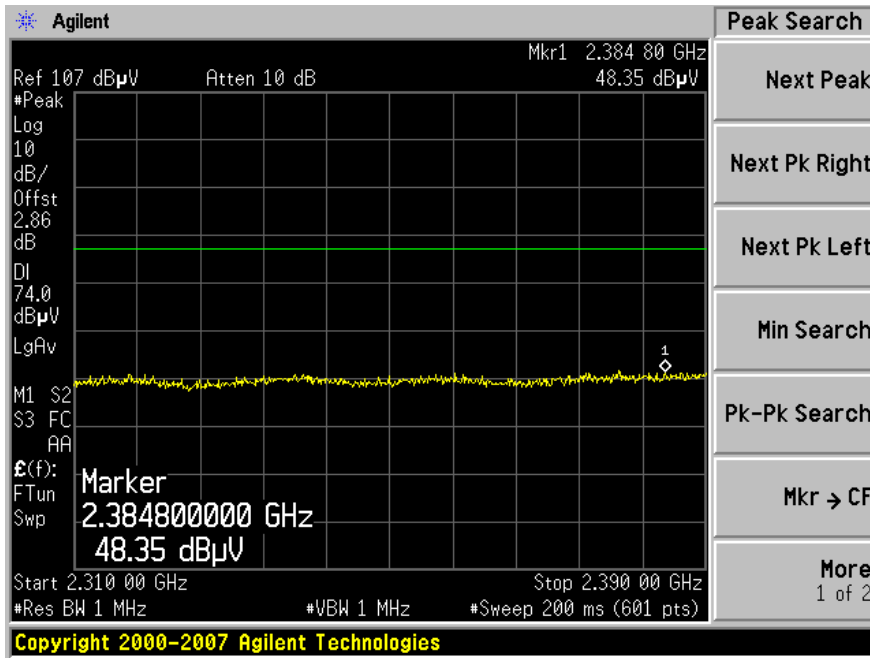


802.11g, Highest Channel at Vertical, Average

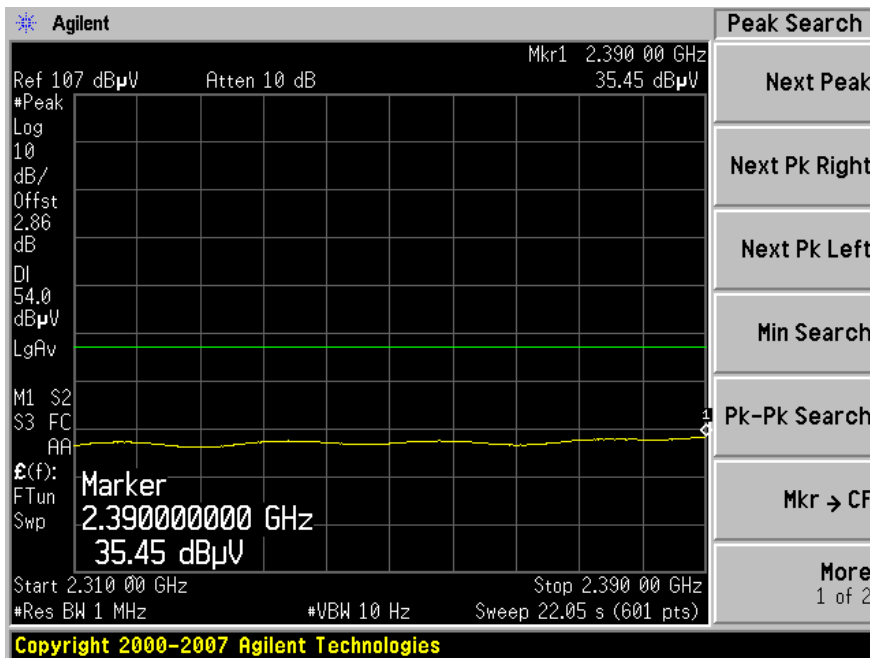


Bluetooth, Lowest Channel at Horizontal, Peak

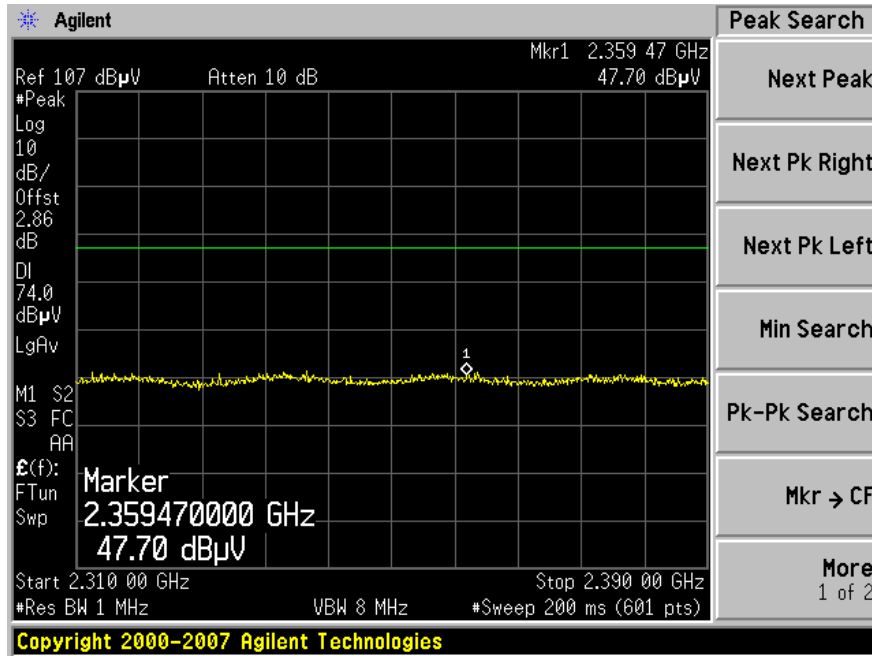


Bluetooth, Lowest Channel at Horizontal, Average

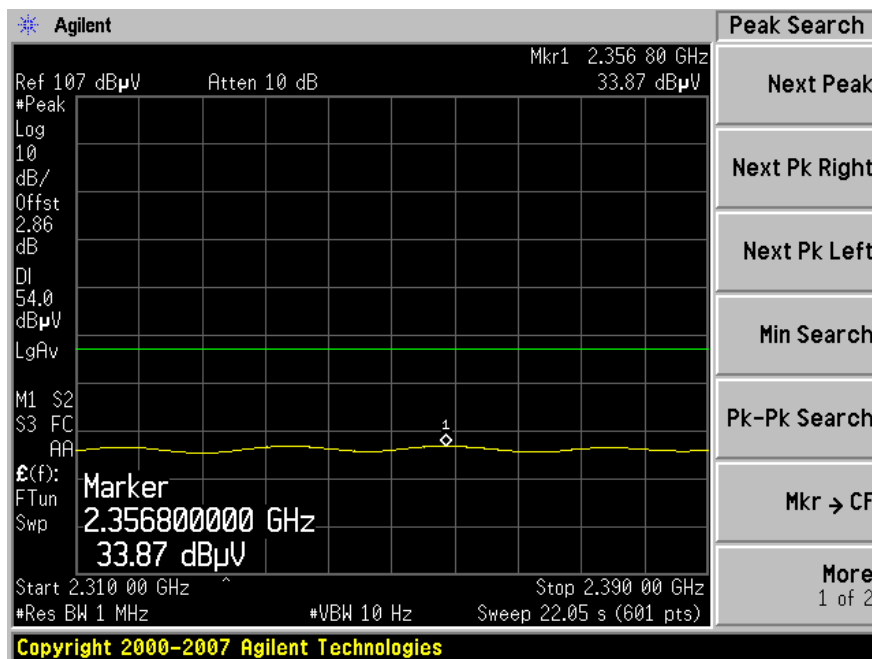


Bluetooth, Lowest Channel at Vertical, Peak

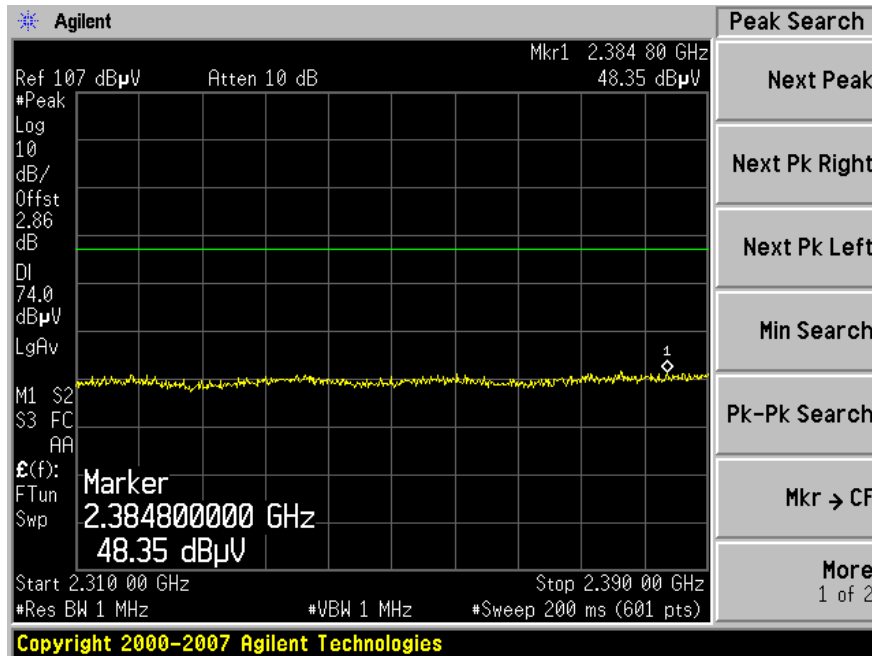


Bluetooth, Lowest Channel at Vertical, Average

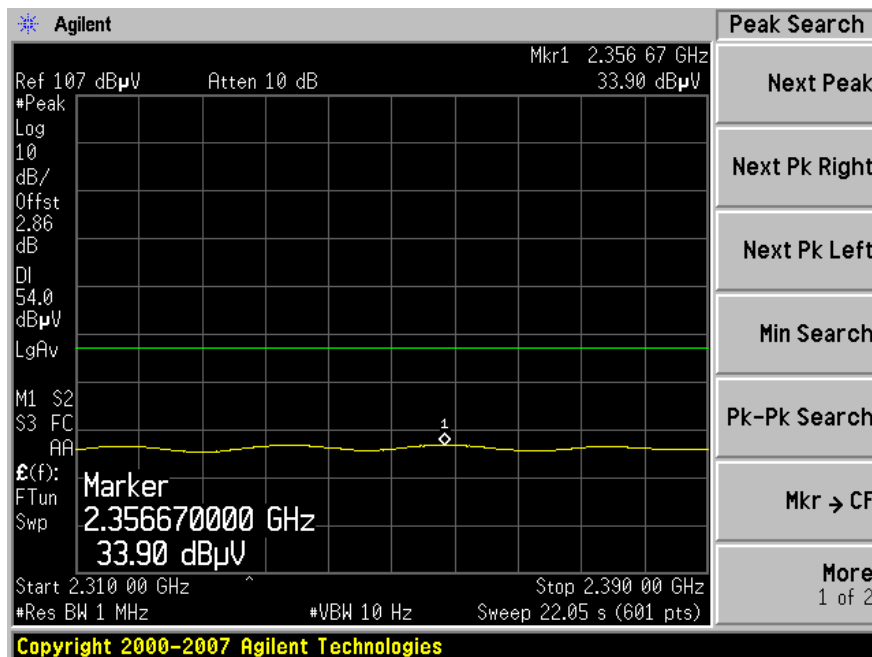


Bluetooth, Highest Channel at Horizontal, Peak

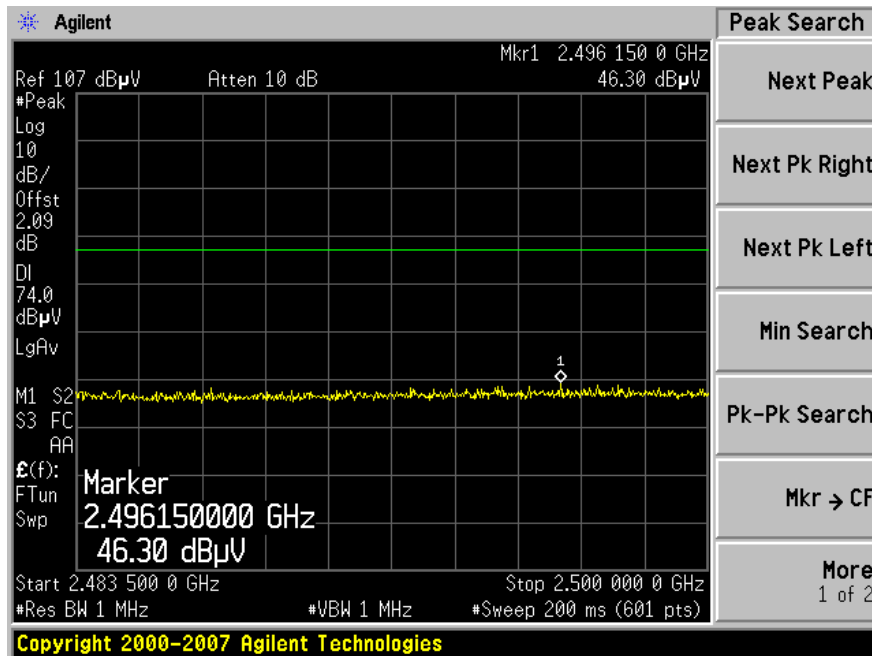


Bluetooth, Highest Channel at Horizontal, Average

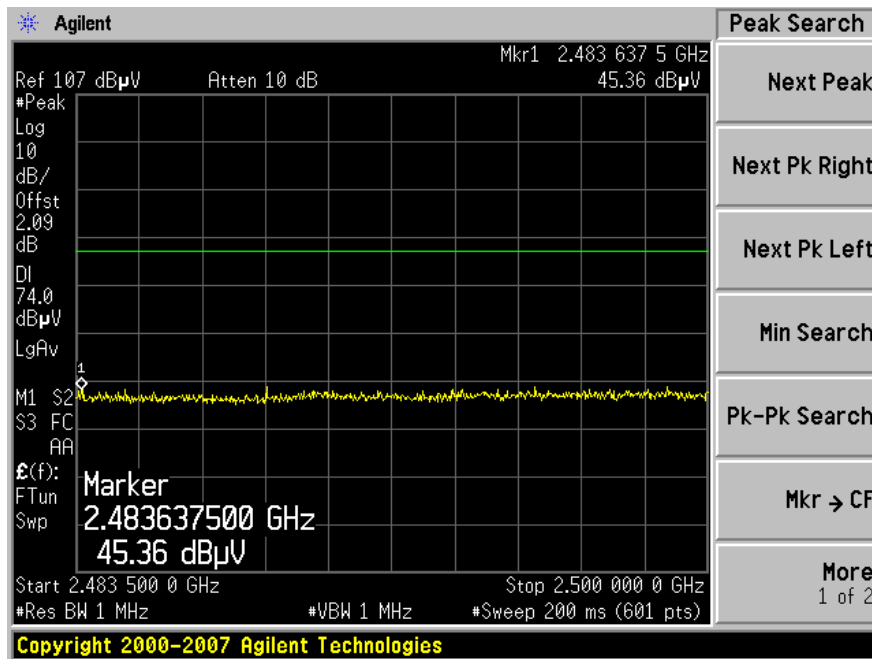

Bluetooth, Highest Channel at Vertical, Peak

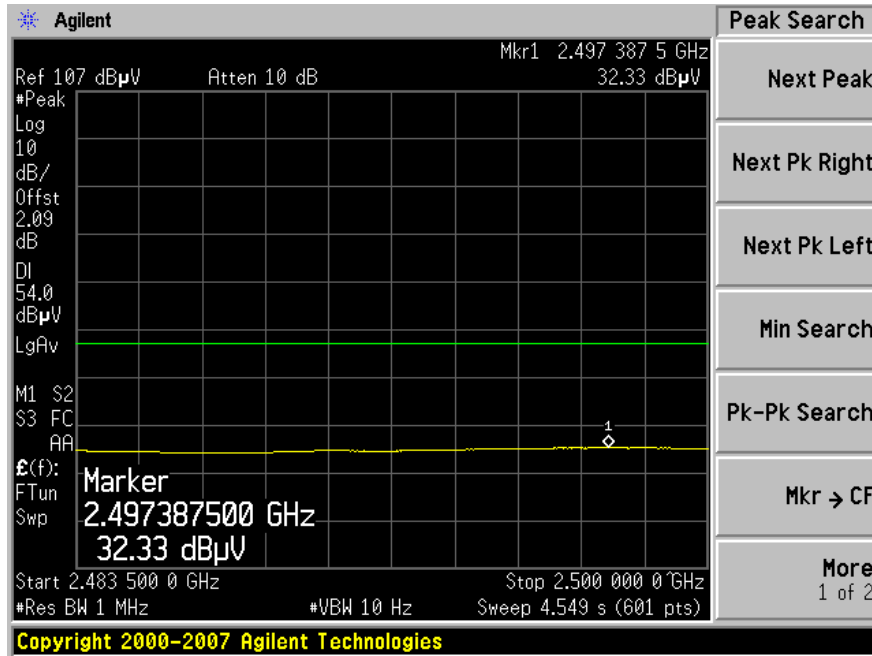

Bluetooth, Highest Channel at Vertical, Average

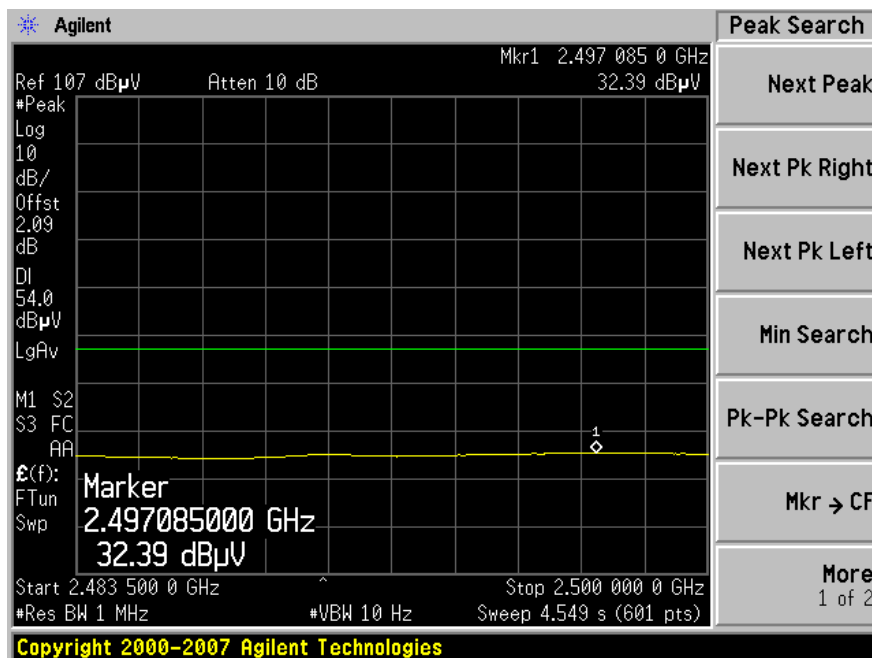

9 FCC §15.247(a)(2) – Channel Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

According to FCC §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emissions bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

9.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|-------------------|-----------|------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability: BA CL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

9.4 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

*The testing was performed by Kevin Li on 05-03-2010 in RF site.

9.5 Summary of Test Results

Wi-Fi 802.11 b/g:


| Mode | Channel | Frequency (MHz) | 6 dB Channel Bandwidth (MHz) | 99% Bandwidth (MHz) | Limit (kHz) | Results |
|---------|---------|-----------------|------------------------------|---------------------|-------------|-----------|
| 802.11b | Low | 2412 | 10.224 | 14.291 | >500 | Compliant |
| | Middle | 2437 | 10.226 | 14.192 | >500 | Compliant |
| | High | 2462 | 10.217 | 14.105 | >500 | Compliant |
| 802.11g | Low | 2412 | 16.463 | 16.985 | >500 | Compliant |
| | Middle | 2437 | 16.464 | 16.958 | >500 | Compliant |
| | High | 2462 | 16.490 | 16.986 | >500 | Compliant |

Bluetooth:


| Channel | Frequency (MHz) | 20 dB Channel Bandwidth (MHz) |
|---------|-----------------|-------------------------------|
| Low | 2402 | 1.034 |
| Mid | 2440 | 1.031 |
| High | 2480 | 1.032 |

Please refer to the following plots for detailed test results:


802.11b, Low Channel 2412 MHz

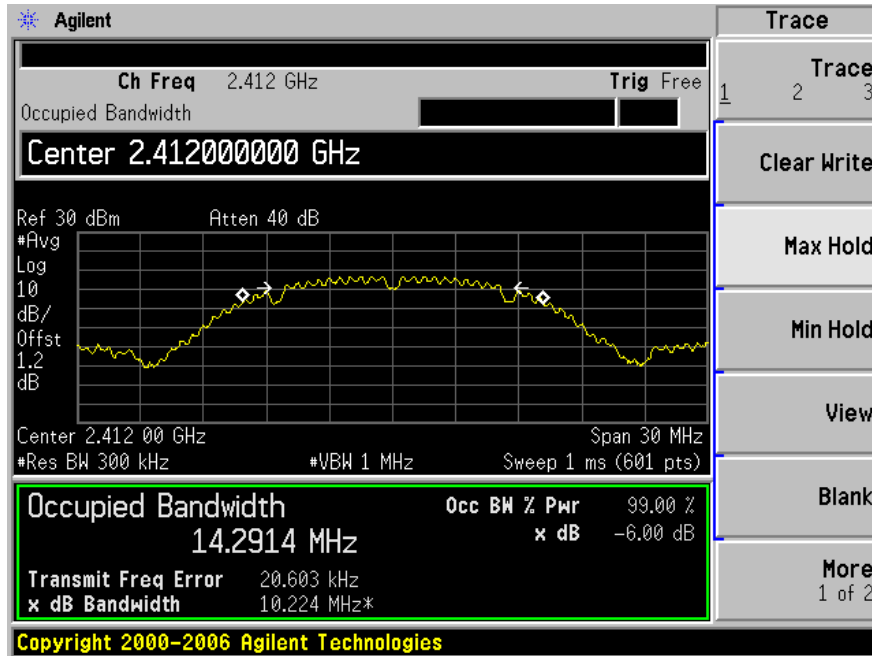


802.11b, Middle Channel 2437 MHz

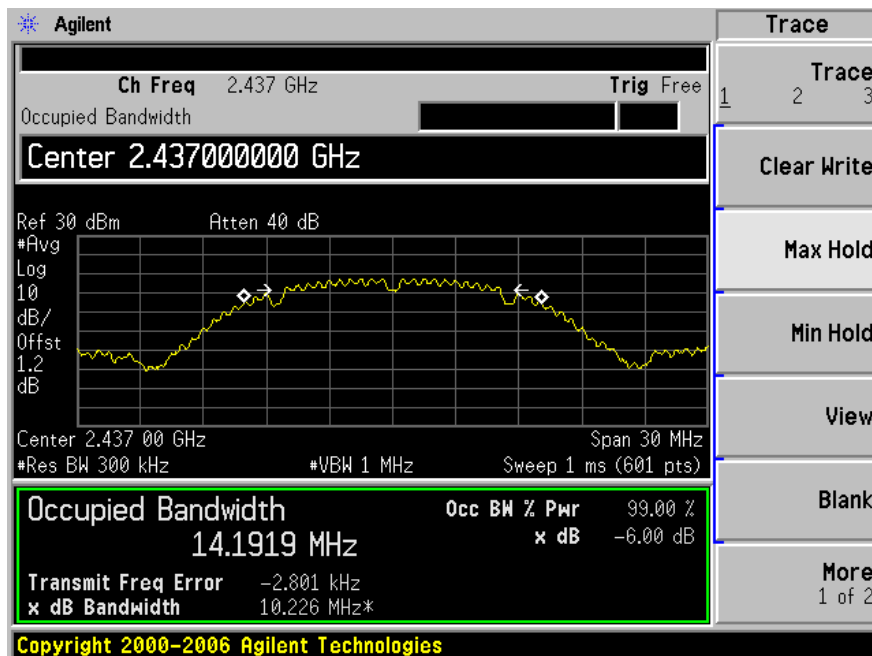


802.11b, High Channel 2462 MHz

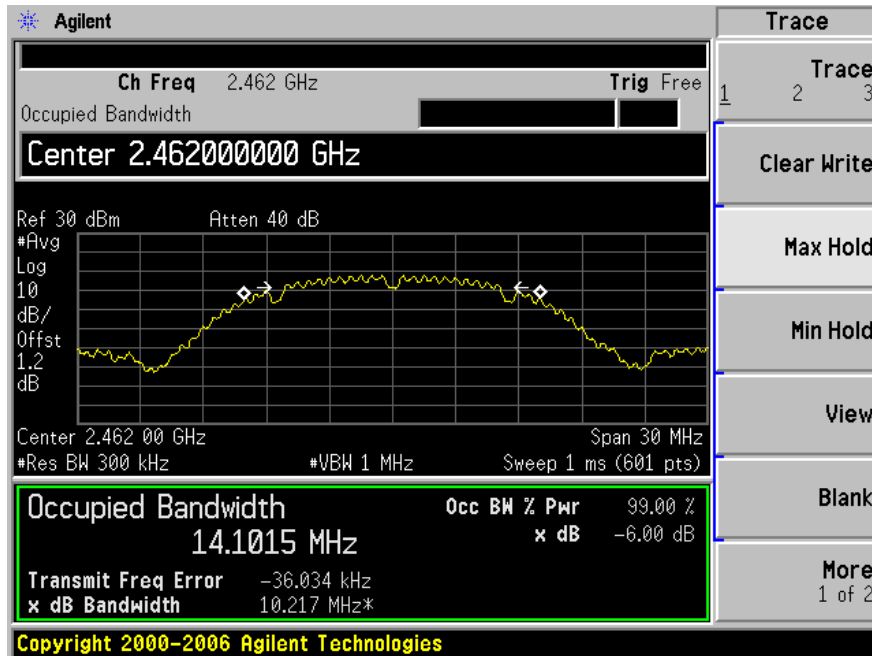


802.11 g, Low Channel 2412 MHz

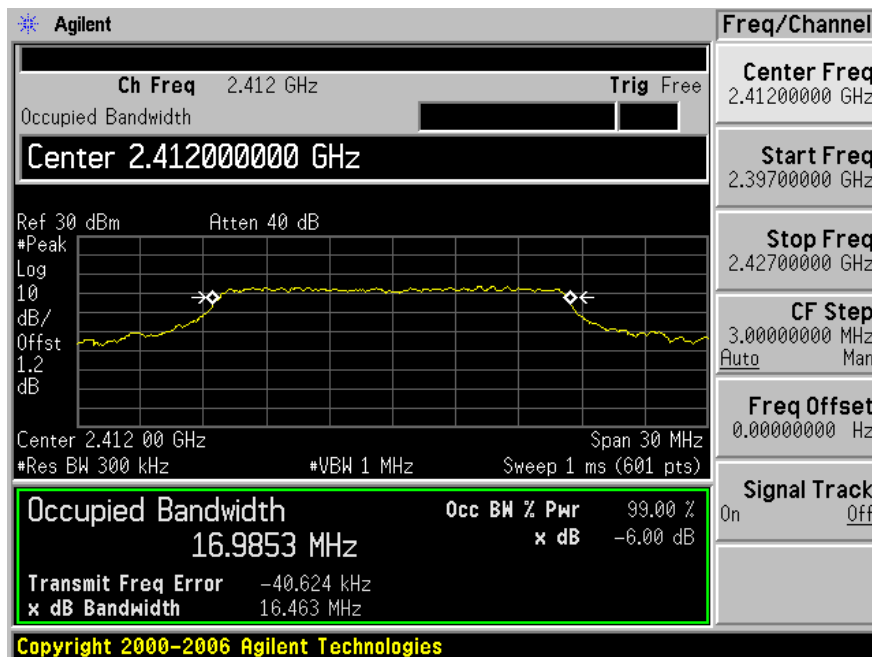


802.11g, Middle Channel 2437 MHz

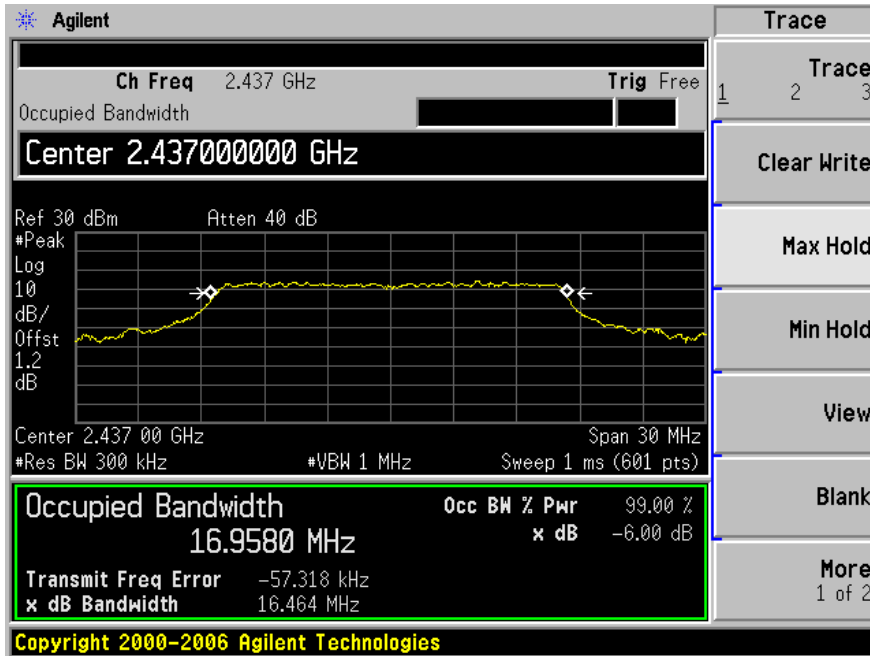


802.11g, High Channel 2462 MHz

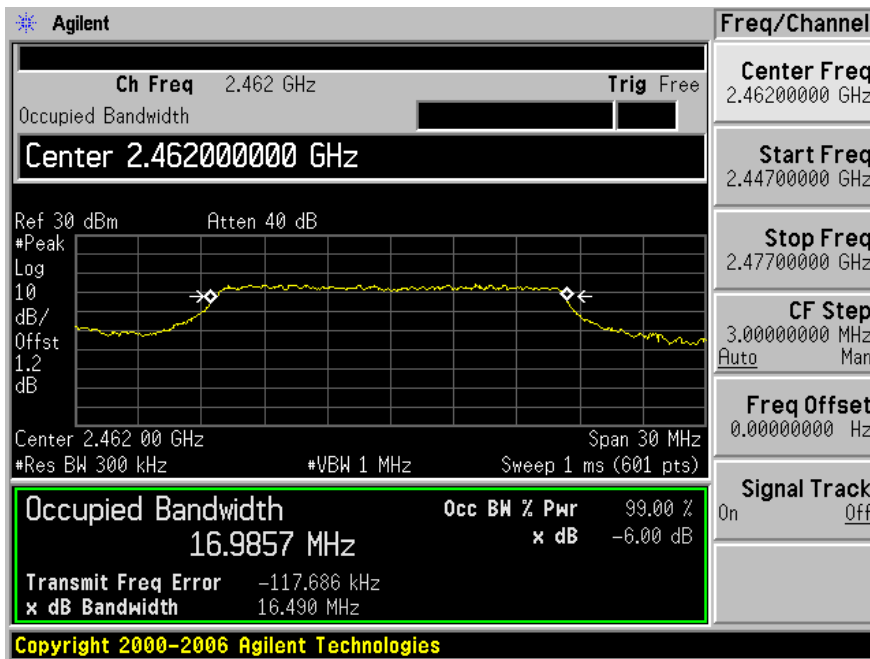


Bluetooth, Low Channel 2412 MHz

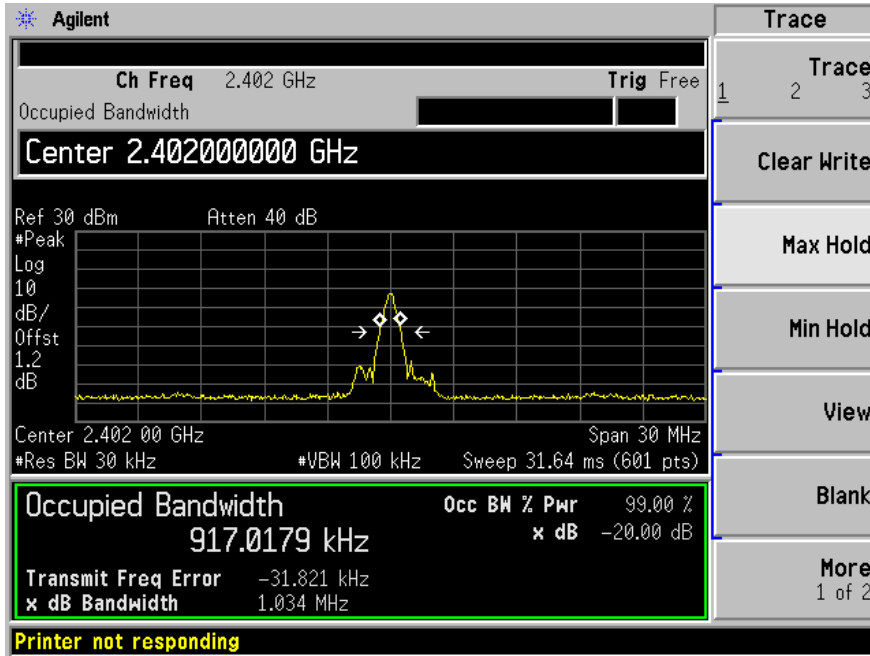

Bluetooth, Middle Channel 2440 MHz

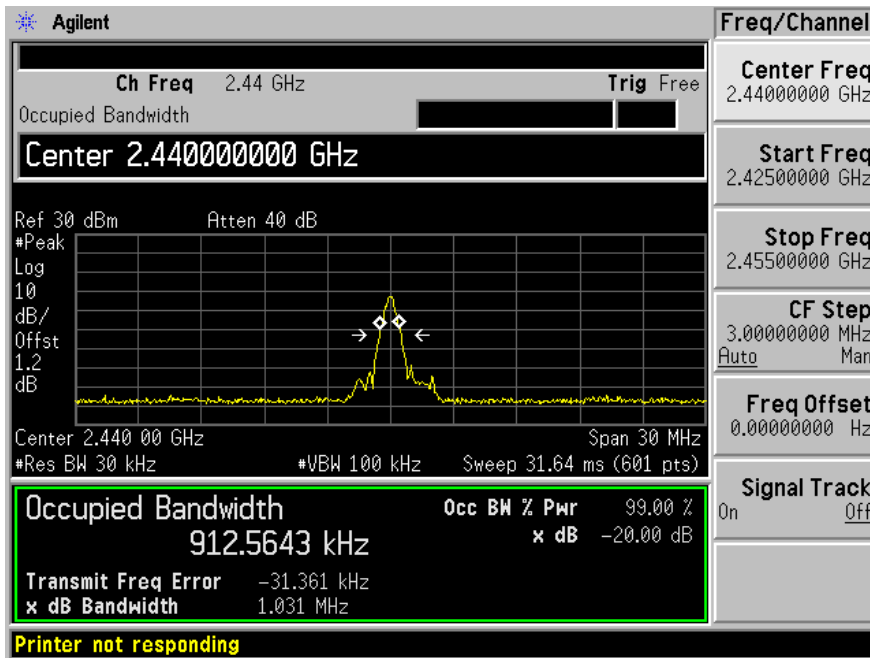

Bluetooth, High Channel 2480 MHz

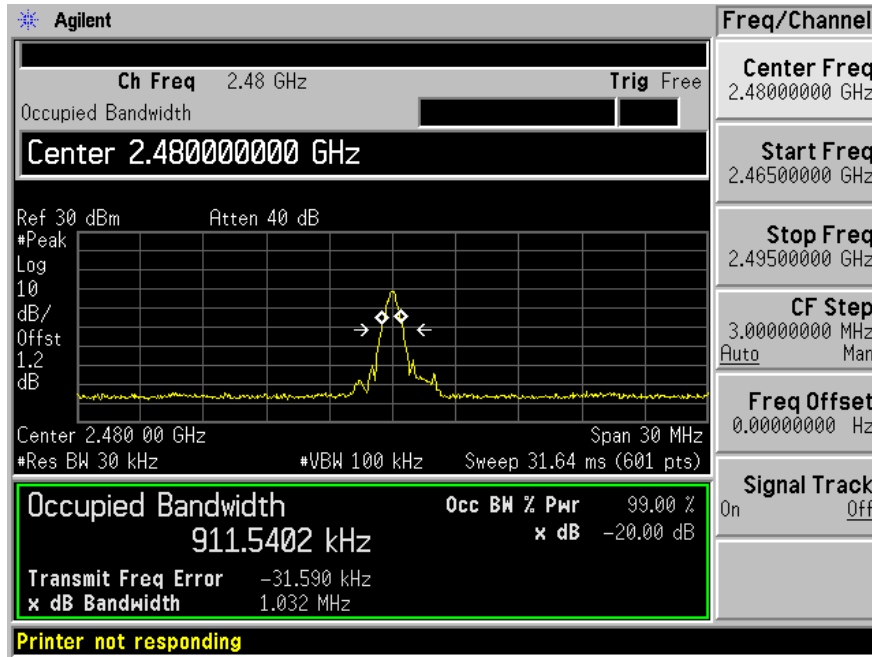

10 FCC §15.247(b) - Peak Output Power Measurement


10.1 Applicable Standard

According to FCC §15.247(b)(3) for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

10.2 Measurement Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a spectrum analyzer.
3. Add a correction factor to the display.

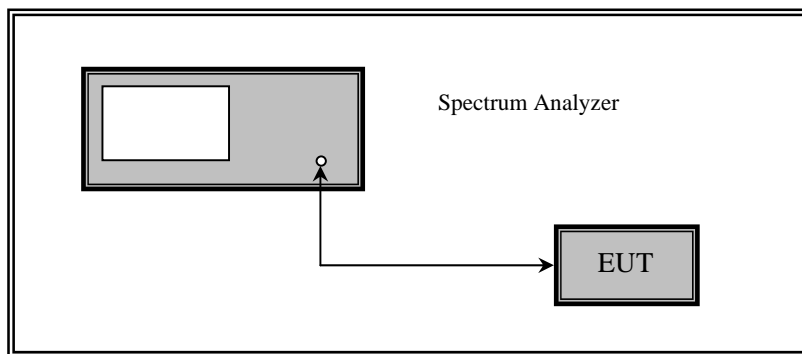

10.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|-------------------|-----------|------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

10.4 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

* The testing was performed by Kevin Li on 05-03-2010 in RF site.

10.5 Summary of Test Results

Wi-Fi:

| Mode | Channel | Frequency (MHz) | Max Peak Output Power | | Limit (mw) | Result |
|---------|---------|-----------------|-----------------------|-------|------------|--------|
| | | | (dBm) | (mw) | | |
| 802.11b | Low | 2412 | 16.03 | 40.09 | 1000 | Pass |
| | Mid | 2437 | 16.65 | 46.24 | 1000 | Pass |
| | High | 2462 | 16.80 | 47.86 | 1000 | Pass |
| 802.11g | Low | 2412 | 12.44 | 17.54 | 1000 | Pass |
| | Mid | 2437 | 13.05 | 20.18 | 1000 | Pass |
| | High | 2462 | 13.18 | 20.80 | 1000 | Pass |

Bluetooth:

| Channel | Frequency (MHz) | Max Peak Output Power | | Limit (mw) | Result |
|---------|-----------------|-----------------------|------|------------|--------|
| | | (dBm) | (mw) | | |
| Low | 2402 | -0.42 | 0.91 | 125 | Pass |
| Mid | 2440 | -0.10 | 0.98 | 125 | Pass |
| High | 2480 | 1.3 | 1.35 | 125 | Pass |

11 FCC §15.247(d) - 100 kHz Bandwidth of Band Edges

11.1 Applicable Standard

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|-------------------|-----------|------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

11.4 Test Environmental Conditions


| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

*The testing was performed by Kevin Li on 05-03-2010 in RF site.


11.5 Measurement Results

Please refer to following pages for plots of band edge.


802.11b, Low Band Edge

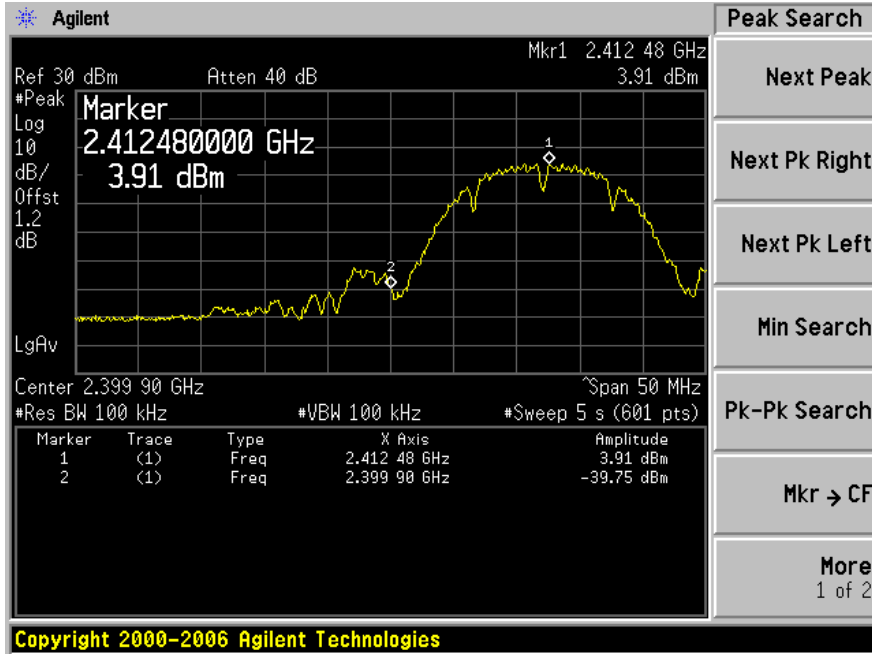


802.11b, High Band Edge

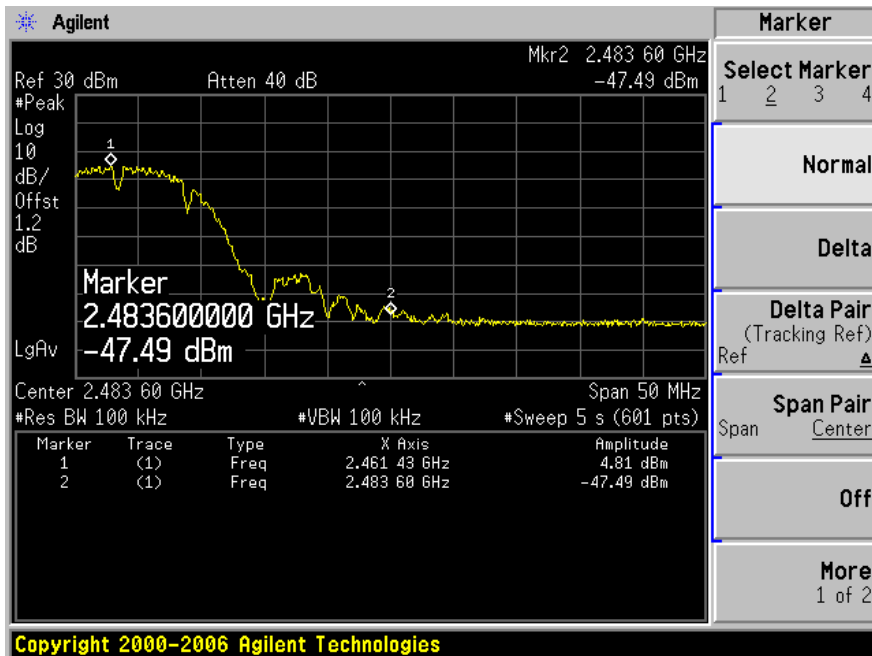


802.11g, Low Band Edge

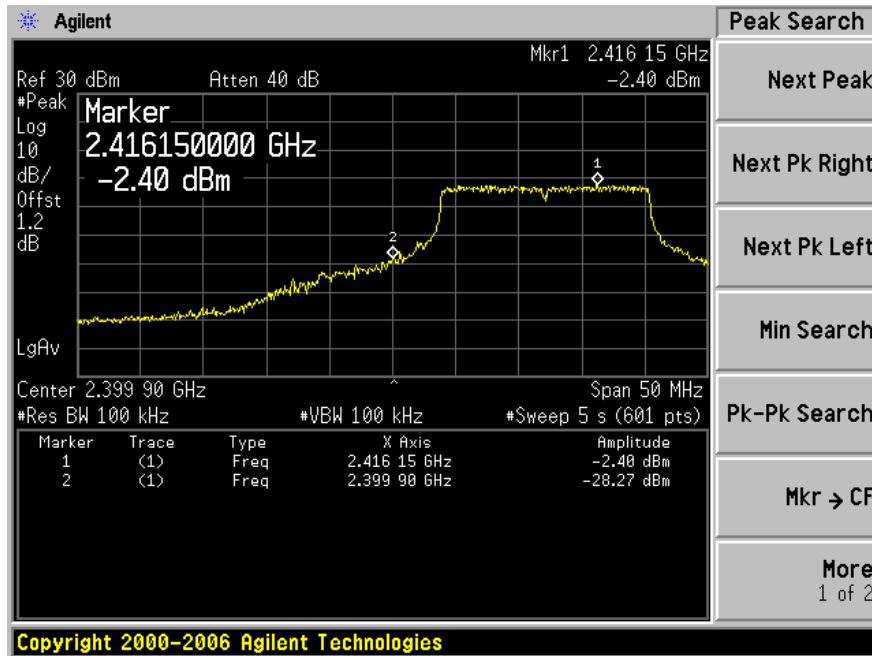


802.11g, High Band Edge

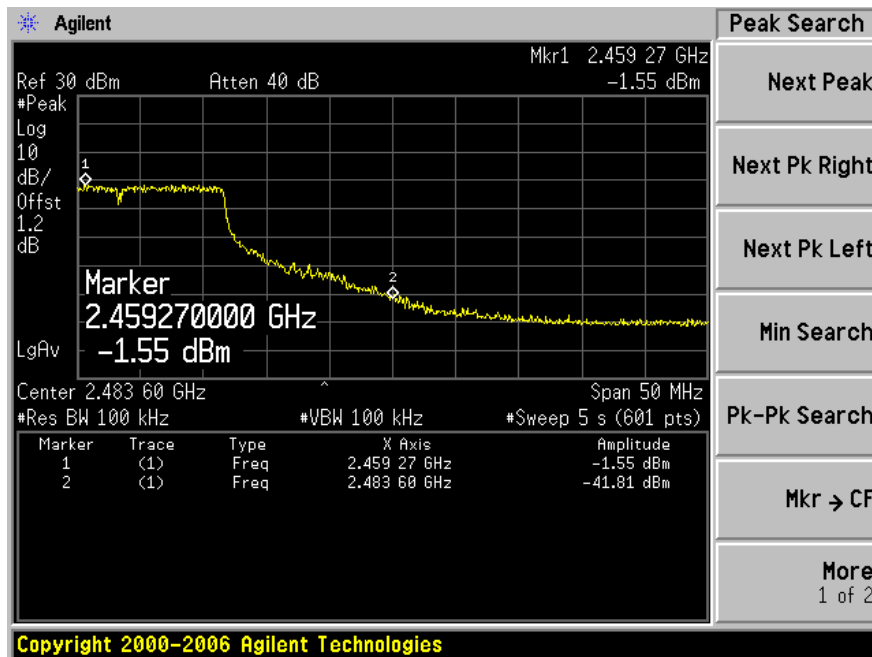

Bluetooth, Low Band Edge

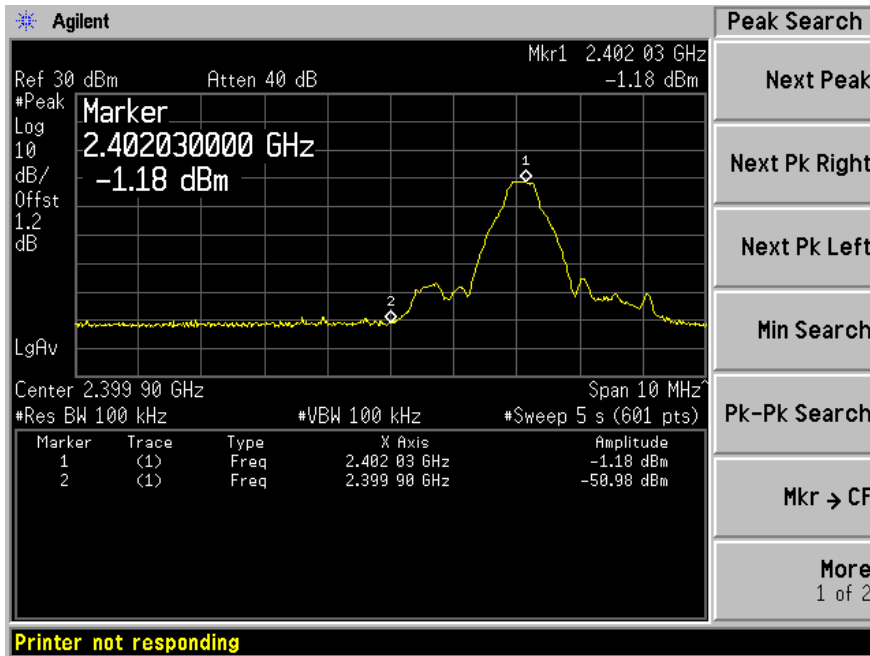

Bluetooth, High Band Edge

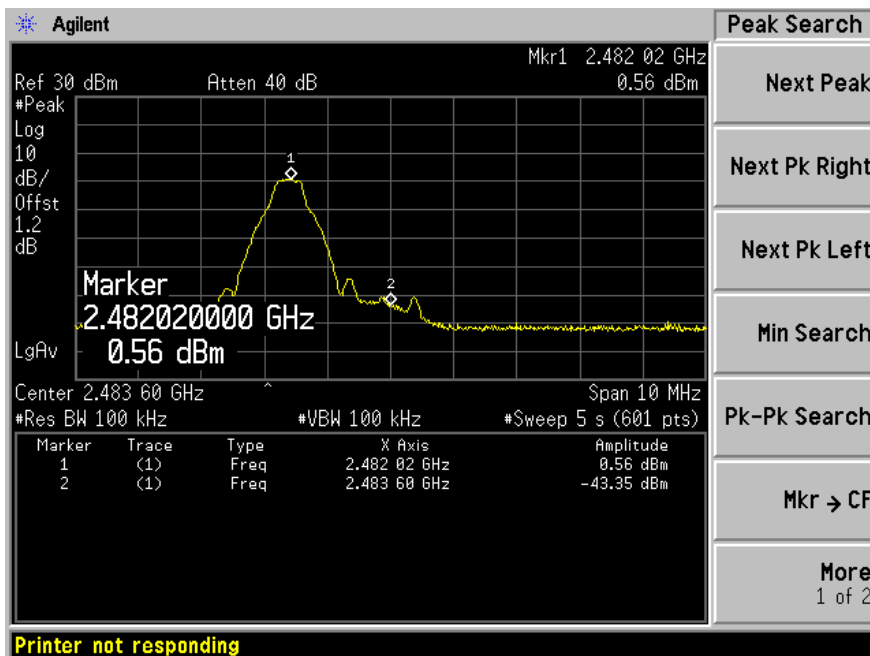

12 FCC §15.247(e) - Power Spectral Density

12.1 Applicable Standard

According to FCC §15.247 (e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

12.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date |
|--------------|-------------------|-----------|------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

12.4 Test Environmental Conditions

| | |
|--------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |


**The testing was performed by Kevin Li on 05-03-2010 in RF site.*

12.5 Summary of Test Results


| Mode | Channel | Frequency (MHz) | Power Spectral Density (dBm) | Limit (dBm) | Results |
|---------|---------|-----------------|------------------------------|-------------|---------|
| 802.11b | Low | 2412 | -11.04 | 8 | Pass |
| | Mid | 2437 | -10.39 | 8 | Pass |
| | High | 2462 | -10.68 | 8 | Pass |
| 802.11g | Low | 2412 | -10.10 | 8 | Pass |
| | Mid | 2437 | -9.13 | 8 | Pass |
| | High | 2462 | -9.35 | 8 | Pass |

Please refer to the following plots for detailed test results:


802.11 b, Low Channel 2412 MHz

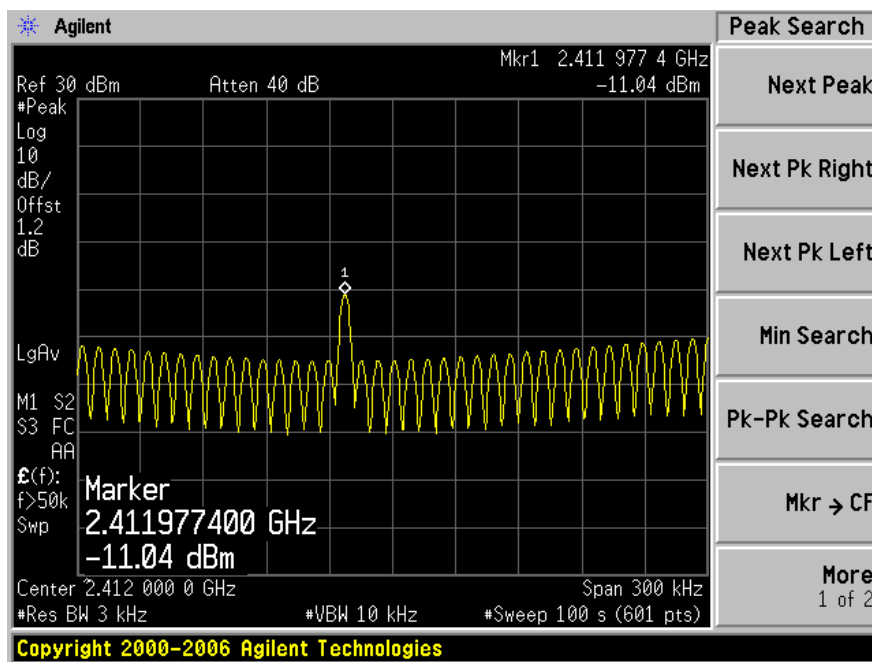


802.11 b, Middle Channel 2437 MHz

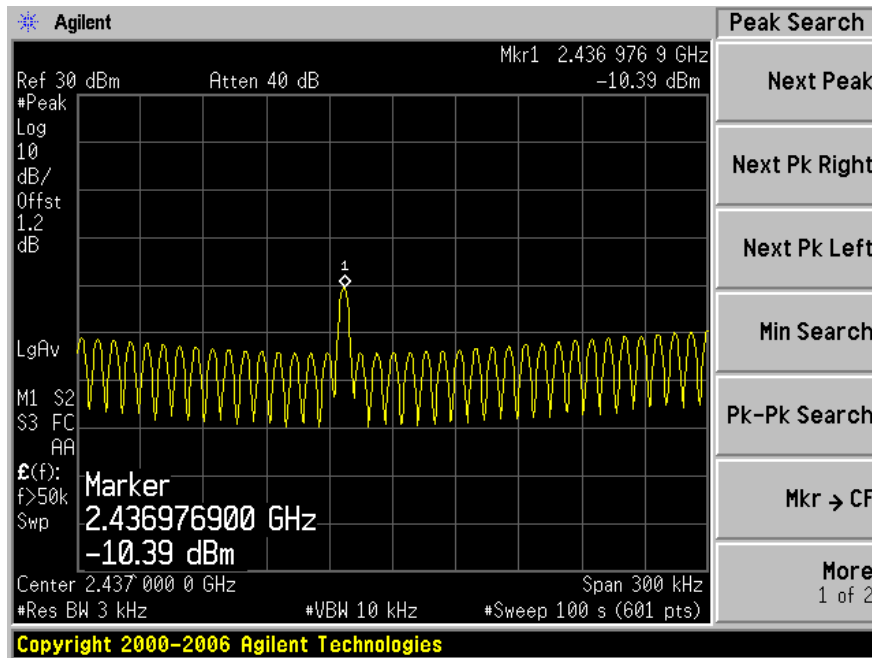


802.11 b, High Channel 2462 MHz

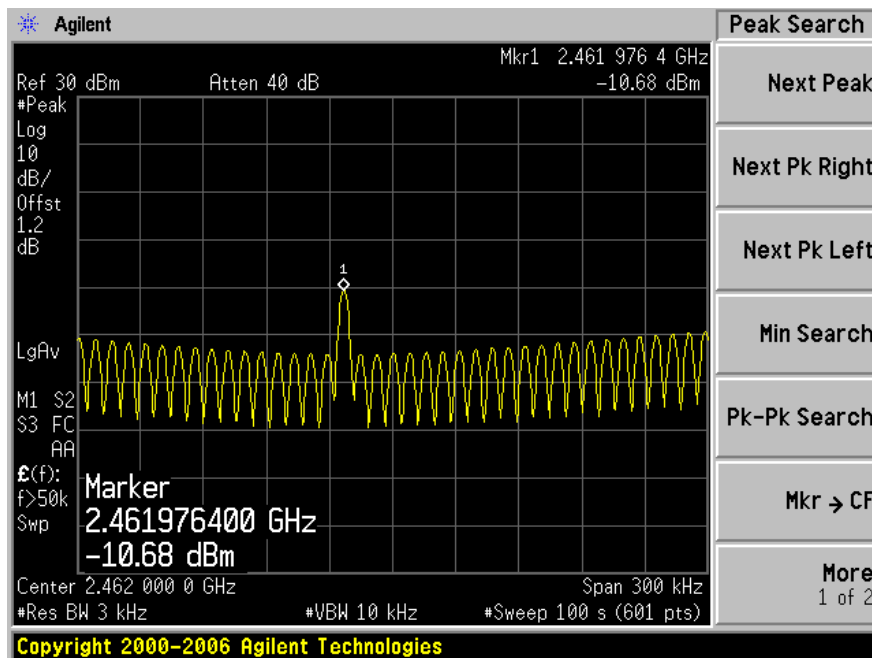


802.11 g, Low Channel 2412 MHz

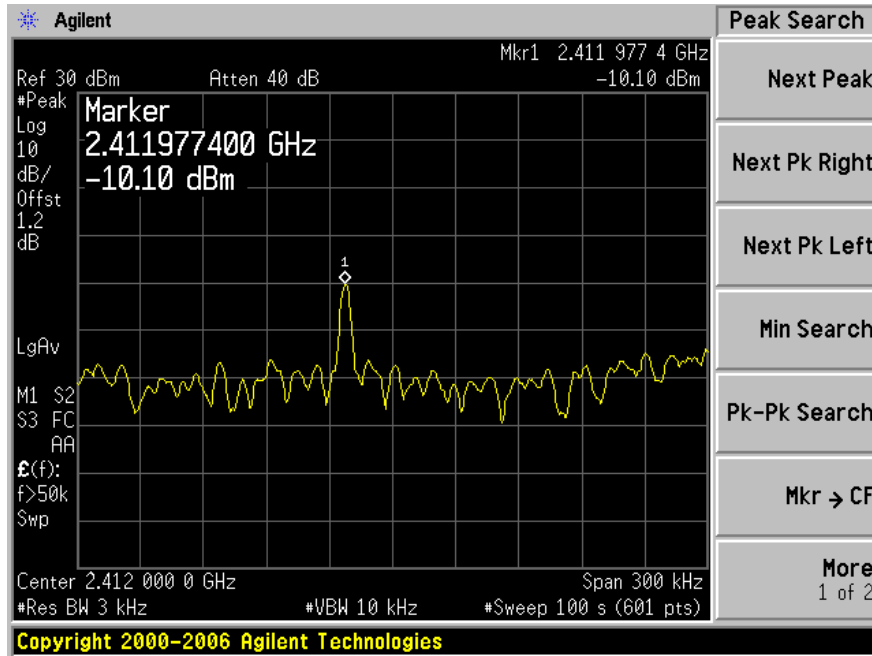

802.11 g, Middle Channel 2437 MHz

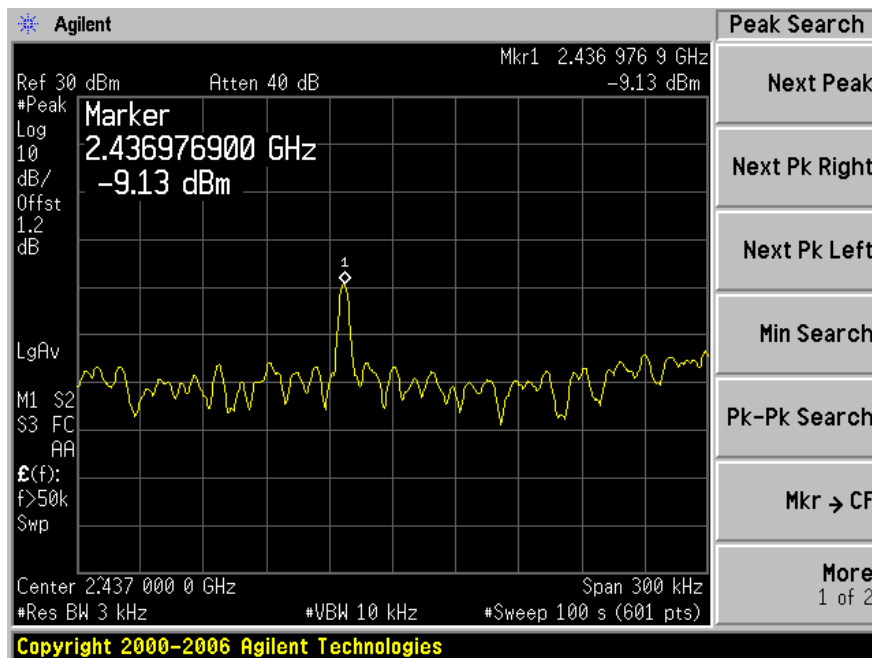

802.11 g, High Channel 2462 MHz

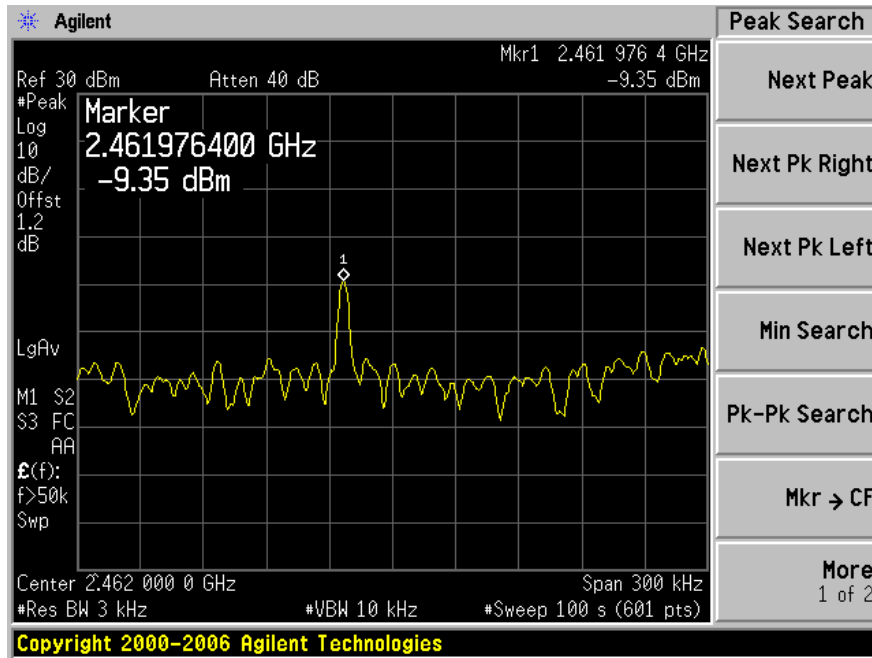

13 FCC §15.247(a)(1) - Hopping Channel Separation

13.1 Applicable Standard

According to FCC §15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

13.3 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability:** BACL Corp. attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

13.4 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |


*The testing was performed by Kevin Li on 05-03-2010 in RF site.

13.5 Measurement Results


| Channel | Frequency (MHz) | Channel Separation (kHz) | Limit > 2/3 20 dB BW (kHz) |
|---------|-----------------|--------------------------|----------------------------|
| Low | 2402 | 1033 | 166.9 |
| Mid | 2440 | 1007 | 166.6 |
| High | 2480 | 1023 | 166.8 |

Please refer to the following plots.


Low Channel

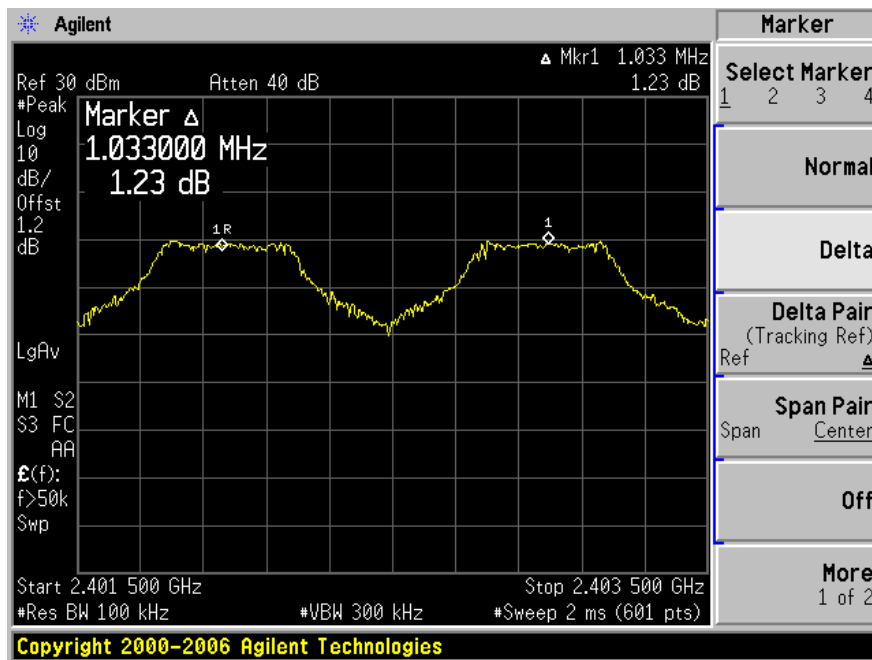

Middle Channel

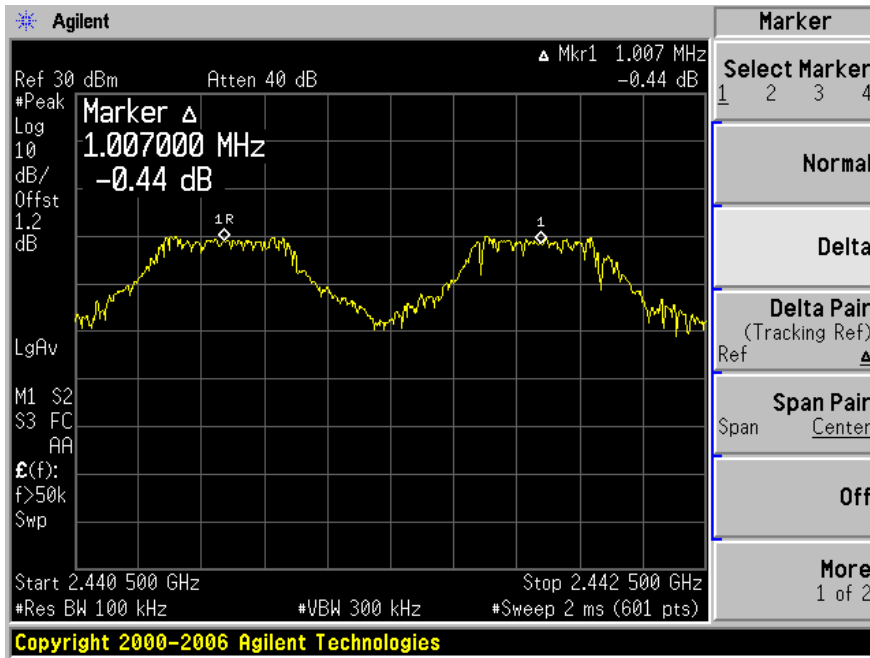

High Channel

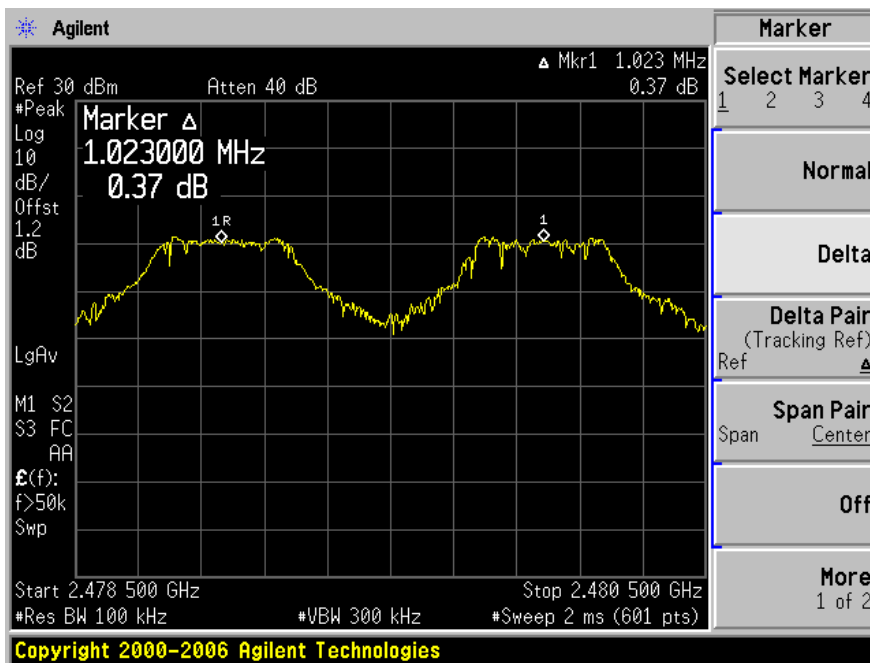

14 FCC §15.247(a)(1)(iii) – Number of Hopping Frequencies Used

14.1 Applicable Standard

According to FCC §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

14.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the bench without connection to measurement instrument. Turn on the EUT and set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

14.3 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability:** **BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

14.4 Test Environmental Conditions


| | |
|---------------------------|----------------|
| Temperature: | 18~21°C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

*The testing was performed by Kevin Li on 05-03-2010 in RF site.


14.5 Measurement Result

79 channels please refer to the following plots.

Hopping Channel Number

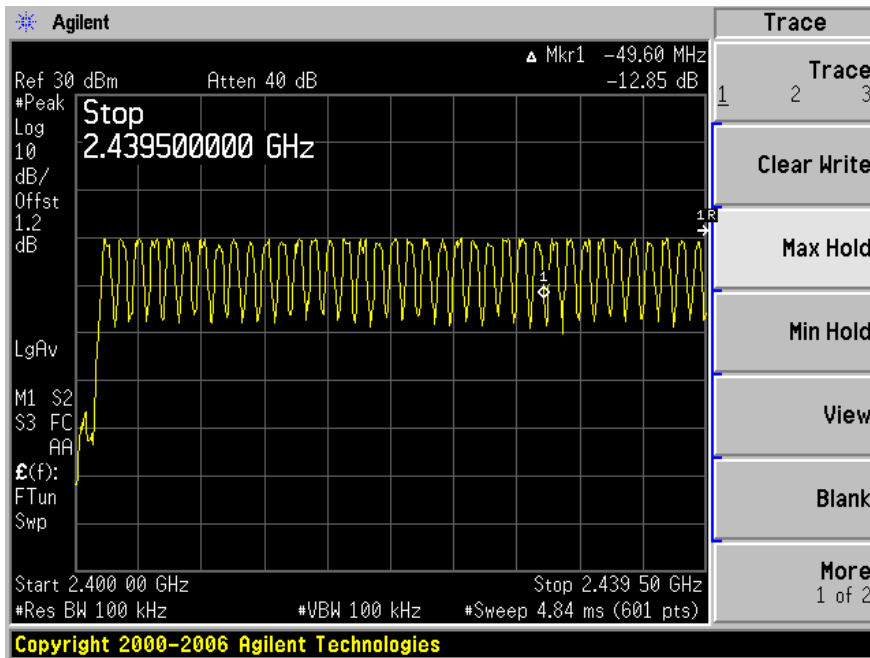

38 Channels between 2400 to 2440 MHz

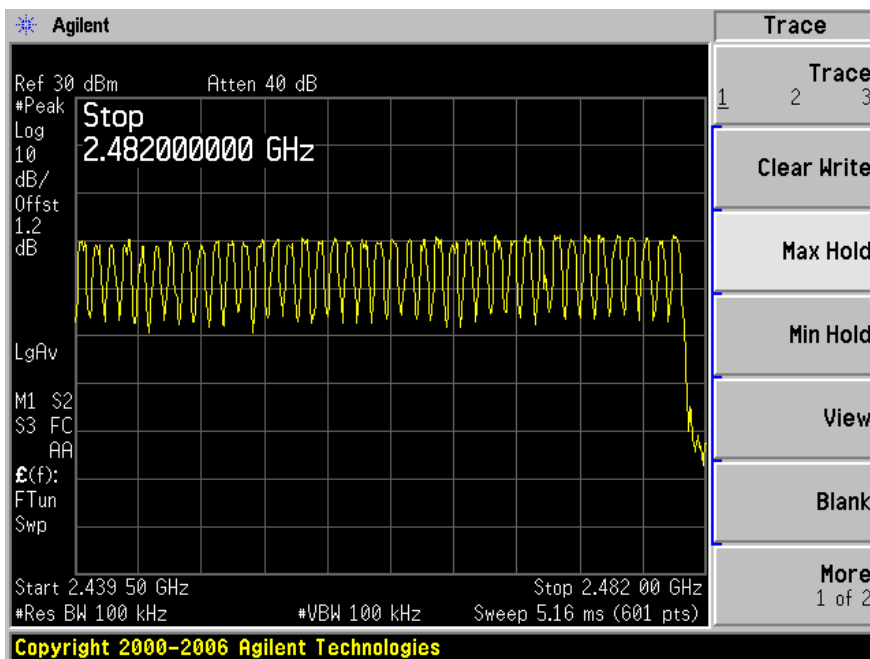

41 Channels between 2440 to 2483.5 MHz

15 FCC §15.247(a)(1)(iii) - Dwell Time

15.1 Applicable Standard

According to FCC §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

15.2 Measurement Procedure

5. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
6. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
7. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
8. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
9. Repeat above procedures until all frequencies measured were complete.

15.3 Test Equipment List and Details

| Manufacturer | Description | Model | Serial Number | Calibration Date |
|--------------|-------------------|--------|---------------|------------------|
| Agilent | Spectrum Analyzer | E4440A | MY44303352 | 2009-07-23 |

* **Statement of Traceability: BACL Corp.** attests that all calibrations have been performed per the NVLAP requirements, traceable to the NIST.

15.4 Test Environmental Conditions

| | |
|---------------------------|----------------|
| Temperature: | 18~21 °C |
| Relative Humidity: | 30~35 % |
| ATM Pressure: | 101.2-102.2kPa |

**The testing was performed by Kevin Li on 05-03-2010 in RF site.*

15.5 Measurement Results

DH1

| Channel | Frequency (MHz) | Pulse Width (ms) | Dwell Time (Sec.) | Limit (Sec.) | Results |
|---------|-----------------|------------------|-------------------|--------------|-----------|
| Low | 2402 | 0.377 | 0.12 | 0.4 | Compliant |
| Mid | 2440 | 0.377 | 0.12 | 0.4 | Compliant |
| High | 2480 | 0.373 | 0.12 | 0.4 | Compliant |

DH3

| Channel | Frequency (MHz) | Pulse Width (ms) | Dwell Time (Sec.) | Limit (Sec.) | Results |
|---------|-----------------|------------------|-------------------|--------------|-----------|
| Low | 2402 | 1.625 | 0.26 | 0.4 | Compliant |
| Mid | 2440 | 1.625 | 0.26 | 0.4 | Compliant |
| High | 2480 | 1.625 | 0.26 | 0.4 | Compliant |

DH5

| Channel | Frequency (MHz) | Pulse Width (ms) | Dwell Time (Sec.) | Limit (Sec.) | Results |
|---------|-----------------|------------------|-------------------|--------------|-----------|
| Low | 2402 | 2.875 | 0.31 | 0.4 | Compliant |
| Mid | 2440 | 2.867 | 0.30 | 0.4 | Compliant |
| High | 2480 | 2.867 | 0.30 | 0.4 | Compliant |

Note:

Dwell time = Pulse time*(hop rate/2/number of channels)*31.6 sec(DH1)

Dwell time = Pulse time*(hop rate/4/number of channels)*31.6 sec(DH3)

Dwell time = Pulse time*(hop rate/6/number of channels)*31.6 sec(DH5)


- Hop Rate = 1600
- Number of Channels = 79

Dwell time = Pulse time*(800/2/79)*6.4 sec


Please refer the following plots.

DH1


Low Channel

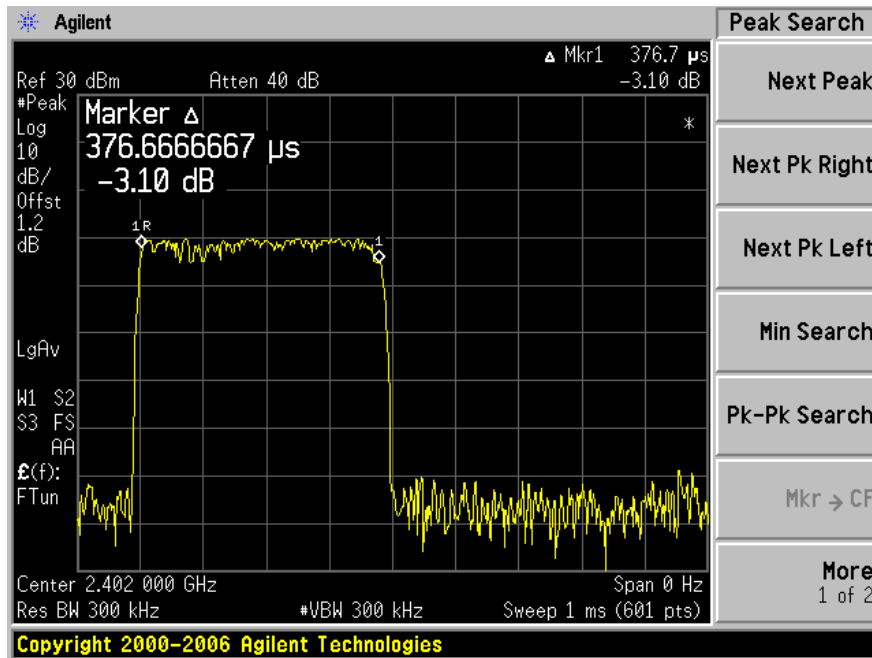

Middle Channel

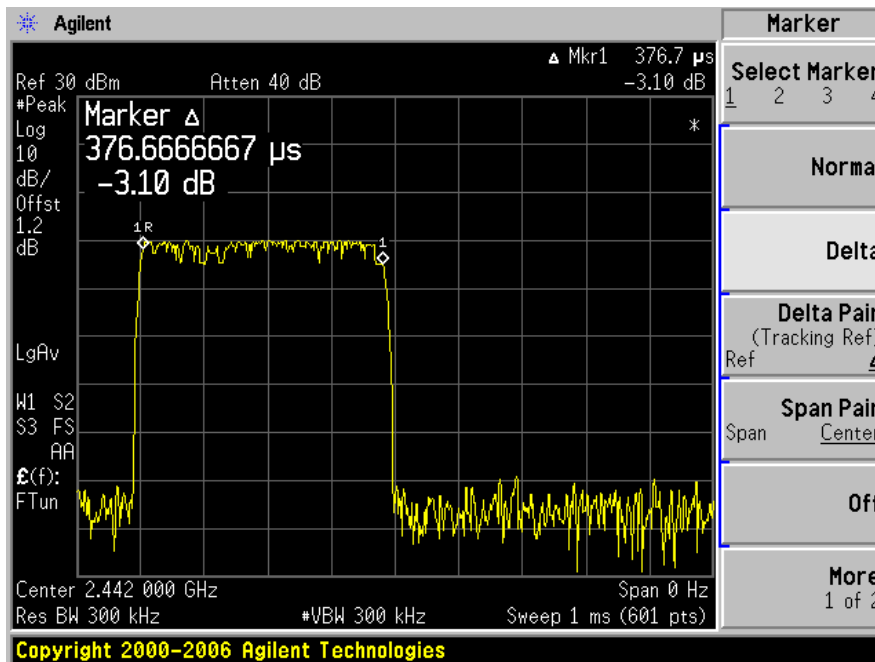


High Channel

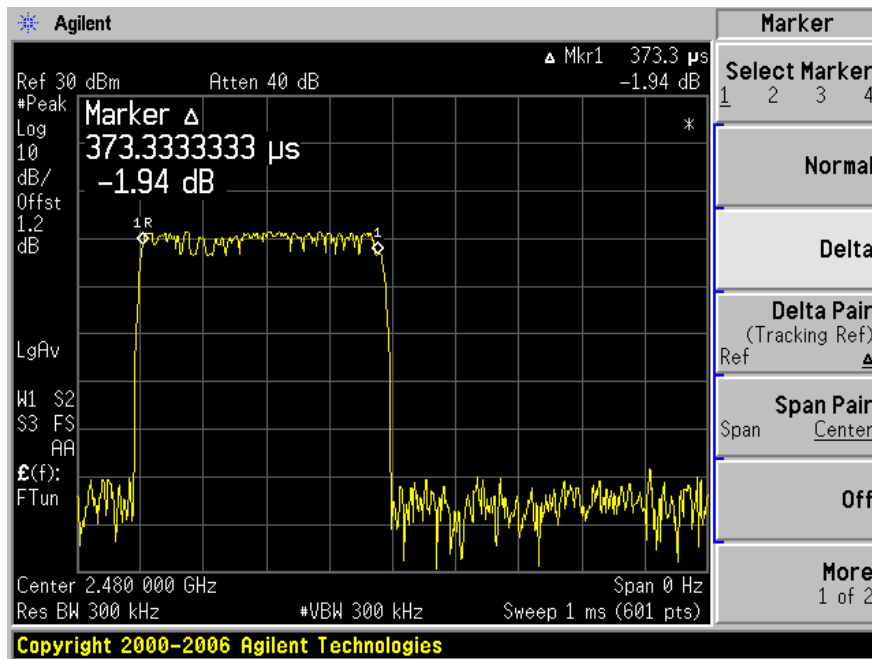


DH3


Low Channel

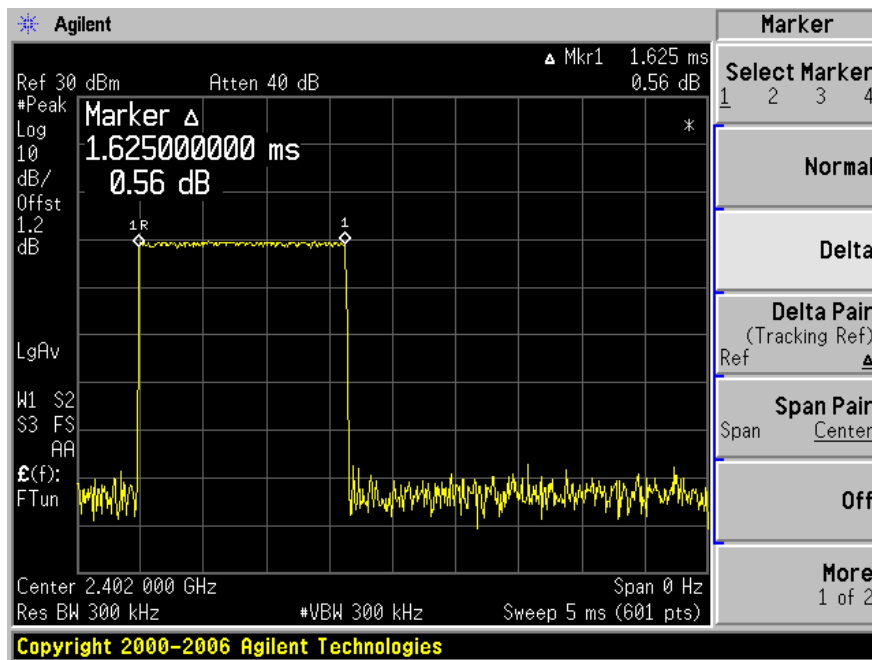

Middle Channel

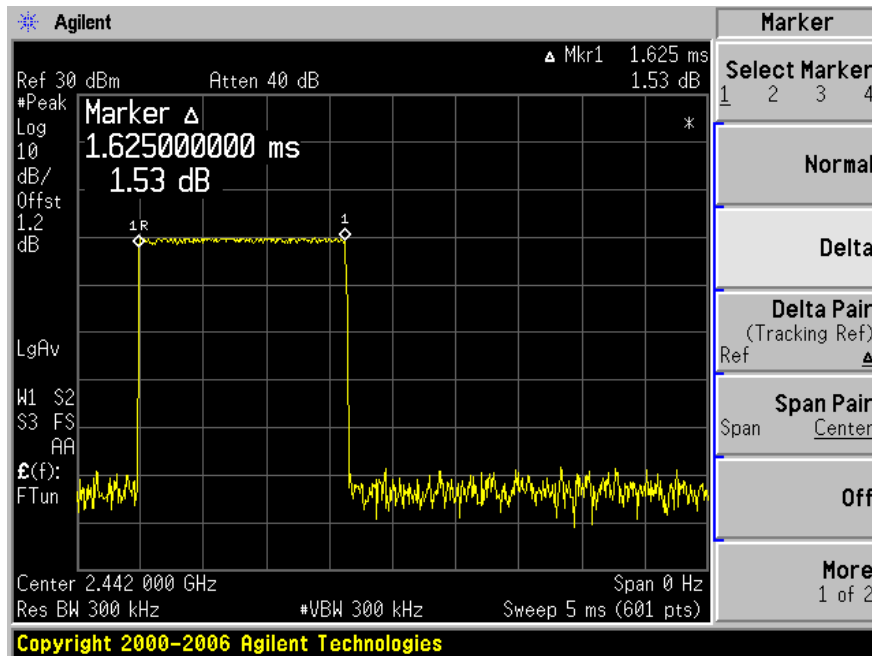


High Channel

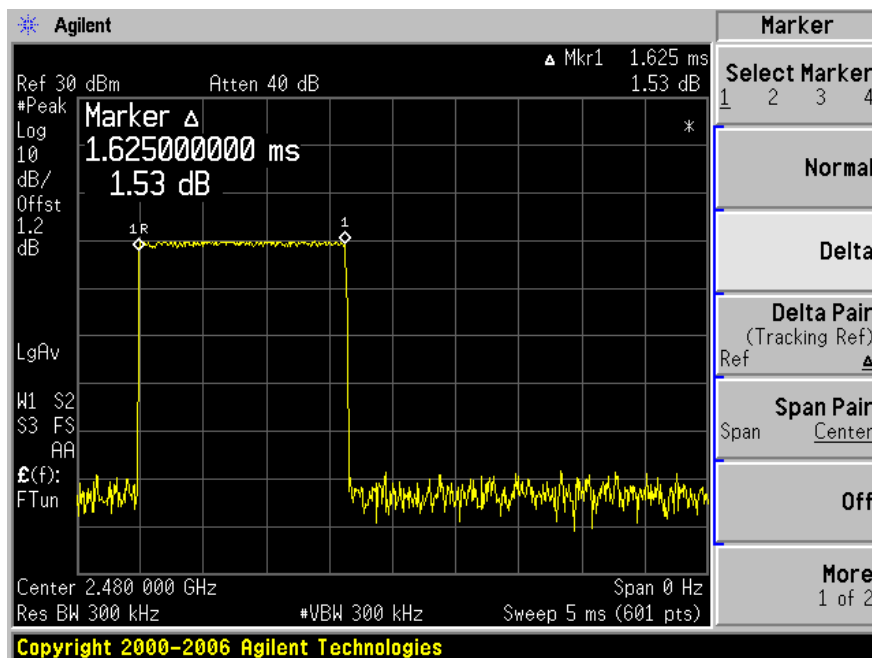


DH5

Low Channel

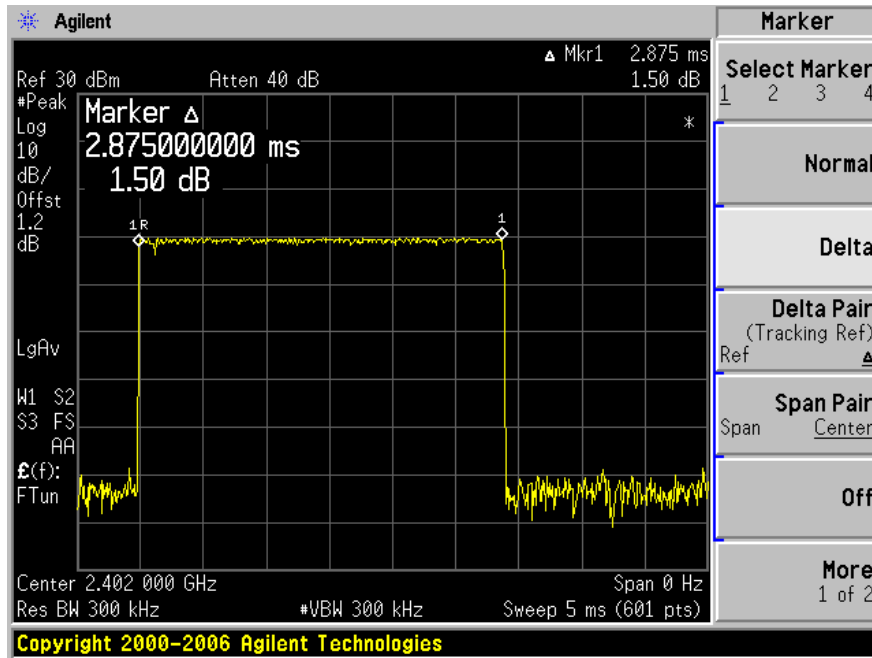

Middle Channel

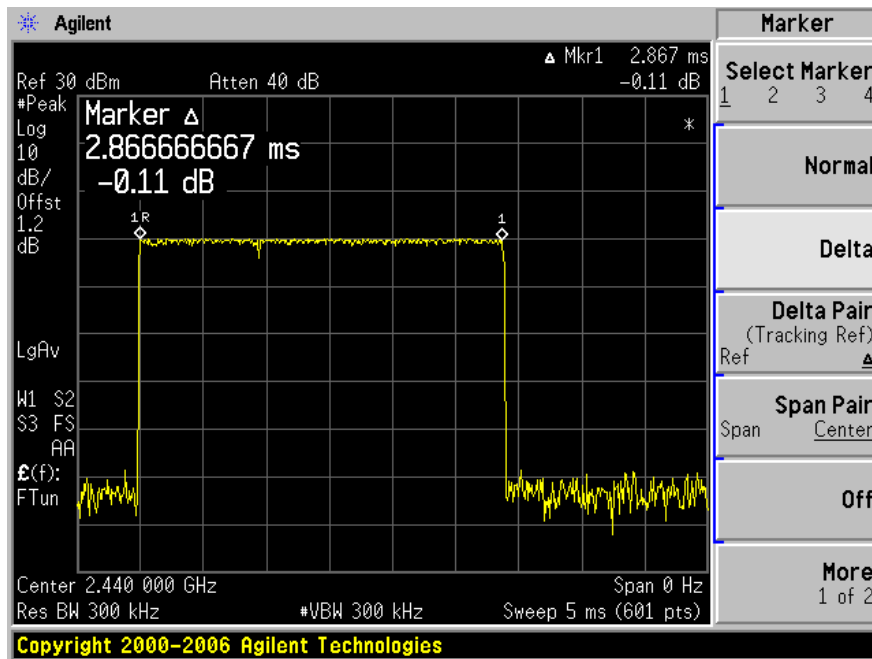

High Channel

