


| ITEM | DESCRIPTION | QTY |
|------|--|-----|
| 1 | Connector - 50 ohm Hirose H.FL-LP-DFS111(01) | 1 |
| 2 | Coaxial Cable - 50 ohm GORE CX2571 | 1 |

| ECN | REV | DESCRIPTION | DATE | APPROVED |
|--------|-----|--------------------------|---------|----------|
| | 1 | PRE-RELEASE | 28APR05 | |
| C10442 | 2 | INITIAL AGILE RELEASE | 02MAY05 | |
| C11119 | 3 | OVERALL LENGTH REDUCED | 13JUN05 | |
| C12185 | A | AGILE PRODUCTION RELEASE | 31AUG05 | |

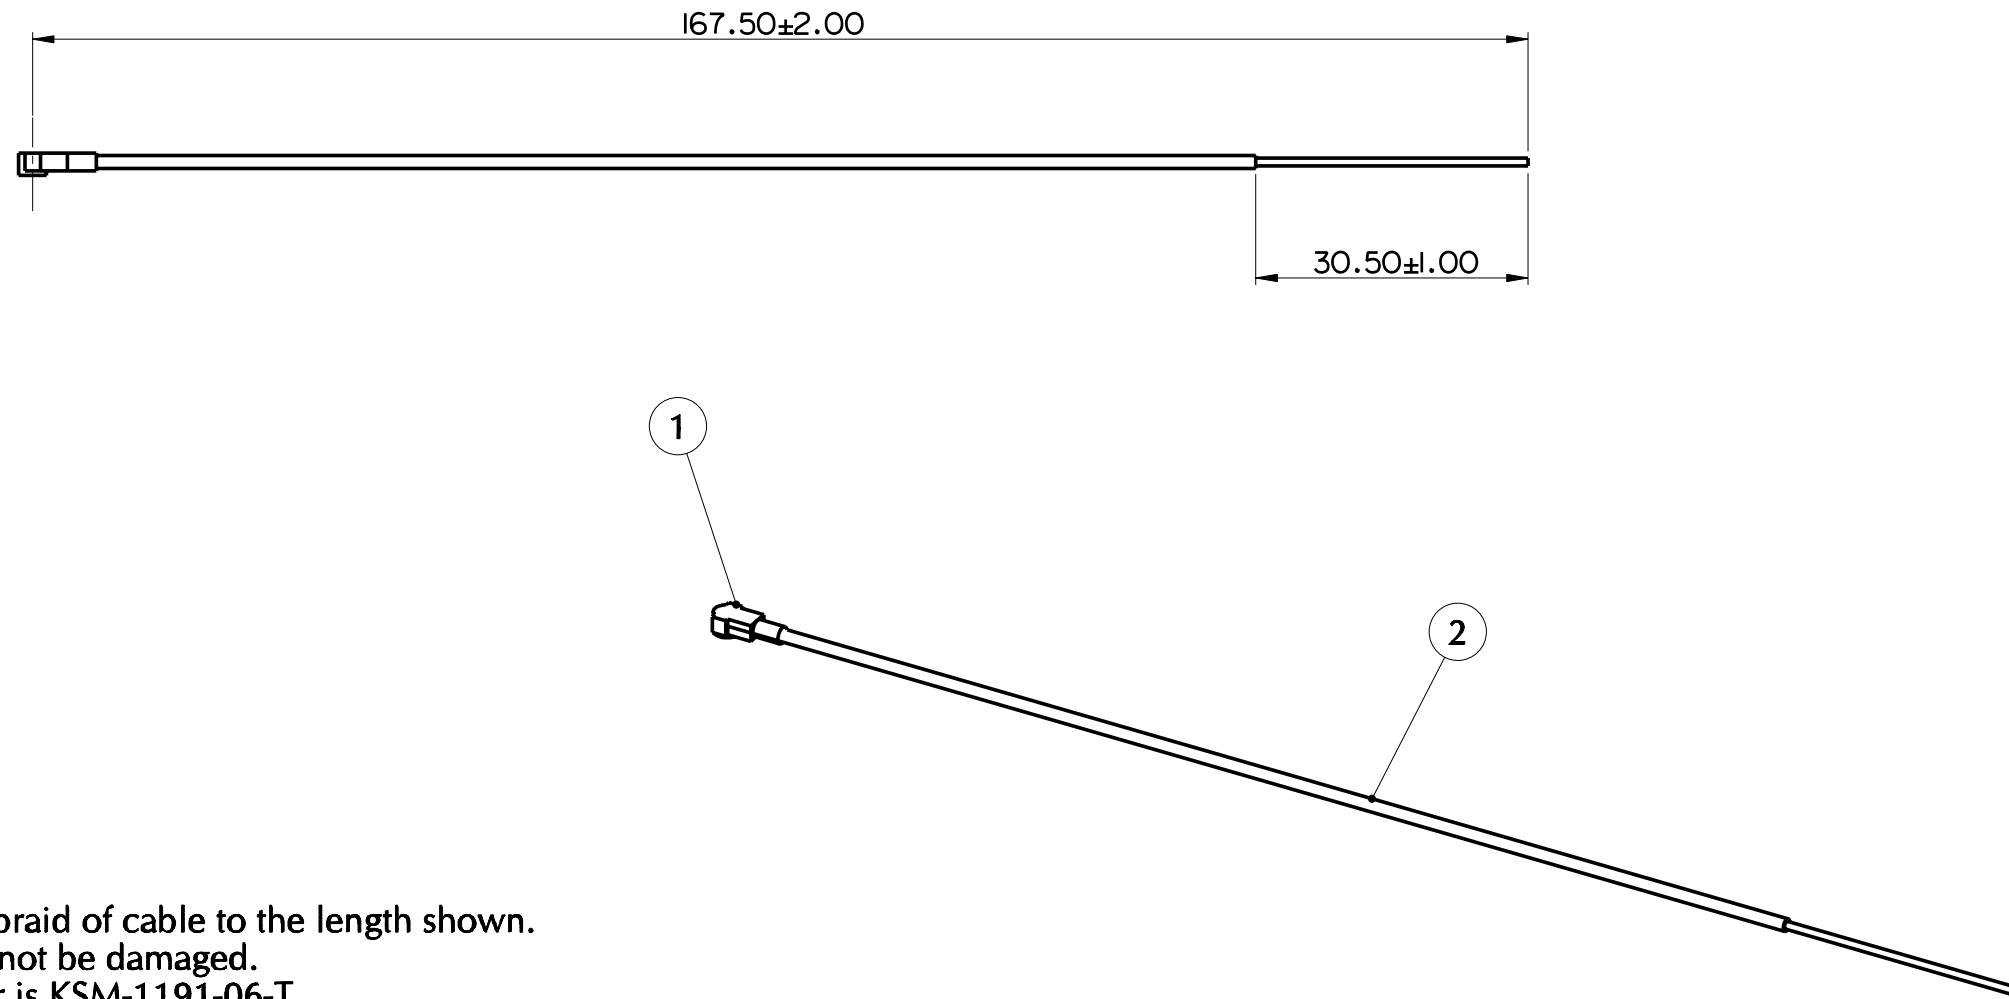

NOTES:

- Strip outer sheath and braid of cable to the length shown. Internal dielectric must not be damaged.
- Supplier's Part Number is KSM-1191-06-T.
- PACKAGING: Part to be packaged in an ESD safe bag. Bag must be labelled with Part Number, Revision and Quantity.

| | | | | | | |
|-----------------------|--|---------------------------|---------|--|--|-------------------------|
| MATERIAL SEE NOTES | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETRES TOLERANCES ARE: DECIMALS .X ± 0.500 .XX ± 0.200 .XXX ± 0.050 ANGLES ± 0.500 | APPROVALS | DATE | Trimble Navigation Limited Proprietary & Confidential | TITLE ANTENNA WIFI CLARK | |
| | | APPROVED BY | 28APR05 | | SIZE B | DWG NO. 61244 |
| FINISH SEE NOTES | THIRD ANGLE PROJECTION | ENGINEERED BY Tom Keen | 28APR05 | TEXT | SCALE 1.250 | SHEET 1 OF 1 |
| DO NOT SCALE DRAWING | | DRAWN BY Tom Keen | | | | |
| | | CHECKED BY | | | | |

Product Specification

Mica 2.4 GHz SMD Antenna



TABLE OF CONTENT

| | |
|---|----|
| 1. Features | 2 |
| 2. Description | 2 |
| 3. Application | 2 |
| 4. Model name | 3 |
| 5. General data | 3 |
| 6. Electrical characteristics | 3 |
| 7. Electrical performance | 4 |
| 7.1 Voltage Standing Wave Ratio | 4 |
| 7.2 3D-Radiation | 4 |
| 7.3 Radiation patterns | 4 |
| 8. Antenna Dimensions | 5 |
| 9. Antenna Foot print | 5 |
| 10. Electrical interface | 6 |
| 10.1 Transmission line and matching | 6 |
| 10.2 Test board dimensions | 6 |
| 10.3 Test board matching | 6 |
| 11. Soldering | 6 |
| 11.1 Recommended soldering conditions | 6 |
| 11.2 Leadfree soldering | 6 |
| 12. Reliability | 7 |
| 12.1 Temperature and Humidity | 7 |
| 12.2 Mechanical | 7 |
| 12.3 Miscellaneous | 7 |
| 12.4 Judgement standard | 7 |
| 13. Hazardous Material Regulation Conformance | 7 |
| 14. Application example | 8 |
| 15. Packaging | 9 |
| 15.1 Shelf storage recommendation | 9 |
| 15.2 Tape characteristics | 9 |
| 15.3 Reel dimension | 9 |
| 15.4 Box dimension | 9 |
| 15.5 Bag properties | 9 |
| 15.6 Reel label information | 9 |
| 16. Contact information | 10 |

1. FEATURES

- Designed for 2.4 GHz applications [Bluetooth™, WiFi™ (802.11b/g), Zigbee™, WiMedia™ etc.]
- Intended for SMD mounting
- Supplied in tape on reel

2. DESCRIPTION

The Mica antenna is intended for use with all 2.4 GHz applications. The antenna requires a groundplane, i.e your device acts as an active part of the antenna and thus demand careful consideration concerning its placement

3. APPLICATION

- Mobile phones
- PDAs
- Headsets
- Laptops
- Medical equipment
- Automotive

4. MODEL NAME

| | | | |
|-----------|-----------|-------------------|-------------------------------|
| 30 | 30 | A5645 - 01 | |
| | | | Drawing No. |
| | | | Technology -PCB |
| | | | Antenna Family -SMD |

5. GENERAL DATA


| | |
|-----------------------|------------------|
| Product Name | Mica 2.4 GHz |
| Article No. | 3030A5645-01 |
| Frequency | 2.4-2.5 GHz |
| Polarization | Linear |
| Operating temperature | -40 to + 85 degC |
| Impedance | 50 Ohm |
| Weight | 0.4 gram |
| Antenna type | SMD |

6. ELECTRICAL CHARACTERISTICS


| | Characteristics | | | Conditions* |
|--|-----------------|---------|---------|---|
| | Min | Typ | Max | |
| Peak Gain | 0.8 dBi | 1.2 dBi | 1.9 dBi | Frequency 2.4-2.5 GHz, Measured in 3D chamber (near field) |
| Efficiency | 70% | 75% | 79% | |
| VSWR | 1.0:1 | 1.5:1 | 1.9:1 | Frequency 2.4-2.5 GHz, Measured in Network Analyzer |
| *Note all data provided in this table are based on the gigaAnt reference board | | | | |

7. ELECTRICAL PERFORMANCE


7.1 Voltage Standing Wave Ratio

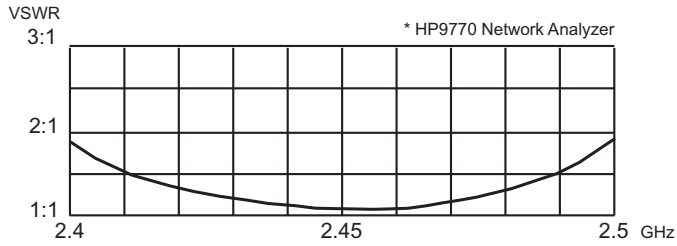


7.2 3D-Radiation

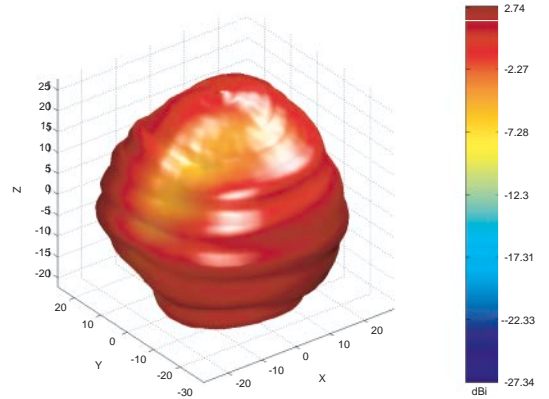


7.3 Radiation patterns

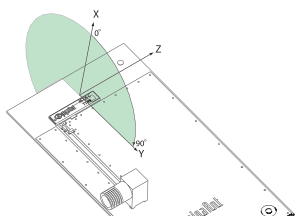

XY- Plane



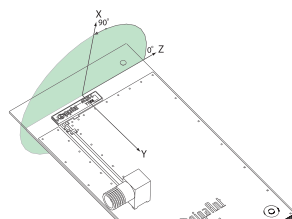


XZ- Plane



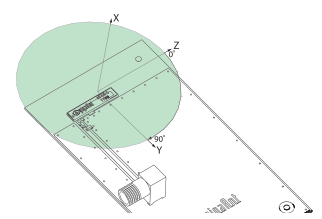


YZ- Plane




Total polarization

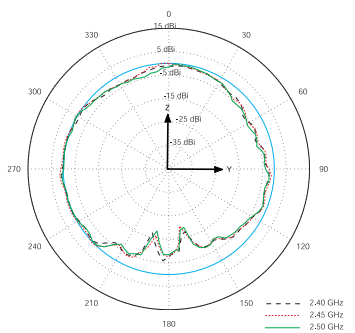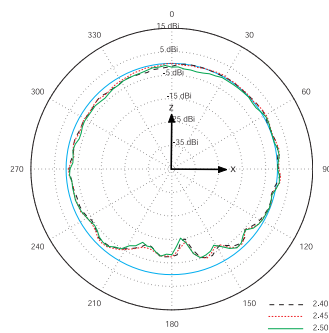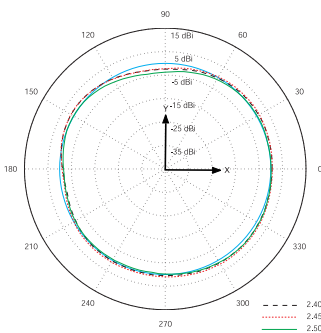


Vertical polarization

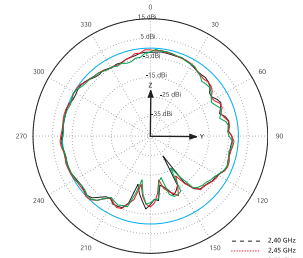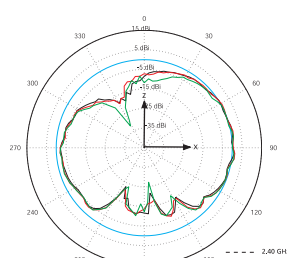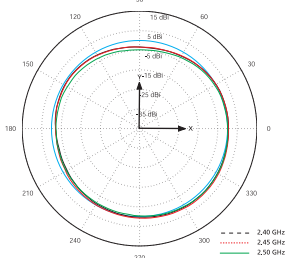

Horizontal polarization

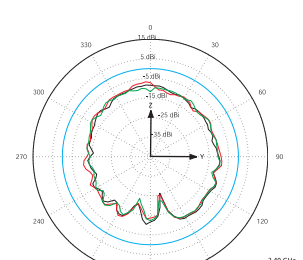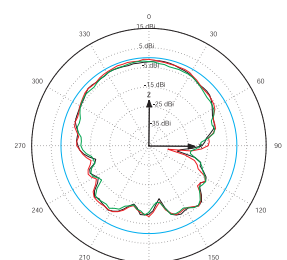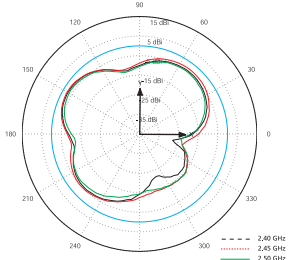


8. ANTENNA DIMENSIONS

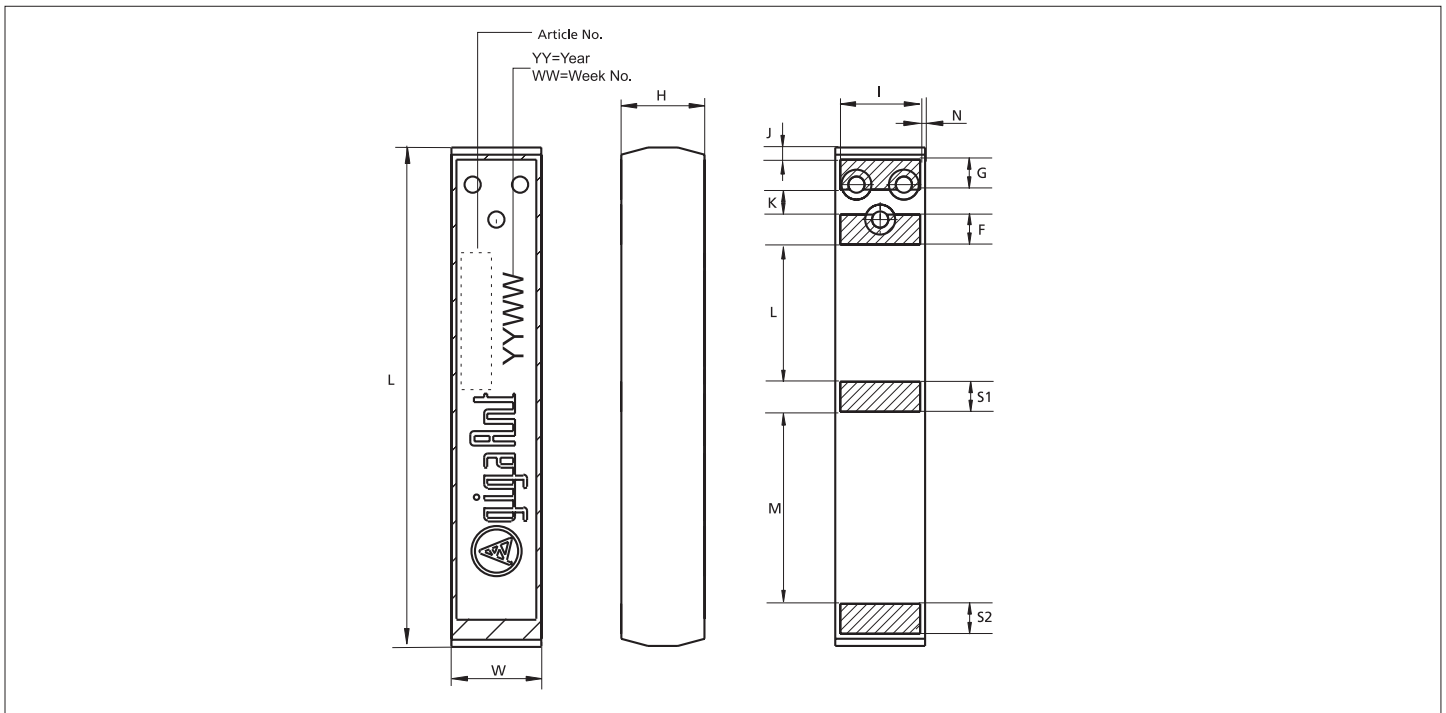

| L | W | H | G | F | S1, S2 | I | J | K | L | M | N |
|-----------|----------|---------|---------|---------|---------|---------|-----------|---------|---------|---------|---------|
| Length | Width | Height | Ground | Feed | Solder | Feed | Feed | | | | |
| 20.5 ±0.2 | 3.6 ±0.1 | 3.3±0.2 | 1.2±0.1 | 1.2±0.1 | 1.2±0.1 | 3.2±0.1 | 0.55±0.25 | 1.0±0.1 | 5.5±0.1 | 7.7±0.1 | 0.2±0.1 |

Dimensions in millimeter

9. ANTENNA FOOT PRINT

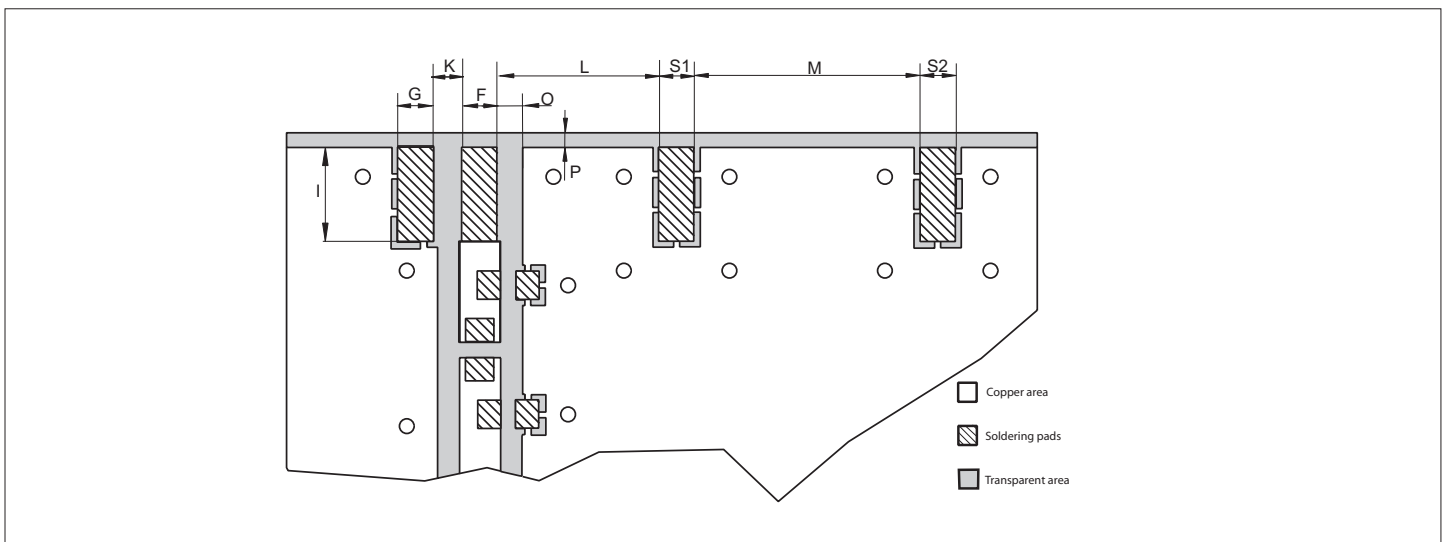


| G | F | S1 | S2 | I | K | L | M | O | P |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Ground | Feed | Solder | Solder | | | | | | |
| 1.2±0.1 | 1.2±0.1 | 1.2±0.1 | 1.2±0.1 | 3.2±0.1 | 1.0±0.1 | 5.5±0.1 | 7.7±0.1 | 0.5±0.1 | 0.5±0.1 |


Dimensions in millimeters

10. ELECTRICAL INTERFACE

10.1 Transmission line and matching

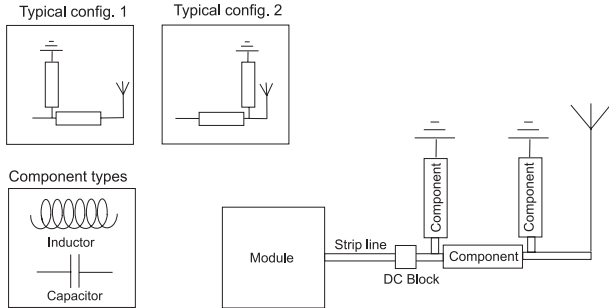


The matching network has to be individually designed using one, two or three components.

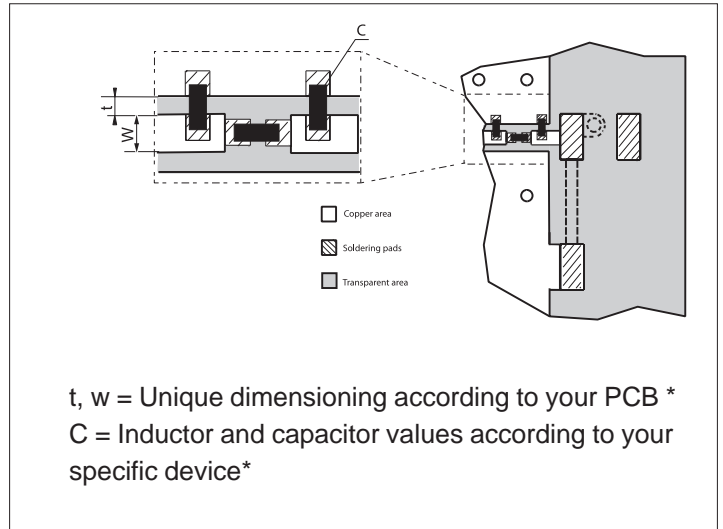

t, w = Unique dimensioning according to your PCB *
 C = Inductor and capacitor values according to your specific device*


* gigaAnt provides this service upon request

10.2 Test board dimensions

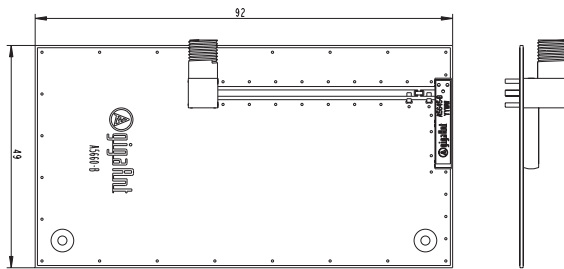

The testboard is designed for evaluation purposes for Mica 2.4 GHz SMD antenna. The board has the same size as a typical PCMCIA card and is fitted with an SMA connector.


10.3 Test board matching

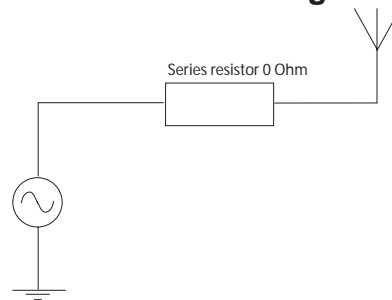

The testboard is matched with above specified component. Note! The component value(s) will vary depending on size of PCB, surrounding components etc.


11. SOLDERING

11.1 Recommended soldering conditions

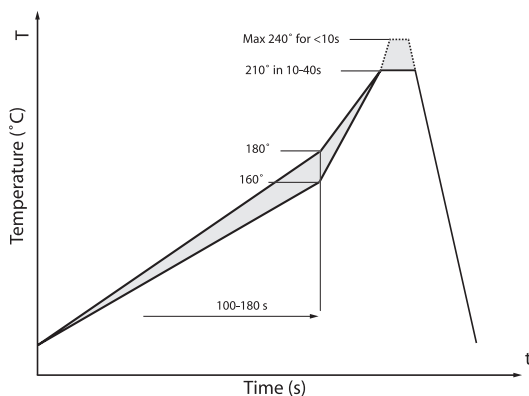

11.2 Leadfree soldering

The antenna has been tested and approved for leadfree soldering. The reflow curve and solder paste used is listed below.

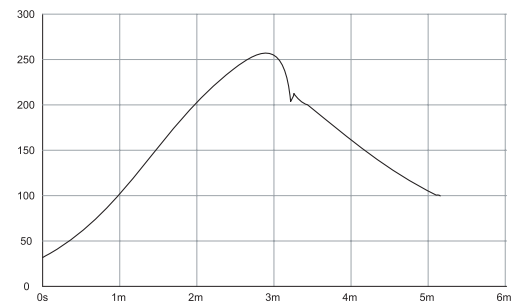

Solder paste: KOKI S3X58-M405

12. RELIABILITY

12.1 Temperature and Humidity

| Item | Standard | Low | High | Duration |
|----------------------------------|---|-------------------|-----------|---------------------|
| Operating temperature | EN/IEC 60068-2-2, Test Bd: Dry heat | -30 degC | +90 degC | - |
| Temperature cycling | EN/IEC 60068-2-14, Test Na: Change of temperature | -40 degC | +90 degC | 500 cycles / 10 min |
| Storage life Humidity | EN/IEC 60068-2-1, Test Ca: Damp heat | +60 degC / 90% RH | | 500 h |
| Storage life Low temperature | EN/IEC 60068-2-1, Test Ad: Cold | -55 degC | - | 500 h |
| Storage life High temperature | EN/IEC 60068-2-2, Test Bb: Dry heat | - | +125 degC | 500 h |

12.2 Mechanical

| Item | Standard | Low | High | Duration |
|-----------|--|---|------|---------------------------------------|
| Bending | IEC 60068-2-21, Test Ue1: Bending | Bending 1 mm at a rate of 1 mm/s with support at end of PCB 1mm depth on reference board | | |
| Shear | IEC 60068-2-21, Test Ue3: Shear | Force of 5 N applied to the side of the antenna. | | |
| Drop test | | Dummy weight: 150g Height: 170cm | | One drop at each side, total drops: 6 |
| Vibration | EN/IEC 60068-2-6, Test Fc (sinusoidal) | Acceleration spectral density:10-1000Hz Acceleration: 20m/s ² Number of axes: 3 mutually perpendicular | | 5 cycles per axis |

12.3 Miscellaneous

| Item | Standard | Low | High | Duration |
|---------------|----------------------------|---|------|----------|
| Solderability | EN/IEC 60068-2-58, Test Td | Visual inspection of soldering pads. Estimation of how many % of the pads that are well tin plated. | | |

12.4 Judgement standard


The judgement of the above tests should be made as follows:

1. Visual inspection - Normal appearance with no obvious cracking, peeling-off.
2. Electrical inspection - The DUT satisfies the VSWR specification throughout the 2.4-2.5 GHz band

13. HAZARDOUS MATERIAL REGULATION CONFORMANCE

| | |
|---|--|
| Cadmium and cadmium compound. | Lead and lead compound |
| Organic brominated compound (PBB, PBDE) | Mercury and mercury compound |
| Polychlorinated biphenyl (PCB) | Sesquivalent chrome compound |
| Polychlorinated naphthalene (PCN) | Chlorinated paraffin (CP) |
| Organic tin compound | Mirex |
| Asbestos | Formaldehyde |
| Azo compound | Tetra-bromo-bisphenol-A-bis (TBBP-A-bis) |

14. APPLICATION EXAMPLE

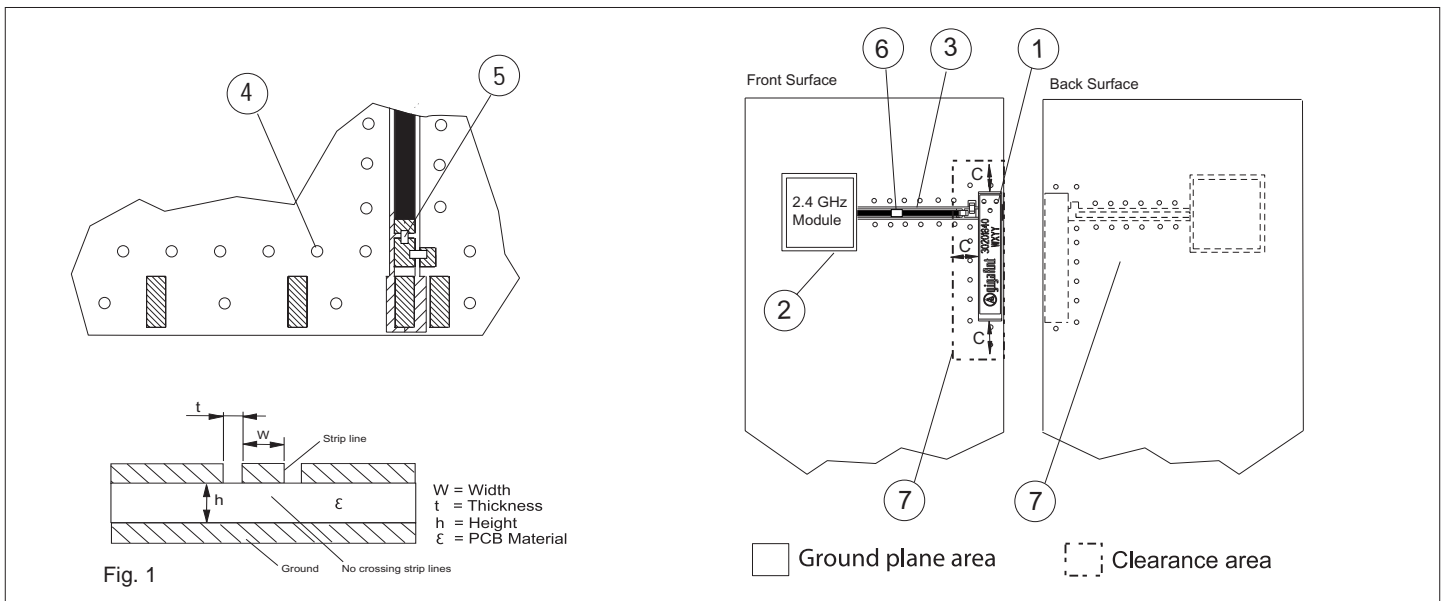

General

The antenna is of a quarter wave type and is dependent on the groundplane area to complete the antenna function. The antenna performance is also dependent on the size of the groundplane.

1. Placement of the antenna

The antenna shall be placed on a groundplane area, preferably at the edge of the PCB oriented as above.

2. Placement of 2.4 GHz module

To avoid losses in the strip line, the module shall be placed as close to the antenna as possible.

3. Strip line

The strip line must be dimensioned according to your specific PCB. (see fig 1). No crossing strip lines are allowed between the strip line and its ground plane.

4. Via connections

To avoid spurious effects, via connections must be made to analogue ground.

5. Component matching

Component values are depending on antenna placement, PCB dimensions and location of other components.

6. DC Block

Might be needed depending on RF Module configuration.

7. Clearance

Front surface: Minimum clearance to other components, C = 2-5 mm

Back surface: Components allowed.

8. Casing material

No metal casing or plastics using metal flakes shall be used, avoid also metallic based paint or laquer.


**Note ! Incorrect implementation of the antenna will affect the performance.
Contact gigaAnt for implementation services.**

15. PACKAGING

15.1 Shelf storage recommendation

| | |
|---------------|---|
| Temperature | -10 to +40 degree C |
| Humidity | Less than 75% RH |
| Shelf Life | 18 Months |
| Storage place | Away from corrosive gas and direct sunlight |

15.2 Tape characteristics

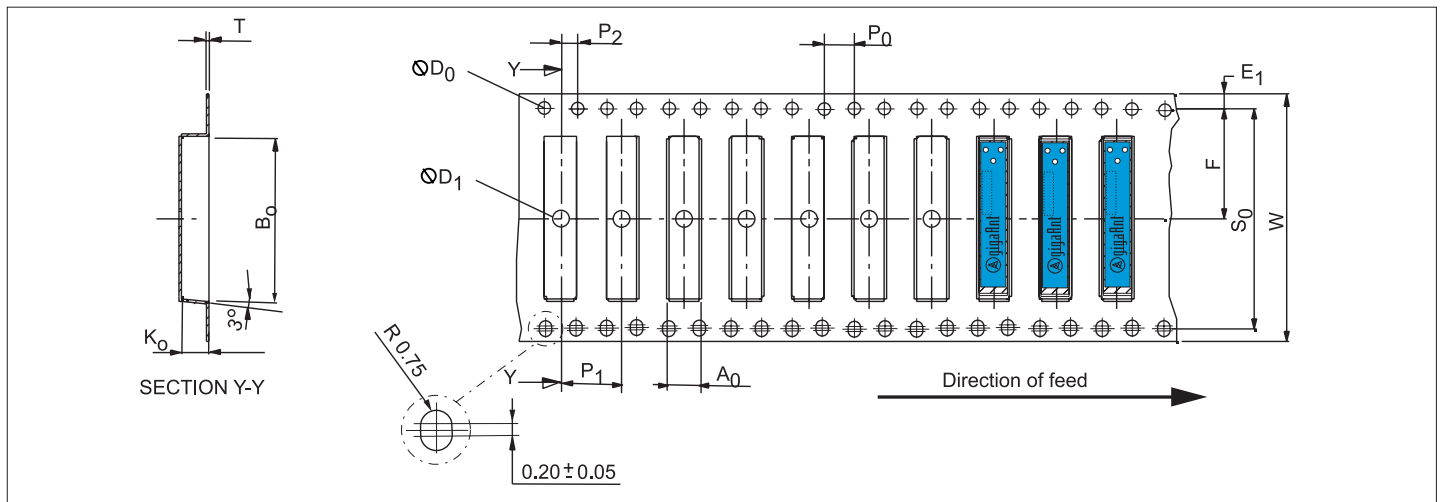

| W | S ₀ | F | E ₁ | P ₀ | P ₁ | P ₂ | A ₀ | B ₀ | K ₀ | T | D ₀ | D ₁ |
|--------|----------------|----------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------|----------------|----------------|
| 32±0.3 | 28.4±0.3 | 14.2±0.1 | 1.75±0.1 | 4.0±0.1 | 8.0±0.1 | 2.0±0.1 | 4.0±0.1 | 21±0.1 | 3.7±0.1 | 0.3±0.05 | 1.5±0.1 | Min 2.0 |


Dimensions in millimeter

| Quantity | Leading space | Trailing space |
|-----------------|--------------------------|--------------------------|
| 2000 Pcs / reel | 50 blank antenna holders | 37 blank antenna holders |

15.3 Reel dimension

Material: Conductive Polystyrene


Width [mm] W: 32
 Reel dia [mm] D: 330(13")
 Hub dia [mm] H: 100(4")
 Shaft dia [mm] C: 13

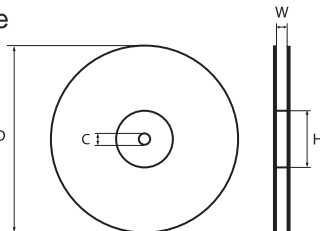

15.4 Box dimension

Material: Cardboard

Width [mm] W: 345
 Breadth [mm] B: 345
 Thickness [mm] H: 45

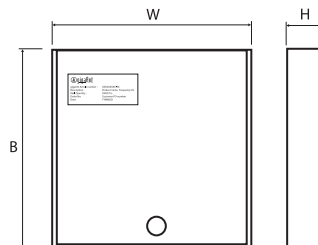

15.5 Bag properties

Antistatic Aluminium Moisture Barrier Bag
 Thickness [mil] T: 3.2

15.6 Reel label information



gigaAnt Article number : XXXXXXXX-XX
 Description : Product name, Frequency Hz
 Reel Quantity : XXXX Pcs.
 Order No: Customer PO number
 Date: YYMMDD

16. CONTACT INFORMATION

www.gigaAnt.com

Europe & Africa

e-mail: info.EU@gigaAnt.com

Tel: +46 46 286 4177

America

e-mail: info.US@gigaAnt.com

Tel: +1 817 430 7291

Asia and Pacific

e-mail: info.ASIA@gigaAnt.com

Tel: +656 890 6200

Or your local gigaAnt representative