



SAR Test Report

FOR:

**Company: Trimble Navigation Limited
Model Name: 88951**

**FCC ID: JUP616
IC ID: 1756A-616**

Test Report #: SAR_TRIM2_001_09001_FCC_616_rev1

Date of Report: 2011-03-03



**FCC Listed #:
A2LA Accredited**

**IC Recognized #
3462B-1**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansoerge, Hans Peter May.

TABLE OF CONTENTS

1. Assessment	4
2. Administrative Data	5
2.1. Identification of the Testing Laboratory Issuing the EMC Test Report	5
2.2. Identification of the Client	5
2.3. Identification of the Manufacturer	5
3. Equipment under Test (EUT)	6
3.1. Specification of the Equipment under Test	6
3.2. Identification of the Equipment Under Test (EUT).....	7
3.3. Identification of Accessory equipment.....	7
4. Subject of Investigation	8
4.1. The IEEE Standard C95.1 and the FCC Exposure Criteria.....	8
4.2. Distinction Between Exposed Population, Duration of Exposure and Frequencies	8
4.3. Distinction between Maximum Permissible Exposure and SAR Limits.....	9
4.4. SAR Limit.....	9
5. The FCC Measurement Procedure	10
5.1. General Requirements.....	10
5.2. Body-worn and Other Configurations.....	10
5.3. Procedure for assessing the peak spatial-average SAR.....	11
5.4. Determination of the largest peak spatial-average SAR	13
6. The Measurement System	14
6.1. Robot system specification	14
6.2. Probe and amplifier specification.....	15
6.3. Phantoms	15
6.4. SAR measurement procedure.....	16
6.5. SARA2 Interpolation and Extrapolation schemes.....	16
6.6. Interpolation of 2D area scan	17



- 6.7. Extrapolation of 3D scan.....17
- 6.8. Interpolation of 3D scan and volume averaging17

- 7. *Uncertainty Assessment* 19
 - 7.1. Measurement Uncertainty Budget20

- 8. *Test results summary* 21
 - 8.1. Conducted Average Output Power21
 - 8.2. Test Positions and Configurations.....23
 - 8.3. SAR results for Body Exposure.....24
 - 8.4. SAR results for hand exposure25
 - 8.5. Dipole verification.....26

- 9. *References* 27

- 10. *Report History* 28



1. Assessment

The following device was tested against the limits for general population uncontrolled exposure specified in FCC 2.1093. The device was tested according to measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), RSS-102 Issue 4, and IEEE P1528/D1.2, April 21, 2003 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Trimble Navigation Limited	GeoExplorer 6000 Series: GeoXH / GeoXT Handheld	88951

Responsible for Testing Laboratory:

2011-03-03	Compliance	Heiko Strehlow (Director of Compliance)	
Date	Section	Name	Signature

Responsible for the Report:

2011-03-03	Compliance	Josie Sabado (Project Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2. Administrative Data

2.1. Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Test Lab Director:	Heiko Strehlow
Responsible Project Leader:	Josie Sabado

2.2. Identification of the Client

Applicant's Name:	Trimble Navigation Limited
Street Address:	935 Stewart Drive
City/Zip Code	Sunnyvale, CA 94088-3642
Country	United States
Contact Person:	Roy Cann
Phone No.	+1-408-481-8284
e-mail:	Roy.Cann@Trimble.com

2.3. Identification of the Manufacturer

Manufacturer's Name:	Trimble Navigation New Zealand Ltd
Manufacturers Address:	11 Birmingham Drive, Riccarton
City/Zip Code	Christchurch, Canterbury 8024
Country	New Zealand

3. Equipment under Test (EUT)

3.1. Specification of the Equipment under Test

Product Type:	Portable
RF Exposure Environment:	General/Uncontrolled
Marketing Name:	GeoExplorer 6000 Series
Model No:	88951
Hardware Revision :	1
Software Revision :	OS 6.5.1 (Build 20192) Nov 8 2010
FCC-ID:	JUP616
IC-ID :	1756A-616
Frequency Range:	GSM 850: 824.2-848.8MHz PCS 1900: 1850.2-1909.8MHz FDD V: 826.4-846.6MHz FDD II: 1852.4-1907.6MHz 802.11 b/g: 2400-2483.5MHz Bluetooth: 2400-2483.5MHz GPS: 1575.42MHz, 1227.60MHz
Number of Channels:	GSM850: 125 PCS 1900: 300 FDD II: 278 FDD V: 103 802.11 b/g: 11 Bluetooth: 79
Type(s) of Modulation:	802.11b/g: CCK, BPSK, QPSK, 16QAM, 64QAM Bluetooth: GFSK, DQPSK, 8DPSK WWAN 2G: GMSK, 8PSK WWAN 3G: QPSK, 16QAM
Modes of Operation:	GSM/(E)GPRS/WCDMA, MS Class 10, Capability Class B 802.11 b/g Bluetooth + 2.1 EDR GPS (Receive only)
Antenna Type:	Cellular: Cirocomm PiFA Foil Antenna 802.11 b/g, Bluetooth: Pulse Antenna W3008 Omnidirectional, 1.7dBi

Maximum Conducted Output Power:	WLAN 802.11 b: 18.1dBm WLAN 802.11 g: 13.9dBm Bluetooth: -6.41dBm GSM 850: 32.0dBm PCS 1900: 29.4dBm WCDMA FDDV: 22.16dBm WCDMA FDDII: 22.8dBm
--	--

3.2. Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version	Comments
1	5043452638	1	OS 6.5.1 (Build 20192) Nov 8 2010	Radiated unit
2	5043452637	1	OS 6.5.1 (Build 20192) Nov 8 2010	Conducted unit

3.3. Identification of Accessory equipment

No accessory equipment

4. Subject of Investigation

The objective of the measurements done by Cetecom Inc. was the dosimetric assessment of one device. The tests were performed in configurations for devices operated next to a person's body. The examinations were carried out with the dosimetric assessment system SARA2 described below.

4.1. The IEEE Standard C95.1 and the FCC Exposure Criteria

In the USA the recent FCC exposure criteria [FCC 2001] and IC exposure criteria [IC 2010] are based upon the IEEE Standard C95.1 [IEEE 1999]. The IEEE standard C95.1 sets limits for human exposure to radio frequency electromagnetic fields in the frequency range 3 kHz to 300 GHz.

4.2. Distinction Between Exposed Population, Duration of Exposure and Frequencies

The American Standard [IEEE 1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in controlled environments higher field strengths are admissible. In addition the duration of exposure is considered. Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

4.3. Distinction between Maximum Permissible Exposure and SAR Limits

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength E inside the human body, the conductivity σ and the mass density ρ of the biological tissue:

$$SAR = \sigma \frac{E^2}{\rho} = c \frac{\partial T}{\partial t} \Big|_{t \rightarrow 0^+}$$

The specific absorption rate describes the initial rate of temperature rise $\partial T / \partial t$ as a function of the specific heat capacity c of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric E and magnetic field strength H and power density S , derived from the SAR limits. The limits for E , H and S have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

4.4. SAR Limit

In this report the comparison between the American exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded.

Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and mobile respectively portable transmitters. According to Table 1 the SAR values have to be averaged over a mass of 1 g (SAR_{1g}) with the shape of a cube for body exposure. For hand exposure the SAR values have to be averaged over a mass of 10 g with the shape of a cube.

Standard	Status	Exposure	SAR limit (W/kg)
IEEE C95.1	In force	Body	1.6
IEEE C95.1	In force	Hand	4.0

Table 1: Relevant spatial peak SAR limit

5. The FCC Measurement Procedure

The Federal Communications Commission (FCC) has published a report and order on the 1st of August 1996 [FCC 1996], which requires routine dosimetric assessment of mobile telecommunications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. In 2001 the Commission's Office of Engineering and Technology has released Edition 01-01 of Supplement C to OET Bulletin 65. This revised edition, which replaces Edition 97-01, provides additional guidance and information for evaluating compliance of mobile and portable devices with FCC limits for human exposure to radiofrequency emissions [FCC 2001]. In March 2008 FCC released a document for 3G devices called SAR Measurement Procedures for 3G Devices. In April 2008 FCC released a document for laptop computers called SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens.

5.1. General Requirements

The test shall be performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature shall be in the range of 20°C to 26°C and 30-70% humidity.

5.2. Body-worn and Other Configurations

Phantom Requirements

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

Test Position

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration. Devices with a headset output shall be tested with a connected headset.

Test to be Performed

For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do. For multiple accessories that do not contain metallic components, the device may be tested only with that accessory which provides the closest spacing to the body. For multiple accessories that contain metallic components, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component, only the accessory that provides the closest spacing to the body must be tested. If the manufacturer provides none body-worn accessories a separation distance of 1.5 cm between the back of the device and the flat phantom is recommended. Other separation distances may be used, but they shall not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

For devices with retractable antenna the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device, or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

5.3. Procedure for assessing the peak spatial-average SAR

Step 1: Power reference measurement:

Prior to the SAR test, a local SAR measurement should be taken at a user-selected spatial reference point to monitor power variations during testing. For example, this power reference point can be spaced 10 mm or less in the normal direction from the liquid-shell interface and within ± 10 mm transverse to the normal line at the ear reference point.

Step 2: Area scan

The measurement procedures for evaluating SAR associated with wireless handsets typically start with a coarse measurement grid in order to determine the approximate location of the local peak SAR values. This is referred to as the "area scan" procedure. The SAR distribution is scanned along the inside surface of typically half of the head of the phantom but at least larger than the areas projected (normal to the phantom's surface) by the handset and antenna. An example grid is given in Figure 4. The distance between the measured points and phantom surface should be less than 8 mm, and should remain constant (variation less than ± 1 mm) during the entire scan in order to determine the locations of the local peak SAR with sufficient precision. The distance between the measurement points should enable the detection of the location of local maximum with an accuracy of better than half the linear dimension of the tissue cube after interpolation. The resolution can also be tested using the functions in Annex E (see E.5.2). The approximate locations of the peak SARs should be determined from area scan. Since a given amplitude local peak with steep gradients may produce lower spatial-average SAR than slightly lower amplitude peaks with less steep gradients, it is necessary to evaluate the other peaks as well. However, since the spatial gradients of local SAR peaks are a function of wavelength inside the tissue simulating liquid and incident magnetic field strength, it is not necessary to evaluate peaks that are less than -2 dB of the local maximum. Two-dimensional spline algorithms [Press, et al, 1996], [Brishoual, 2001] are typically used to determine the peaks and gradients within the scanned area. If the peak is closer than one-half of the linear dimension of the 1 g or 10 g tissue cube to the scan border, the measurement area should be enlarged if possible, e.g., by tilting the probe or the phantom (see Figure 5).

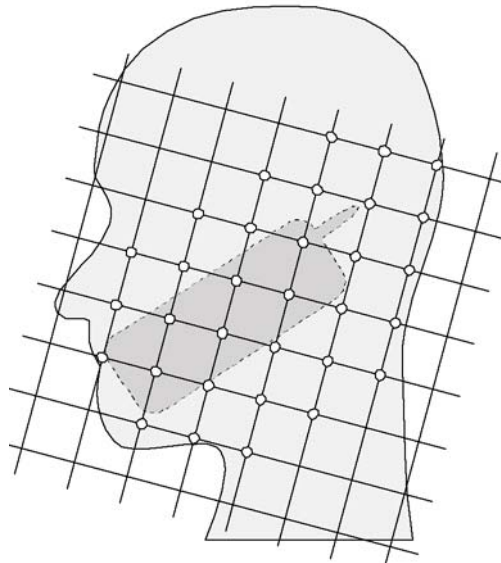


Figure 4 – Example of an area scan including the position of the handset. The scanned area (white dots) should be larger than the area projected by the handset and antenna.

Step 3: Zoom scan

In order to assess the peak spatial SAR values averaged over a 1 g and 10 g cube, fine resolution volume scans, called "zoom scans", are performed at the peak SAR locations determined during the "area scan." The zoom scan volume should have at least 1.5 times the linear dimension of either a 1 g or a 10 g tissue cube for whichever peak spatial-average SAR is being evaluated. The peak local SAR locations that were determined in the area scan (interpolated value) should be on the centerline of the zoom scans. The centerline is the line that is normal to the surface and in the center of the volume scan. If this is not possible, the zoom scan can be shifted but not by more than half the dimension of the 1 g or a 10 g tissue cube.

The maximum spatial-average SAR is determined by a numerical analysis of the SAR values obtained in the volume of the zoom scan, whereby interpolation (between measured points) and extrapolation (between surface and closest measured points) routines should be applied. A 3-D-spline algorithm [Press, et al, 1996], [Kreyszig, 1983], [Brishoual, 2001] can be used for interpolation and a trapezoidal algorithm for the integration (averaging). Scan resolutions of larger than 2 mm can be used provided the uncertainty is evaluated according to E (see E.5).

In some areas of the phantom, such as the jaw and upper head region, the angle of the probe with respect to the line normal to the surface might become large, e.g., at angles larger than $\pm 30^\circ$ (see Figure 5), which may increase the boundary effect to an unacceptable level. In these cases, a change in the orientation of the probe and/or the phantom is recommended during the zoom scan so that the angle between the probe housing tube and the line normal to the surface is significantly reduced ($<30^\circ$).

Step 4: Power reference measurement

The local SAR should be measured at exactly the same location as in Step 1. The absolute value of the measurement drift (the difference between the SAR measured in Step 4 and Step 1) should be recorded in the uncertainty budget. It is recommended that the drift be kept within $\pm 5\%$. If this is not possible, even with repeat testing, additional information may be used to demonstrate the power stability during the test. Power reference measurements can be taken after each zoom scan, if more than one zoom scan is needed. However, the drift should always be referred to the initial state with fully charged battery.

5.4. Determination of the largest peak spatial-average SAR

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes should be tested for each frequency band according to steps 1 to 3 below.

Step 1: The tests of 6.4 should be conducted at the channel that is closest to the center of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom,
- b) all configurations for each device position in (a), e.g. antenna extended and retracted, and
- c) all operational modes for each device position in (a) and configuration in (b) in each frequency band, e.g. analog and digital.

If more than three frequencies need to be tested, (i.e., $N_c > 3$), then all frequencies, configurations and modes must be tested for all of the above positions.

Step 2: For the condition providing highest spatial peak SAR determined in Step 1 conduct all tests of 6.4 at all other test frequencies, e.g. lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the spatial peak SAR value determined in Step 1 is within 3dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well¹.

Step 3: Examine all data to determine the largest value of the peak spatial-average SAR found in Steps 1 to 2.

6. The Measurement System

6.1. Robot system specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

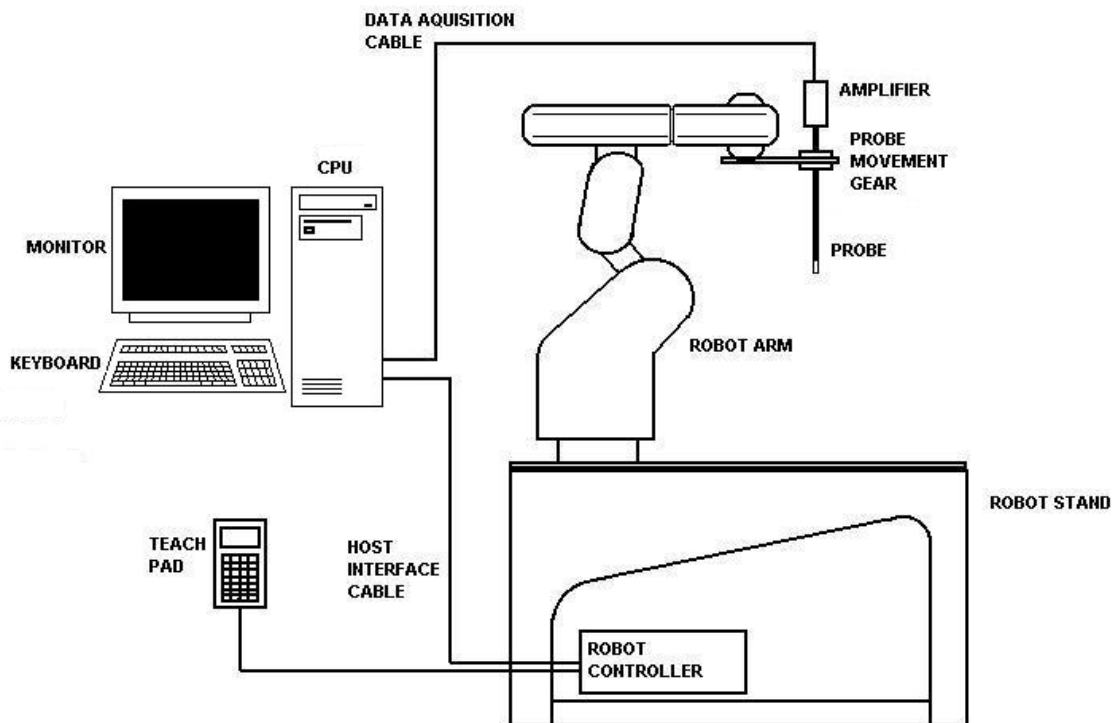


Figure 5: Schematic diagram of the SAR measurement system

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.001mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

6.2. Probe and amplifier specification

Indexsar isotropic immersible SAR probe

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. Probe calibration is described in the probe's calibration certificate (see appendix C.). The system uses diode compression potential (DCP) to determine SAR values for different types of modulation. Crest factor is not used for determining SAR values. The DCP for different types of modulation is determined during the probe calibration procedure. For a more detailed explanation see *IndexSAR Immesible SAR Probe Calibration Report* included in Appendix C of this report.

IXP-010 Amplifier

The amplifier unit has a multi-pole connector to connect to the probe and a multiplexer selects between the 3-channel single-ended inputs. A 16-bit AtoD converter with programmable gain is used along with an on-board micro-controller with non-volatile firmware. Battery life is around 150 hours and data are transferred to the PC via 3m of duplex optical fibre and a self-powered RS232 to optical converter.

6.3. Phantoms

The Specific Anthropomorphic Mannequin (SAM) Upright Phantom is fabricated using moulds generated from the CAD files as specified by CENELEC EN50361. It is mounted via a rotation base to a supporting table, which also holds the robotic positioner. The phantom and robot alignment is assured by both mechanical and laser registration systems. The box phantom used for body testing and for validation is manufactured from Perspex. The material is 2 mm in thickness on the test surfaces and 4 mm in thickness on the other surfaces. Its dimensions are: X=21 cm., Y=20.5 cm., Z=16 cm.

6.4. SAR measurement procedure



Figure 6: Principal components of the SAR measurement test bench

The major components of the test bench are shown in the picture above. A test set and dipole antenna control the handset via an air link and a low-mass phone holder can position the phone at either ear. Graduated scales are provided to set the phone in the 15 degree position. The upright phantom head holds approx. 7 litres of simulant liquid. The phantom is filled and emptied through a 45mm diameter penetration hole in the top of the head.

After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

6.5. SARA2 Interpolation and Extrapolation schemes

(See support document IXS-0202)

SARA2 software contains support for both 2D cubic B-spline interpolation as well as 3D cubic B-spline interpolation. In addition, for extrapolation purposes, a general n-th order polynomial fitting routine is implemented following a singular value decomposition algorithm presented in [4]. A 4th order polynomial fit is used by default for data extrapolation, but a linear-logarithmic fitting function can be selected as an option. The polynomial fitting procedures have been tested by comparing the fitting coefficients generated by the SARA2 procedures with those obtained using the polynomial fit functions of Microsoft Excel when applied to the same test input data.

6.6. Interpolation of 2D area scan

The 2D cubic B-spline interpolation is used after the initial area scan at fixed distance from the phantom shell wall. The initial scan data are collected with approx. 10mm spatial resolution and spline interpolation is used to find the location of the local maximum to within a 1mm resolution for positioning the subsequent 3D scanning.

6.7. Extrapolation of 3D scan

For the 3D scan, data are collected on a spatially regular 3D grid having (by default) 6.4 mm steps in the lateral dimensions and 3.5 mm steps in the depth direction (away from the source). SARA2 enables full control over the selection of alternative step sizes in all directions.

The digitised shape of the head is available to the SARA2 software, which decides which points in the 3D array are sufficiently well within the shell wall to be 'visited' by the SAR probe. After the data collection, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

6.8. Interpolation of 3D scan and volume averaging

The procedure used for defining the shape of the volumes used for SAR averaging in the SARA2 software follow the method of adapting the surface of the 'cube' to conform with the curved inner surface of the phantom (see Appendix D in FCC Supplement C edition 01-01 to OET Bulletin 65 edition 97-01). This is called, here, the conformal scheme.

For each row of data in the depth direction, the data are extrapolated and interpolated to less than 1mm spacing and average values are calculated from the phantom surface for the row of data over distances corresponding to the requisite depth for 10g and 1g cubes. This results in two 2D arrays of data, which are then cubic B-spline interpolated to sub mm lateral resolution. A search routine then moves an averaging square around through the 2D array and records the maximum value of the corresponding 1g and 10g volume averages. For the definition of the surface in this procedure, the digitised position of the headshell surface is used for measurement in head-shaped phantoms. For measurements in rectangular, box phantoms, the distance between the phantom wall and the closest set of gridded data points is entered into the software. For measurements in box-shaped phantoms, this distance is under the control of the user. The effective distance must be greater than 2.5mm as this is the tip-sensor distance and to avoid interface proximity effects, it should be at least 5mm. A value of 6 or 8mm is recommended. This distance is called **dbe**.

For automated measurements inside the head, the distance cannot be less than 2.5mm, which is the radius of the probe tip and to avoid interface proximity effects, a minimum clearance distance of x mm is retained. The actual value of dbe will vary from point to point depending upon how the spatially-regular 3D grid points fit within the shell. The greatest separation is when a grid point is just not visited due to the probe tip dimensions. In this case the distance could be as large

as the step-size plus the minimum clearance distance (i.e with $x=5$ and a step size of 3.5, **dbe** will be between 3.5 and 8.5mm).

The default step size (**dstep**) used is 3.5mm, but this is under user-control. The compromise is with time of scan, so it is not practical to make it much smaller or scan times become long and power-drop influences become larger.

The robot positioning system specification for the repeatability of the positioning (**dss**) is +/- 0.04mm.

The phantom shell is made by an industrial moulding process from the CAD files of the SAM shape, with both internal and external moulds. For the upright phantoms, the external shape is subsequently digitized on a Mitutoyo CMM machine (Euro an ultrasonic sensor indicate that the shell thickness (**dph**) away from the ear is 2.0 +/- 0.1mm. The ultrasonic measurements were calibrated using additional mechanical measurements on available cut surfaces of the phantom shells. See support document IXS-020x.

For the upright phantom, the alignment is based upon registration of the rotation axis of the phantom on its 253mm diameter baseplate bearing and the position of the probe axis when commanded to go to the axial position. A laser alignment tool is provided (procedure detailed elsewhere). This enables the registration of the phantom tip (**dmis**) to be assured to within approx. 0.2mm. This alignment is done with reference to the actual probe tip after installation and probe alignment. The rotational positioning of the phantom is variable – offering advantages for special studies, but locating pins ensure accurate repositioning at the principal positions (LH and RH ears).

7. Uncertainty Assessment

Measurement uncertainty values were evaluated for SAR measurements performed by Cetecom Inc. The uncertainty values for components specified in *FCC Supplement C (01-01) to OET Bulletin 65 (97-01)* were evaluated according to the procedures of *IEEE 1528-200X December 29, 2002*, *NIST 1297 1994 edition* and *ISO Guide to the Expression of Uncertainty in Measurements (GUM)*.

7.1. Measurement Uncertainty Budget

<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e = f(d,k)</i>	<i>f</i>	<i>g = c x f / e</i>	<i>k</i>
Uncertainty Component	Sec.	Tol. (± %)	Prob. Dist.	Div.	<i>c_i</i> (1-g)	1-g <i>u_i</i> (±%)	<i>v_i</i>
Measurement System							
Probe Calibration	E2.1	3.6	N	1	1	3.6	∞
Axial Isotropy	E2.2	4.23	R	√3	(1-cp) ^{1/2}	0.00	∞
Hemispherical Isotropy	E2.2	10.7	R	√3	√c _p	6.18	∞
Boundary Effect	E2.3	1.7	R	√3	1	0.98	∞
Linearity	E2.4	2.92	R	√3	1	1.69	∞
System Detection Limits	E2.5	0.00	R	√3	1	0.00	∞
Readout Electronics	E2.6	0.00	N	1	1	0.00	∞
Response Time	E2.7	0.00	R	√3	1	0.00	∞
Integration Time	E2.8	0.0	R	√3	1	0.23	∞
RF Ambient Conditions	E6.1	0.00	R	√3	1	0.00	∞
Probe Positioner Mechanical Tolerance	E6.2	0.57	R	√3	1	0.33	∞
Probe Positioning with respect to Phantom Shell	E6.3	1.43	R	√3	1	0.83	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E5.2	3.6	R	√3	1	2.08	∞
Test sample Related							
Test Sample Positioning	E4.2	4.81	N	1	1	4.81	29
Device Holder Uncertainty	E4.1	0.00	N	1	1	0.00	0
Output Power Variation - SAR drift measurement	6.6.2	5.0	R	√3	1	2.89	∞
Phantom and Tissue Parameters							
Phantom Uncertainty (shape and thickness tolerances)	E3.1	1.43	R	√3	1	0.83	∞
Liquid Conductivity Target - tolerance	E3.2	5.0	R	√3	0.7	2.02	∞
Liquid Conductivity - measurement uncertainty	E3.3	2.0	R	√3	0.7	0.81	∞
Liquid Permittivity Target tolerance	E3.2	5.0	R	√3	0.6	1.73	∞
Liquid Permittivity - measurement uncertainty	E3.3	1.0	R	√3	0.6	0.35	∞
Combined Standard Uncertainty			RSS		± 10.0%		
Expanded Uncertainty (95% CONFIDENCE INTERVAL)			<i>k</i> = 2.00705		± 20.1%		

8. Test results summary

8.1. Conducted Average Output Power

Operating Mode	Channel	Frequency [MHz]	Avg. Power [dBm]
802.11b	1	2412	18.1
	6	2442	18.1
	11	2472	18.0
802.11g	1	2412	13.9
	6	2442	13.9
	11	2472	13.8
Bluetooth	0	2402	-6.65
	39	2447	-6.41
	78	2462	-6.43
GSM 850 GPRS (1 uplink timeslot)	190	836.6	32.0
GSM 850 GPRS (2 uplink timeslots)	190	836.6	30.2
GSM 850 EGPRS (1 uplink timeslot)	190	836.6	28.1
GSM 850 EGPRS (2 uplink timeslots)	190	836.6	24.9
PCS 1900 GPRS (1 uplink timeslot)	661	1880	29.4
PCS 1900 GPRS (2 uplink timeslots)	661	1880	27.4
PCS 1900 EGPRS (1 uplink timeslot)	661	1880	27.0
PCS 1900 EGPRS (2 uplink timeslots)	661	1880	23.9

Channel	Frequency [MHz]	AMR Pavg [dBm]	AMR Ppk [dBm]	RMC Pavg [dBm]	RMC Ppk [dBm]
4132	826.4	22.16	25.87	22.15	25.87
4175	835	22.03	25.55	22.06	25.51
4233	846.6	22.09	25.75	22.15	25.77
9262	1852.4	22.6	26.47	22.55	26.38
9400	1880	22.8	26.64	22.75	26.64
9538	1907.6	22.57	26.41	22.55	26.32

12.2kbps AMR with 3.4kb SRB, 12.2kbps RMC, TPC bits all 1's



HSDPA

Channel	Frequency [MHz]	Sub-test 1	Sub-test 2	Sub-test 3	Sub-test 4
4132	826.4	22.09	22.17	22.17	22.18
4175	835	22.03	22.03	22.03	22.04
4233	846.6	22.2	22.23	22.24	22.19
9262	1852.4	22.65	22.74	22.76	22.8
9400	1880	22.97	23.01	23.02	23.07
9538	1907.6	22.77	22.75	22.73	22.8

8.2. Test Positions and Configurations

A KDB inquiry is required for EUTs that do not conform to the shape of the SAR phantom shell. SAR test procedures are according to the FCC requirements as stated in KDB inquiry number 128934. Body SAR exposure is tested with a 10mm air gap between the EUT and the SAR body phantom. Hand SAR exposure is tested with a 0mm air gap between the EUT and the SAR body phantom. The front, back, and right hand side of the EUT are tested because antennas are within 25mm of the respective side, as stated in KDB inquiry number 128934 and UMPC procedures. See Appendix B for test setup photos.

WLAN is tested on the channel with the highest measured conducted average power.

If the SAR value on the middle channel was more than 3dB below the limit, high and low channels were not evaluated.

Two timeslots were used to achieve maximum source-based time-averaged output power.

EGPRS was not evaluated as per KDB 941225 and IEEE 1528-2003 footnote 11. SAR evaluation for low-power modes are required for devices that produced a peak SAR larger than one half of the compliance limit. The highest body exposure SAR value for GPRS is 0.791 W/kg, less than one half of the 1.6 W/kg limit. The highest hand exposure SAR value for GPRS is 1.653 W/kg, less than one half of the 4.0 W/kg limit. SAR evaluation for EGPRS is not required.

SAR evaluation for 802.11g channels is not required when the maximum average output power is less than ¼ dB higher than that measured on the corresponding 802.11b channels.

HSDPA was not evaluated because the output power is less than ¼ dB higher than RMC 12.2 kbps.

The separation distance between the GSM antenna and the Bluetooth antenna is 12cm. The peak output power for Bluetooth is -6.65dBm (0.216mW). According to FCC KDB 447498, section 1) b), test exclusion procedures given in KDB 648474 section 3 are used because output power is less than $60/f_{(GHz)}$. Bluetooth stand alone SAR is not required because the output power is less than 24mW and the GSM antenna is greater than 5cm from the Bluetooth antenna. According to FCC KDB 447498, section 3) b) i) and KDB 648474, section 4, Simultaneous transmission SAR evaluation is not required because the sum of 1g SAR values measured for all simultaneous transmitting antennas is 0.791 W/kg, less than the 1.6 W/kg limit.

8.3. SAR results for Body Exposure

10mm air gap between the EUT and the body phantom. 1g SAR limit is 1.6W/kg

Position	Band	Operation Mode	Channel	Frequency (MHz)	SAR 1g (W/kg)	Area Scan (Appendix A)	Positioning Photo (Appendix B)
Front	GSM 850	GPRS 2 uplink timeslots	190	836.6	0.148	Plot 1	Photo 1
Back	GSM 850	GPRS 2 uplink timeslots	190	836.6	0.121	Plot 2	Photo 2
Right	GSM 850	GPRS 2 uplink timeslots	190	836.6	0.122	Plot 3	Photo 3
Front	PCS 1900	GPRS 2 uplink timeslots	661	1880	0.058	Plot 4	Photo 1
Back	PCS 1900	GPRS 2 uplink timeslots	661	1880	0.28	Plot 5	Photo 2
Right	PCS 1900	GPRS 2 uplink timeslots	661	1880	0.446	Plot 6	Photo 3
Front	WCDMA FDD V	RMC TPC bits all 1	4183	836.6	0.125	Plot 7	Photo 1
Back	WCDMA FDD V	RMC TPC bits all 1	4183	836.6	0.087	Plot 8	Photo 2
Right	WCDMA FDD V	RMC TPC bits all 1	4183	836.6	0.075	Plot 9	Photo 3
Front	WCDMA FDD II	RMC TPC bits all 1	9400	1880	0.119	Plot 10	Photo 1
Back	WCDMA FDD II	RMC TPC bits all 1	9400	1880	0.599	Plot 11	Photo 2
Right	WCDMA FDD II	RMC TPC bits all 1	9400	1880	0.791	Plot 12	Photo 3
Front	WLAN	802.11b	6	2437	0.108	Plot 13	Photo 7
Back	WLAN	802.11b	6	2437	0.216	Plot 14	Photo 8
Right	WLAN	802.11b	6	2437	0.111	Plot 15	Photo 9

8.4. SAR results for hand exposure

0mm air gap between the EUT and the body phantom. 10g SAR limit is 4W/kg

Position	Band	Operation Mode	Channel	Frequency (MHz)	SAR 10g (W/kg)	Area Scan (Appendix A)	Positioning Photo (Appendix B)
Front	GSM 850	GPRS 2 uplink timeslots	190	836.6	0.214	Plot 16	Photo 4
Back	GSM 850	GPRS 2 uplink timeslots	190	836.6	0.276	Plot 17	Photo 5
Right	GSM 850	GPRS 2 uplink timeslots	190	836.6	0.204	Plot 18	Photo 6
Front	PCS 1900	GPRS 2 uplink timeslots	661	1880	0.086	Plot 19	Photo 4
Back	PCS 1900	GPRS 2 uplink timeslots	661	1880	0.445	Plot 20	Photo 5
Right	PCS 1900	GPRS 2 uplink timeslots	661	1880	0.92	Plot 21	Photo 6
Front	WCDMA FDD V	RMC TPC bits all 1	4183	836.6	0.157	Plot 22	Photo 4
Back	WCDMA FDD V	RMC TPC bits all 1	4183	836.6	0.19	Plot 23	Photo 5
Right	WCDMA FDD V	RMC TPC bits all 1	4183	836.6	0.117	Plot 24	Photo 6
Front	WCDMA FDD II	RMC TPC bits all 1	9400	1880	0.155	Plot 25	Photo 4
Back	WCDMA FDD II	RMC TPC bits all 1	9400	1880	0.743	Plot 26	Photo 5
Right	WCDMA FDD II	RMC TPC bits all 1	9400	1880	1.653	Plot 27	Photo 6
Front	WLAN	802.11b	6	2437	0.152	Plot 28	Photo 10
Back	WLAN	802.11b	6	2437	0.017	Plot 29	Photo 11
Right	WLAN	802.11b	6	2437	0.173	Plot 30	Photo 12

8.5. Dipole verification

Prior to formal testing at each frequency a system verification was performed in accordance with IEEE 1528 and the 1 Watt reference SAR value is taken from the IndexSAR dipole calibration report. All of the testing described in this report was performed within 24 hours of the system verification. The following results were obtained:

1g SAR Verficiation

Date	Frequency (MHz)	CW input at dipole feed (Watts)	1g SAR (W/kg)	1 Watt reference 1g SAR value (W/kg)	Difference reference 1g SAR value to normalized 1g SAR	Area scan (See Appendix A)
2011-01-13	835	1	9.615	9.78	-1.69%	Plot 31
2011-01-12	1900	1	42.524	40.35	5.39%	Plot 32
2011-01-14	2450	1	45.998	50.17	-8.31%	Plot 33

10g SAR Verficiation

Date	Frequency (MHz)	CW input at dipole feed (Watts)	10g SAR (W/kg)	1 Watt reference 10g SAR value (W/kg)	Difference reference 10g SAR value to normalized 10g SAR	Area scan (See Appendix A)
2011-01-13	835	1	6.384	6.48	-1.48%	Plot 31
2011-01-12	1900	1	22.596	21.76	3.84%	Plot 32
2011-01-14	2450	1	21.176	23.50	9.89%	Plot 33

9. References

1. [FCC 2001] Federal Communications Commission: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), FCC, 2001.
2. [IEEE 1999] IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., 1999.
3. [IEEE 200x] IEEE Std 1528-200x: DRAFT Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques. Draft 6.2, Inst. of Electrical and Electronics Engineers, Inc., 2000.
4. [NIST 1994] NIST: Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results, Technical Note 1297 (TN1297), United States Department of Commerce Technology Administration, National Institute of Standards and Technology, 1994.
5. [FCC 2008] Federal Communications Commission, Office of Engineering and Technology: SAR Measurement Procedures for 802.11 a/b/g Transmitters, July 2008.
6. [FCC 2008] Federal Communications Commission, Office of Engineering and Technology: Mobile and Portable Device, RF Exposure, Equipment Authorization Procedures, December 2008.
7. [FCC 2008] Federal Communications Commission, Office of Engineering and Technology: SAR Measurement Procedures for 3G Devices, March 2008.
8. [IC 2010] Industry Canada, Spectrum Management and Telecommunications: RSS-102 – Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2010.

10. Report History

2011-02-01: Original Report.

2011-03-03: Updated EUT information. Added reference to RSS-102. Replaces previous report number.