

Exhibit C

Measurement Rerort

ACER PERIPHERALS INC.

FCC ID.:JVP6693

Scanner

FCC CLASS B EMI TEST REPORT

of

EUT : Scanner
MODEL NO. : SnapScan 1236S
FCC ID. : JVP6693

for

APPLICANT : ACER PERIPHERALS, INC.
ADDRESS : 157, Shan-Ying Rd., Kweishan, Taoyuan, 333,
Taiwan, R.O.C.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 8 LANE 29, WENMIMG ROAD,
LOSHAN TSUN, KUI-SHAN HSIANG,
TAOYUAN, TAIWAN, R.O.C.

Tel:(03)3280026-32,
Fax:(03)3280034

Report Number : ET87R-05-045-01
Issued Date : JUN. 11, 1998

TEST REPORT CERTIFICATION

Applicant : ACER PERIPHERALS, INC.
157, Shan-Ying Rd., Kweishan, Taoyuan, 333,
Taiwan, R.O.C.

Manufacturer : ACER PERIPHERALS, INC.
157, Shan-Ying Rd., Kweishan, Taoyuan, 333,
Taiwan, R.O.C.

Description of EUT : Scanner

- a) Brand Name : Agfa
- b) Model No. : SnapScan 1236S
- c) FCC ID. : JVP6693
- d) Power : 110VAC/60Hz

Regulation Applied : FCC Rules and Regulations Part 15 Subpart B (1993)

I HEREBY CERTIFY THAT: The data shown in this report was in accordance with the procedures given in ANSI-63.4 and the energy emitted by the device was found to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

- Note :
- 1. The results of the testing report relate only to the items tested.
 - 2. The testing report shall not be reproduced except in full, without the written approval of ETC.

Test Dated : MAY 29, 1998

Test Engineer : Tien Lu Liao
(Tien Lu Liao)

Approve & Authorized : Will Yauo
Will Yauo, Supervisor
EMI Test Site of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents

ITEM	Sheet
<hr/>	
1. GENERAL INFORMATION	
1.1 Product Description	01
1.2 Tested System Details	02
1.3 Test Methodology	02
1.4 Test Facility	02
2. PRODUCTE LABELLING AND USER INFORMATION	
2.1 Class Definition	03
2.2 Class Limitation	04
2.3 Labeling Requirement	05
2.4 User Information	06
3. SYSTEM TEST CONFIGURATION	
3.1 Justification	07
3.2 Configuration of Tested System	07
3.3 Modification	07
4. MEASUREMENT PHOTOS	
4.1 Conducted Measurement Photos	08
4.2 Radiated Measurement Photos	10
5. CONDUCTED EMISSION DATA	
5.1 Conducted Test Results	12
6. RADIATED EMISSION DATA	
6.1 Open Site Radiated Test Results	19
6.2 Field Strength Calculation	22
7. TEST EQUIPMENT	
7.1 Test Setup	23
7.2 Conducted Test Equipment	24
7.3 Radiated Test Equipment	24

1. GENERAL INFORMATION

1.1 Product Description

- a) Description of EUT : Scanner
- b) Brand Name : Agfa
- c) Model No. : SnapScan 1236S
- d) FCC ID : JVP6693
- e) Power : 110VAC/60Hz

1.2 Tested System Details

The Tested System Detail equipment, plus description of all cables used in the tested system are :

Description	Model No.	FCC ID.	Manufacturer	Cable
Scanner *1	SnapScan 1236S	JVP6693	ACER PERIPHERALS, INC.	1.8m Unshielded AC Power Cord 1.5m SCSI Cable with 1 Core *2
SCSI Card	3181L-E01	KQ53181LE-1	DTC	----
Monitor	JC-1743UMA	A3DJC-1743UMA	NEC Co.	1.8m Shielded Cable with Core
P.C.	D4566N VL Series 5 5/133	Regulatory ID: DTPC-01 (Doc)	Hewlett-Packard	1.2m Unshielded AC Power Cord
Keyboard	E03786USRETI	GIGE03786	Microsoft	1.8m Unshielded Cable
Modem	1200AT	EF56A51200AT	Smar TEAM Co.	2.0m Shielded Cable
Mouse	M-S34	DZL211029	Hewlett-Packard	1.8m Unshielded Cable
Printer	2225C+	DSI6XU225	Hewlett-Packard	1.2m Shielded Cable

*1 EUT submitted for test.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in FCC/ANSI C63.4, Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.4 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at No.34, 5 Lirn, Din Fu Tsun, Lin Kou, Taipei, Taiwan, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Feb., 10,1997.

2. PRODUCT LABELING AND USER INFORMATION

2.1 Class Definition

Class A Digital Device: A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device : A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial ,business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

2.2 Class Limitations

Class A Line Conducted Emission Limits :

Frequency MHZ	Emissions uV	Emissions dBuV
0.45 - 1.705	1000	60.0
1.705 - 30.0	3000	69.5

Class A Radiated Emission Limits :

Frequency MHZ	Distance Meters	Radiated dBuV/m	Radiated uV/m
30 - 88	10	39.0	90
88 - 216	10	43.5	150
216 - 960	10	46.4	210
above 960	10	49.5	300

Class B Line Conducted Emission Limits :

Frequency MHZ	Emissions uV	Emissions dBuV
0.45 - 30.0	250	48.0

Class B Radiated Emission Limits :

Frequency MHZ	Distance Meters	Radiated dBuV/m	Radiated uV/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

2.3 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference
- (2) this device must accept any interference received, including interference that may cause undesired operation.

2.4 User Information

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in EUT is Scanning.

The EUT was rotated to obtain the maximum level of radiated emissions .The antenna was varied in height above ground to obtain the maximum signal strength. The antenna height was varied from 1 to 4 meters.

All test results are listing on chapter 5 and 6.

3.2 Configuration of Tested System

Please Refer to Page 08 ~ Page 11

3.3 Modification

1. Add a core on the main board to LED board cable
2. Add a core on the main board to CCD board cable
3. Add a core on the inlet to power board cable

5. CONDUCTED EMISSION DATA

5.1 Conducted Test Results

The initial setup in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on following data pages, and these signals are the quasi-peaked.

CONDUCTED EMISSION DATA

A.


Model No. : SnapScan 1236S

Operation Mode : Reflective (Scanning)

Judgment : Passed by 3.9 dB Power Supply: 110V/60Hz

Test Date : May 21, 1998 Temperature : 23 °C Humidity : 50 %

Emission Frequency (MHz)	Meter Reading (dB μ V)		LISN Factor (dB)	Results (dB μ V)		Limit (dB μ V)	Margins (dB)
	VA	VB		VA	VB		
0.460	29.6	27.8	0.2	29.8	28.0	48.0	-18.2
0.617	29.3	25.5	0.2	29.5	25.7	48.0	-18.5
3.323	28.6	27.8	0.3	28.9	28.1	48.0	-19.1
10.924	43.5	38.7	0.6	44.1	39.3	48.0	-3.9
11.700	42.1	37.8	0.6	42.7	38.4	48.0	-5.3
13.697	32.7	33.7	0.7	33.4	34.4	48.0	-13.6

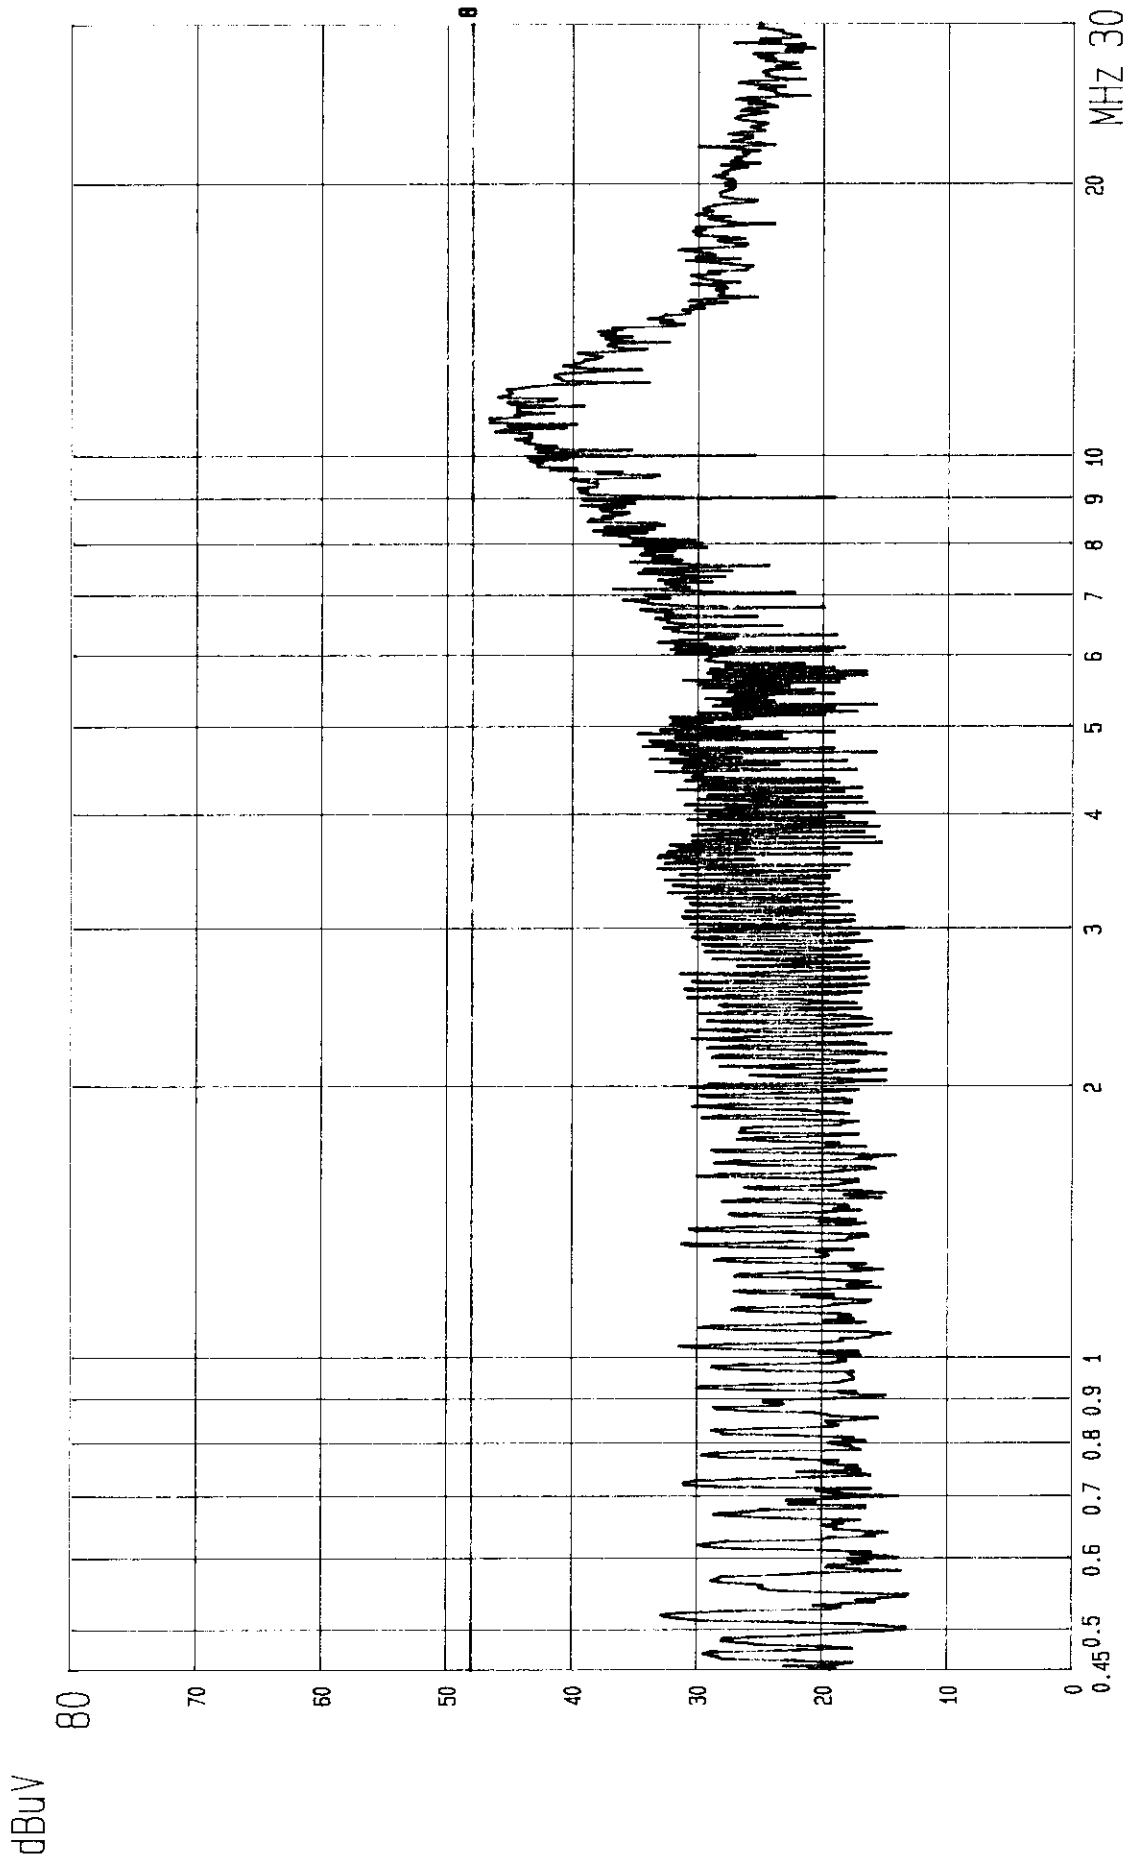

CLASS B LIMIT
ETC EMI LAB.


8:QP.
LISN: Va

POWER: 110V/60HZ

EUT: SCANNER

REFLECTIVE

FCC CONDUCTED TEST
MODEL: SnapScan 12369/ODE

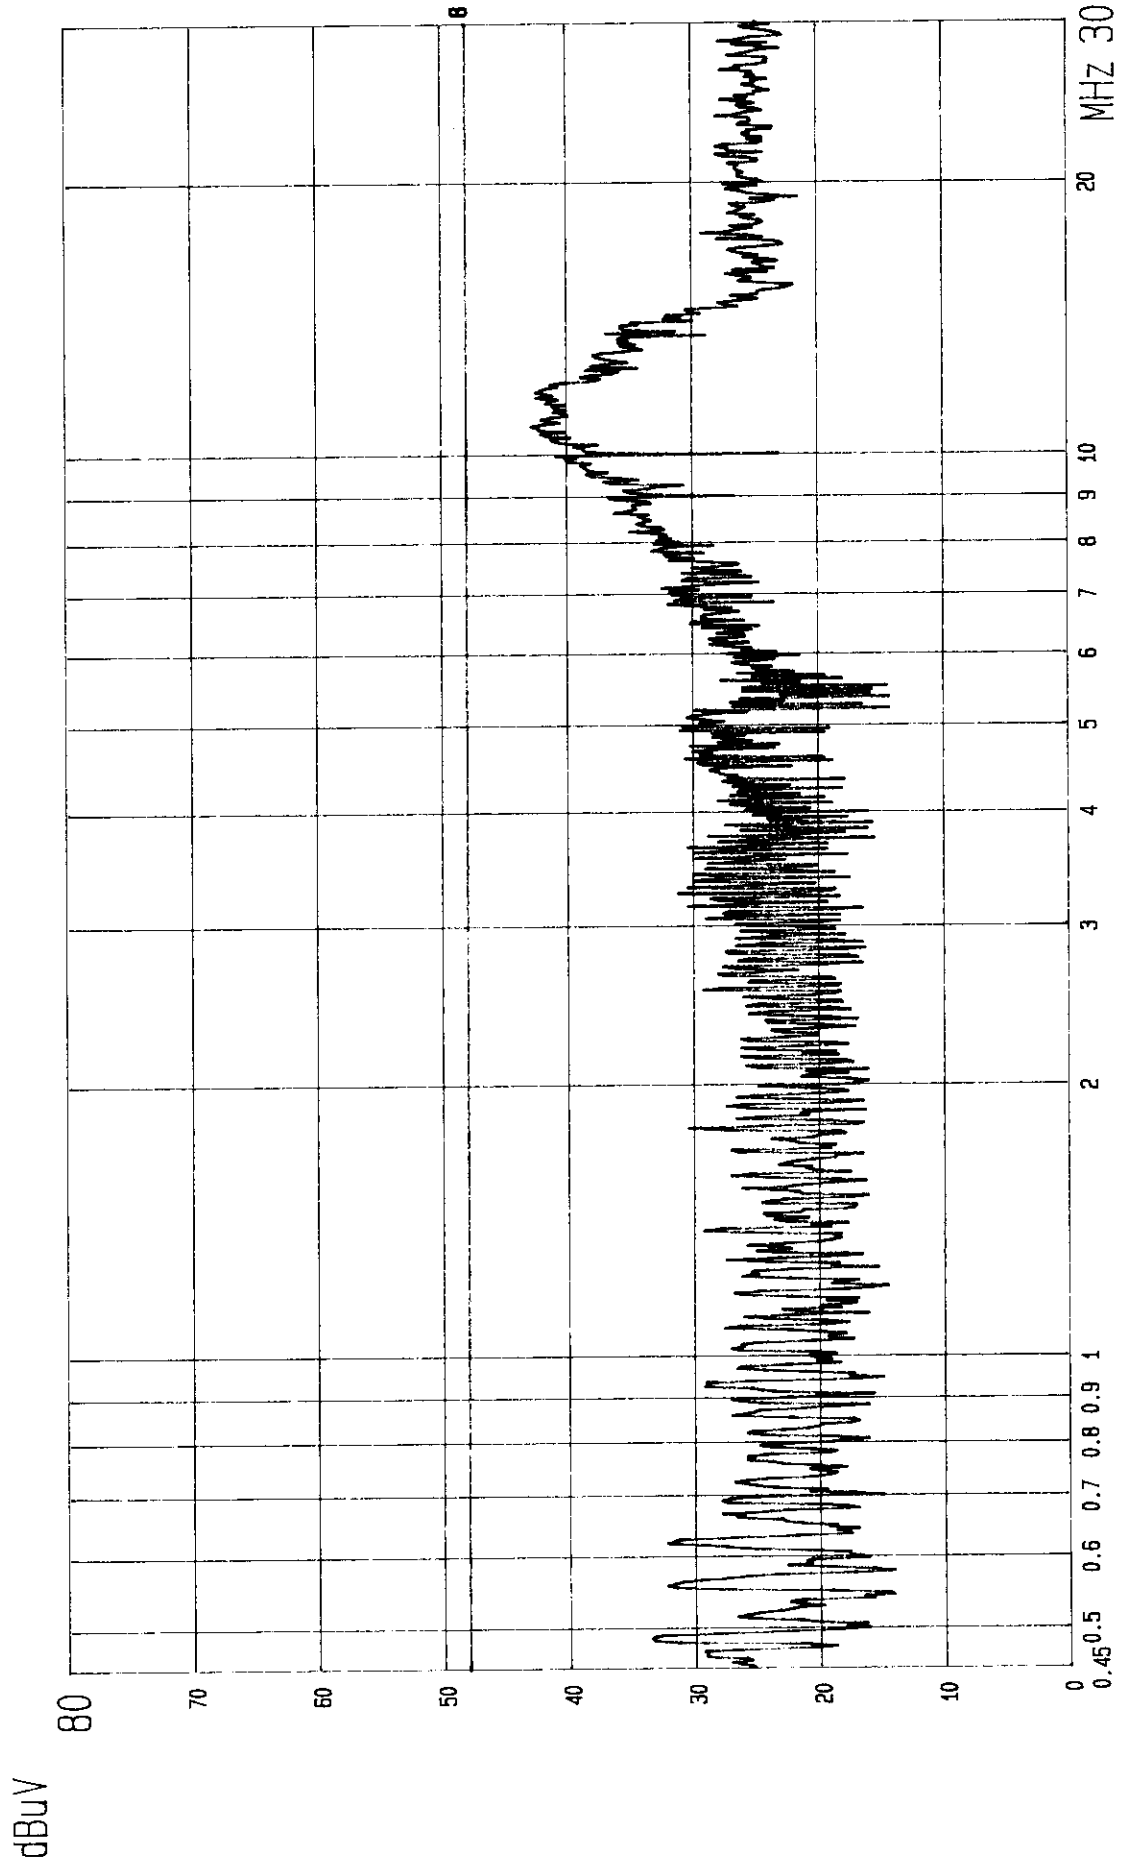

CLASS B LIMIT
ETC EMI LAB.

8:QP.
LISN: Vb


EUT: SCANNER
POWER: 110V/60HZ

REFLECTIVE


FCC CONDUCTED TEST
MODEL: snapScan 1236s

CONDUCTED EMISSION DATA**B.**Model No. : SnapScan 1236SOperation Mode : Transparency (Scanning)Judgment : Passed by 2.4 dBPower Supply: 110V/60HzTest Date : May 29, 1998Temperature : 25 °CHumidity : 57 %

Emission Frequency (MHz)	Meter Reading (dB μ V)		LISN Factor (dB)	Results (dB μ V)		Limit (dB μ V)	Margins (dB)
	VA	VB		VA	VB		
0.489	37.4	35.2	0.2	37.6	35.4	48.0	-10.4
0.547	37.0	34.2	0.2	37.2	34.4	48.0	-10.8
0.976	34.8	31.4	0.3	35.1	31.7	48.0	-12.9
3.674	35.6	33.8	0.3	35.9	34.1	48.0	-12.1
9.299	36.8	35.8	0.5	37.3	36.3	48.0	-10.7
14.760	44.8	39.0	0.8	45.6	39.8	48.0	-2.4
15.904	44.8	40.2	0.8	45.6	41.0	48.0	-2.4

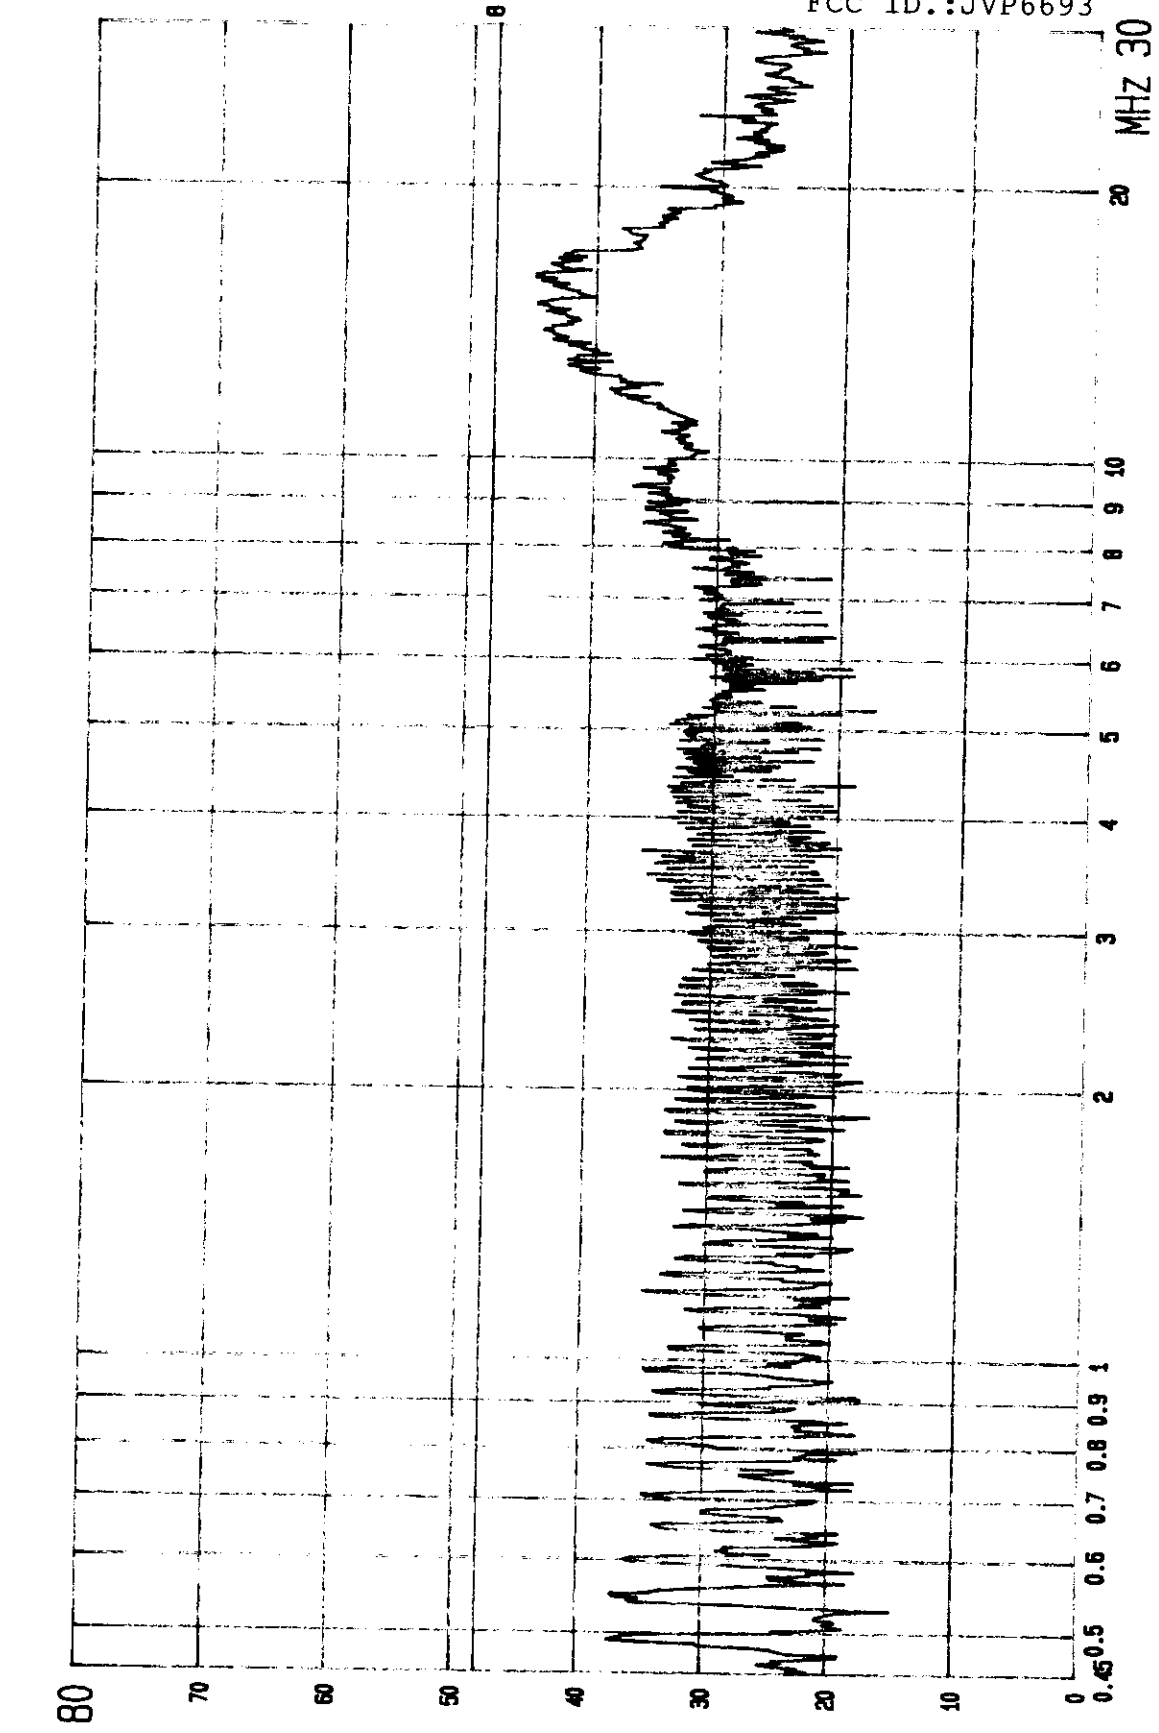

FCC CONDUCTED TEST
 MODEL: SnapScan 1236S
 EUT: SCANNER
 POWER: 110V/60HZ
 MODE: TRANSPARENCY
 LISN: Va
 8: QP., CLASS B LIMIT
 ETC EMI LAB.

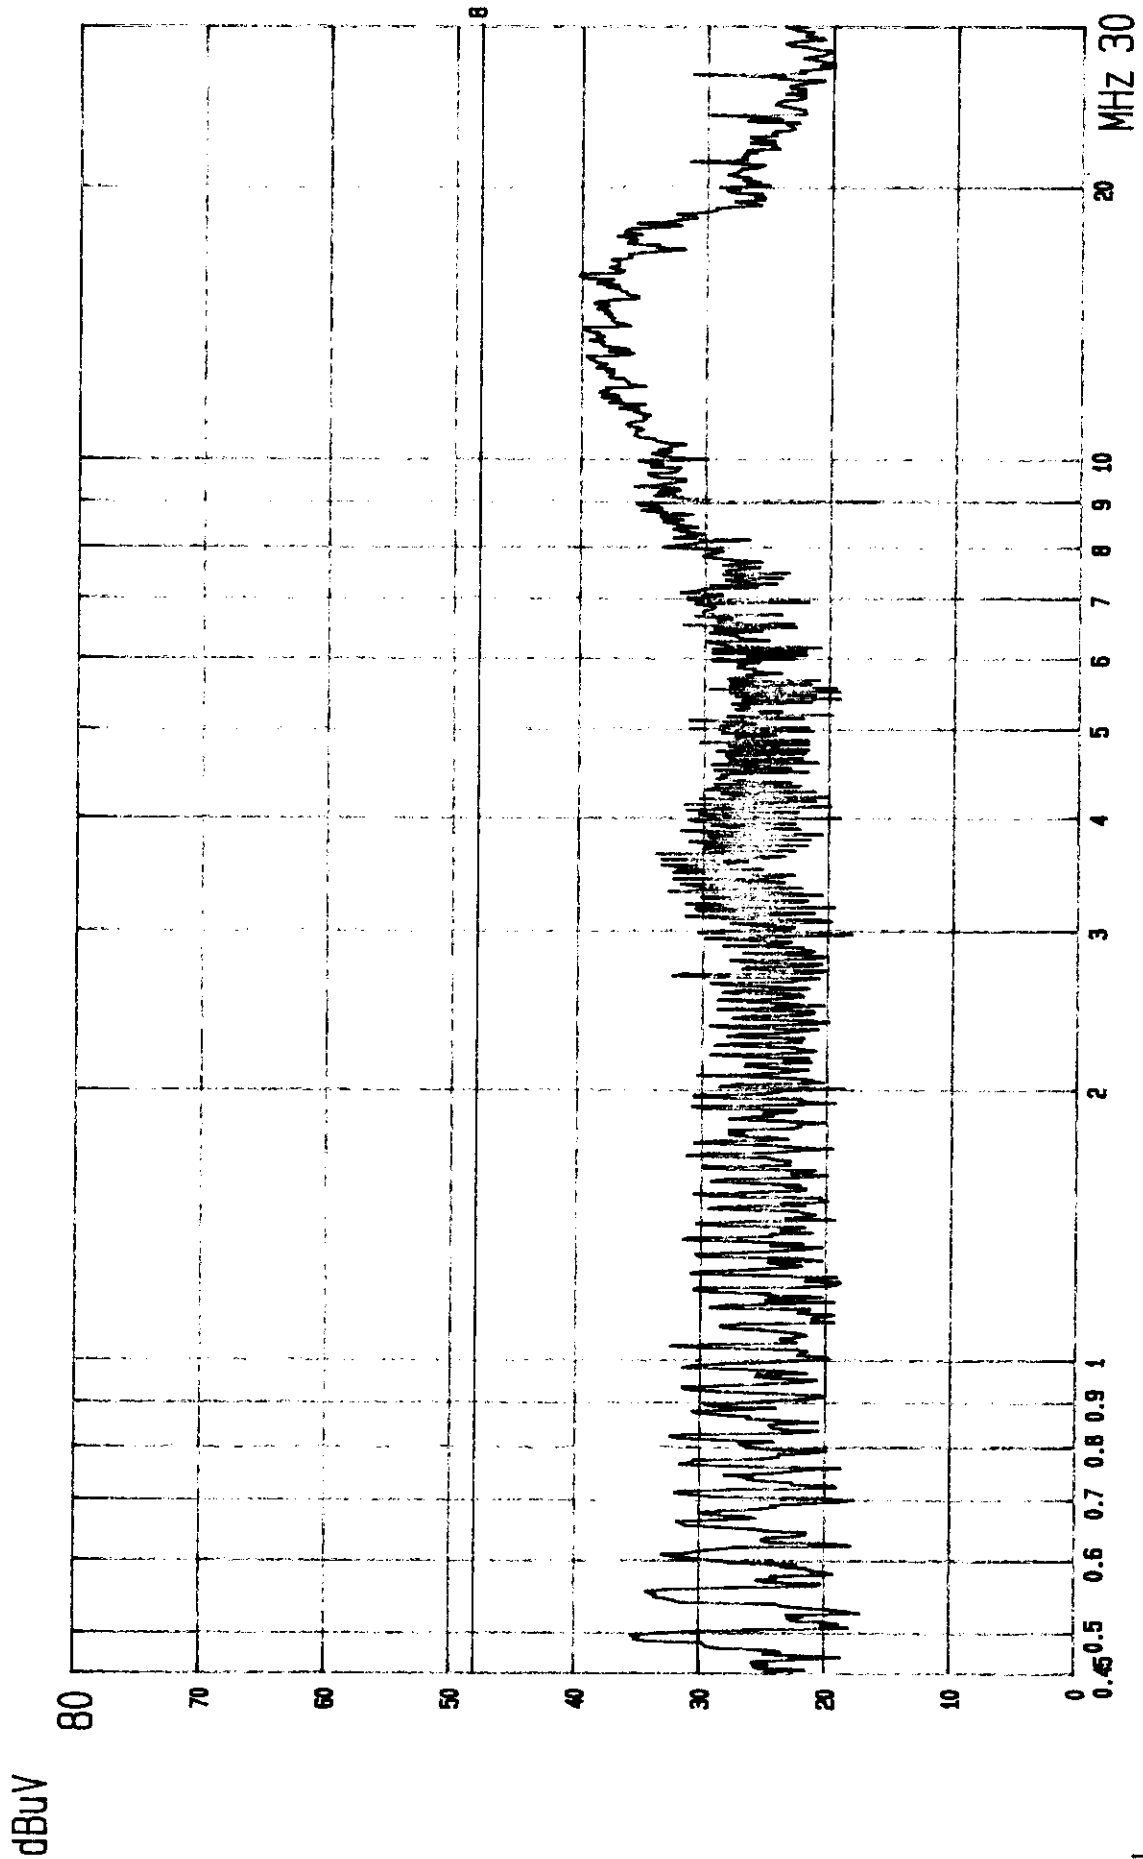

FCC CONDUCTED TEST EUT: SCANNER EUT: GP., CLASS B LIMIT
MODEL: SnapScan 1236S MODE: TRANSPARENCY POWER: 110V/60HZ LISN: Vb ETC EMI LAB.

6. RADIATED EMISSION DATA

6.1 Open Site Radiated Test Results

The following data lists the significant emission frequencies, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, and the limit. The result value is quasi-peaked by R & S Test Receiver. Explanation of the Correction Factor is given in paragraph 6.2.

RADIATED EMISSION DATA**A.**Model No. : SnapScan 1236SOperation Mode : Reflective (Scanning)Judgment : Passed by 4.3 dBPower Supply: 110V/60HzTest Date : May. 21, 1998Temperature : 35 °CHumidity : 50 %

Emission Frequency (MHz)	Meter Reading (dB μ V)		CORR'd Factor (dB)	Results (dB μ V/m)		Limit (dB μ V/m)	Margins (dB)
	HOR.	VERT.		HOR.	VERT.		
31.95	43.0	45.9	-10.2	32.8	35.7	40.0	-4.3
152.02	47.0	46.1	-9.9	37.1	36.2	43.5	-6.4
157.36	46.1	43.0	-9.6	36.5	33.4	43.5	-7.0
165.35	45.0	41.3	-9.2	35.8	32.1	43.5	-7.7
178.71	46.0	38.7	-9.1	36.9	29.6	43.5	-6.6
365.62	44.9	39.1	-7.6	37.3	31.5	46.0	-8.7

RADIATED EMISSION DATA

B.

Model No. : SnapScan 1236S

Operation Mode : Transparency (Scanning)

Judgment : Passed by 2.0 dB Power Supply: 110V/60Hz

Test Date : May. 29, 1998 Temperature : 25 °C Humidity : 57 %

Emission Frequency (MHz)	Meter Reading (dB μ V)		CORR'd Factor (dB)	Results (dB μ V/m)		Limit (dB μ V/m)	Margins (dB)
	HOR.	VERT.		HOR.	VERT.		
32.19	40.6	47.7	-10.2	30.4	37.5	40.0	-2.5
77.35	48.4	53.4	-15.4	33.0	38.0	40.0	-2.0
136.02	51.7	43.3	-11.1	40.6	32.2	43.5	-2.9
144.02	50.3	50.7	-10.5	39.8	40.2	43.5	-3.3
322.71	36.2	38.3	-6.7	29.5	31.6	46.0	-14.4
365.62	46.2	43.4	-7.6	38.6	35.8	46.0	-7.4

6.2 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor. The basic equation with a sample calculation is as follows:

$$\text{Results} = \text{Meter Reading} + \text{CORR'd Factor}$$

$$\text{CORR'd Factor} = \text{AF} + \text{CF} - \text{AG}$$

AF = Antenna Factor


CF = Cable Attenuation Factor

AG = Amplifier Gain


7. TEST EQUIPMENT

7.1 Test Setup

I. Conducted Test Setup Diagram

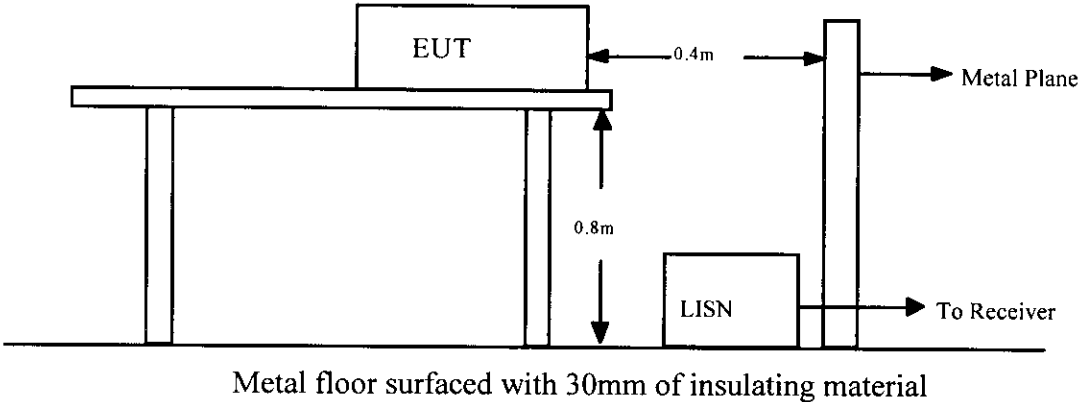

II. Open Field Test Site Setup Diagram

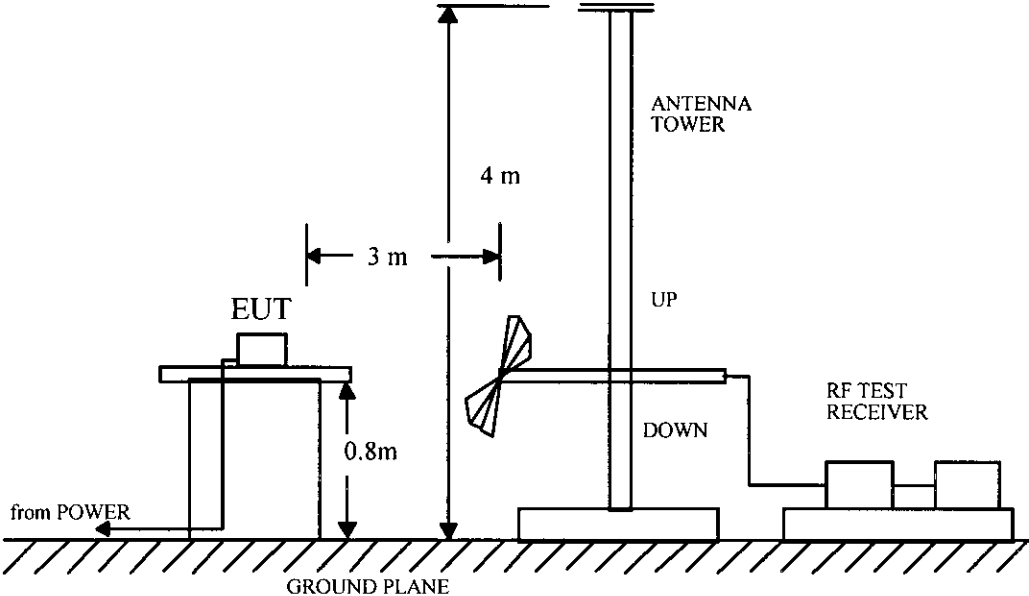

7.2 Conducted Test Equipments

The following test equipments are used during the conducted test .

Equipments	Manufacturer	Model No.	Next Cal. Date
Test Receiver	Rohde and Schwarz	ESH3	JAN. 04, 1999
Spectrum Monitor	Rohde and Schwarz	EZM	N.C.R.
Line Impedance Stabilization Network	Kyoritsu	KNW-407	AUG. 18, 1998
Line Impedance Stabilization Network	Rohde and Schwarz	ESH2-Z5	AUG. 18, 1998
Plotter	Hewlett-Packard	7440A	N/A
Shielded Room	Riken	----	N.C.R.

7.3 Radiated Test Equipments

The following test equipments are used during the radiated test .

Equipments	Manufacturer	Model No.	Next Cal. Until
Biconical Antenna	EMCO	3110B	AUG. 05, 1998
Log Periodic Antenna	EMCO	3146	AUG. 05, 1998
Spectrum Analyzer	Hewlett-Packard	8568B	OCT. 16, 1998
Quasi-Peak Adaptor	Hewlett-Packard	85650A	OCT. 07, 1998
RF Preselector	Hewlett-Packard	85685A	OCT. 16, 1998
Amplifier	Hewlett-Packard	8447D	OCT. 16, 1998
Test Receiver	Rohde and Schwarz	ESVS 30	OCT. 12, 1998