





**5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH
MINIMUM MARGIN**

RADIATED EMISSION TEST



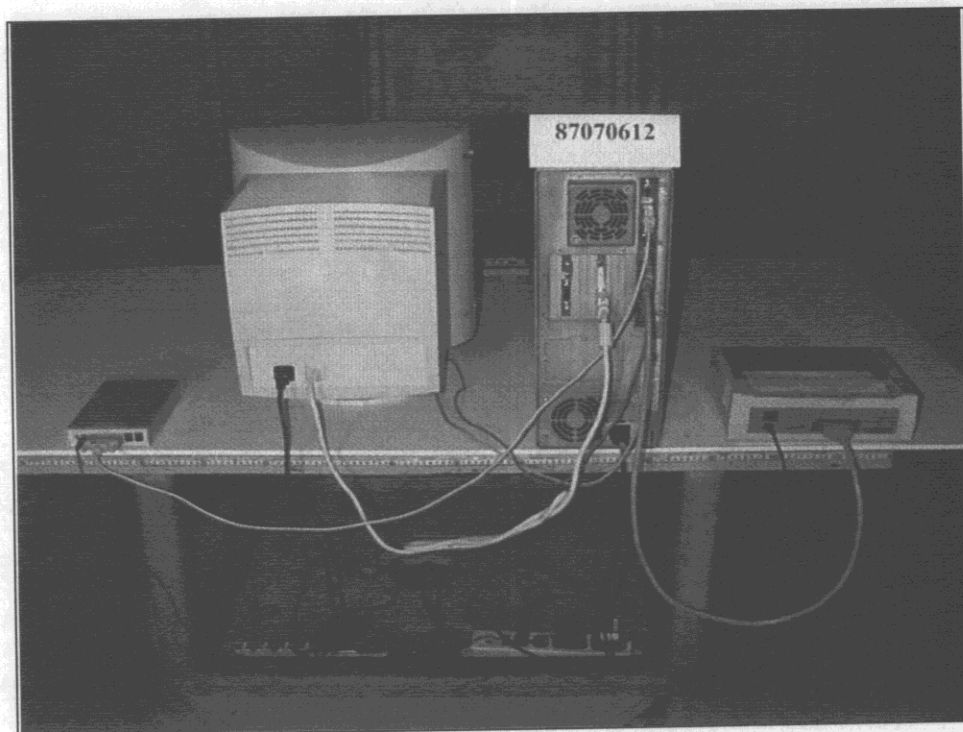

CONDUCTED EMISSION TEST

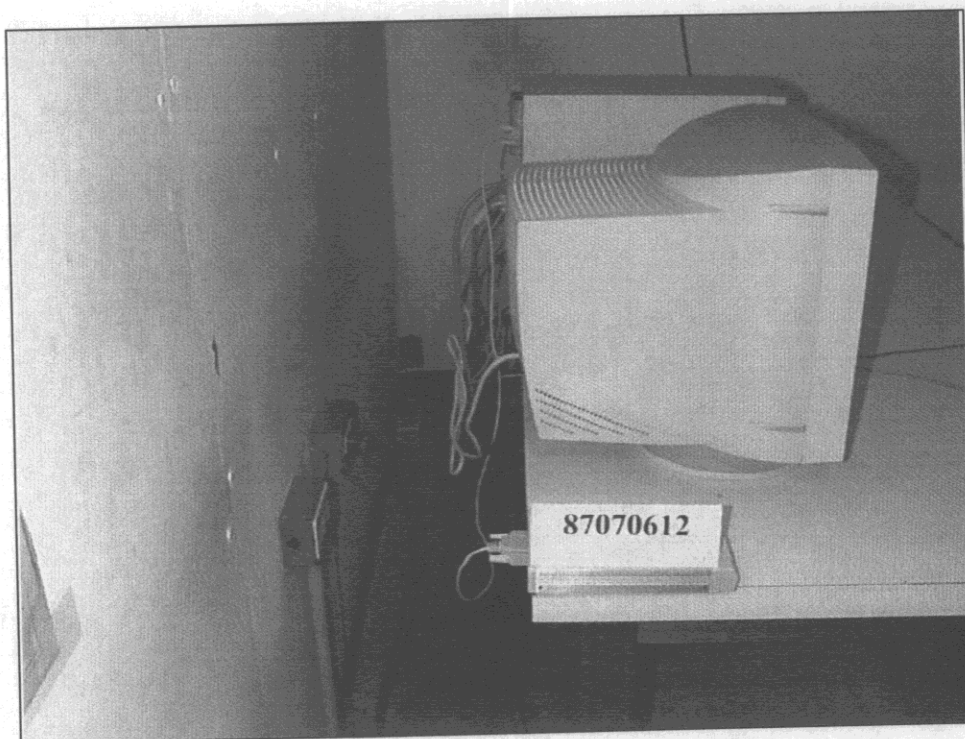



6. ATTACHMENT I - TECHNICAL DESCRIPTION OF EUT

SPECIFICATIONS:

* Picture Tube:	
Size	17" (43cm) diagonal
Type	Flat Square Tube
Dot pitch	0.27 mm dot pitch
Surface coating	AR, AG, AS coating
* Maximum Viewable Size	15.9" (40.5 cm) diagonal
* Power Supply (Universal)	
Input voltage	100~240 Vac, 50~60Hz (Universal)
Power consumption	110W (without USB)/125W (with USB)
* Max. Resolution	1280x1024
* Horizontal Frequency	30-72 KHz
* Vertical Frequency	50-120 Hz
* Video Bandwidth	110MHz
* Video Input	15-pin mini D-sub connector
* Adjustable Timing	12 factory preset, 10 user mode
* User's Control	Intelligent On-Screen Display (OSD), 4 buttons
* X-Radiation	DHHS, PTB
* Plug & Play	DDCI/2B
* USB (optional)	1 up stream, 4 down stream
* Ambient Temperature	
Operating	+5°C ~ +40°C
Storage	-20°C ~ +60°C
* Humidity	
Operating	20% ~ 90%
Storage	10% ~ 90%
* Dimensions (W x H x D)	416 mm (W) x 444 mm (H) x 440 mm (D)
* Weight (net)	16.5kg