



## Test Report

Product Name : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
Model No. : HERC3A (M580a)  
FCC ID. : JVPM580A

Applicant : BenQ Corporation  
Address : 157 Shan-Ying Road, Gueishan, Taoyuan  
333, Taiwan, R.O.C..

Date of Receipt : Aug. 17, 2005  
Issued Date : Jan. 25, 2006  
Report No. : 061L148FI  
Reference No. : NL-6341

The Test Results relate only to the samples tested.  
The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.  
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

# Test Report Certification

Issued Date : Jan. 25, 2006

Report No. : 061L148FI



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200533-0




Product Name : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
Applicant : BenQ Corporation  
Address : 157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan, R.O.C..  
Manufacturer : BenQ Corporation  
BenQ China Co.,Ltd.  
Model No. : HERC3A (M580a)  
FCC ID. : JVPM580A  
Rated Voltage : AC 110V/60Hz  
EUT Voltage : DC 3.7V (Battery)  
Trade Name : BenQ  
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2005  
ANSI C63.4: 2003  
Test Result : Complied



The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuietTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :   
( Gina Chen )  
Tested By :   
( Ryan Wu )  
Approved By :   
( Gene Chang )



## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Operational Description .....	5
1.3. Tested System Details .....	6
1.4. Configuration of Tested System .....	6
1.5. EUT Exercise Software .....	6
1.6. Test Facility .....	7
<b>2. CONDUCTED EMISSION .....</b>	<b>8</b>
2.1. Test Equipment .....	8
2.2. Test Setup .....	8
2.3. Limits .....	8
2.4. Test Procedure .....	9
2.5. Uncertainty .....	9
2.6. Test Result of Conducted Emission .....	10
<b>3. PEAK POWER OUTPUT .....</b>	<b>12</b>
3.1. Test Equipment .....	12
3.2. Test Setup .....	12
3.3. Limit .....	12
3.4. Uncertainty .....	12
3.5. Test Result of Peak Power Output .....	13
<b>4. RADIATED EMISSION .....</b>	<b>14</b>
4.1. Test Equipment .....	14
4.2. Test Setup .....	14
4.3. Limits .....	15
4.4. Test Procedure .....	15
4.5. Uncertainty .....	15
4.6. Test Result of Radiated Emission .....	16
<b>5. BAND EDGE .....</b>	<b>22</b>
5.1. Test Equipment .....	22
5.2. Test Setup .....	22
5.3. Limit .....	23
5.4. Test Procedure .....	23
5.5. Uncertainty .....	23
5.6. Test Result of Band Edge .....	24
<b>6. CHANNEL NUMBER.....</b>	<b>28</b>
6.1. Test Equipment .....	28
6.2. Test Setup .....	28
6.3. Limit .....	28
6.4. Uncertainty .....	28
6.5. Test Result of Channel Number .....	29
<b>7. CHANNEL SEPARATION.....</b>	<b>35</b>
7.1. Test Equipment .....	35
7.2. Test Setup .....	35
7.3. Limit .....	35
7.4. Uncertainty .....	35
7.5. Test Result of Channel Separation .....	36
<b>8. DWELL TIME.....</b>	<b>38</b>
8.1. Test Equipment .....	38
8.2. Test Setup .....	38
8.3. Limit .....	38
8.4. Uncertainty .....	38
8.5. Test Result of Dwell Time .....	39
<b>9. EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>41</b>
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Trade Name : BenQ  
 FCC ID. : JVPM580A  
 Model No. : HERC3A (M580a)  
 Frequency Range : 2402MHz to 2480MHz  
 Antenna Gain : 0dBi  
 Channel Number : 79  
 Type of Modulation : Frequency Hopping Spread Spectrum  
 Antenna type : Chip Antenna  
 Handsfree : P/N: 2C.43035.111  
 Battery Pack : P/N: 2C.2G0M0.101, 870mAh  
 Charger : P/N: 2E.11060.XXX(X=0~9,A~Z or Blank)

#### Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 20:	2422 MHz	Channel 40:	2442 MHz	Channel 60:	2462 MHz
Channel 01:	2403 MHz	Channel 21:	2423 MHz	Channel 41:	2443 MHz	Channel 61:	2463 MHz
Channel 02:	2404 MHz	Channel 22:	2424 MHz	Channel 42:	2444 MHz	Channel 62:	2464 MHz
Channel 03:	2405 MHz	Channel 23:	2425 MHz	Channel 43:	2445 MHz	Channel 63:	2465 MHz
Channel 04:	2406 MHz	Channel 24:	2426 MHz	Channel 44:	2446 MHz	Channel 64:	2466 MHz
Channel 05:	2407 MHz	Channel 25:	2427 MHz	Channel 45:	2447 MHz	Channel 65:	2467 MHz
Channel 06:	2408 MHz	Channel 26:	2428 MHz	Channel 46:	2448 MHz	Channel 66:	2468 MHz
Channel 07:	2409 MHz	Channel 27:	2429 MHz	Channel 47:	2449 MHz	Channel 67:	2469 MHz
Channel 08:	2410 MHz	Channel 28:	2430 MHz	Channel 48:	2450 MHz	Channel 68:	2470 MHz
Channel 09:	2411 MHz	Channel 29:	2431 MHz	Channel 49:	2451 MHz	Channel 69:	2471 MHz
Channel 10:	2412 MHz	Channel 30:	2432 MHz	Channel 50:	2452 MHz	Channel 70:	2472 MHz
Channel 11:	2413 MHz	Channel 31:	2433 MHz	Channel 51:	2453 MHz	Channel 71:	2473 MHz
Channel 12:	2414 MHz	Channel 32:	2434 MHz	Channel 52:	2454 MHz	Channel 72:	2474 MHz
Channel 13:	2415 MHz	Channel 33:	2435 MHz	Channel 53:	2455 MHz	Channel 73:	2475 MHz
Channel 14:	2416 MHz	Channel 34:	2436 MHz	Channel 54:	2456 MHz	Channel 74:	2476 MHz
Channel 15:	2417 MHz	Channel 35:	2437 MHz	Channel 55:	2457 MHz	Channel 75:	2477 MHz
Channel 16:	2418 MHz	Channel 36:	2438 MHz	Channel 56:	2458 MHz	Channel 76:	2478 MHz
Channel 17:	2419 MHz	Channel 37:	2439 MHz	Channel 57:	2459 MHz	Channel 77:	2479 MHz
Channel 18:	2420 MHz	Channel 38:	2440 MHz	Channel 58:	2460 MHz	Channel 78:	2480 MHz
Channel 19:	2421 MHz	Channel 39:	2441 MHz	Channel 59:	2461 MHz		

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. The transmitter is presented with a continuous data stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its 79 channels and over the minimum number of hopping channels (75 channels).

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Note:

1. These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
2. Regards to the frequency band operation; the lowest , middle and highest frequency of channel were selected to perform the test, then shown on this report.
3. This device is a composite device in accordance with Part 15 regulations. The function for the receiver was measured and made a test report that the report number is 061L148F, certified under Declaration of Conformity.
4. Quietek had verified among construction and function in typical operation, then shown in this test report.

## **1.2. Operational Description**

The EUT is GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone with 79 channels of Bluetooth function. This device provides wireless technology that revolutionizes personal connectivity. It is the solution for the seamless integration of Bluetooth technology into personal computer enabling short-range wireless connections between desktop/laptop computers, mobile phone or PDA, Bluetooth-enabled peripherals, portable handheld devices.


**1.3. Tested System Details**

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
(1) N/A	N/A	N/A	N/A	N/A	N/A

Signal Cable Type	Signal cable Description
A. Microphone & Earphone Cable	Non-Shieldede, 0.8m

**1.4. Configuration of Tested System**

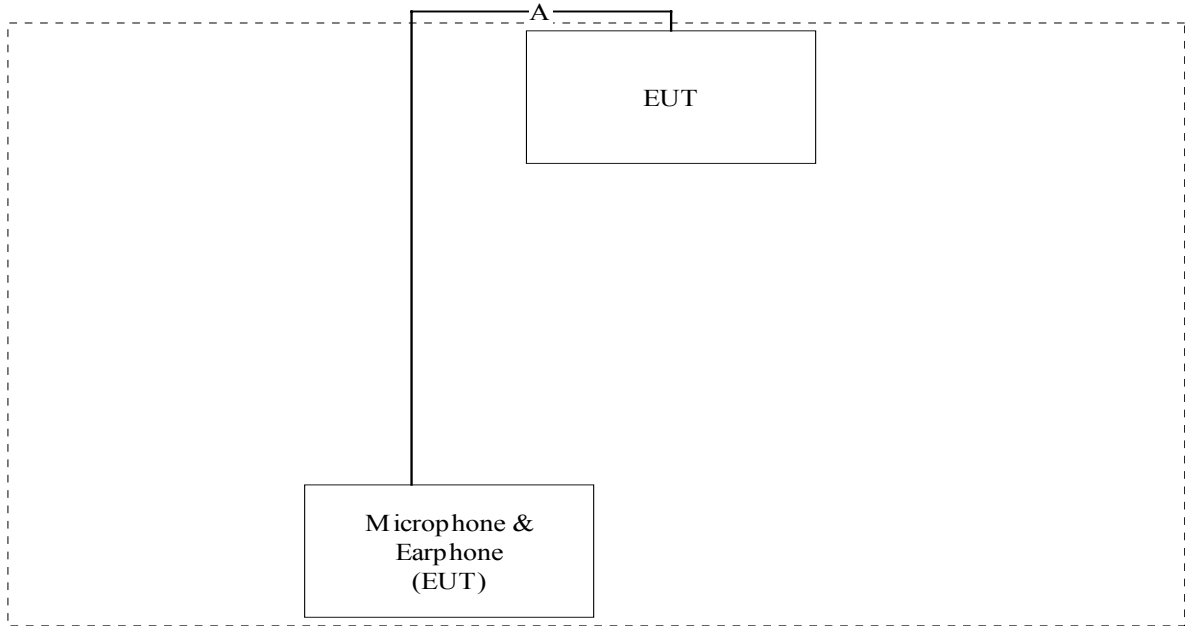

**1.5. EUT Exercise Software**

- (1) Setup the EUT and simulators as shown on 1.4
- (2) Turn on the power of all equipment.
- (3) Messages will be transmitted and received through EUT.
- (4) Test is based on the mandatory continuous transmitter.
- (5) Repeat the above procedure (3) to (4).

**1.6. Test Facility**

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: June 22, 2001 File on  
 Federal Communications Commission  
 FCC Engineering Laboratory  
 7435 Oakland Mills Road  
 Columbia, MD 21046  
 Reference 31040/SIT1300F2



0914

ILAC MRA

July 03, 2001 Accreditation on NVLAP  
 NVLAP Lab Code: 200533-0



Site Name: Quietek Corporation

Site Address: No. 5-22, Ruei-Shu Valley, Ruei-Ping Tsuen,  
 Lin-Kou Shiang, Taipei,  
 Taiwan, R.O.C.  
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
 E-Mail : [service@quietek.com](mailto:service@quietek.com)



## 2. Conducted Emission


### 2.1. Test Equipment

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal.	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 2005	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 2005	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 2005	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	May, 2005	
5	No.1 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

### 2.2. Test Setup

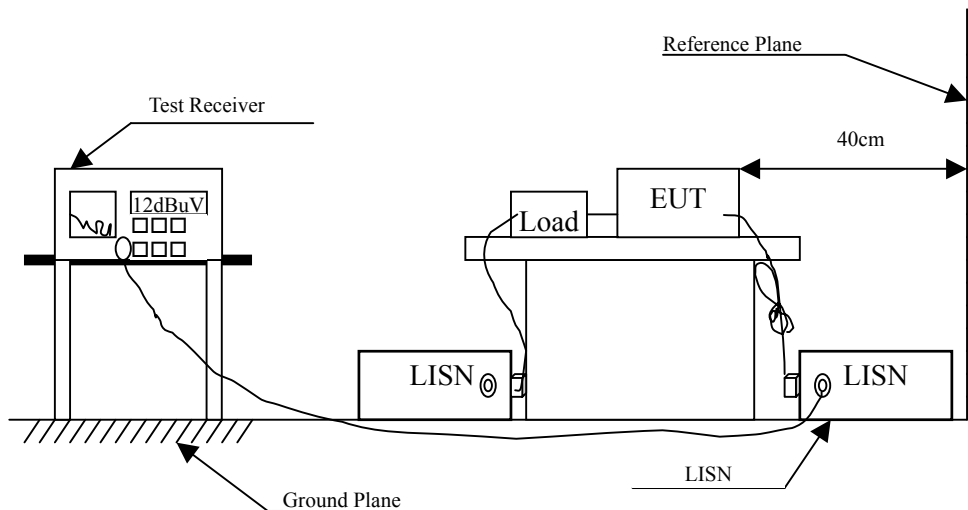

### 2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.



## 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

## 2.5. Uncertainty

The measurement uncertainty is defined as  $\pm 2.02$  dB

## 2.6. Test Result of Conducted Emission

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Conducted Emission Test  
 Power Line : Line 1  
 Test Mode : Channel 39

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.173	0.202	53.080	53.282	-12.061	65.343
0.231	0.203	49.390	49.593	-14.093	63.686
<b>*0.376</b>	<b>0.205</b>	<b>49.530</b>	<b>49.735</b>	<b>-9.808</b>	<b>59.543</b>
0.408	0.205	37.930	38.135	-20.494	58.629
4.095	0.254	31.500	31.754	-24.246	56.000
4.677	0.262	38.070	38.332	-17.668	56.000
<b>Average</b>					
0.173	0.202	42.900	43.102	-12.241	55.343
0.231	0.203	40.170	40.373	-13.313	53.686
<b>*0.376</b>	<b>0.205</b>	<b>40.740</b>	<b>40.945</b>	<b>-8.598</b>	<b>49.543</b>
0.408	0.205	29.450	29.655	-18.974	48.629
4.095	0.254	19.660	19.914	-26.086	46.000
4.677	0.262	24.950	25.212	-20.788	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " \* " means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Conducted Emission Test  
 Power Line : Line 2  
 Test Mode : Channel 39

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.349	0.204	43.150	43.354	-16.960	60.314
*0.379	0.205	49.130	49.335	-10.123	59.457
0.466	0.206	40.950	41.156	-15.815	56.971
0.755	0.210	38.400	38.610	-17.390	56.000
4.646	0.262	42.020	42.282	-13.718	56.000
4.854	0.264	41.800	42.064	-13.936	56.000
<b>Average</b>					
0.349	0.204	39.400	39.604	-10.710	50.314
*0.379	0.205	46.180	46.385	-3.073	49.457
0.466	0.206	38.000	38.206	-8.765	46.971
0.755	0.210	28.040	28.250	-17.750	46.000
4.646	0.262	30.480	30.742	-15.258	46.000
4.854	0.264	32.460	32.724	-13.276	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " \* " means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

**3. Peak Power Output**


**3.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Test Receiver	R & S	ESI 26 / 838786 / 004	May, 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
 2. Mark “X” test instruments are used to measure the final test results.

**3.2. Test Setup**

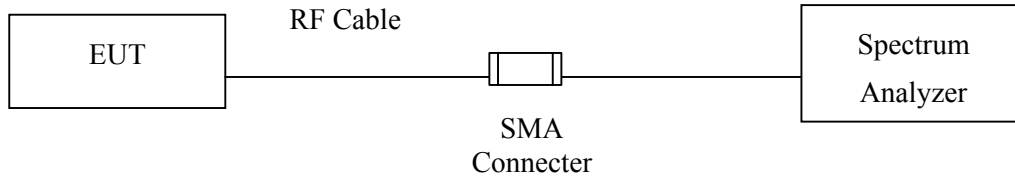

**3.3. Limit**

The maximum peak power shall be less 1Watt.




**3.4. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.27$  dB

### 3.5. Test Result of Peak Power Output

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Peak Power Output  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation

Channel No.	Frequency (MHz)	Measurement	Required Limit	Result
Channel 00	2402.00	-3.39dBm	1 Watt= 30 dBm	Pass
Channel 39	2441.00	-4.64dBm	1 Watt= 30 dBm	Pass
Channel 78	2480.00	-5.94dBm	1 Watt= 30 dBm	Pass

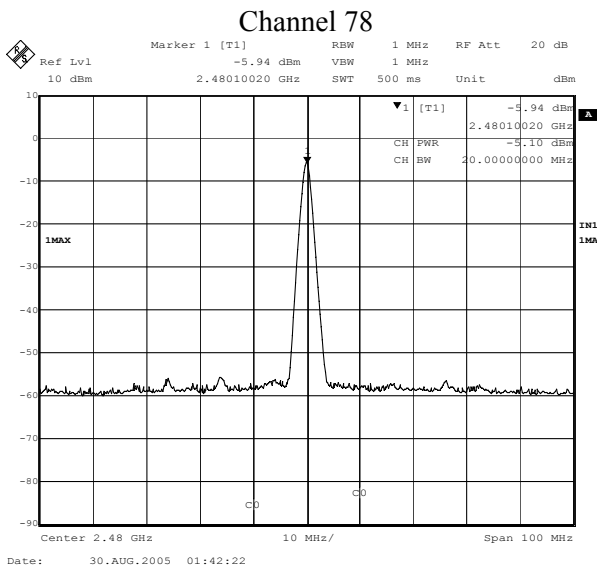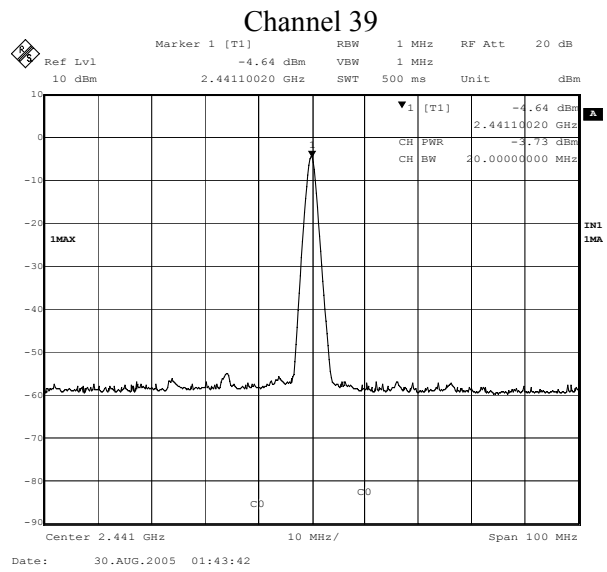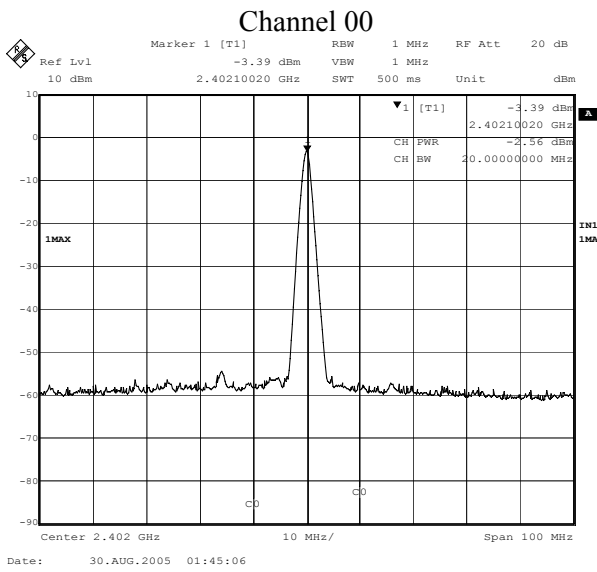

**Note:**

- Receiver setting (Peak Detector): RBW: 1MHz; VBW: 1MHz; Span: 100MHz ◦

## 4. Radiated Emission


### 4.1. Test Equipment

The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input type="checkbox"/> Site # 1	Test Receiver	R & S	ESVS 10 / 834468/003	May, 2005
	Spectrum Analyzer	Advantest	R3162/ 00803480	May, 2005
	Pre-Amplifier	Advantest	BB525C/ 3307A01812	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	Sep., 2004
<input type="checkbox"/> Site # 2	Test Receiver	R & S	ESCS 30 / 836858 / 022	May, 2005
	Spectrum Analyzer	Advantest	R3162 / 100803466	May, 2005
	Pre-Amplifier	Advantest	BB525C/3307A01814	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2705	May, 2005
	Horn Antenna	ETS	3115 / 0005-6160	Sep., 2004
	Pre-Amplifier	QTK	QTK-AMP-01/ 0001	May, 2005
<input checked="" type="checkbox"/> Site # 3	Test Receiver	R & S	ESCS 30 / 100122	Feb., 2005
	Spectrum Analyzer	Advantest	R3162 / 100803480	May, 2005
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2005
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2005
	Horn Antenna	ETS	3115 / 0005-6160	July, 2005
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2005

- Note: 1. All equipments that need to calibrate are with calibration period of 1 year.  
 2. Mark "X" test instruments are used to measure the final test results.

### 4.2. Test Setup

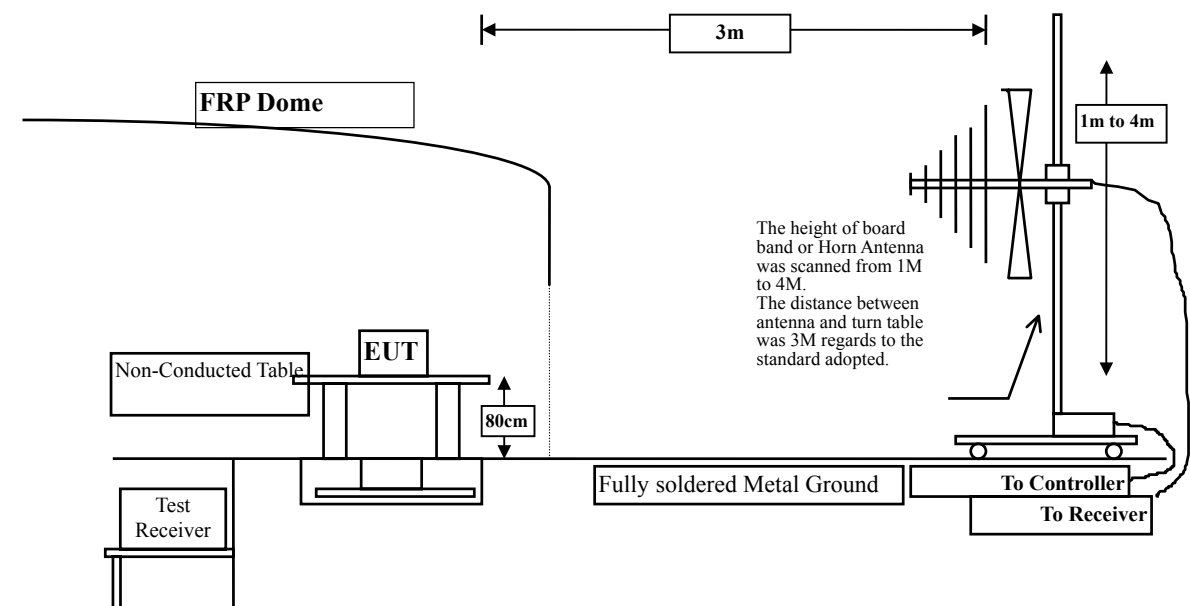

### 4.3. Limits

#### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks:
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
  2. In the Above Table, the tighter limit applies at the band edges.
  3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

### 4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated measurement.

The additional latch filter below 1GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30 )is 120 kHz, above 1GHz are 1 MHz.

The frequency range from 30MHz to 10th harmonics is checked.

### 4.5. Uncertainty

The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB  
 under 1G is defined as  $\pm 3.8$  dB

#### 4.6. Test Result of Radiated Emission

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Channel 00

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	2.655	43.458	46.113	-27.887	74.000
7206.000	3.749	36.447	40.196	-33.804	74.000
9608.000	4.218	37.273	41.491	-32.509	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	-8.965	41.894	32.929	-41.071	74.000
7206.000	-7.871	37.665	29.794	-44.206	74.000
9608.000	-7.402	36.675	29.273	-44.727	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.



Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Channel 39

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4881.950	2.758	41.902	44.660	-29.340	74.000
7323.000	3.869	37.423	41.292	-32.708	74.000
9764.000	4.064	36.781	40.845	-33.155	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4882.050	-8.862	42.136	33.274	-40.726	74.000
7323.000	-7.751	36.614	28.863	-45.137	74.000
9764.000	-7.556	36.226	28.670	-45.330	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Harmonic Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Channel 78

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4959.850	2.872	41.776	44.649	-29.351	74.000
7440.000	3.993	37.076	41.069	-32.931	74.000
9920.000	4.014	36.313	40.327	-33.673	74.000
<b>Average Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4959.950	-8.746	42.062	33.315	-40.685	74.000
7440.000	-7.627	37.804	30.177	-43.823	74.000
9920.000	-7.606	37.086	29.480	-44.520	74.000
<b>Average Detector:</b>					
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:1MHz; Span:100MHz ◦
3. Receiver setting (AVG Detector) : RBW:1MHz; VBW:30Hz; Span:20MHz ◦
4. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.
5. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Channel 00

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
	Loss	Factor		Level	Level		
MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal:**

243.400	1.97	10.82	0.00	9.31	22.10	23.90	46.00
260.800	2.06	13.05	0.00	10.19	25.30	20.70	46.00
292.800	2.22	12.31	0.00	8.16	22.70	23.30	46.00
312.200	2.32	12.10	0.00	12.27	26.70	19.30	46.00
325.800	2.39	12.26	0.00	11.04	25.70	20.30	46.00
* 572.230	3.66	17.18	0.00	9.36	30.20	15.80	46.00

**Vertical:**

243.400	1.97	11.08	0.00	13.05	26.10	19.90	46.00
281.230	2.16	12.21	0.00	7.72	22.10	23.90	46.00
292.800	2.22	12.22	0.00	8.28	22.72	23.28	46.00
325.800	2.39	12.51	0.00	16.79	31.70	14.30	46.00
572.200	3.66	19.23	0.00	8.39	31.28	14.72	46.00
* 624.600	3.93	18.89	0.00	9.98	32.80	13.20	46.00

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ \* ” means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Channel 39

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		
<b>Horizontal:</b>							
273.400	2.12	11.88	0.00	13.80	27.80	18.20	46.00
294.800	2.23	12.45	0.00	13.11	27.80	18.20	46.00
299.660	2.26	12.53	0.00	12.90	27.69	18.31	46.00
* 312.200	2.32	12.10	0.00	19.97	34.40	11.60	46.00
338.400	2.46	13.00	0.00	11.94	27.40	18.60	46.00
351.070	2.52	12.95	0.00	13.23	28.70	17.30	46.00

<b>Vertical:</b>							
255.040	2.03	12.31	0.00	10.30	24.64	21.36	46.00
273.470	2.12	12.24	0.00	10.44	24.80	21.20	46.00
299.660	2.26	12.14	0.00	13.29	27.69	18.31	46.00
* 351.000	2.52	13.30	0.00	12.89	28.71	17.29	46.00
458.700	3.08	16.42	0.00	5.86	25.36	20.64	46.00
499.480	3.29	16.34	0.00	7.06	26.69	19.31	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ \* ” means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : General Radiated Emission  
 Test Site : No.3 OATS  
 Test Mode : Channel 78

Freq.	Cable	Probe	PreAMP	Reading	Emission	Margin	Limit
MHz	Loss	Factor	dB	Level	Level	dB	dBuV/m
	dB	dB/m		dBuV	dBuV/m		
<b>Horizontal:</b>							
281.230	2.16	12.02	0.00	8.64	22.82	23.18	46.00
299.660	2.26	12.53	0.00	8.41	23.20	22.80	46.00
307.730	2.30	12.13	0.00	10.98	25.40	20.60	46.00
312.270	2.32	12.10	0.00	12.29	26.72	19.28	46.00
351.070	2.52	12.95	0.00	7.89	23.36	22.64	46.00
* 624.610	3.93	18.59	0.00	7.62	30.14	15.86	46.00

<b>Vertical:</b>							
281.230	2.16	12.21	0.00	8.44	22.82	23.18	46.00
299.660	2.26	12.14	0.00	9.80	24.20	21.80	46.00
325.800	2.39	12.51	0.00	10.79	25.70	20.30	46.00
351.070	2.52	13.30	0.00	9.52	25.34	20.66	46.00
572.230	3.66	19.23	0.00	7.31	30.20	15.80	46.00
* 624.600	3.93	18.89	0.00	8.36	31.18	14.82	46.00

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. “ \* ” means this data is the worst emission level.
3. Emission Level = Reading Level + Probe Factor + Cable Loss – PreAMP.

## 5. Band Edge

### 5.1. Test Equipment


The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3272 / 72421194	May, 2005
Test Receiver	R & S	ESCS 30 / 825442/14	May, 2005
X Spectrum Analyzer	Advantest	R3162 / 101102468	Oct., 2004
X Pre-Amplifier	QTK	QTK-AMP-01 / 0001	July, 2005
Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2005
X Horn Antenna	ETS	3115 / 0005-6160	July, 2005


- Note: 1. All equipments that need to calibrate are with calibration period of 1 year.  
 2. Mark "X" test instruments are used to measure the final test results.

### 5.2. Test Setup

#### RF Conducted Measurement:

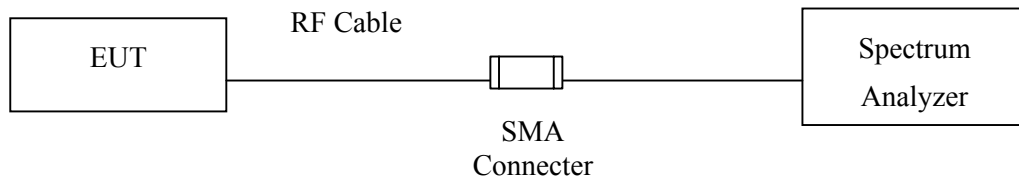

#### RF Radiated Measurement:

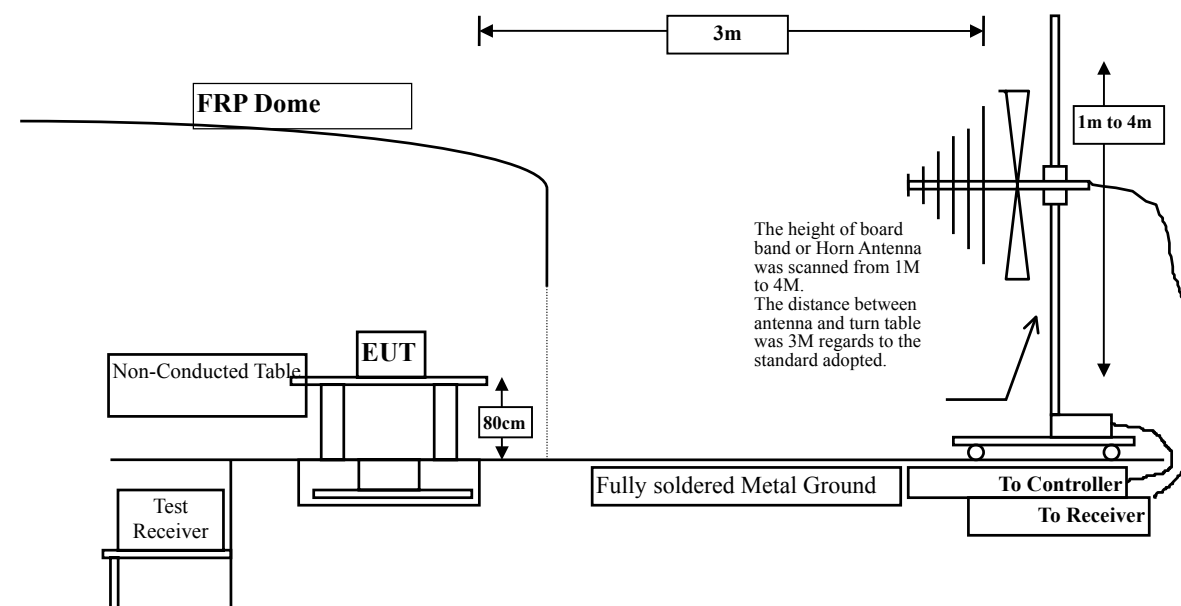

### 5.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2003 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30 )is 120 kHz, above 1GHz are 1 MHz.

### 5.5. Uncertainty

The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB  
under 1G is defined as  $\pm 3.8$  dB

**5.6. Test Result of Band Edge**

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Channel 00


**RF Conducted Measurement:**

RBW: 100kHz, VBW: 1MHz			
Channel No.	Frequency (MHz)	Required Limit (dBc)	Result
00	<2400	>20	Pass

**Radiated Measurement: (Horizontal)**

RBW: 1MHz, VBW: 1MHz						
Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00(Peak Detector)	2330.060	40.931	38.270	74.00	54.00	Pass
00(Avg Detector)	--	--	--	74.00	54.00	Pass

**Figure Channel 00:**

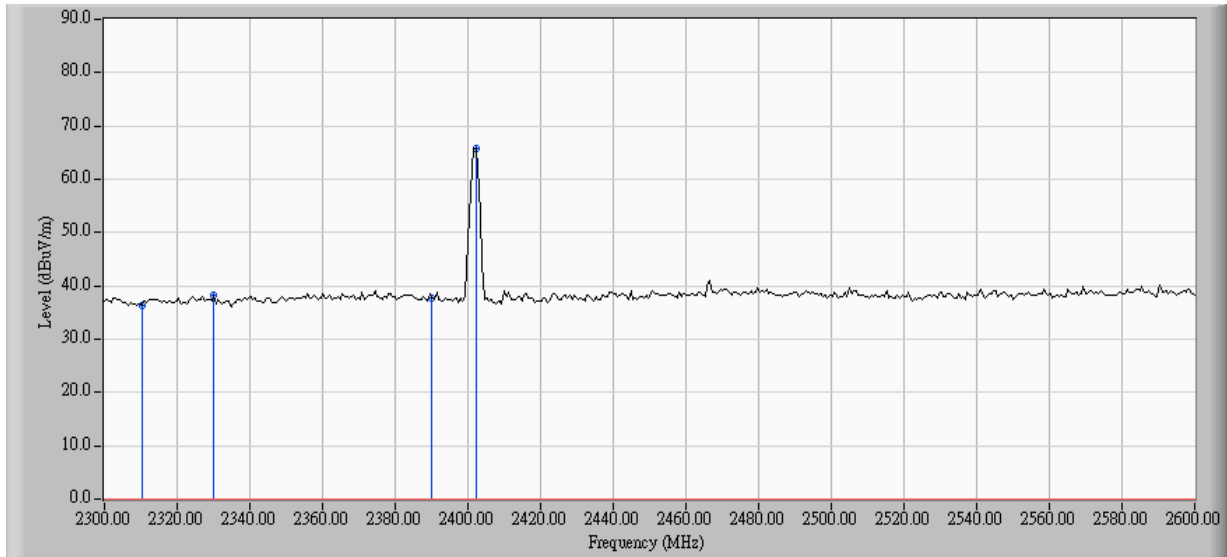

Note:  
 RBW=1MHz, VBW=1MHz, Sweep Time=500ms.




Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Channel 00

**Radiated Measurement: (Vertical)**

RBW: 1MHz, VBW: 1MHz						
Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00(Peak Detector)	2337.880	40.804	38.180	74.00	54.00	Pass
00(Avg Detector)	--	--	--	74.00	54.00	Pass

**Figure Channel 00:**

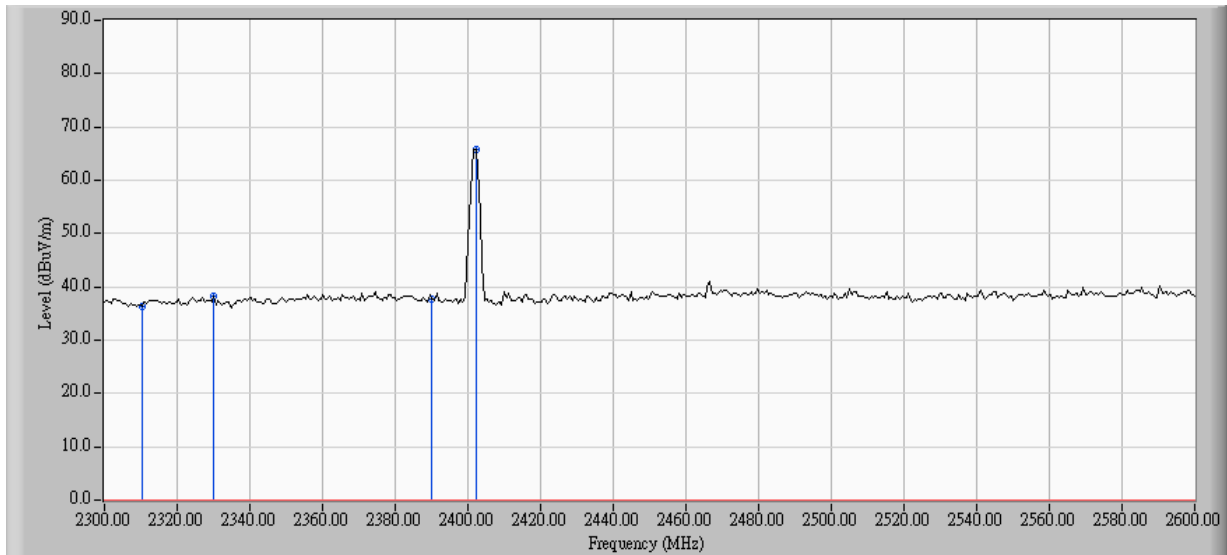

Note:


RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Channel 78

**RF Radiated Measurement: (Horizontal)**

RBW: 1MHz, VBW: 1MHz						
Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78(Peak Detector)	2494.790	40.992	39.090	74.00	54.00	Pass
78(Avg Detector)	--	--	--	74.00	54.00	Pass

**Figure Channel 78:** (Horizontal)

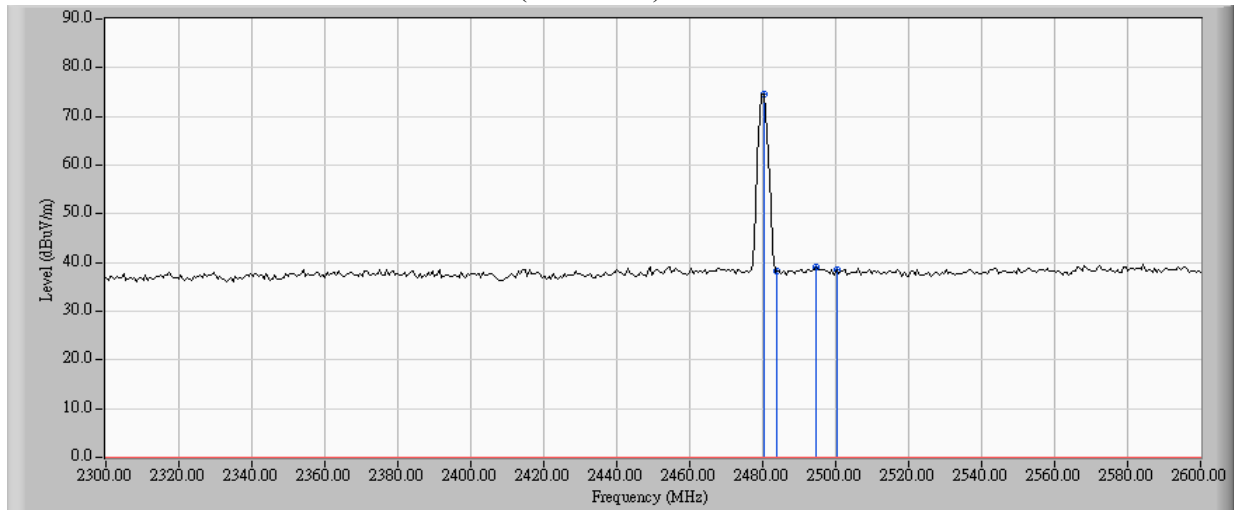


Note:  
 RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Channel 78

**RF Radiated Measurement: (Vertical)**

Channel No.	Frequency (MHz)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
78(Peak Detector)	2497.190	41.174	62.015	74.00	54.00	Pass
78(Avg Detector)	--	--	--	74.00	54.00	Pass

**Figure Channel 78:** (Vertical)

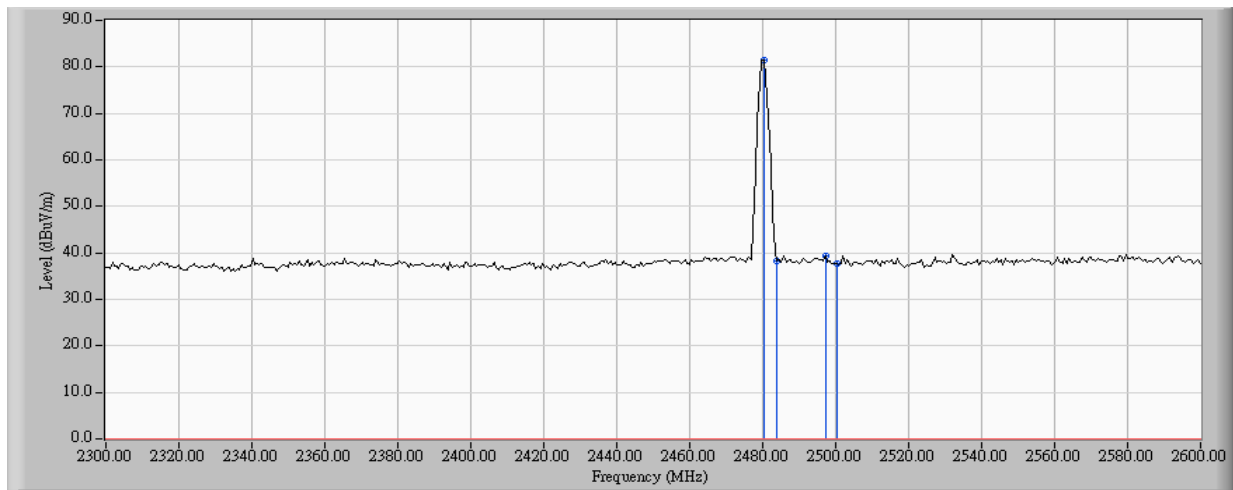

Note:  
 RBW=1MHz, VBW=1MHz, Sweep Time=500ms.

Note: The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

**6. Channel Number**


**6.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Test Receiver	R & S	ESI26 / 838786/004	Mar., 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
 2. Mark “X” test instruments are used to measure the final test results.

**6.2. Test Setup**

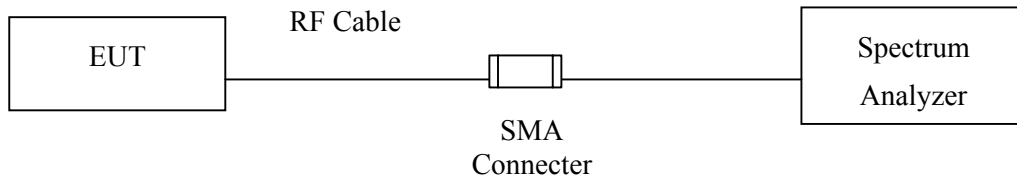

**6.3. Limit**

Frequency hopping systems operating in the 2400-2483.5 MHz bands shall use at least 75 hopping frequencies.





**6.4. Uncertainty**

The measurement uncertainty is defined as  $\pm 200\text{kHz}$

### 6.5. Test Result of Channel Number


Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation

Frequency Range (MHz)	Measurement (Hopping Channel)	Required Limit (Hopping Channel)	Result
2402 ~ 2480	79	>75	Pass

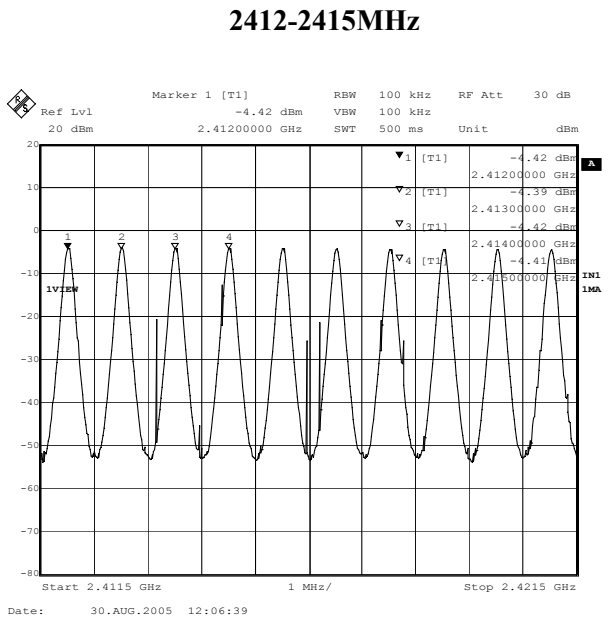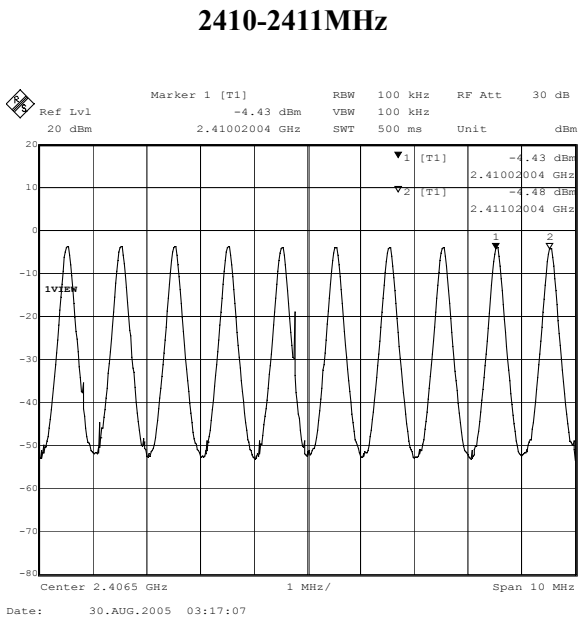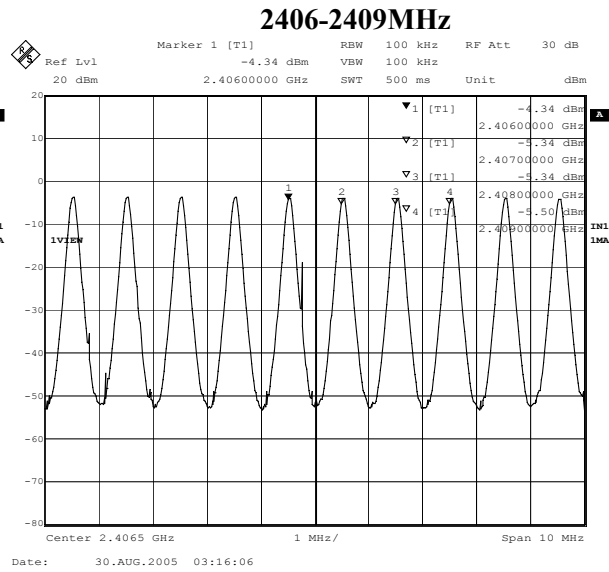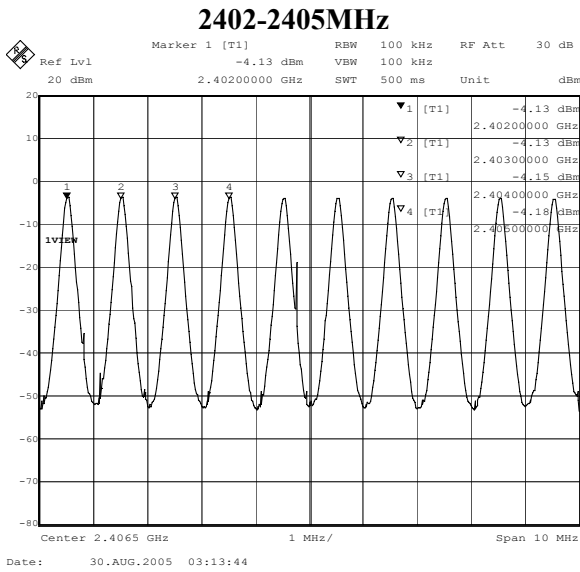


Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation

**2416-2419MHz**

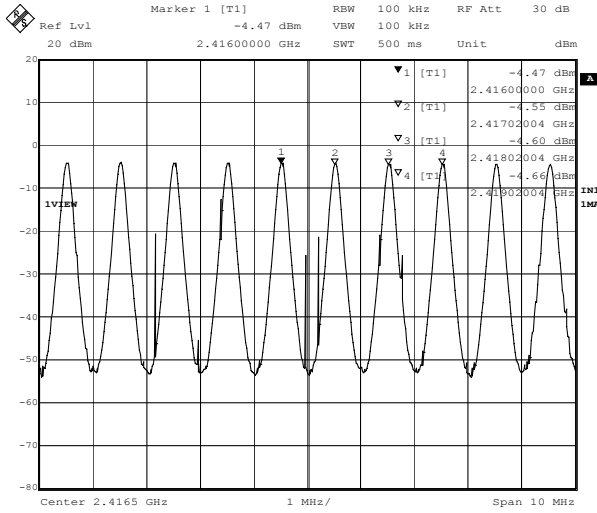


Date: 30.AUG.2005 12:05:06

**2420-2421MHz**

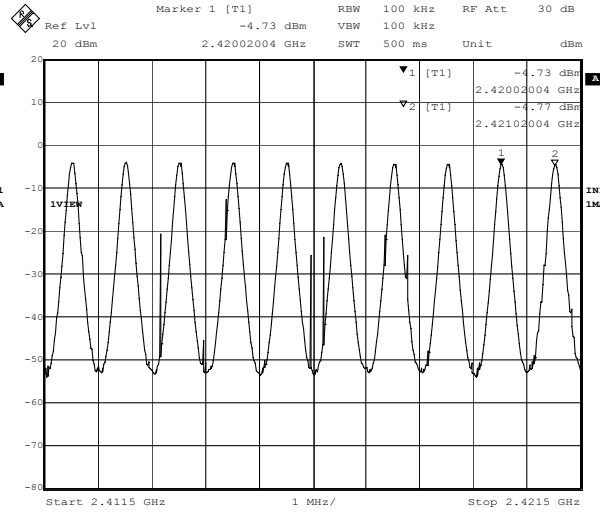


Date: 30.AUG.2005 12:08:03

**2422-2425MHz**

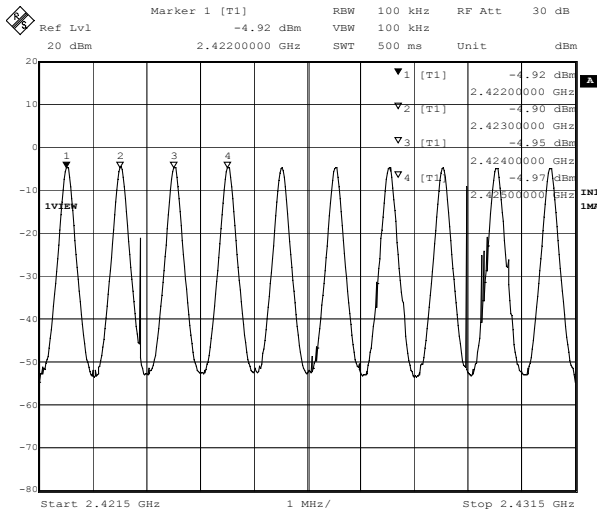

Date: 30.AUG.2005 12:20:53


**2426-2429MHz**

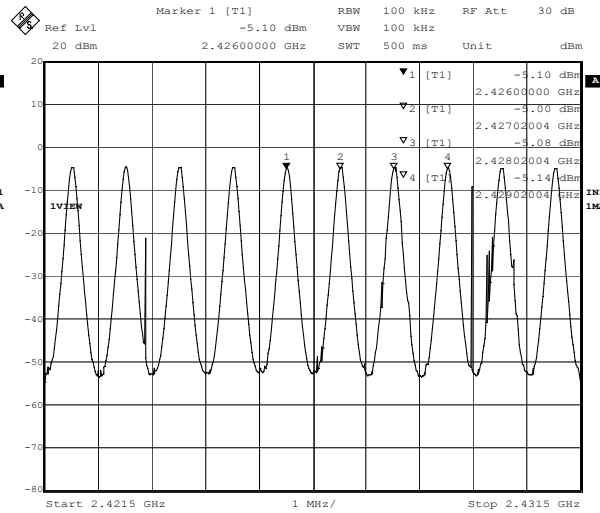


Date: 30.AUG.2005 12:22:21

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation


**2430-2431MHz**

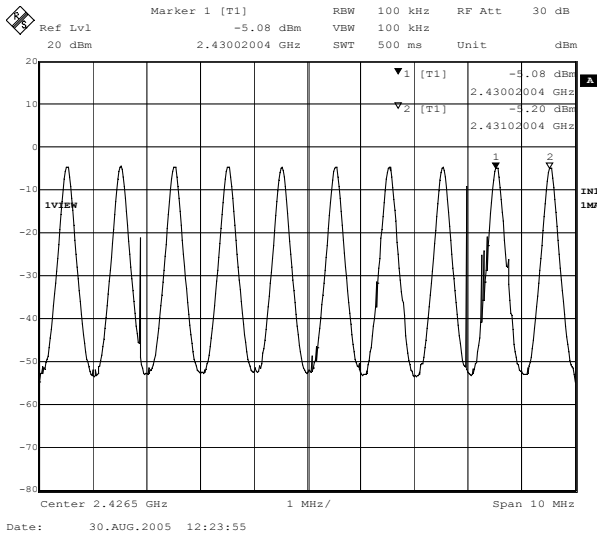


**2432-2435MHz**

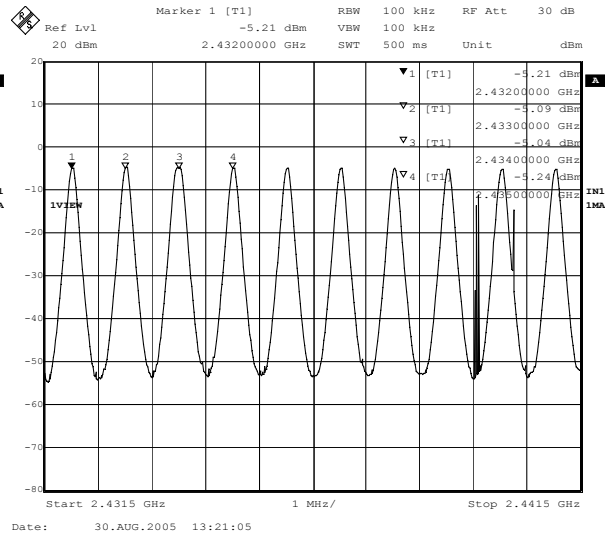


**2436-2439MHz**

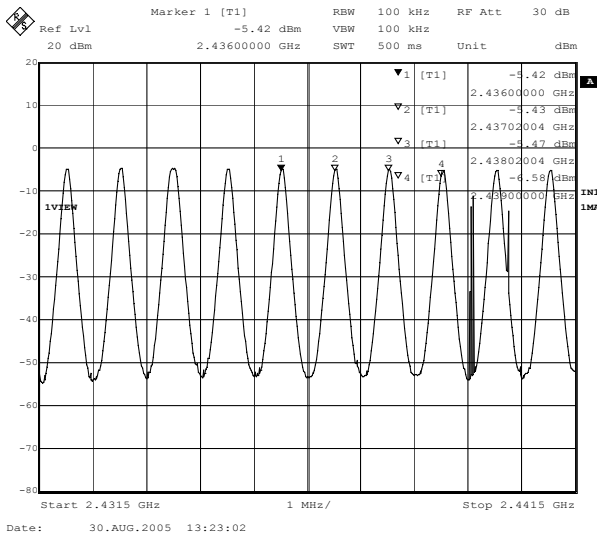


**2440-2441MHz**

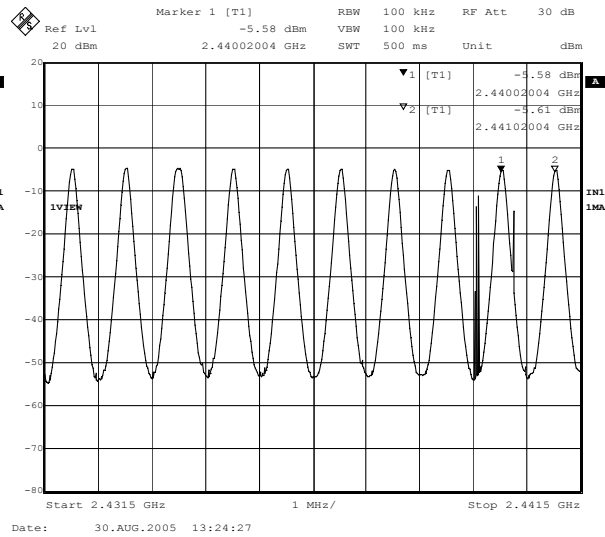


### 2442-2445MHz

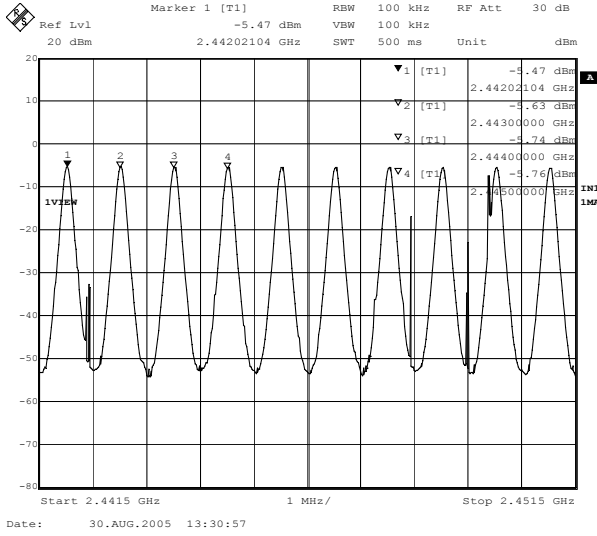


### 2446-2449MHz

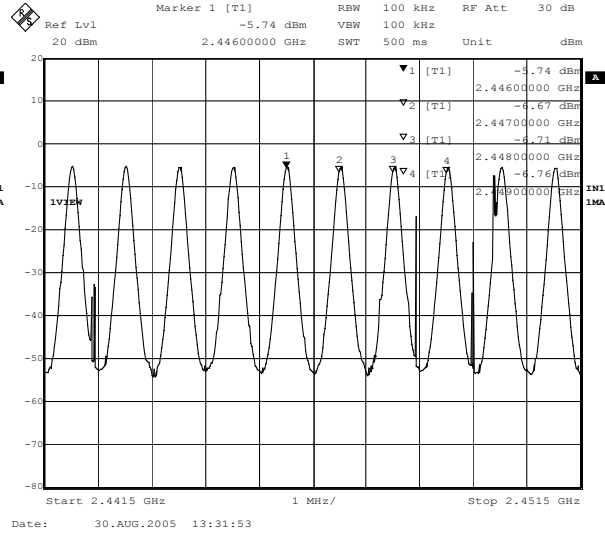

### 2450-2451MHz

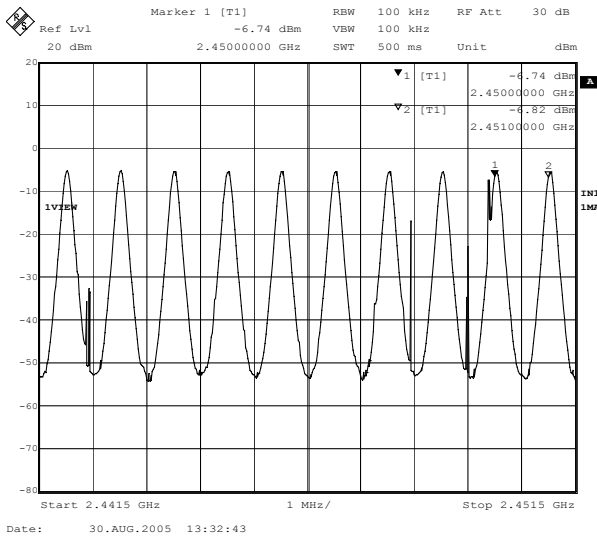


### 2452-2455MHz

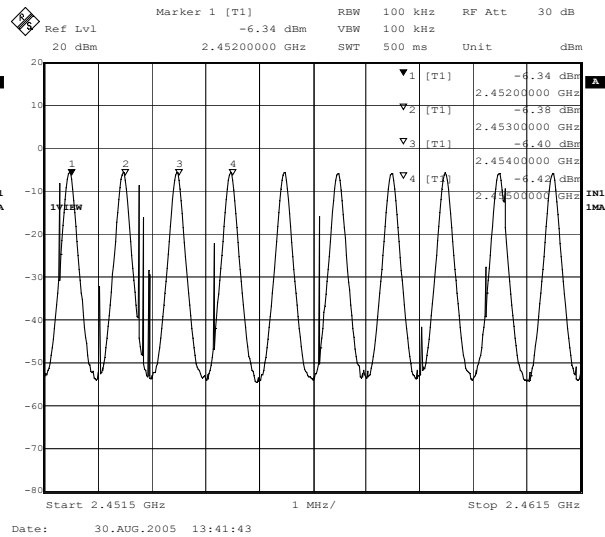




Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation


**2456-2459MHz**

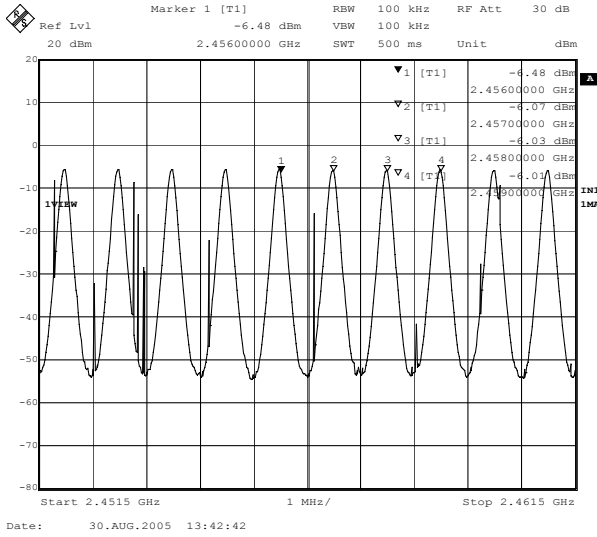


**2460-2461MHz**

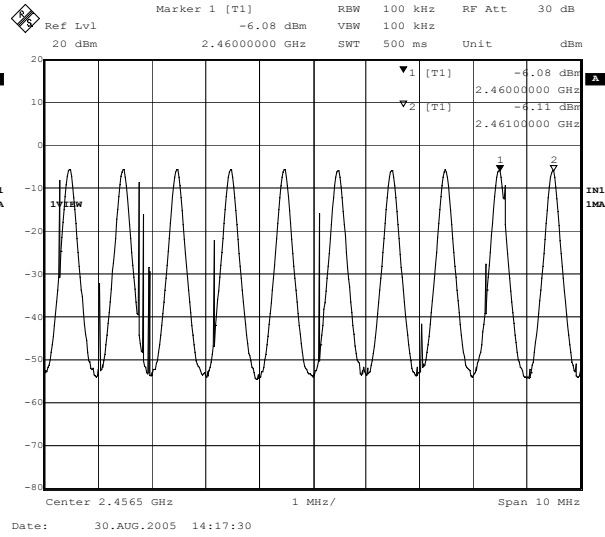

**2462-2465MHz**

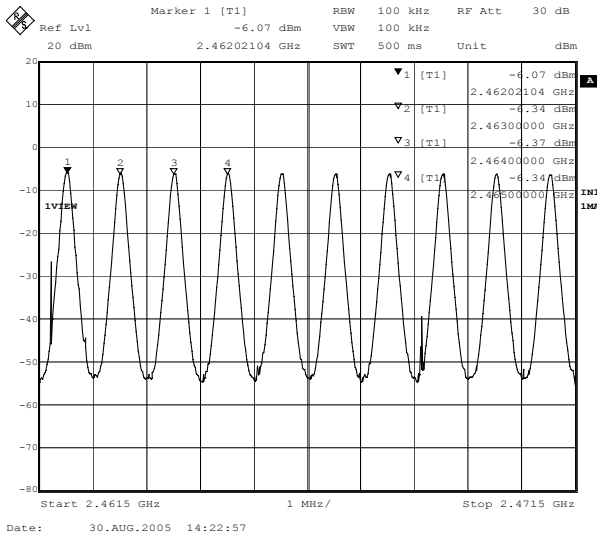


**2466-2469MHz**

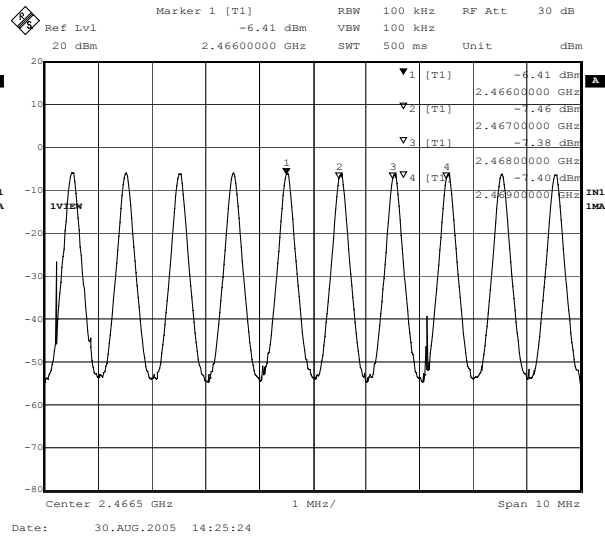


Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Number  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation


**2470-2471MHz**

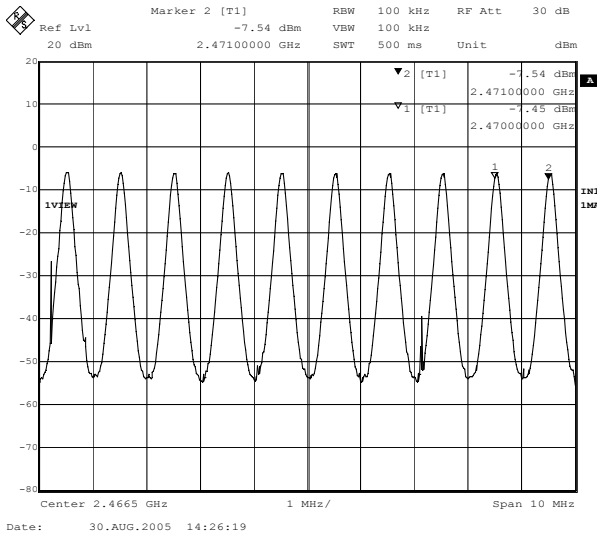


**2472-2475MHz**

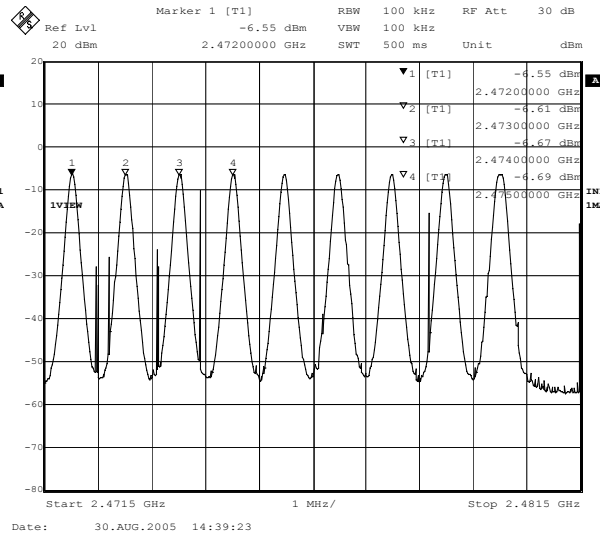

**2476-2479MHz**

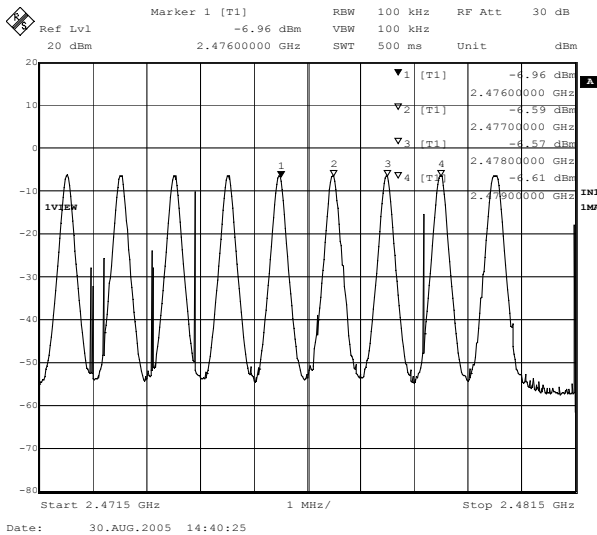

**2480MHz**

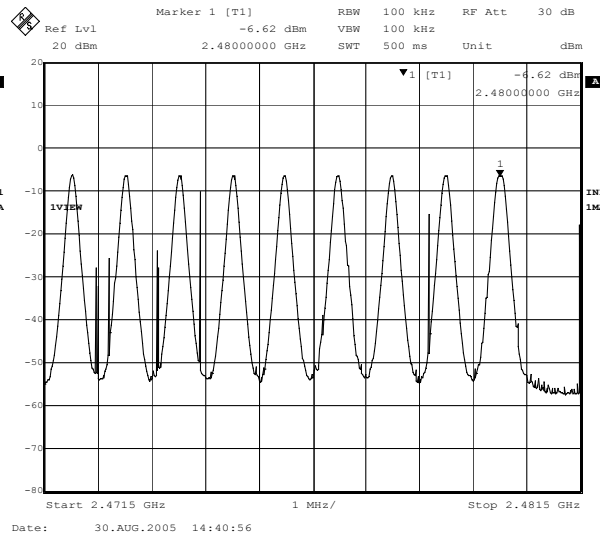

**7. Channel Separation**


**7.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	R & S	ESI26 / 838786/004	Mar., 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
 2. Mark “X” test instruments are used to measure the final test results.

**7.2. Test Setup**

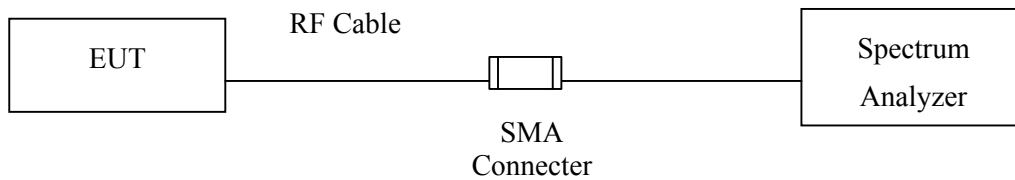

**7.3. Limit**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


**7.4. Uncertainty**

The measurement uncertainty is defined as  $\pm 150\text{Hz}$


### 7.5. Test Result of Channel Separation

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation

Frequency (MHz)	20dB Bandwidth (kHz)
2402	375.751
2441	363.226
2480	400.801

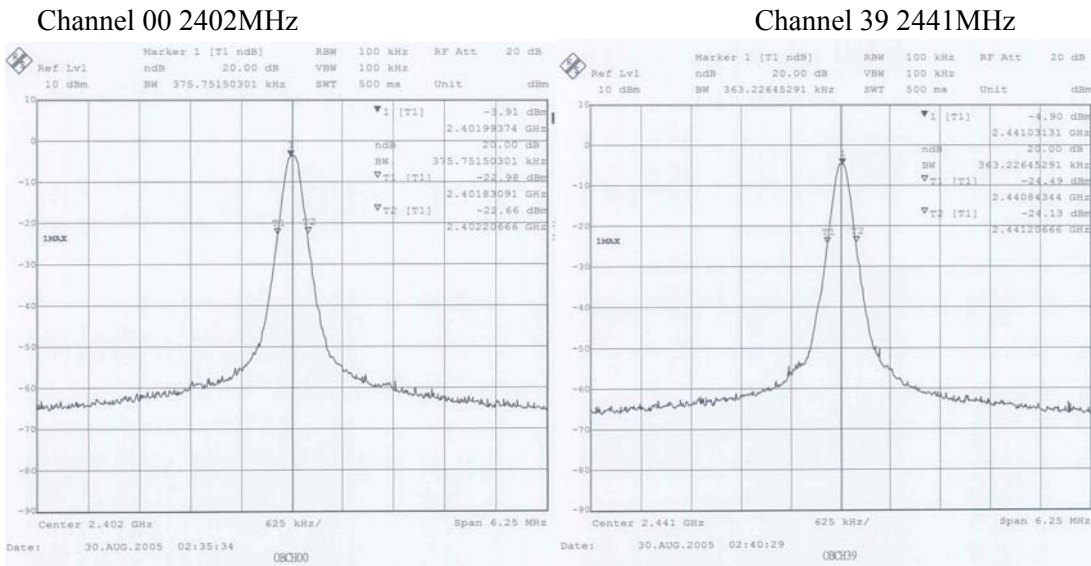


**Channel 78 2480 MHz**

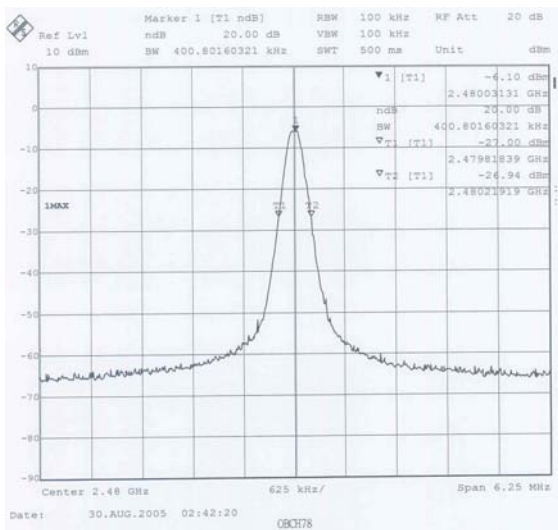


Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Channel Separation  
 Test Site : No.3 OATS  
 Test Mode : Normal Operation

Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
2402	987	>25 or 2/3*20dB bandwidth	Pass
2441	1050	>25 or 2/3*20dB bandwidth	Pass
2480	1000	>25 or 2/3*20dB bandwidth	Pass


Channel 00 2402MHz

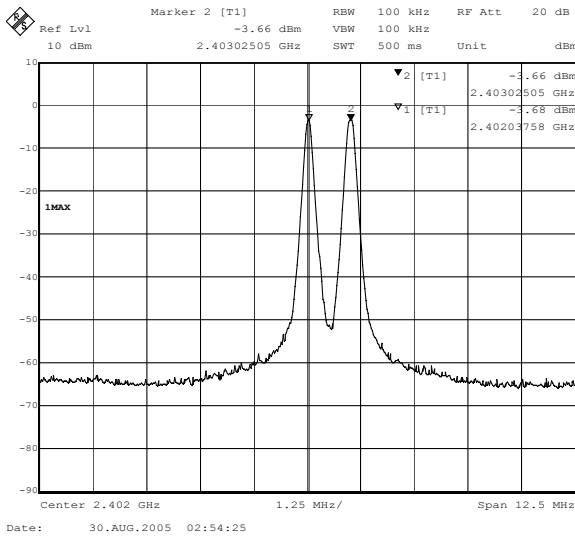

Channel 39 2441MHz

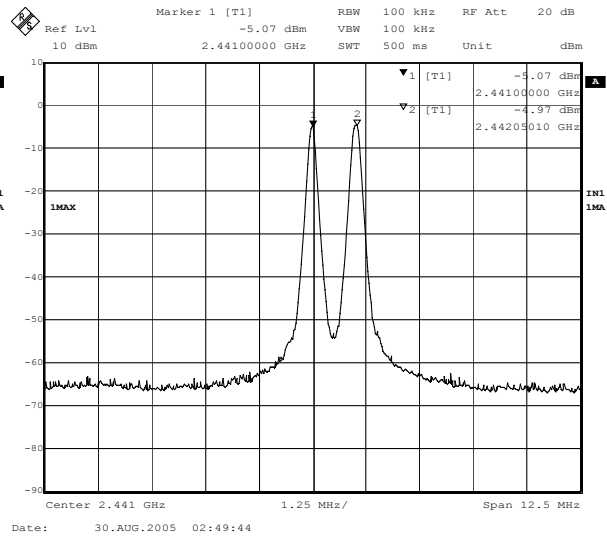

Channel 78 2480 MHz

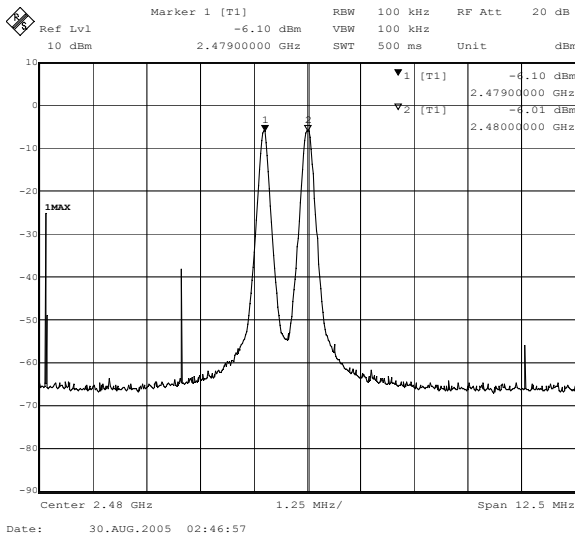

**8. Dwell Time**


**8.1. Test Equipment**

The following test equipments are used during the radiated emission tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Spectrum Analyzer	Advantest	R3162 / 121200166	Mar., 2005

Note: 1. All equipment upon which need to calibrated are with calibration period of 1 year.  
 2. Mark "X" test instruments are used to measure the final test results.

**8.2. Test Setup**

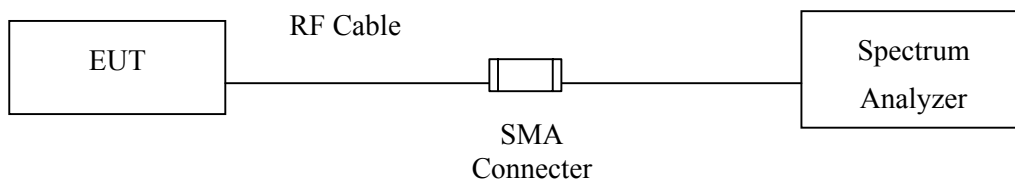

**8.3. Limit**

The dwell time shall be the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.


**8.4. Uncertainty**

The measurement uncertainty is defined as  $\pm 25\text{msec}$

### 8.5. Test Result of Dwell Time

Product : GSM850/DCS1800 / PCS1900 GSM/GPRS Mobile Phone  
 Test Item : Dwell Time  
 Test Site : No.3 OATS  
 Test Mode : Channel 00,39,78

Channel (MHz)	Measurement Level (sec)	Required Limit (sec)	Result
CH 00 2402	183.304 (ms)	< 0.4	Pass
CH 39 2441	188.431 (ms)	< 0.4	Pass
CH 78 2480	188.431(ms)	< 0.4	Pass

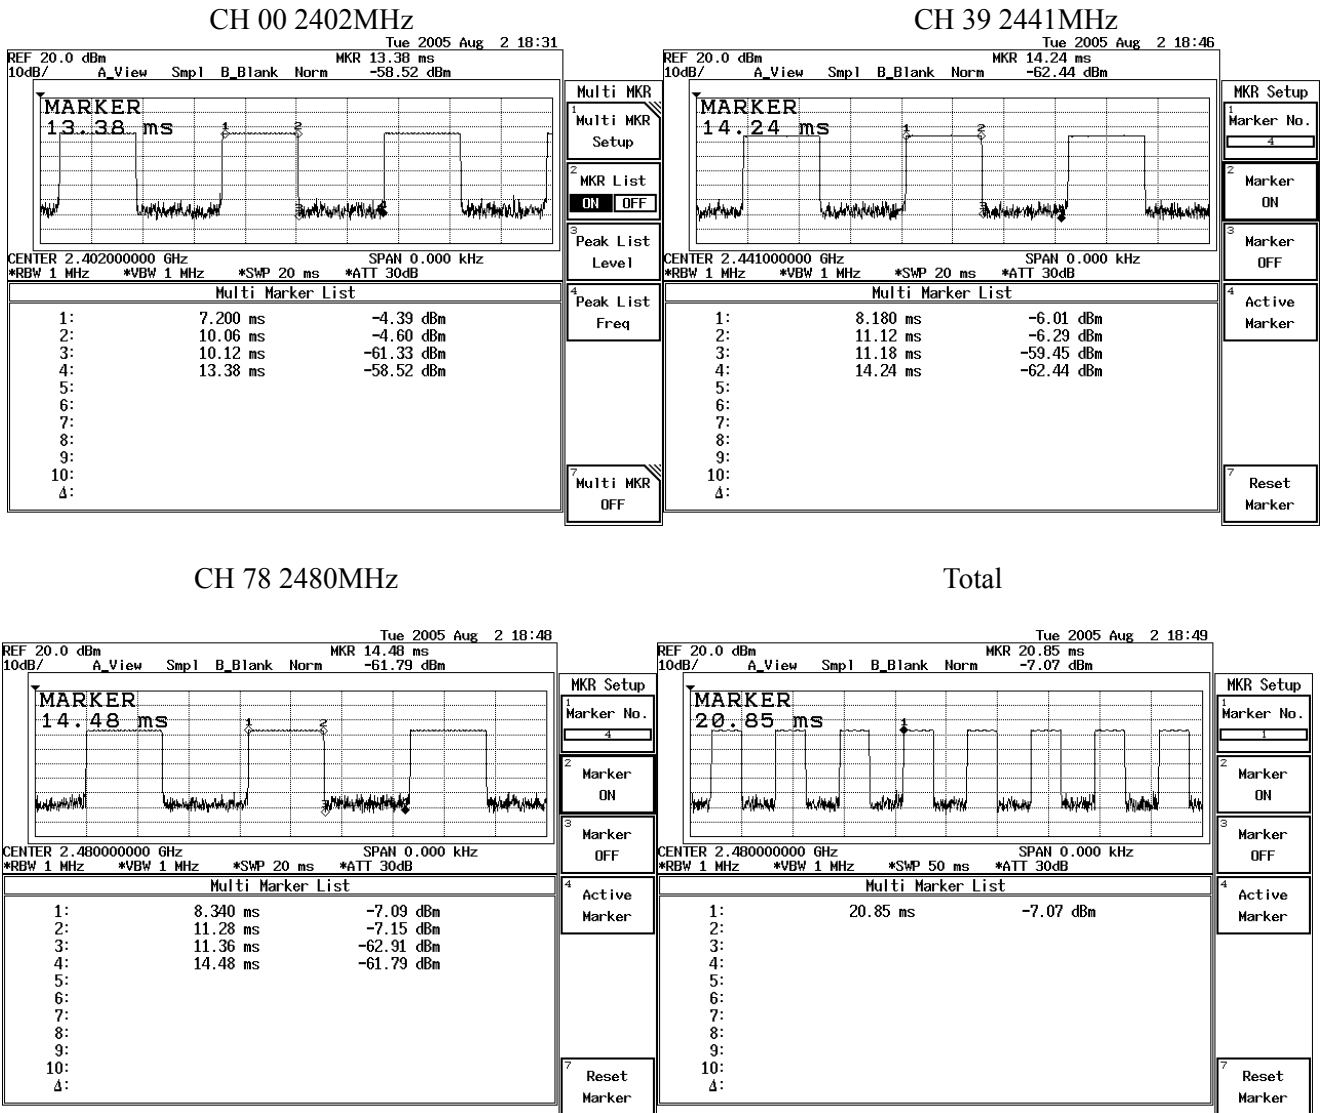

Note: Dwell time = time slot length \* hop rate / number of hopping channels \* period

### Occupancy Time of Frequency Hopping System

Test Time Period:  $0.4 * 79 = 31.6 \text{sec}$  , Hopping Times Within 1sec:  $8 / 50 \text{msec} = 0.16 / \text{sec}$

A) 2402MHz The Maximum Occupancy Time Within 31.6sec:  $(2860 \mu \text{s} * 160) / (79 * 31.6) = 183.304 \text{msec}$  ◦

B) 2441MHz The Maximum Occupancy Time Within 31.6sec:  $(2940 \mu \text{s} * 160) / (79 * 31.6) = 188.431 \text{msec}$  ◦

C) 2480MHz The Maximum Occupancy Time Within 31.6sec:  $(2940 \mu \text{s} * 160) / (79 * 31.6) = 188.431 \text{msec}$  ◦

Test Result: The Average Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦

PS: (1) From Bluetooth Specification , It Hops 1600 Times in 1sec ◦ The Average Occupancy Time of Each 79 Channels is  $1600 / 79$  Times , Therefore , We Calculate The Maximum Occupancy Time (worse cars) As Below:

A) 2402Mhz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is  $(0.4 \text{msec} * 1600) / (79 * 31.6) = 289.056 \text{msec}$

B) 2441MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is  $(0.4 \text{msec} * 1600) / (79 * 31.6) = 289.056 \text{msec}$

C) 2480MHz The Occupancy Time of Each Pulse is 0.4msec , The Maximum Occupancy Time within 31.6sec is  $(0.4 \text{msec} * 1600) / (79 * 31.6) = 289.056 \text{msec}$

Test Result: The Maximum Occupancy Time of Each Highest , Middle and Lowest Channel Is Less Than 0.4sec , And Corresponds to The Standard ◦



## 9. EMI Reduction Method During Compliance Testing

No modification was made during testing.