

For frequency range 1GHz~16GHz

The EUT with below test mode were measured within Anechoic Chamber and the test results listed in next pages


Note: For all the emissions above 1GHz, the peak measured level comply with peak limit, so the average level were deemed to comply with average limit.

Test Date: May.01, 2014 Temperature: 24℃ Humidity: 34%

No.	Test Mode	Input Port	Resolution & Frequency	Reference Test Data No.	
				Horizontal	Vertical
1. ※	PC Mode	HDMI 1	1920*1080/60Hz	# 89	# 90
2.		HDMI 2	1920*1080/60Hz	# 92	# 91
3.		HDMI 3	1920*1080/60Hz	# 93	# 94
4.		VGA 1	1920*1080/60Hz	# 96	# 95
5.		VGA 2	1920*1080/60Hz	# 98	# 97
6.		VGA 3	1920*1080/60Hz	# 99	# 100

(※ Worst test mode)


30MHz~1000MHz

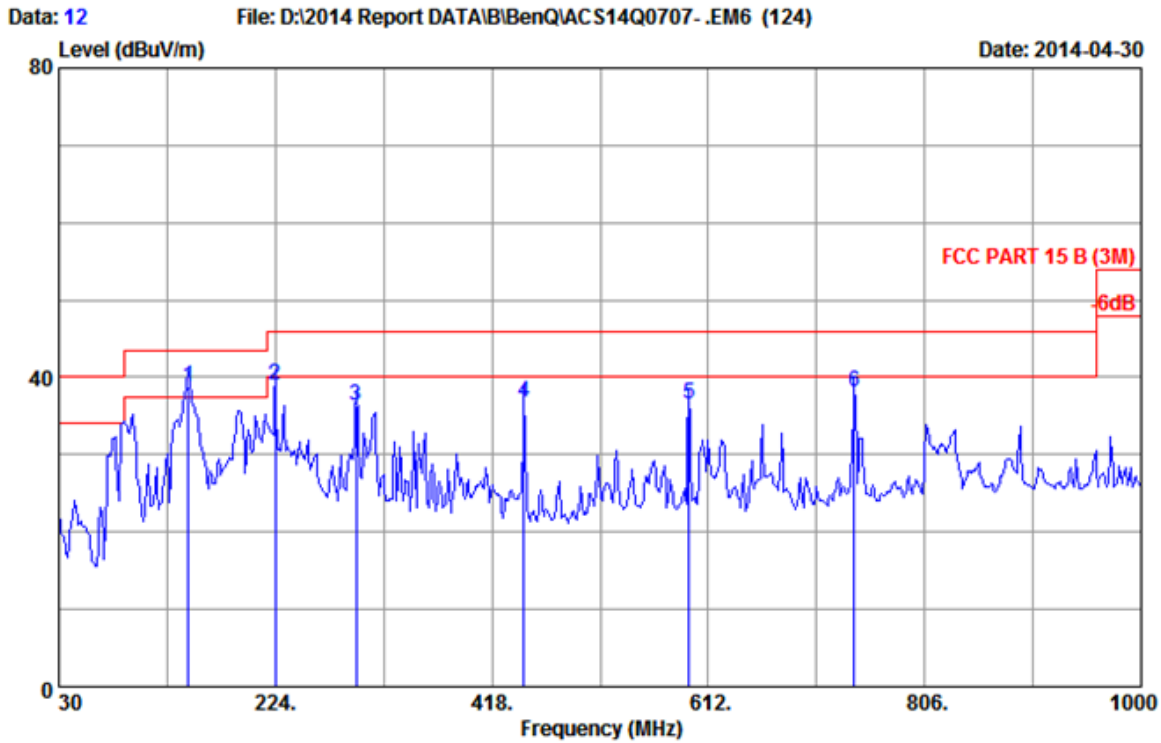

Site no	:3m Chamber	Data No	:12
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)	Engineer	:Bery_Guo
Env./Ins.	:24°C/34%		
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	HDMI 1:1920*1080@60Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission			Remark
					Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	
1	146.400	11.48	1.59	25.64	38.71	43.50	4.79	QP
2	224.000	10.80	1.88	26.23	38.91	46.00	7.09	QP
3	296.750	13.90	2.16	20.26	36.32	46.00	9.68	QP
4	447.100	17.14	2.60	16.95	36.69	46.00	9.31	QP
5	594.540	19.09	3.02	14.33	36.44	46.00	9.56	QP
6	742.950	20.30	3.45	14.35	38.10	46.00	7.90	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

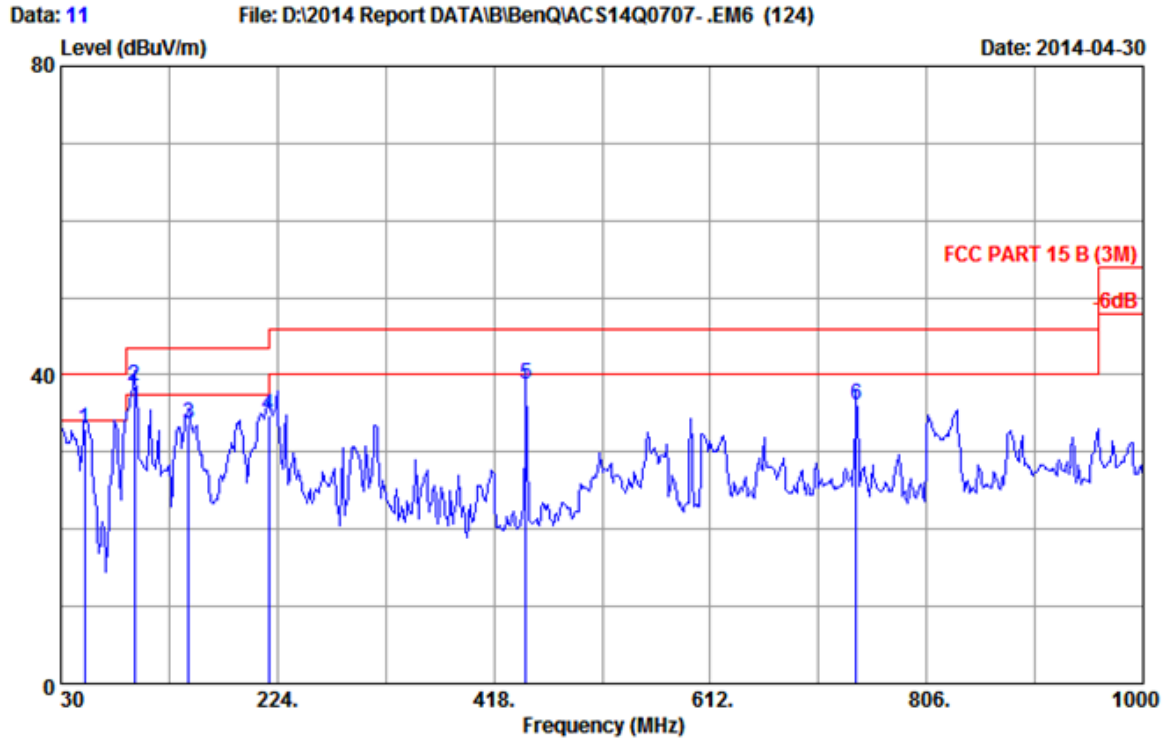

Site no	:3m Chamber	Data No	:11
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:VERTICAL
Limit	:FCC PART 15 B (3M)	Engineer	:Bery_Guo
Env./Ins.	:24°C/34%		
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	HDMI 1:1920*1080@60Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	51.340	8.63	1.20	51.48	33.02	40.00	6.98	QP
2	95.960	10.59	1.39	54.80	38.65	43.50	4.85	QP
3	144.460	11.65	1.58	48.38	33.72	43.50	9.78	QP
4	216.240	10.41	1.85	50.12	34.85	46.00	11.15	QP
5	447.100	17.14	2.60	47.23	38.84	46.00	7.16	QP
6	742.950	20.30	3.45	40.46	36.00	46.00	10.00	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

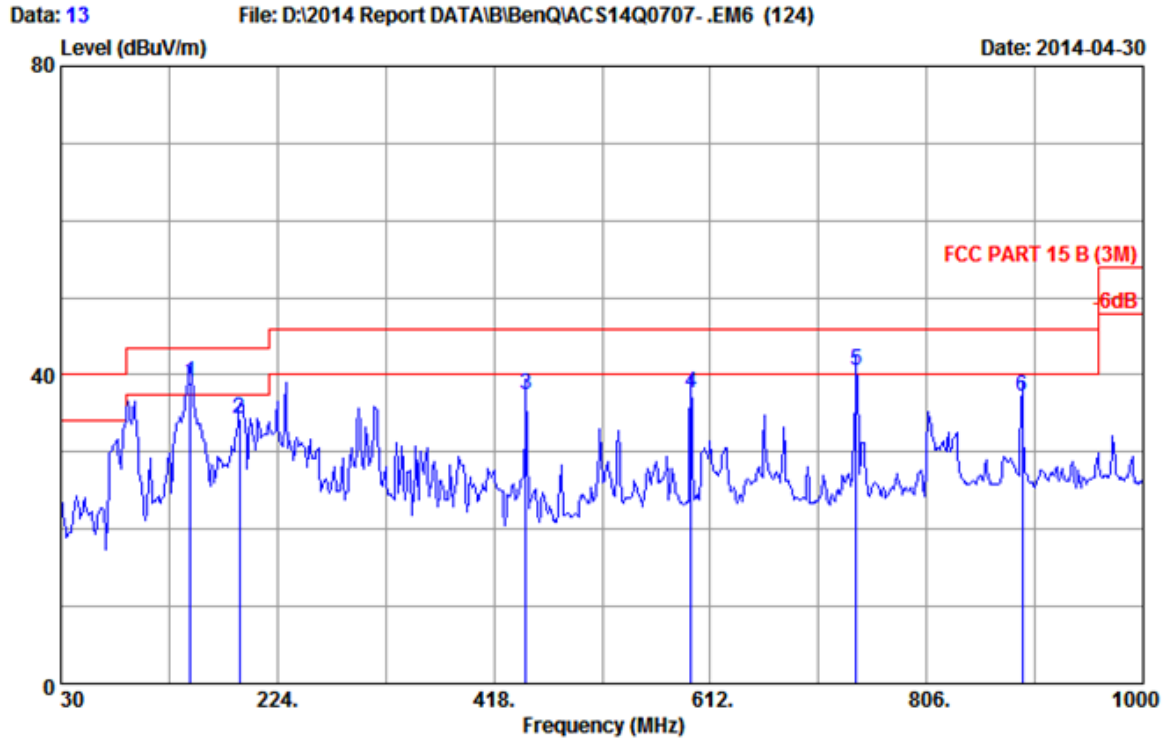

Site no	:3m Chamber	Data No	:13
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	HDMI 2:1920*1080@60Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	146.400	11.48	1.59	25.98	39.05	43.50	4.45	QP
2	190.050	9.70	1.75	22.77	34.22	43.50	9.28	QP
3	447.100	17.14	2.60	17.80	37.54	46.00	8.46	QP
4	594.540	19.09	3.02	15.65	37.76	46.00	8.24	QP
5	742.950	20.30	3.45	16.72	40.47	46.00	5.53	QP
6	891.360	21.57	3.90	11.77	37.24	46.00	8.76	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

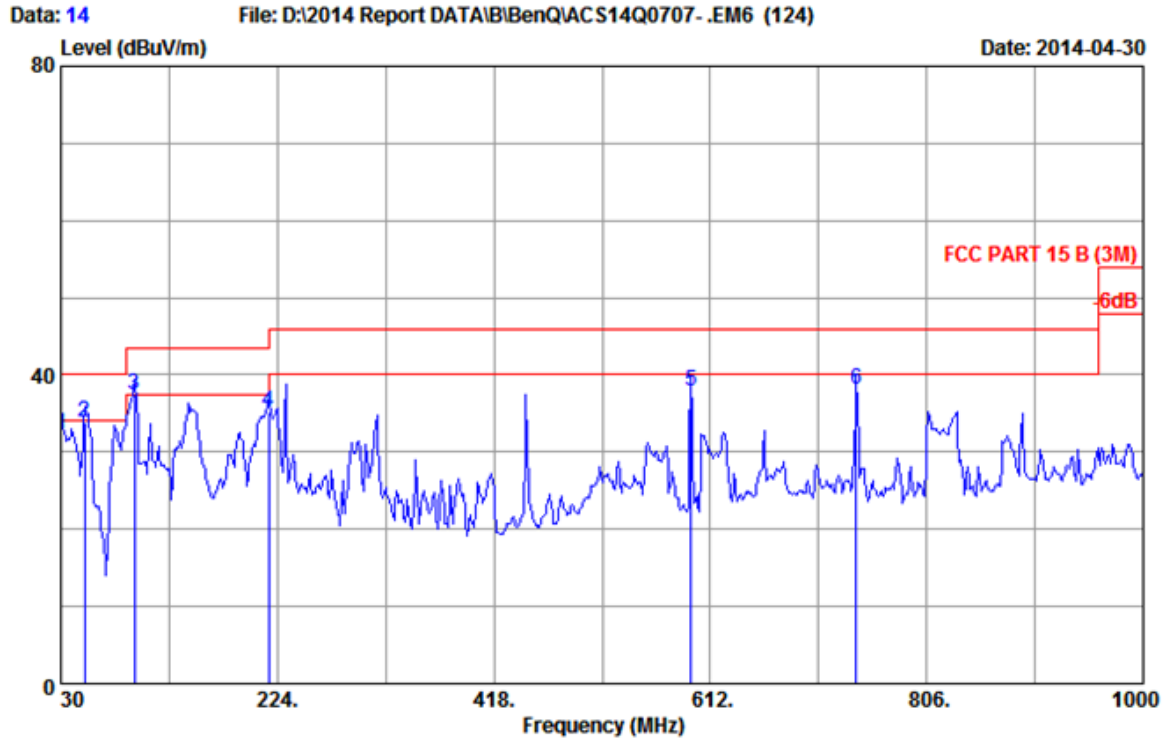


```

Site no      :3m Chamber                      Data No     :14
Dis./Ant.   :3m 2013 CBL6112D 35375        Ant.pol    :VERTICAL
Limit       :FCC PART 15 B (3M)
Env./Ins.   :24*C/34%                       Engineer   :Bery_Guo
EUT         :LCD Monitor M/N:RP700
Power Rating:AC 120V/60Hz
Test Mode   :Running Burnin Test V7.0
             HDMI 2:1920*1080@60Hz
    
```

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	11.35	32.28	40.00	7.72	QP
2	51.340	8.63	1.20	24.06	33.89	40.00	6.11	QP
3	95.960	10.59	1.39	25.40	37.38	43.50	6.12	QP
4	216.240	10.41	1.85	22.95	35.21	46.00	10.79	QP
5	594.540	19.09	3.02	15.68	37.79	46.00	8.21	QP
6	742.950	20.30	3.45	14.34	38.09	46.00	7.91	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

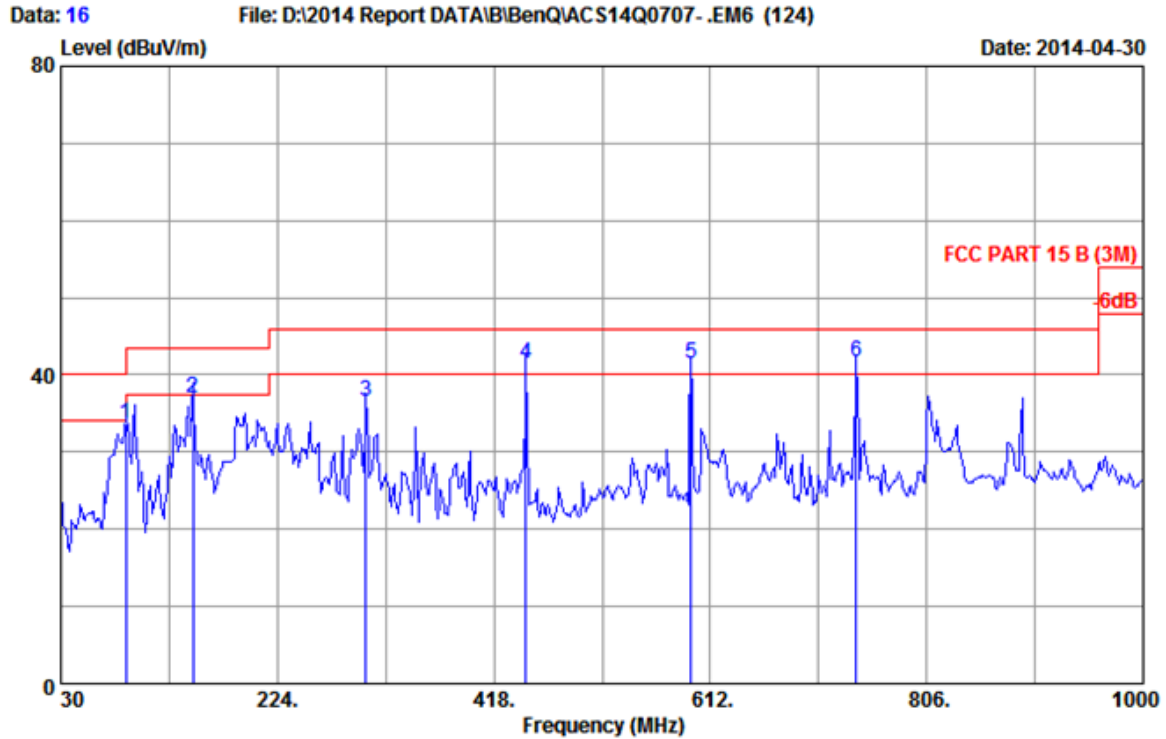

Site no	:3m Chamber	Data No	:16
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)	Engineer	:Bery_Guo
Env./Ins.	:24°C/34%		
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	HDMI 3:1920*1080@60Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	88.200	9.04	1.36	51.33	33.57	43.50	9.93	QP
2	148.340	11.38	1.59	51.91	37.01	43.50	6.49	QP
3	303.540	14.07	2.18	47.56	36.64	46.00	9.36	QP
4	447.100	17.14	2.60	49.92	41.53	46.00	4.47	QP
5	594.540	19.09	3.02	47.80	41.34	46.00	4.66	QP
6	742.950	20.30	3.45	46.03	41.57	46.00	4.43	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

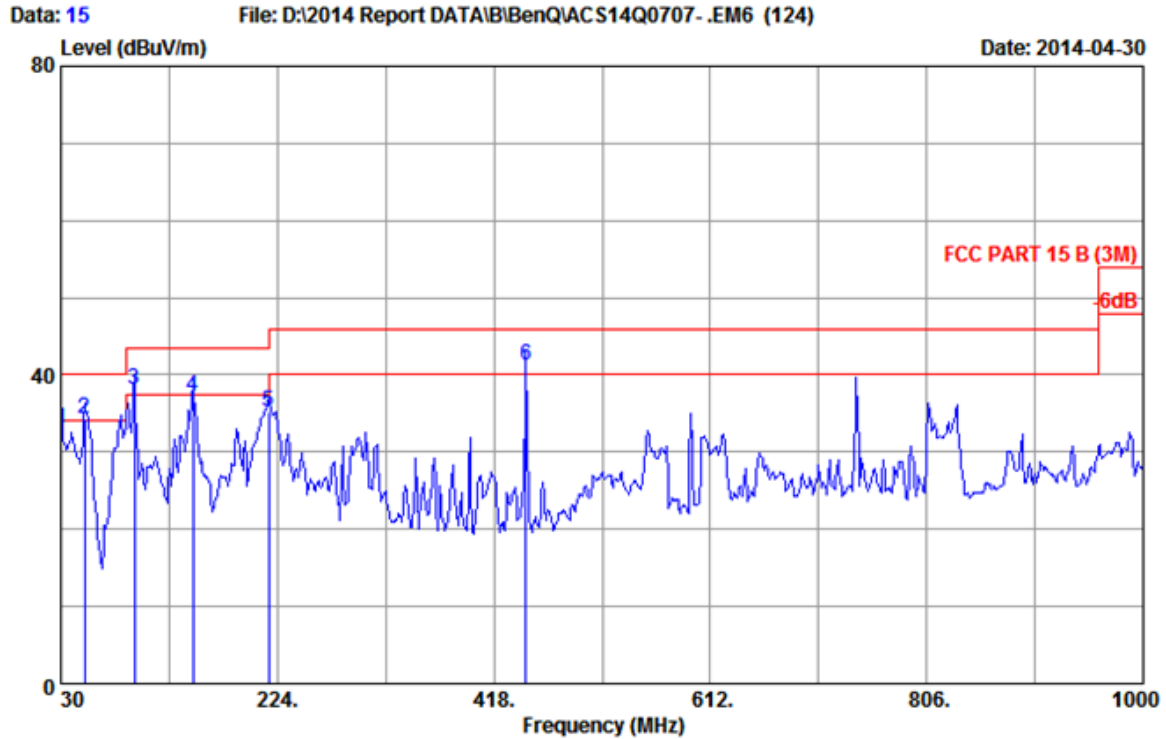

Site no :3m Chamber Data No :15
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.000	20.10	0.83	12.13	33.06	40.00	6.94	QP
2	51.340	8.63	1.20	24.56	34.39	40.00	5.61	QP
3	95.960	10.59	1.39	26.17	38.15	43.50	5.35	QP
4	148.340	11.38	1.59	24.15	37.12	43.50	6.38	QP
5	216.240	10.41	1.85	23.00	35.26	46.00	10.74	QP
6	447.100	17.14	2.60	21.39	41.13	46.00	4.87	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

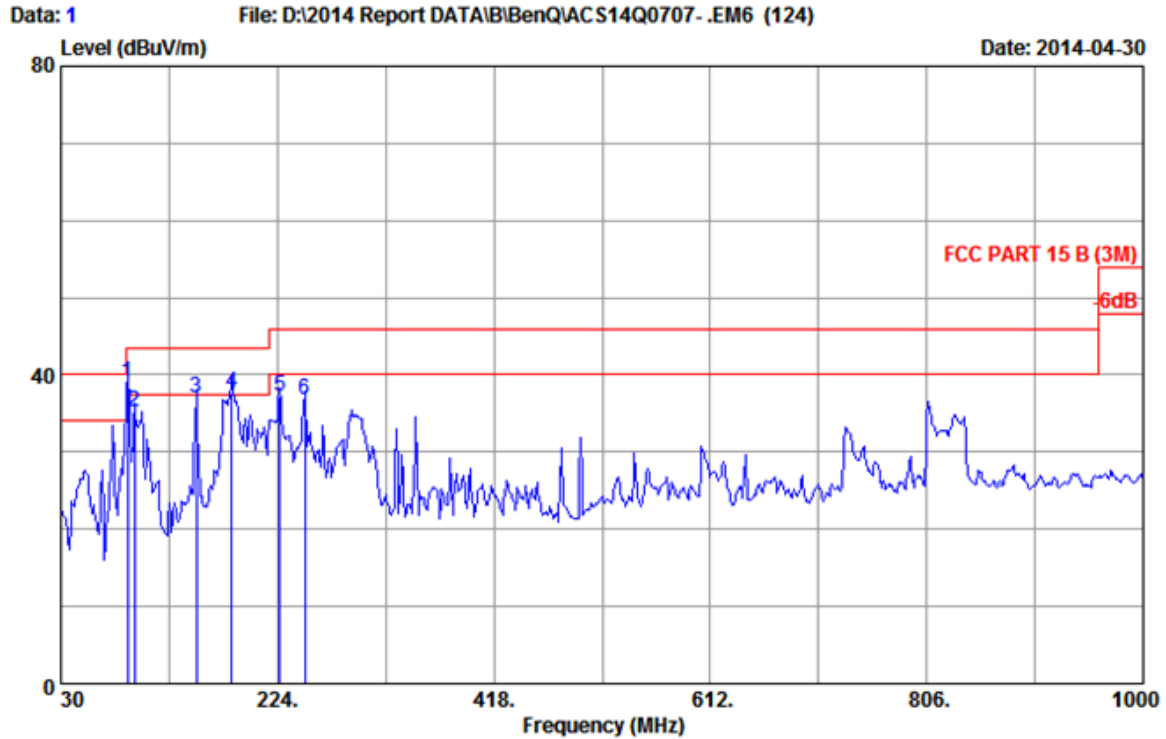

Site no :3m Chamber Data No :1
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	90.140	9.43	1.37	28.27	39.07	43.50	4.43	QP
2	95.960	10.59	1.39	23.32	35.30	43.50	8.20	QP
3	151.250	11.18	1.60	24.23	37.01	43.50	6.49	QP
4	183.260	9.64	1.73	26.31	37.68	43.50	5.82	QP
5	225.940	10.90	1.89	24.48	37.27	46.00	8.73	QP
6	248.250	12.92	1.97	21.90	36.79	46.00	9.21	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

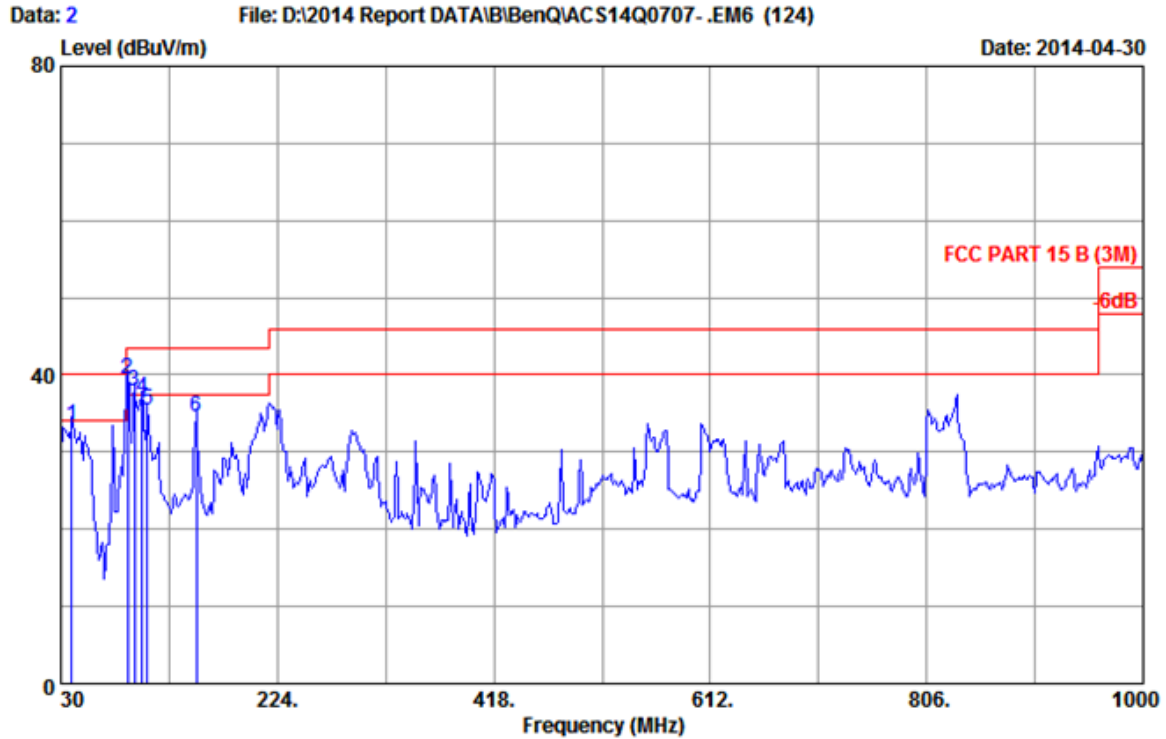

Site no :3m Chamber Data No :2
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	18.22	33.48	40.00	6.52	QP
2	90.140	9.43	1.37	28.68	39.48	43.50	4.02	QP
3	95.960	10.59	1.39	25.95	37.93	43.50	5.57	QP
4	102.750	11.61	1.42	23.89	36.92	43.50	6.58	QP
5	107.600	12.08	1.44	21.86	35.38	43.50	8.12	QP
6	151.250	11.18	1.60	21.77	34.55	43.50	8.95	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

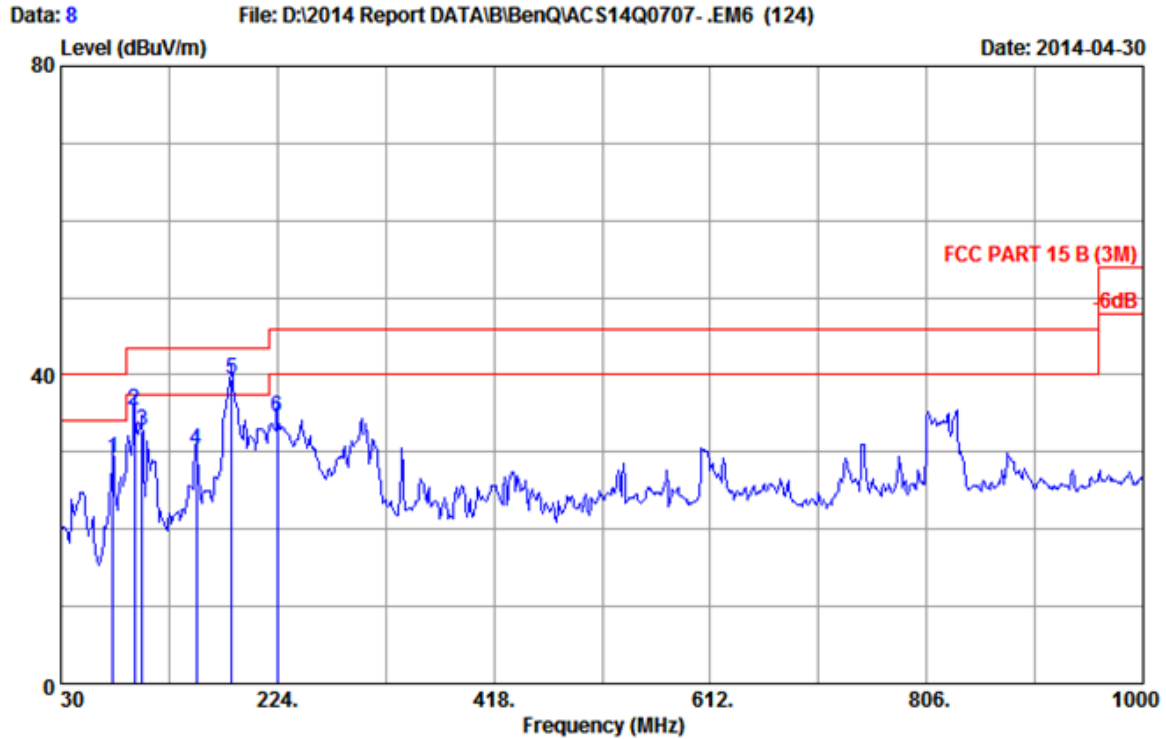

Site no	:3m Chamber	Data No	:8
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	VGA 2:640*480@60Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	76.560	7.26	1.31	20.60	29.17	40.00	10.83	QP
2	95.960	10.59	1.39	23.46	35.44	43.50	8.06	QP
3	102.750	11.61	1.42	19.62	32.65	43.50	10.85	QP
4	151.250	11.18	1.60	17.49	30.27	43.50	13.23	QP
5	183.260	9.64	1.73	28.16	39.53	43.50	3.97	QP
6	224.000	10.80	1.88	21.86	34.54	46.00	11.46	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

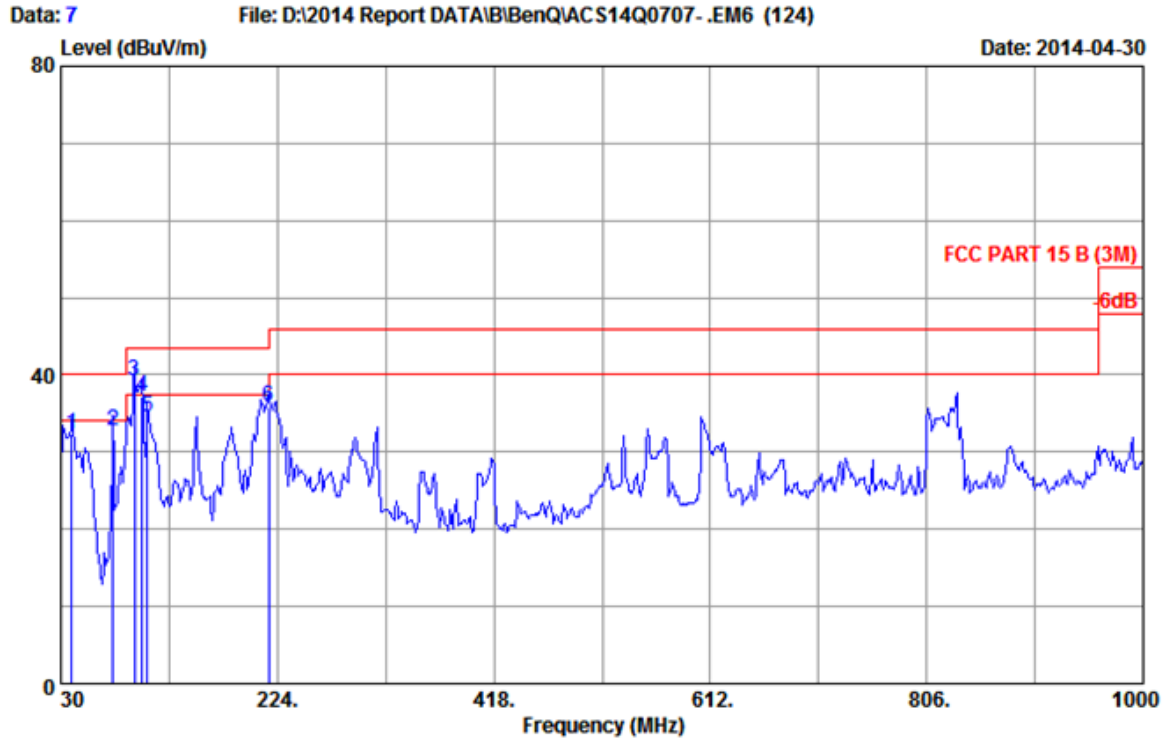

Site no :3m Chamber Data No :7
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 2:640*480@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	16.98	32.24	40.00	7.76	QP
2	76.560	7.26	1.31	24.09	32.66	40.00	7.34	QP
3	95.960	10.59	1.39	27.19	39.17	43.50	4.33	QP
4	102.750	11.61	1.42	24.25	37.28	43.50	6.22	QP
5	107.600	12.08	1.44	21.08	34.60	43.50	8.90	QP
6	216.240	10.41	1.85	23.57	35.83	46.00	10.17	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

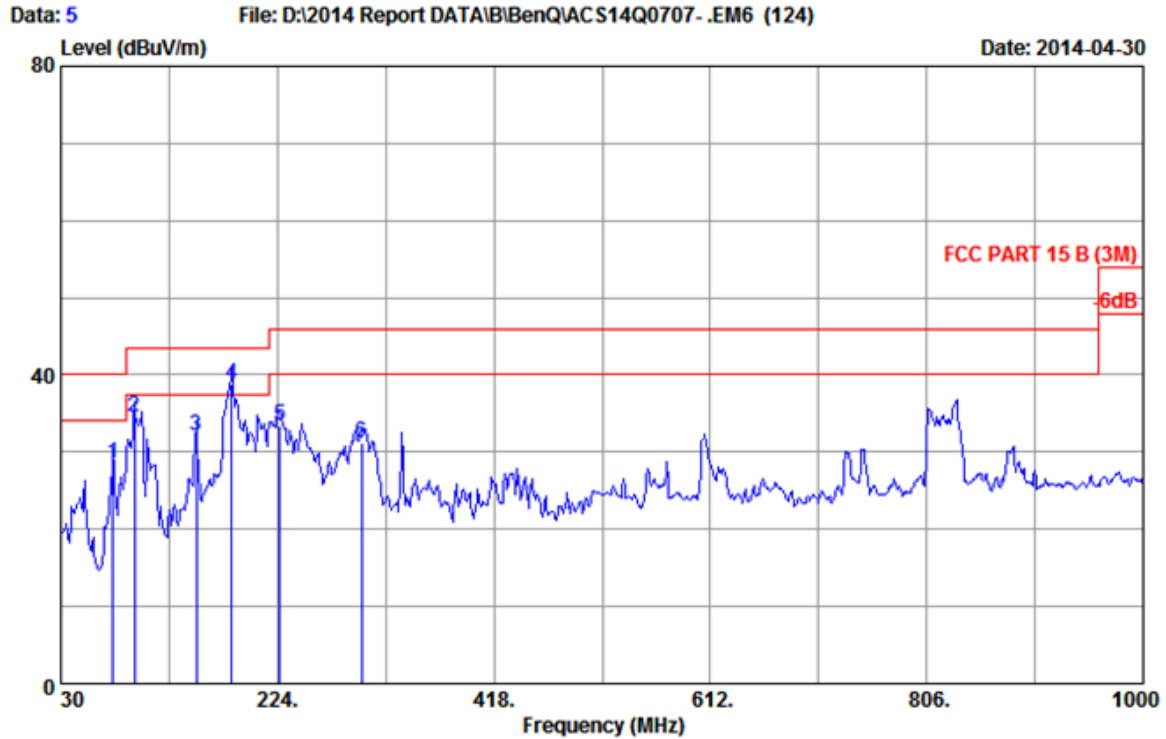

Site no	:3m Chamber	Data No	:5
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	VGA 2:1024*768@75Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	76.560	7.26	1.31	19.92	28.49	40.00	11.51	QP
2	95.960	10.59	1.39	22.48	34.46	43.50	9.04	QP
3	151.250	11.18	1.60	19.21	31.99	43.50	11.51	QP
4	183.260	9.64	1.73	27.41	38.78	43.50	4.72	QP
5	225.940	10.90	1.89	20.74	33.53	46.00	12.47	QP
6	299.660	13.98	2.17	14.99	31.14	46.00	14.86	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

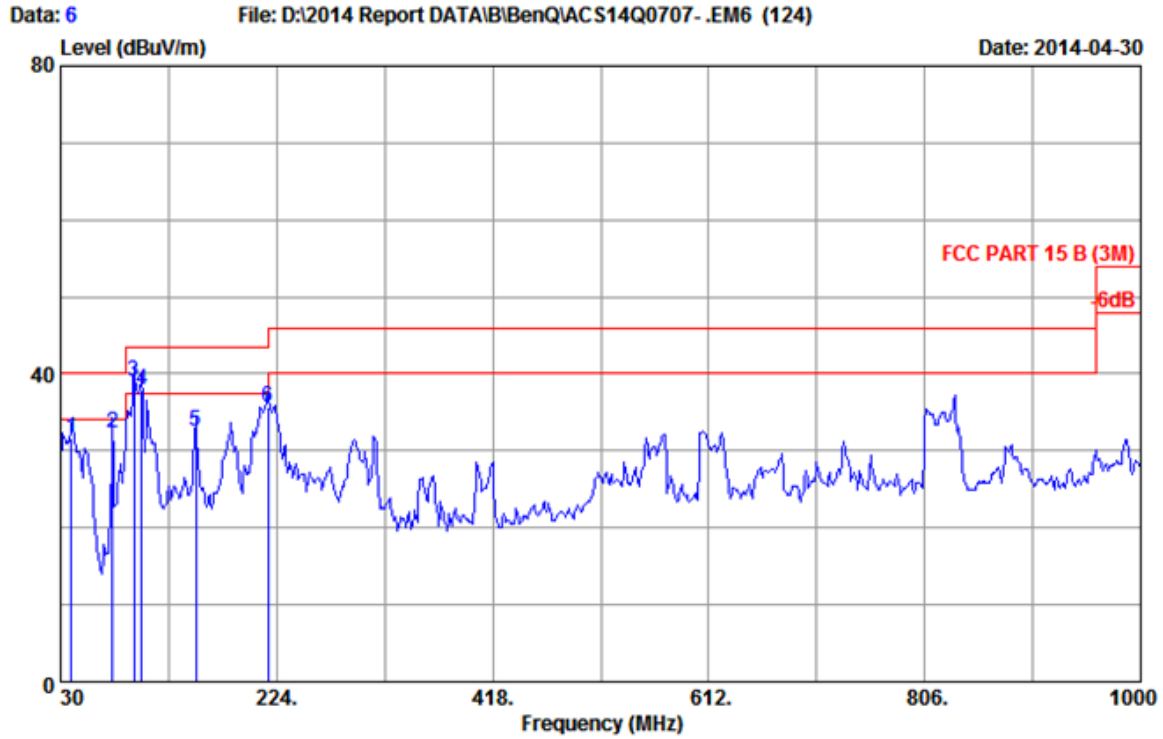


```

Site no      :3m Chamber                      Data No     :6
Dis./Ant.   :3m 2013 CBL6112D 35375        Ant.pol     :VERTICAL
Limit        :FCC PART 15 B (3M)
Env./Ins.   :24*C/34%                      Engineer    :Bery_Guo
EUT          :LCD Monitor M/N:RP700
Power Rating :AC 120V/60Hz
Test Mode    :Running Burnin Test V7.0
              VGA 2:1024*768@75Hz
    
```

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	16.40	31.66	40.00	8.34	QP
2	76.560	7.26	1.31	23.70	32.27	40.00	7.73	QP
3	95.960	10.59	1.39	27.10	39.08	43.50	4.42	QP
4	102.750	11.61	1.42	24.76	37.79	43.50	5.71	QP
5	151.250	11.18	1.60	19.82	32.60	43.50	10.90	QP
6	216.240	10.41	1.85	23.48	35.74	46.00	10.26	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

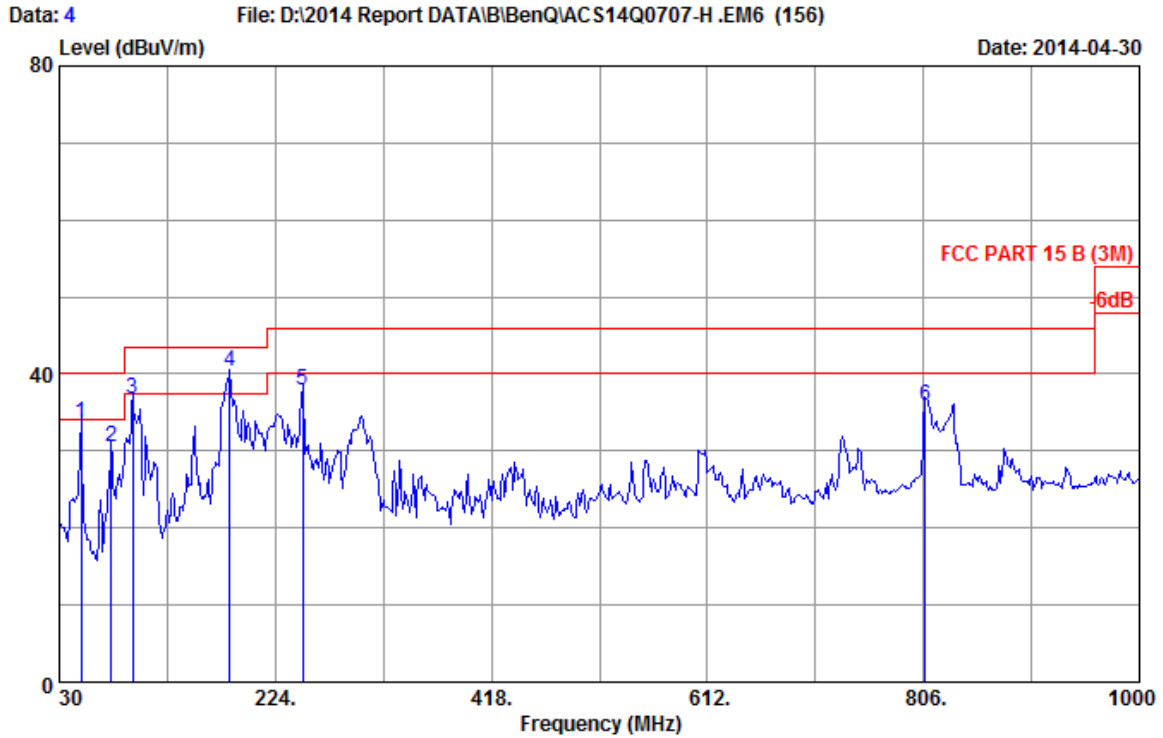


```

Site no       :3m Chamber                               Data No      :4
Dis./Ant.    :3m 2013 CBL6112D 35375                 Ant.pol      :HORIZONTAL
Limit        :FCC PART 15 B (3M)
Env./Ins.    :24*C/34%                               Engineer     :Bery_Guo
EUT          :LCD Monitor M/N:RP700
Power Rating :AC 120V/50Hz
Test Mode    :Running Burnin Test V7.0
              VGA 2:1920*1080@60Hz
    
```

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	49.400	9.34	1.18	23.13	33.65	40.00	6.35	QP
2	76.560	7.26	1.31	21.93	30.50	40.00	9.50	QP
3	95.960	10.59	1.39	24.76	36.74	43.50	6.76	QP
4	183.260	9.64	1.73	28.99	40.36	43.50	3.14	QP
5	248.250	12.92	1.97	22.91	37.80	46.00	8.20	QP
6	807.940	20.80	3.64	11.45	35.89	46.00	10.11	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported
 3. The worst emission was detected at 183.260 MHz with corrected signal level of 40.36 dBuV/m (Limit is 43.50 dBuV/m) when the antenna was at horizontal polarization and at 1.0m high and the turn table was at 75°.
 4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

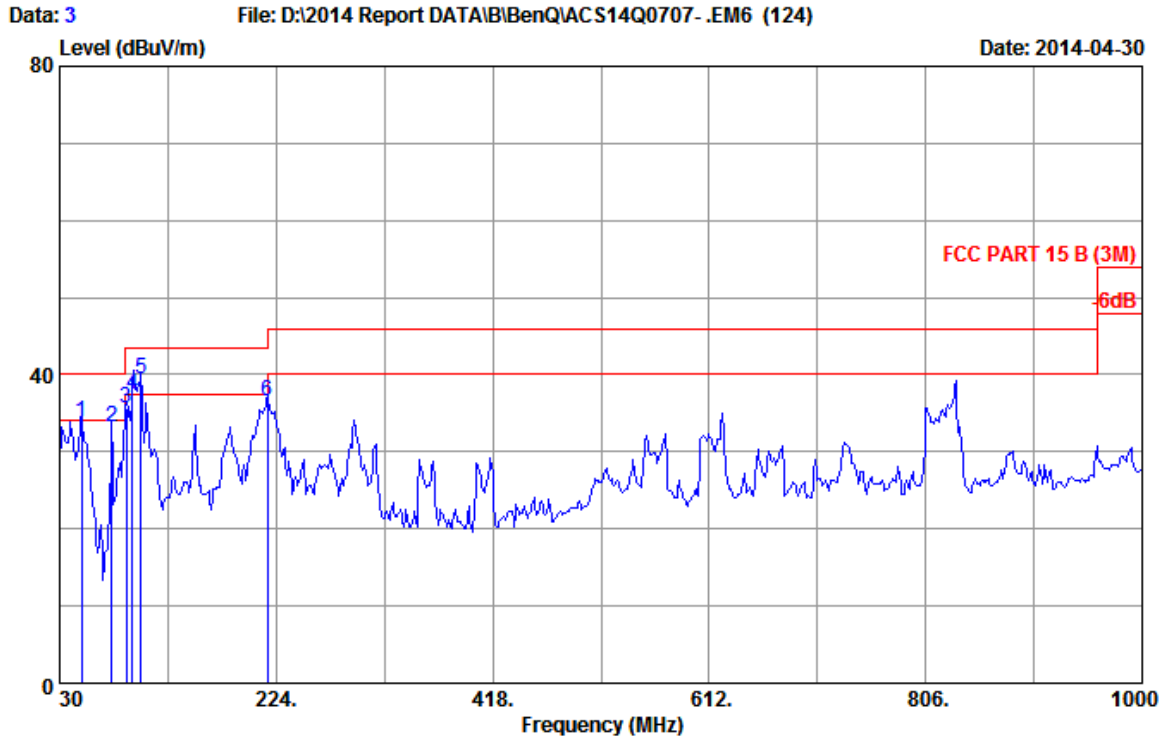

Site no	:3m Chamber	Data No	:3
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:VERTICAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:Running Burnin Test V7.0		
	VGA 2:1920*1080@60Hz		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	49.400	9.34	1.18	23.37	33.89	40.00	6.11	QP
2	76.560	7.26	1.31	24.63	33.20	40.00	6.80	QP
3	90.140	9.43	1.37	24.79	35.59	43.50	7.91	QP
4	94.990	10.40	1.39	25.59	37.38	43.50	6.12	QP
5	102.750	11.61	1.42	26.31	39.34	43.50	4.16	QP
6	216.240	10.41	1.85	24.21	36.47	46.00	9.53	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading+Ant factor.
 2.The emission Levels that are 20db below the official limit are not reported
 3. The worst emission was detected at 102.750 MHz with corrected signal level of 39.34 dBuV/m (Limit is 43.50 dBuV/m) when the antenna was at vertical polarization and at 1.0m high and the turn table was at 235°.
 4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

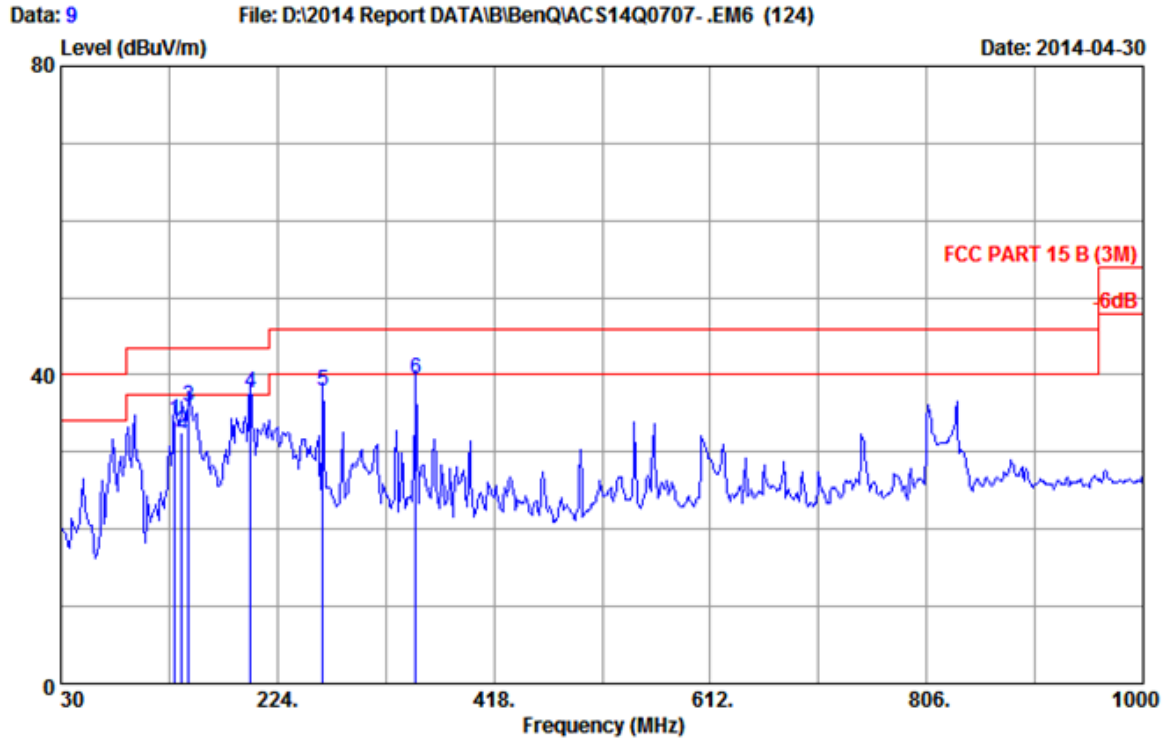


```

Site no      :3m Chamber                      Data No    :9
Dis./Ant.   :3m 2013 CBL6112D 35375         Ant.pol    :HORIZONTAL
Limit       :FCC PART 15 B (3M)
Env./Ins.   :24*C/34%                       Engineer   :Bery_Guo
EUT         :LCD Monitor M/N:RP700
Power Rating:AC 120V/60Hz
Test Mode    :Running Burnin Test V7.0
              VGA 3:1920*1080@60Hz
    
```

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	131.850	12.71	1.53	19.88	34.12	43.50	9.38	QP
2	138.640	12.20	1.56	18.86	32.62	43.50	10.88	QP
3	144.460	11.65	1.58	22.75	35.98	43.50	7.52	QP
4	199.750	10.29	1.79	25.68	37.76	43.50	5.74	QP
5	264.740	13.83	2.04	22.04	37.91	46.00	8.09	QP
6	348.160	15.29	2.31	21.95	39.55	46.00	6.45	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

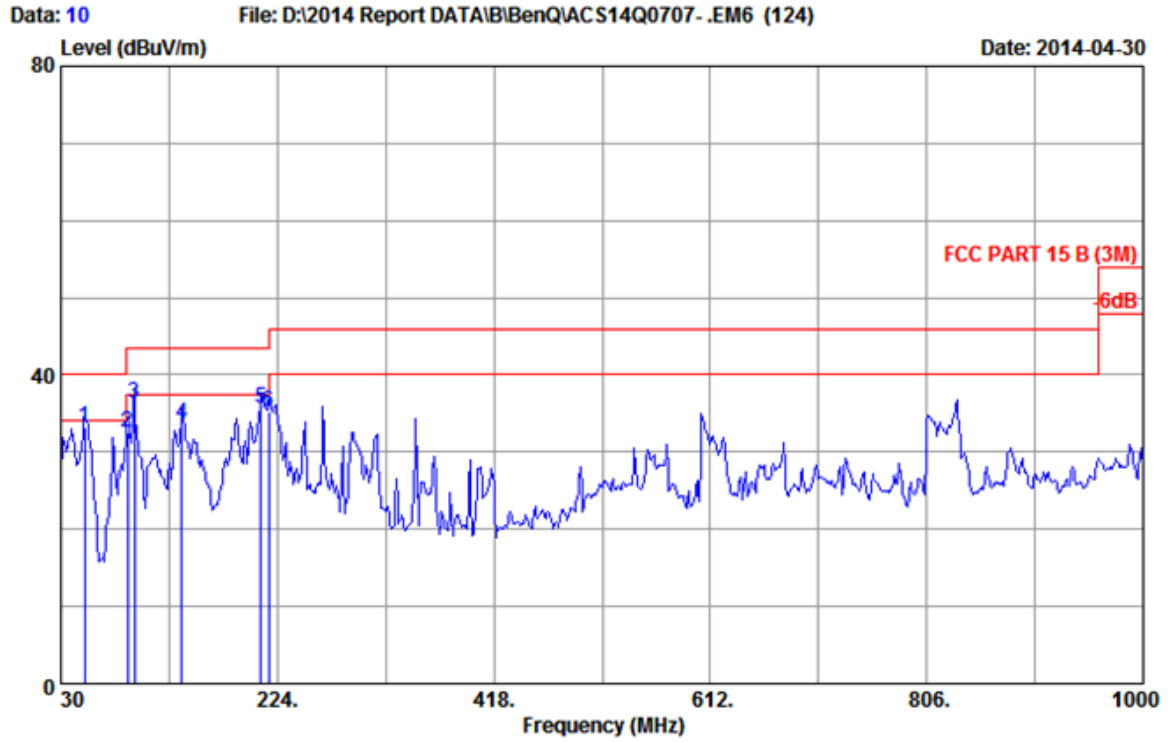


```

Site no      :3m Chamber                      Data No    :10
Dis./Ant.   :3m 2013 CBL6112D 35375         Ant.pol    :VERTICAL
Limit        :FCC PART 15 B (3M)
Env./Ins.   :24*C/34%                       Engineer   :Bery_Guo
EUT          :LCD Monitor M/N:RP700
Power Rating :AC 120V/60Hz
Test Mode    :Running Burnin Test V7.0
              VGA 3:1920*1080@60Hz
    
```

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	51.340	8.63	1.20	23.47	33.30	40.00	6.70	QP
2	90.140	9.43	1.37	21.82	32.62	43.50	10.88	QP
3	95.960	10.59	1.39	24.40	36.38	43.50	7.12	QP
4	138.640	12.20	1.56	19.98	33.74	43.50	9.76	QP
5	209.450	10.63	1.83	23.14	35.60	43.50	7.90	QP
6	216.240	10.41	1.85	22.94	35.20	46.00	10.80	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

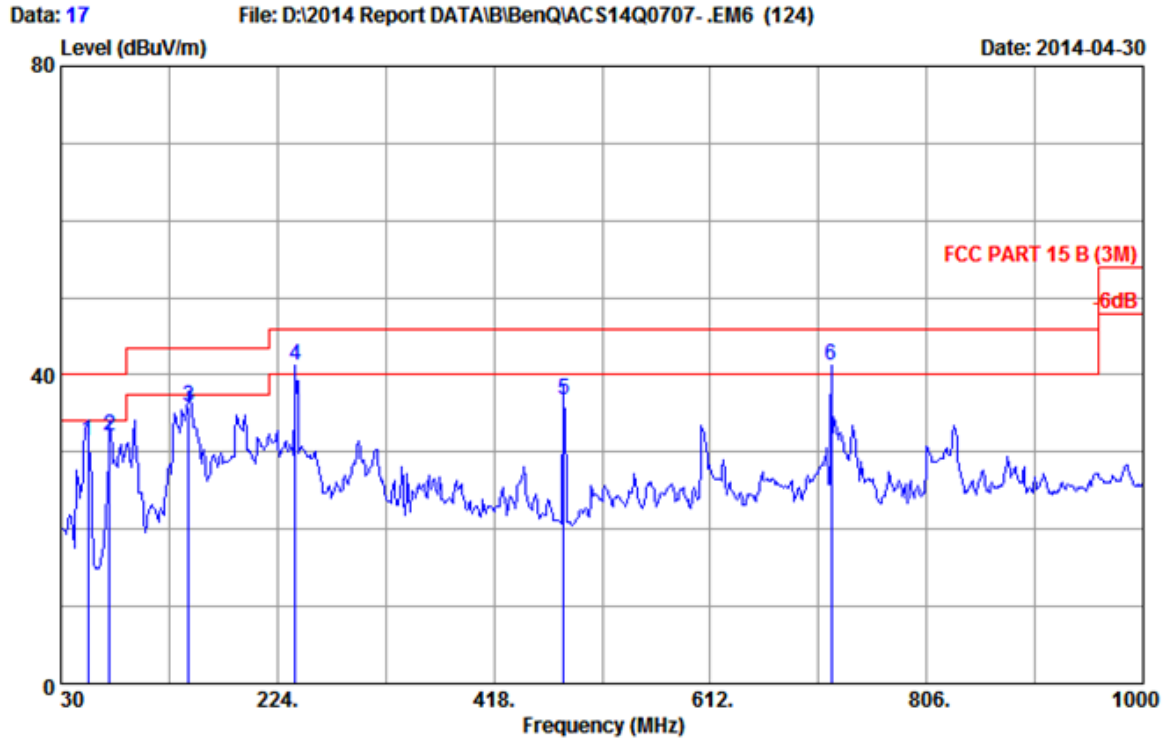

Site no :3m Chamber Data No :17
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :USB Mode
 M-USB 1

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	7.74	1.21	22.53	31.48	40.00	8.52	QP
2	73.650	7.07	1.29	23.77	32.13	40.00	7.87	QP
3	144.460	11.65	1.58	22.75	35.98	43.50	7.52	QP
4	240.490	12.25	1.94	27.11	41.30	46.00	4.70	QP
5	481.050	17.80	2.70	16.17	36.67	46.00	9.33	QP
6	720.640	19.90	3.38	18.00	41.28	46.00	4.72	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

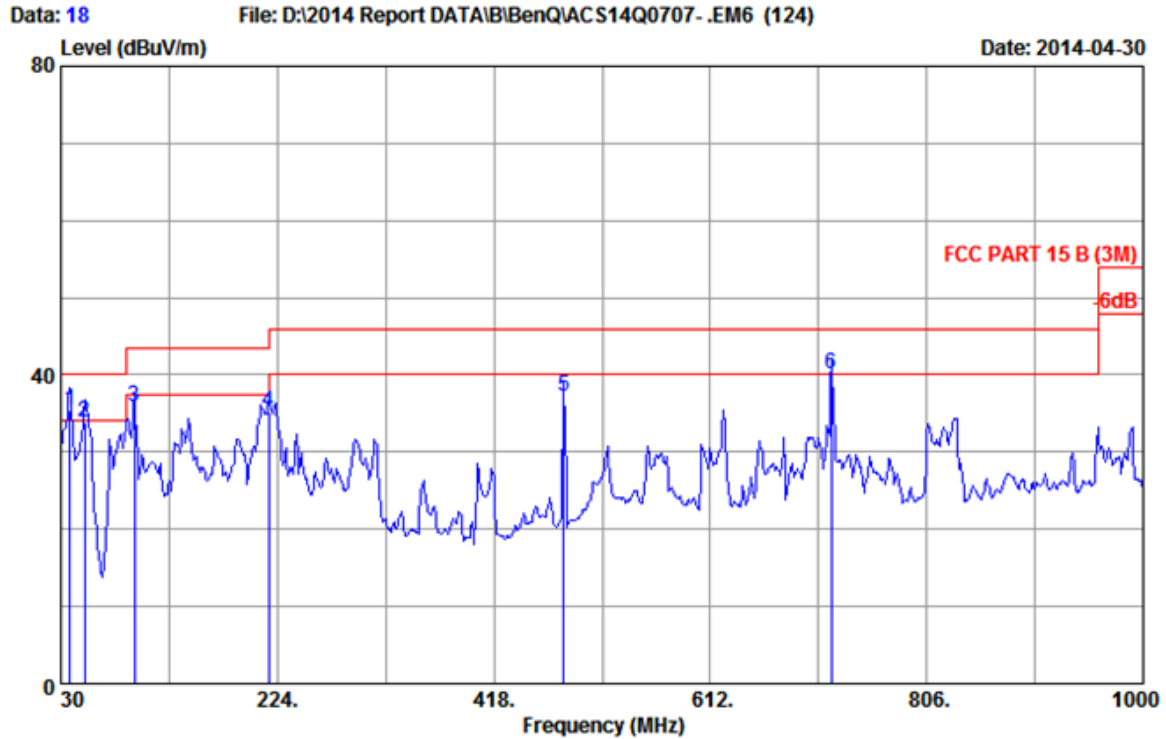

Site no :3m Chamber Data No :18
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :USB Mode
 M-USB 1

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.760	15.34	0.97	19.01	35.32	40.00	4.68	QP
2	51.340	8.63	1.20	23.98	33.81	40.00	6.19	QP
3	95.960	10.59	1.39	23.79	35.77	43.50	7.73	QP
4	216.240	10.41	1.85	22.85	35.11	46.00	10.89	QP
5	481.050	17.80	2.70	16.63	37.13	46.00	8.87	QP
6	720.640	19.90	3.38	16.94	40.22	46.00	5.78	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

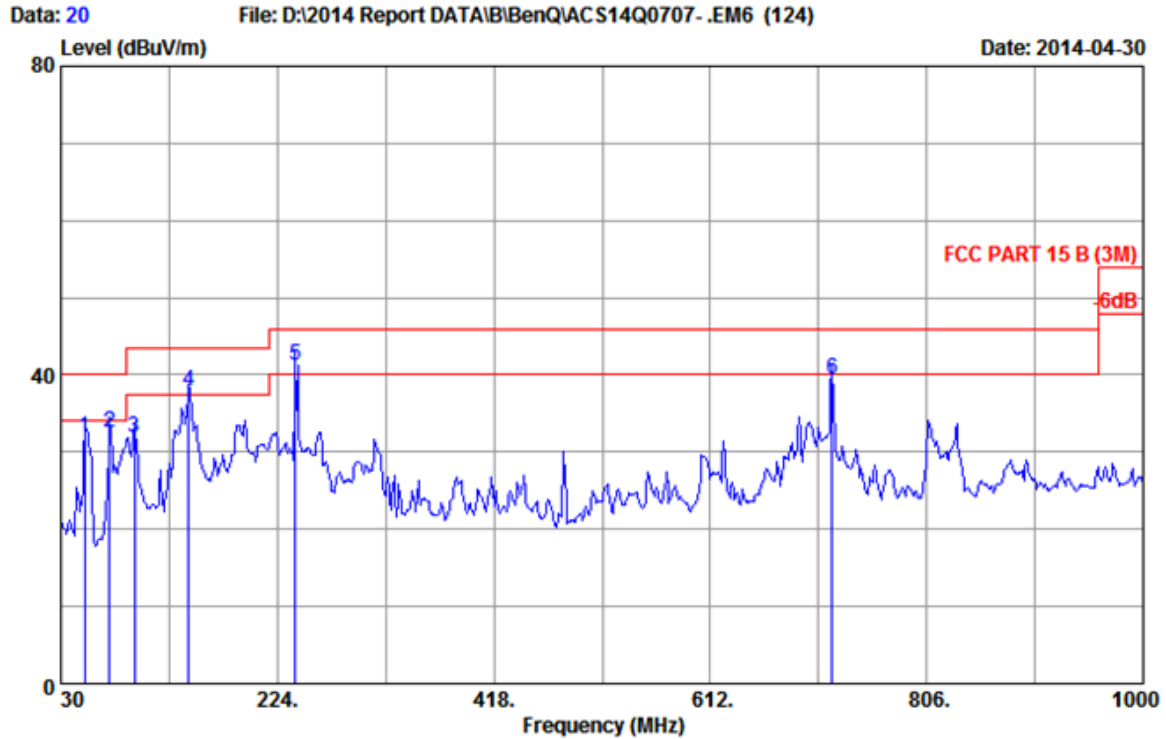

Site no	:3m Chamber	Data No	:20
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:USB Mode		
	M-USB 2		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	51.340	8.63	1.20	21.93	31.76	40.00	8.24	QP
2	73.650	7.07	1.29	24.08	32.44	40.00	7.56	QP
3	95.960	10.59	1.39	19.88	31.86	43.50	11.64	QP
4	144.460	11.65	1.58	24.55	37.78	43.50	5.72	QP
5	240.490	12.25	1.94	27.04	41.23	46.00	4.77	QP
6	721.610	19.90	3.39	16.16	39.45	46.00	6.55	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

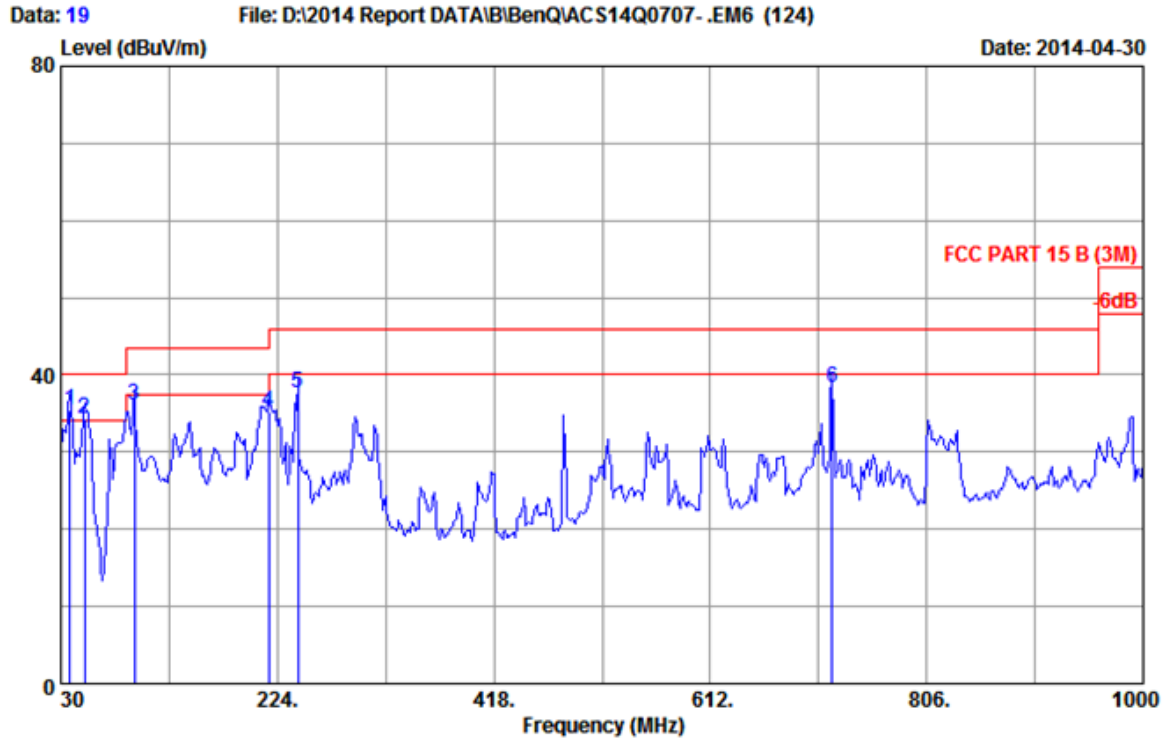

Site no :3m Chamber Data No :19
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :USB Mode
 M-USB 2

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	37.760	15.34	0.97	19.14	35.45	40.00	4.55	QP
2	51.340	8.63	1.20	24.53	34.36	40.00	5.64	QP
3	95.960	10.59	1.39	24.03	36.01	43.50	7.49	QP
4	216.240	10.41	1.85	23.02	35.28	46.00	10.72	QP
5	242.430	12.44	1.95	23.16	37.55	46.00	8.45	QP
6	721.610	19.90	3.39	15.07	38.36	46.00	7.64	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

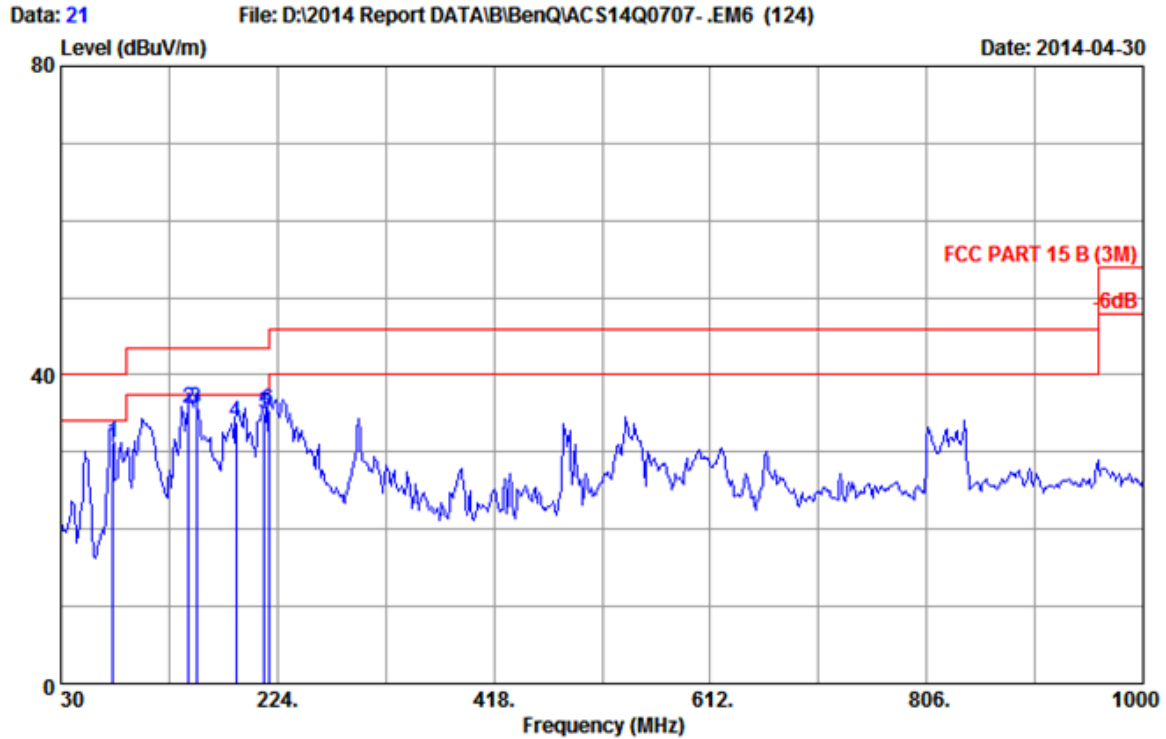

Site no	:3m Chamber	Data No	:21
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:DVD Mode		
	CMP IN		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			Remark
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	76.560	7.26	1.31	22.56	31.13	40.00	8.87	QP
2	144.460	11.65	1.58	22.32	35.55	43.50	7.95	QP
3	151.250	11.18	1.60	22.81	35.59	43.50	7.91	QP
4	187.140	9.60	1.74	22.46	33.80	43.50	9.70	QP
5	212.360	10.40	1.84	22.82	35.06	43.50	8.44	QP
6	216.240	10.41	1.85	23.25	35.51	46.00	10.49	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

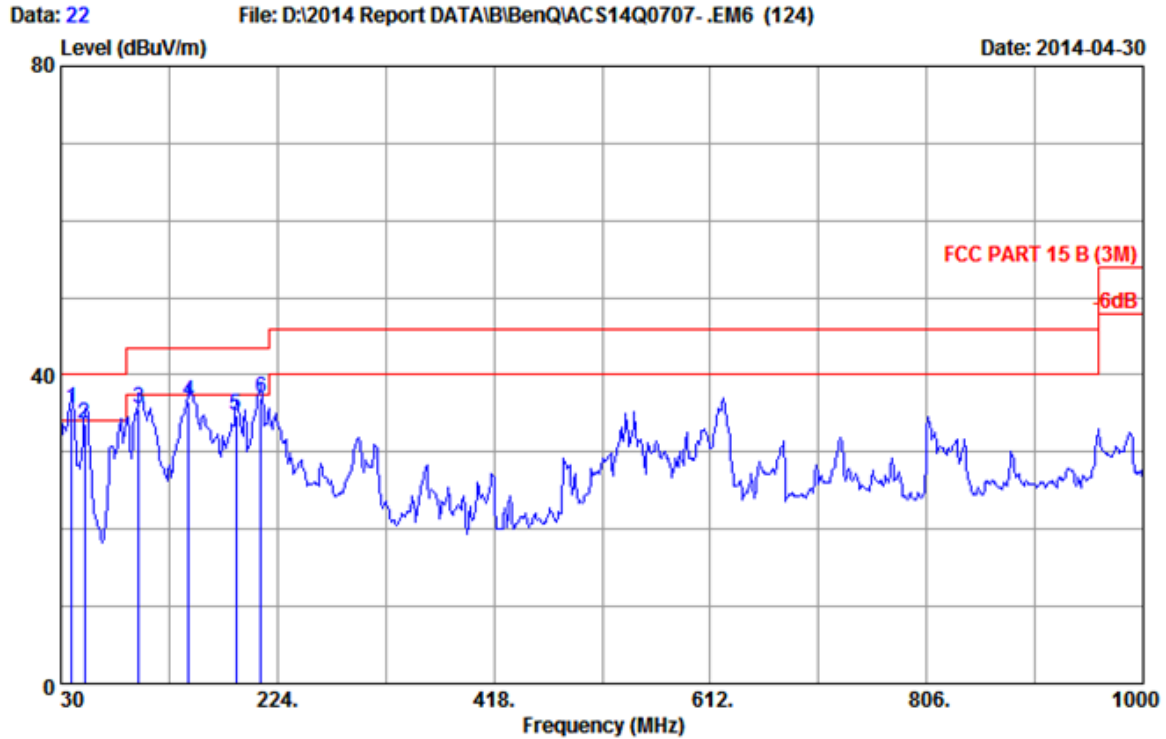

Site no :3m Chamber Data No :22
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :DVD Mode
 CMP IN

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	20.49	35.75	40.00	4.25	QP
2	51.340	8.63	1.20	23.87	33.70	40.00	6.30	QP
3	99.840	11.18	1.41	23.08	35.67	43.50	7.83	QP
4	144.460	11.65	1.58	23.24	36.47	43.50	7.03	QP
5	187.140	9.60	1.74	23.34	34.68	43.50	8.82	QP
6	209.450	10.63	1.83	24.49	36.95	43.50	6.55	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

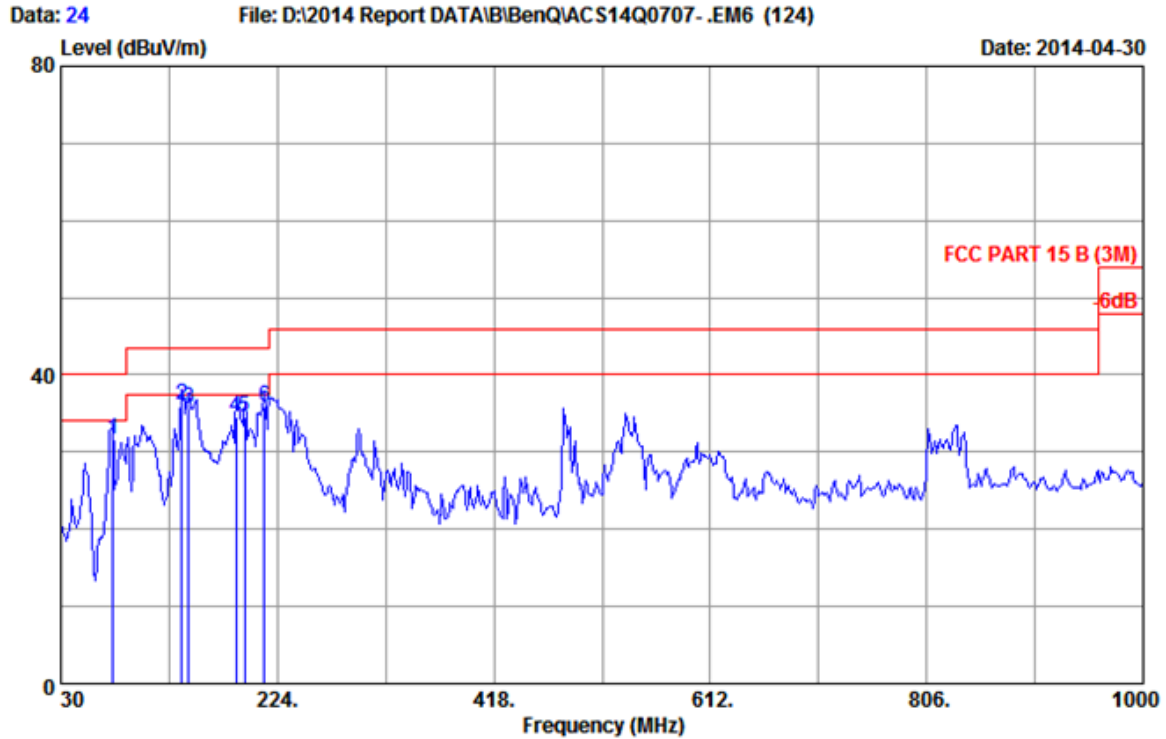

Site no	:3m Chamber	Data No	:24
Dis./Ant.	:3m 2013 CBL6112D 35375	Ant.pol	:HORIZONTAL
Limit	:FCC PART 15 B (3M)		
Env./Ins.	:24°C/34%	Engineer	:Bery_Guo
EUT	:LCD Monitor M/N:RP700		
Power Rating	:AC 120V/60Hz		
Test Mode	:DVD Mode		
	AV IN		

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	76.560	7.26	1.31	22.97	31.54	40.00	8.46	QP
2	138.640	12.20	1.56	22.36	36.12	43.50	7.38	QP
3	144.460	11.65	1.58	22.39	35.62	43.50	7.88	QP
4	187.140	9.60	1.74	23.14	34.48	43.50	9.02	QP
5	194.900	9.89	1.77	22.87	34.53	43.50	8.97	QP
6	212.360	10.40	1.84	23.63	35.87	43.50	7.63	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

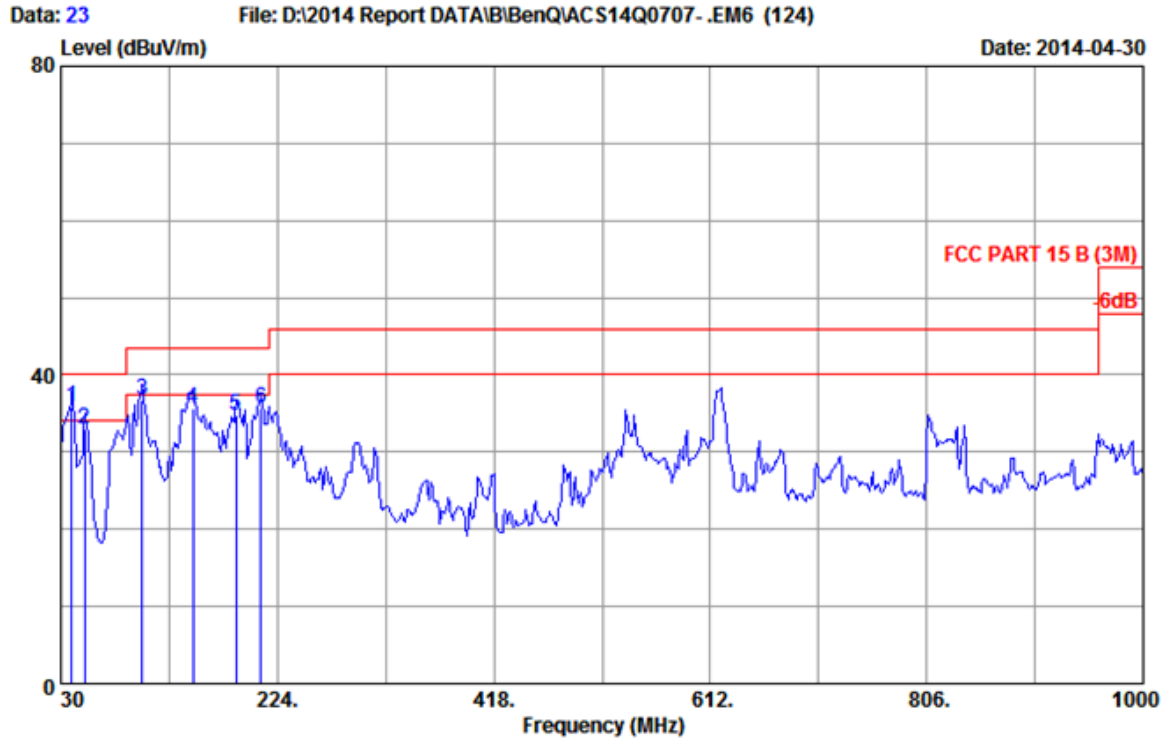

Site no :3m Chamber Data No :23
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :DVD Mode
 AV IN

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	20.61	35.87	40.00	4.13	QP
2	51.340	8.63	1.20	23.16	32.99	40.00	7.01	QP
3	102.750	11.61	1.42	23.75	36.78	43.50	6.72	QP
4	148.340	11.38	1.59	22.79	35.76	43.50	7.74	QP
5	187.140	9.60	1.74	23.38	34.72	43.50	8.78	QP
6	209.450	10.63	1.83	23.09	35.55	43.50	7.95	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

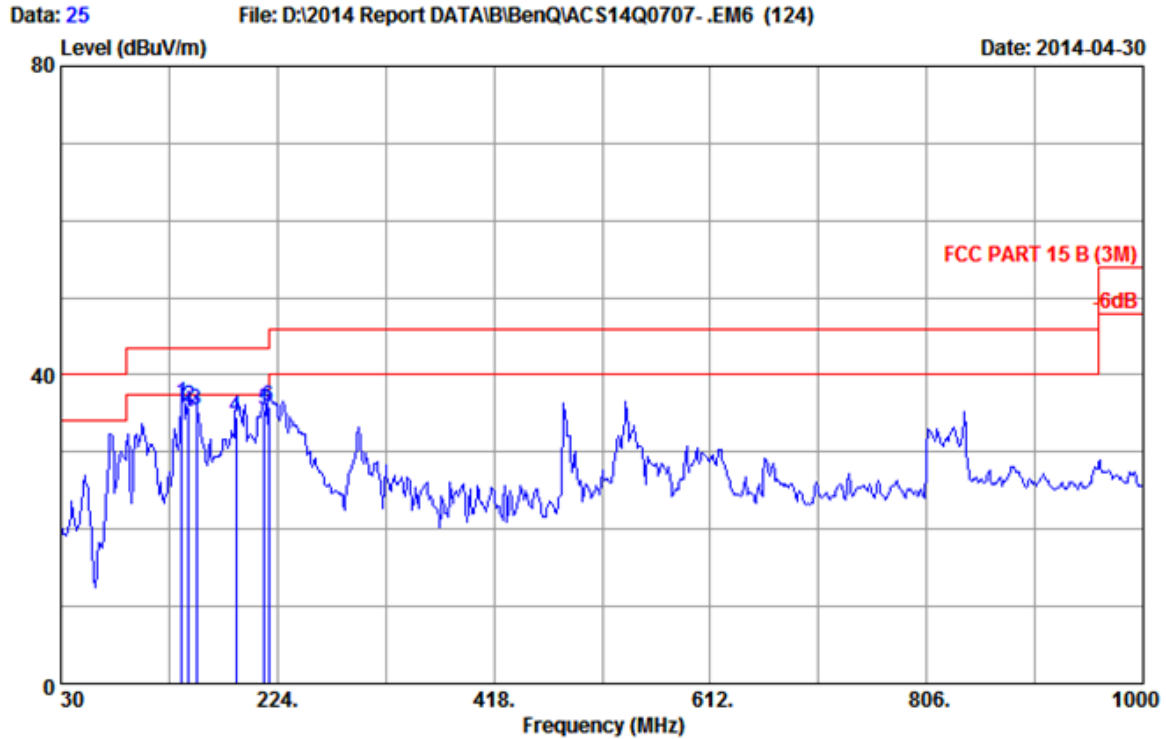

Site no :3m Chamber Data No :25
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :DVD Mode
 S-VEDIO IN

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	138.640	12.20	1.56	22.64	36.40	43.50	7.10	QP
2	144.460	11.65	1.58	22.57	35.80	43.50	7.70	QP
3	151.250	11.18	1.60	22.67	35.45	43.50	8.05	QP
4	187.140	9.60	1.74	23.29	34.63	43.50	8.87	QP
5	212.360	10.40	1.84	23.13	35.37	43.50	8.13	QP
6	216.240	10.41	1.85	23.62	35.88	46.00	10.12	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

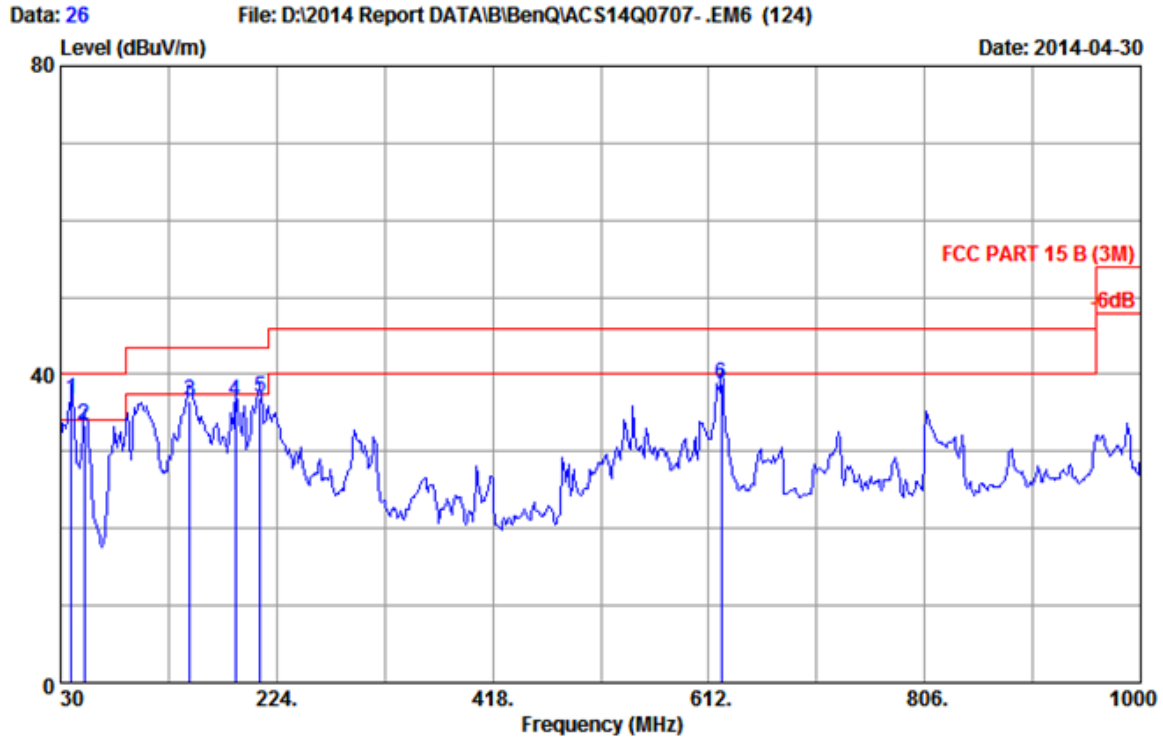


Site no :3m Chamber Data No :26
 Dis./Ant. :3m 2013 CBL6112D 35375 Ant.pol :VERTICAL
 Limit :FCC PART 15 B (3M)
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :DVD Mode
 S-VEDIO IN

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	14.26	1.00	21.51	36.77	40.00	3.23	QP
2	51.340	8.63	1.20	23.61	33.44	40.00	6.56	QP
3	146.400	11.48	1.59	23.53	36.60	43.50	6.90	QP
4	187.140	9.60	1.74	25.10	36.44	43.50	7.06	QP
5	209.450	10.63	1.83	24.44	36.90	43.50	6.60	QP
6	623.640	19.45	3.10	16.25	38.80	46.00	7.20	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported


1~16GHz

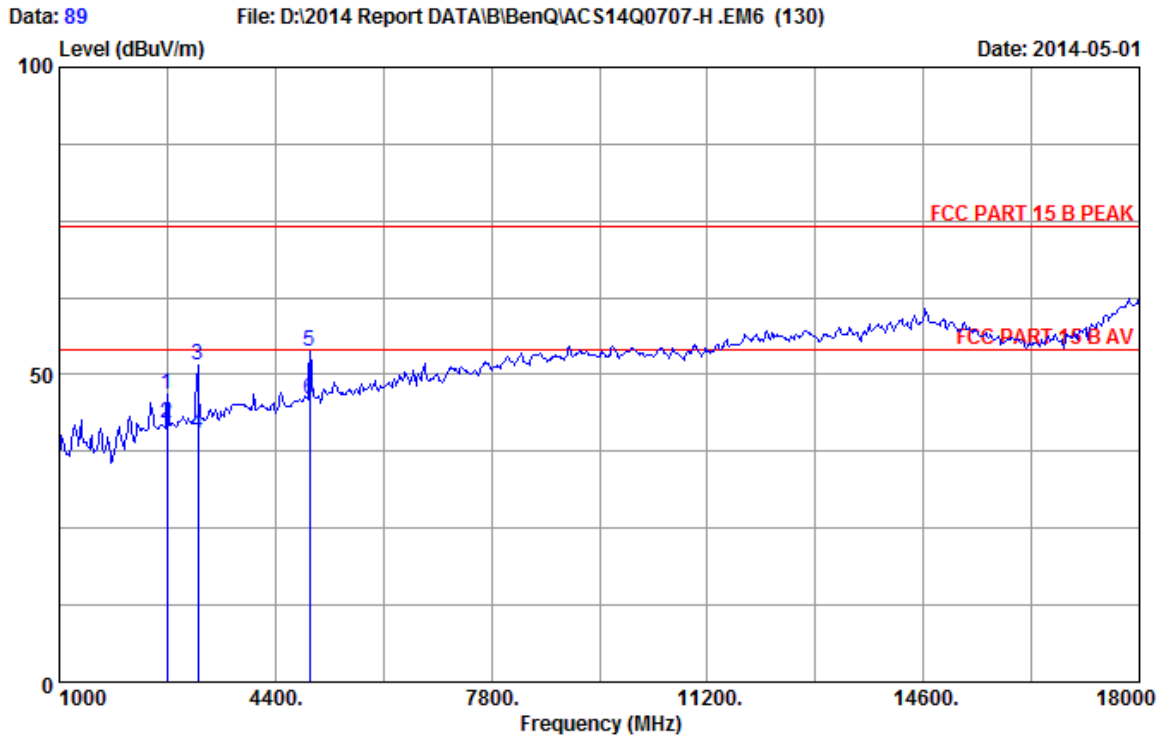

Site no :10m Chamber Data No :89
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24°C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2700.000	28.06	2.93	34.69	50.49	46.79	74.00	27.21	Peak
2	2700.568	28.06	2.93	34.69	45.66	41.96	54.00	12.04	Average
3	3176.000	29.60	3.17	34.62	53.35	51.50	74.00	22.50	Peak
4	3176.235	29.60	3.17	34.62	42.13	40.28	54.00	13.72	Average
5	4944.000	32.83	4.20	34.64	51.29	53.68	74.00	20.32	Peak
6	4944.867	32.83	4.20	34.64	43.61	46.00	54.00	8.00	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

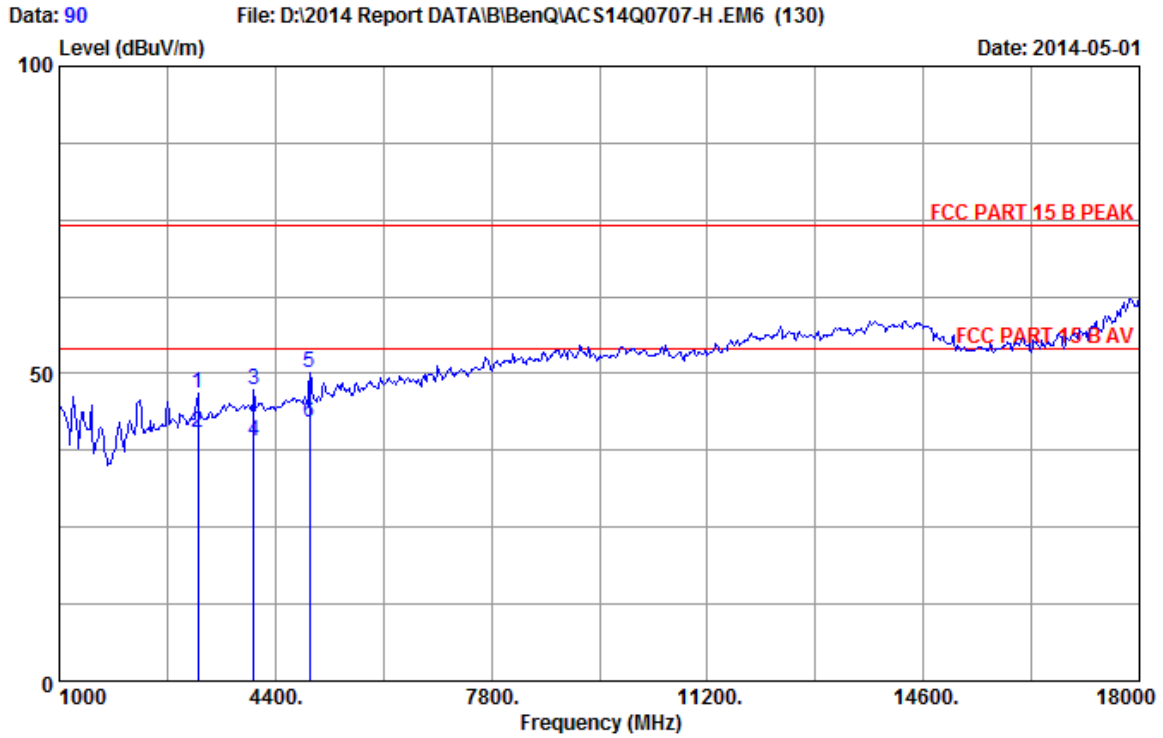

Site no :10m Chamber Data No :90
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :VERTICAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	3176.000	29.60	3.17	34.62	48.53	46.68	74.00	27.32	Peak
2	3176.569	29.61	3.17	34.62	42.15	40.31	54.00	13.69	Average
3	4060.000	32.12	3.87	34.51	45.89	47.37	74.00	26.63	Peak
4	4060.825	32.12	3.87	34.51	37.53	39.01	54.00	14.99	Average
5	4944.000	32.83	4.20	34.64	47.74	50.13	74.00	23.87	Peak
6	4944.968	32.83	4.20	34.64	39.65	42.04	54.00	11.96	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

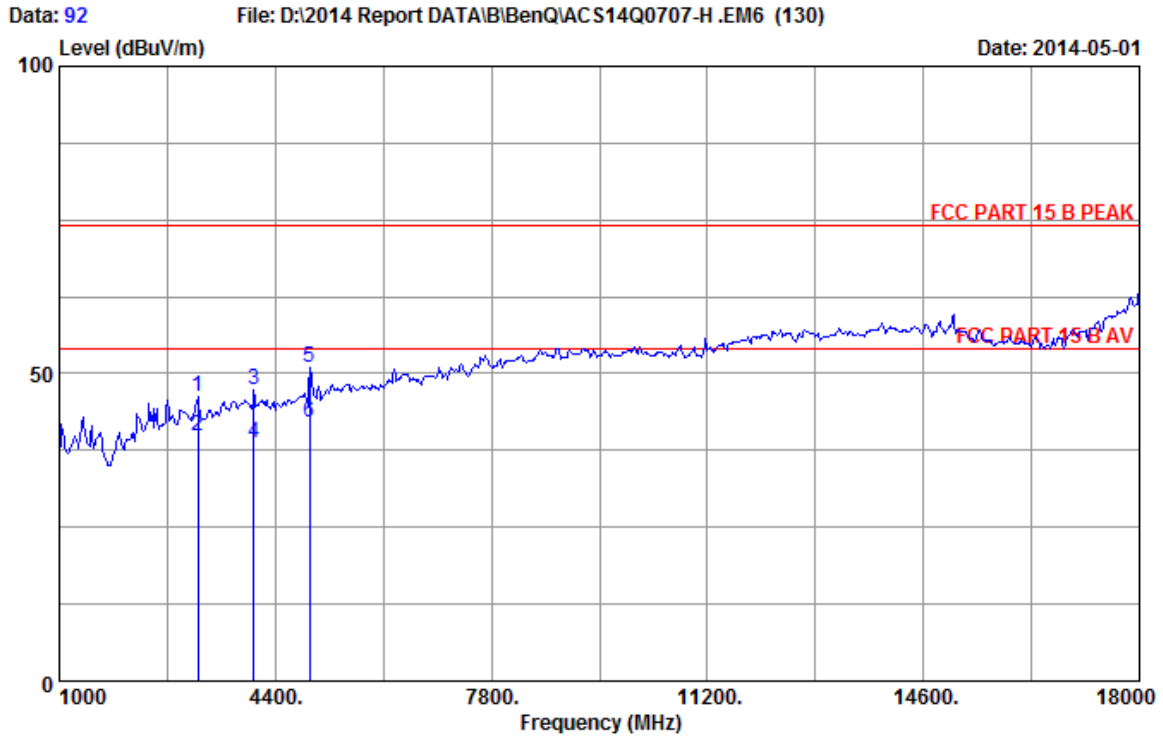

Site no :10m Chamber Data No :92
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	3176.000	29.60	3.17	34.62	48.01	46.16	74.00	27.84	Peak
2	3176.569	29.61	3.17	34.62	41.66	39.82	54.00	14.18	Average
3	4060.000	32.12	3.87	34.51	45.90	47.38	74.00	26.62	Peak
4	4060.836	32.12	3.87	34.51	37.33	38.81	54.00	15.19	Average
5	4944.000	32.83	4.20	34.64	48.68	51.07	74.00	22.93	Peak
6	4944.326	32.83	4.20	34.64	39.62	42.01	54.00	11.99	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

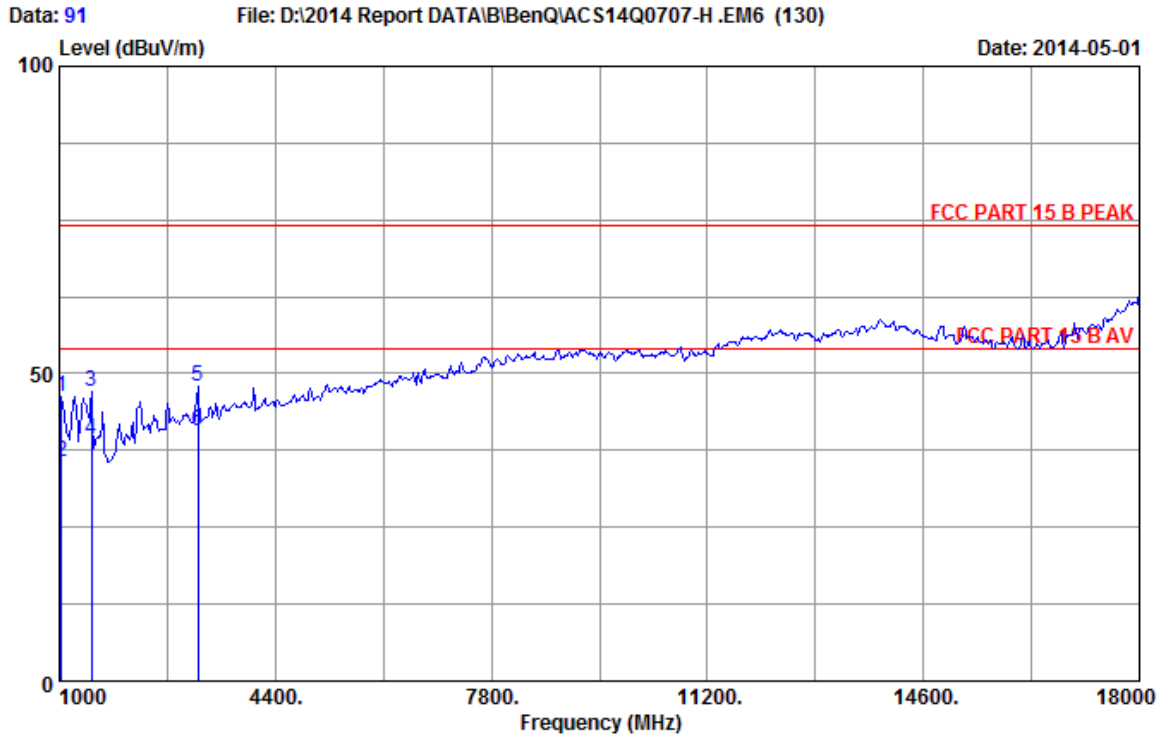

Site no :10m Chamber Data No :91
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :VERTICAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1034.000	23.55	1.48	36.25	57.37	46.15	74.00	27.85	Peak
2	1034.265	23.55	1.48	36.25	46.85	35.63	54.00	18.37	Average
3	1510.000	25.61	1.87	35.53	55.15	47.10	74.00	26.90	Peak
4	1510.859	25.61	1.87	35.53	47.21	39.16	54.00	14.84	Average
5	3176.000	29.60	3.17	34.62	49.72	47.87	74.00	26.13	Peak
6	3176.825	29.61	3.17	34.62	42.60	40.76	54.00	13.24	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

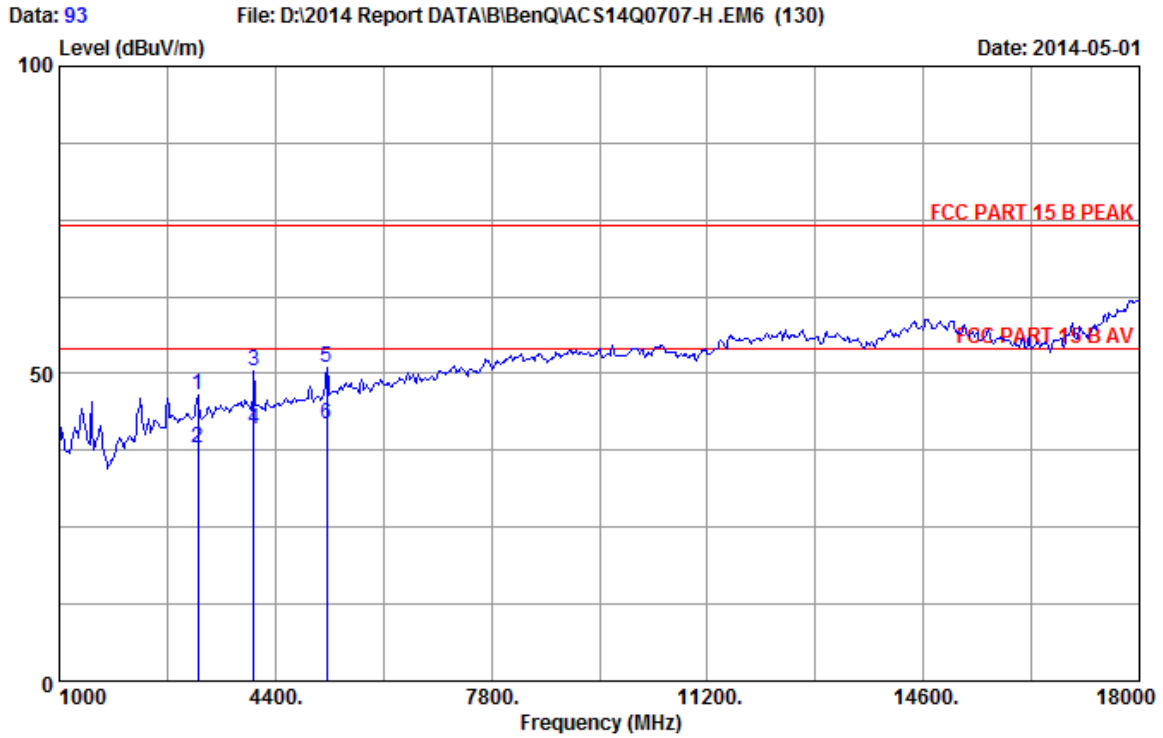

Site no :10m Chamber Data No :93
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	3176.000	29.60	3.17	34.62	48.33	46.48	74.00	27.52	Peak
2	3176.568	29.61	3.17	34.62	39.61	37.77	54.00	16.23	Average
3	4060.000	32.12	3.87	34.51	48.93	50.41	74.00	23.59	Peak
4	4060.857	32.12	3.87	34.51	39.47	40.95	54.00	13.05	Average
5	5216.000	33.38	4.40	34.68	47.90	51.00	74.00	23.00	Peak
6	5216.178	33.38	4.40	34.68	38.63	41.73	54.00	12.27	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

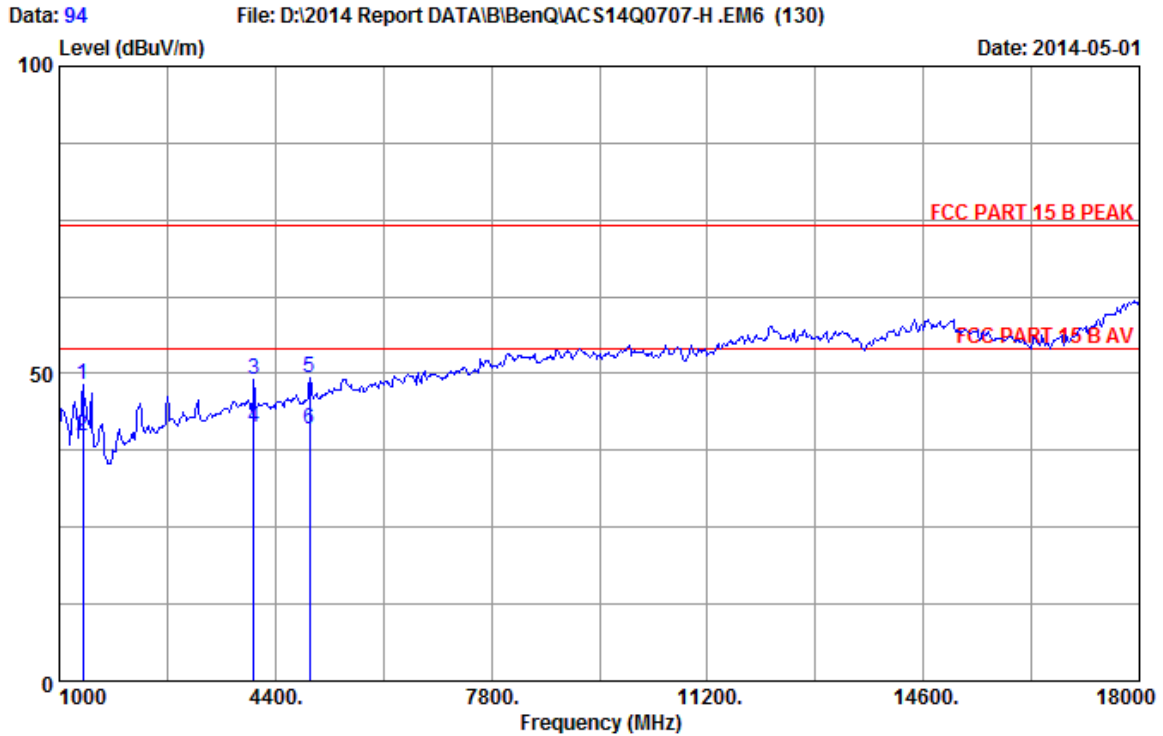

Site no :10m Chamber Data No :94
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :VERTICAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1374.000	25.05	1.76	35.74	57.18	48.25	74.00	25.75	Peak
2	1374.569	25.05	1.76	35.74	48.67	39.74	54.00	14.26	Average
3	4060.000	32.12	3.87	34.51	47.66	49.14	74.00	24.86	Peak
4	4060.826	32.12	3.87	34.51	39.65	41.13	54.00	12.87	Average
5	4944.000	32.83	4.20	34.64	46.93	49.32	74.00	24.68	Peak
6	4944.956	32.83	4.20	34.64	38.62	41.01	54.00	12.99	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

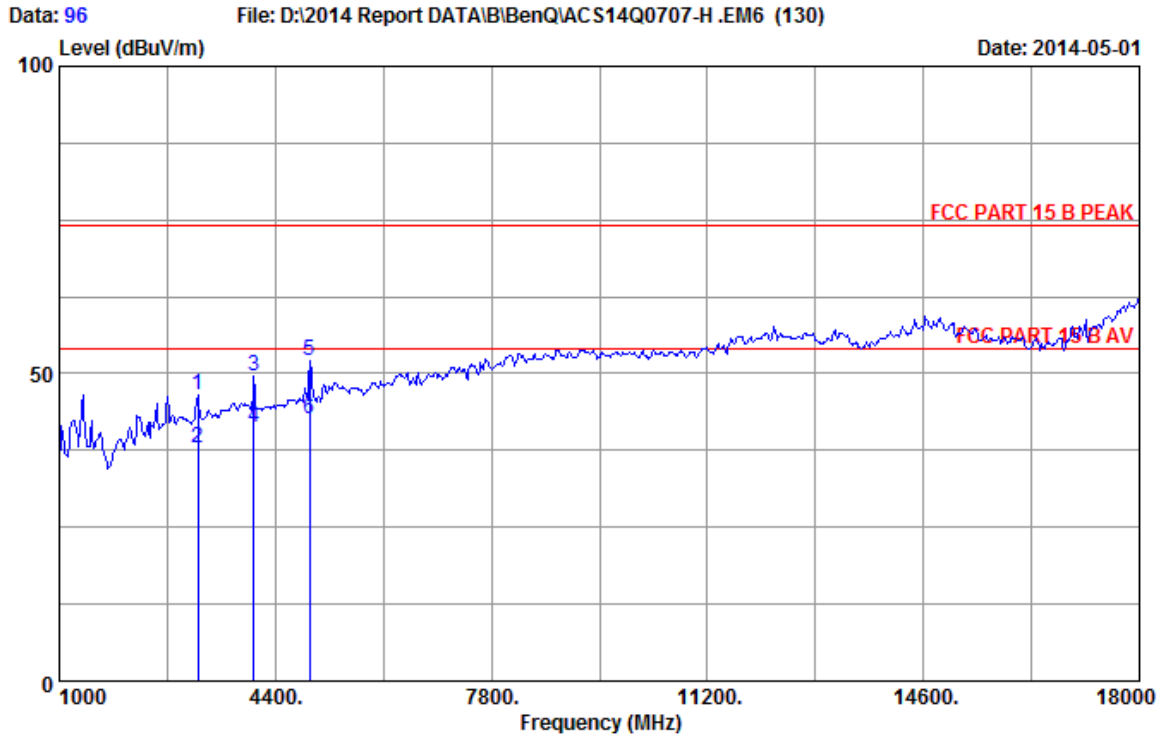

Site no :10m Chamber Data No :96
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	3176.000	29.60	3.17	34.62	48.48	46.63	74.00	27.37	Peak
2	3176.569	29.61	3.17	34.62	39.66	37.82	54.00	16.18	Average
3	4060.000	32.12	3.87	34.51	48.07	49.55	74.00	24.45	Peak
4	4060.867	32.12	3.87	34.51	39.65	41.13	54.00	12.87	Average
5	4944.000	32.83	4.20	34.64	49.64	52.03	74.00	21.97	Peak
6	4944.327	32.83	4.20	34.64	40.21	42.60	54.00	11.40	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

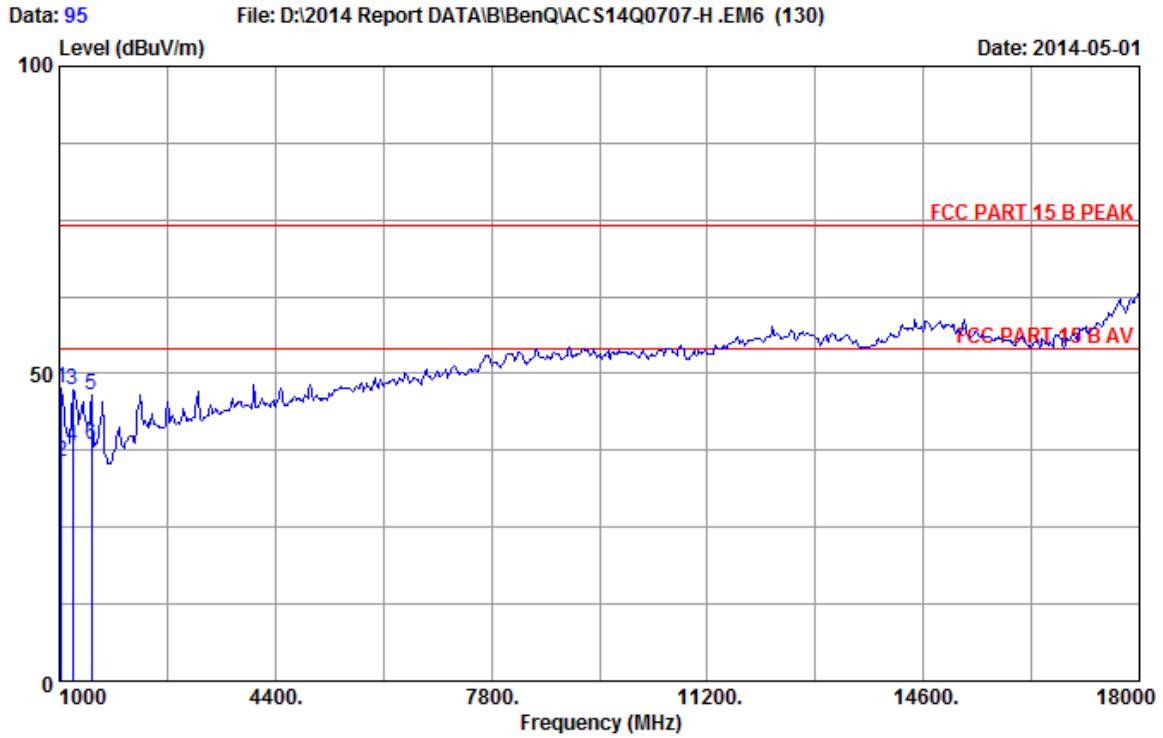

Site no :10m Chamber Data No :95
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :VERTICAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1034.000	23.55	1.48	36.25	58.97	47.75	74.00	26.25	Peak
2	1034.569	23.55	1.48	36.25	46.85	35.63	54.00	18.37	Average
3	1204.000	24.30	1.62	35.99	57.53	47.46	74.00	26.54	Peak
4	1204.286	24.30	1.62	35.99	48.20	38.13	54.00	15.87	Average
5	1510.000	25.61	1.87	35.53	54.67	46.62	74.00	27.38	Peak
6	1510.326	25.61	1.87	35.53	46.57	38.52	54.00	15.48	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

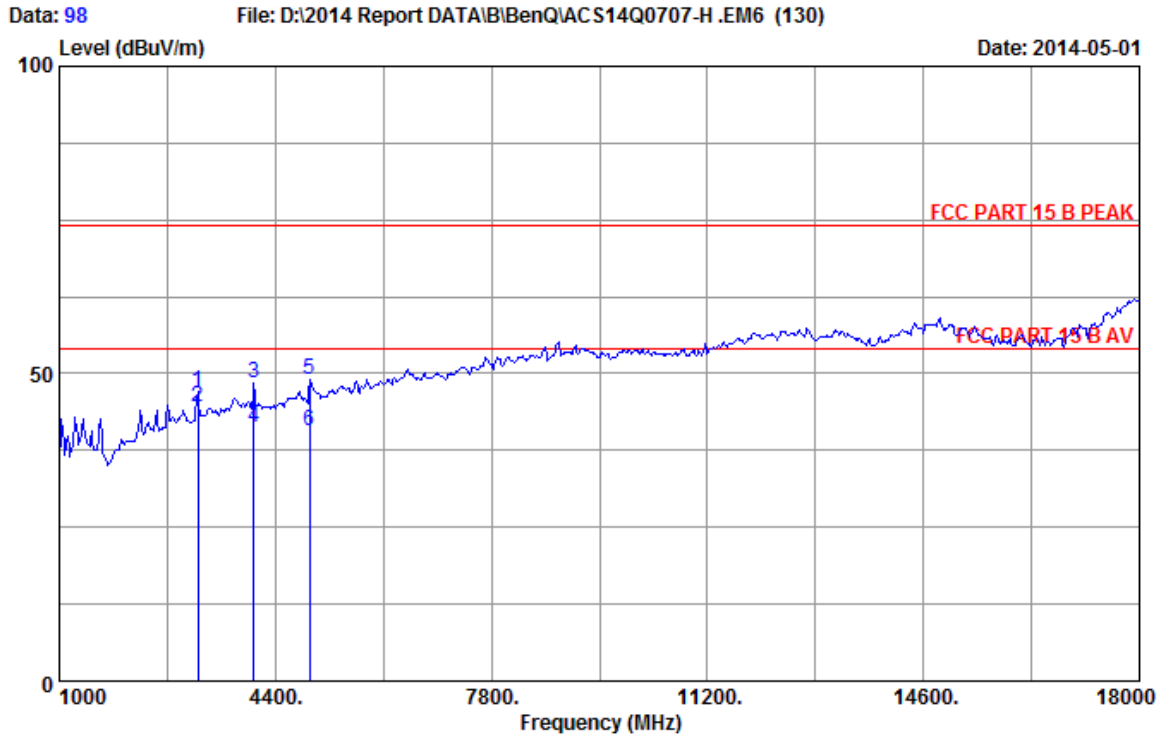

Site no :10m Chamber Data No :98
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	3176.000	29.60	3.17	34.62	48.86	47.01	74.00	26.99	Peak
2	3176.269	29.61	3.17	34.62	46.37	44.53	54.00	9.47	Average
3	4060.000	32.12	3.87	34.51	46.94	48.42	74.00	25.58	Peak
4	4060.722	32.12	3.87	34.51	39.62	41.10	54.00	12.90	Average
5	4944.000	32.83	4.20	34.64	46.71	49.10	74.00	24.90	Peak
6	4944.754	32.83	4.20	34.64	38.29	40.68	54.00	13.32	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

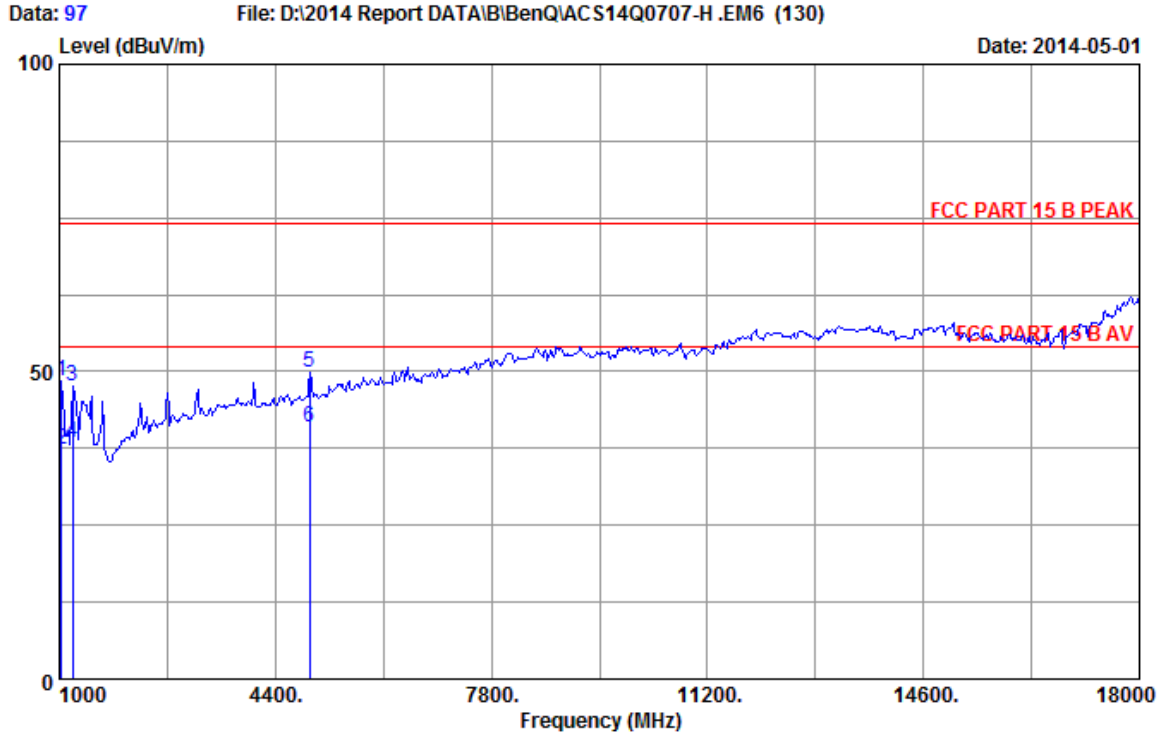

Site no :10m Chamber Data No :97
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :VERTICAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1034.000	23.55	1.48	36.25	59.76	48.54	74.00	25.46	Peak
2	1034.569	23.55	1.48	36.25	48.67	37.45	54.00	16.55	Average
3	1204.000	24.30	1.62	35.99	57.84	47.77	74.00	26.23	Peak
4	1204.236	24.30	1.62	35.99	48.61	38.54	54.00	15.46	Average
5	4944.000	32.83	4.20	34.64	47.59	49.98	74.00	24.02	Peak
6	4944.741	32.83	4.20	34.64	38.62	41.01	54.00	12.99	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

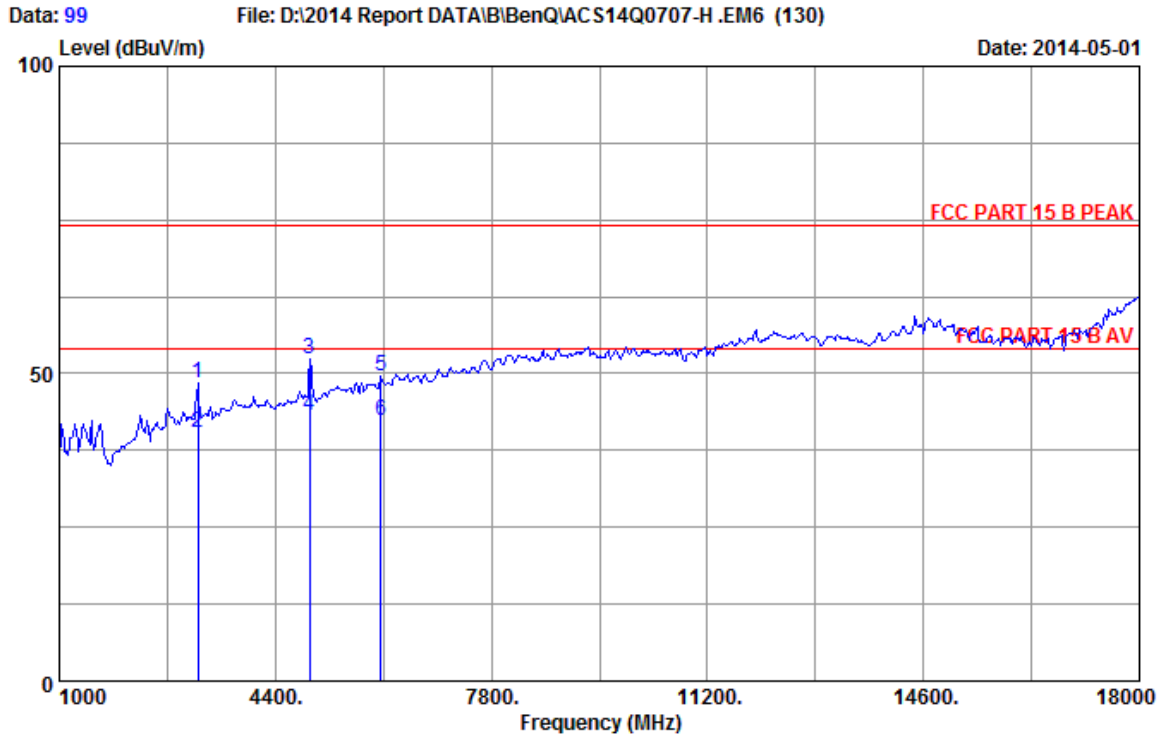

Site no :10m Chamber Data No :99
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	3176.000	29.60	3.17	34.62	50.39	48.54	74.00	25.46	Peak
2	3176.569	29.61	3.17	34.62	42.15	40.31	54.00	13.69	Average
3	4944.000	32.83	4.20	34.64	49.85	52.24	74.00	21.76	Peak
4	4944.968	32.83	4.20	34.64	40.67	43.06	54.00	10.94	Average
5	6066.000	34.32	5.07	34.80	45.11	49.70	74.00	24.30	Peak
6	6066.326	34.32	5.07	34.80	37.82	42.41	54.00	11.59	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

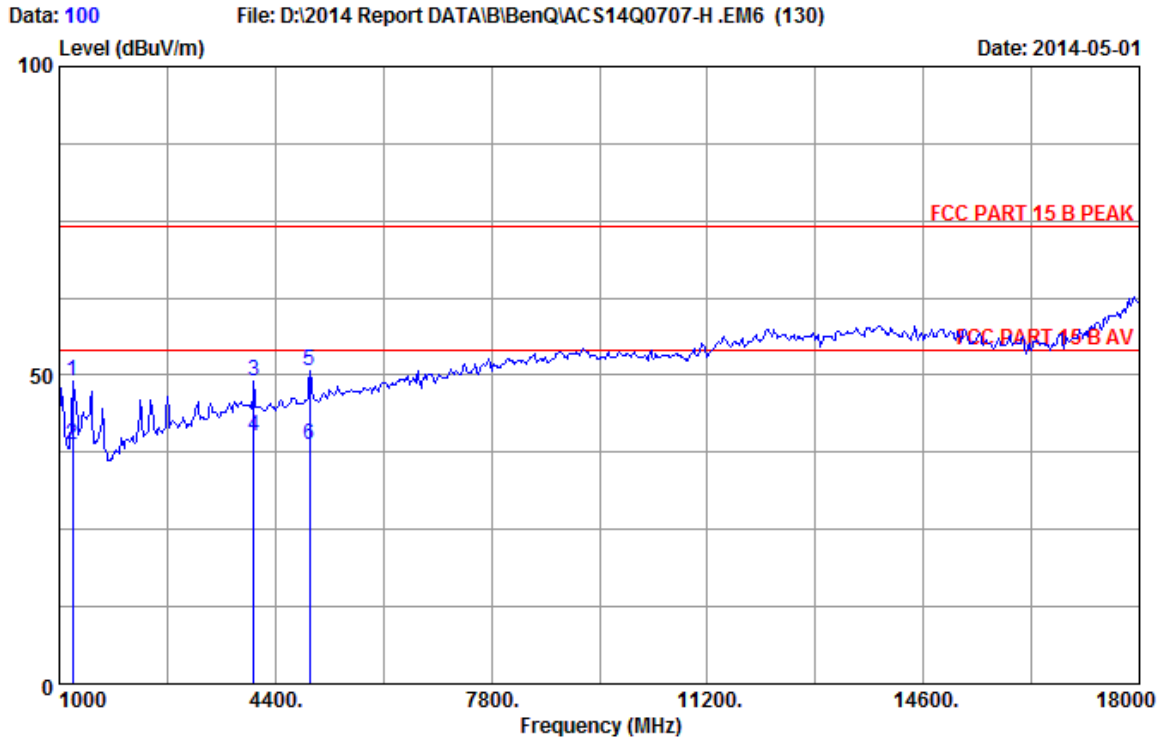

Site no :10m Chamber Data No :100
 Dis./Ant. :3m 2013 3115 (4877) Ant.pol :VERTICAL
 Limit :FCC PART 15 B PEAK
 Env./Ins. :24*C/34% Engineer :Bery_Guo
 EUT :LCD Monitor M/N:RP700
 Power Rating :AC 120V/60Hz
 Test Mode :Running Burnin Test V7.0
 VGA 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Ant Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1204.000	24.30	1.62	35.99	59.00	48.93	74.00	25.07	Peak
2	1204.269	24.30	1.62	35.99	48.66	38.59	54.00	15.41	Average
3	4060.000	32.12	3.87	34.51	47.50	48.98	74.00	25.02	Peak
4	4060.236	32.12	3.87	34.51	38.62	40.10	54.00	13.90	Average
5	4944.000	32.83	4.20	34.64	48.20	50.59	74.00	23.41	Peak
6	4944.827	32.83	4.20	34.64	36.45	38.84	54.00	15.16	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20dB below the official limit are not reported

5. DEVIATION TO TEST SPECIFICATIONS

[NONE]