



FCC TEST REPORT

REPORT NO.: RF930729L01

MODEL NO.: S668C

RECEIVED: Jul. 29 , 2004

TESTED: Aug. 13 ~ Aug. 14, 2004

APPLICANT: BenQ Corporation

ADDRESS: 157, Shan-Ying Road, Gueishan Taoyuan
333, Taiwan , R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 19, Hwa Ya 2nd Rd., Kueishan,
Taoyuan, Taiwan, R.O.C.

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



Table of Contents

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
3.4	DESCRIPTION OF SUPPORT UNITS	9
4	TEST TYPES AND RESULTS	10
4.1	MODULATION CHARACTERISTICS	10
4.1.1	DESCRIPTION OF MODULATION TECHNIQUE	10
4.1.2	THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT	11
4.2	OUTPUT POWER MEASUREMENT	13
4.2.1	LIMITS OF OUTPUT POWER MEASUREMENT	13
4.2.2	TEST INSTRUMENTS	13
4.2.3	TEST PROCEDURES	14
4.2.4	TEST SETUP	15
4.2.5	EUT OPERATING CONDITIONS	16
4.2.6	TEST RESULTS	17
4.3	FREQUENCY STABILITY MEASUREMENT	19
4.3.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	19
4.3.2	TEST INSTRUMENTS	19
4.3.3	TEST PROCEDURE	20
4.3.4	TEST SETUP	20
4.3.5	TEST RESULTS	21
4.4	OCCUPIED BANDWIDTH MEASUREMENT	23
4.4.1	LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	23
4.4.2	TEST INSTRUMENTS	23
4.4.3	TEST SETUP	23
4.4.4	TEST PROCEDURES	24
4.4.5	EUT OPERATING CONDITION	24
4.4.6	TEST RESULTS	24
4.5	BAND EDGE MEASUREMENT	31
4.5.1	LIMITS OF BAND EDGE MEASUREMENT	31
4.5.2	TEST INSTRUMENTS	31



4.5.3	TEST SETUP	31
4.5.4	TEST PROCEDURES	32
4.5.5	EUT OPERATING CONDITION	32
4.5.6	TEST RESULTS.....	33
4.6	CONDUCTED SPURIOUS EMISSIONS.....	35
4.6.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT.....	35
4.6.2	TEST INSTRUMENTS	35
4.6.3	TEST PROCEDURE	36
4.6.4	TEST SETUP	36
4.6.5	EUT OPERATING CONDITIONS.....	36
4.6.6	TEST RESULTS.....	37
4.7	RADIATED EMISSION MEASUREMENT	49
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	49
4.7.2	TEST INSTRUMENTS	50
4.7.3	TEST PROCEDURES.....	51
4.7.4	DEVIATION FROM TEST STANDARD	51
4.7.5	TEST SETUP	52
4.7.6	EUT OPERATING CONDITIONS.....	52
4.7.7	TEST RESULTS.....	53
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	57
6	INFORMATION ON THE TESTING LABORATORIES	61



1 CERTIFICATION

PRODUCT : Tri-band Mobile Phone
BRAND NAME : BenQ
MODEL NO. : S668C
APPLICANT : BenQ Corporation
TESTED : Aug. 13 ~ Aug. 14, 2004
TEST ITEM : ENGINEERING SAMPLE
TEST STANDARDS : FCC Part 24, Subpart E,
ANSI C63.4-2001

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** Aug. 19, 2004
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Aug. 19, 2004
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Aug. 19, 2004
(Cody Chang,
Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC 47 CFR Part 24 & Part 2 / IC RSS-133			
Standard Section	Test Type and Limit	Result	REMARK
2.1047(d)	Modulation Characteristics	PASS	NA
2.1046, 24.232	Maximum Peak Output Power Limit: max. 2 watts e.i.r.p peak power	PASS	Meet the requirement of limit Minimum passing margin is 30.10dBm at 1909.80MHz
2.1055, 24.235	Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 0.1 ppm	PASS	Meet the requirement of limit
2.1049, 24.238(b)	Occupied Bandwidth	PASS	Meet the requirement of limit
24.238(b)	Band Edge Measurements	PASS	NA
2.1051, 24.238	Conducted Spurious Emissions	PASS	Meet the requirement of limit Minimum passing margin is -23.72dB at 3812.00MHz
2.1053, 24.238	Radiated Spurious Emissions	PASS	Meet the requirement of limit Minimum passing margin is -22.92dB at 11101.00MHz

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9k~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Tri-band Mobile Phone
MODEL NO.	S668C
POWER SUPPLY	3.6Vdc from Battery 6.0Vdc from AC Adapter
MODULATION TYPE	GMSK
FREQUENCY RANGE	Tx Frequency : 1850.2MHz~1909.8MHz (PCS band) Rx Frequency : 1930.2MHz~1989.8MHz (PCS band)
NUMBER OF CHANNEL	299
MAX. CONDUCTED PEAK OUTPUT POWER	29.72dBm(0.938Watts)
MAX. RADITED EIRP PEAK OUTPUT POWER	30.10dBm(1.023Watts)
ANTENNA TYPE	External Antenna with 0.34dBi gain
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	Earphone plus Microphone
EUT Extreme Vol. Range	3.0Vdc to 4.2Vdc

NOTE

1. The EUT was tested with the following adapter:

BRAND:	BenQ
MODEL :	MP20
INPUT :	100-240Vac, 50-60Hz
OUTPUT :	6Vdc, 500mA

2. IMEI Code: 35423600-000001~999999 and 35423700-000001~999999.
3. The hardware version: V5.
4. The software version: V1.33.
5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

299 channels are provided to this EUT in the PCS1900 band. Therefore, we have chosen the low, middle and high channels for testing.

	Channel	Frequency
Low	512	1850.2 MHz
Middle	661	1880.0 MHz
High	810	1909.8 MHz

NOTE:

1. Below 1 GHz, the channel 512, 661, and 810 were pre-tested in chamber. The channel 512, the worst case, was chosen for final test.
2. Above 1 GHz, the channel 512, 661, and 810 were tested individually.
3. When the Power Control Level set 0, the worst case, was chosen for final test.
4. The channel space is 0.2MHz.
5. Three test modes were pre-tested in chamber. The test mode 1 was for X-Plane, the test mode 2 was for Y-Plane, and the test mode 3 was for Z-Plane. And we found the test mode 3 was the worst case regarding radiated emission measurement test.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Tri-band Mobile Phone. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

IC RSS-133

ANSI C63.4 : 2001

All test items have been performed and recorded as per the above standards.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	CAL. DATE
1	UNIVERSAL RADIO COMMUNICATION TESTER	ROHDE &SCHWARZ	CMU 200	101372	2004/10/21

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4 TEST TYPES AND RESULTS

4.1 MODULATION CHARACTERISTICS

4.1.1 DESCRIPTION OF MODULATION TECHNIQUE


According to FCC 2.1047(d), the system is used the digital modulation and accomplished with the PCS requirement as defined in the 3GGP TS 05:01, TS 05:02, TS 05:04. It uses narrowband TDMA. Eight simultaneous calls can occupy the same radio frequency.


There are 299 channels and channel space is 200kHz. The frequency band 1850~1910MHz is allocated to the uplink and 1930~1990MHz to the downlink. The uplink and downlink channel space is 80MHz and is duplex at the same time.

The modulation scheme used the GMSK (Gaussian Minimum Shift Keying) that is the special case of FSK (frequency Shift Keying). The each time slot is last about 580 μ s and data length is 156.25bits. A frame contains the eight time slots.



4.1.2 THE ACTIVE TIME SLOT 8 MODULATED FRAME PLOT

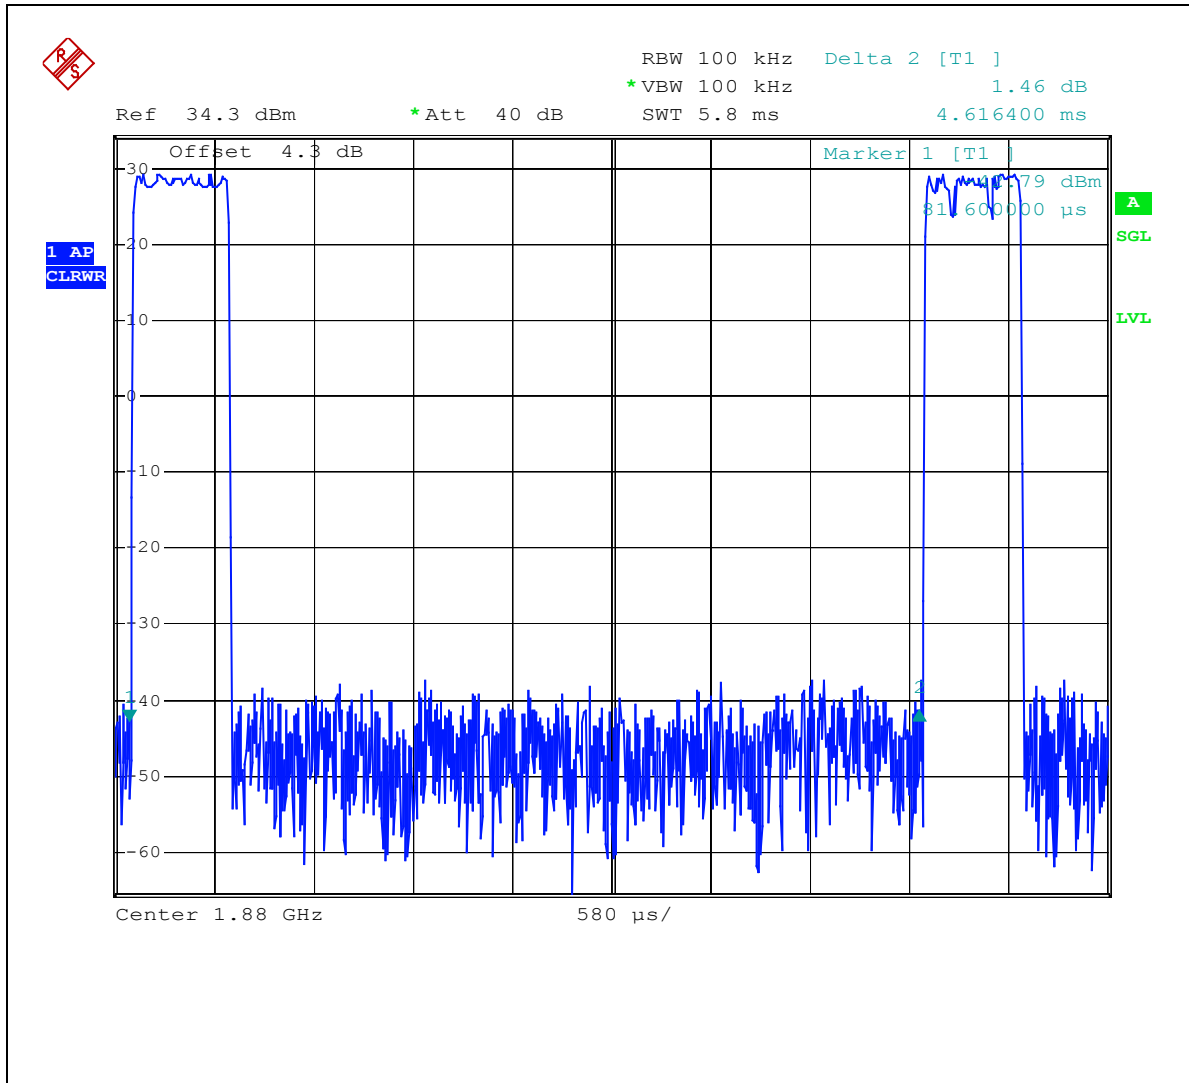

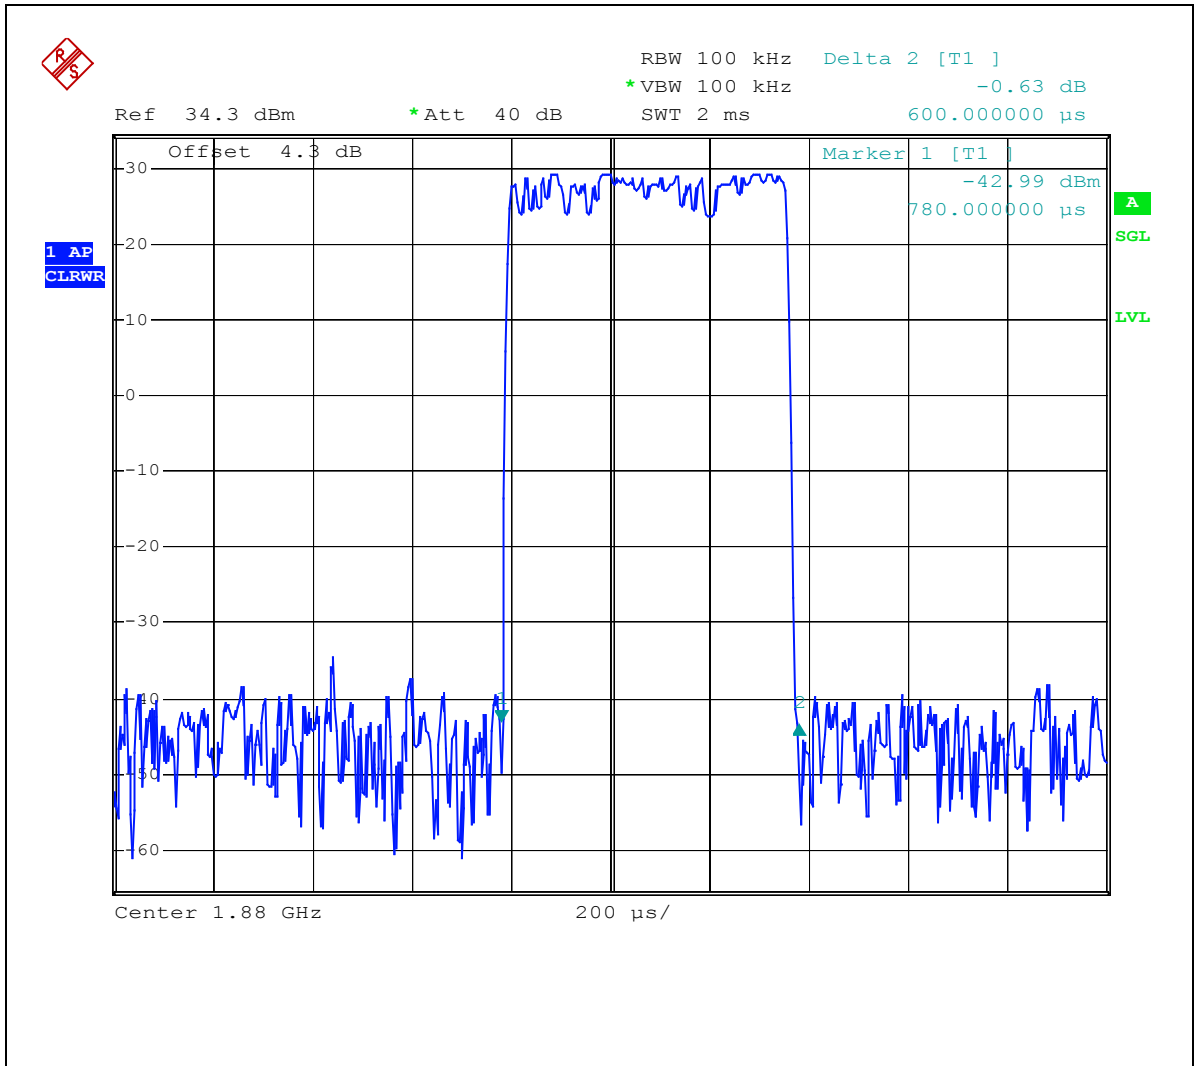

4.2 OUTPUT POWER MEASUREMENT

4.2.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 24.232(b) that “Mobile / Portable station are limited to 2 watts e.i.r.p” and 24.232(c) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Feb. 09, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10631	Jan. 15, 2005
Preamplifier Agilent	8449B	3008A01960	Jan. 22, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Mar. 04, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-4.

4.2.3 TEST PROCEDURES


- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signal generator export the CW signal to the calibration antenna. The signal generator level has to adjust to have the same emission nature. The radiated power can be calculated via the factor and antenna.
- e. Actually the real E.I.R.P peak power is equal to "SG Power Value" + " Correction Factor (dB)=Substitution Antenna Gain (dBi) – Cable Loss(dB) "

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK)


4.2.4 TEST SETUP

EIRP Power Measurement

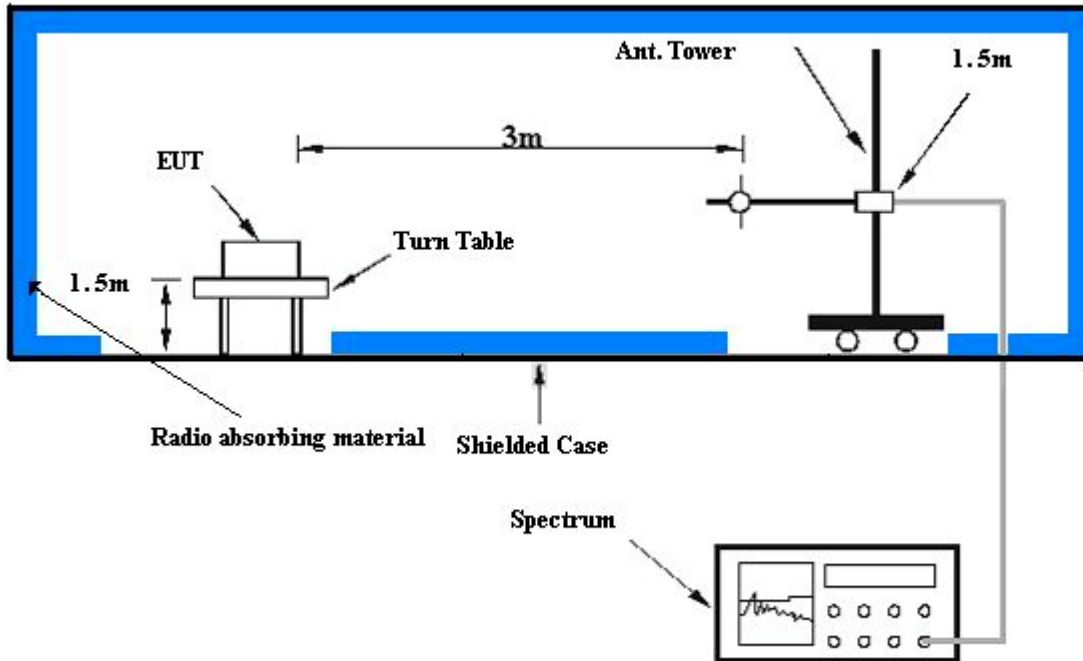

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

Conducted Power Measurement

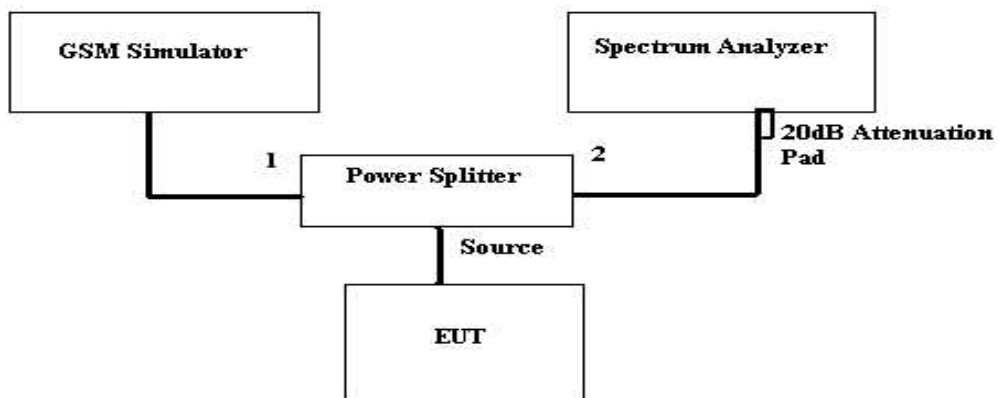

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.



4.2.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

4.2.6 TEST RESULTS

EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX connected	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65 % RH, 999 hPa	TESTED BY: Leo Hung	

EIRP RADIATED PEAK OUTPUT POWER					
Channel No.	Frequency (MHz)	Raw Value (dBm)	Correction Factor (dB)	Peak Output Power	
				dBm	Watt
512	1850.2	24.85	4.30	29.15	0.822
661	1880.0	24.97	4.30	29.27	0.845
810	1909.8	25.42	4.30	29.72	0.938

REMARKS:

1. Peak Output Power(dBm)=SG Power Value (dBm) + Correction Factor (dB)
2. Correction Factor(dB) = Substitution Antenna Gain(dBi) + Cable Loss(dB)



EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	Tx	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65 % RH, 999 hPa	TESTED BY: Leo Hung	

EIRP RADIATED PEAK OUTPUT POWER							
Channel No.	Frequency (MHz)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Peak Output Power	
						dBm	Watt
512	1850.2	21.15	8.25	10.45	2.2	29.4	0.871
661	1880.0	21.37	8.23	10.43	2.2	29.6	0.912
810	1909.8	21.88	8.22	10.42	2.2	30.1	1.023
Antenna gain: 0.34dBi							

REMARKS:

1. Peak Output Power(dBm)=SG Power Value (dBm) + Correction Factor (dB)
2. Correction Factor(dB) = Substitution Antenna Gain(dBi) - Cable Loss(dB)

4.3 FREQUENCY STABILITY MEASUREMENT

4.3.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.4235 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
UNIVERSAL RADIO COMMUNICATION TESTER	CMU 200	101372	Oct. 21, 2004
* Hewlett Packard RF cable	8120-6192	01428251	NA
* Suhner RF cable	Sucoflex104	204850/4	NA
*WIT Standard Temperature & Humidity Chamber	TH-4S-C	W981030	Jul. 18, 2005

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.


2. "*" = These equipments are used for the final measurement.
3. The test was performed in ADT RF OVEN room.

4.3.3 TEST PROCEDURE

- a. Because of the measure the carrier frequency under the condition of the AFC lock, it shall be used the mobile station in the GRRP link mode. This is accomplished with the use of the R&S CMU200 simulator station. The oven room could control the temperatures and humidity. The GPRS link channel is the 661.
- b. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- c. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.2 Volts to 4.2 Volts. Each step shall be record the frequency error rate.
- d. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- e. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

REMARKS: 1. The frequency error was recorded frequency error from the GSM simulator.

4.3.4 TEST SETUP

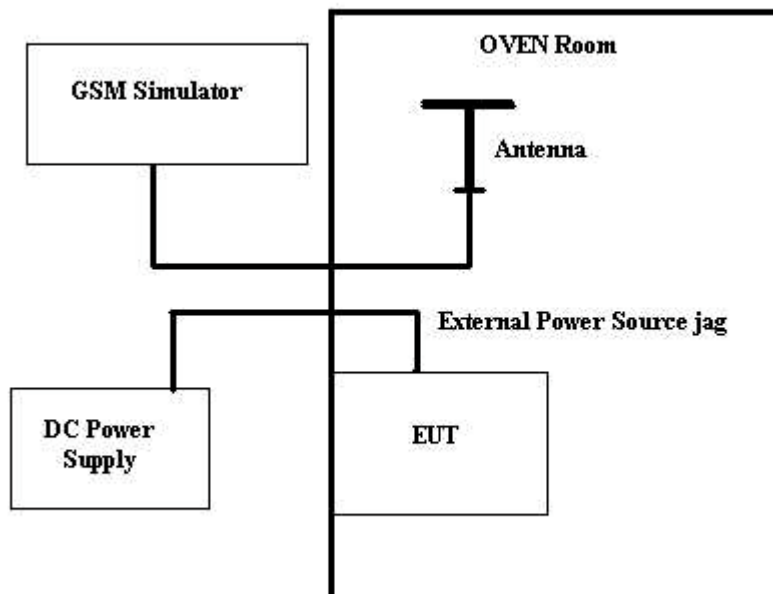

4.3.5 TEST RESULTS

EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX Channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	500 Bursts
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 999 hPa	TESTED BY: Gary Chang	

AFC FREQUENCY ERROR vs. VOLTAGE			
Voltage (Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.0	59	0.032	0.1
3.1	42	0.023	0.1
3.2	19	0.010	0.1
3.3	19	0.010	0.1
3.4	28	0.015	0.1
3.5	24	0.013	0.1
3.6	26	0.014	0.1
3.7	39	0.021	0.1
3.8	27	0.015	0.1
3.9	30	0.016	0.1
4.0	26	0.014	0.1
4.1	26	0.014	0.1
4.2	28	0.015	0.1

EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	500 Bursts
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 999 hPa	TESTED BY: Gary Chang	

AFC FREQUENCY ERROR vs. TEMPERATURE			
Temp. (°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
50	33	0.018	0.1
40	31	0.017	0.1
30	30	0.016	0.1
20	33	0.018	0.1
10	36	0.019	0.1
0	45	0.024	0.1
-10	48	0.026	0.1
-20	57	0.031	0.1
-30	63	0.034	0.1

4.4 OCCUPIED BANDWIDTH MEASUREMENT

4.4.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 19, 2005
UNIVERSAL RADIO COMMUNICATION TESTER	CMU 200	101372	Oct. 21, 2004
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipments are used for the final measurement.

4.4.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

4.4.4 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. FCC 24.238(b) required a measurement bandwidth is the fundamental emission below 26dB bandwidth.

4.4.5 EUT OPERATING CONDITION


- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum and minimum output power under transmission mode and specific channel frequency Same as Item 4.4.5

4.4.6 TEST RESULTS

Frequency (MHz)	Max. Output Power -26 dBc Bandwidth (kHz)	Min. Output Power -26 dBc Bandwidth (kHz)
1850.2	312	314
1880.0	312	308
1909.8	312	310




Channel 512 Max. Power -26 dBc Bandwidth

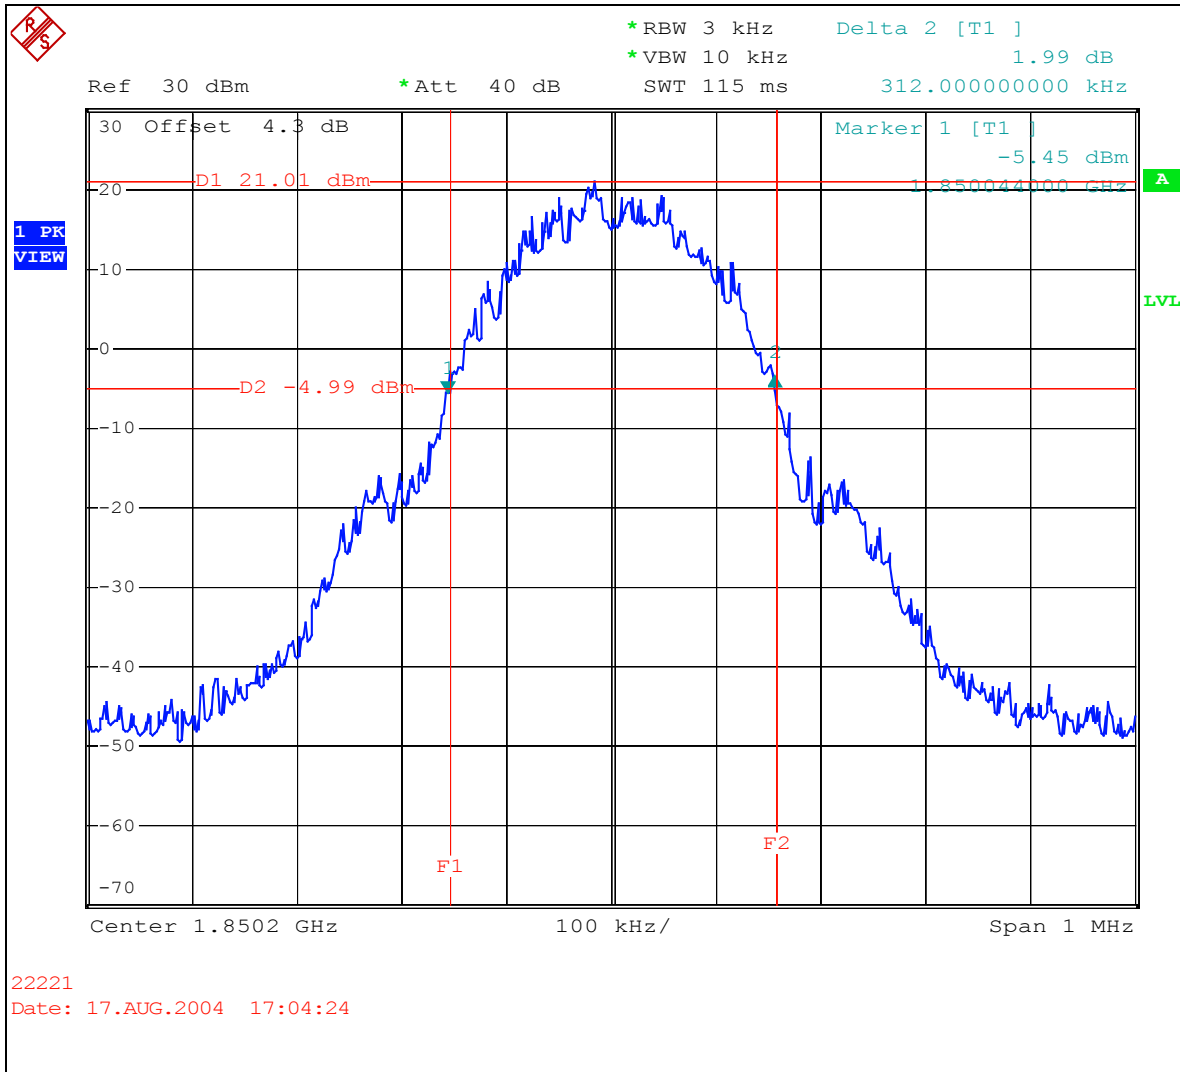

22221
Date: 17.AUG.2004 17:04:24




Channel 512 Min. Power -26 dBc Bandwidth

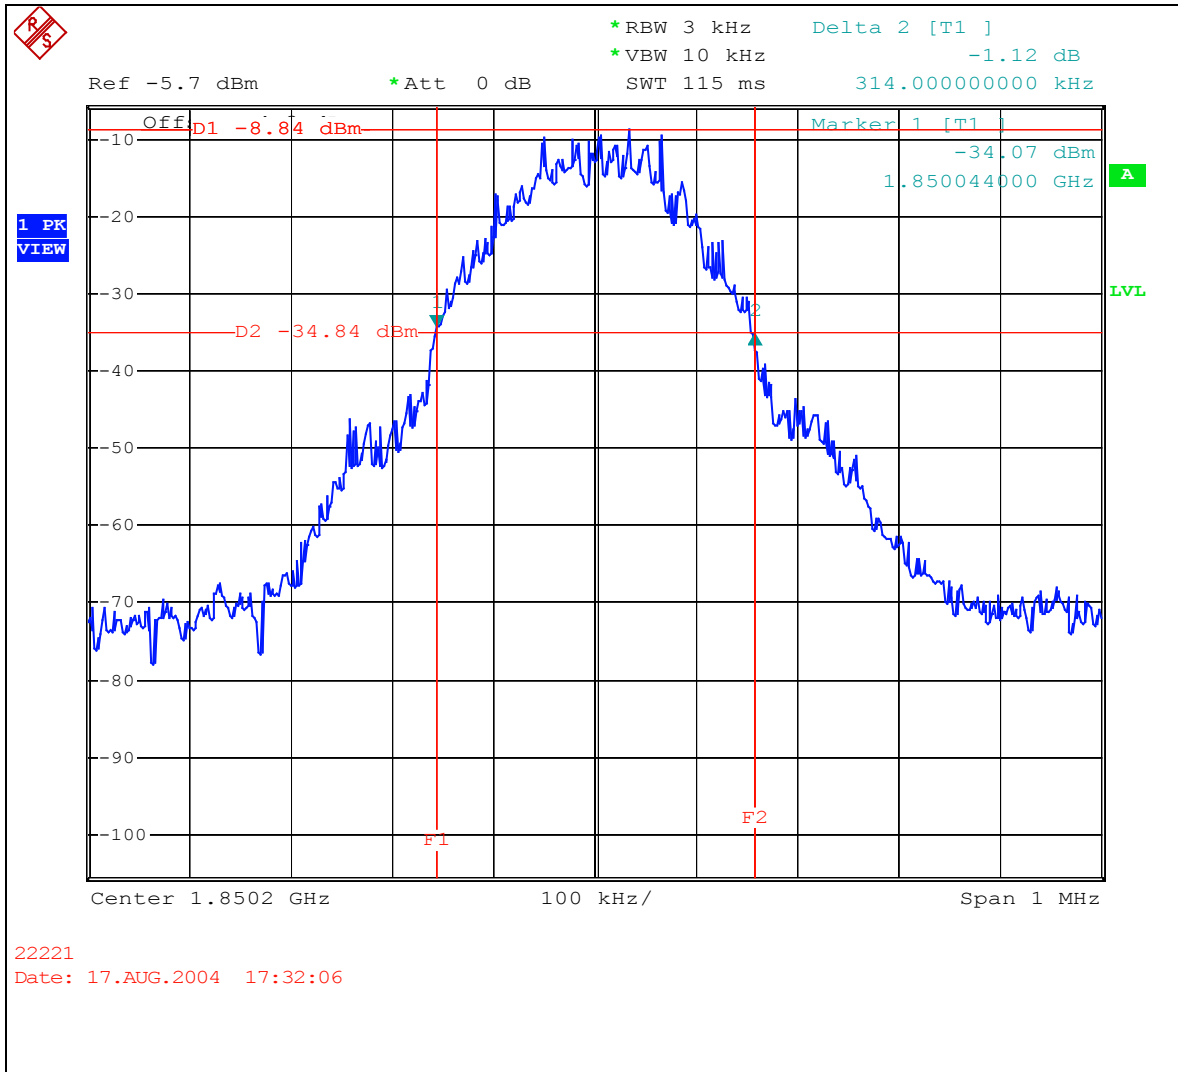

22221
Date: 17.AUG.2004 17:32:06




Channel 661 Max. Power -26 dBc Bandwidth

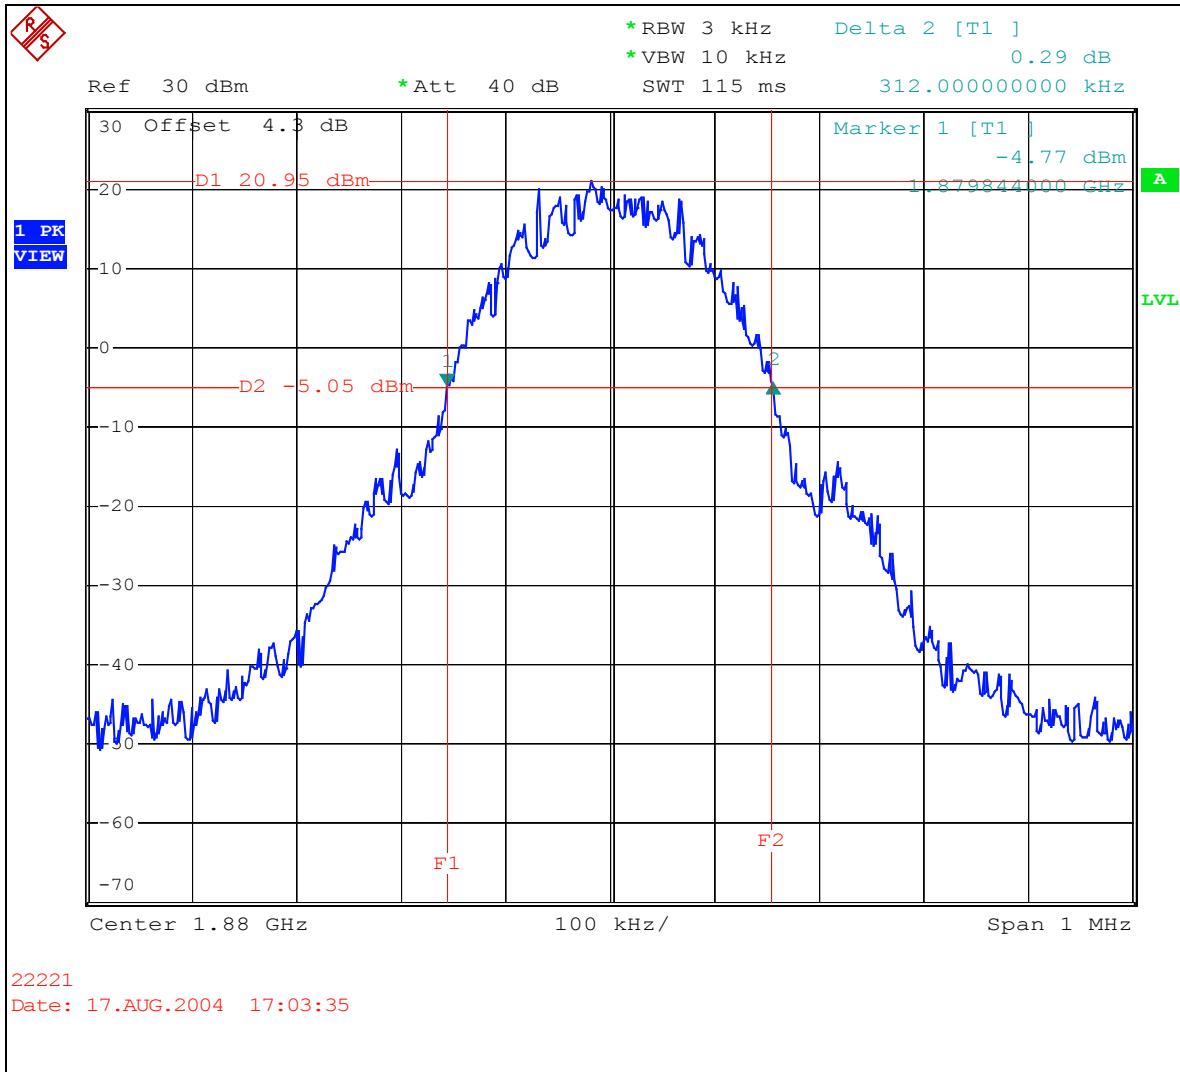




Channel 661 Min. Power -26 dBc Bandwidth

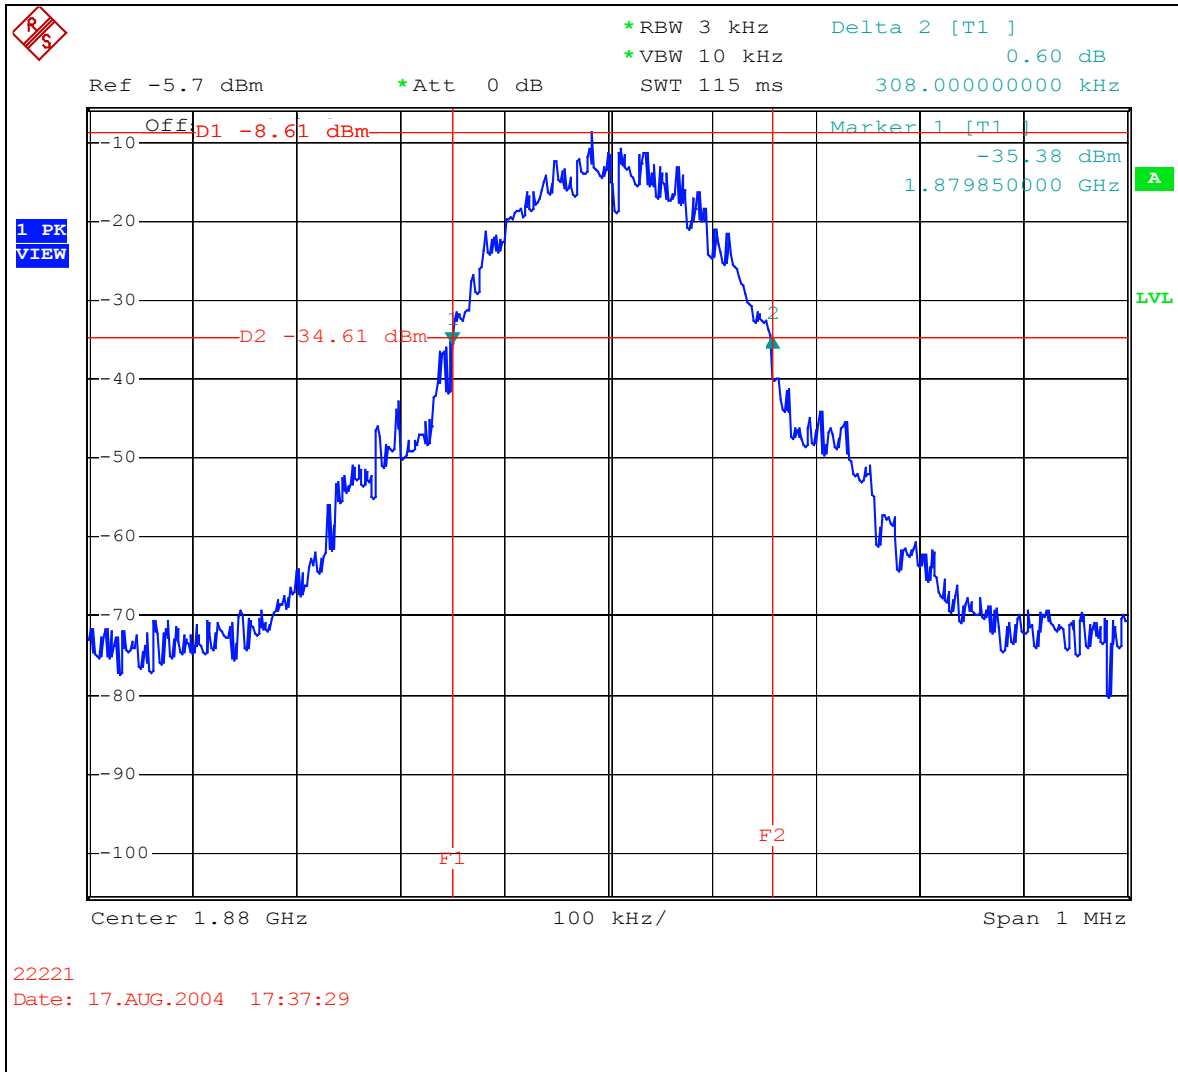




Channel 810 Max. Power -26 dBc Bandwidth

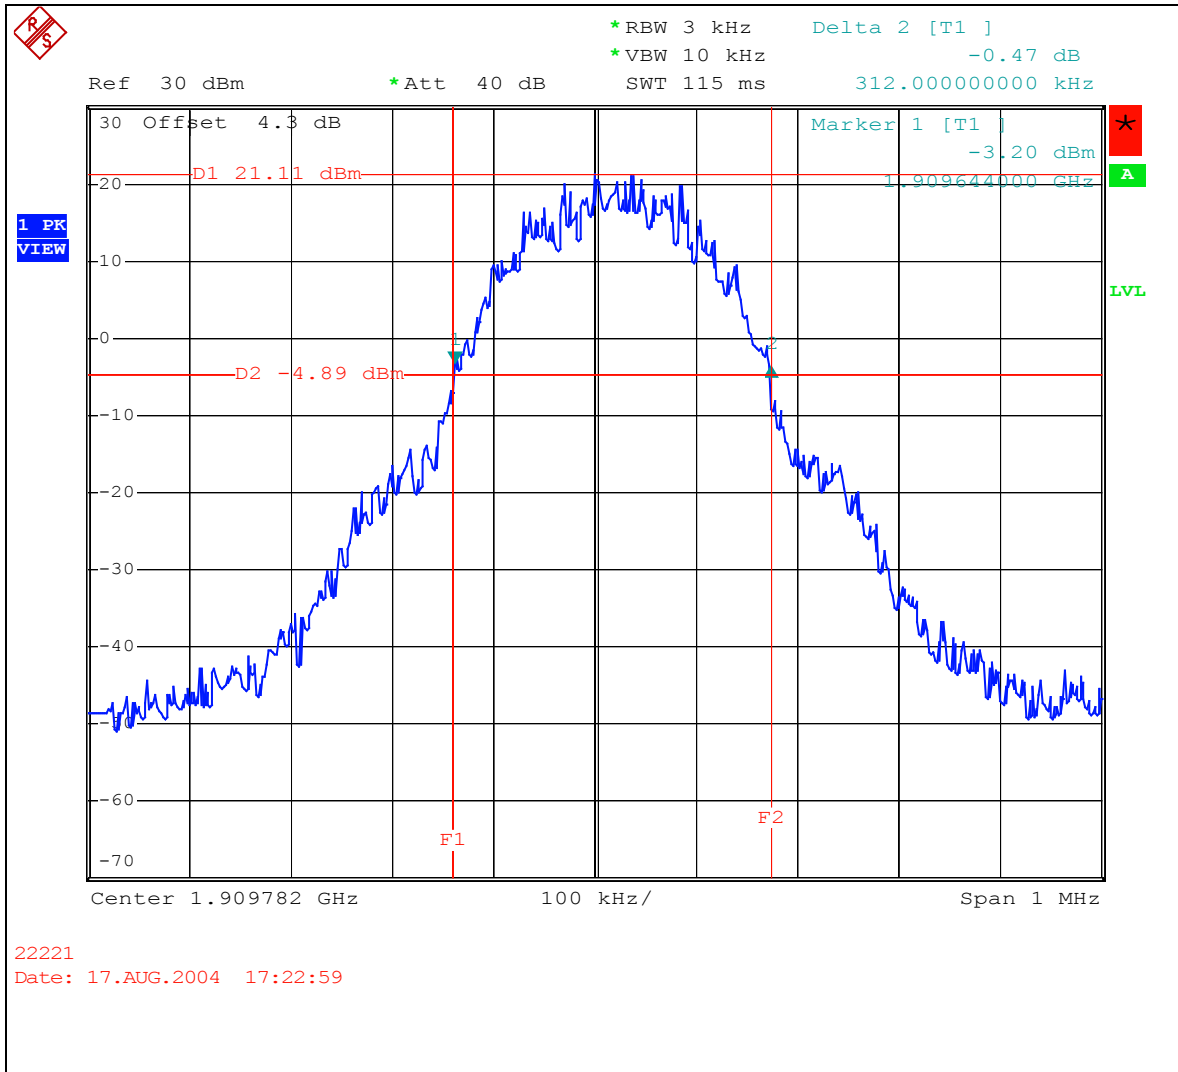



Channel 810 Min. Power -26 dBc Bandwidth

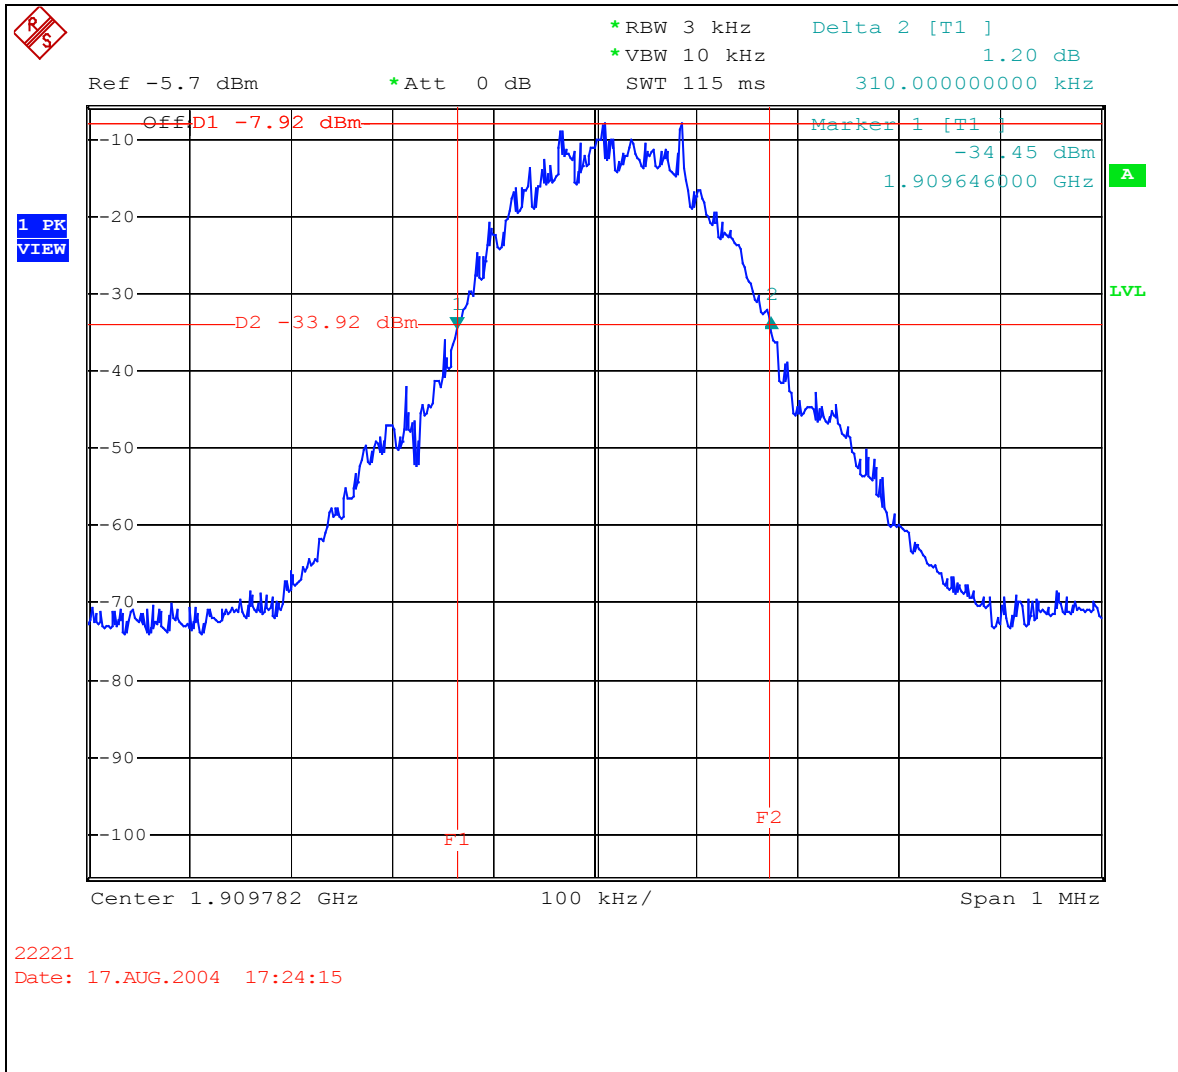

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

The PCS frequency bands refer to the FCC 24.229 rule. According to FCC 24.238(b) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 19, 2005
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	101372	Oct. 21, 2004
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipments are used for the final measurement.

4.5.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

4.5.4 TEST PROCEDURES


- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810(low and high operational frequency range.)
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10KHz.
- d. Record the max trace plot into the test report.

4.5.5 EUT OPERATING CONDITION

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency Same as Item 4.4.5.


4.5.6 TEST RESULTS

Lower Band Edge

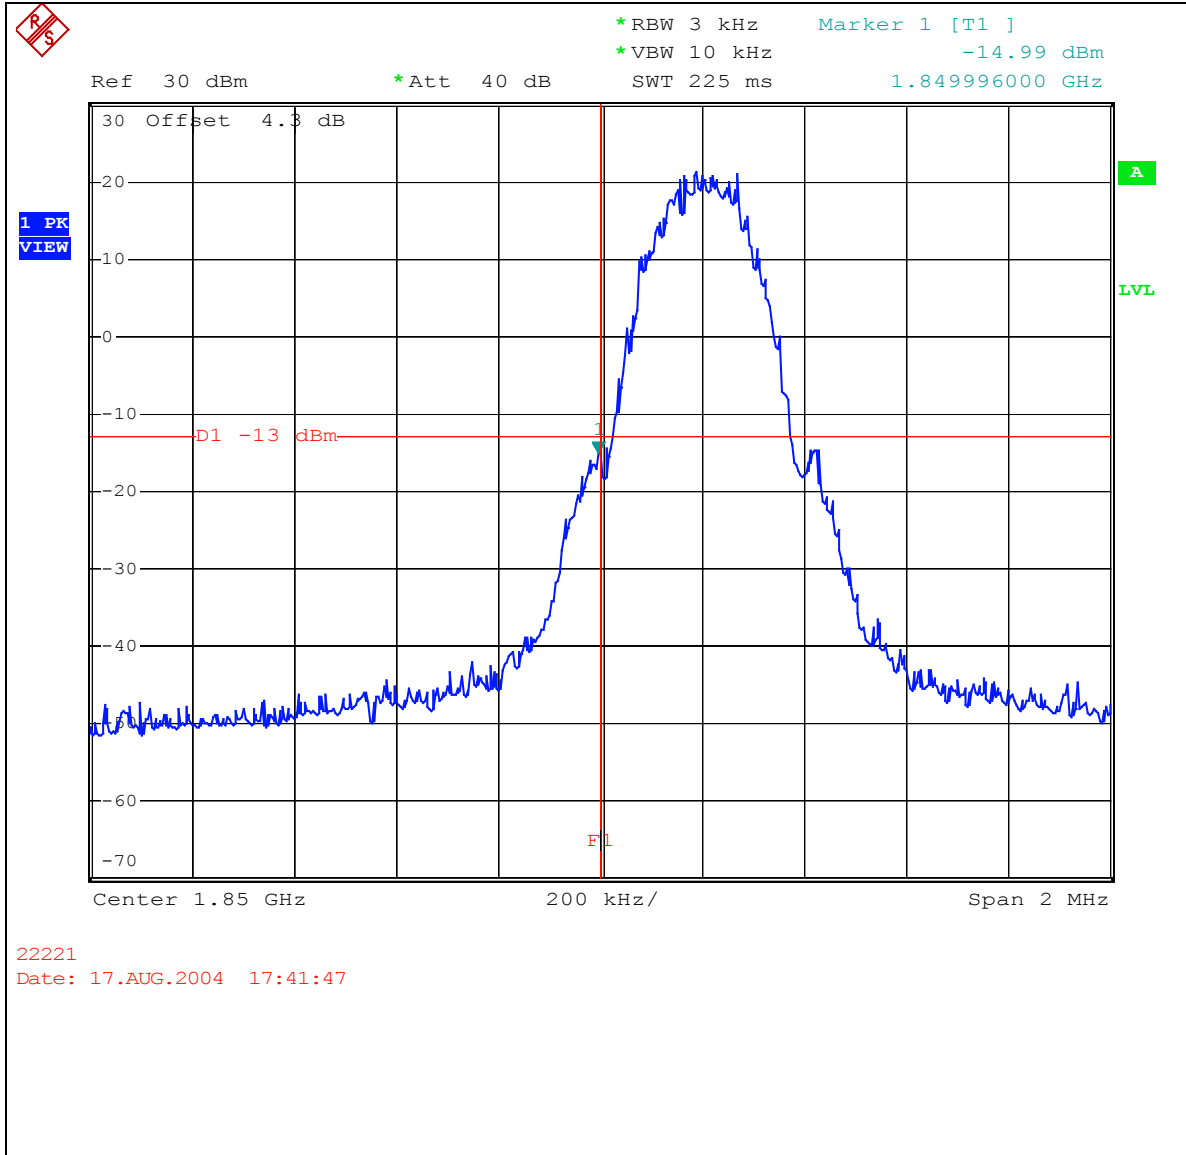



Higher Band Edge

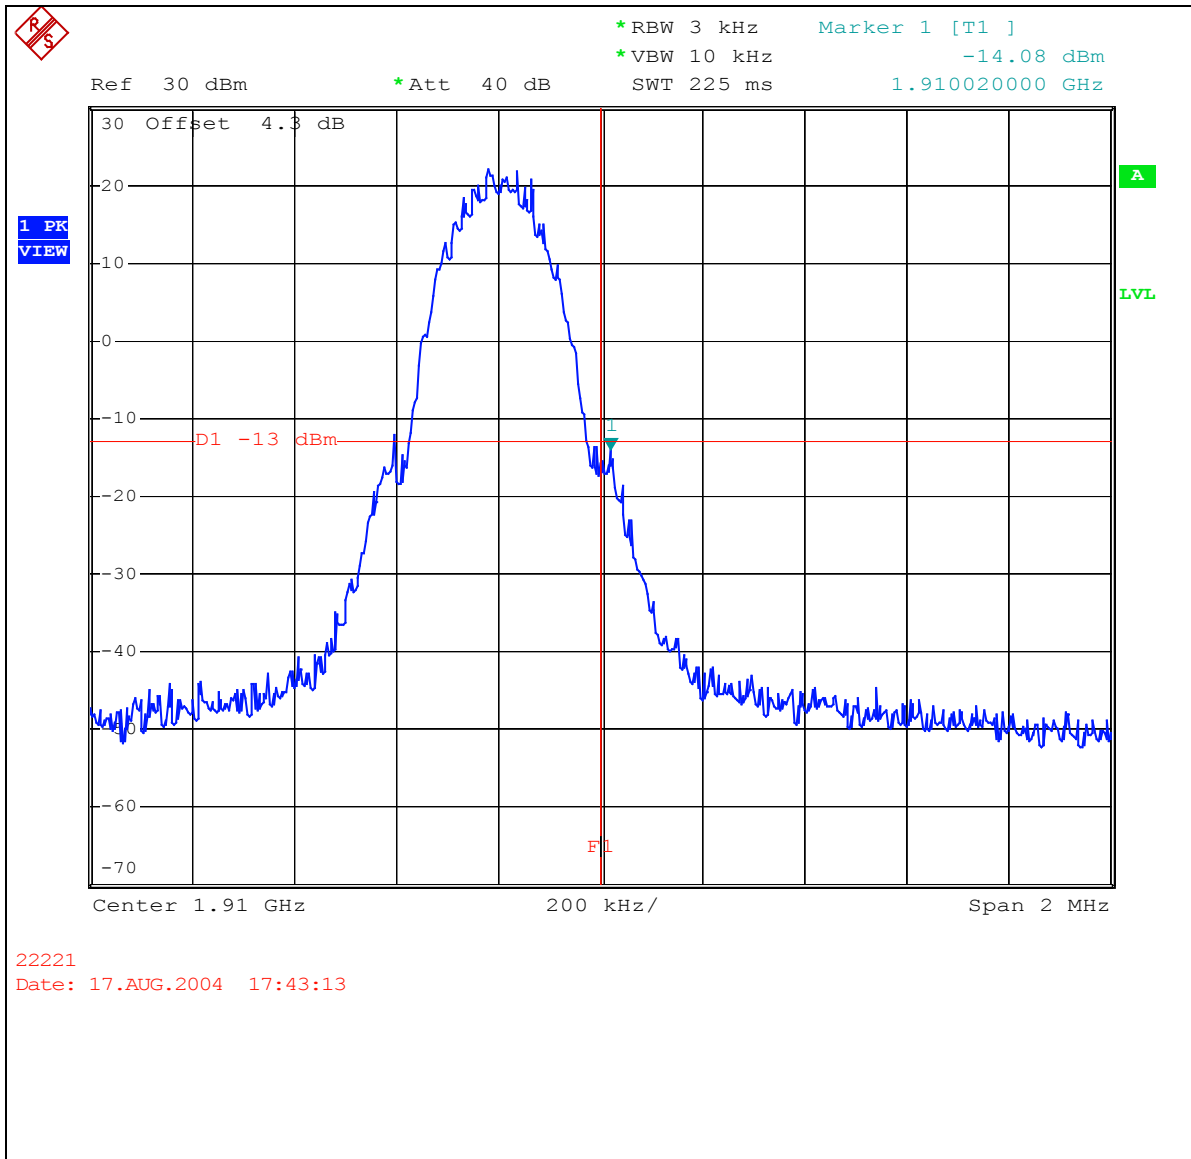

4.6 CONDUCTED SPURIOUS EMISSIONS

4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line. In the FCC 24.238(c), When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges (low channel 512 and high channel 810), both upper and lower edges are compliance with FCC 24.238(b), Adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.6.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100035	Apr. 19, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
Universal Radio Communication Tester	CMU200	101372	Oct. 21, 2004
* Wainwright Instruments Band Reject Filter	WRCG1850/1910- 1830/1930- 60/10SS	SN1	NA
* Wainwright Instruments High Pass Filter	WHK3.1/18G-10SS	SN1	NA
* Mini-Circuits Power Splitter	ZAPD-4	400005	NA
* Hewlett Packard RF cable	8120-6192	01428251	NA
* JFW 20dB attenuation	50HF-020-SMA	NA	NA
* Suhner RF cable	Sucoflex104	204850/4	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
2. "*" = These equipments are used for the final measurement.

4.6.3 TEST PROCEDURE

- a. The EUT was set up for the maximum peak power with GPRS link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810(low, middle and high operational frequency range.)
- b. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- c. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
- d. When the spectrum scanned from 3kHz to 20GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.6.4 TEST SETUP

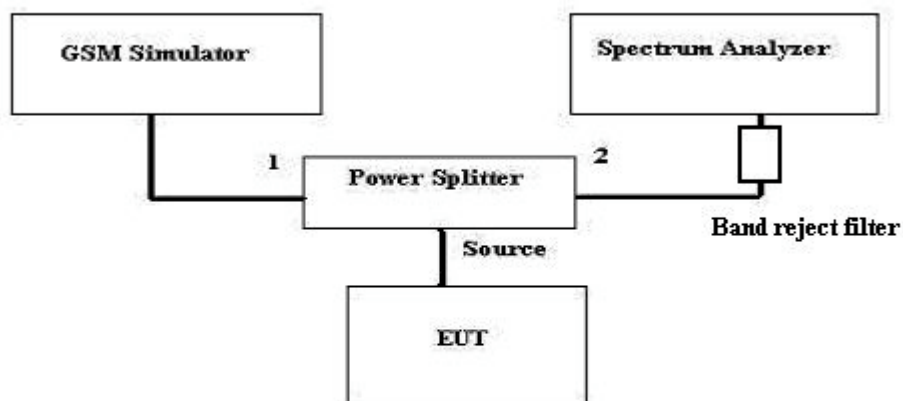


4.6.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.




4.6.6 TEST RESULTS

Channel 512 9kHz~3GHz

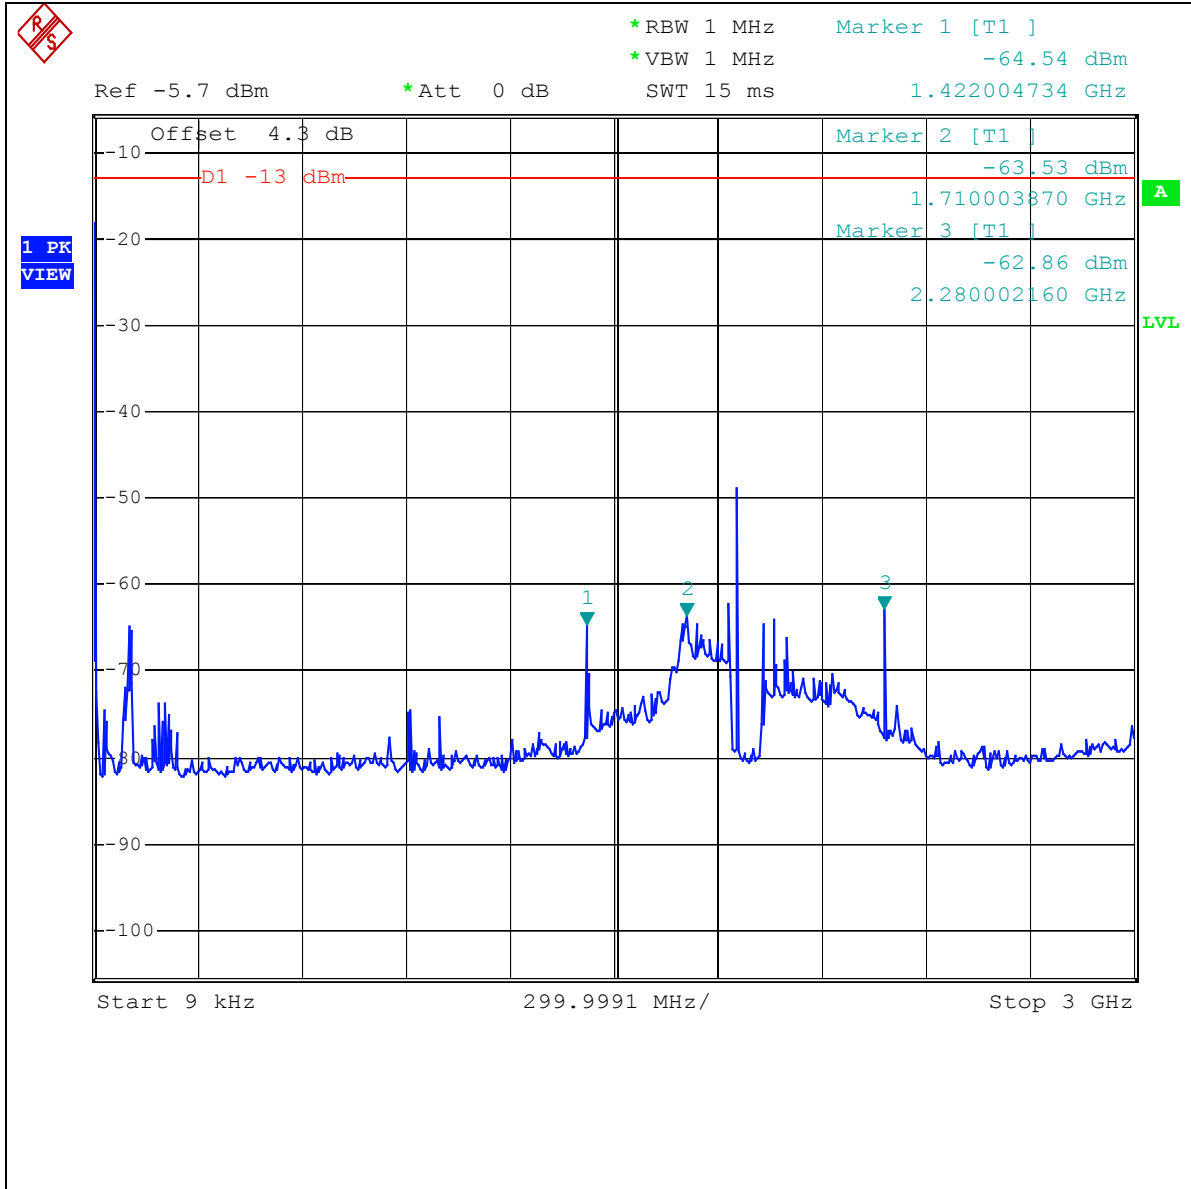




Channel 512 3GHz~10GHz

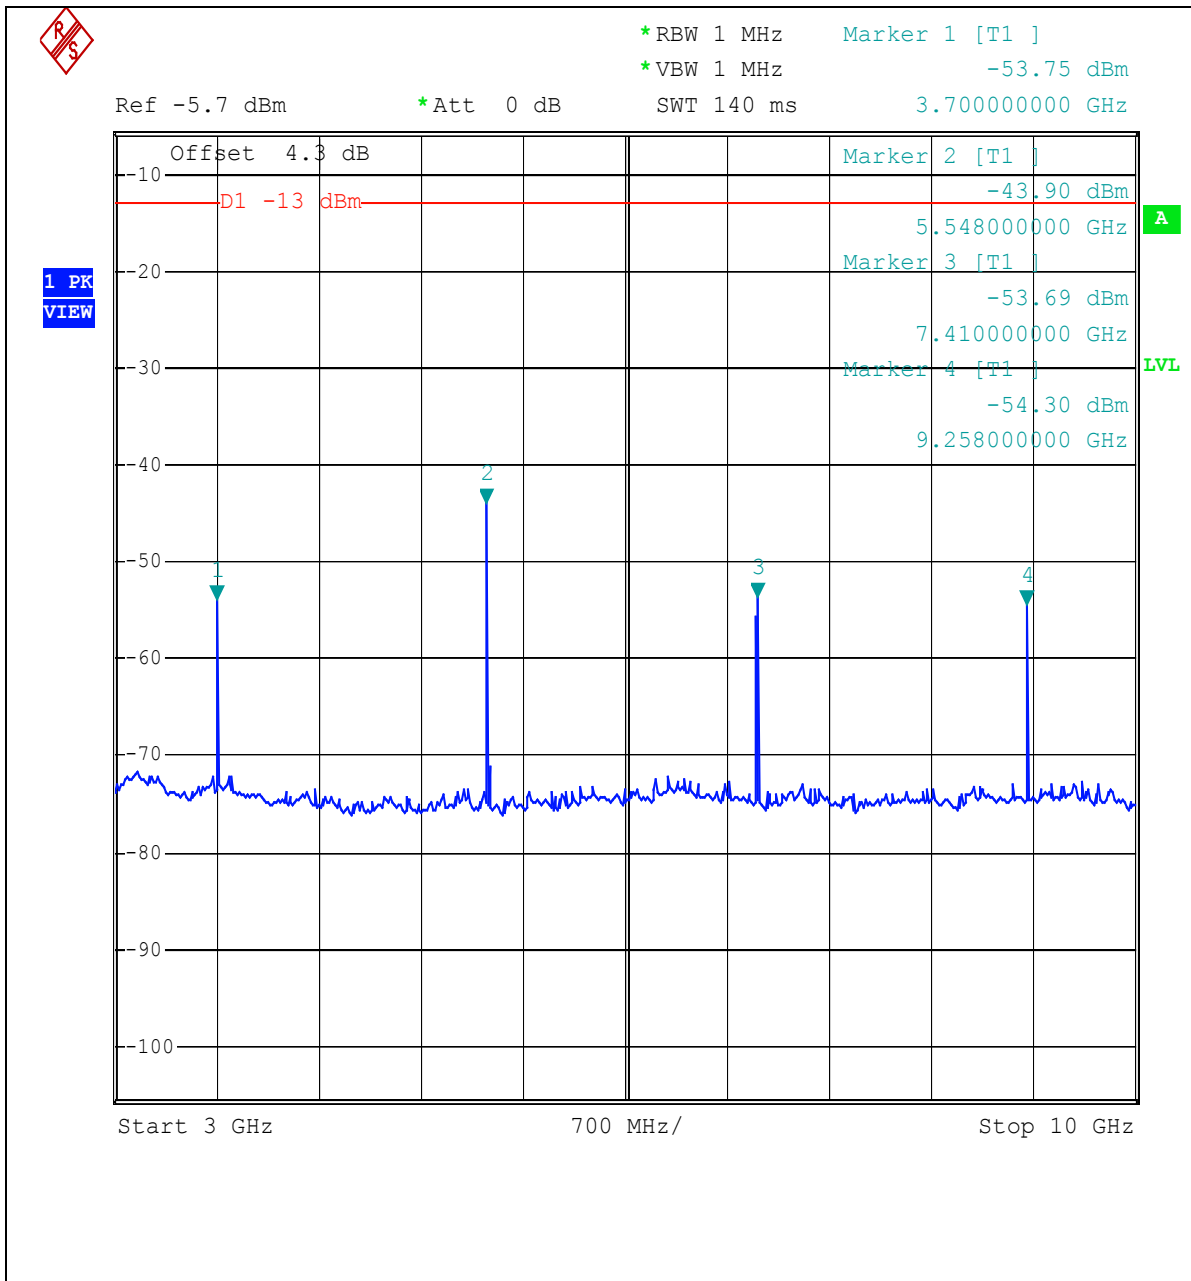




Channel 512 10GHz~20GHz

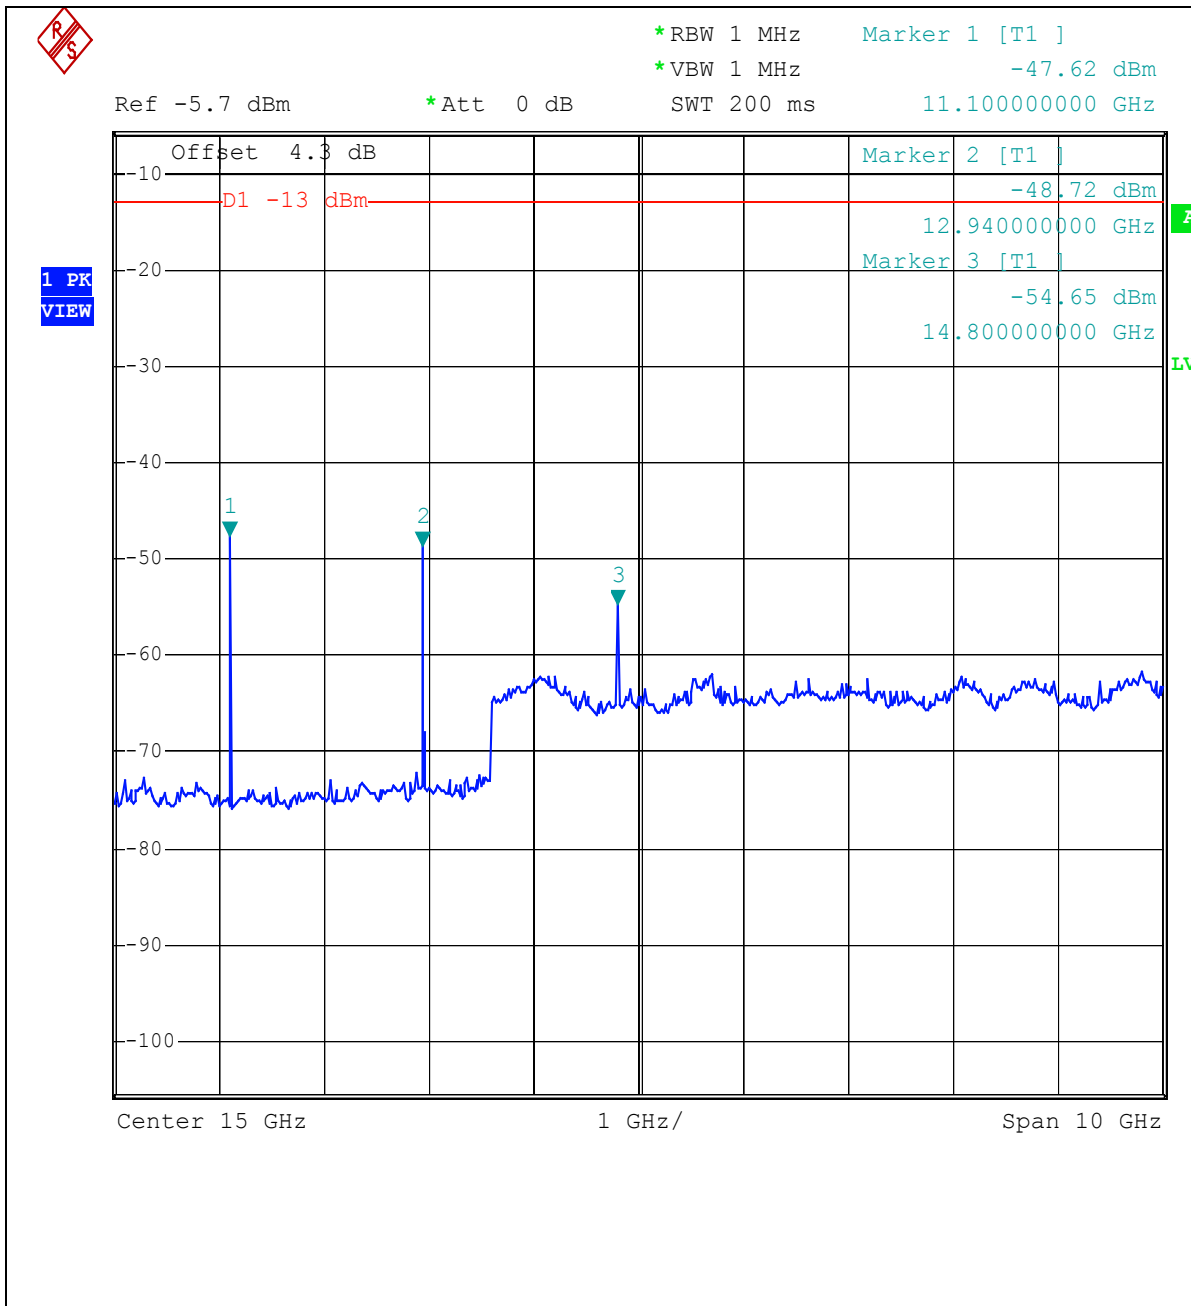




Channel 661 9kHz~3GHz

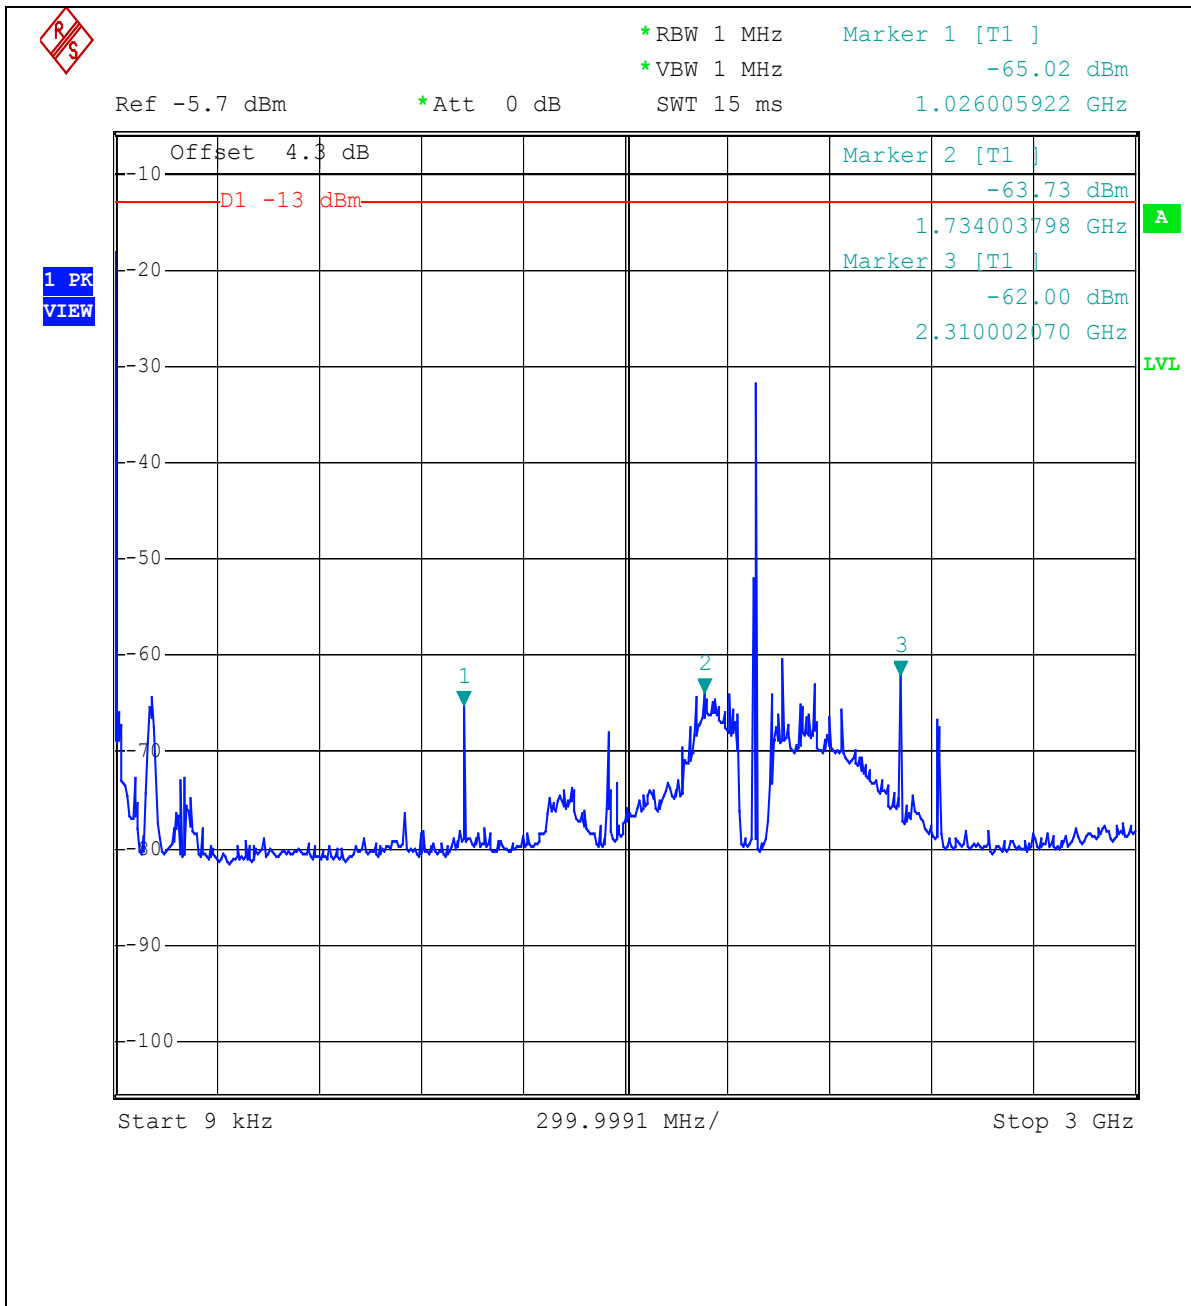




Channel 661 3GHz~10GHz

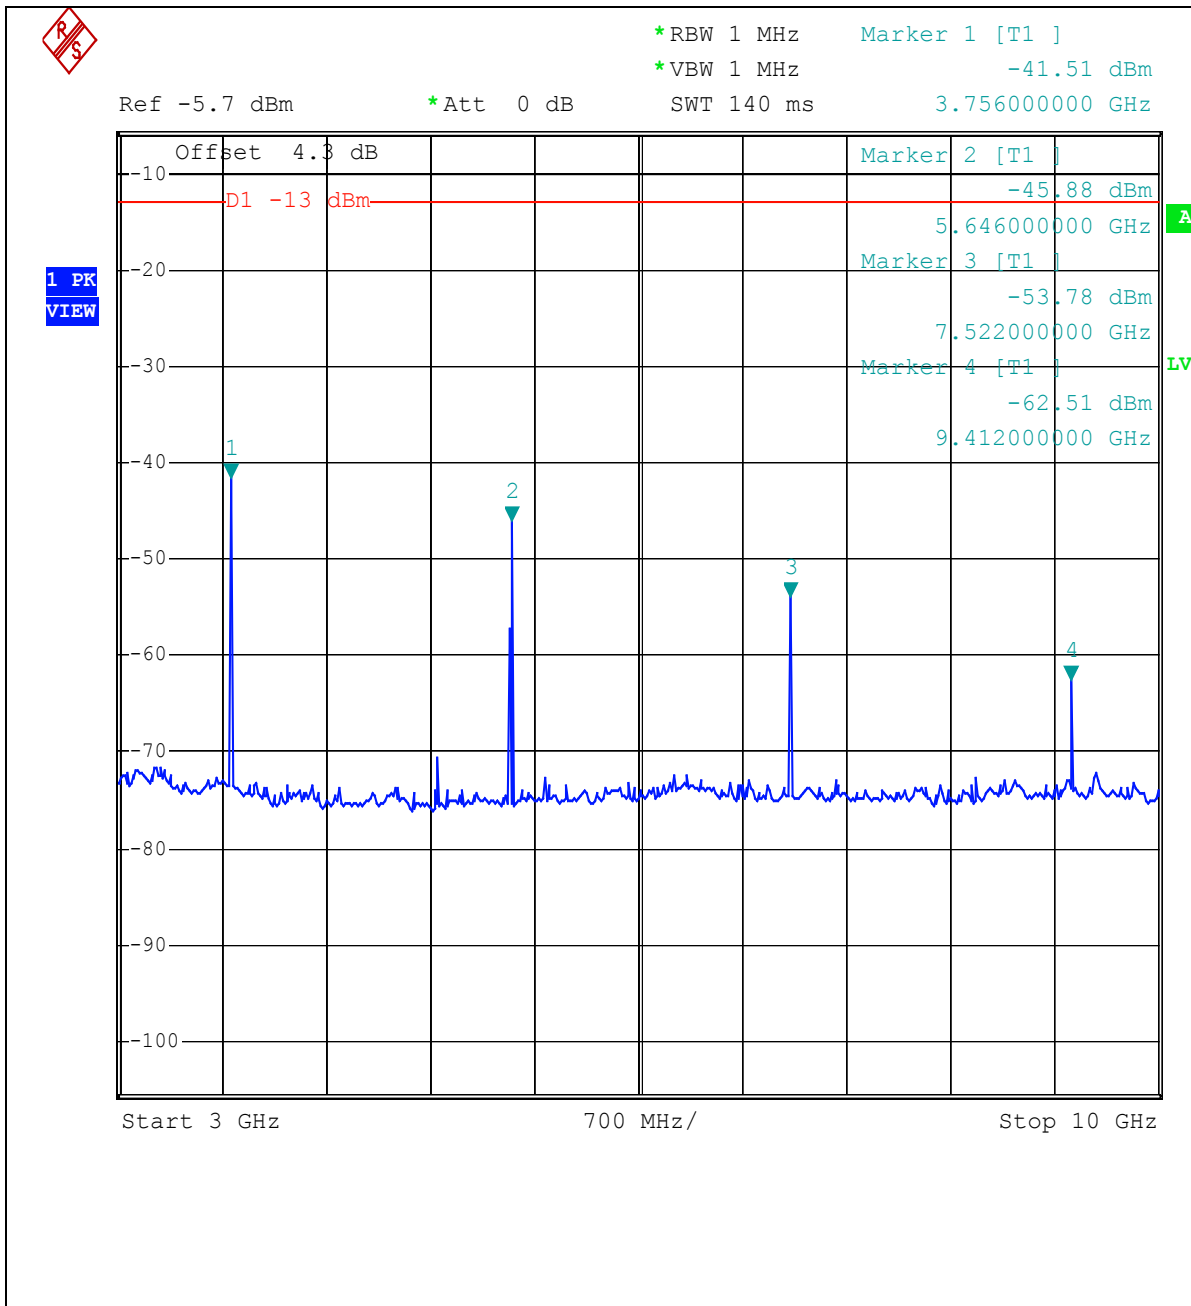




Channel 661 10GHz~20GHz

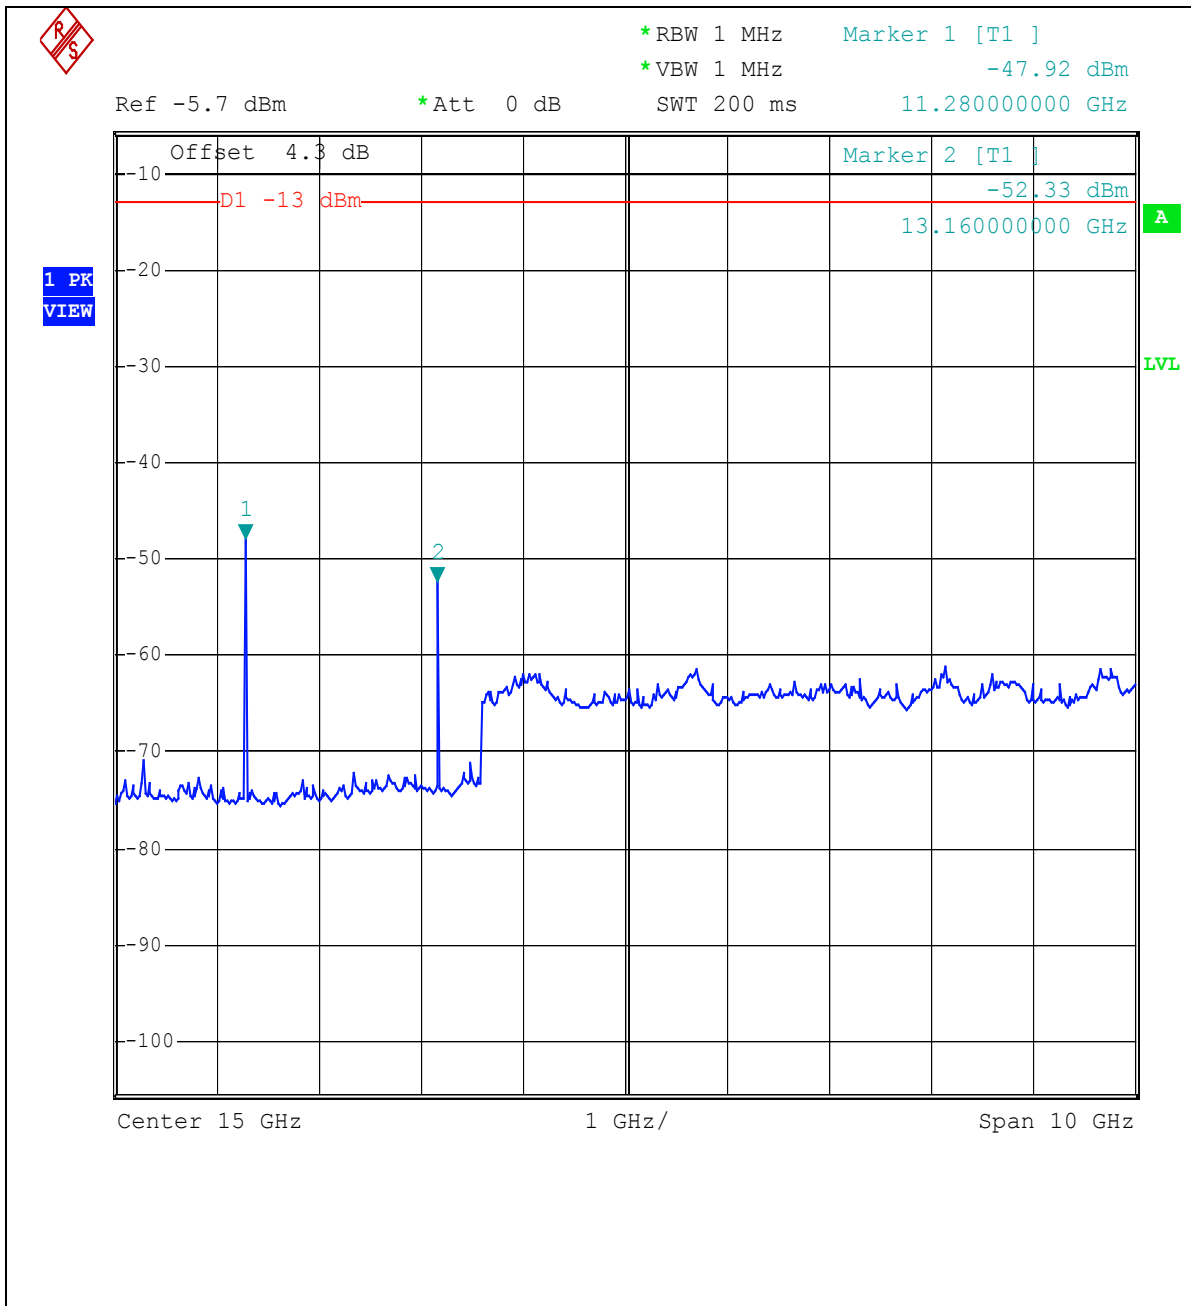



Channel 810 9kHz~3GHz

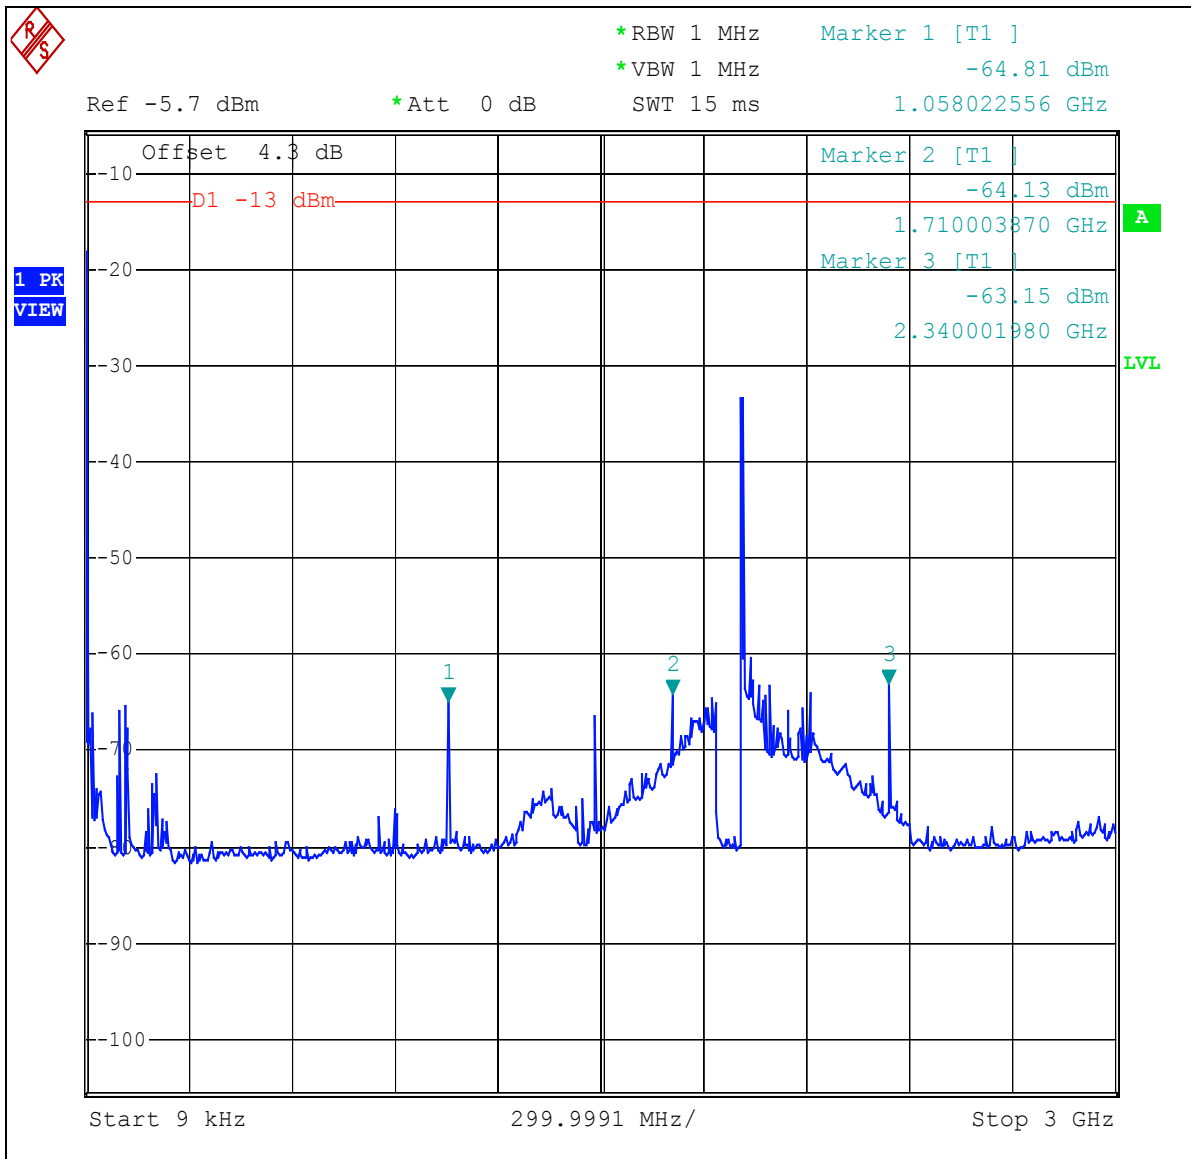


22221

Date: 17.AUG.2004 17:50:46



Channel 810 3GHz~10GHz

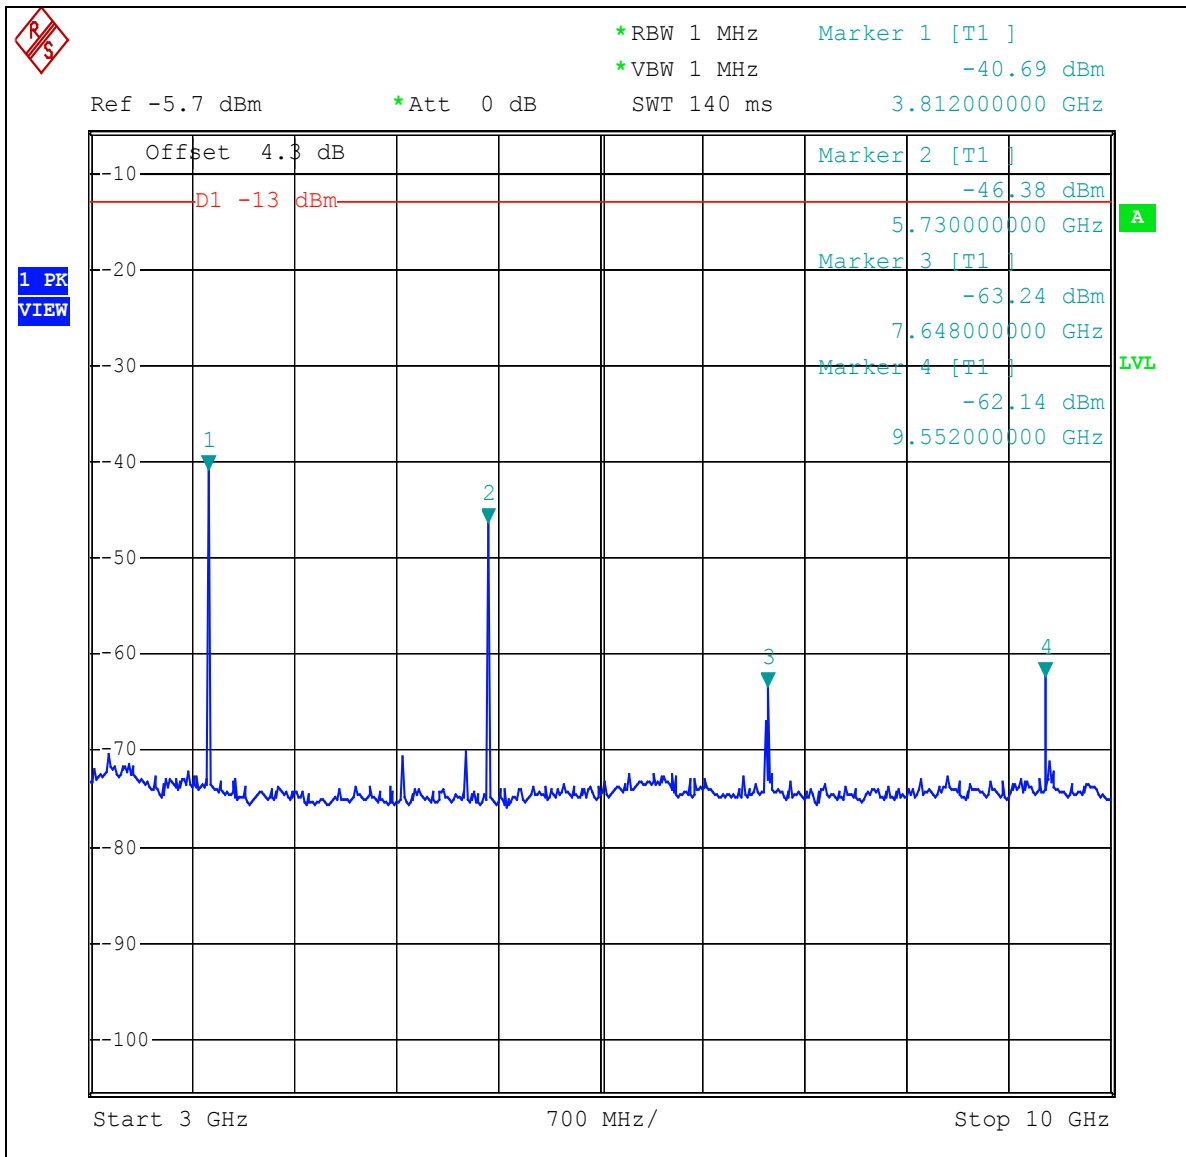


22221

Date: 17.AUG.2004 17:57:44



Channel 810 10GHz~20GHz

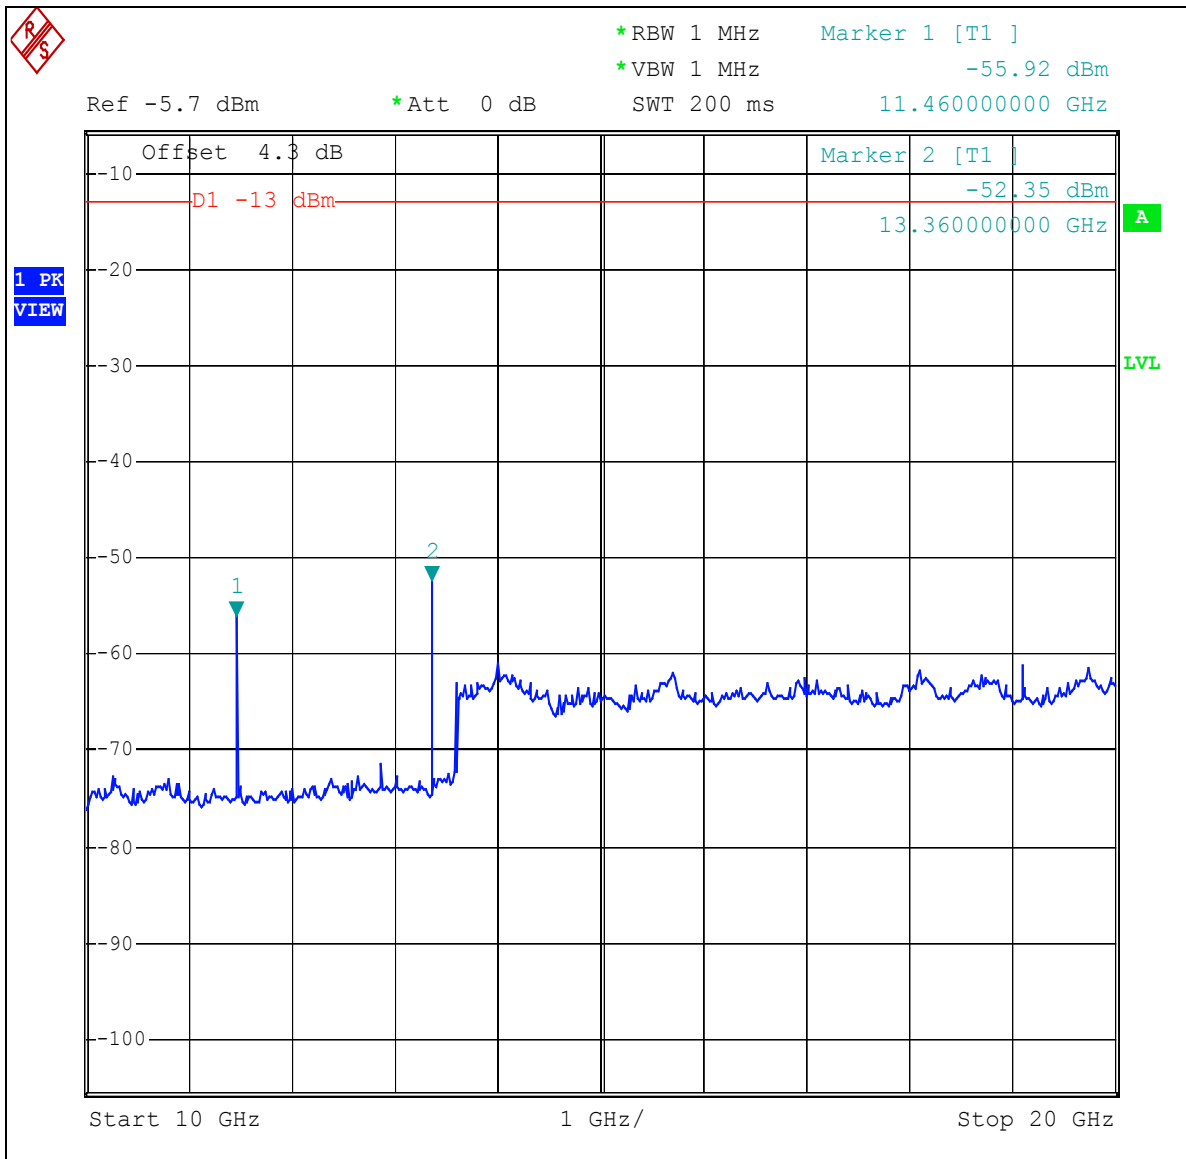

22221

Date: 17.AUG.2004 18:25:35

EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	Tx Channel 512	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Leo Hung	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1422	-64.54	3.68	-60.86	-13	-47.86
1710	-63.53	3.75	-59.78	-13	-46.78
2280	-62.86	3.84	-59.02	-13	-46.02
3700	-53.75	3.96	-49.79	-13	-36.79
5548	-43.90	4.17	-39.73	-13	-26.73
7410	-53.69	4.40	-49.29	-13	-36.29
9258	-54.30	4.45	-49.85	-13	-36.85
11100	-47.62	4.54	-52.16	-13	-39.16
12940	-48.72	4.67	-44.05	-13	-31.05
14800	-54.65	4.92	-49.73	-13	-36.73

REMARKS:

1. Peak Outp-49.73ut Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)



EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	Tx Channel 661	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Leo Hung	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1026	-65.02	3.58	-61.44	-13	-48.44
1734	-63.73	3.78	-59.95	-13	-46.95
2310	-62.00	3.89	-58.11	-13	-45.11
3756	-41.51	3.96	-45.47	-13	-32.47
5646	-45.88	4.21	-41.67	-13	-28.67
7522	-53.78	4.32	-49.46	-13	-36.46
9412	-62.51	4.46	-58.05	-13	-45.05
11280	-47.92	4.52	-43.40	-13	-30.40
13160	-52.33	4.65	-47.68	-13	-34.68

REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)



EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	Tx Channel 810	POWER CONTROL LEVEL	0
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak
ENVIRONMENTAL CONDITIONS	23 deg. C, 65% RH, 991 hPa	TESTED BY: Leo Hung	

CONDUCTED SPURIOUS EMISSION					
Frequency (MHz)	Raw (dBm)	Correction Factor(dB)	Conducted Level(dBm)	Limit (dBm)	Margin
1056	-64.81	3.57	-61.24	-13	-48.24
1710	-64.13	3.81	-60.32	-13	-47.32
2340	-63.15	3.86	-59.29	-13	-46.29
3812	-40.69	3.97	-36.72	-13	-23.72
5730	-46.38	4.10	-42.28	-13	-29.28
7648	-63.24	4.20	-59.04	-13	-46.04
9552	-62.14	4.31	-57.83	-13	-44.83
11460	-55.92	4.54	-51.38	-13	-38.38
13360	-52.35	4.85	-47.50	-13	-34.50

REMARKS:

1. Peak Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)



4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Jan. 13, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Dec. 15, 2004
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-408	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170247	Feb. 23, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2005
Preamplifier Agilent	8449B	3008A01961	Jan. 22, 2005
Preamplifier Agilent	8447D	2944A10629	Jan. 14, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Mar. 04, 2005
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA
Signal Generator ROHDE & SCHWARZ	SMD05	100011	May 28, 2005

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 1.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC4924-2.

4.7.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a-f for horizontal polarization.

- NOTE:**
1. The resolution bandwidth of spectrum analyzer is 10 kHz and the video bandwidth is 300 kHz for spurious emission below 1GHz.
 2. The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for spurious emission above 1GHz.
 3. The resolution bandwidth of spectrum analyzer is 100kHz and the video bandwidth is 100kHz for the transmitter output measurement.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

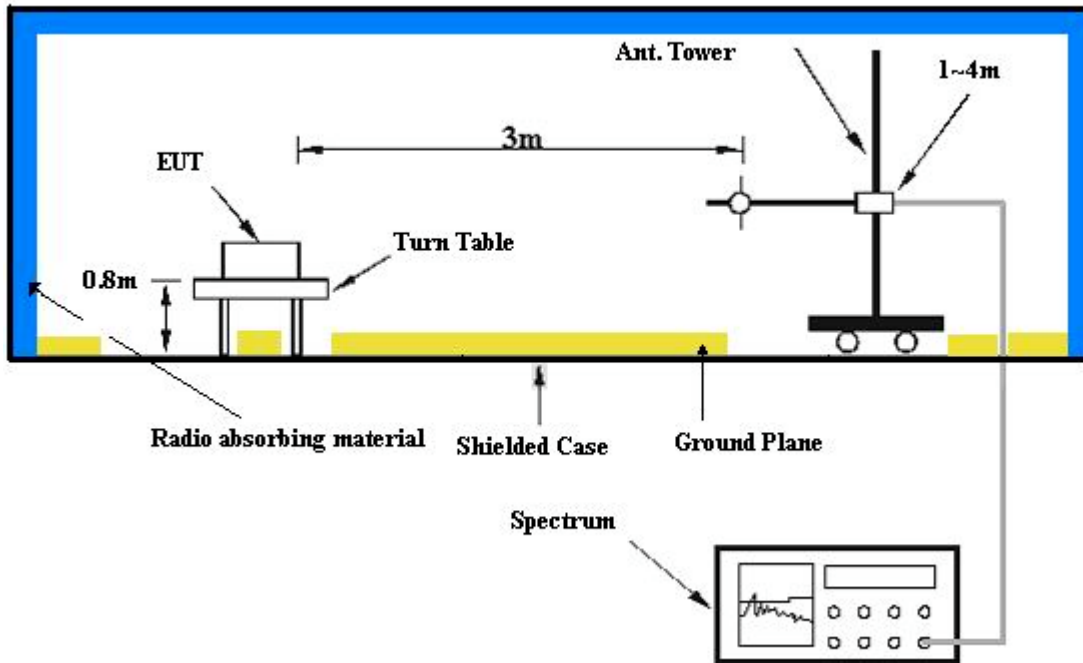

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the GSM simulator.
- b. The GSM simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.

4.7.7 TEST RESULTS

EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX connected Channel 512	FREQUENCY RANGE	Below 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	25 deg. C, 57 % RH, 991 hPa	TESTED BY: Steven Lu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	31.94	26.23 QP	-13.00	-60.29	-8.71	-7.67	1.04	-69.00
2	45.55	22.55 QP	-13.00	-63.94	-8.74	-7.71	1.03	-72.68
3	53.33	21.35 QP	-13.00	-65.11	-8.77	-7.71	1.06	-73.88
4	66.93	23.34 QP	-13.00	-62.99	-8.90	-7.74	1.16	-71.89
5	154.41	19.13 QP	-13.00	-67.12	-8.98	-7.80	1.18	-76.10
6	286.59	20.70 QP	-13.00	-65.40	-9.13	-7.93	1.20	-74.53
7	399.34	22.44 QP	-13.00	-63.89	-8.90	-7.70	1.20	-72.79
8	465.43	30.20 QP	-13.00	-56.07	-8.96	-7.80	1.16	-65.03
9	704.53	35.76 QP	-13.00	-50.39	-9.08	-7.90	1.18	-59.47
10	727.86	26.57 QP	-13.00	-59.55	-9.11	-7.90	1.21	-68.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	31.94	28.68 QP	-13.00	-57.84	-8.71	-7.67	1.04	-66.55
2	45.55	23.04 QP	-13.00	-63.45	-8.74	-7.71	1.03	-72.19
3	53.33	23.19 QP	-13.00	-63.27	-8.77	-7.71	1.06	-72.04
4	66.93	21.74 QP	-13.00	-64.59	-8.90	-7.74	1.16	-73.49
5	199.12	22.53 QP	-13.00	63.72	-8.98	-7.85	1.13	54.74
6	399.34	23.50 QP	-13.00	-62.83	-8.90	-7.70	1.20	-71.73
7	465.43	26.19 QP	-13.00	-60.14	-8.96	-7.70	1.20	-69.10
8	572.34	26.94 QP	-13.00	-59.14	-9.15	-7.90	1.25	-68.29
9	704.53	41.40 QP	-13.00	-44.75	-9.08	-7.90	1.18	-53.83
10	780.34	27.62 QP	-13.00	-58.41	-9.2	-7.80	1.40	-67.61
11	797.84	28.67 QP	-13.00	-57.35	-9.21	-7.80	1.41	-66.56
12	914.47	36.23 QP	-13.00	-49.65	-9.35	-7.80	1.55	-59.00
13	937.80	29.81 QP	-13.00	-56.04	-9.38	-7.80	1.58	-65.42

- NOTE:** 1. Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
 3. “-“ The emission levels were very low against the limit.

EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX Channel 512	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28 deg. C, 55 % RH, 991 hPa
TESTED BY	Rush Kao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	3700.00	61.93	-13.00	-43.55	10.25	12.65	2.40	-33.30
2	5500.00	67.38	-13.00	-37.55	9.70	12.80	3.10	-27.85
3	7401.00	62.75	-13.00	-40.28	7.80	11.80	4.00	-32.48
4	9251.00	66.99	-13.00	-36.04	7.80	12.30	4.50	-28.24
5	11101.00	71.73	-13.00	-30.35	6.85	12.05	5.20	-23.50
6	12951.00	71.48	-13.00	-31.95	8.20	13.90	5.70	-23.75
	14801.60	-	-	-	-	-	-	-
	16651.80	-	-	-	-	-	-	-
	18502.00	-	-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	3700.00	66.39	-13.00	-39.09	10.25	12.65	2.40	-28.84
2	5500.00	70.05	-13.00	-34.88	9.70	12.80	3.10	-25.18
3	7401.00	62.77	-13.00	-40.26	7.80	11.80	4.00	-32.46
4	9251.00	68.80	-13.00	-34.23	7.80	12.30	4.50	-26.43
5	11101.00	72.31	-13.00	-29.77	6.85	12.05	5.20	-22.92
6	12951.00	72.05	-13.00	-31.38	8.20	13.90	5.70	-23.18
	14801.60	-	-	-	-	-	-	-
	16651.80	-	-	-	-	-	-	-
	18502.00	-	-	-	-	-	-	-

- NOTE:** 1. Power Value (dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
3. “-“ The emission levels were very low against the limit.



EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX Channel 661	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28 deg. C, 55 % RH, 991 hPa
TESTED BY	Rush Kao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	3760.00	62.35	-13.00	-43.03	10.15	12.65	2.50	-32.88
2	5640.00	63.11	-13.00	-41.67	9.55	12.85	3.30	-32.12
3	7520.00	63.94	-13.00	-38.92	7.63	11.83	4.20	-31.29
4	9400.00	69.06	-13.00	-33.93	7.72	12.32	4.60	-26.21
5	11280.00	71.63	-13.00	-30.40	6.80	12.20	5.40	-23.60
6	13160.00	71.00	-13.00	-32-36	8.13	13.93	5.80	-24.23
	15040.00	-	-	-	-	-	-	-
	16920.00	-	-	-	-	-	-	-
	18800.00	-	-	-	-	-	-	-

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	3760.00	66.51	-13.00	-38.87	10.15	12.65	2.50	-28.72
2	5640.00	68.69	-13.00	-36.09	9.55	12.85	3.30	-26.54
3	7520.00	63.33	-13.00	-39.53	7.63	11.83	4.20	-31.90
4	9400.00	66.60	-13.00	-36.35	7.72	12.32	4.60	-28.63
5	11280.00	68.37	-13.00	-33.66	6.80	12.20	5.40	-26.86
6	15040.00	67.67	-13.00	-34.72	7.16	13.46	6.30	-27.56
	15040.00	-	-	-	-	-	-	-
	16920.00	-	-	-	-	-	-	-
	18800.00	-	-	-	-	-	-	-

- NOTE:**
1. Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
 3. “-“ The emission levels were very low against the limit.



EUT	Tri-band Mobile Phone	MODEL	S668C
MODE	TX Channel 810	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	28 deg. C, 55 % RH, 991 hPa
TESTED BY	Rush Kao		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	3819.00	63.23	-13.00	-42.08	10.08	12.71	2.63	-32.00
2	5729.00	61.56	-13.00	-43.24	9.57	13.02	3.45	-33.67
3	7639.00	64.61	-13.00	-37.97	7.35	11.72	4.37	-30.62
4	9549.00	70.14	-13.00	-32.74	7.65	12.35	4.70	-25.09
5	11459.00	70.16	-13.00	-31.66	6.59	12.09	5.50	-25.07
6	13369.00	69.46	-13.00	-32.97	7.20	13.20	6.00	-25.77
	15278.40	-	-	-	-	-	-	-
	17188.20	-	-	-	-	-	-	-
	19098.00	-	-	-	-	-	-	-


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Power Value (dBm)
1	3819.00	68.20	-13.00	-37.11	10.08	12.71	2.63	-27.03
2	5729.00	62.67	-13.00	-42.13	9.57	13.02	3.45	-32.56
3	7639.00	62.79	-13.00	-39.79	7.35	11.72	4.37	-32.44
4	9549.00	67.45	-13.00	-35.43	4.65	12.35	7.70	-27.78
5	11459.00	65.84	-13.00	-35.98	6.59	12.09	5.50	-29.39
6	13369.00	68.63	-13.00	-33.80	7.20	13.20	6.00	-26.60
	15278.40	-	-	-	-	-	-	-
	17188.20	-	-	-	-	-	-	-
	19098.00	-	-	-	-	-	-	-

- NOTE:**
1. Power Value (dBum) = S.G Power Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Substitution Antenna gain (dBi) - Cable Loss (dB)
 3. “-“ The emission levels were very low against the limit.


5 PHOTOGRAPHS OF THE TEST CONFIGURATION


RADIATED EMISSION TEST (Mode 1)



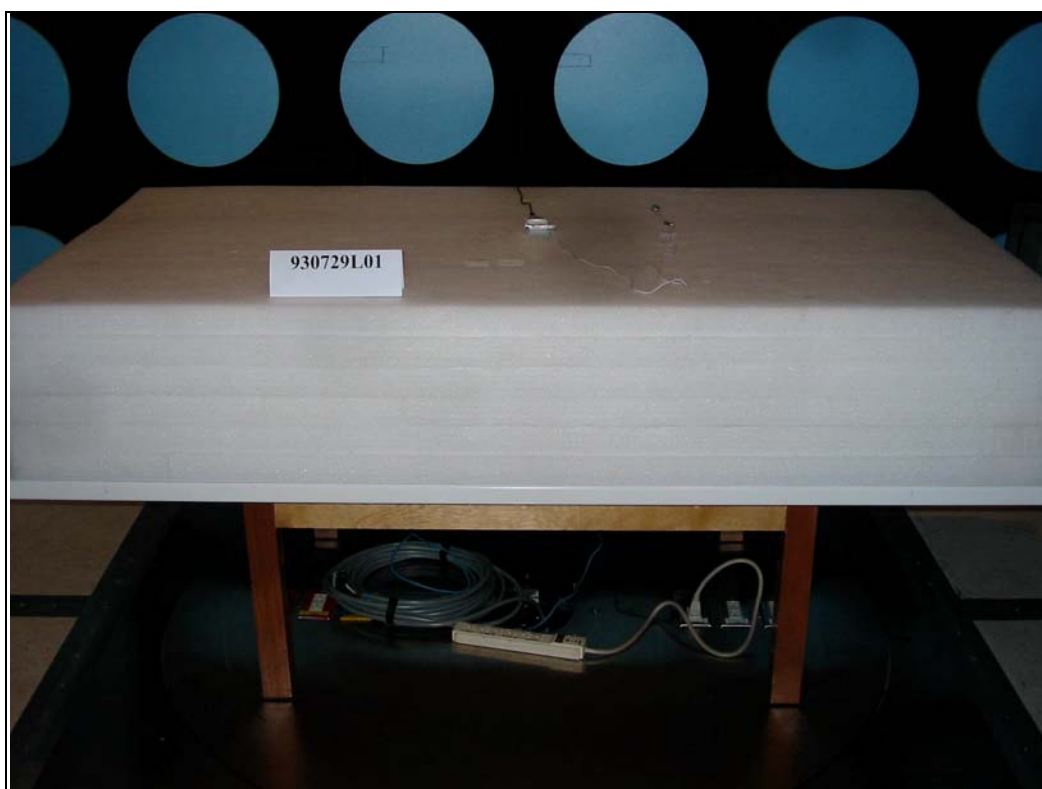


(Mode 2)

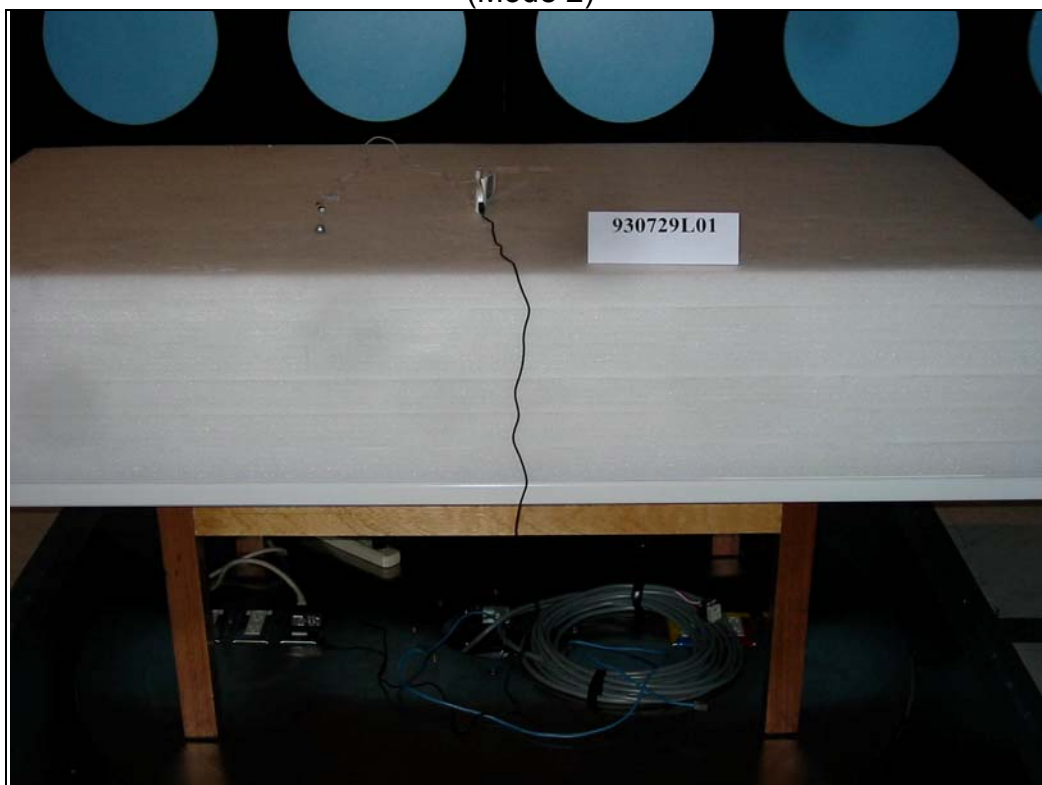

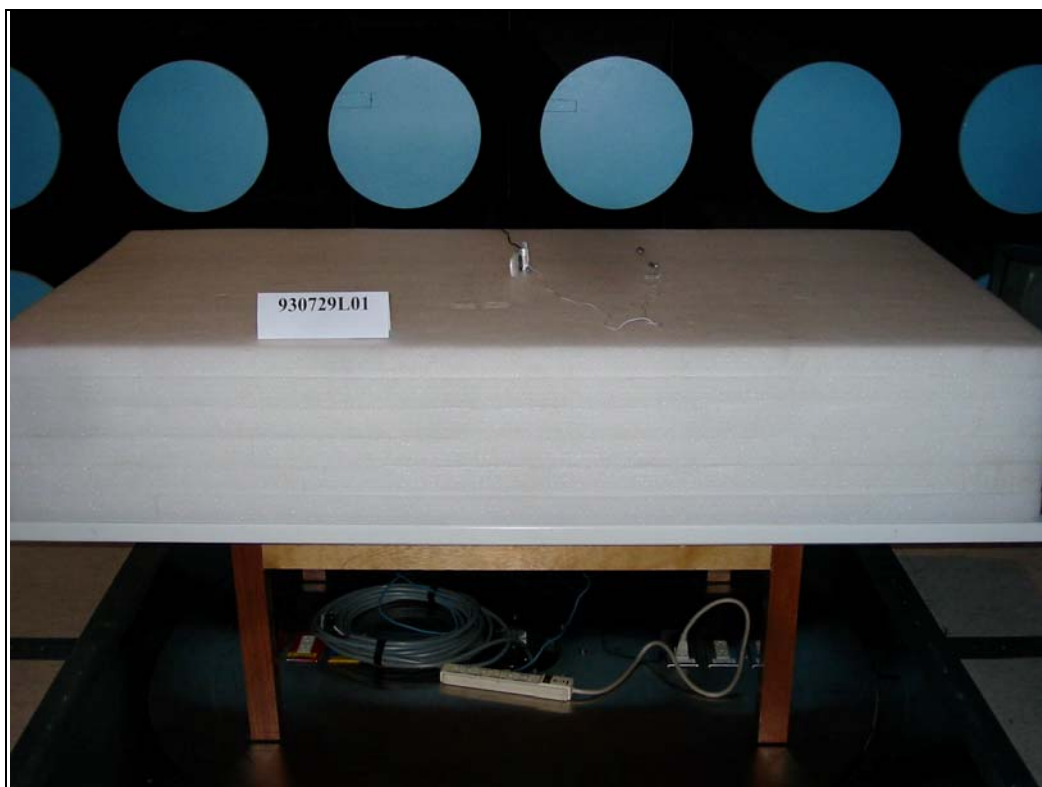

(Mode 3)



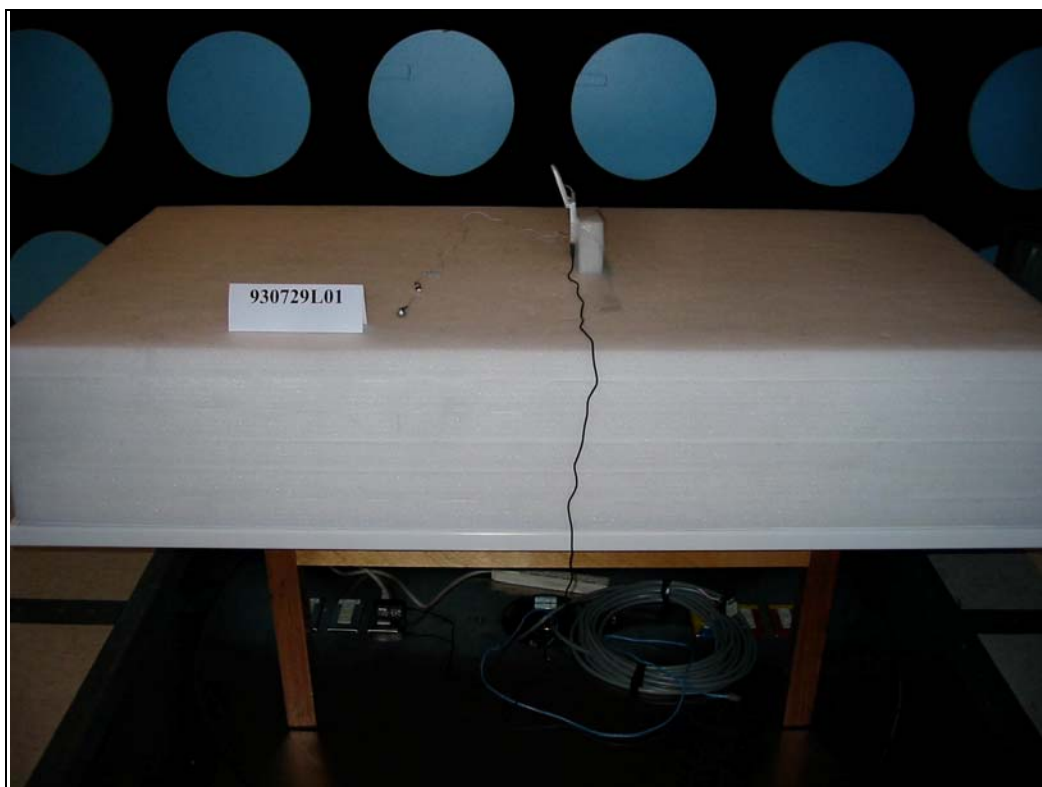



6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report Format Version 1.3