



# FCC RADIO TEST REPORT

Applicant : Benq Corporation  
Address : 16 Jihu Road, Neihu, Taipei 114, Taiwan  
Equipment : BenQ Wireless Dongle  
Model No. : WDR02U  
Trade Name : **BenQ**  
FCC ID : JVPWDR02U

## I HEREBY CERTIFY THAT :

The sample was received on Jul. 25, 2018 and the testing was carried out on Nov. 01, 2018 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Tested by:

Mark Liao / Assistant Manager

Amos Zhang / Engineer

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory

TAF LAB Code:	1439
---------------	------



## CONTENTS

<b>1. Summary of Test Procedure and Test Results</b> .....	<b>5</b>
1.1 Applicable Standards.....	5
<b>2. Test Configuration of Equipment under Test</b> .....	<b>6</b>
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software.....	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty.....	8
2.7 Duty cycle.....	9
<b>3. Test Equipment and Ancillaries Used for Tests</b> .....	<b>10</b>
<b>4. Antenna Requirements</b> .....	<b>11</b>
4.1 Standard Applicable.....	11
4.2 Antenna Construction and Directional Gain.....	11
<b>5. Test of AC Power Line Conducted Emission</b> .....	<b>12</b>
5.1 Test Limit.....	12
5.2 Test Procedures.....	12
5.3 Typical Test Setup.....	12
5.4 Test Result and Data.....	13
<b>6. Test of Spurious Emission (Radiated)</b> .....	<b>15</b>
6.1 Test Limit.....	15
6.2 Test Procedures.....	15
6.3 Typical Test Setup.....	16
6.4 Test Result and Data (9KHz ~ 30MHz).....	17
6.5 Test Result and Data (30MHz ~ 1GHz).....	17
6.6 Test Result and Data (1GHz ~ 25GHz).....	18
6.7 Restricted Bands of Operation.....	30
6.8 Restrict Band Emission Measurement Data.....	31
<b>7. Test of Spurious Emission (Conducted)</b> .....	<b>35</b>
7.1 Test Limit.....	35
7.2 Test Procedure.....	35
7.3 Test Setup Layout.....	35
7.4 Test Result and Data.....	36
<b>8. 6dB Bandwidth Measurement Data</b> .....	<b>45</b>
8.1 Test Limit.....	45
8.2 Test Procedures.....	45
8.3 Test Setup Layout.....	45
8.4 Test Result and Data.....	45
<b>9. Maximum Peak Output Power</b> .....	<b>51</b>
9.1 Test Limit.....	51
9.2 Test Procedures.....	51
9.3 Test Setup Layout.....	51
9.4 Test Result and Data.....	52
<b>10. Power Spectral Density</b> .....	<b>53</b>
10.1 Test Limit.....	53



10.2 Test Procedures .....	53
10.3 Test Setup Layout.....	53
10.4 Test Result and Data .....	54



**History of this test report**

■ ORIGINAL

Additional attachment as following record:

Attachment No.	Issue Date	Description



# 1. Summary of Test Procedure and Test Results

## 1.1 Applicable Standards

ANSI C63.10: 2013

KDB 558074 D01 DTS Meas Guidance v03r05

FCC Rules and Regulations Part 15 Subpart C §15.247

FCC Rule	Description of Test	Result
FCC CFR Title 47 Part 15 Subpart C: Section 15.203/15.247 (b)	. Antenna Requirement	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.207	. AC Power Line Conducted Emission	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.205/15.209; Part2 section 2.1051, 2.1053, 2.1057	. Spurious Emission(Radiated)	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(d); Part2 section 2.1051 and 2.1057	. Spurious Emission(Conducted)	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(a)(2); Part2 section 2.1049	. 6dB Bandwidth	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(b); Part2 section 2.1046	. Maximum Peak Output Power	Pass
FCC CFR Title 47 Part 15 Subpart C: Section 15.247(e)	. Power Spectral Density	Pass



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Equipment	BenQ Wireless Dongle
Model No.	WDR02U
Spreading	802.11b: CCK, DQPSK, DBPSK 802.11g: 64 QAM, 16 QAM, QPSK, BPSK 802.11n: BPSK, QPSK, 16QAM, 64QAM
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	802.11b/g/n/ac (20MHz):11 802.11n/ac (40MHz): 7
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT 20/40

Note: for more details, please refer to the User's manual of the EUT.

### 2.2 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n HT 20, 802.11ac VHT20 (2412MHz~2462MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
<b>*01</b>	<b>2412</b>	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	<b>*11</b>	<b>2462</b>
<b>*06</b>	<b>2437</b>	---	---

802.11an HT40, 802.11ac VHT40 (2422-2452MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
<b>*03</b>	<b>2422</b>	<b>*09</b>	<b>2452</b>
04	2427	---	---
05	2432	---	---
<b>*06</b>	<b>2437</b>	---	---

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- b. The complete test system included support units and EUT for the RF test.
- c. An executive program, "MT7662UQA.exe" which transmits and receives data through Wireless.
- d. The EUT had been tested under operating condition  
 After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.  
 EUT staying in continuous transmitting mode was programmed.
- e. Test modes:
  - Mode 1: IEEE 802.11b
  - Mode 2: IEEE 802.11g
  - Mode 3: IEEE 802.11ac VHT20
  - Mode 4: IEEE 802.11ac VHT40

Note: The EUT incorporates a MIMO function. the EUT provides two completed transmitters and two receivers.

MODULATION MODE	Tx Function
802.11b	2TX
802.11g	2TX
IEEE 802.11n HT20	2TX
IEEE 802.11n HT40	2TX

### 2.4 Description of Test System

No	Device	Manufacturer	Model No.	Description
1	Notebook	SONY	PCG-71811P	R33021

Use Cable:

No.	Cable	Quantity	Description
-----	-------	----------	-------------



## 2.5 General Information of Test

☒	Test Site	<b>CerpPASS Technology Corporation Test Laboratory</b> Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel:+886-3-3226-888 Fax:+886-3-3226-881 Address: No.68-1, Shihbachongsi, Shihding Township, New Taipei City 223, Taiwan, R.O.C. Tel: +886-2-2663-8582
	FCC	TW1079, TW1061, TW1439
	IC	4934E-1, 4934E-2
	VCCI	T-2205 for Telecommunication Test C-4663 for Conducted emission test R-4399,R-4218 for Radiated emission test G-10812, G-10813 for radiated disturbance above 1GHz
Frequency Range Investigated:		Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 25000MHz
Test Distance:		The test distance of radiated emission from antenna to EUT is 3 M.

## 2.6 Measurement Uncertainty

Measurement Item	Uncertainty
Radiated Spurious Emission(9KHz~30MHz)	±5.007dB
Radiated Spurious Emission(30MHz~1GHz)	±5.157dB
Radiated Spurious Emission(1GHz~18GHz)	±6.383dB
Radiated Spurious Emission(18GHz~40GHz)	±6.648dB
Conducted Spurious Emission	±1.253dB
6dB Bandwidth	±6.89%
Power Spectral Density	±0.630dB
26 dB Occupied Bandwidth	±6.10%
Frequency Stability	±375KHz
Channel Frequencies Separation	±6.10%
20dB Bandwidth	±6.12%
Dwell Time	±1.34%
Peak Output Power(Conducted Power Meter)	±0.86dB
Temperature	±1.2oC
Humidity	±2.7%
Channel Move Time	±4.53%
Channel Closing Transmission Time	±6.61%
Threshold	±0.631dB
Non occupancy period	±1.17%






### 2.7 Duty cycle


Test Item	Duty cycle
Test Date	Aug. 11, 2018

Mode	Frequency (MHz)	Measurement (%)
802.11b	2412	100
802.11g	2412	100
802.11n(20MHz)	2412	100
802.11n(40MHz)	2412	100


Transmit at channel 1 by 802.11b

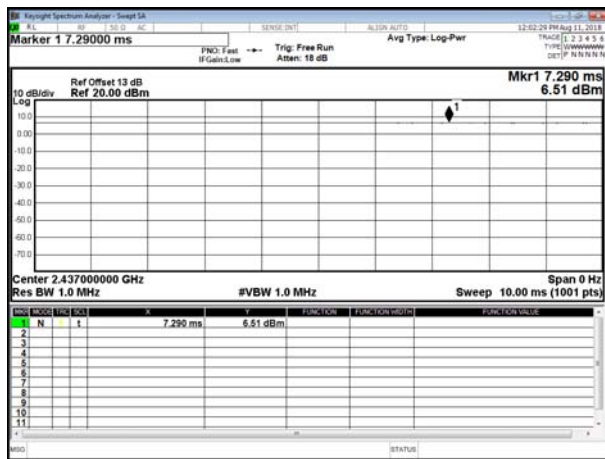


Transmit at channel 1 by 802.11g

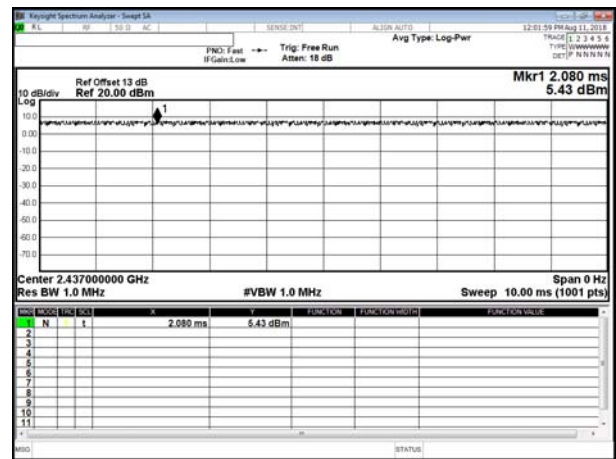

Transmit at channel 1 by 802.11n(20MHz)

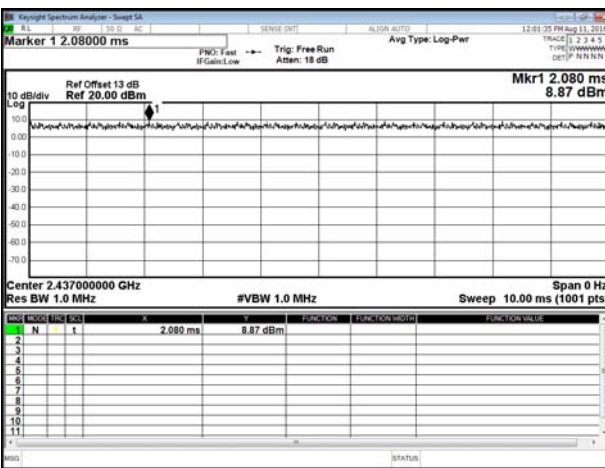

Transmit at channel 1 by 802.11n(20MHz)

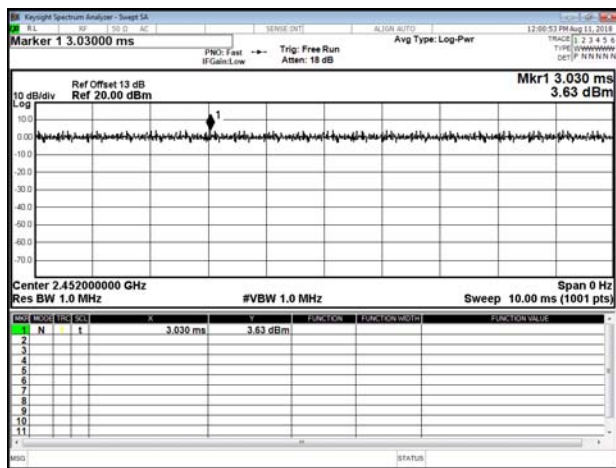



### 3. Test Equipment and Ancillaries Used for Tests

Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
EMI Receiver	R&S	ESCI3	100443	2018/03/15	2019/03/14
LISN	Schwarzbeck	NSLK 8127	8127-568	2018/02/26	2019/02/25
Pulse Limiter	R&S	ESH3-Z2	101934	2018/02/22	2019/02/21
Bilog Antenna	Schwarzbeck	VULB9168	275	2018/09/17	2019/09/16
Active Loop Antenna	EMCO	6507	40855	2018/05/22	2019/05/21
Horn Antenna	EMCO	3115	31589	2018/04/02	2019/04/01
Horn Antenna	EMCO	3116	31970	2018/03/23	2019/03/22
Preamplifier	EM	EM330	60658	2018/09/08	2019/09/07
Preamplifier	EMC INSTRUMENTS	EMC051845SE	980333	2018/09/18	2019/09/17
Preamplifier	EMC INSTRUMENTS	EMC184045	980065	2017/11/10	2018/11/09
MXG MW Analog Signal Generator	KEYSIGHT	N5183A	MY50142931	2018/04/10	2019/04/09
Spectrum Analyzer	R&S	FSP40	100219	2018/07/03	2019/07/02
BLUETOOTH TESTER	R&S	CBT	101133	2018/04/02	2019/04/01
Attenuator	KEYSIGHT	8491B	MY39250705	2018/09/04	2019/09/03
Rotary Attenuator	Agilent	8495B	MY42146680	2018/03/29	2019/03/28
Temp & Humi chamber	T-MACHINE	TMJ-9712	T-12-040111	2018/08/30	2019/08/29
Series Power Meter	Anritsu	ML2495A	1224005	2018/03/23	2019/03/22
Power Sensor	Anritsu	MA2411B	1207295	2018/03/23	2019/03/22
Software	Farad	Ez-EMC	ver.ct3a1	N/A	N/A
Software	AUDIX	E3	V8.2014-8-6	N/A	N/A
Software	Keysight	N7607B Signal Studio	V3.0.0.0	N/A	N/A
Software	Keysight	Inservice MonitorUtility	N/A	N/A	N/A



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

Antenna	Peak Gain
PCB Antenna	WiFi; Antenna 1:2.0dBi; Antenna 2:2.0dBi Bluetooth: 2dBi



## 5. Test of AC Power Line Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.


Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

The EUT was setup according to ANSI C63.10, 2013 and tested according to DTS test procedure of Oct 2014 KDB558074 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


### 5.3 Typical Test Setup

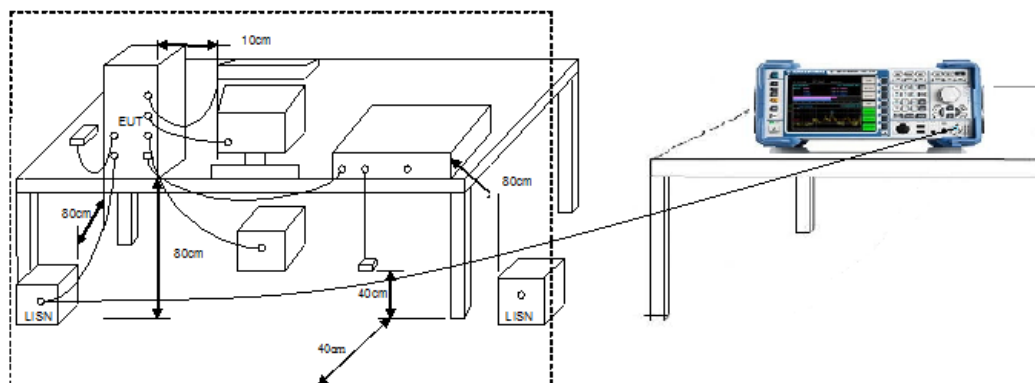



5.4 Test Result and Data

Test Mode :	Normal Link	Phase :	Line
Temperature :	20°C	Humidity:	51%
Pressur(mbar) :	1002	Date:	Aug.12, 2018

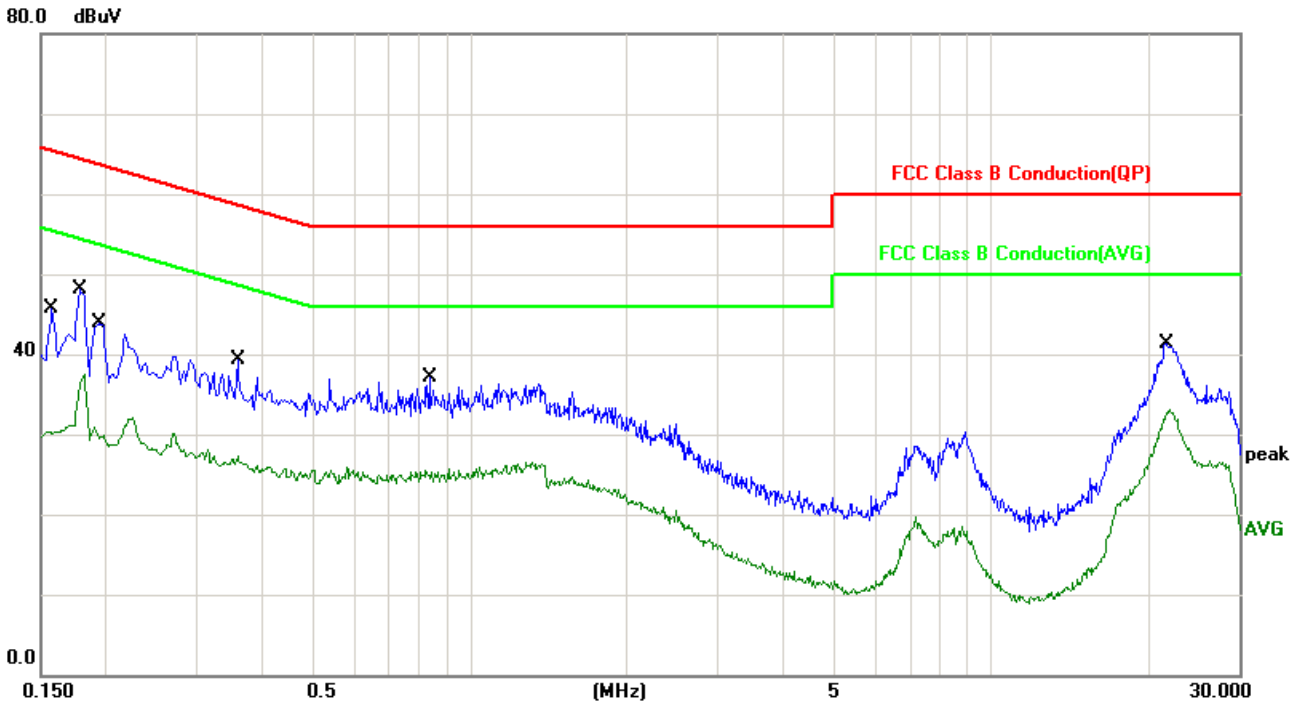


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	10.06	27.13	37.19	65.56	-28.37	QP
2	0.1580	10.06	19.63	29.69	55.56	-25.87	AVG
3	0.1780	10.06	35.02	45.08	64.57	-19.49	QP
4	0.1780	10.06	25.29	35.35	54.57	-19.22	AVG
5	0.1940	10.06	28.72	38.78	63.86	-25.08	QP
6	0.1940	10.06	19.66	29.72	53.86	-24.14	AVG
7	0.3580	9.97	21.77	31.74	58.77	-27.03	QP
8	0.3580	9.97	16.33	26.30	48.77	-22.47	AVG
9	0.8380	10.10	20.54	30.64	56.00	-25.36	QP
10	0.8380	10.10	14.68	24.78	46.00	-21.22	AVG
11	21.7500	10.58	25.87	36.45	60.00	-23.55	QP
12	21.7500	10.58	20.97	31.55	50.00	-18.45	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



Test Mode :	Normal Link	Phase :	Neutral
Temperature :	20°C	Humidity :	51%
Pressur(mbar) :	1002	Date :	Aug.12, 2018

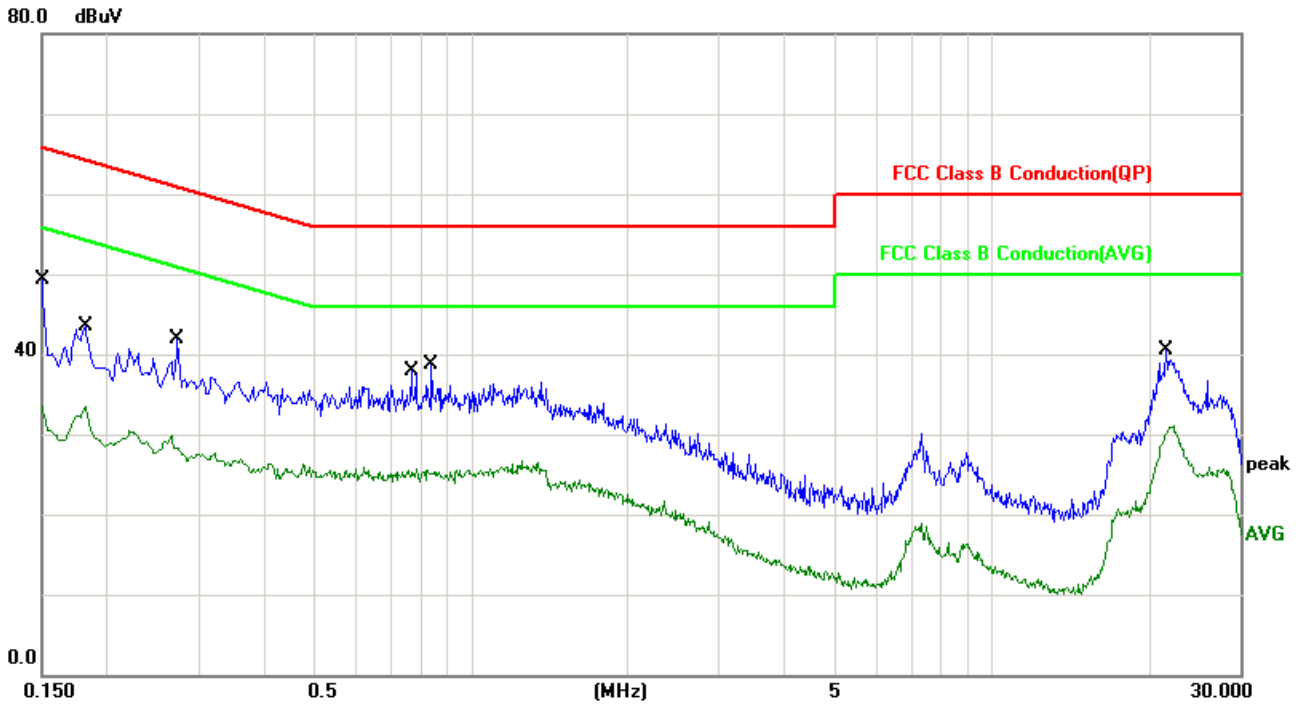

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	10.06	37.28	47.34	65.99	-18.65	QP
2	0.1500	10.06	23.63	33.69	55.99	-22.30	AVG
3	0.1819	10.06	29.45	39.51	64.39	-24.88	QP
4	0.1819	10.06	22.35	32.41	54.39	-21.98	AVG
5	0.2740	10.02	24.42	34.44	60.99	-26.55	QP
6	0.2740	10.02	18.57	28.59	50.99	-22.40	AVG
7	0.7700	10.08	20.04	30.12	56.00	-25.88	QP
8	0.7700	10.08	14.71	24.79	46.00	-21.21	AVG
9	0.8420	10.10	21.15	31.25	56.00	-24.75	QP
10	0.8420	10.10	14.89	24.99	46.00	-21.01	AVG
11	21.6380	10.57	23.54	34.11	60.00	-25.89	QP
12	21.6380	10.57	18.44	29.01	50.00	-20.99	AVG

Note: Measurement Level = Reading Level + Correct Factor+ Attenuator



## 6. Test of Spurious Emission (Radiated)

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


### 6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter for frequency below 1GHz and 1.5meter for frequency above 1GHz above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than AVG limit (that means the emission level in peak mode also complies with the limit in AVG mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in AVG mode again and reported.




### 6.3 Typical Test Setup


Below 30MHz Test Setup

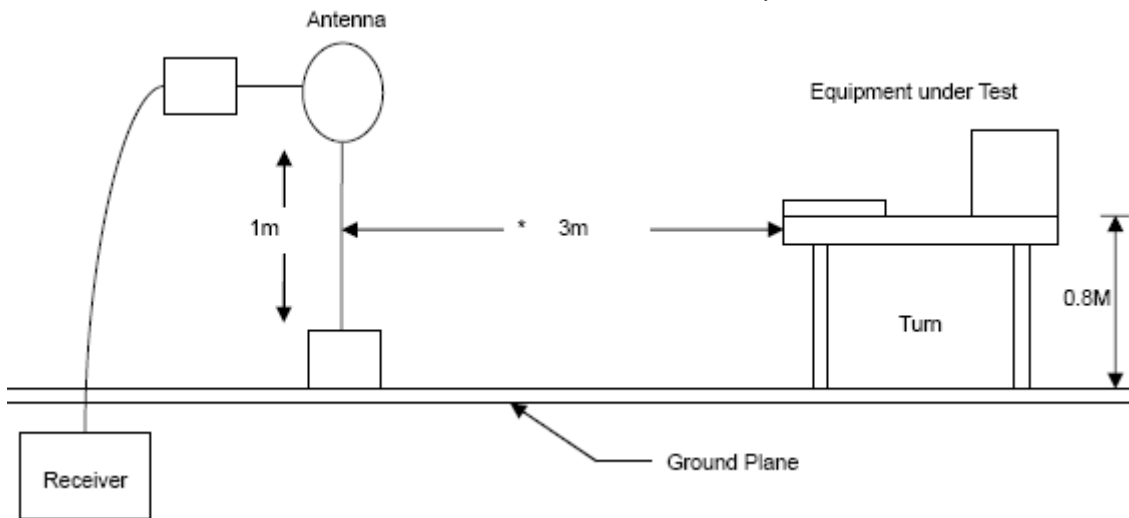

30M - 1GHz Test Setup

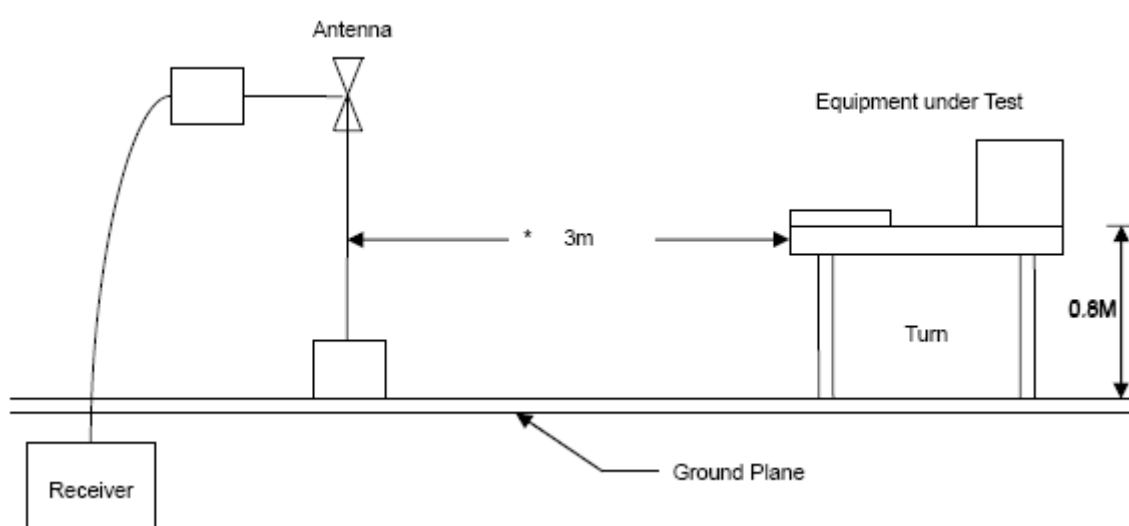

Above 1GHz Test Setup

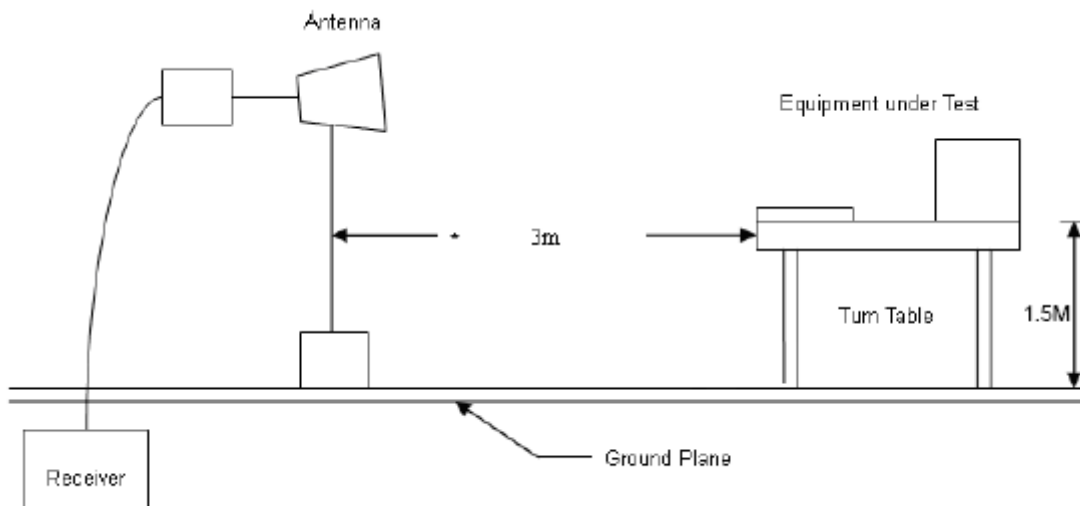



**6.4 Test Result and Data (9KHz ~ 30MHz)**

The 9kHz-30MHz spurious emission is under limit 20dB more.

**6.5 Test Result and Data (30MHz ~ 1GHz)**

Power	: AC120V/60Hz	Temperature	: 24 °C
Test Mode	: Normal Link	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/QP)
32.9099	H	-4.78	36.07	31.29	40.00	-8.71	peak
95.9599	H	-10.21	38.80	28.59	43.50	-14.91	peak
154.1598	H	-11.53	36.01	24.48	43.50	-19.02	peak
209.4499	H	-9.50	36.06	26.56	43.50	-16.94	peak
480.0799	H	-1.10	25.99	24.89	46.00	-21.11	peak
960.2300	H	3.17	32.24	35.41	54.00	-18.59	peak
35.8200	V	-6.56	35.56	29.00	40.00	-11.00	peak
71.7099	V	-14.83	41.26	26.43	40.00	-13.57	peak
197.8100	V	-9.77	34.14	24.37	43.50	-19.13	peak
239.5200	V	-9.06	35.00	25.94	46.00	-20.06	peak
431.5799	V	-4.60	27.69	23.09	46.00	-22.91	peak
960.2300	V	3.17	30.65	33.82	54.00	-20.18	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor

**6.6 Test Result and Data (1GHz ~ 25GHz)**

Power	: AC120V/60Hz	Temperature	: 24 °C
Test Mode1	802.11b (2412MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1396.667	H	-2.55	50.50	47.95	74.00	-26.05	peak
3720.000	H	10.15	31.69	41.84	74.00	-32.16	peak
4825.000	H	14.27	39.24	53.51	74.00	-20.49	peak
6128.333	H	16.31	30.82	47.13	74.00	-26.87	peak
7261.667	H	19.10	31.09	50.19	74.00	-23.81	peak
7743.333	H	20.15	32.21	52.36	74.00	-21.64	peak
1765.000	V	-0.08	47.44	47.36	74.00	-26.64	peak
3323.333	V	8.47	38.00	46.47	74.00	-27.53	peak
4343.333	V	12.86	31.31	44.17	74.00	-29.83	peak
4825.000	V	14.27	37.74	52.01	74.00	-21.99	peak
6156.667	V	16.32	30.70	47.02	74.00	-26.98	peak
7035.000	V	18.22	30.30	48.52	74.00	-25.48	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode1	802.11b (2437MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1340.000	H	-3.07	49.01	45.94	74.00	-28.06	peak
1651.667	H	-0.74	47.04	46.30	74.00	-27.70	peak
4881.667	H	14.38	38.21	52.59	74.00	-21.41	peak
6015.000	H	16.27	30.91	47.18	74.00	-26.82	peak
6468.333	H	16.45	29.09	45.54	74.00	-28.46	peak
7545.000	H	20.05	30.89	50.94	74.00	-23.06	peak
1651.667	V	-0.74	43.50	42.76	74.00	-31.24	peak
3521.667	V	9.47	32.74	42.21	74.00	-31.79	peak
4400.000	V	13.15	30.27	43.42	74.00	-30.58	peak
4881.667	V	14.38	37.15	51.53	74.00	-22.47	peak
6100.000	V	16.30	30.65	46.95	74.00	-27.05	peak
7375.000	V	19.54	28.49	48.03	74.00	-25.97	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode1	802.11b (2462MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1425.000	H	-2.29	47.95	45.66	74.00	-28.34	peak
3295.000	H	8.32	33.93	42.25	74.00	-31.75	peak
4201.667	H	12.14	30.69	42.83	74.00	-31.17	peak
4938.333	H	14.48	38.92	53.40	74.00	-20.60	peak
6468.333	H	16.45	30.91	47.36	74.00	-26.64	peak
7488.333	H	19.98	32.35	52.33	74.00	-21.67	peak
1368.333	V	-2.81	50.85	48.04	74.00	-25.96	peak
1878.333	V	0.57	47.83	48.40	74.00	-25.60	peak
3408.333	V	8.92	35.00	43.92	74.00	-30.08	peak
4938.333	V	14.48	36.45	50.93	74.00	-23.07	peak
5788.333	V	15.74	30.79	46.53	74.00	-27.47	peak
7120.000	V	18.55	31.15	49.70	74.00	-24.30	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode2	: 802.11g (2412MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1368.333	H	-2.81	49.62	46.81	74.00	-27.19	peak
1850.000	H	0.41	46.82	47.23	74.00	-26.77	peak
2983.333	H	6.66	38.26	44.92	74.00	-29.08	peak
4825.000	H	14.27	37.66	51.93	74.00	-22.07	peak
6015.000	H	16.27	30.09	46.36	74.00	-27.64	peak
1368.333	V	-2.81	49.64	46.83	74.00	-27.17	peak
2813.333	V	5.52	39.87	45.39	74.00	-28.61	peak
4400.000	V	13.15	31.02	44.17	74.00	-29.83	peak
4825.000	V	14.27	36.33	50.60	74.00	-23.40	peak
6525.000	V	16.54	29.52	46.06	74.00	-27.94	peak
7375.000	V	19.54	28.16	47.70	74.00	-26.30	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode2	: 802.11g (2437MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1680.000	H	-0.57	49.30	48.73	74.00	-25.27	peak
3295.000	H	8.32	38.56	46.88	74.00	-27.12	peak
4881.667	H	14.38	38.69	53.07	74.00	-20.93	peak
5675.000	H	15.45	32.08	47.53	74.00	-26.47	peak
6553.333	H	16.63	32.85	49.48	74.00	-24.52	peak
7601.667	H	20.08	30.22	50.30	74.00	-23.70	peak
1226.667	V	-4.10	47.44	43.34	74.00	-30.66	peak
3833.333	V	10.54	31.67	42.21	74.00	-31.79	peak
4201.667	V	12.14	31.40	43.54	74.00	-30.46	peak
4881.667	V	14.38	36.64	51.02	74.00	-22.98	peak
6525.000	V	16.54	30.69	47.23	74.00	-26.77	peak
7346.667	V	19.43	29.24	48.67	74.00	-25.33	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode2	: 802.11g (2462MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1226.667	H	-4.10	50.89	46.79	74.00	-27.21	peak
1708.333	H	-0.41	46.13	45.72	74.00	-28.28	peak
4513.333	H	13.69	30.69	44.38	74.00	-29.62	peak
4910.000	H	14.43	38.14	52.57	74.00	-21.43	peak
5448.333	H	14.98	31.09	46.07	74.00	-27.93	peak
7261.667	H	19.10	29.74	48.84	74.00	-25.16	peak
1453.333	V	-2.04	48.22	46.18	74.00	-27.82	peak
1963.333	V	1.06	45.95	47.01	74.00	-26.99	peak
3946.667	V	10.93	33.43	44.36	74.00	-29.64	peak
4910.000	V	14.43	36.77	51.20	74.00	-22.80	peak
6128.333	V	16.31	30.48	46.79	74.00	-27.21	peak
7431.667	V	19.76	28.52	48.28	74.00	-25.72	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode3	802.11ac VHT20 (2412MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1708.333	H	-0.41	44.23	43.82	74.00	-30.18	peak
3578.333	H	9.67	35.67	45.34	74.00	-28.66	peak
4541.667	H	13.74	30.38	44.12	74.00	-29.88	peak
4825.000	H	14.27	37.47	51.74	74.00	-22.26	peak
6128.333	H	16.31	30.86	47.17	74.00	-26.83	peak
7148.333	H	18.66	30.41	49.07	74.00	-24.93	peak
2133.333	V	1.84	39.18	41.02	74.00	-32.98	peak
3493.333	V	9.36	32.90	42.26	74.00	-31.74	peak
4825.000	V	14.27	35.33	49.60	74.00	-24.40	peak
5278.333	V	14.83	29.90	44.73	74.00	-29.27	peak
6581.667	V	16.72	30.39	47.11	74.00	-26.89	peak
7431.667	V	19.76	29.25	49.01	74.00	-24.99	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor





Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode3	802.11ac VHT20 (2437MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1793.333	H	0.08	46.38	46.46	74.00	-27.54	peak
3833.333	H	10.54	30.80	41.34	74.00	-32.66	peak
4881.667	H	14.38	37.19	51.57	74.00	-22.43	peak
5590.000	H	15.24	31.75	46.99	74.00	-27.01	peak
6695.000	H	17.09	30.98	48.07	74.00	-25.93	peak
7460.000	H	19.87	28.94	48.81	74.00	-25.19	peak
1368.333	V	-2.81	48.52	45.71	74.00	-28.29	peak
1821.667	V	0.24	45.10	45.34	74.00	-28.66	peak
3550.000	V	9.57	34.95	44.52	74.00	-29.48	peak
4881.667	V	14.38	36.14	50.52	74.00	-23.48	peak
5958.333	V	16.16	30.94	47.10	74.00	-26.90	peak
7261.667	V	19.10	30.50	49.60	74.00	-24.40	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode4	802.11ac VHT20 (2462MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1708.333	H	-0.41	45.63	45.22	74.00	-28.78	peak
4201.667	H	12.14	33.80	45.94	74.00	-28.06	peak
4910.000	H	14.43	39.24	53.67	74.00	-20.33	peak
5703.333	H	15.52	31.94	47.46	74.00	-26.54	peak
6298.333	H	16.38	32.13	48.51	74.00	-25.49	peak
7403.333	H	19.65	29.61	49.26	74.00	-24.74	peak
1510.000	V	-1.55	45.54	43.99	74.00	-30.01	peak
4003.333	V	11.13	34.21	45.34	74.00	-28.66	peak
4910.000	V	14.43	35.21	49.64	74.00	-24.36	peak
5618.333	V	15.31	31.51	46.82	74.00	-27.18	peak
6326.667	V	16.39	30.52	46.91	74.00	-27.09	peak
7346.667	V	19.43	29.95	49.38	74.00	-24.62	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode4	802.11ac VHT40 (2422MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1425.000	H	-2.29	51.53	49.24	74.00	-24.76	peak
3550.000	H	9.57	32.56	42.13	74.00	-31.87	peak
4853.333	H	14.32	36.71	51.03	74.00	-22.97	peak
5335.000	H	14.88	30.42	45.30	74.00	-28.70	peak
6553.333	H	16.63	29.40	46.03	74.00	-27.97	peak
7290.000	H	19.21	29.72	48.93	74.00	-25.07	peak
1425.000	V	-2.29	51.36	49.07	74.00	-24.93	peak
3408.333	V	8.92	33.33	42.25	74.00	-31.75	peak
4853.333	V	14.32	35.49	49.81	74.00	-24.19	peak
5646.667	V	15.38	31.89	47.27	74.00	-26.73	peak
6100.000	V	16.30	30.45	46.75	74.00	-27.25	peak
7120.000	V	18.55	30.60	49.15	74.00	-24.85	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode4	802.11ac VHT40 (2437MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1453.333	H	-2.04	49.58	47.54	74.00	-26.46	peak
3578.333	H	9.67	37.56	47.23	74.00	-26.77	peak
4428.333	H	13.29	30.88	44.17	74.00	-29.83	peak
4881.667	H	14.38	36.07	50.45	74.00	-23.55	peak
6015.000	H	16.27	32.40	48.67	74.00	-25.33	peak
7318.333	H	19.32	30.23	49.55	74.00	-24.45	peak
1396.667	V	-2.55	47.51	44.96	74.00	-29.04	peak
3465.000	V	9.22	34.15	43.37	74.00	-30.63	peak
4371.667	V	13.01	31.33	44.34	74.00	-29.66	peak
4995.000	V	14.59	33.24	47.83	74.00	-26.17	peak
5986.667	V	16.23	31.39	47.62	74.00	-26.38	peak
7290.000	V	19.21	30.04	49.25	74.00	-24.75	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



Power	: AC 120V/60HZ	Temperature	: 24 °C
Test Mode4	802.11ac VHT40 (2452MHz)	Humidity	: 54 %
Test date	: Oct. 30, 2018	Atmospheric Pressure	: 1010 hpa

Frequency (MHz)	AntPol. H/V	Correct Factor (dB)	Reading level (dBuV)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector mode (PK/AV)
1368.333	H	-2.81	49.66	46.85	74.00	-27.15	peak
1793.333	H	0.08	46.85	46.93	74.00	-27.07	peak
4315.000	H	12.72	31.07	43.79	74.00	-30.21	peak
4910.000	H	14.43	35.84	50.27	74.00	-23.73	peak
6695.000	H	17.09	30.65	47.74	74.00	-26.26	peak
7233.333	H	18.99	30.36	49.35	74.00	-24.65	peak
1170.000	V	-4.62	52.91	48.29	74.00	-25.71	peak
1793.333	V	0.08	46.31	46.39	74.00	-27.61	peak
3776.667	V	10.35	34.86	45.21	74.00	-28.79	peak
4910.000	V	14.43	34.70	49.13	74.00	-24.87	peak
6440.000	V	16.44	30.90	47.34	74.00	-26.66	peak
7261.667	V	19.10	29.91	49.01	74.00	-24.99	peak

Note: Level = Reading + Factor

Margin = Level – Limit

Factor= Antenna Factor + Cable Loss - Amplifier Factor



### 6.7 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz



### 6.8 Restrict Band Emission Measurement Data

Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11b

Channel 1		Fundamental Frequency: 2412 MHz					
Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Ant-Pol H/V
2390.000	2.95	42.32	45.27	74.00	-28.73	peak	H
2390.000	2.95	25.42	28.37	54.00	-25.63	AVG	H
2390.000	2.95	40.00	42.95	74.00	-31.05	peak	V
2390.000	2.95	25.31	28.26	54.00	-25.74	AVG	V
Channel 11		Fundamental Frequency: 2462 MHz					
2483.500	3.35	43.17	46.52	74.00	-27.48	peak	H
2483.500	3.35	26.41	29.76	54.00	-24.24	AVG	H
2483.500	3.35	41.03	44.38	74.00	-29.62	peak	V
2483.500	3.35	25.31	28.66	54.00	-25.34	AVG	V

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11g

Channel 1				Fundamental Frequency: 2412 MHz			
Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Ant-Pol H/V
2390.000	2.95	61.65	64.60	74.00	-9.40	peak	H
2390.000	2.95	42.16	45.11	54.00	-8.89	AVG	H
2390.000	2.95	54.09	57.04	74.00	-16.96	peak	V
2390.000	2.95	35.41	38.36	54.00	-15.64	AVG	V
Channel 11				Fundamental Frequency: 2462 MHz			
2483.500	3.35	63.71	67.06	74.00	-6.94	peak	H
2483.500	3.35	45.15	48.50	54.00	-5.50	AVG	H
2483.500	3.35	57.62	60.97	74.00	-13.03	peak	V
2483.500	3.35	39.43	42.78	54.00	-11.22	AVG	V

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.





Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11ac VHT20

Channel 1				Fundamental Frequency: 2412 MHz			
Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Ant-Pol H/V
2390.000	2.95	67.28	70.23	74.00	-3.77	peak	H
2390.000	2.95	47.61	50.56	54.00	-3.44	AVG	H
2390.000	2.95	54.96	57.91	74.00	-16.09	peak	V
2390.000	2.95	45.31	48.26	54.00	-5.74	AVG	V
Channel 11				Fundamental Frequency: 2462 MHz			
2483.500	3.35	60.93	64.28	74.00	-9.72	peak	H
2483.500	3.35	42.20	45.55	54.00	-8.45	AVG	H
2483.500	3.35	52.54	55.89	74.00	-18.11	peak	V
2483.500	3.35	34.85	38.20	54.00	-15.80	AVG	V

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



Test Date: Oct. 30, 2018

Temperature: 26°C

Atmospheric pressure: 1018 hPa

Humidity: 47%

Modulation Standard: 802.11ac VHT40

Channel 3				Fundamental Frequency: 2422 MHz			
Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Ant-Pol H/V
2390.000	2.95	64.84	67.79	74.00	-6.21	peak	H
2390.000	2.95	48.12	51.07	54.00	-2.93	AVG	H
2390.000	2.95	59.25	62.20	74.00	-11.80	peak	V
2390.000	2.95	41.05	44.00	54.00	-10.00	AVG	V
Channel 9				Fundamental Frequency: 2452 MHz			
2483.500	3.35	67.82	71.17	74.00	-2.83	peak	H
2483.500	3.35	48.12	51.47	54.00	-2.53	AVG	H
2483.500	3.35	65.17	68.52	74.00	-5.48	peak	V
2483.500	3.35	45.62	48.97	54.00	-5.03	AVG	V

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector peak mode) for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3 MHz (detector sample mode) for Average detection at frequency above 1GHz.



## 7. Test of Spurious Emission (Conducted)

### 7.1 Test Limit

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

### 7.2 Test Procedure

KDB 558074 D01 DTS Meas Guidance v03r05


#### 1. Reference level measurement

- (a) Set instrument center frequency to DTS channel center frequency
- (b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- (c) Set the RBW = 100 kHz
- (d) Set the VBW  $\geq 3 \times$  RBW
- (e) Detector = peak
- (f) Sweep time = auto couple
- (g) Trace mode = max hold
- (h) Allow trace to fully stabilize

#### 2. Emission level measurement

- (a) Set the center frequency and span to encompass frequency range to be measured
- (b) RBW = 100kHz
- (c) VBW = 300kHz
- (d) Detector = Peak
- (e) Trace mode = max hold
- (f) Sweep time = auto couple
- (g) The trace was allowed to stabilize

### 7.3 Test Setup Layout





### 7.4 Test Result and Data

Test Date: Aug.12, 2018

Temperature: 24°C

Atmospheric pressure: 1014 hPa

Humidity: 47%



Modulation Standard	Frequency (MHz)	Test Result
802.11b	2412	Pass
	2437	Pass
	2462	Pass
802.11g	2412	Pass
	2437	Pass
	2462	Pass
802.11n HT20	2412	Pass
	2437	Pass
	2462	Pass
802.11n HT40	2422	Pass
	2437	Pass
	2452	Pass

**Note:** Test plots refer to the following pages.



Antenna 1  
Modulation Type: 802.11b





CH01

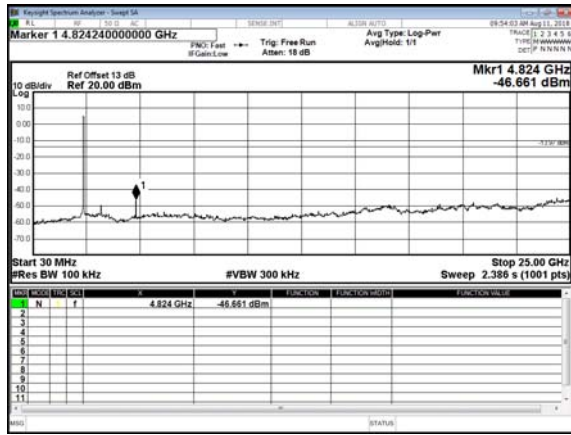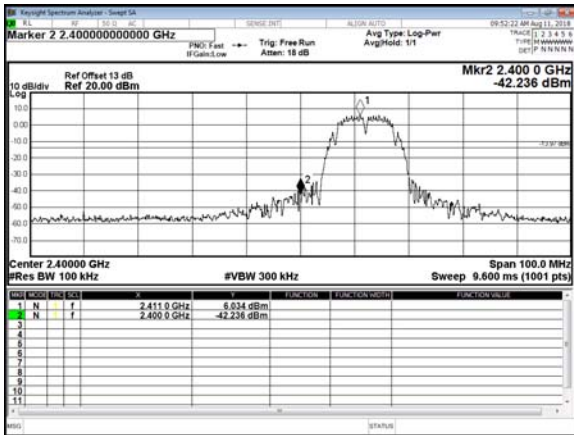

CH06

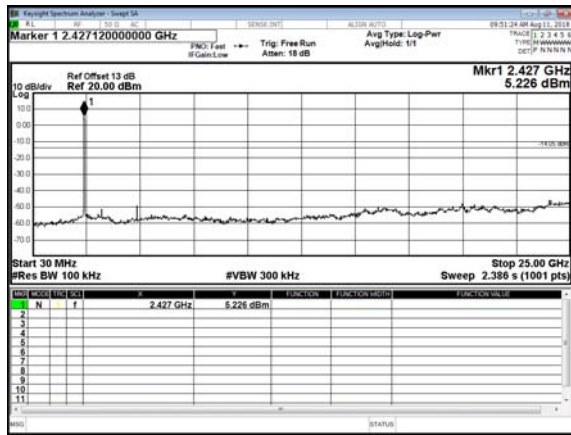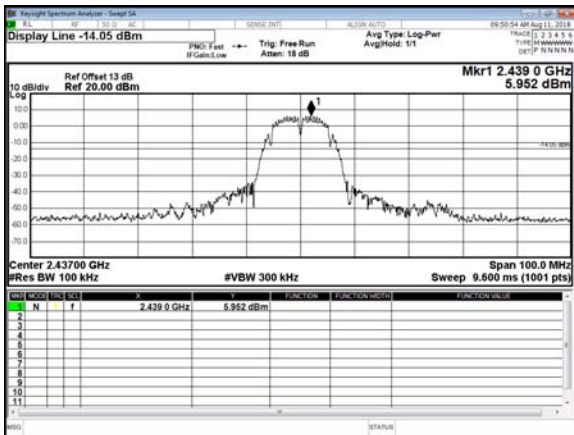



CH11

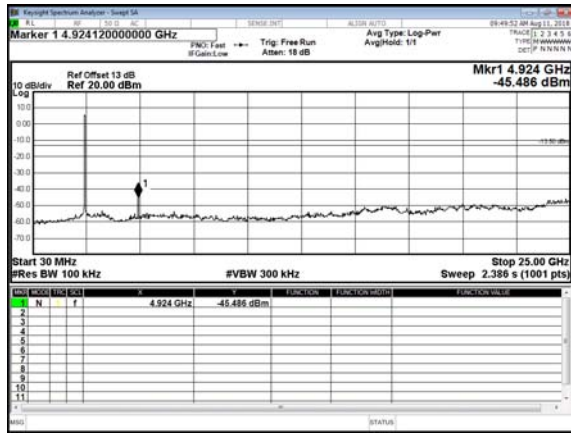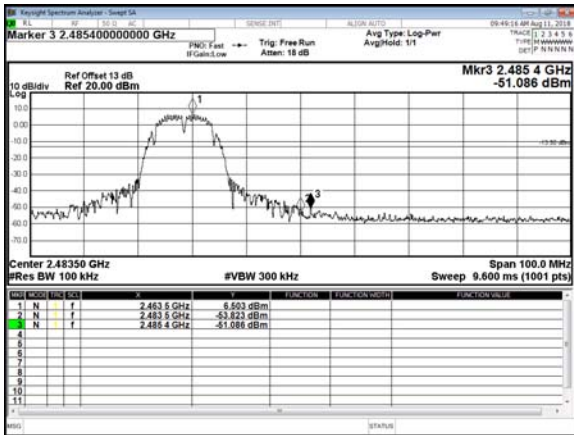



Modulation Type: 802.11g





CH01

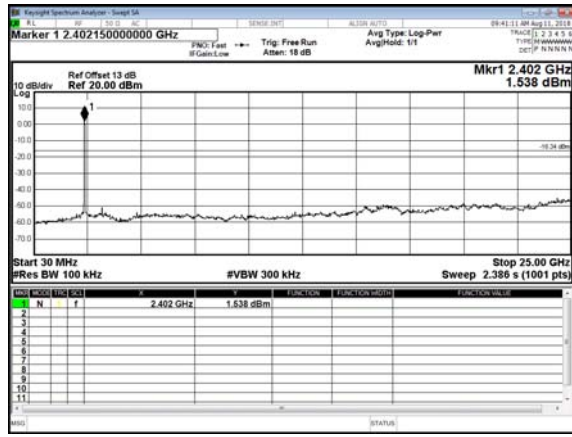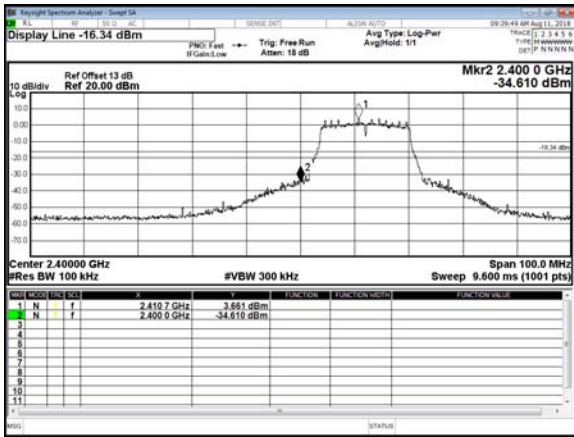

CH06

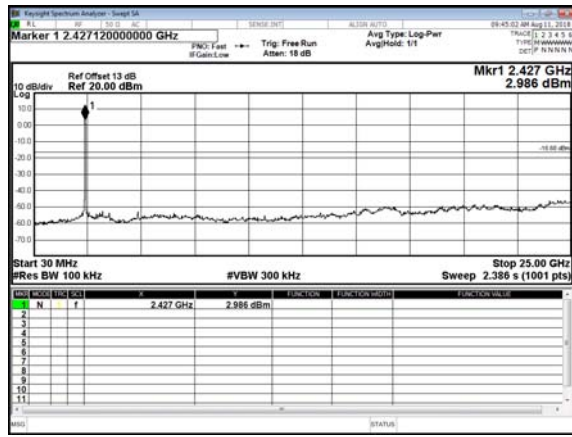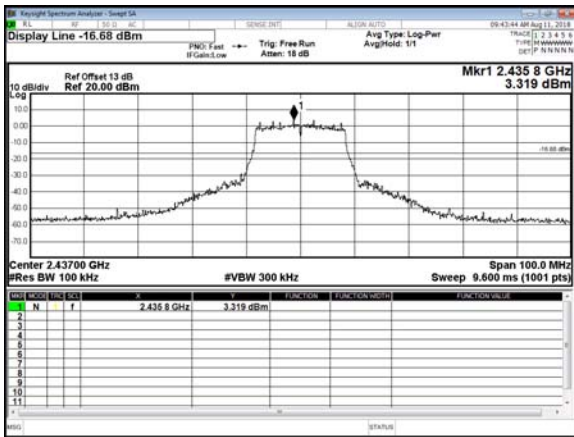



CH11

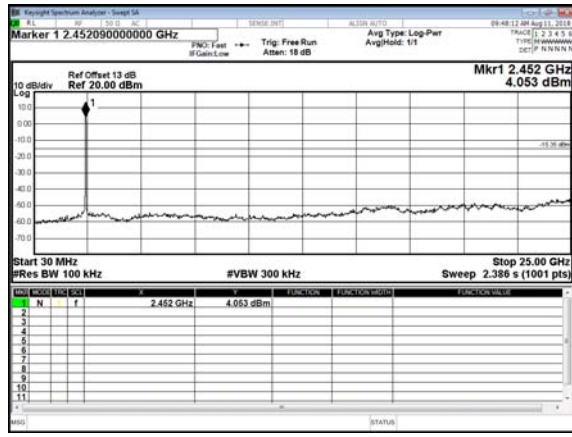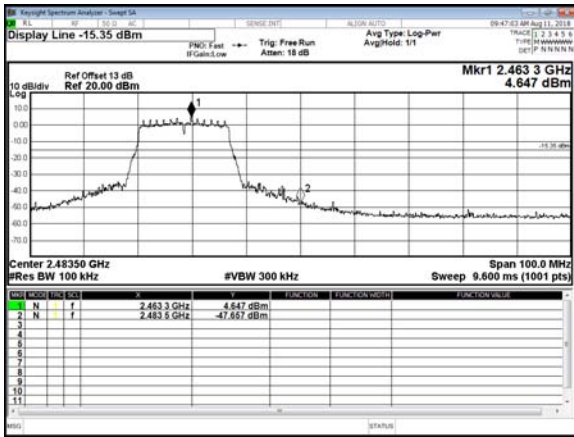



Modulation Type: 802.11ac VHT20





CH01

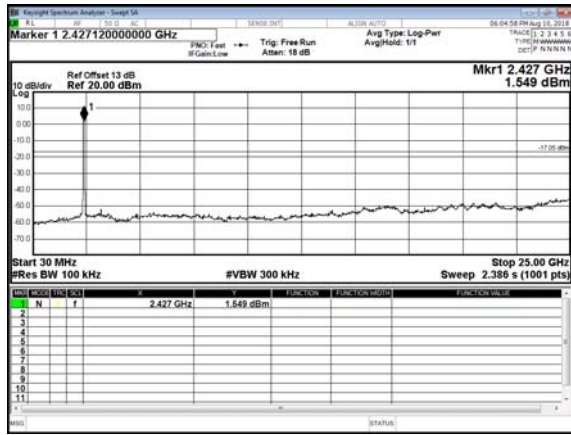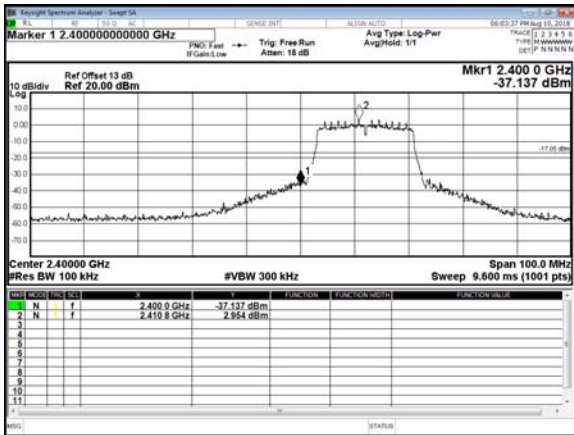

CH06

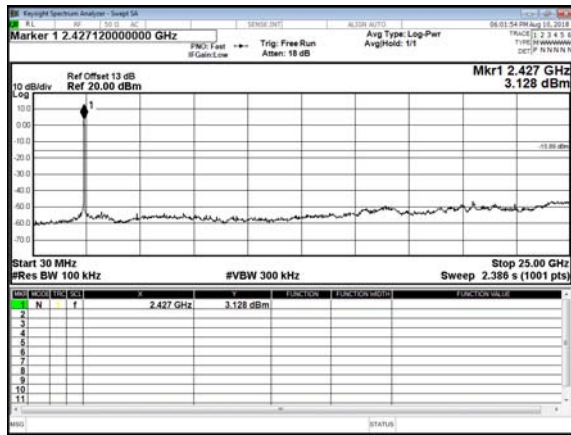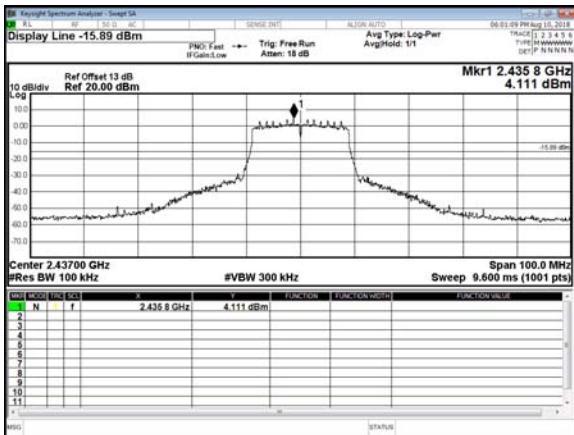



CH11

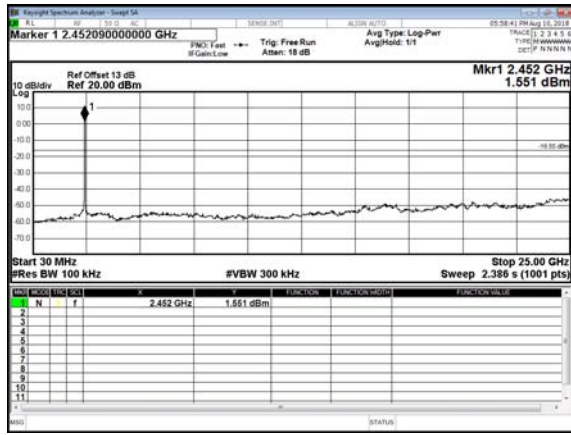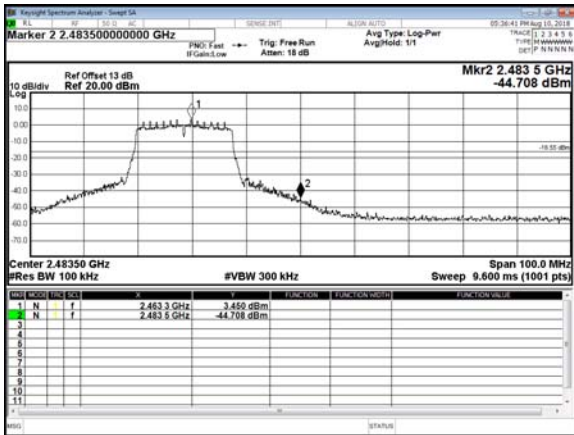



Modulation Type: 802.11ac VHT40





CH03

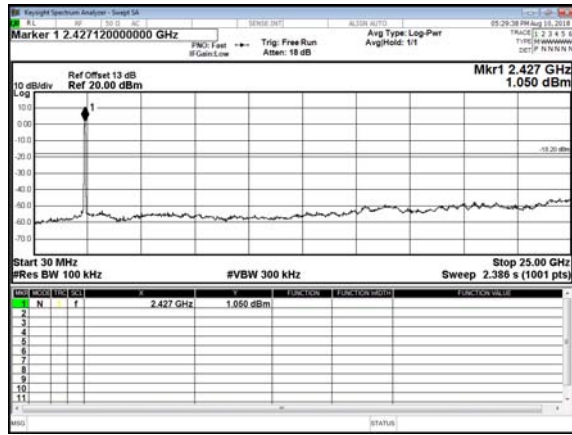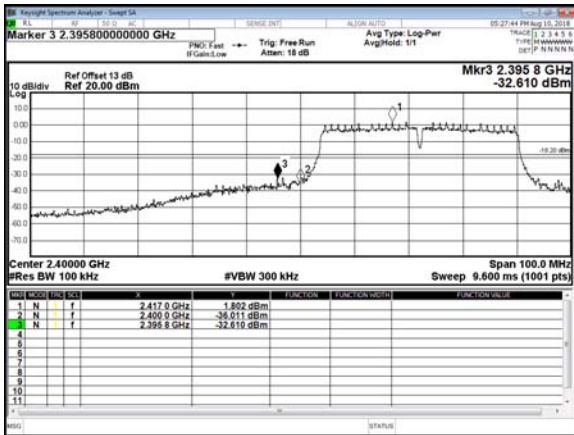

CH06

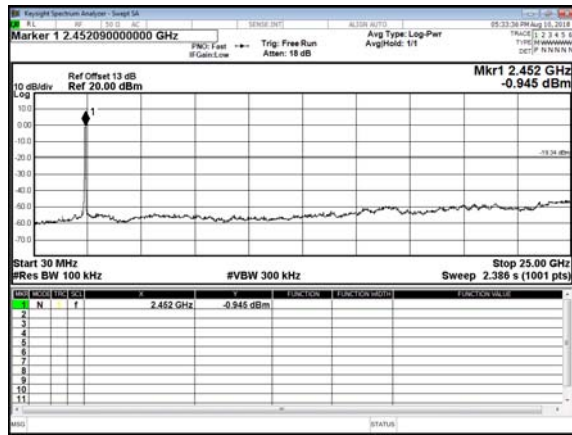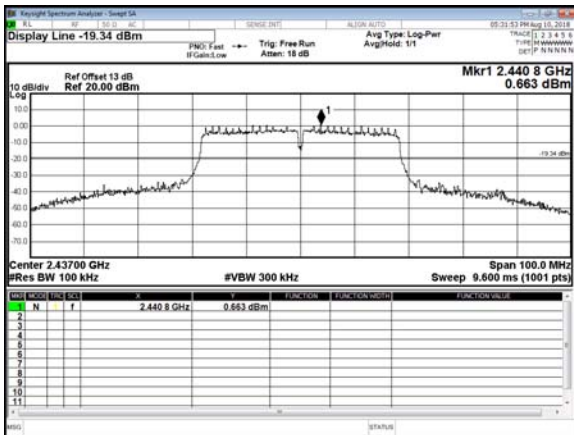

CH09

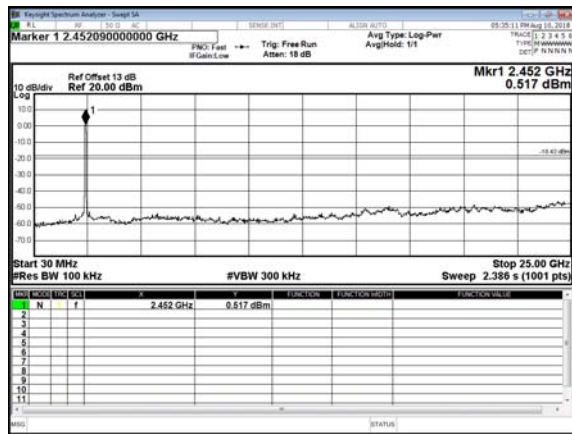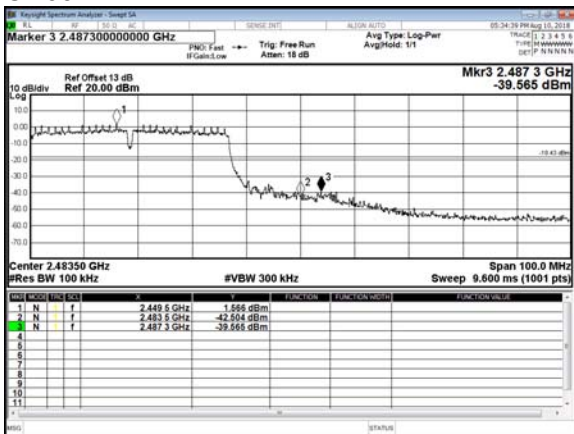


Antenna 2  
Modulation Type: 802.11b








CH01

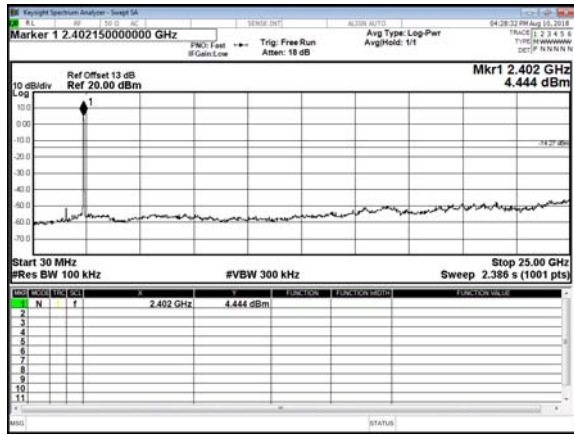

CH06

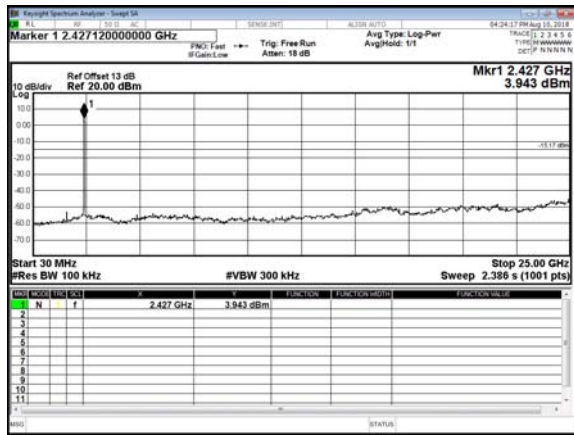
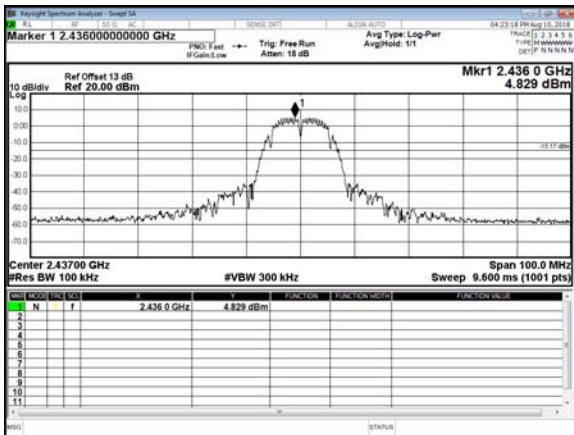


CH11


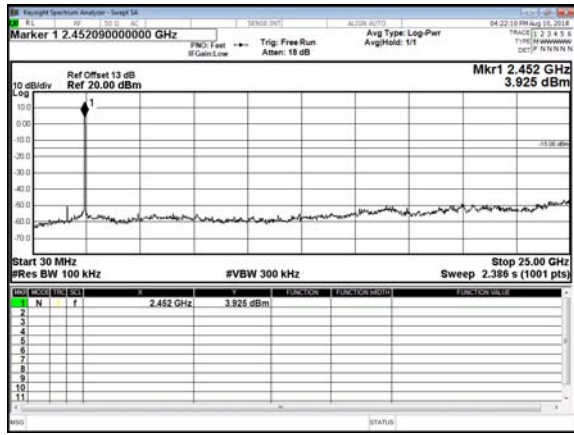






Modulation Type: 802.11g  
CH01

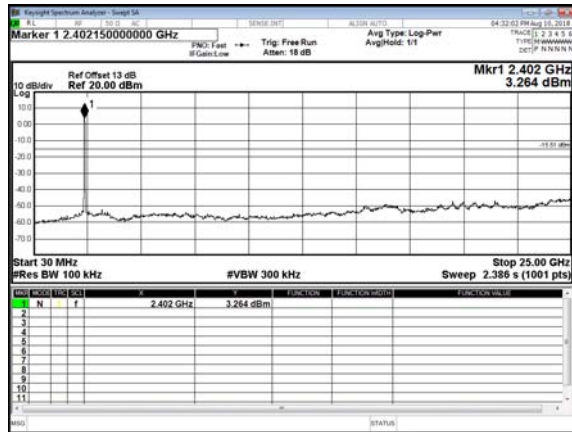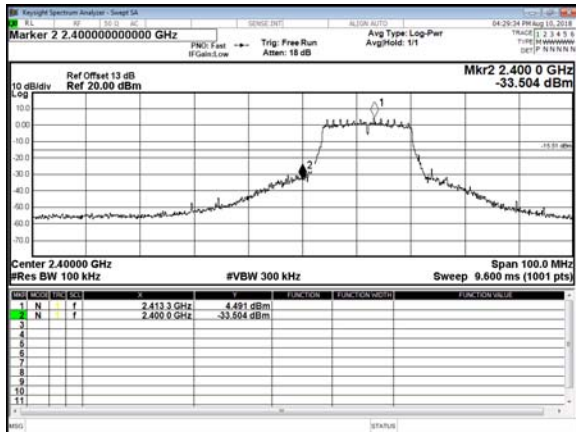

CH06

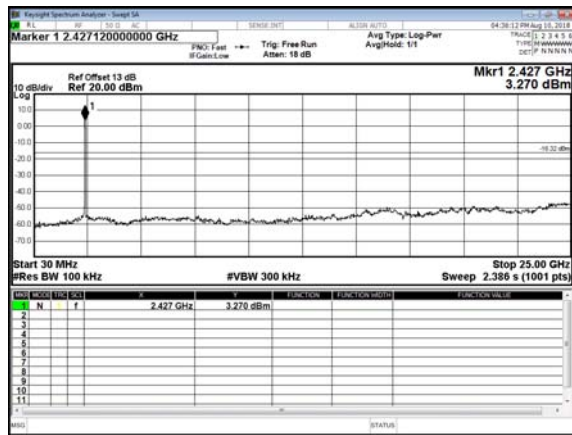
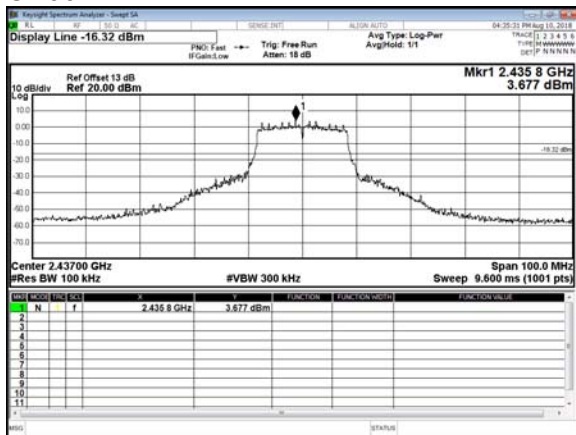


CH11

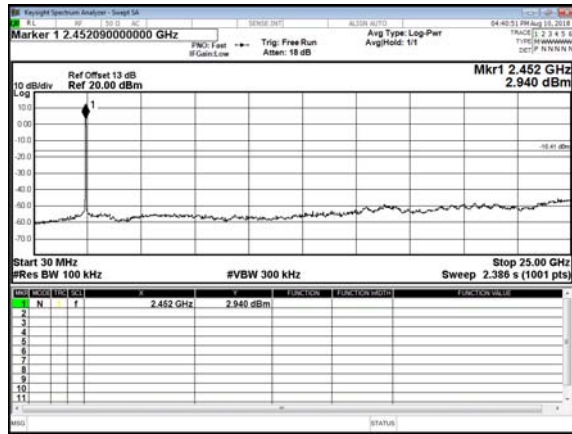
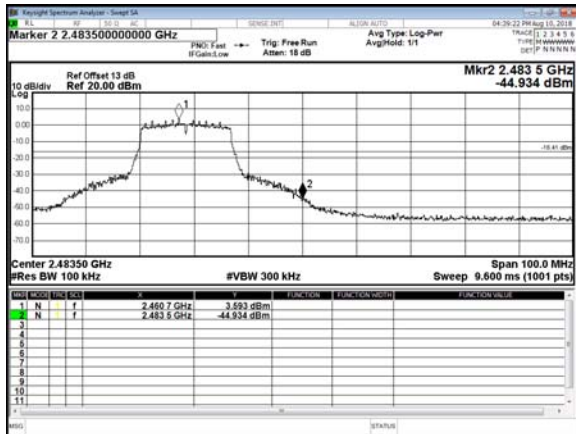






Modulation Type: 802.11ac VHT20  
CH01

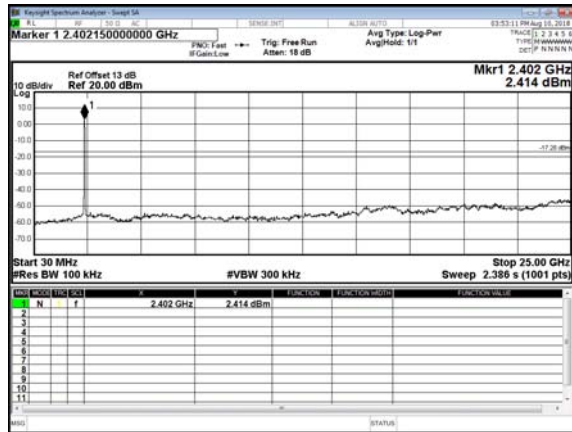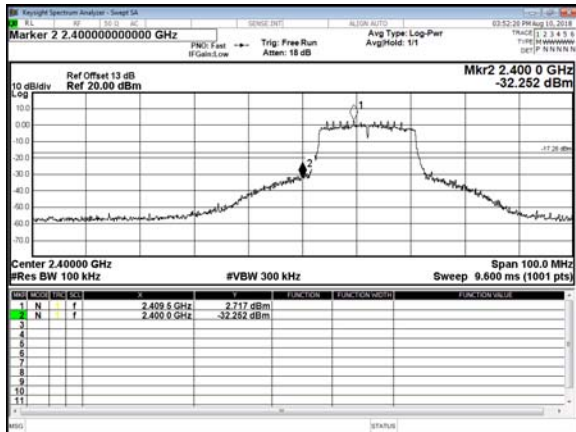

CH06

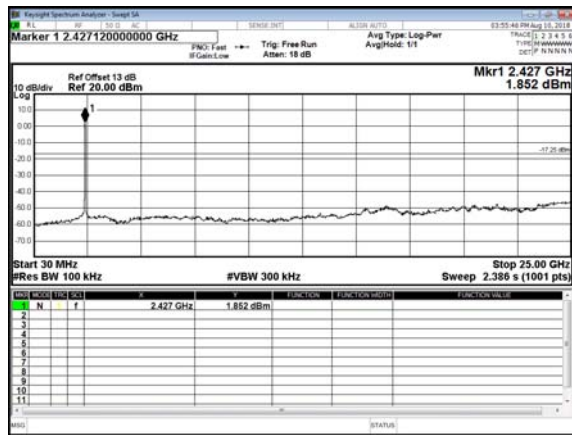
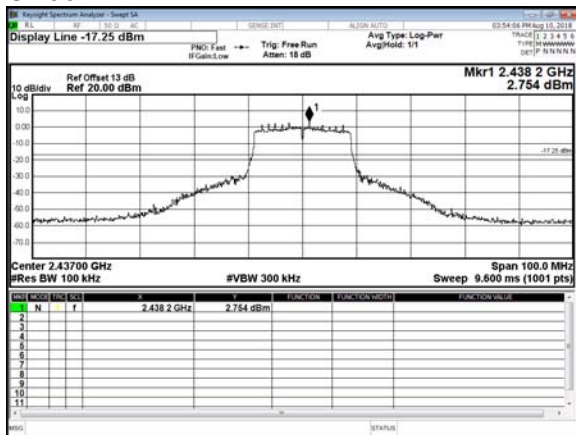


CH11

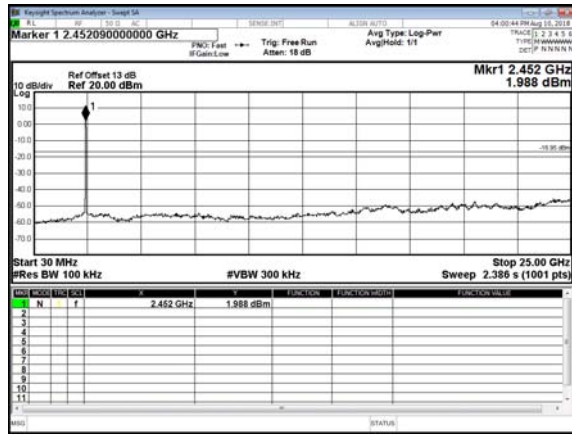
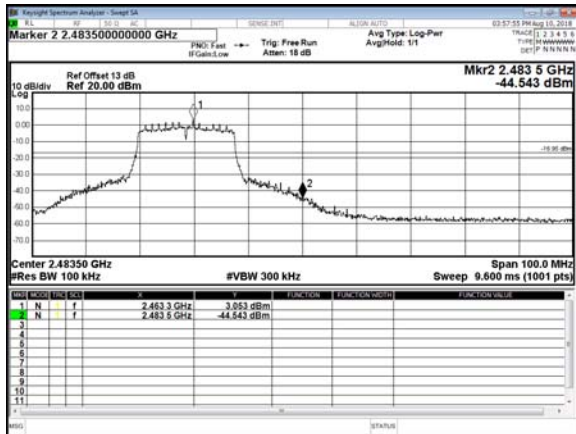






Modulation Type: 802.11ac VHT40  
CH03

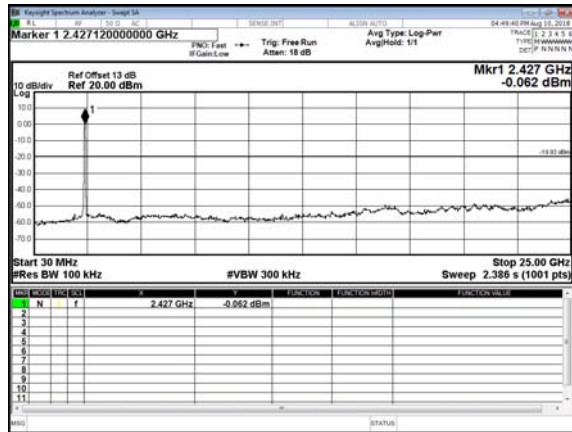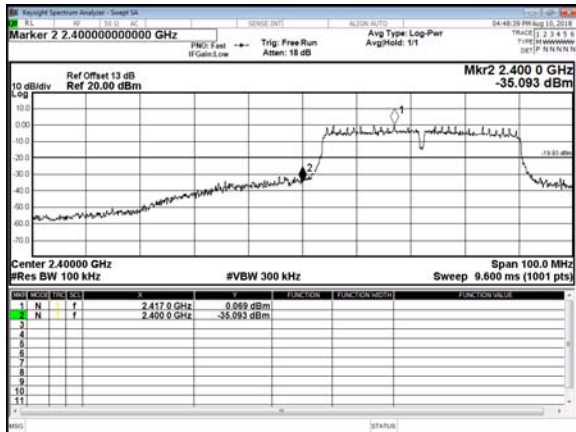

CH06

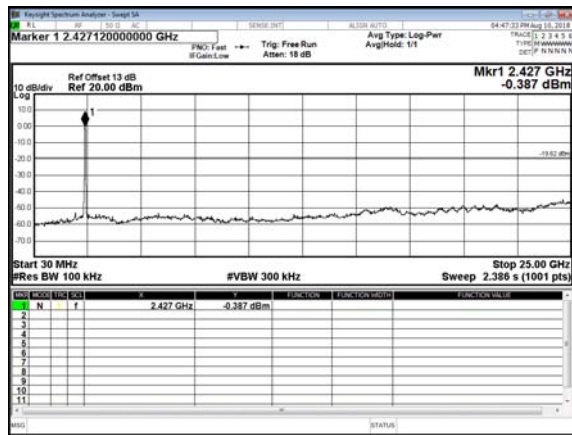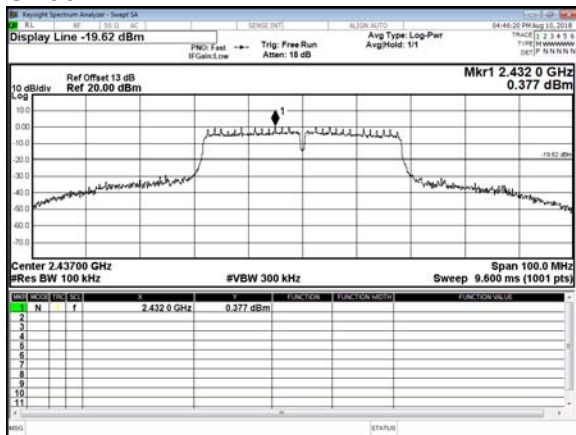

CH09

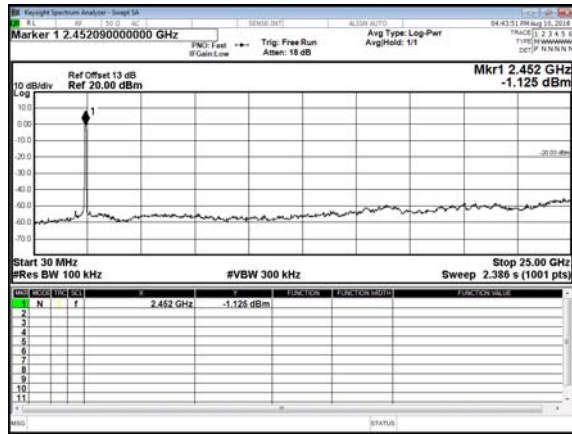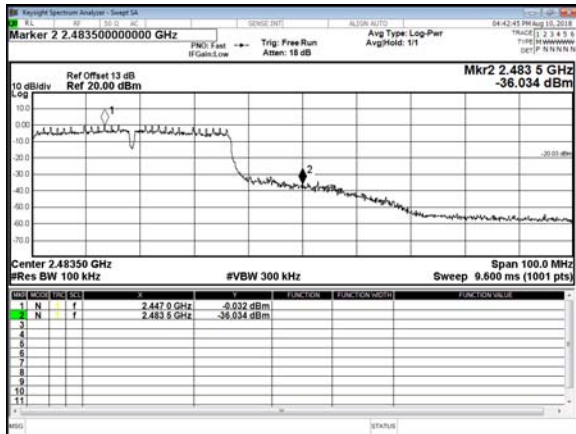



### 8. 6dB Bandwidth Measurement Data

#### 8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- c. Set spectrum analyzer X dB to 6 dB.
- d. Set spectrum analyzer peak detector with maximum hold.

#### 8.3 Test Setup Layout



#### 8.4 Test Result and Data

Test Date: Aug.11, 2018

Temperature: 24°C

Atmospheric pressure: 1016 hPa

Humidity: 46%

Ant 1

Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11b	01	2412	9.63
	06	2437	9.82
	11	2462	10.08
IEEE 802.11g	01	2412	16.32
	06	2437	16.06
	11	2462	16.06
IEEE 802.11ac VHT20	01	2412	16.90
	06	2437	17.33
	11	2462	16.95
IEEE 802.11ac VHT40	03	2422	35.39
	06	2437	35.20
	09	2452	35.20




Ant 2


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
IEEE 802.11b	01	2412	10.06
	06	2437	10.10
	11	2462	10.10
IEEE 802.11g	01	2412	16.33
	06	2437	15.55
	11	2462	16.18
IEEE 802.11ac VHT20	01	2412	16.97
	06	2437	16.14
	11	2462	16.49
IEEE 802.11ac VHT40	03	2422	35.51
	06	2437	35.52
	09	2452	35.19




Antenna 1  
Modulation Type: 802.11b  
CH01

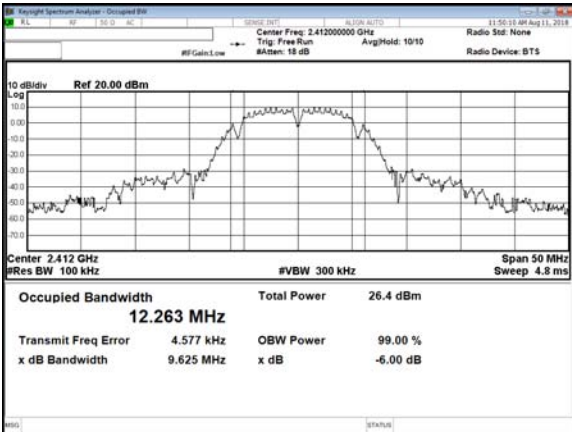


CH06

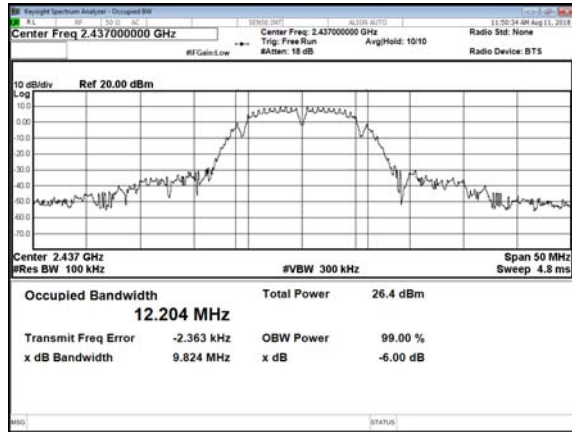


CH11

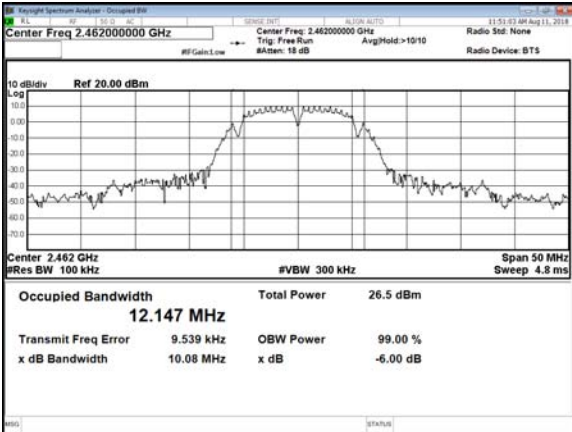


Modulation Type: 802.11g  
CH01

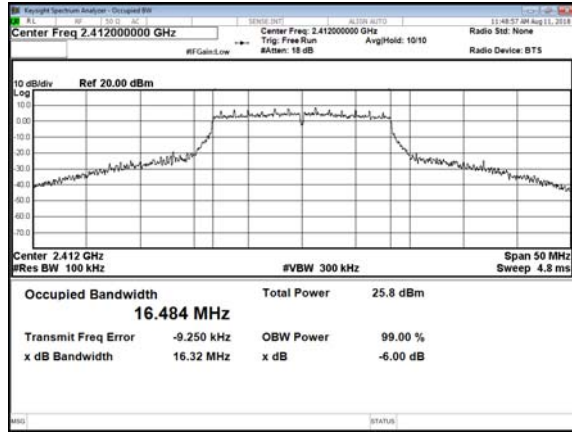

CH06

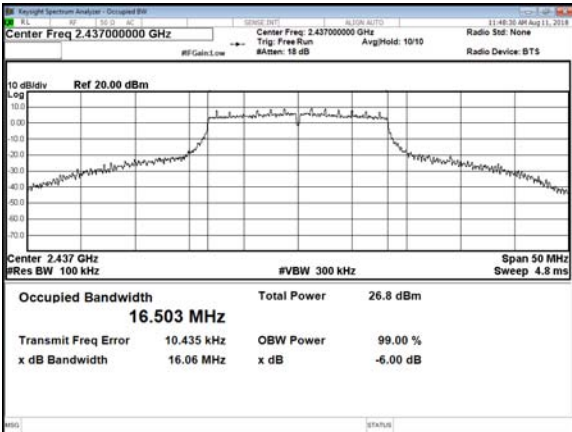


CH11

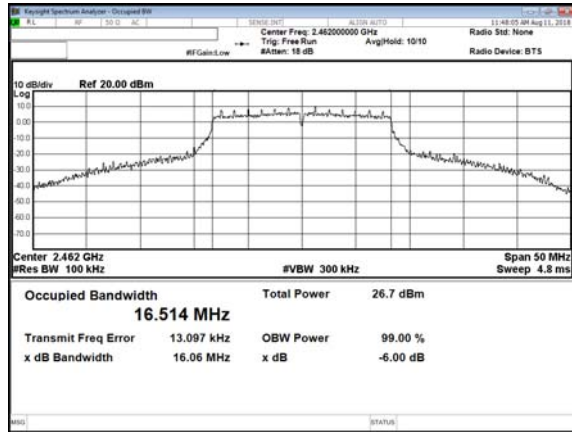





Modulation Type: 802.11n HT20  
CH01

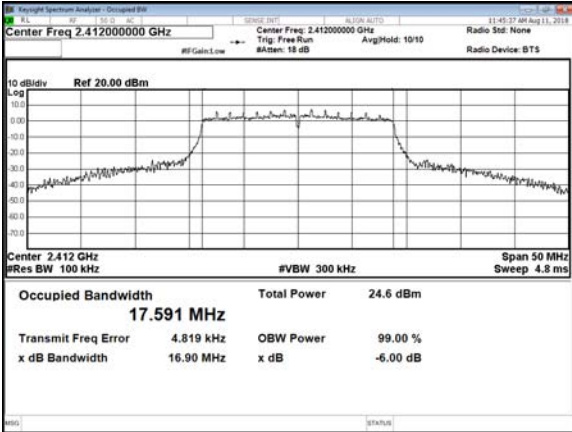


CH06

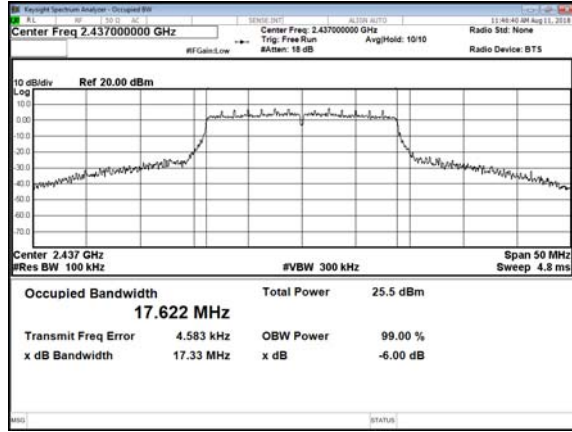


CH11

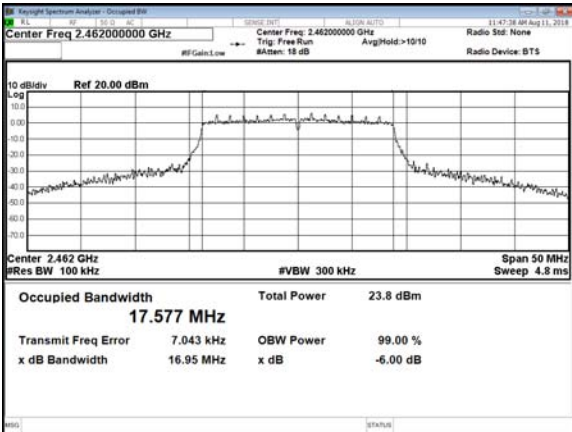


Modulation Type: 802.11ac VHT40  
CH03

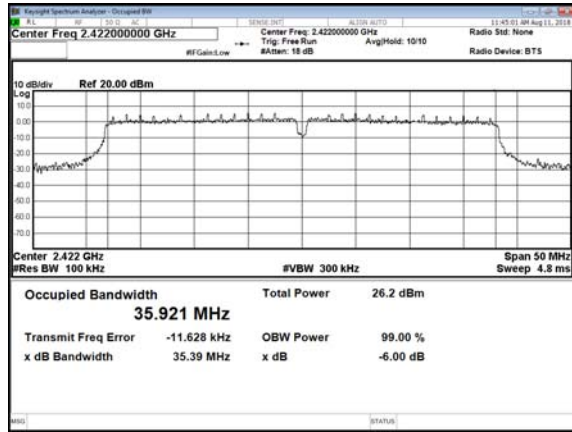

CH06

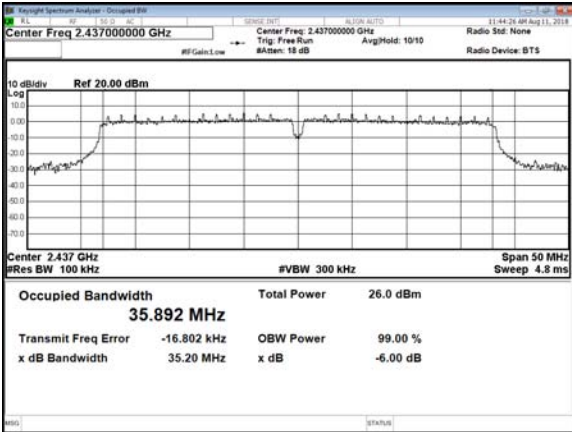


CH09

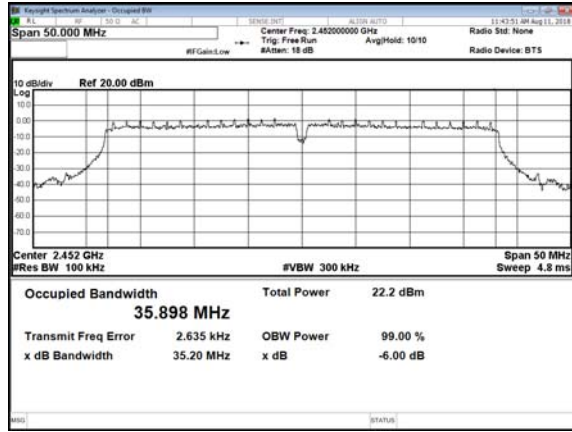







Antenna 2  
Modulation Type: 802.11b  
CH01

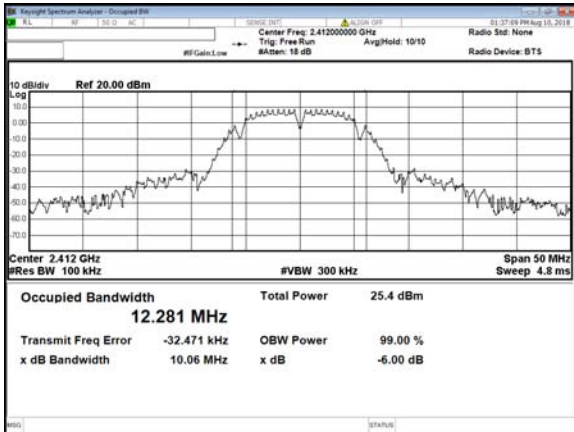


CH06

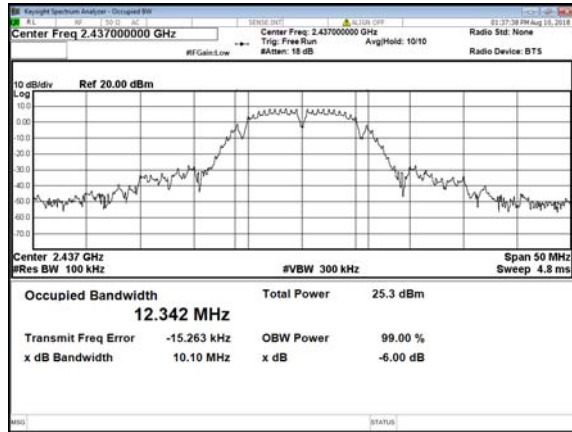


CH11

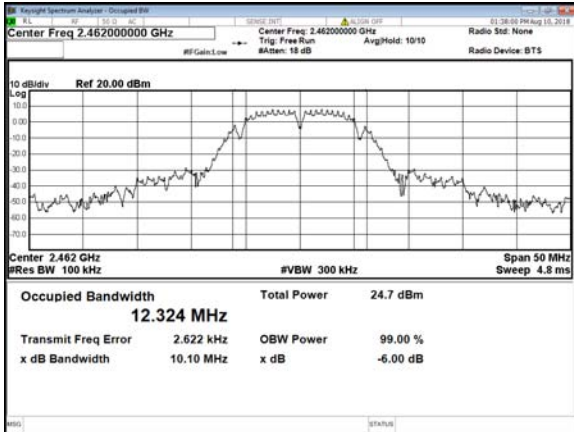


Modulation Type: 802.11g  
CH01

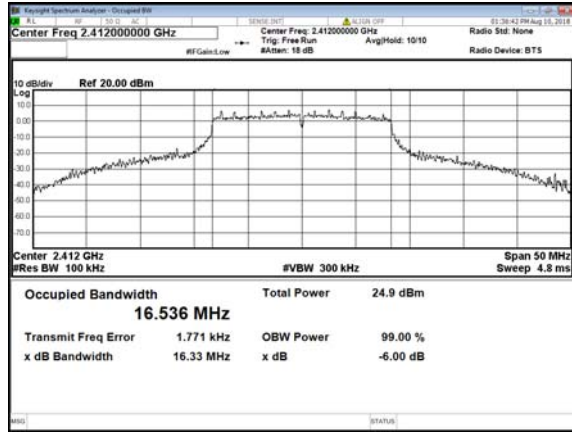

CH06

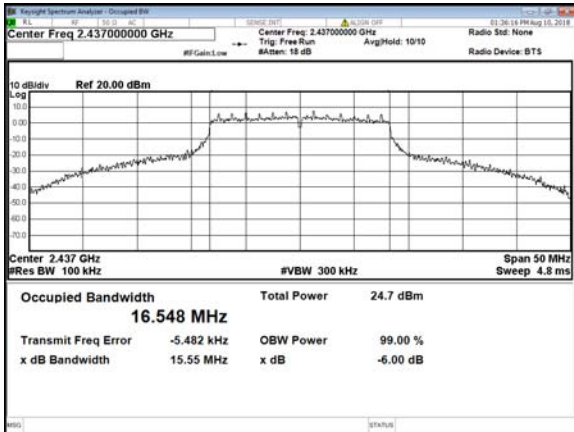


CH11

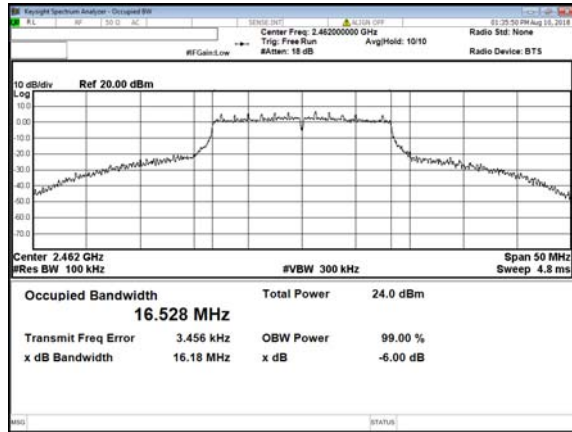





Modulation Type: 802.11n HT20  
CH01

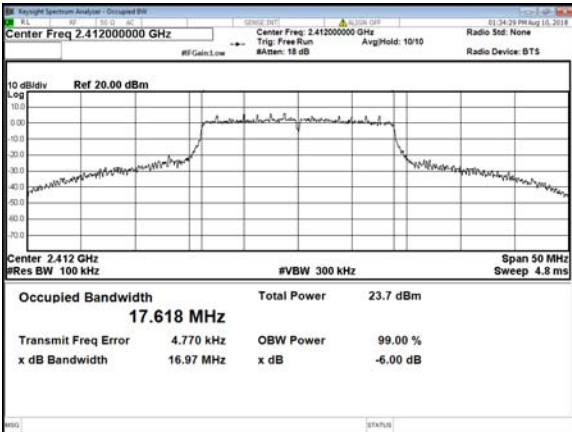


CH06

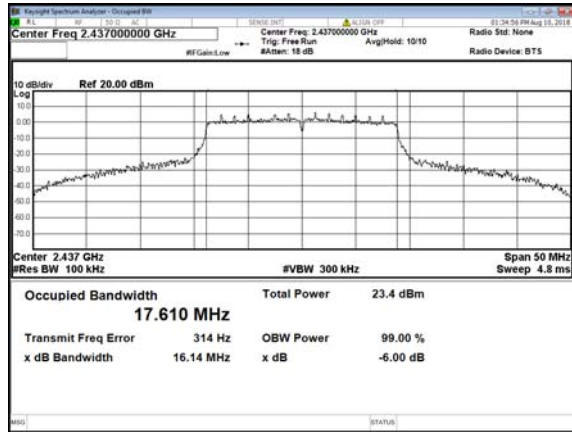


CH11

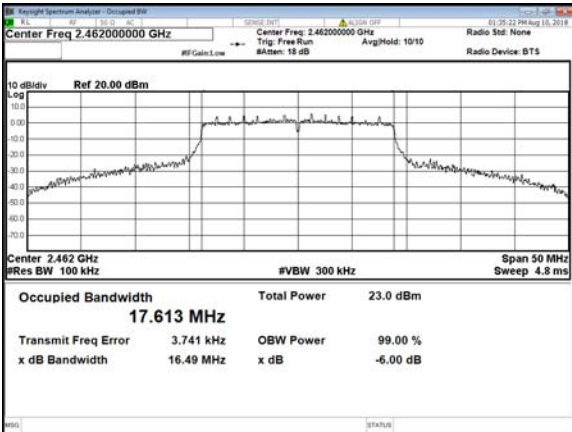


Modulation Type: 802.11ac VHT40  
CH03

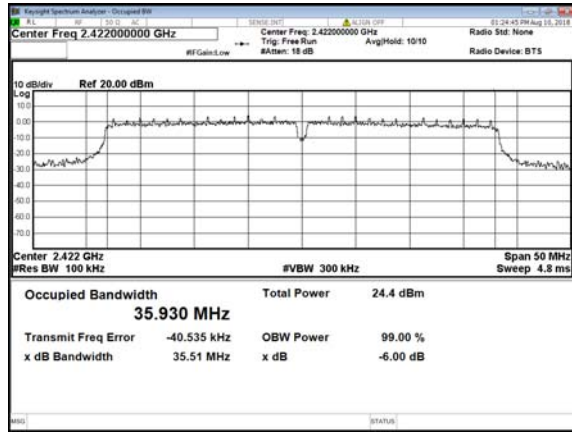

CH06

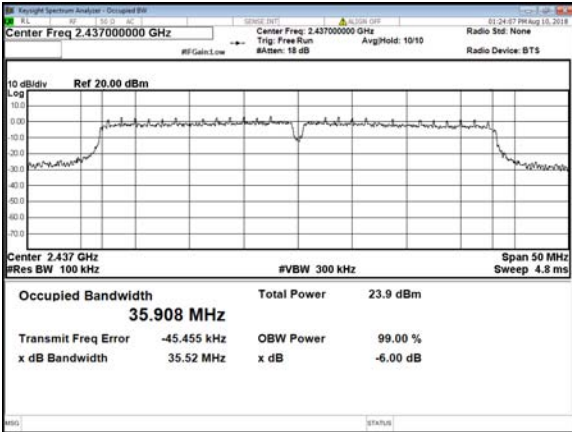

CH09

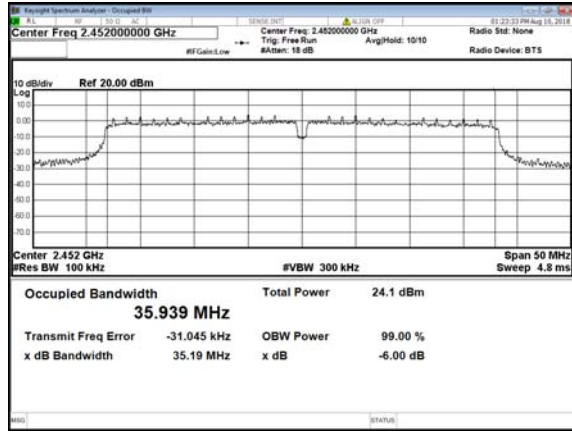



## 9. Maximum Peak Output Power

### 9.1 Test Limit


The Maximum Peak Output Power Measurement is 30dBm.

### 9.2 Test Procedures

Test procedure refers to KDB 558074 D01 DTS Meas Guidance v03r05 Peak power meter method.

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 9.3 Test Setup Layout

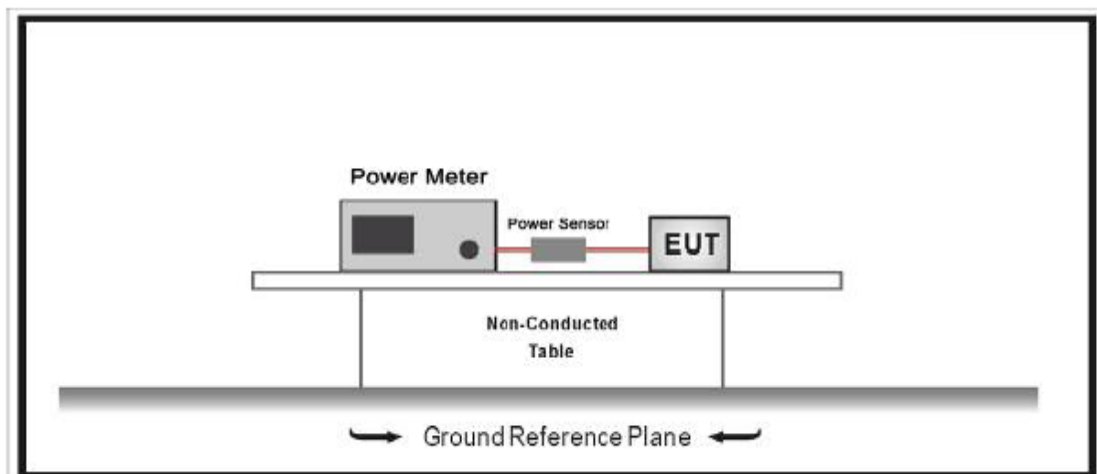



### 9.4 Test Result and Data

Test Date: Aug.12, 2018

Temperature: 24°C

Atmospheric pressure: 1016 hPa

Humidity: 46%

Antenna A+B

Modulation Type	Frequency (MHz)	Peak Power (dBm) Chain 1	Peak Power (dBm) Chain 2	Peak Power (dBm) Chain 1+2	Peak Power Output
					mW
IEEE 802.11b	2412	19.22	18.31	21.80	151.36
	2437	19.06	17.78	21.48	140.60
	2462	18.92	16.98	21.07	127.94
IEEE 802.11g	2412	24.54	23.19	26.93	493.17
	2437	23.30	23.36	26.34	430.53
	2462	24.50	22.66	26.69	466.66
IEEE 802.11ac VHT20	2412	22.86	22.81	25.85	384.59
	2437	22.95	21.69	25.38	345.14
	2462	22.76	21.69	25.27	336.51
IEEE 802.11ac VHT40	2422	23.57	22.83	26.23	419.76
	2437	23.69	22.33	26.07	404.58
	2452	24.29	22.73	26.59	456.03



## 10. Power Spectral Density

### 10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.


### 10.2 Test Procedures

Test procedure refers to section 11.10.2 Method PKPSD (peak PSD).

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum amplitude level within the RBW.
  - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### 10.3 Test Setup Layout





### 10.4 Test Result and Data

Test Date: Aug.12, 2018

Temperature: 24°C

Atmospheric pressure: 1014 hPa


Humidity: 47%

#### Antenna 1+2


Modulation Type	Frequency (MHz)	Power Spectral Density (dBm)		
		Antenna 1	Antenna 2	Total
IEEE 802.11b	2412	-8.767	-8.617	-5.68
	2437	-9.609	-10.008	-6.79
	2462	-9.16	-9.869	-6.49
IEEE 802.11g	2412	-9.616	-10.009	-6.80
	2437	-8.723	-10.727	-6.60
	2462	-10.569	-10.901	-7.72
IEEE 802.11ac VHT20	2412	-11.356	-11.567	-8.45
	2437	-11.526	-11.175	-8.34
	2462	-11.697	-8.857	-7.04
IEEE 802.11ac VHT40	2422	-13.194	-14.876	-10.94
	2437	-13.918	-15.032	-11.43
	2452	-13.381	-14.948	-11.08




Antenna 1  
Modulation Type: 802.11b  
CH01

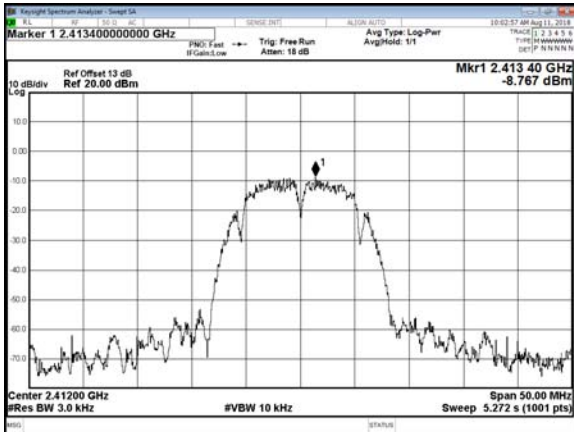


CH06

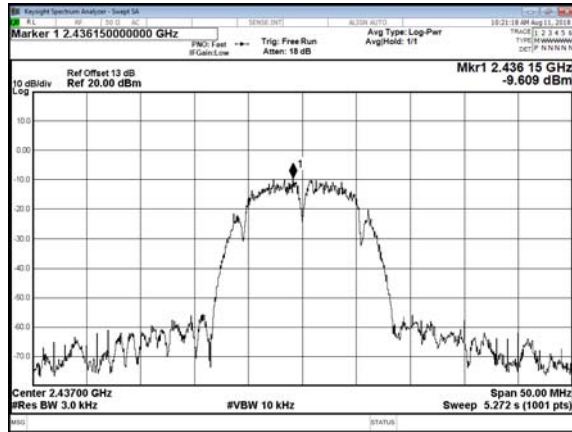


CH11

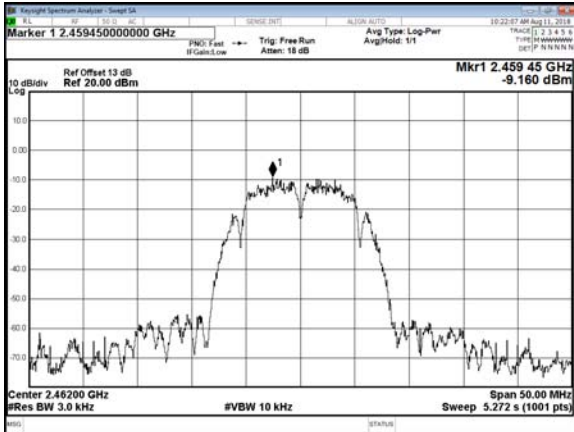


Modulation Type: 802.11g  
CH01

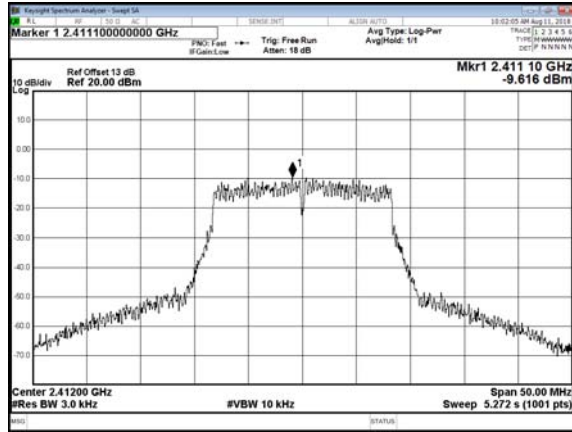

CH06

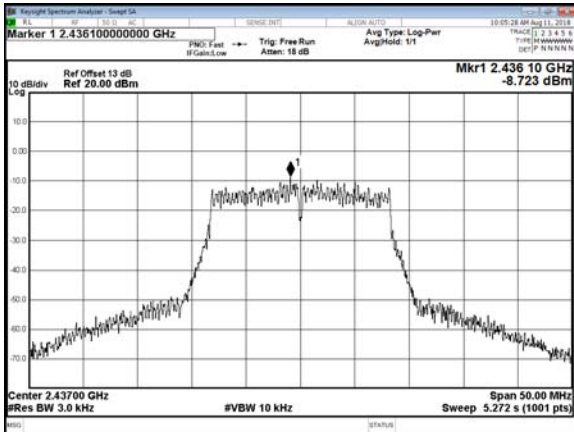


CH11

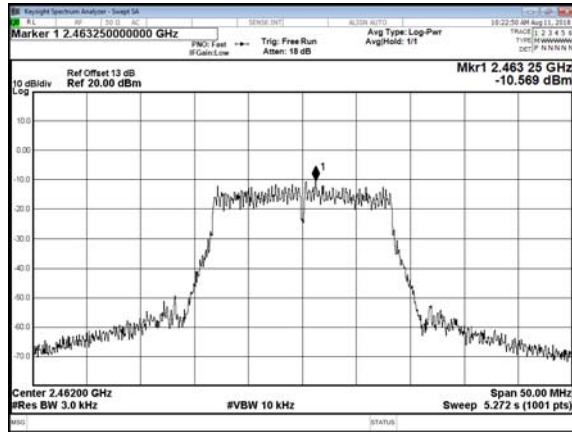





Modulation Type: 802.11n HT20  
CH01

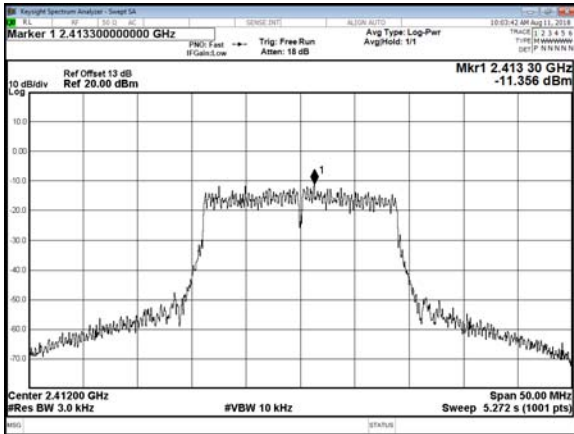


CH06

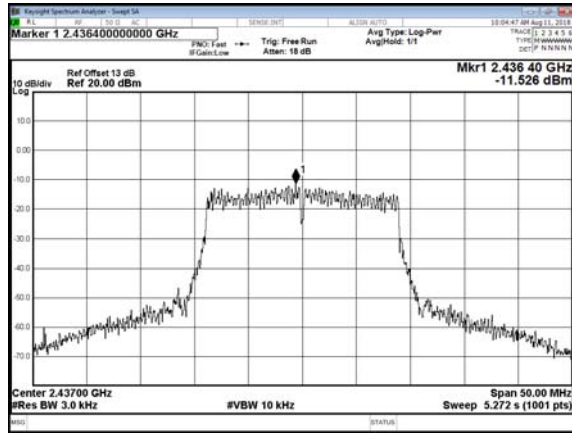


CH11

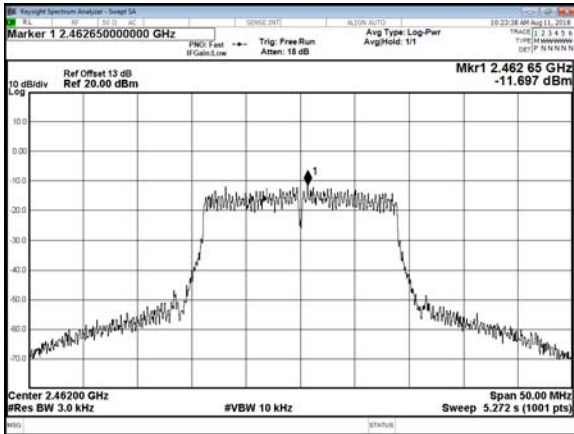


Modulation Type: 802.11ac VHT40  
CH03

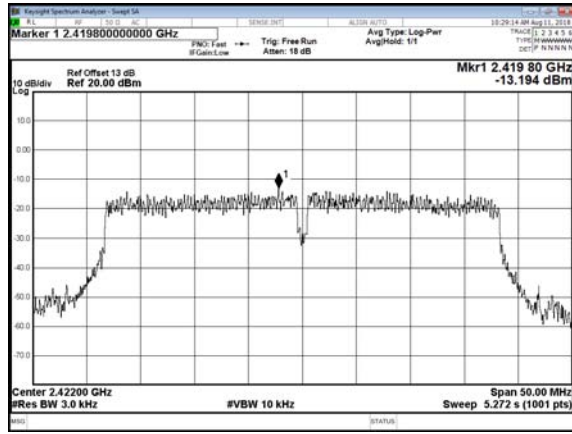

CH06

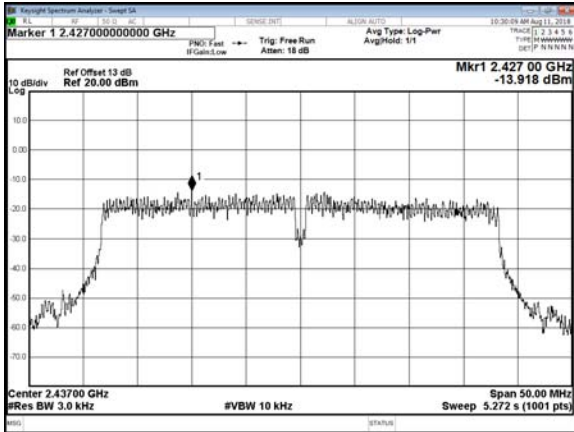

CH09

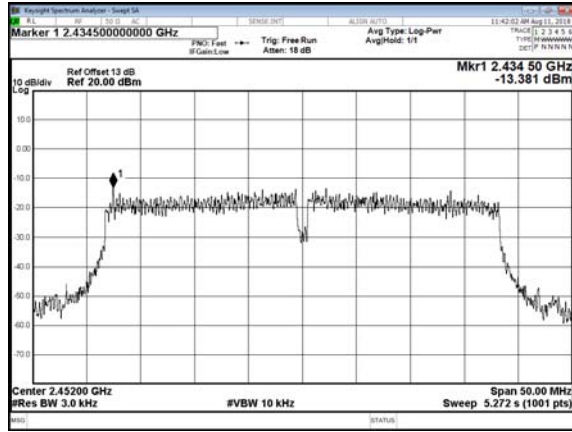






Antenna 2  
Modulation Type: 802.11b  
CH01




CH06

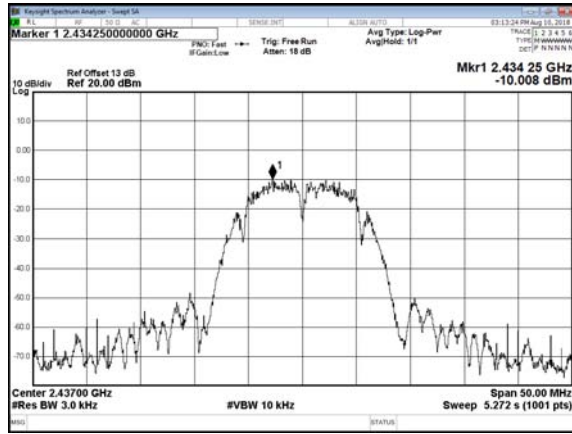


CH11




Modulation Type: 802.11g  
CH01

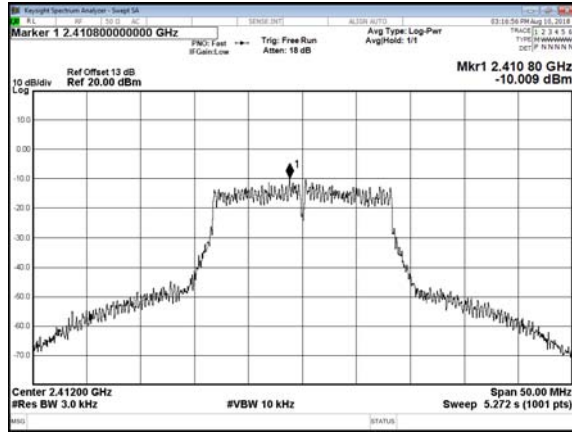

CH06

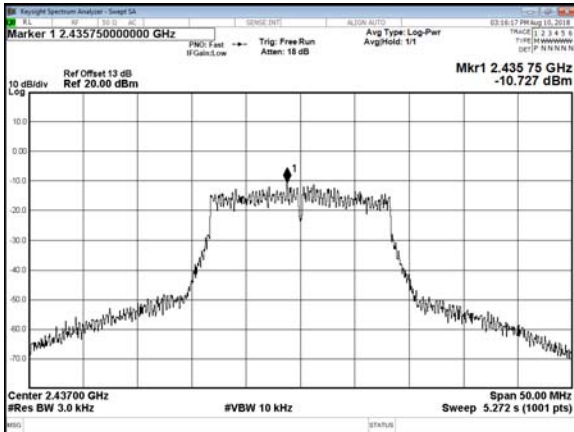


CH11

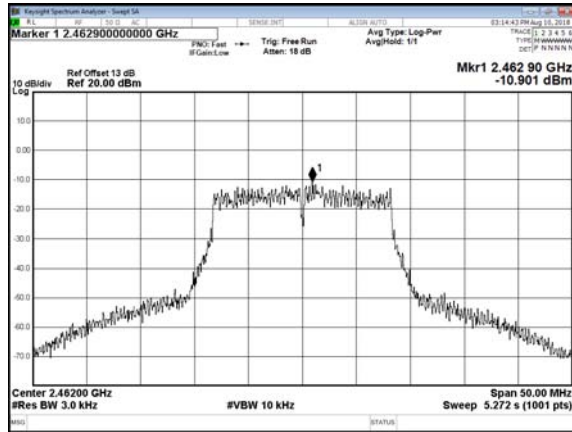





Modulation Type: 802.11n HT20  
CH01

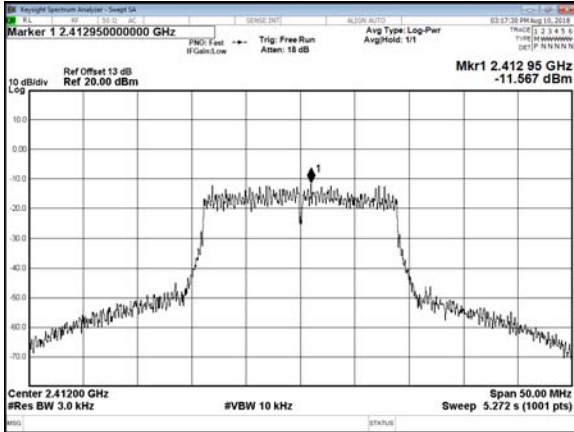


CH06

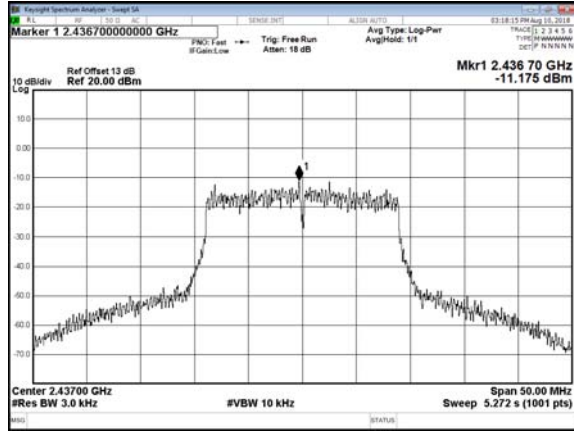


CH11

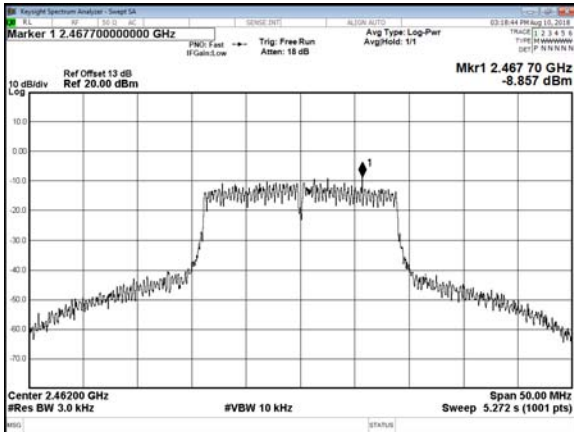


Modulation Type: 802.11ac VHT40  
CH03

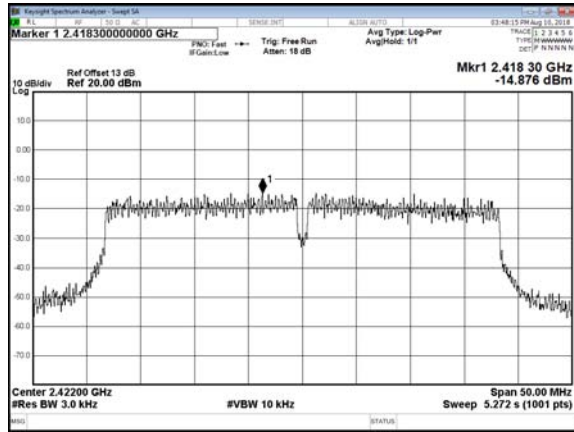

CH06

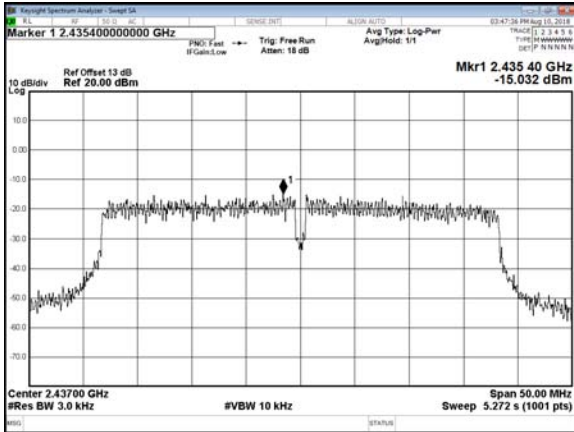

CH09

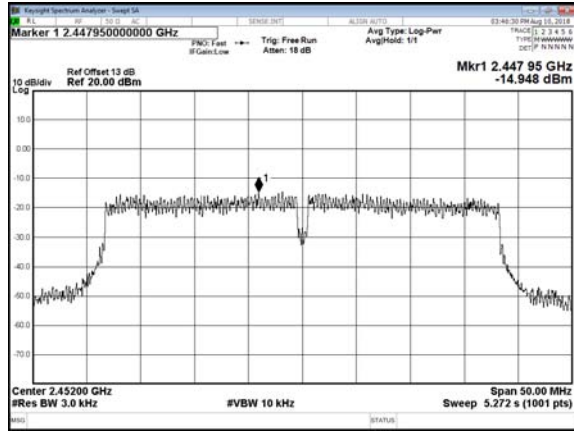

----- End of the report -----