

Appendix B

Measurement Plots

Test Laboratory: ETS PRODUCT SERVICE AG

Dipol Valid.900 (h)_250mW 8.12.2006

DUT: Dipole 900 MHz; Type: D900V2; Serial: 164

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Head 900 MHz Medium parameters used : $f = 900 \text{ MHz}$; $\sigma = 0.944 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

Dipol 900 (250mW)/Area Scan (81x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 2.91 mW/g


Dipol 900 (250mW)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 57.5 V/m; Power Drift = 0.004 dB

Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 2.69 mW/g; SAR(10 g) = 1.72 mW/g

Maximum value of SAR (measured) = 2.91 mW/g

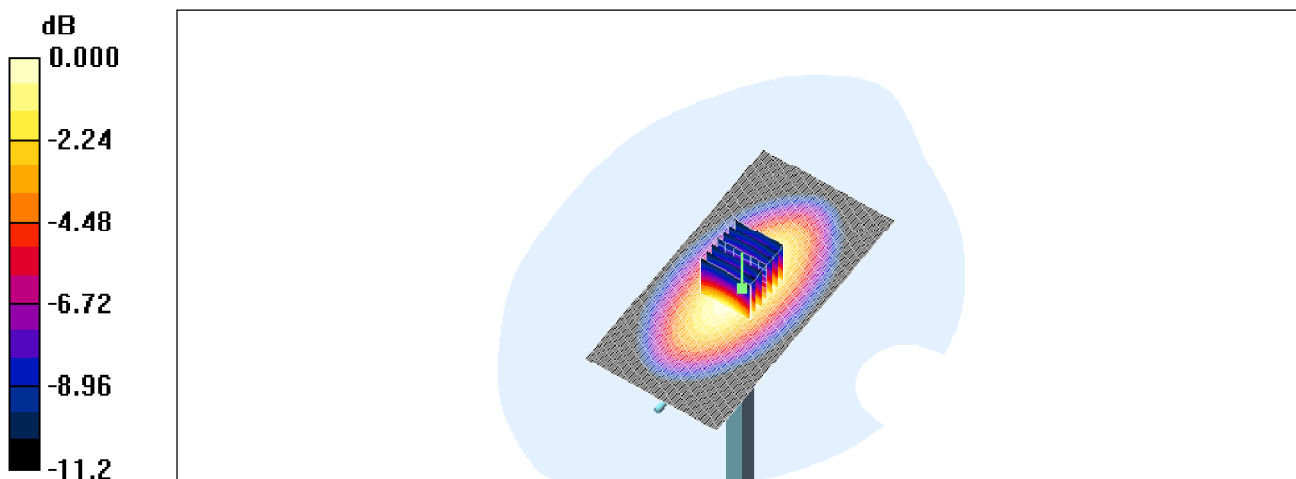

0 dB = 2.91mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

Dipol Valid.900 (m)_250mW

DUT: Dipole 900 MHz; Type: D900V2; Serial: 164

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: Muscle 900 MHz Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.04 \text{ mho/m}$; $\epsilon_r = 54.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.11, 6.11, 6.11); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

Dipol 900 (250mW)/Area Scan (81x161x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (interpolated) = 2.97 mW/g



Dipol 900 (250mW)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 55.8 V/m; Power Drift = -0.025 dB

Peak SAR (extrapolated) = 4.06 W/kg

SAR(1 g) = 2.74 mW/g; SAR(10 g) = 1.78 mW/g

Maximum value of SAR (measured) = 2.97 mW/g

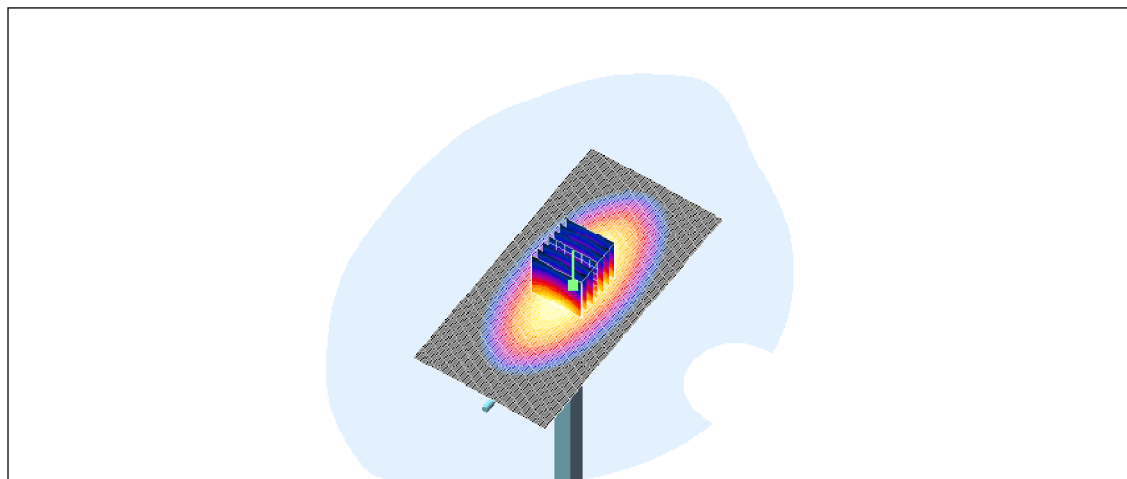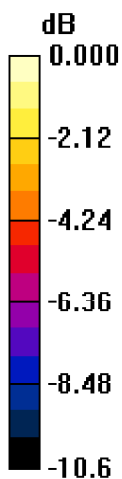

0 dB = 2.97mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

Dipol Valid.1900(m)_250mW 9.12.2006

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Muscle 1900 MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.58$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.57, 4.57, 4.57); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

Dipol 1900 (250mW)/Area Scan (61x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 12.3 mW/g



Dipol 1900 (250mW)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.3 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 10.8 mW/g; SAR(10 g) = 5.71 mW/g

Maximum value of SAR (measured) = 12.2 mW/g

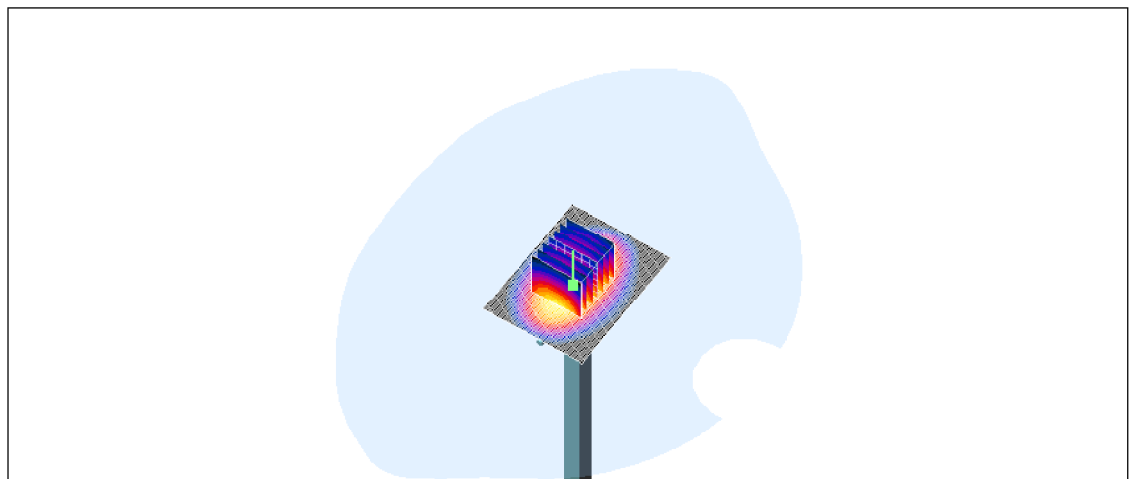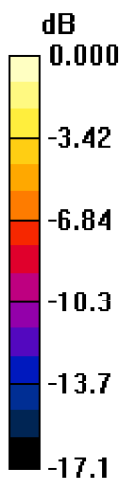

0 dB = 12.2mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

Dipol Valid.1900(h)_250mW10.12.2006

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d025

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: Head 1900 MHz Medium parameters used: $f = 1900$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

Dipol 1900 (250mW)/Area Scan (61x81x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 11.7 mW/g



Dipol 1900 (250mW)/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.5 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 11.6 mW/g

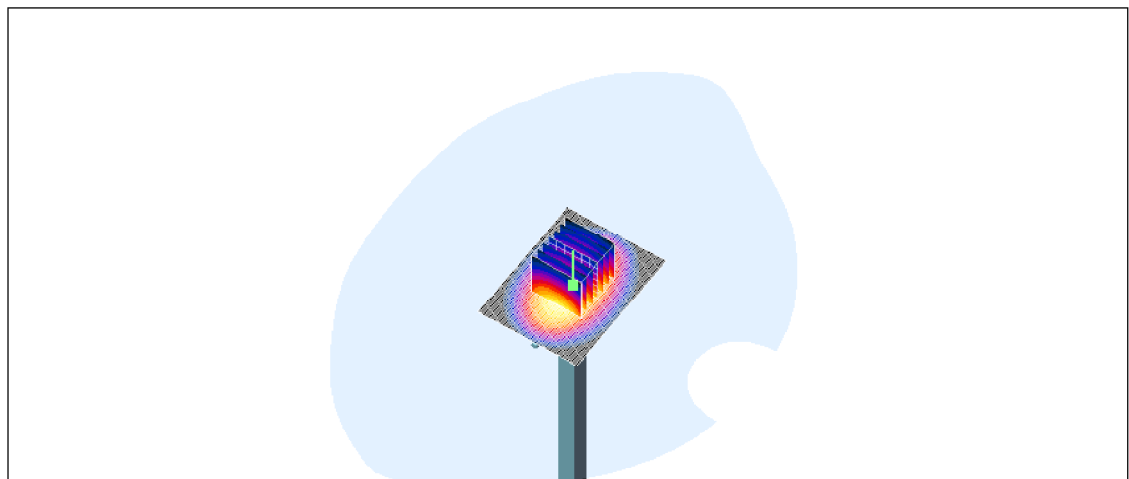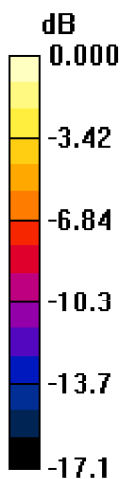

0 dB = 11.6mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_left_ch189_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 900 MHz Medium parameters used: $f = 836.512$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.773 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.26 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.726 mW/g; SAR(10 g) = 0.497 mW/g

Maximum value of SAR (measured) = 0.774 mW/g

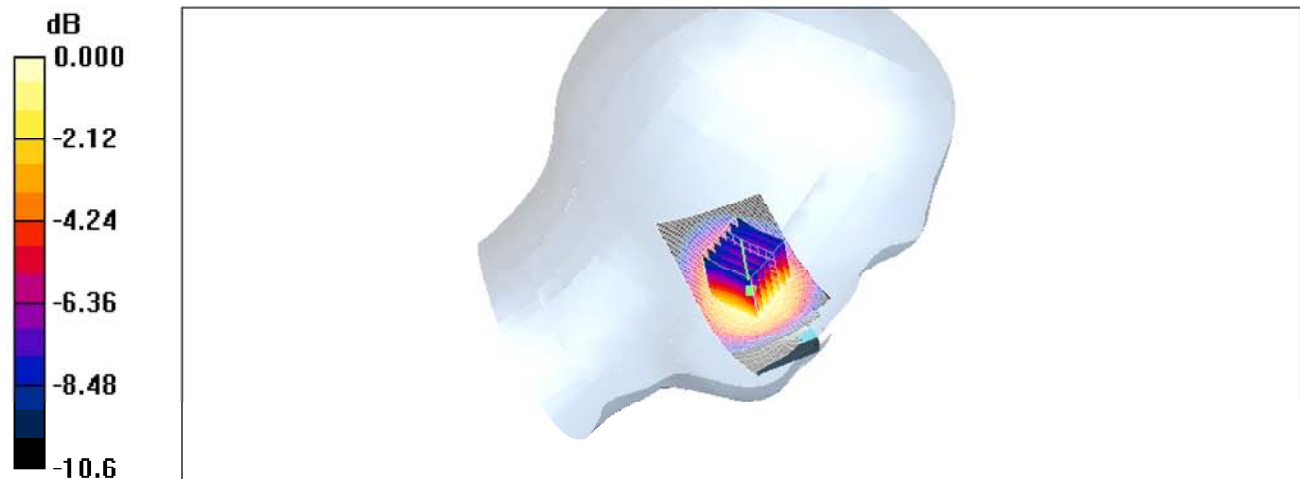

0 dB = 0.774mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_left_ch189_tilted

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 900 MHz Medium parameters used: $f = 836.512$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.184 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.82 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.214 W/kg

SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.113 mW/g

Maximum value of SAR (measured) = 0.170 mW/g

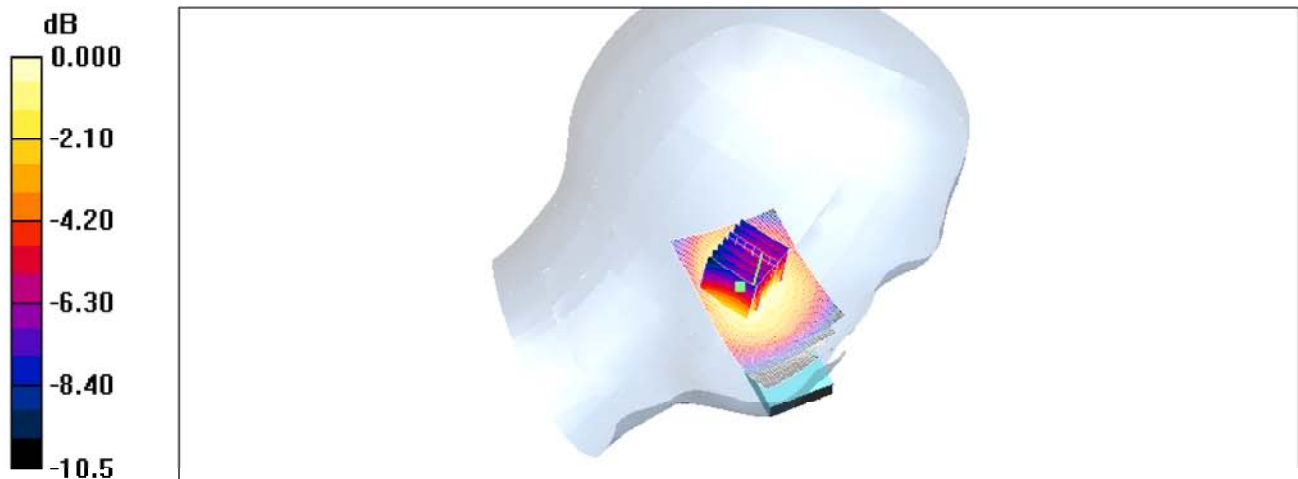

0 dB = 0.170mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_right_ch128_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.874$ mho/m;

$\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.436 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.61 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.287 mW/g

Maximum value of SAR (measured) = 0.434 mW/g

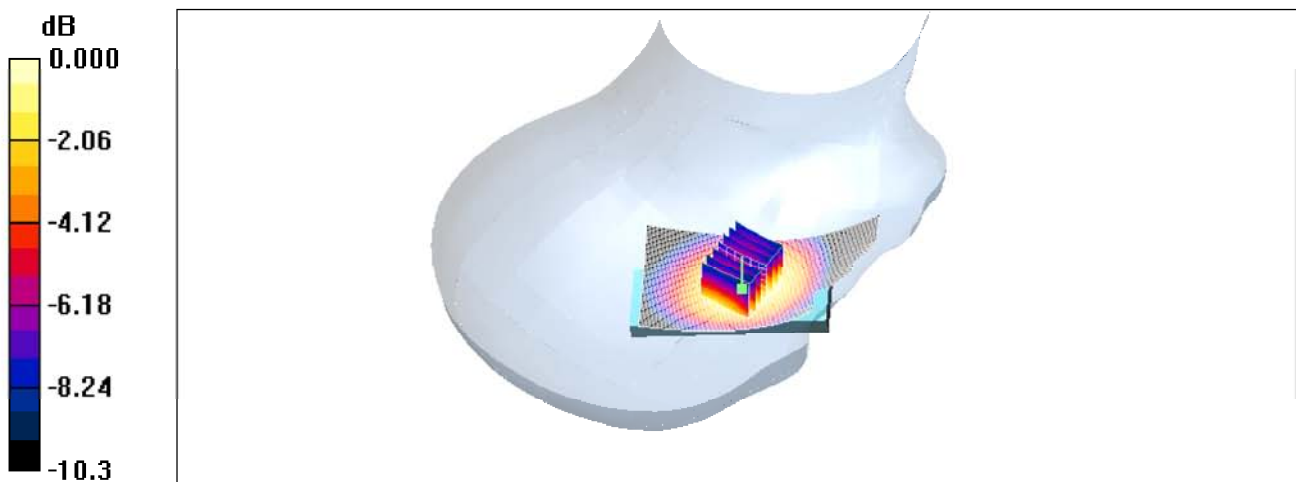

0 dB = 0.434mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_right_ch189_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 900 MHz Medium parameters used: $f = 836.512$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.812 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.3 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.757 mW/g; SAR(10 g) = 0.528 mW/g

Maximum value of SAR (measured) = 0.799 mW/g

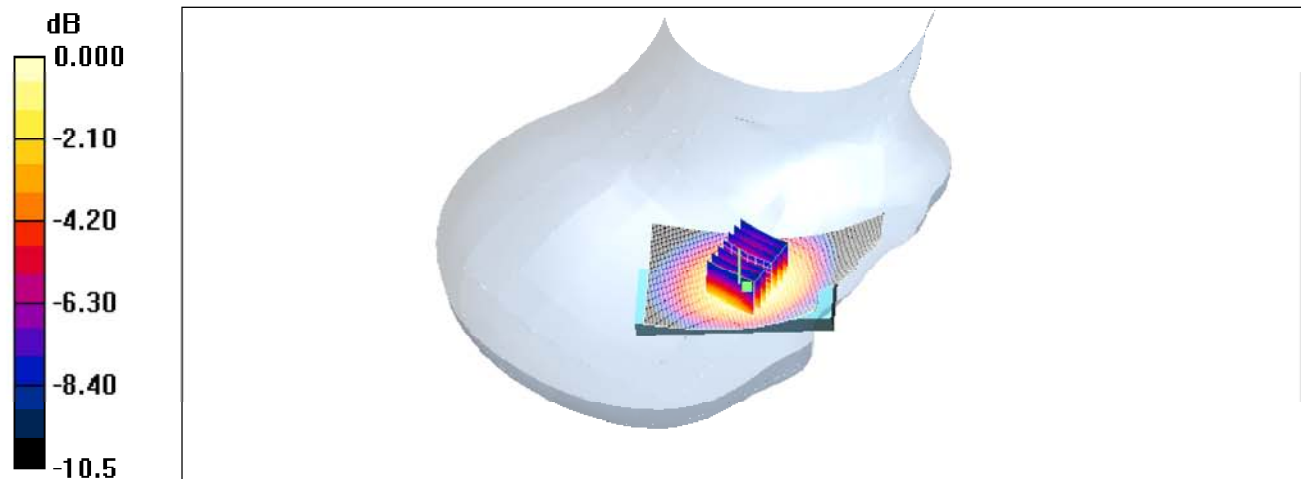

0 dB = 0.799mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_right_ch189_tilted

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Head 900 MHz Medium parameters used: $f = 836.512$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.336 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.335 mW/g

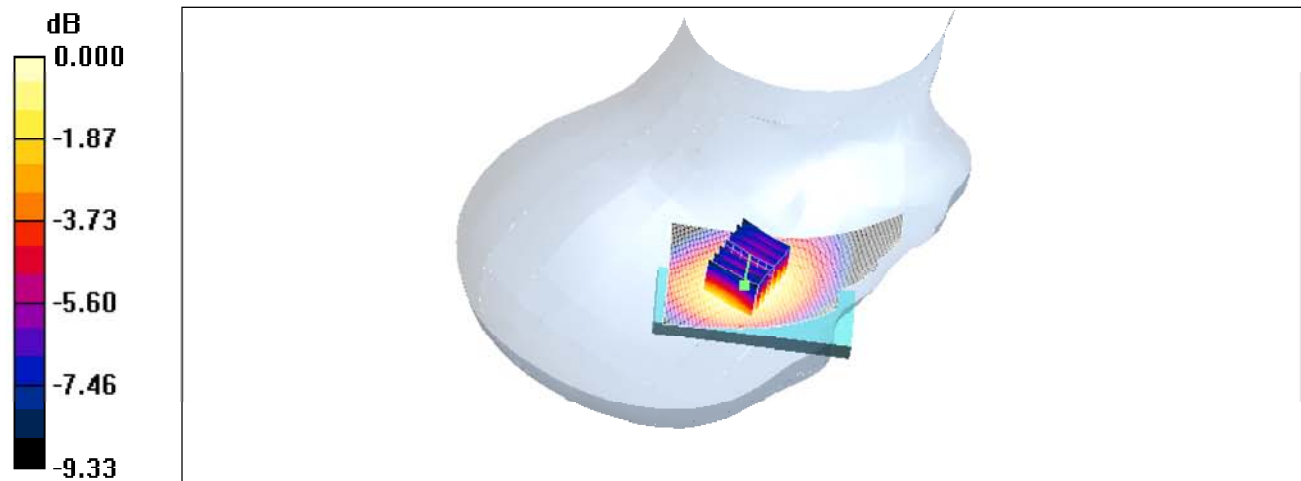

0 dB = 0.335mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_right_ch251_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Head 900 MHz Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.904$ mho/m;

$\epsilon_r = 40.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.38, 6.38, 6.38); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.15 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.758 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

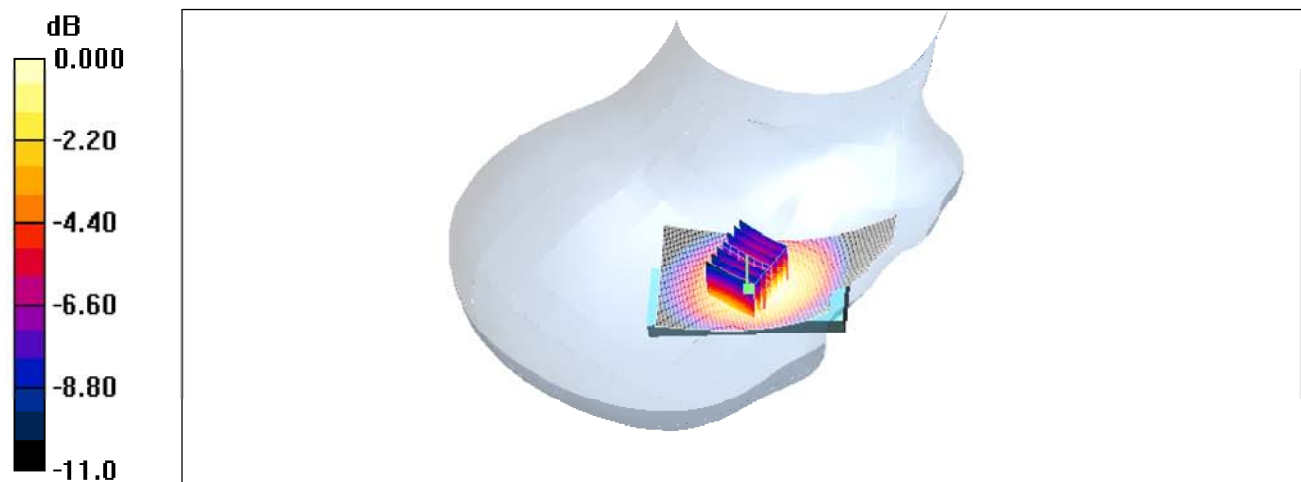

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_flat_ch189_front_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Muscle 900 MHz Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.11, 6.11, 6.11); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.784 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.0 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.520 mW/g

Maximum value of SAR (measured) = 0.801 mW/g

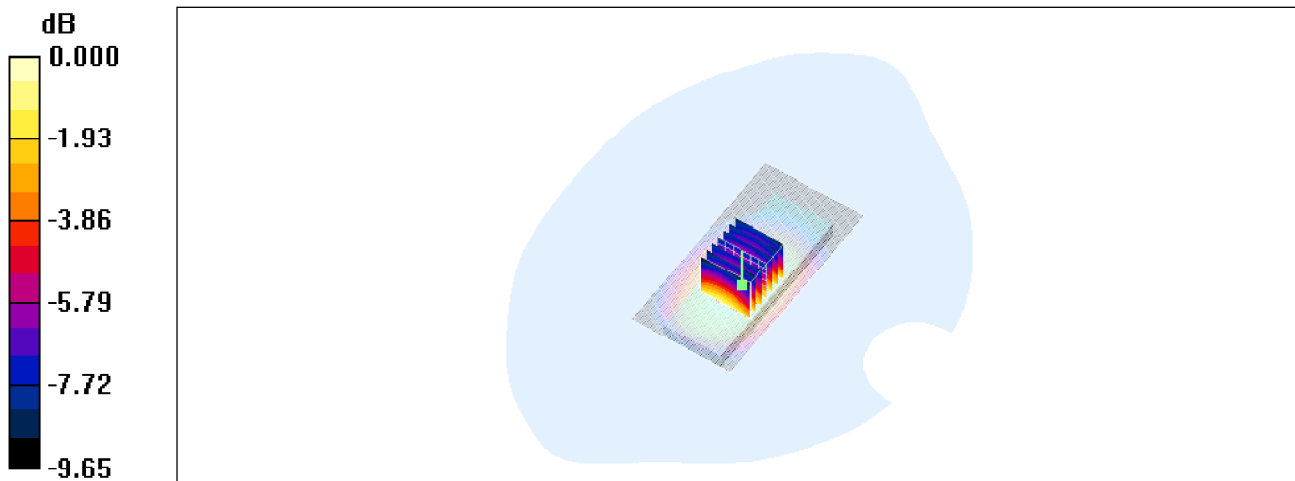

0 dB = 0.801mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_flat_ch128_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: Muscle 900 MHz Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.11, 6.11, 6.11); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.865 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.1 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.553 mW/g

Maximum value of SAR (measured) = 0.891 mW/g

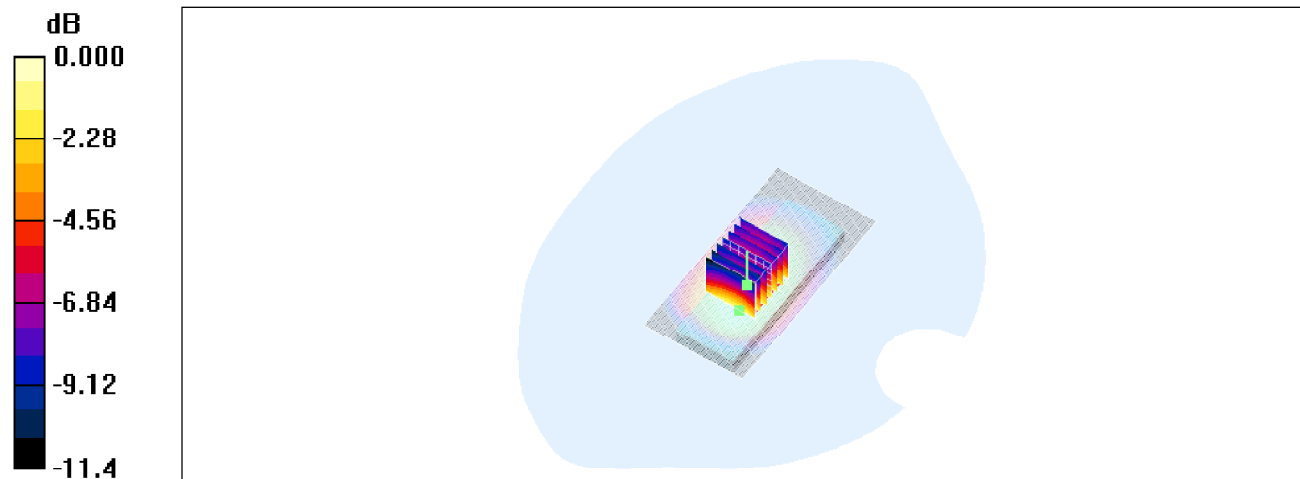

0 dB = 0.891mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_flat_ch189_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: Muscle 900 MHz Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.972$ mho/m; $\epsilon_r = 55.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.11, 6.11, 6.11); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.22 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 35.9 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.784 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

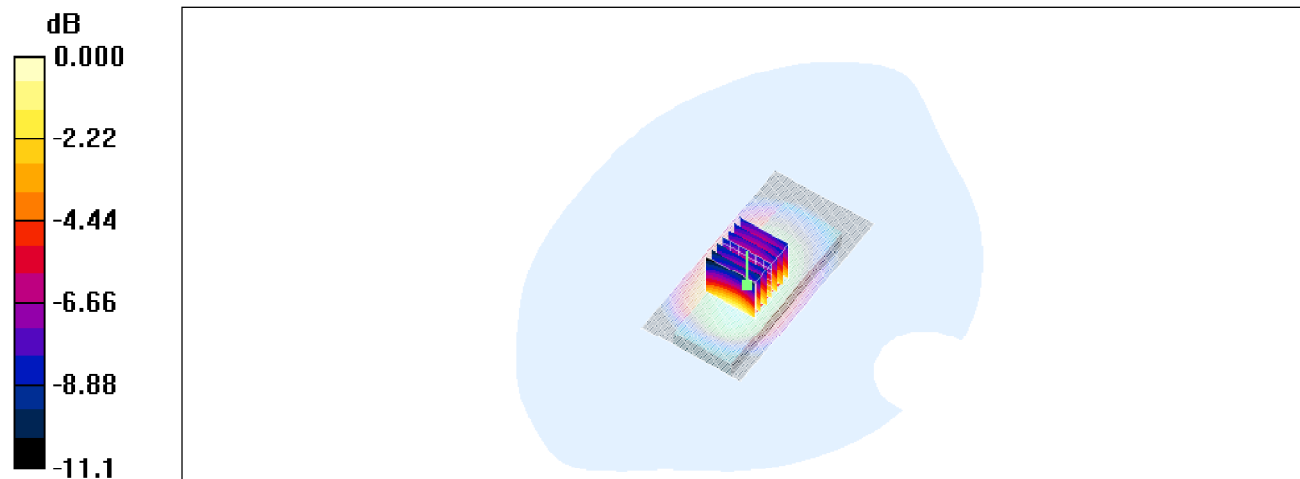

0 dB = 1.22mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_850_flat_ch251_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: Muscle 900 MHz Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.981$ mho/m; $\epsilon_r = 55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(6.11, 6.11, 6.11); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.888 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.0 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.838 mW/g; SAR(10 g) = 0.568 mW/g

Maximum value of SAR (measured) = 0.905 mW/g

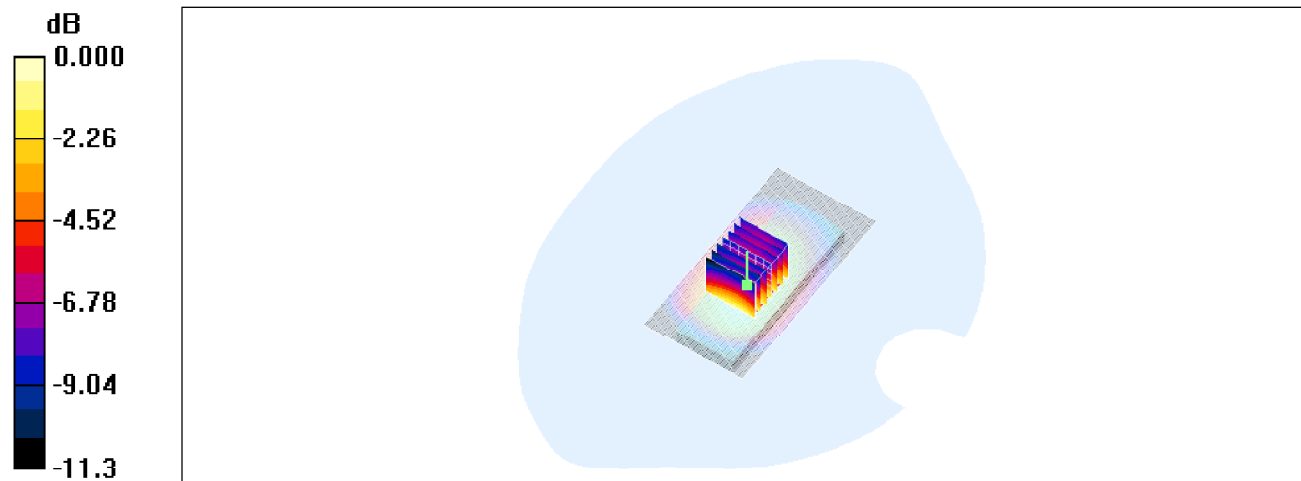

0 dB = 0.905mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_1900_flat_ch661_front_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.55 \text{ mho/m}$; $\epsilon_r = 51.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.57, 4.57, 4.57); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.658 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.9 V/m ; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.579 mW/g ; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.644 mW/g

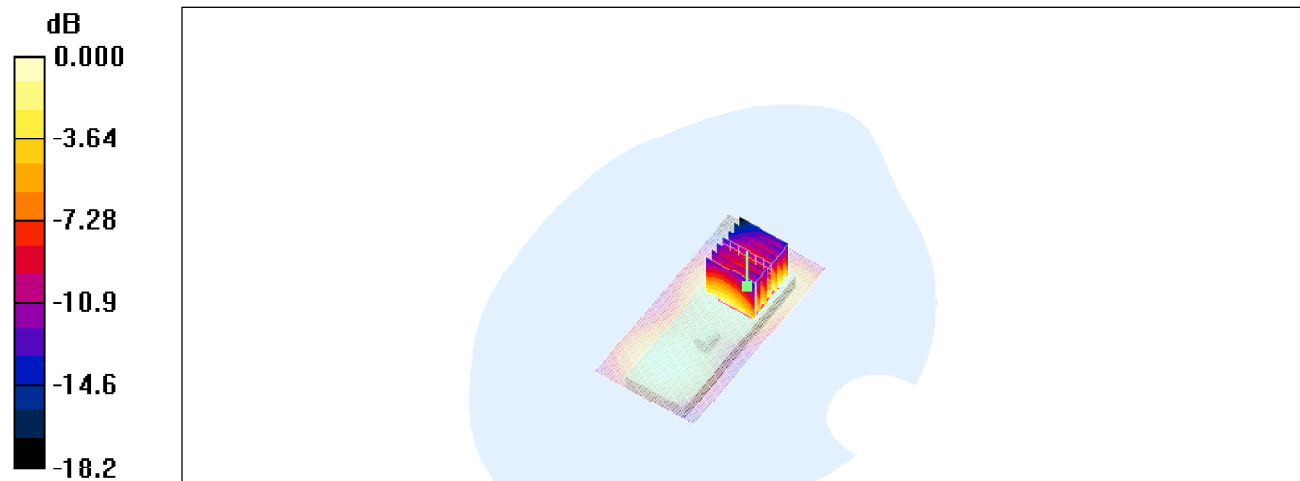

0 dB = 0.644mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_1900_flat_ch512_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.57, 4.57, 4.57); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.01 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.2 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 2.62 W/kg

SAR(1 g) = 1.38 mW/g; SAR(10 g) = 0.836 mW/g

Maximum value of SAR (measured) = 1.57 mW/g

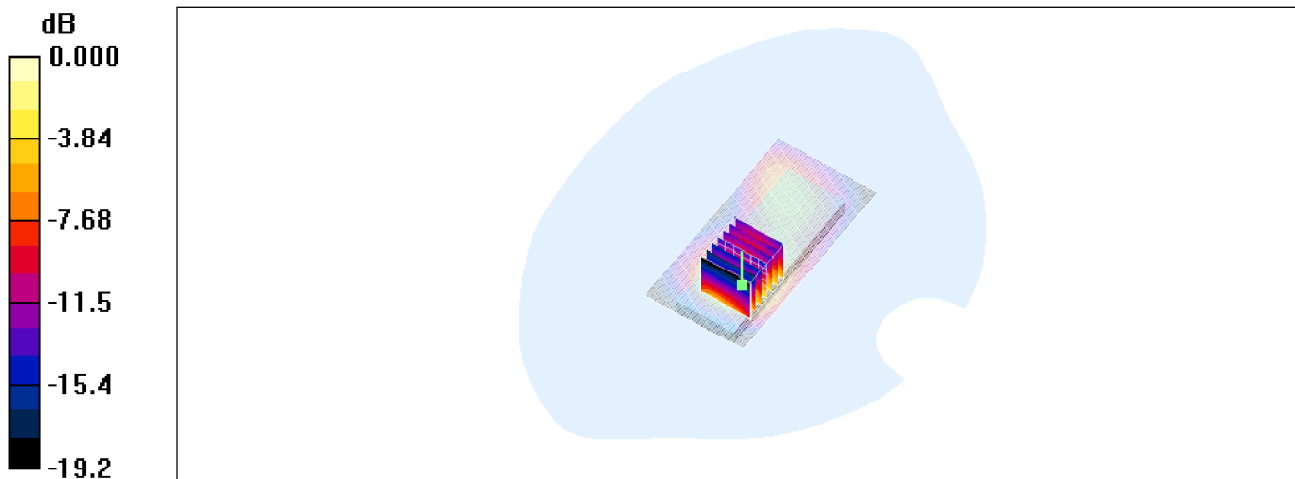

0 dB = 1.57mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_1900_flat_ch661_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.57, 4.57, 4.57); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.84 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 1.53 mW/g; SAR(10 g) = 0.851 mW/g

Maximum value of SAR (measured) = 1.72 mW/g

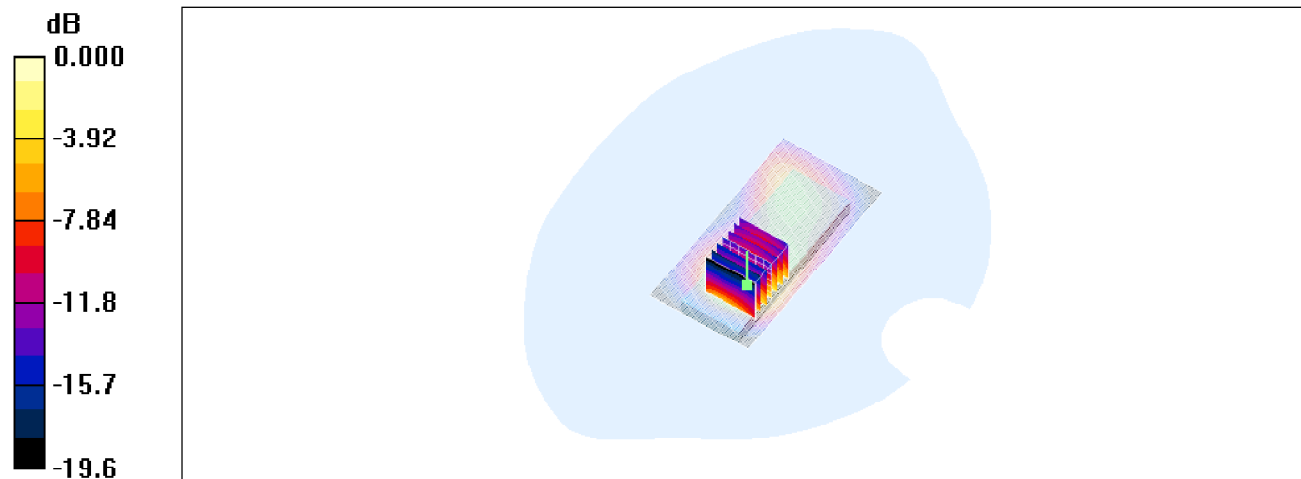

0 dB = 1.72mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

GSM_1900_flat_ch810_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.59$ mho/m; $\epsilon_r = 51.9$;

$\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.57, 4.57, 4.57); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.15 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.3 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 2.59 W/kg

SAR(1 g) = 1.43 mW/g; SAR(10 g) = 0.81 mW/g

Maximum value of SAR (measured) = 1.71 mW/g

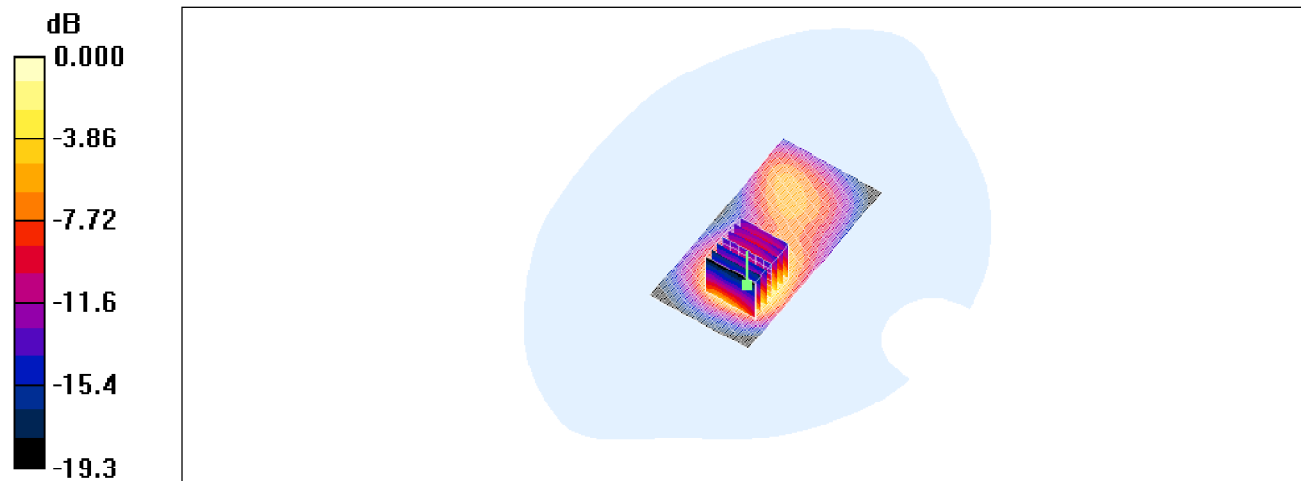

0 dB = 1.71mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

PCS_1900_left_ch512_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.37$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.930 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.4 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.782 mW/g; SAR(10 g) = 0.430 mW/g

Maximum value of SAR (measured) = 0.898 mW/g

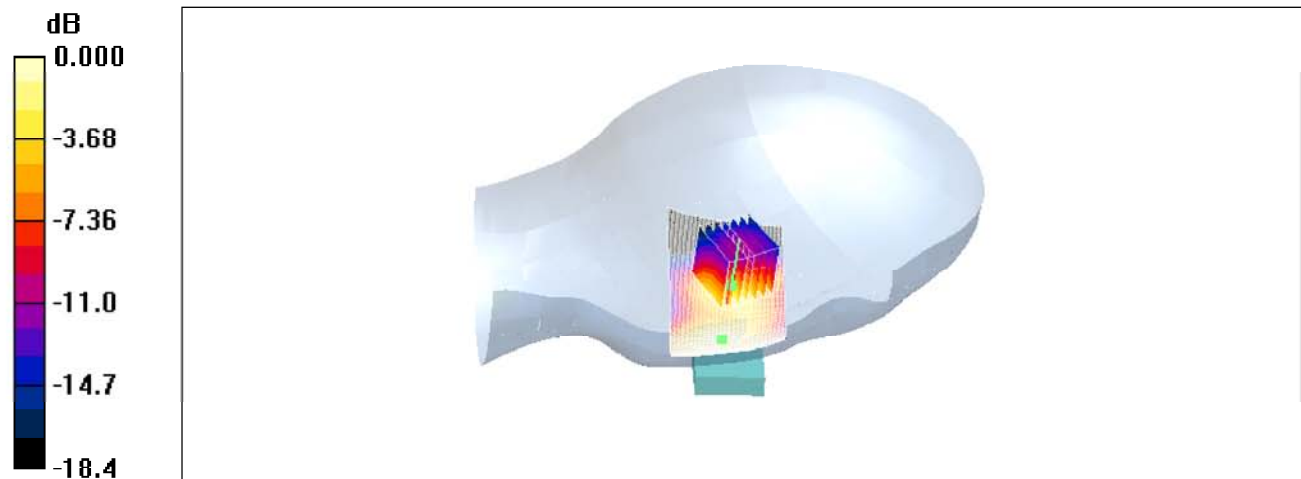

0 dB = 0.898mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

PCS_1900_left_ch661_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x121x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.867 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.5 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.460 mW/g

Maximum value of SAR (measured) = 0.866 mW/g

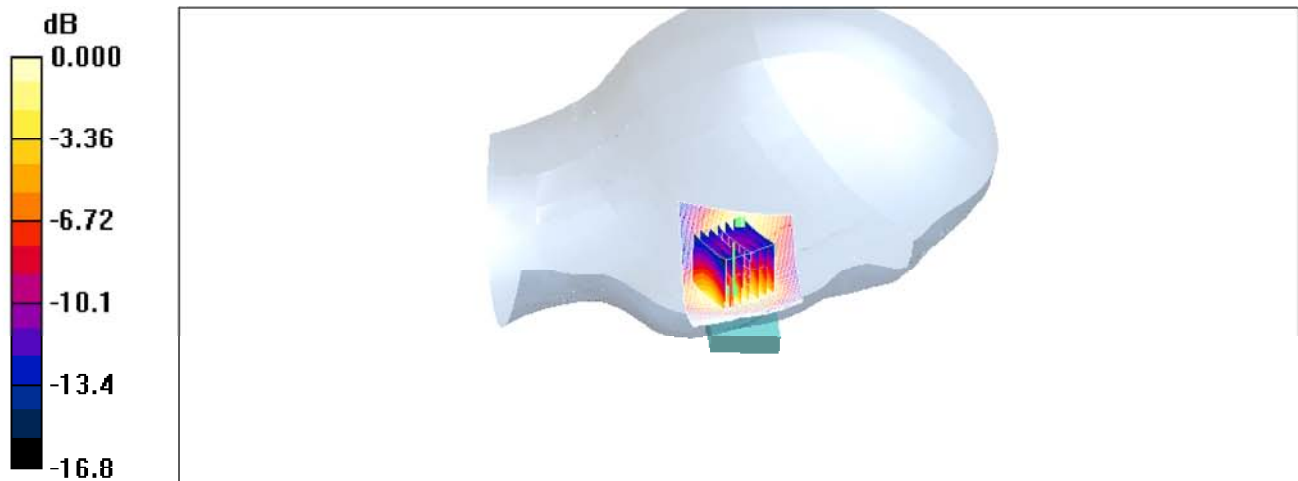

0 dB = 0.866mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

PCS_1900_left_ch661_tilted

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.724 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = 0.011 dB

Peak SAR (extrapolated) = 0.983 W/kg

SAR(1 g) = 0.632 mW/g; SAR(10 g) = 0.354 mW/g

Maximum value of SAR (measured) = 0.714 mW/g

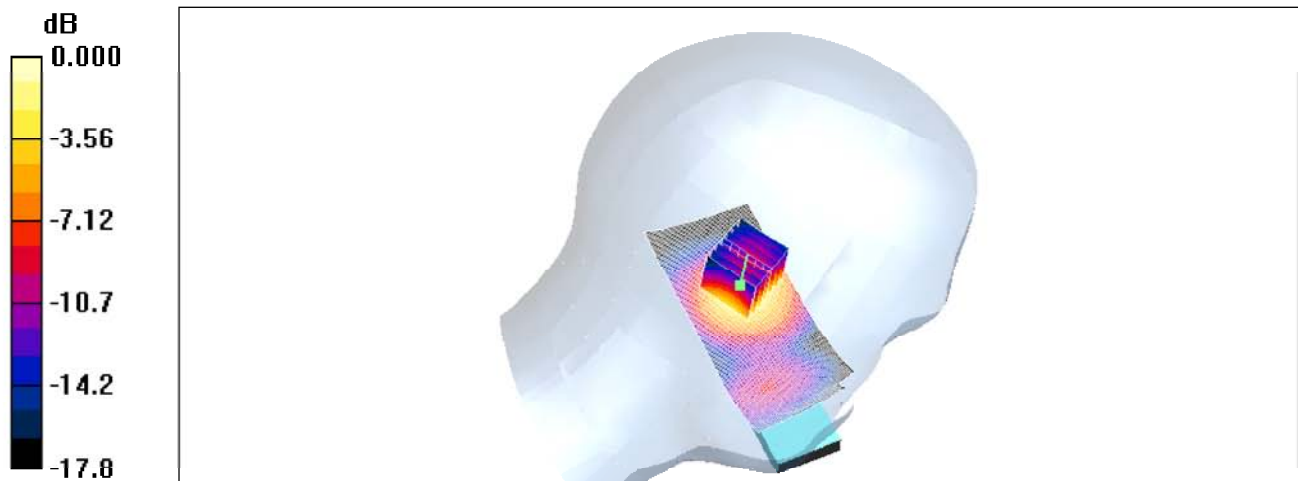

Test Laboratory: ETS PRODUCT SERVICE AG

PCS_1900_left_ch810_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.43 \text{ mho/m}$; $\epsilon_r = 39.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x141x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (interpolated) = 0.876 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.2 V/m ; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.802 mW/g ; SAR(10 g) = 0.466 mW/g

Maximum value of SAR (measured) = 0.879 mW/g

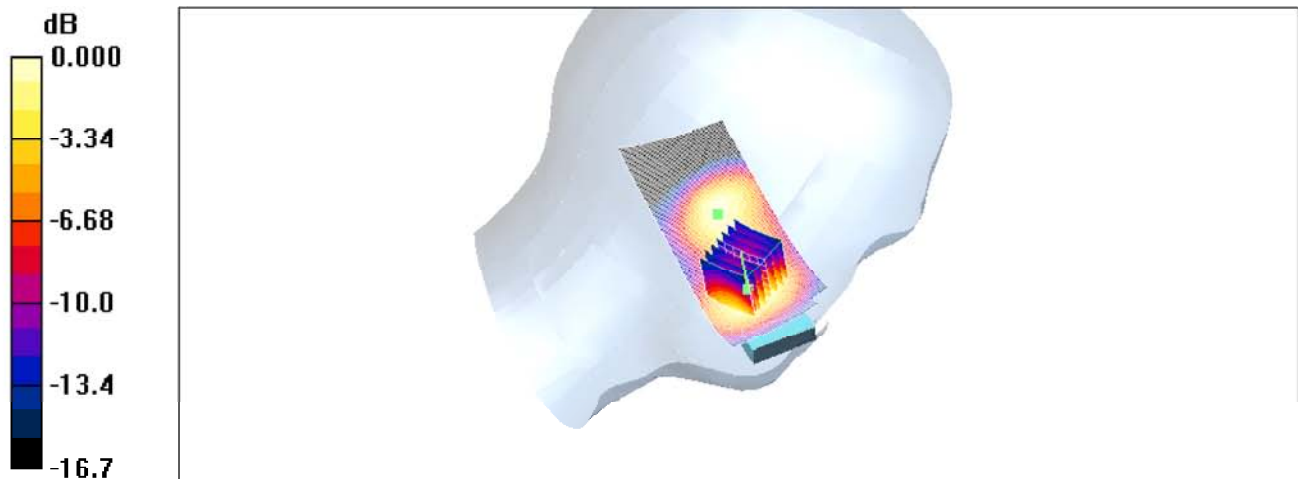

0 dB = 0.879 mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

PCS_1900_right_ch661_cheek

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.778 mW/g



A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.3 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.659 mW/g; SAR(10 g) = 0.367 mW/g

Maximum value of SAR (measured) = 0.746 mW/g

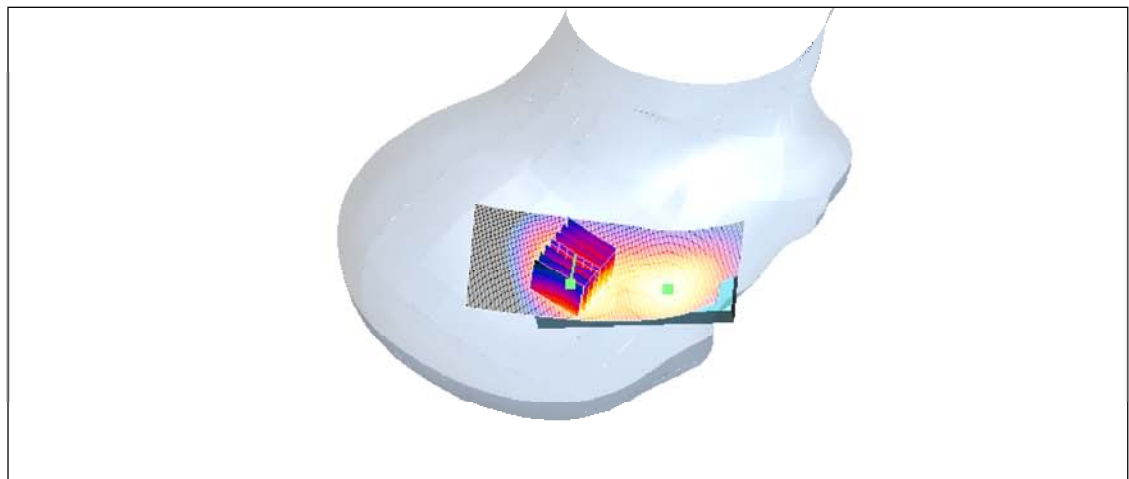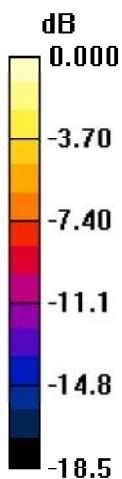

0 dB = 0.746mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

PCS_1900_right_ch661_tilted

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Head 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(5.16, 5.16, 5.16); Calibrated: 10/16/2006
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Area Scan (61x141x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.718 mW/g


A100/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.1 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.645 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (measured) = 0.730 mW/g

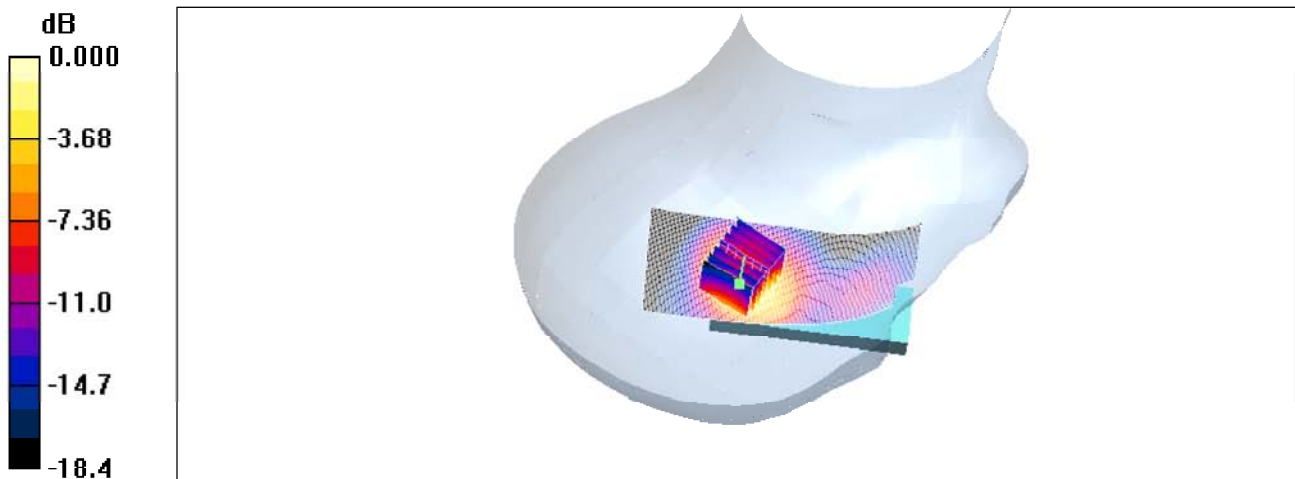

0 dB = 0.730mW/g

Test Laboratory: ETS PRODUCT SERVICE AG

Z_axis_scan_GSM_1900_flat_ch661_back_5mm

DUT: A100; Type: Triple Band GSM850/DCS1800/DCS1900 (with WAP & GPRS); Serial: S-6

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: Muscle 1900 MHz Medium parameters used: $f = 1880$ MHz; $\sigma = 1.55$ mho/m; $\epsilon_r = 51.9$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1711; ConvF(4.57, 4.57, 4.57); Calibrated: 10/16/2006
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn522; Calibrated: 9/21/2006
- Phantom: SAM 12; Type: TP-1217; Serial: QD000P40CA
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 171

A100/Z Scan (1x1x31): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (interpolated) = 0.951 mW/g

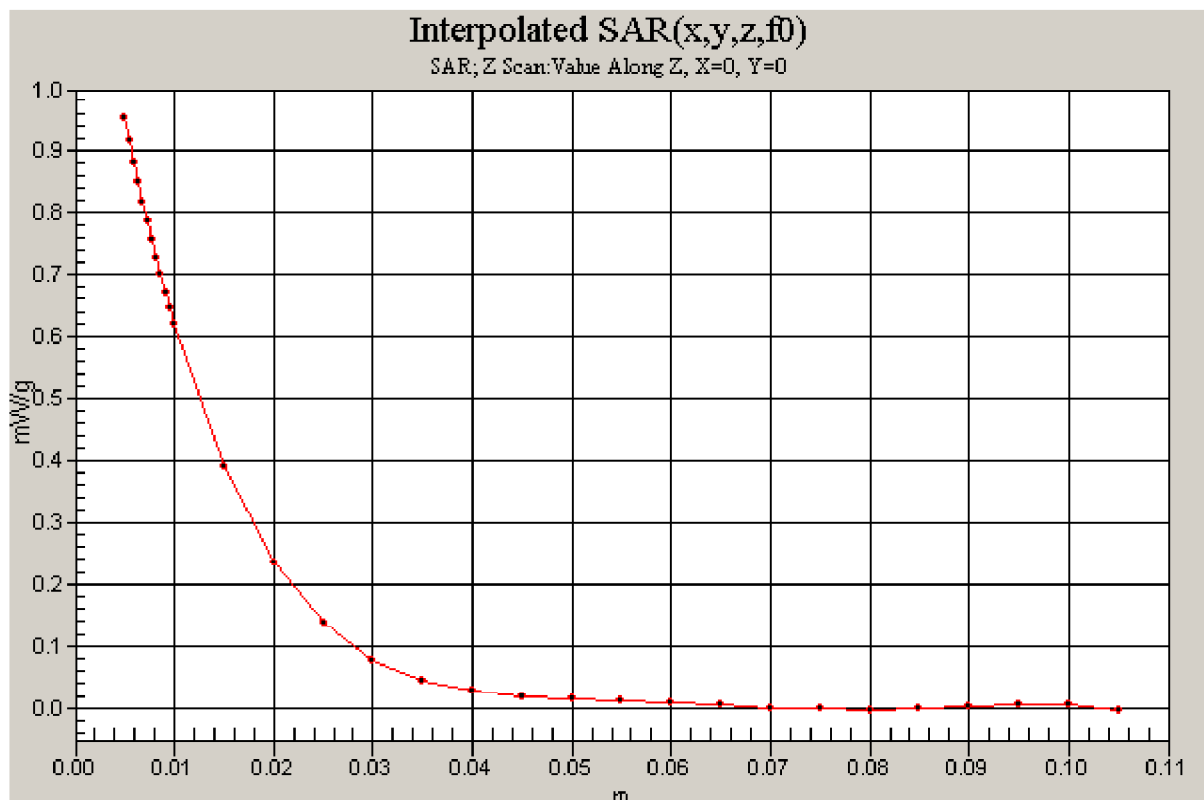

Appendix C

Pictures

Appendix

C. Pictures





