


Appendix B

RF power output conducted

FCC Part 22 H
Output power conducted

EUT	UTMS GSM phone
Model	C600 / Mode: UMTS OpB V
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 4133
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
	Ref Lvl	23.76 dBm	VBW	3 MHz	
	36 dBm	827.53186373 MHz	SWT	5 ms	Unit
					dBm

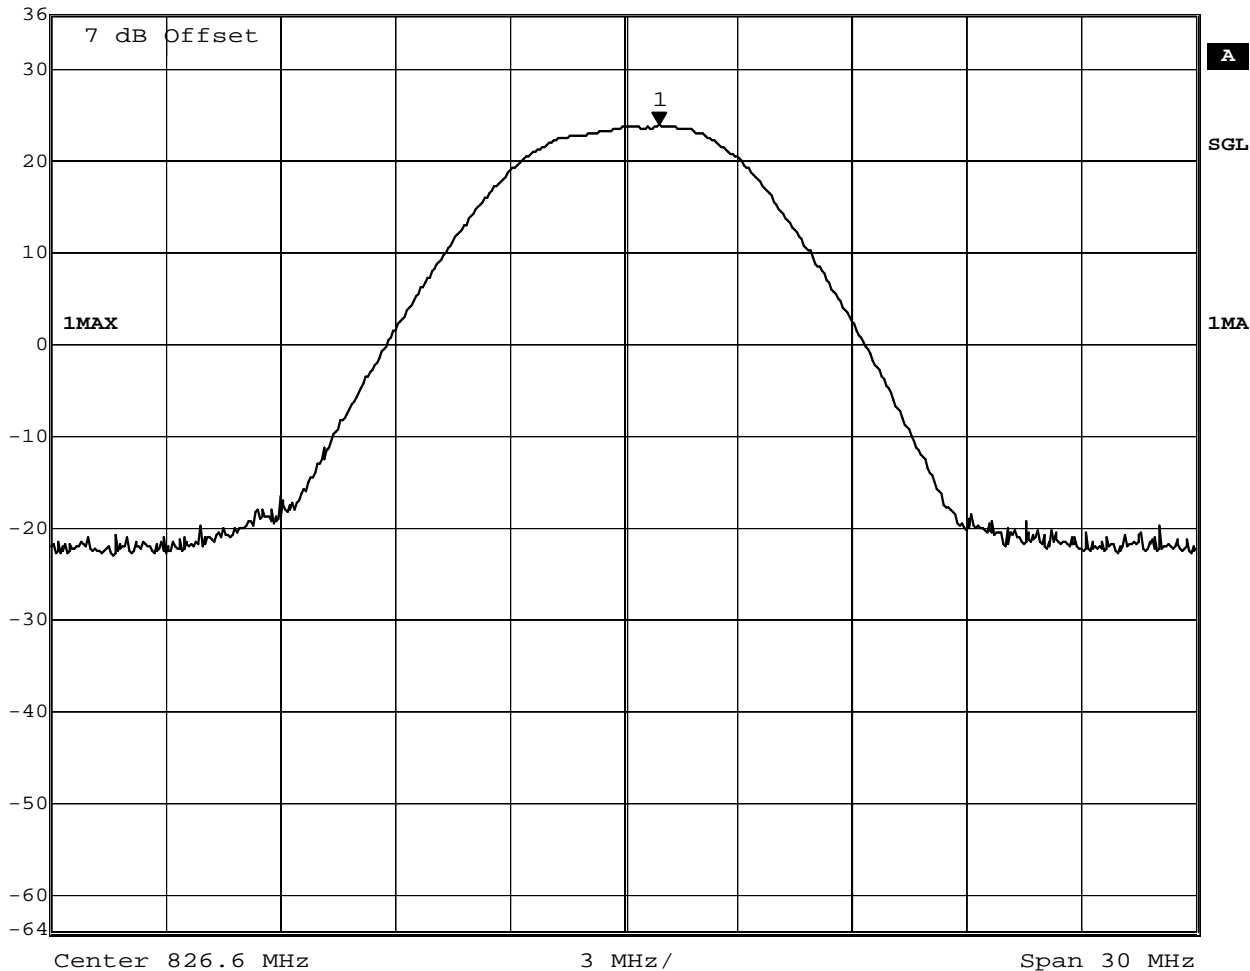


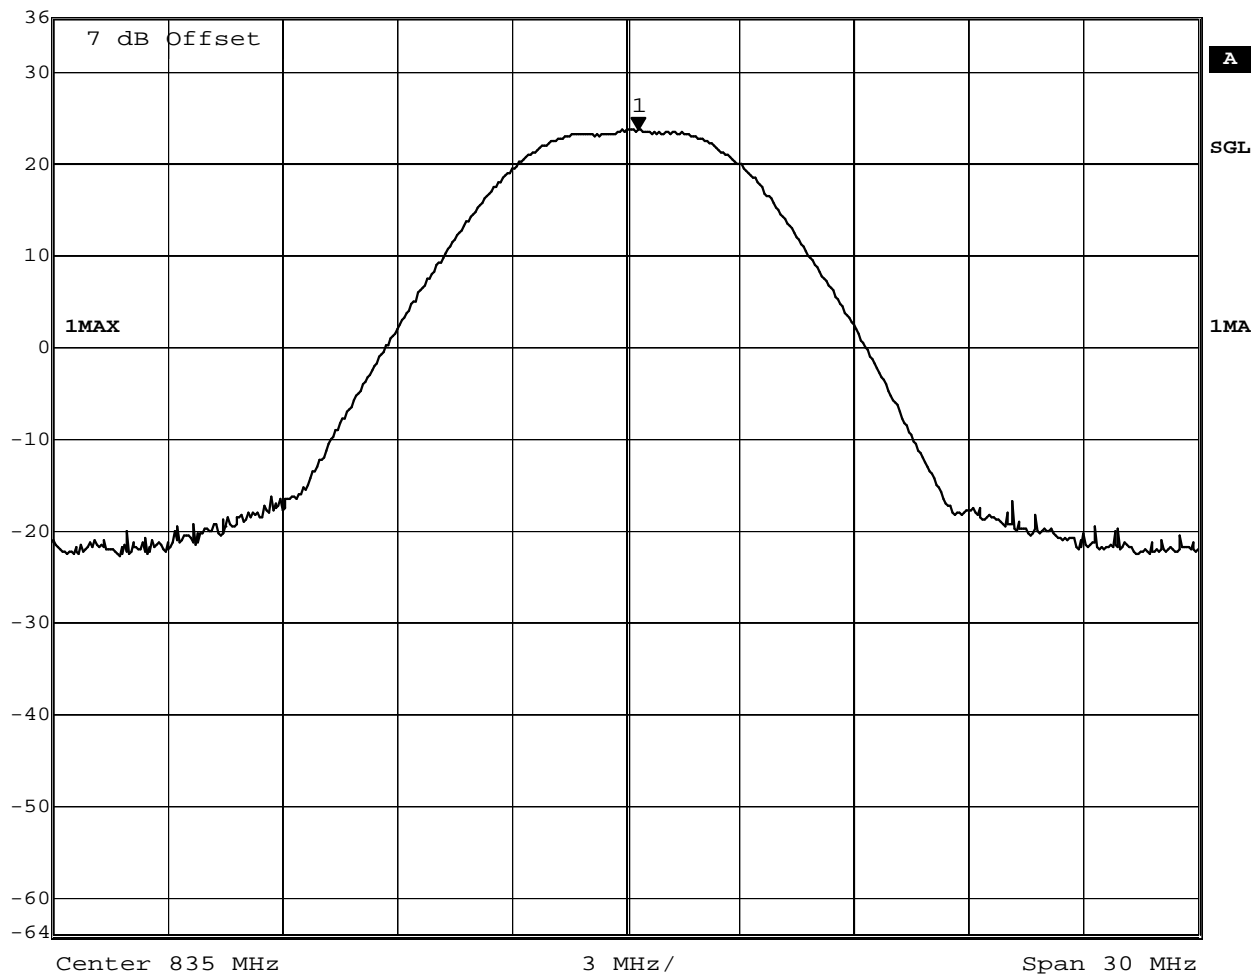
Date: 1.FEB.2007 08:53:46

Measurement diagram

FCC Part 22 H
Output power conducted

EUT	UTMS GSM phone
Model	C600 / Mode: UMTS OpB V
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 4175
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
	Ref Lvl	23.58 dBm	VBW	3 MHz	
	36 dBm	835.33066132 MHz	SWT	5 ms	Unit dBm




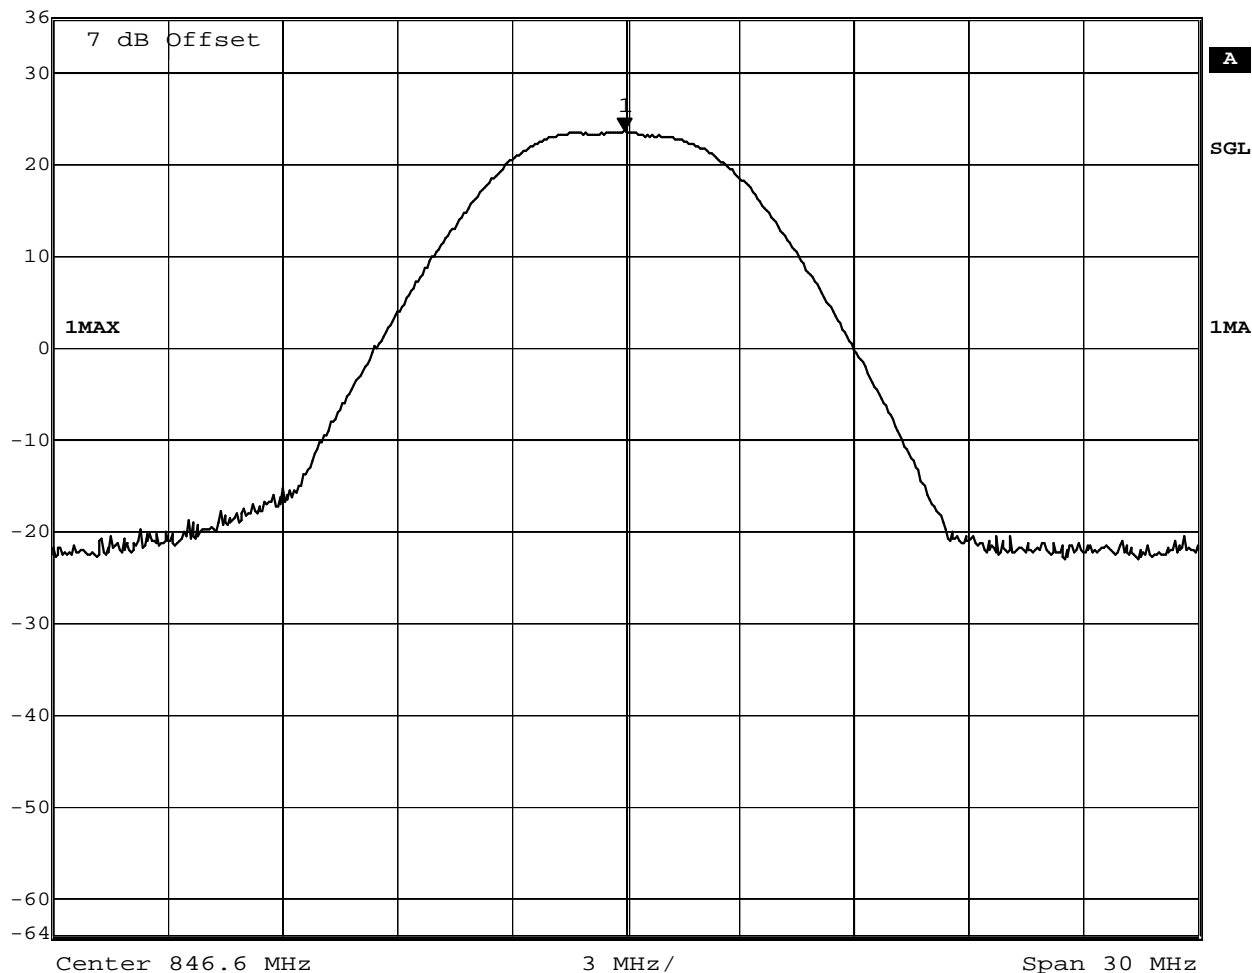
Date: 1.FEB.2007 08:55:37

Measurement diagram

FCC Part 22 H
Output power conducted

EUT	UTMS GSM phone
Model	C600 / Mode: UMTS OpB V
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 4232
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
	Ref Lvl	23.57 dBm	VBW	3 MHz	
	36 dBm	846.56993988 MHz	SWT	5 ms	Unit dBm




Date: 1.FEB.2007 08:56:33


Measurement diagram

FCC Part 24 E

Output power conducted

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9263
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
	Ref Lvl	24.30 dBm	VBW	3 MHz	
	36 dBm	1.85281042 GHz	SWT	5 ms	Unit dBm

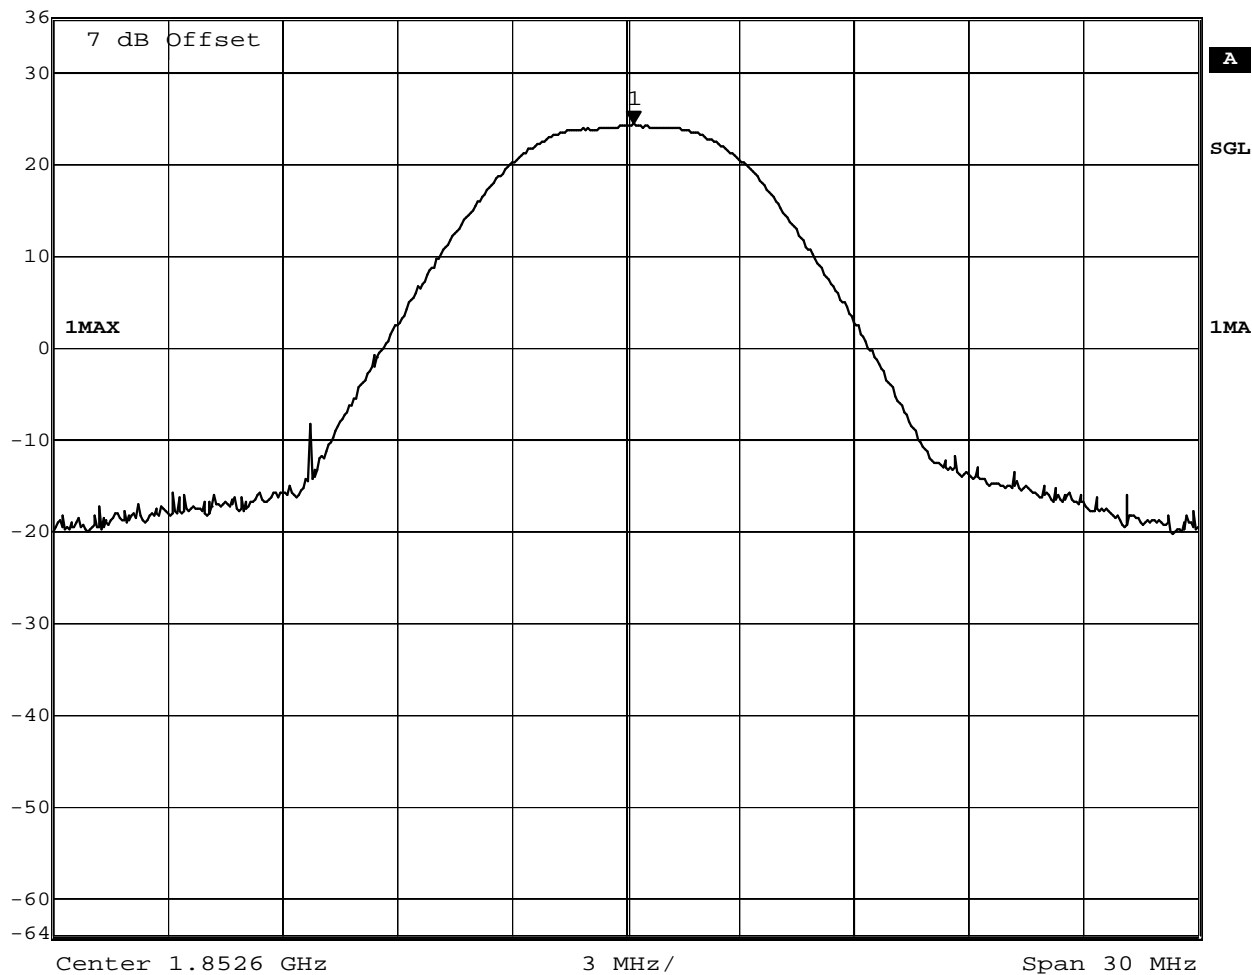


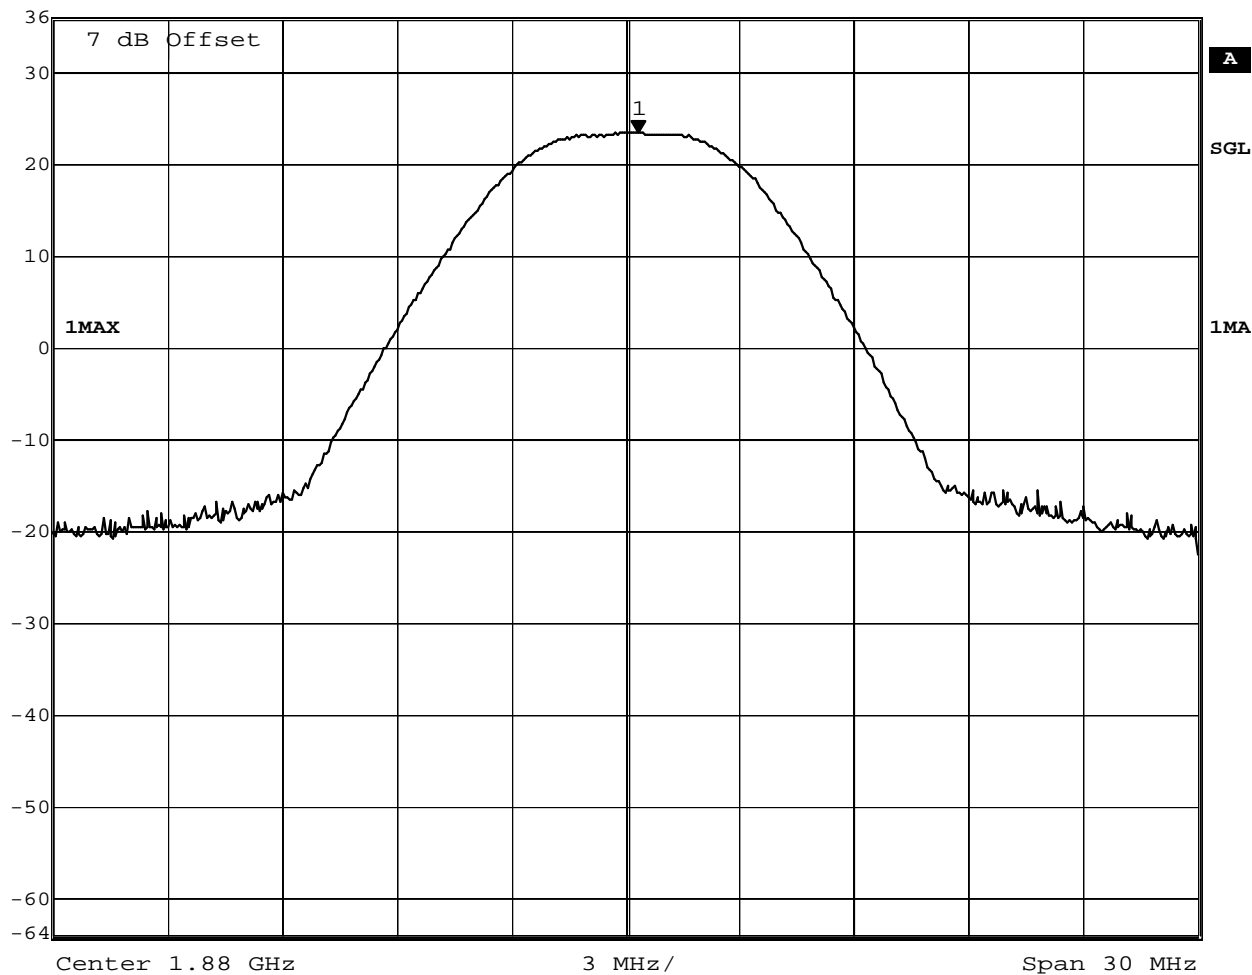
Date: 1.FEB.2007 08:19:31

Measurement diagram

FCC Part 24 E
Output power conducted

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9400
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
	Ref Lvl	23.47 dBm	VBW	3 MHz	
	36 dBm	1.88033066 GHz	SWT	5 ms	Unit dBm




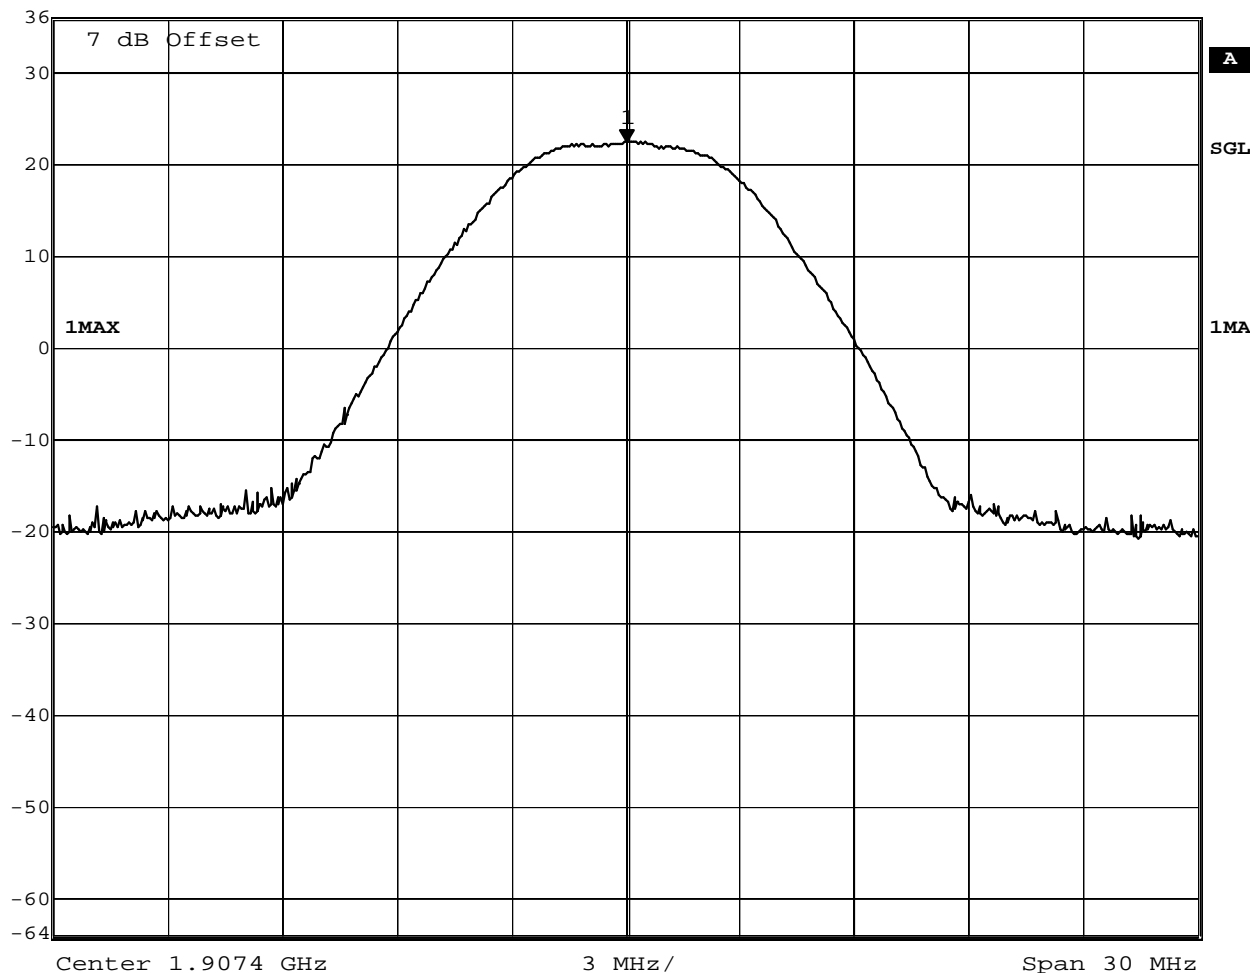
Date: 1.FEB.2007 08:15:50

Measurement diagram

FCC Part 24 E
Output power conducted

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9537
Comment 2	
Comment 3	

	Marker 1 [T1]	RBW	3 MHz	RF Att	50 dB
	Ref Lvl	22.38 dBm	VBW	3 MHz	
	36 dBm	1.90743006 GHz	SWT	5 ms	Unit dBm



Date: 1.FEB.2007 08:14:32


Measurement diagram

Appendix C

RF power output radiated


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4133
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 827.631MHz, Pmax: 22.46dBm, RBW: 3MHz

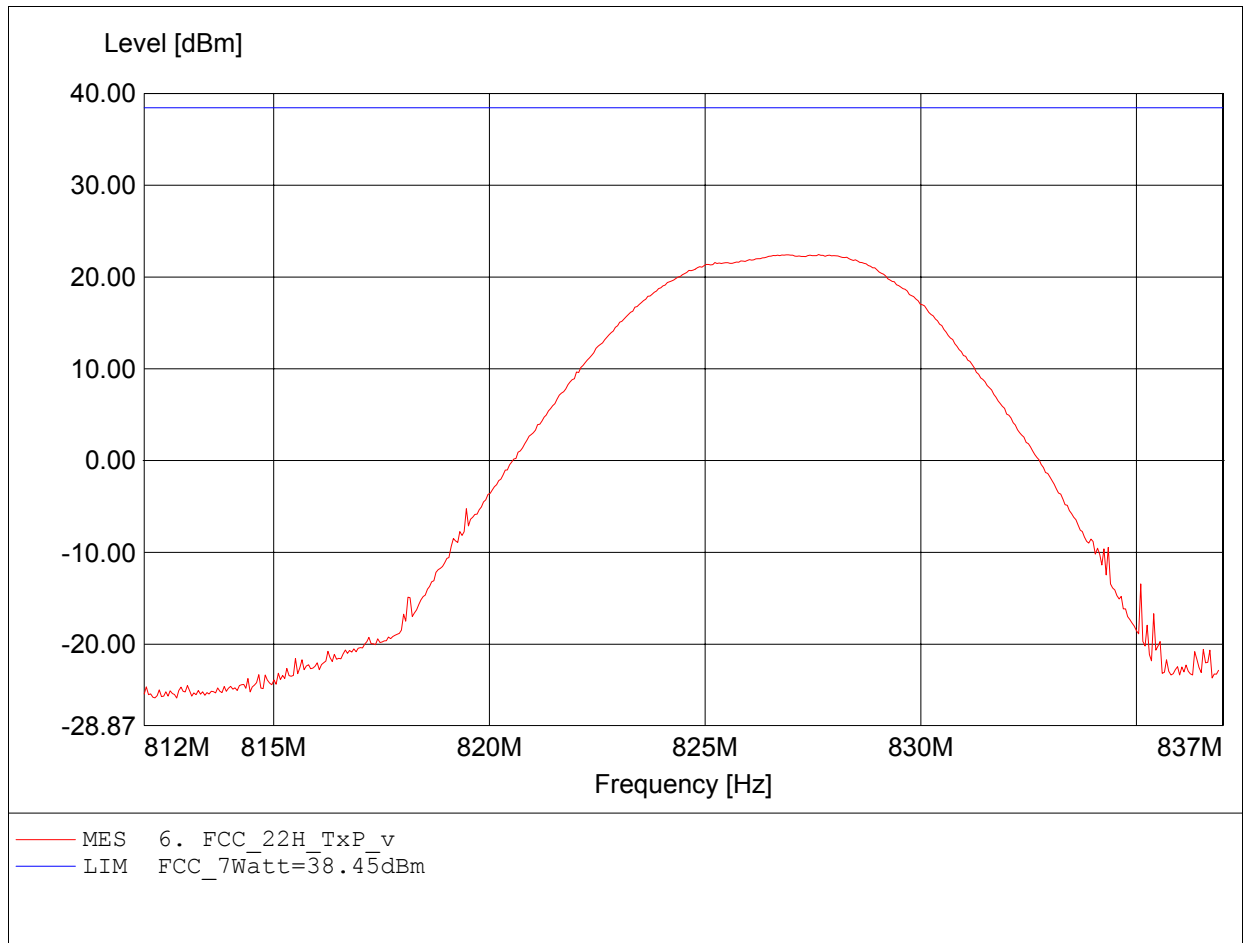


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4133
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 827.932MHz, Pmax: 15.83dBm, RBW: 3MHz

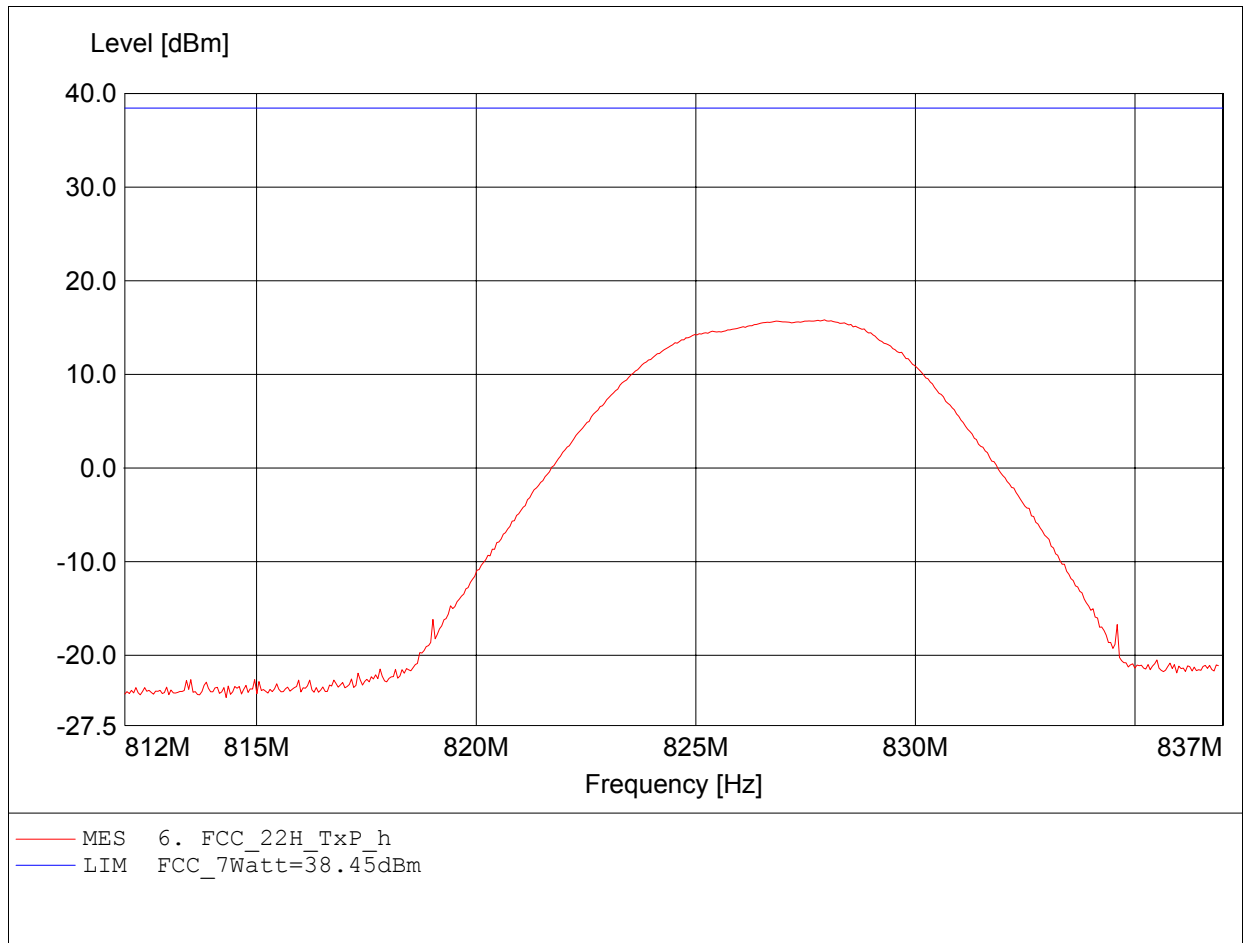


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4175
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 835.255MHz, Pmax: 21.73dBm, RBW: 3MHz

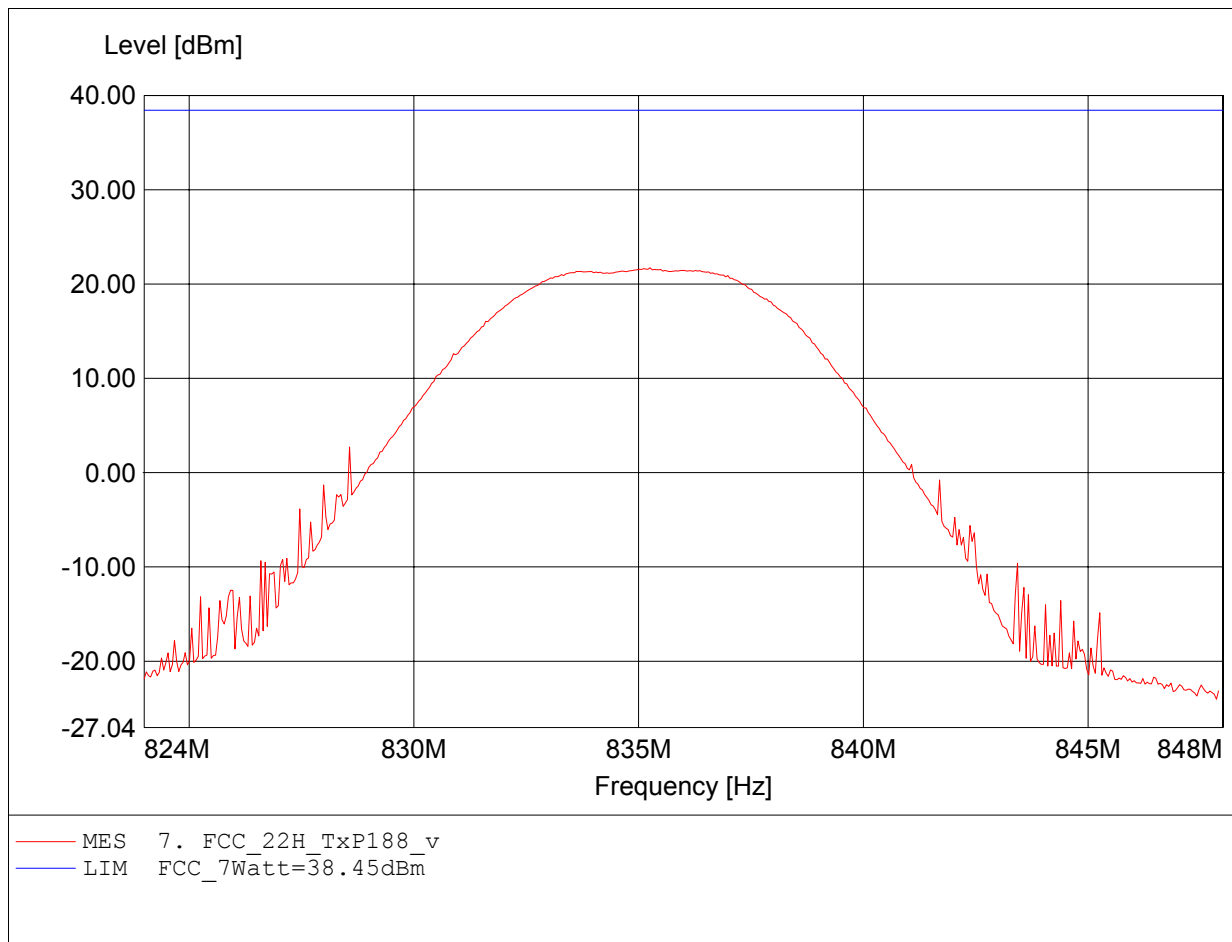


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4175
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 835.158MHz, Pmax: 16.02dBm, RBW: 3MHz

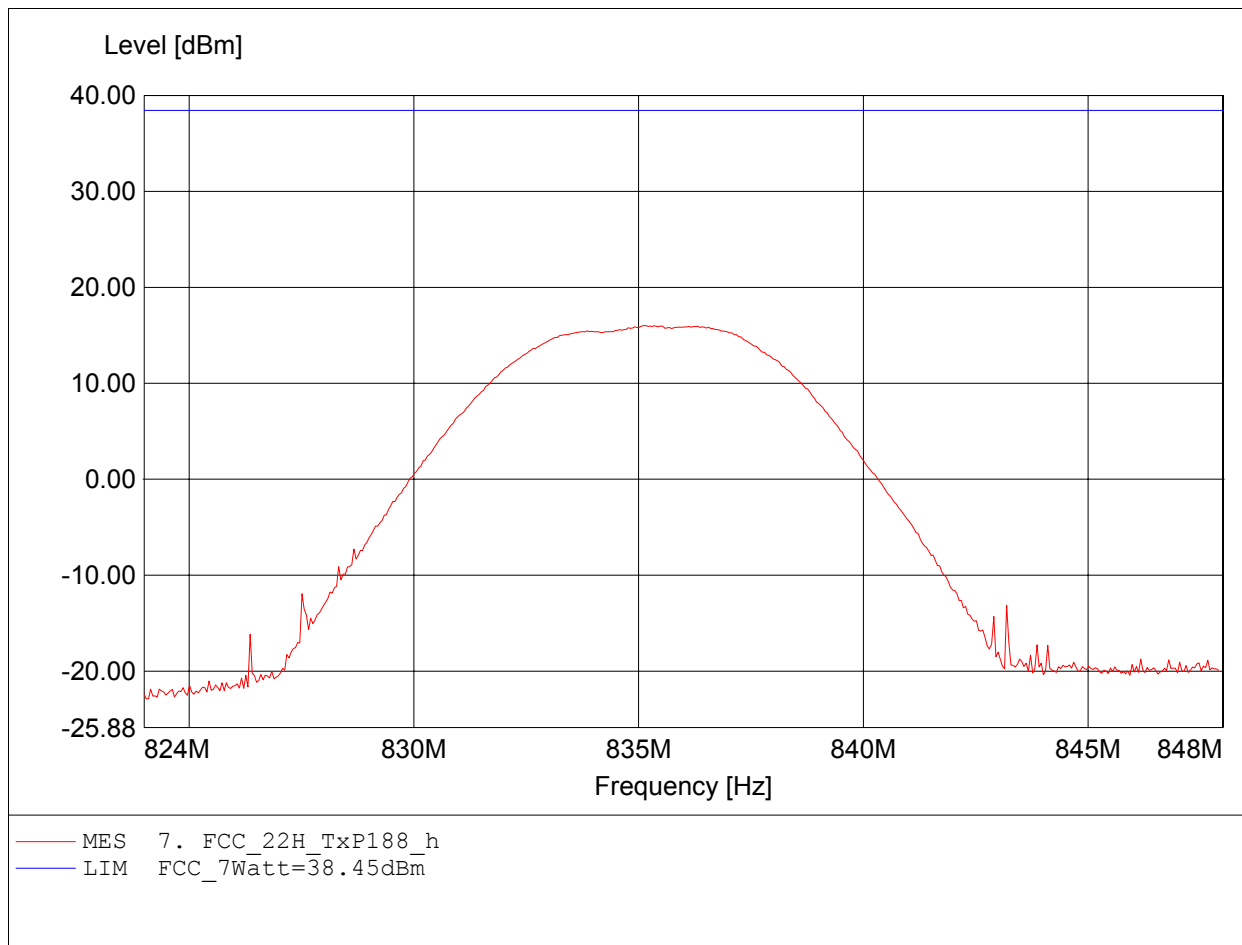


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4232
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 846.924MHz, Pmax: 21.85dBm, RBW: 3MHz

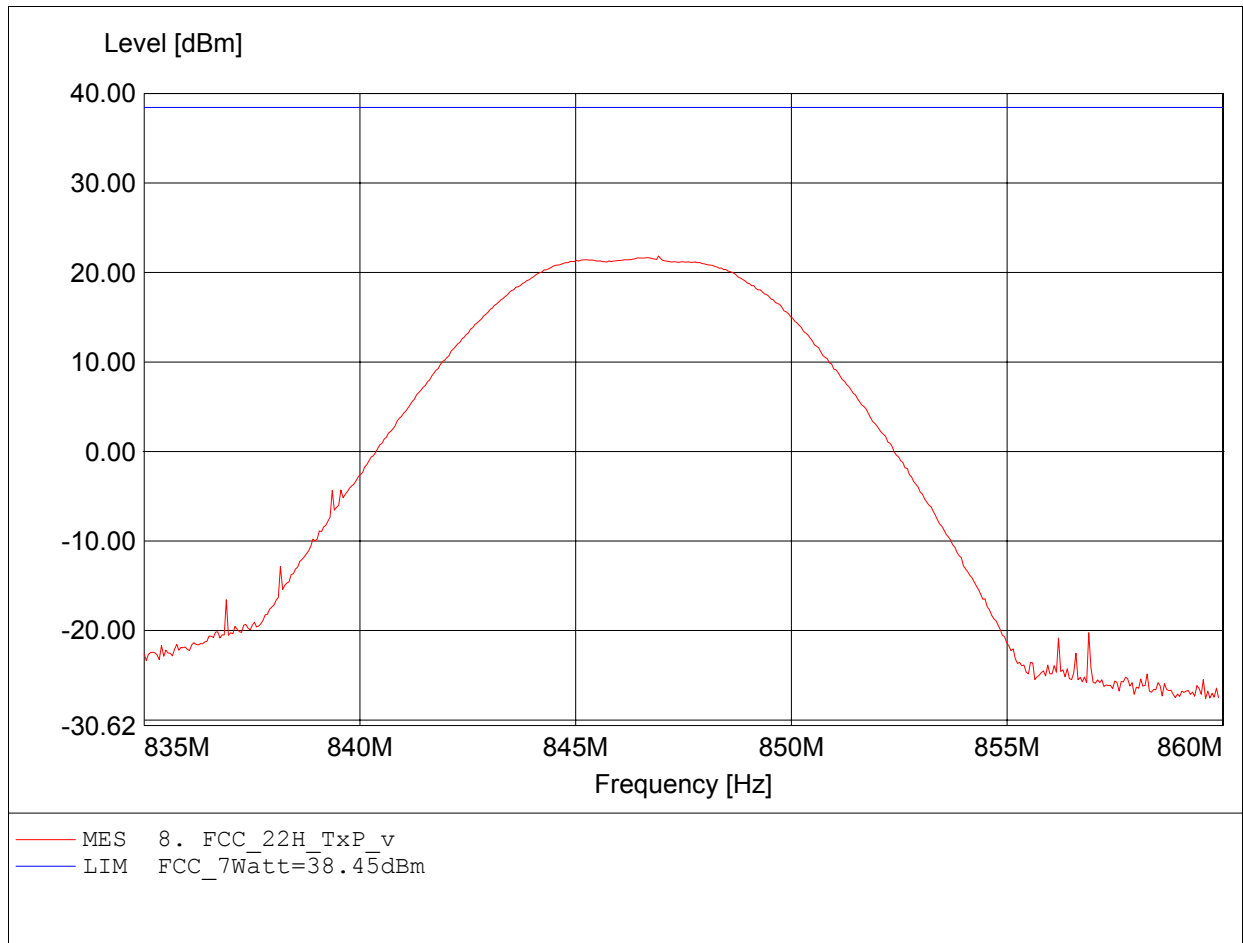


**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4232
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 846.774MHz, Pmax: 19.79dBm, RBW: 3MHz

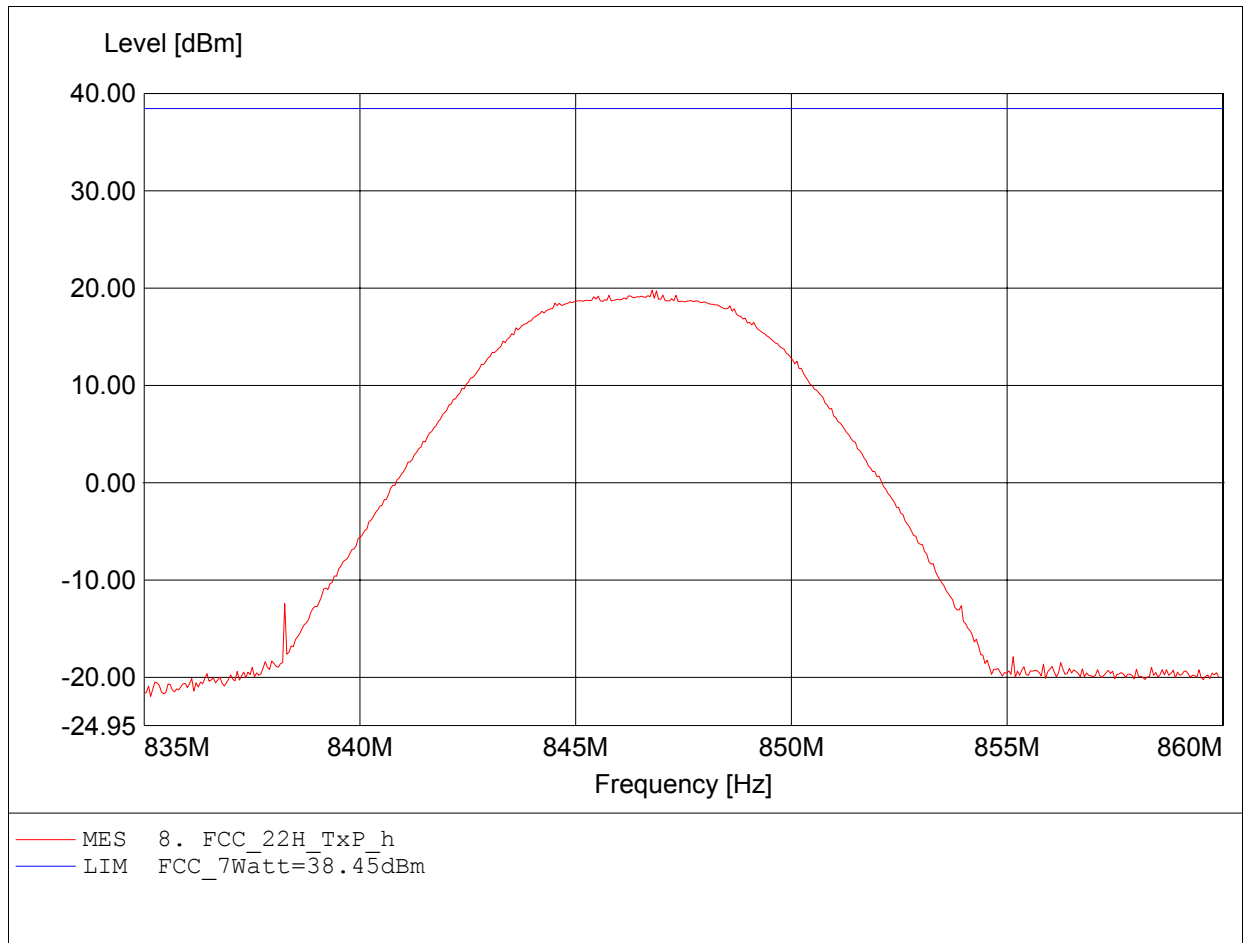


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9263
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.853GHz, Pmax: 26.18dBm, RBW: 3MHz

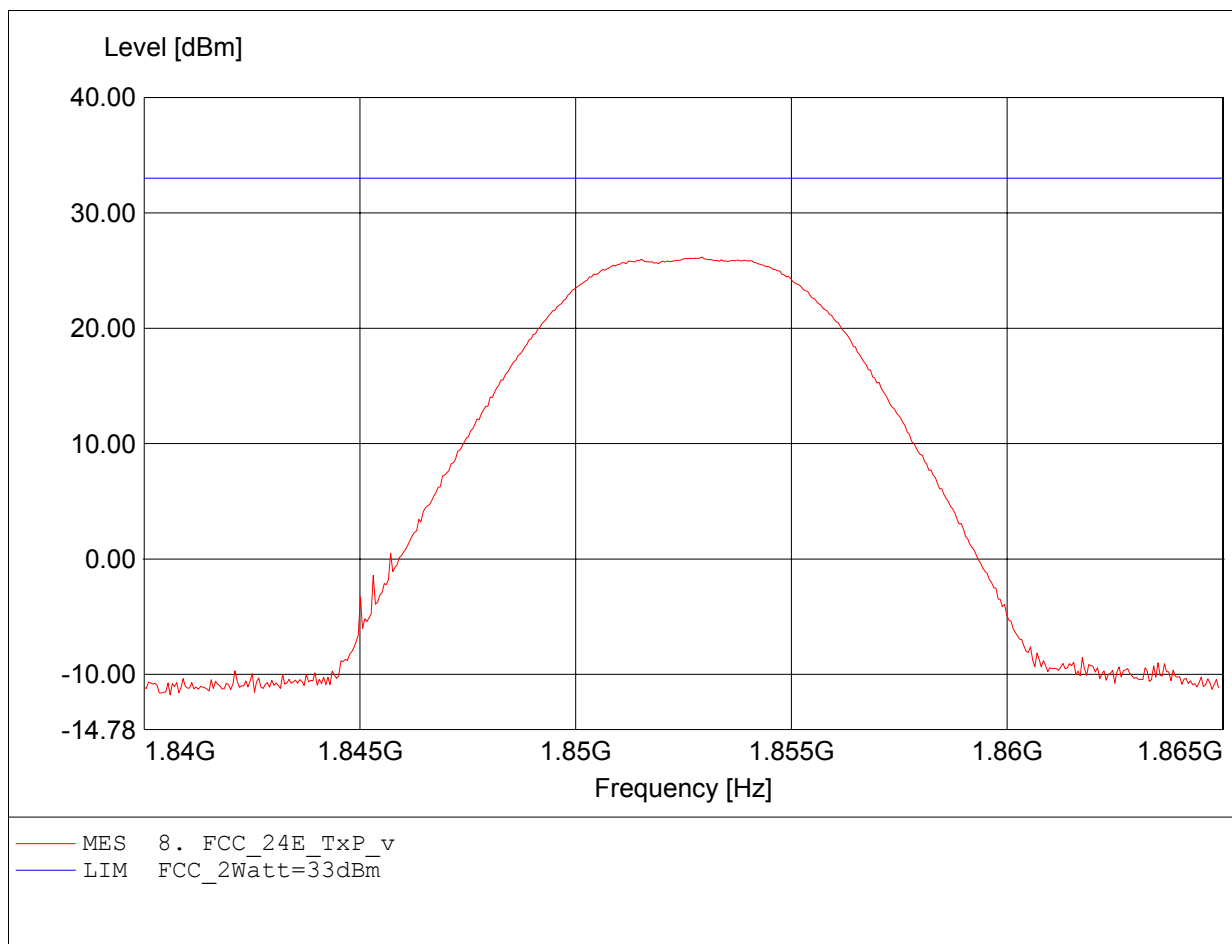


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9263
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.853GHz, Pmax: 21.70dBm, RBW: 3MHz

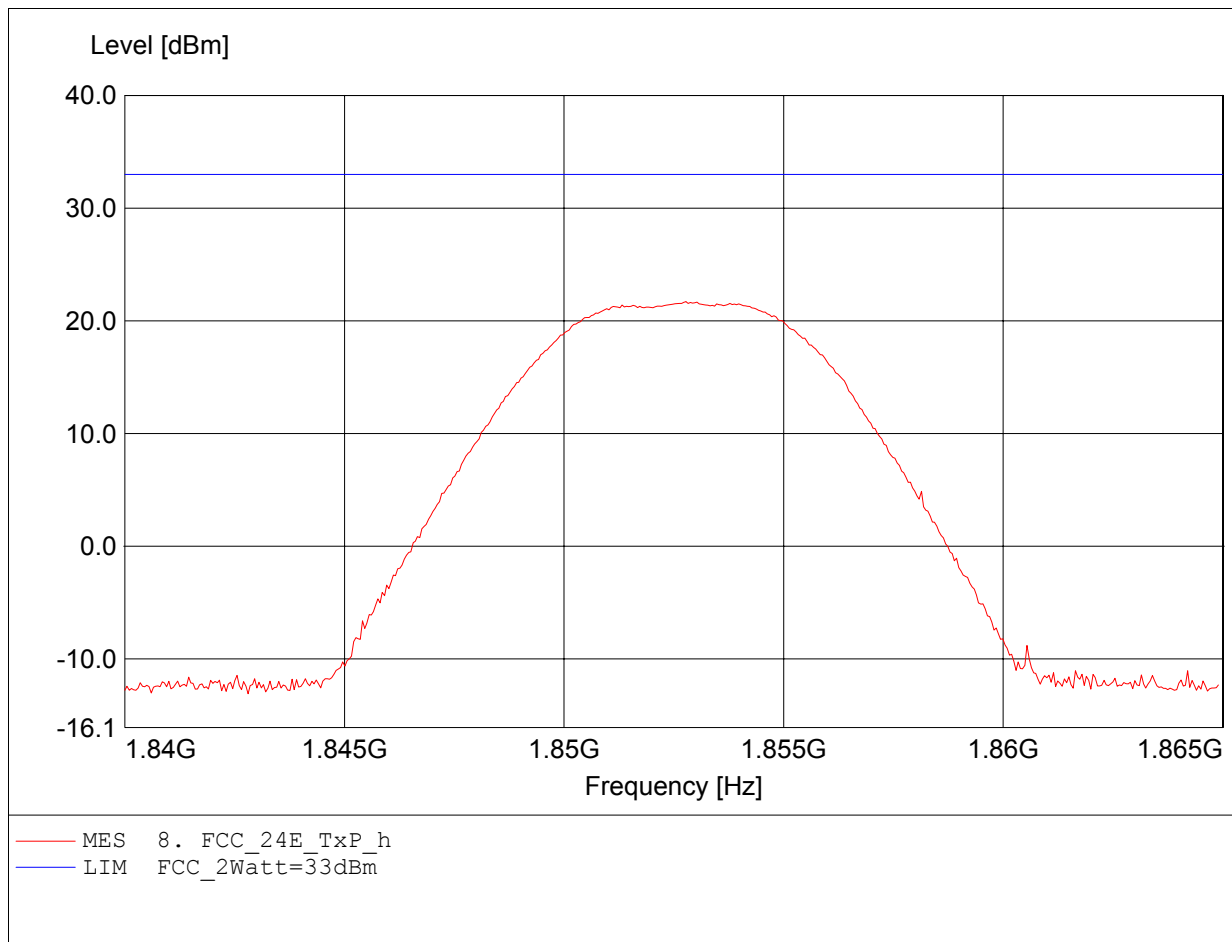


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9400
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 26.60dBm, RBW: 3MHz

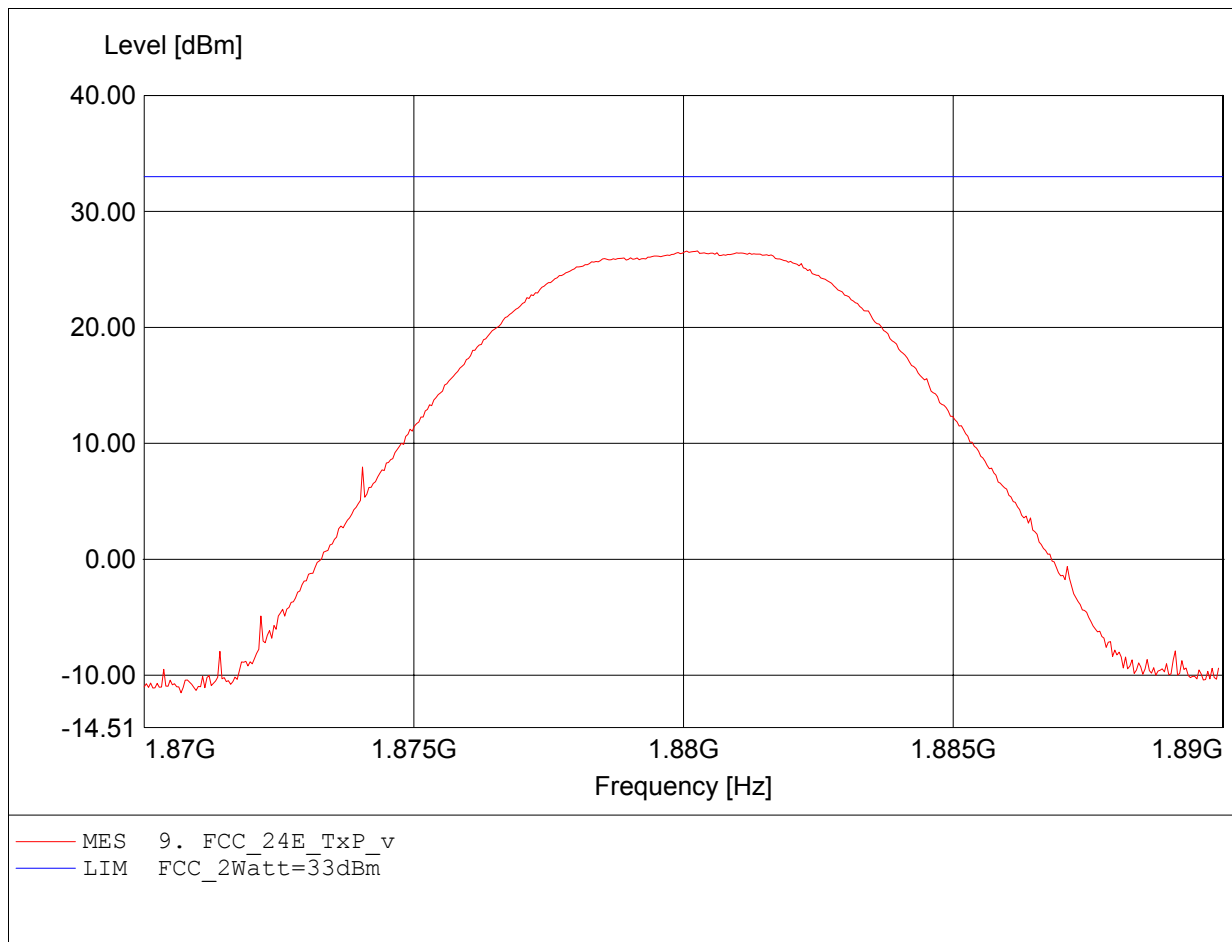


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9400
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 16.17dBm, RBW: 3MHz

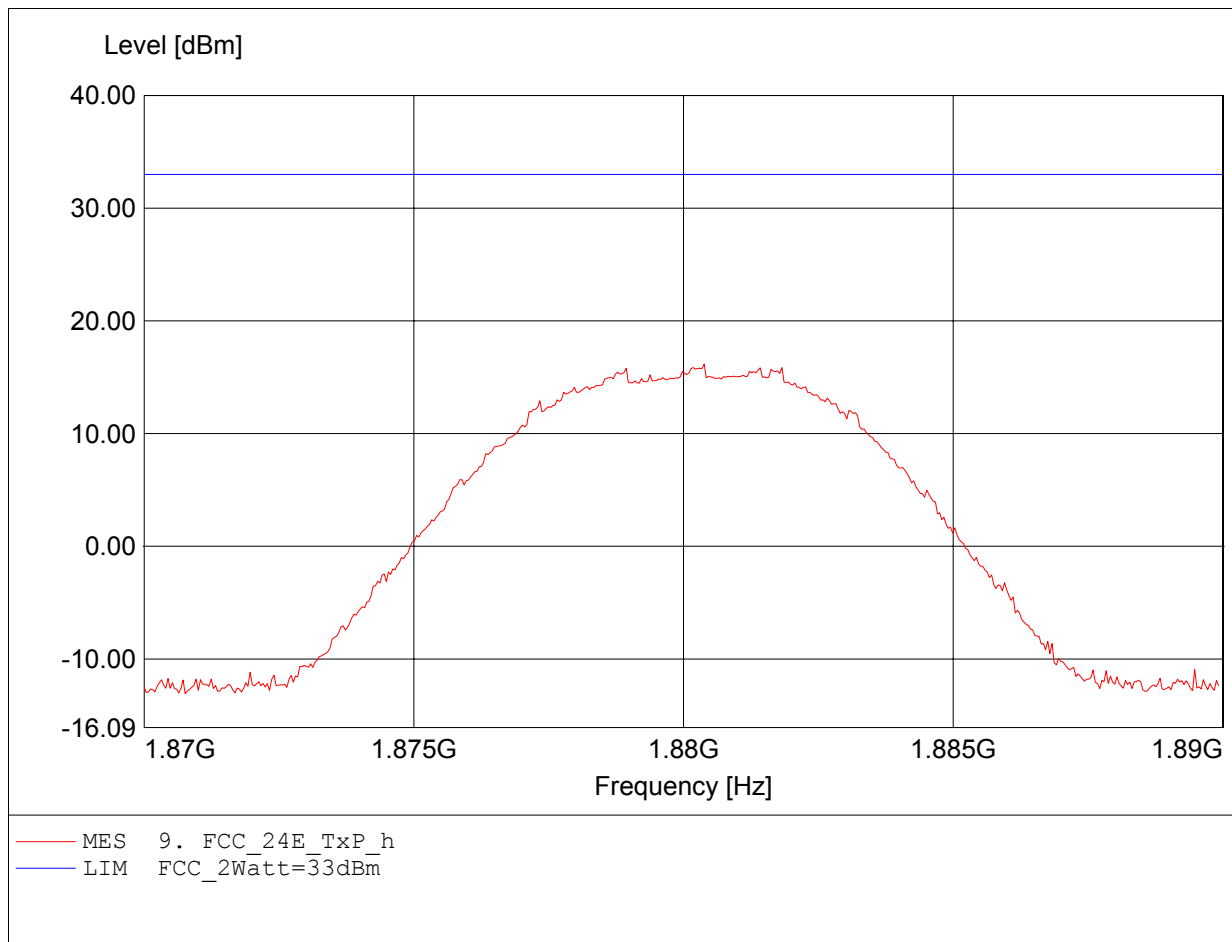


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9537
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.908GHz, Pmax: 27.08dBm, RBW: 3MHz

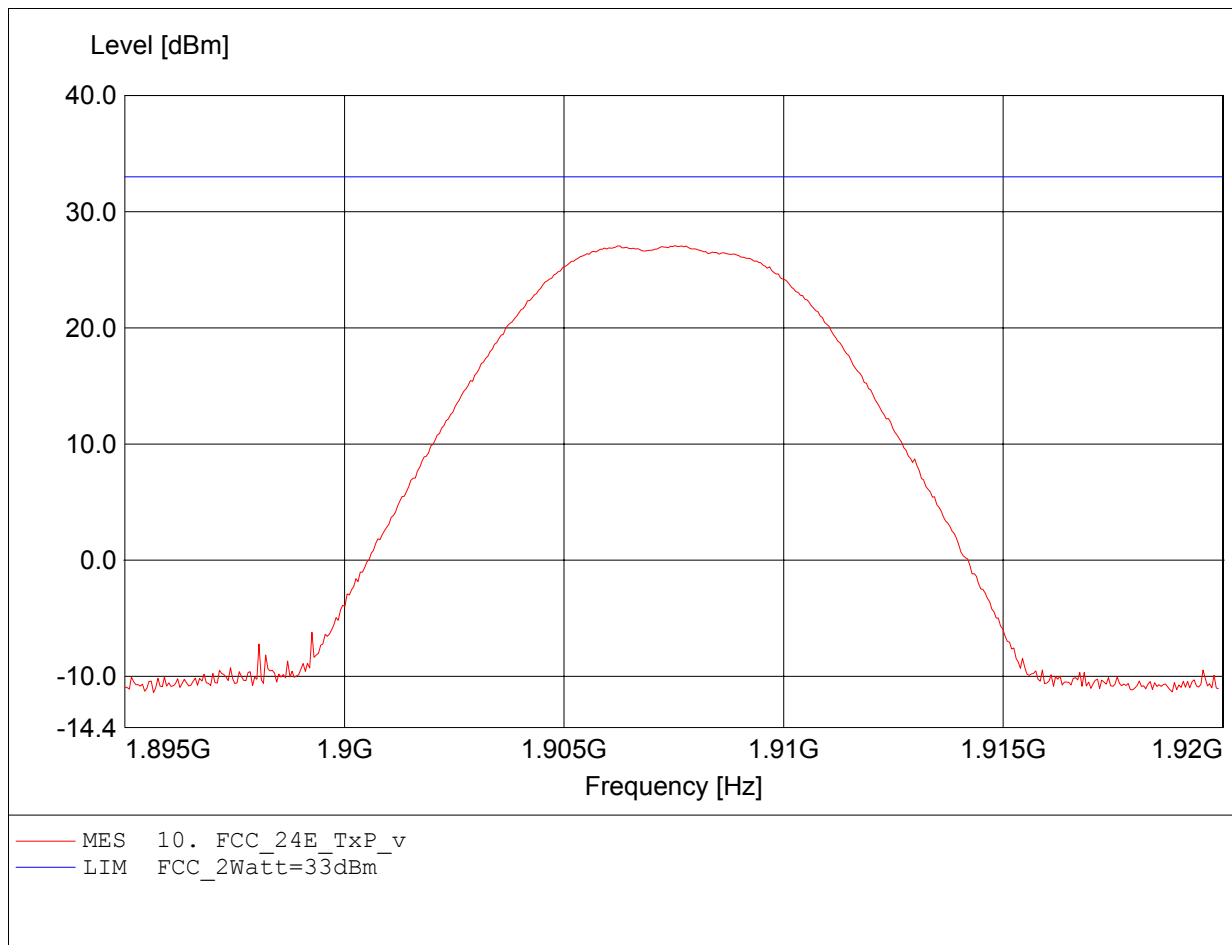

**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9537
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.908GHz, Pmax: 23.08dBm, RBW: 3MHz

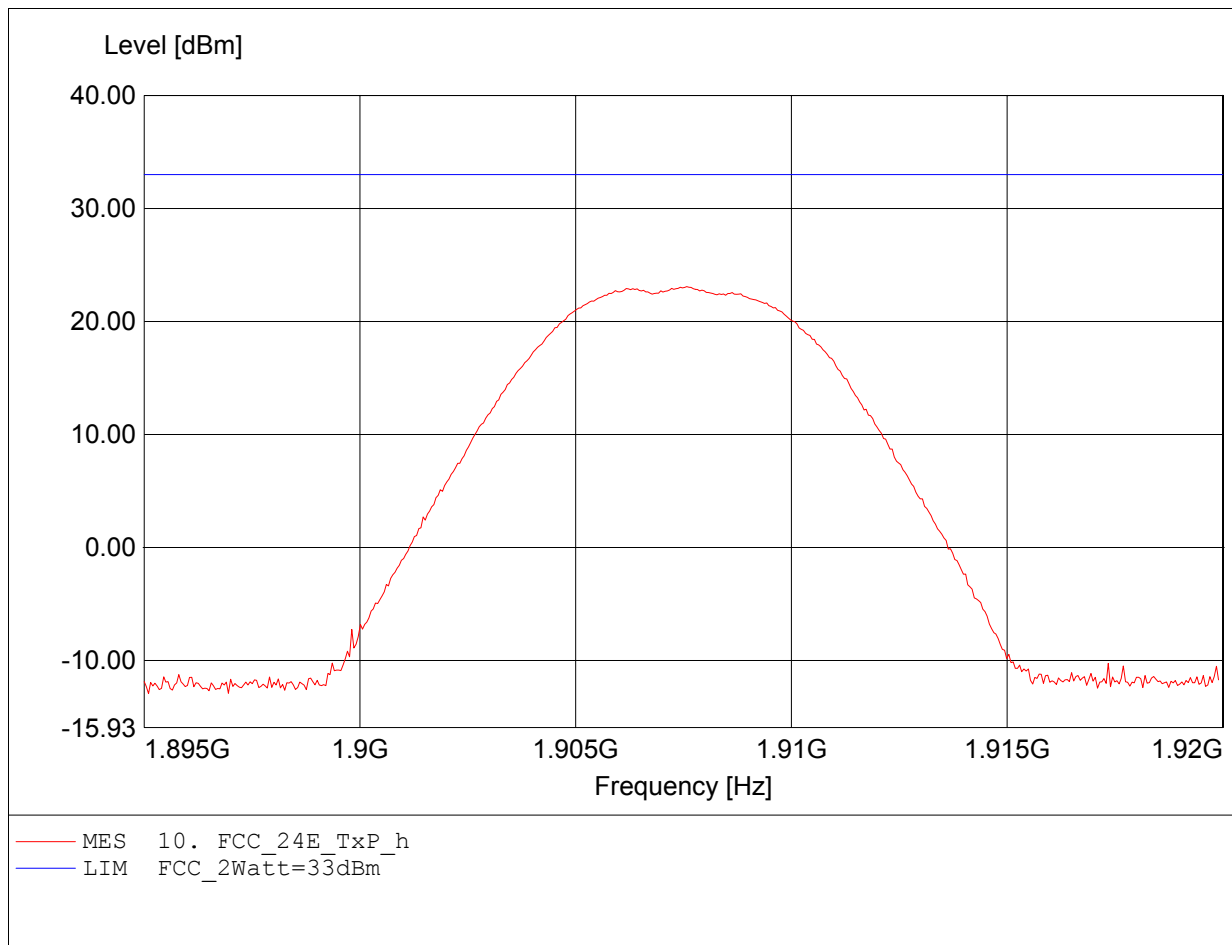


Appendix D

Occupied bandwidth, emission bandwidth

**FCC Part 22 H
Occupied Bandwidth**

EUT UMTS GSM Phone
 Model C600 / Mode: UMTS OpB V
 Approval Holder Pantech Co., Ltd.
 Temperature / Voltage 23°C / Unom.: 3.80 V DC
 Test Site / Operator ETS / Mr. Meng
 Test Specification FCC Part 22 Subpart H - Cellular Radiotelephone Service
 Comment 1 Channel: 4133
 Comment 2
 Comment 3

	UNCAL	Marker 1 [T1]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	4.00 dBm	VBW	3 kHz		
	36 dBm	826.61002004 MHz	SWT	280 ms	Unit	dBm

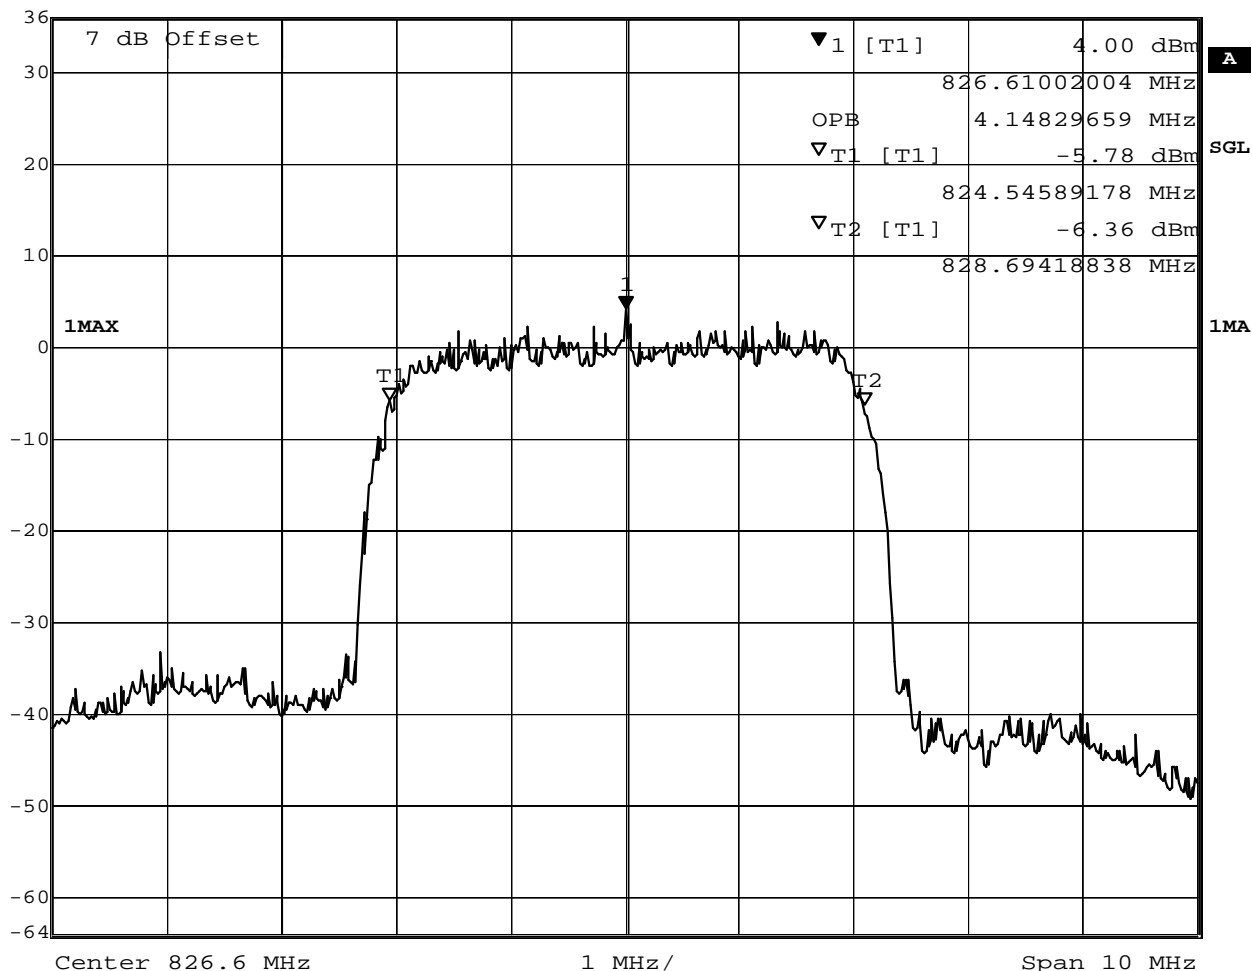


Date: 2.FEB.2007 14:44:49

Measurement diagram

**FCC Part 22 H
Occupied Bandwidth**

EUT UMTS GSM Phone
 Model C600 / Mode: UMTS OpB V
 Approval Holder Pantech Co., Ltd.
 Temperature / Voltage 23°C / Unom.: 3.80 V DC
 Test Site / Operator ETS / Mr. Meng
 Test Specification FCC Part 22 Subpart H - Cellular Radiotelephone Service
 Comment 1 Channel: 4175
 Comment 2
 Comment 3

	UNCAL	Marker 1 [T1]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	4.62 dBm	VBW	3 kHz		
	36 dBm	835.01002004 MHz	SWT	280 ms	Unit	dBm

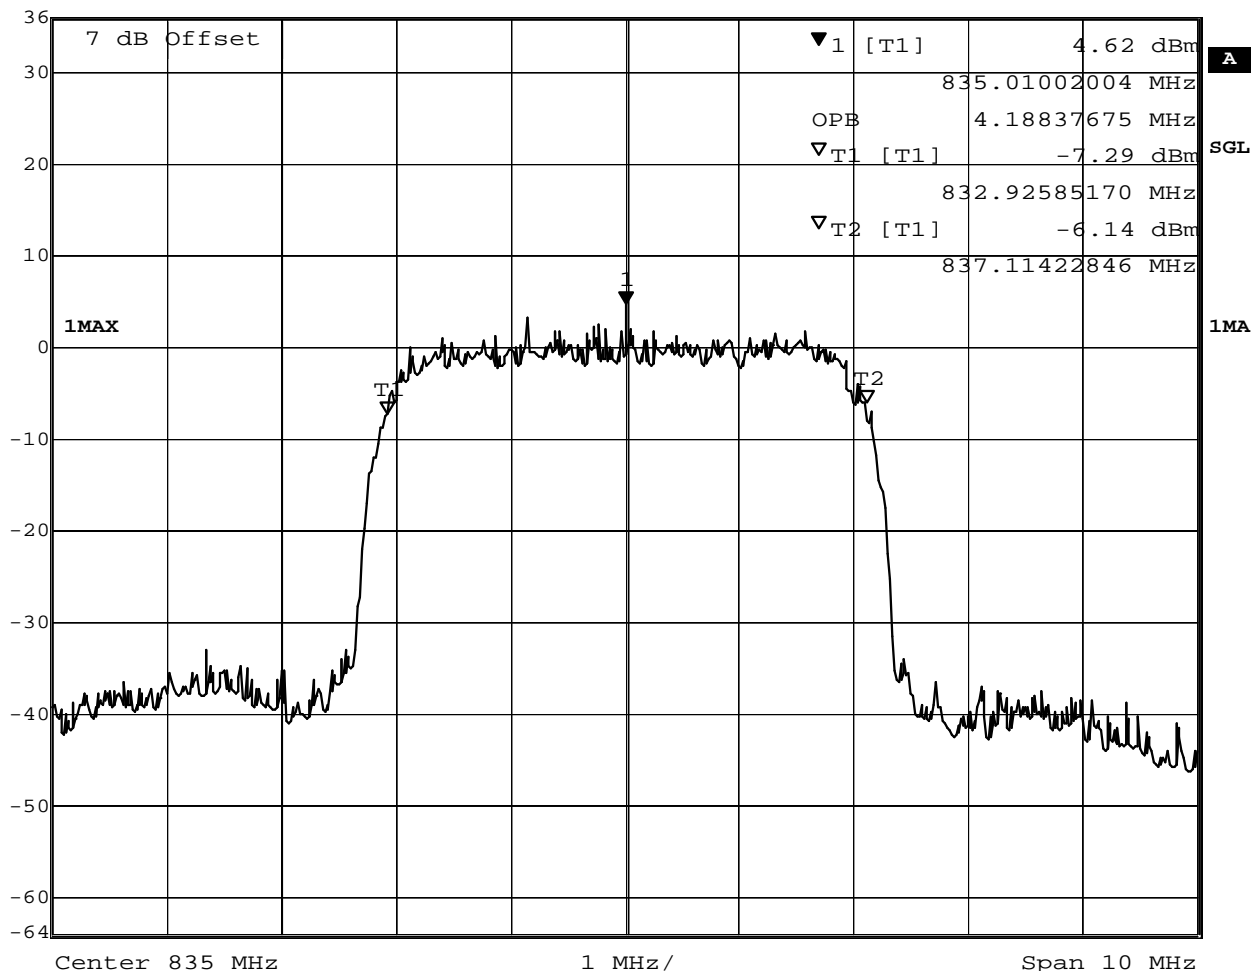

Date: 2.FEB.2007 14:47:03

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

**FCC Part 22 H
Occupied Bandwidth**

EUT UMTS GSM Phone
 Model C600 / Mode: UMTS OpB V
 Approval Holder Pantech Co., Ltd.
 Temperature / Voltage 23°C / Unom.: 3.80 V DC
 Test Site / Operator ETS / Mr. Meng
 Test Specification FCC Part 22 Subpart H - Cellular Radiotelephone Service
 Comment 1 Channel: 4232
 Comment 2
 Comment 3

UNCAL Marker 1 [T1] RBW 3 kHz RF Att 50 dB
 Ref Lvl 1.32 dBm VBW 3 kHz
 36 dBm 846.45010020 MHz SWT 280 ms Unit dBm

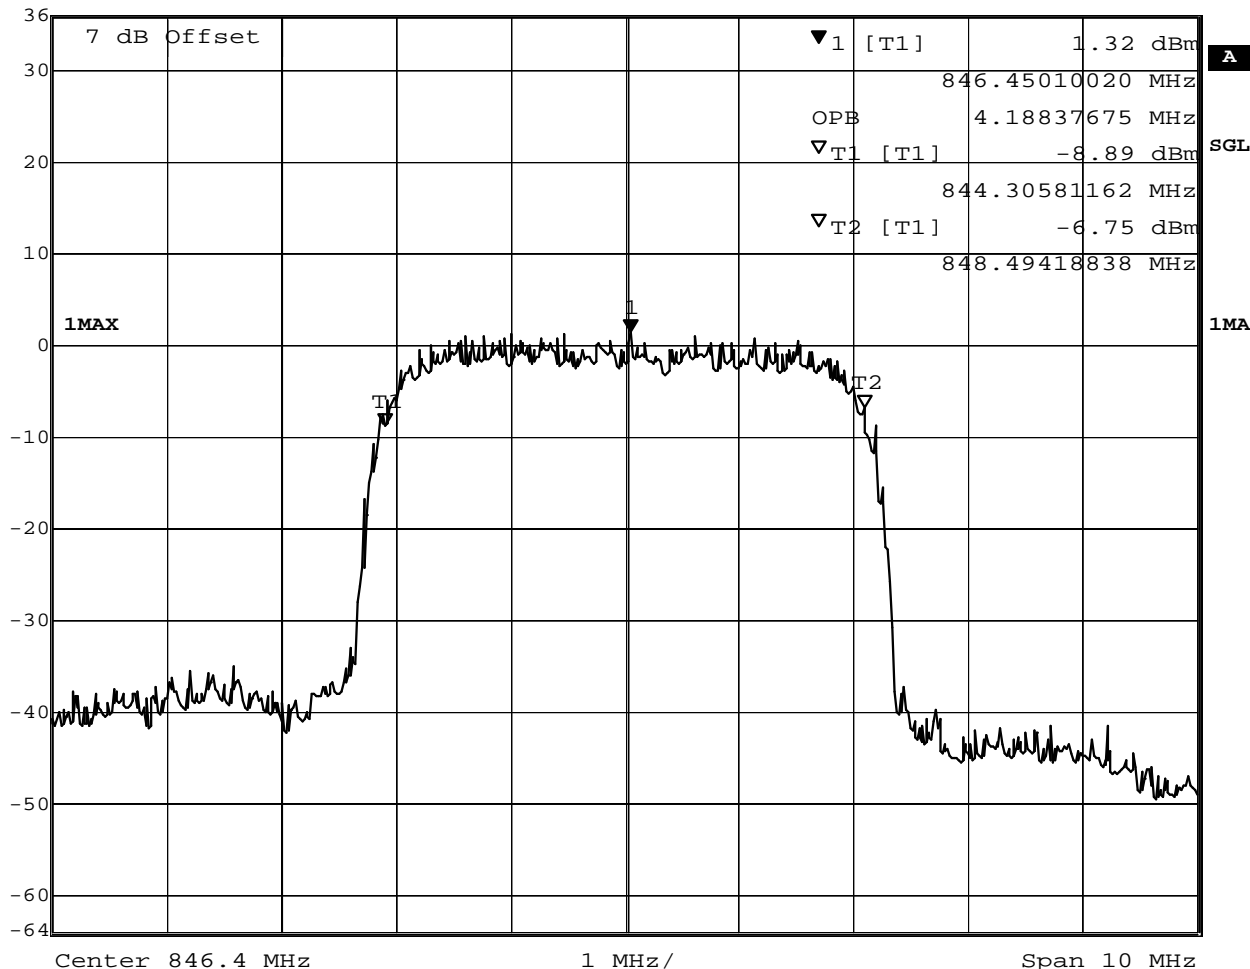


Date: 2.FEB.2007 14:47:49

Measurement diagram

**FCC Part 22 H
Emission Bandwidth**

EUT	UTMS GSM phone
Model	C600 / Mode: UMTS OpB V
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 4133
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	UNCAL	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	4.60921844 MHz	SWT	280 ms	Unit

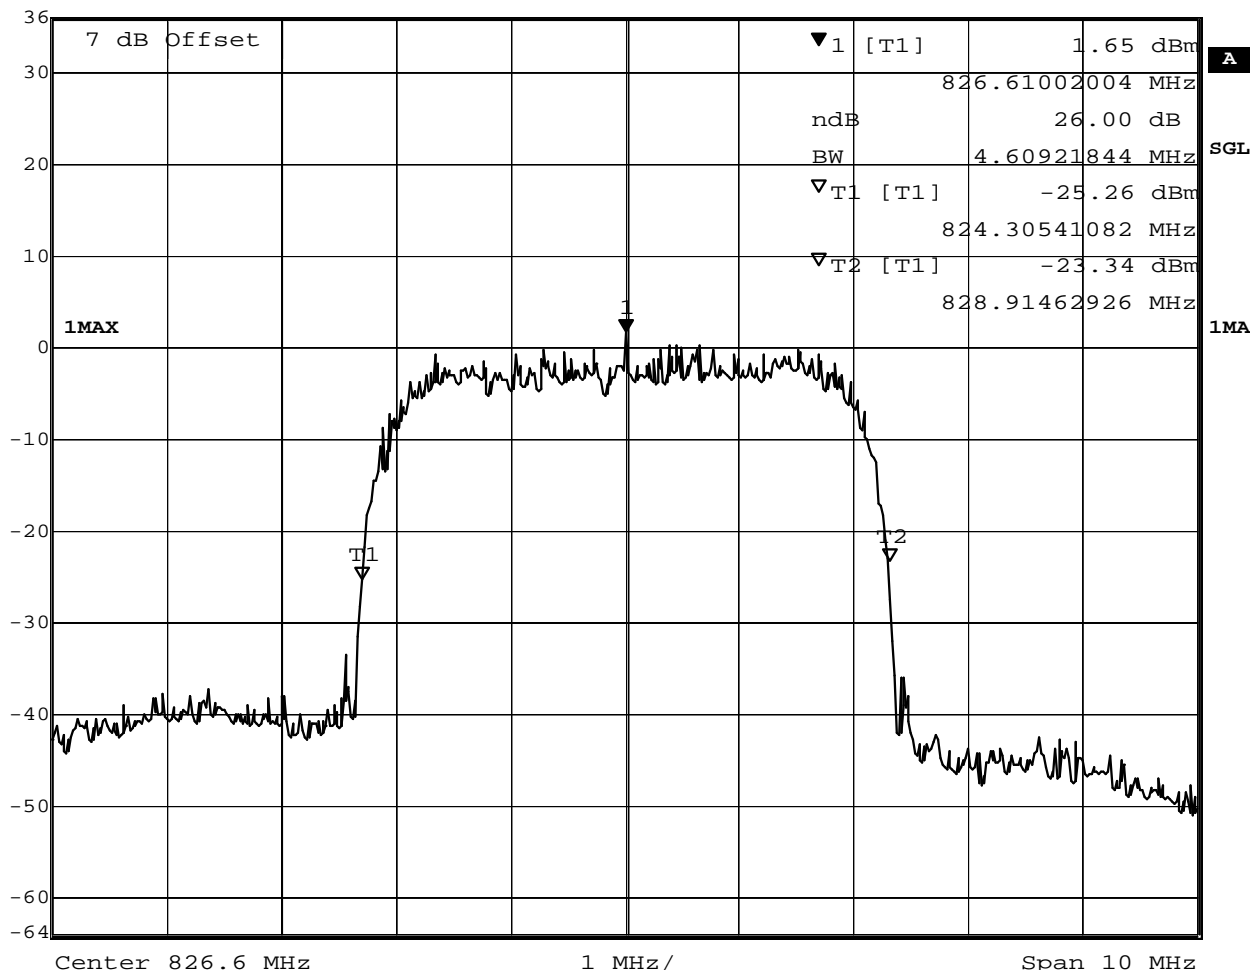


Date: 1.FEB.2007 09:08:50

Measurement diagram

**FCC Part 22 H
Emission Bandwidth**

EUT UTMS GSM phone
 Model C600 / Mode: UMTS OpB V
 Approval Holder Pantech Co., Ltd.
 Temperature / Voltage 23°C / Unom.: 3.80 VDC
 Test Site / Operator ETS / Mr. Meng
 Test Specification FCC Part 22 Subpart H - Cellular Radiotelephone Service
 Comment 1 Channel: 4175
 Comment 2 -26 dB Emission Bandwidth
 Comment 3

	UNCAL	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	4.60921844 MHz	SWT	280 ms	Unit dBm

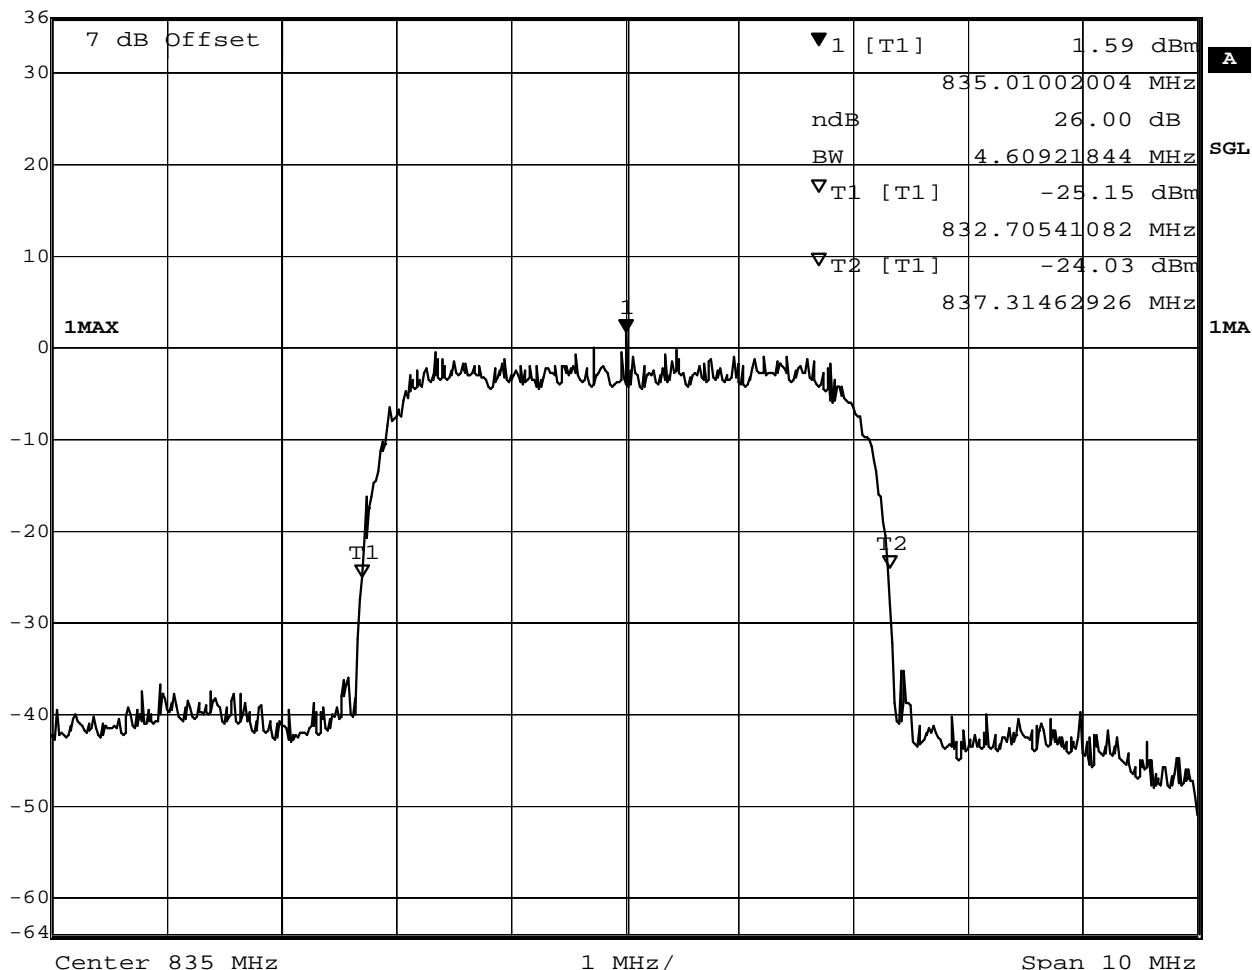


Date: 1.FEB.2007 09:07:14

Measurement diagram

**FCC Part 22 H
Emission Bandwidth**

EUT UTMS GSM phone
 Model C600 / Mode: UMTS OpB V
 Approval Holder Pantech Co., Ltd.
 Temperature / Voltage 23°C / Unom.: 3.80 VDC
 Test Site / Operator ETS / Mr. Meng
 Test Specification FCC Part 22 Subpart H - Cellular Radiotelephone Service
 Comment 1 Channel: 4232
 Comment 2 -26 dB Emission Bandwidth
 Comment 3

	UNCAL	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	4.60921844 MHz	SWT	280 ms	Unit dBm

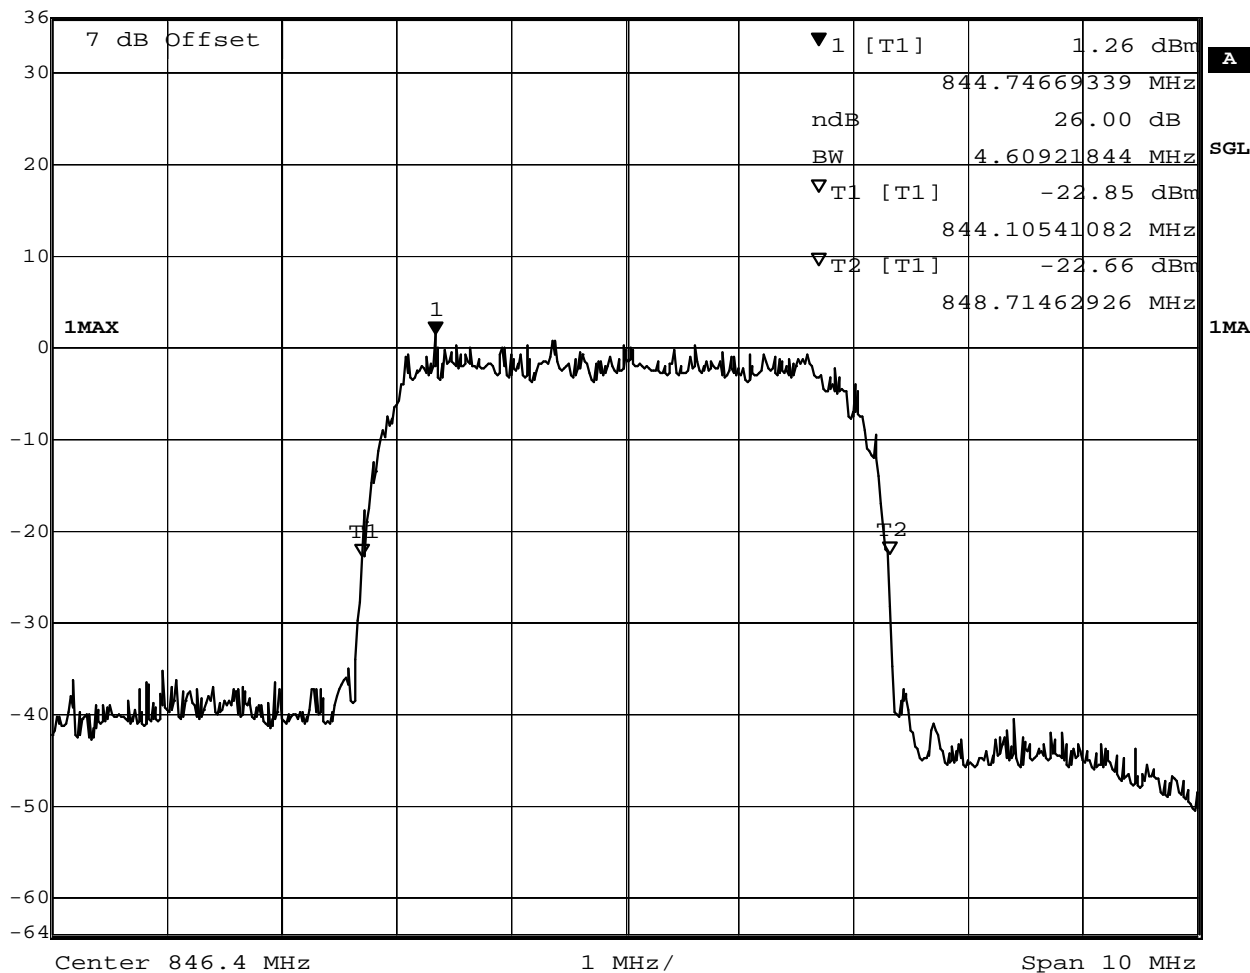


Date: 1.FEB.2007 09:06:27

Measurement diagram

**FCC Part 24 E
Occupied Bandwidth**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9263
Comment 2	
Comment 3	

	UNCAL	Marker 1 [T1]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	0.97 dBm	VBW	3 kHz		
	36 dBm	1.85261002 GHz	SWT	280 ms	Unit	dBm

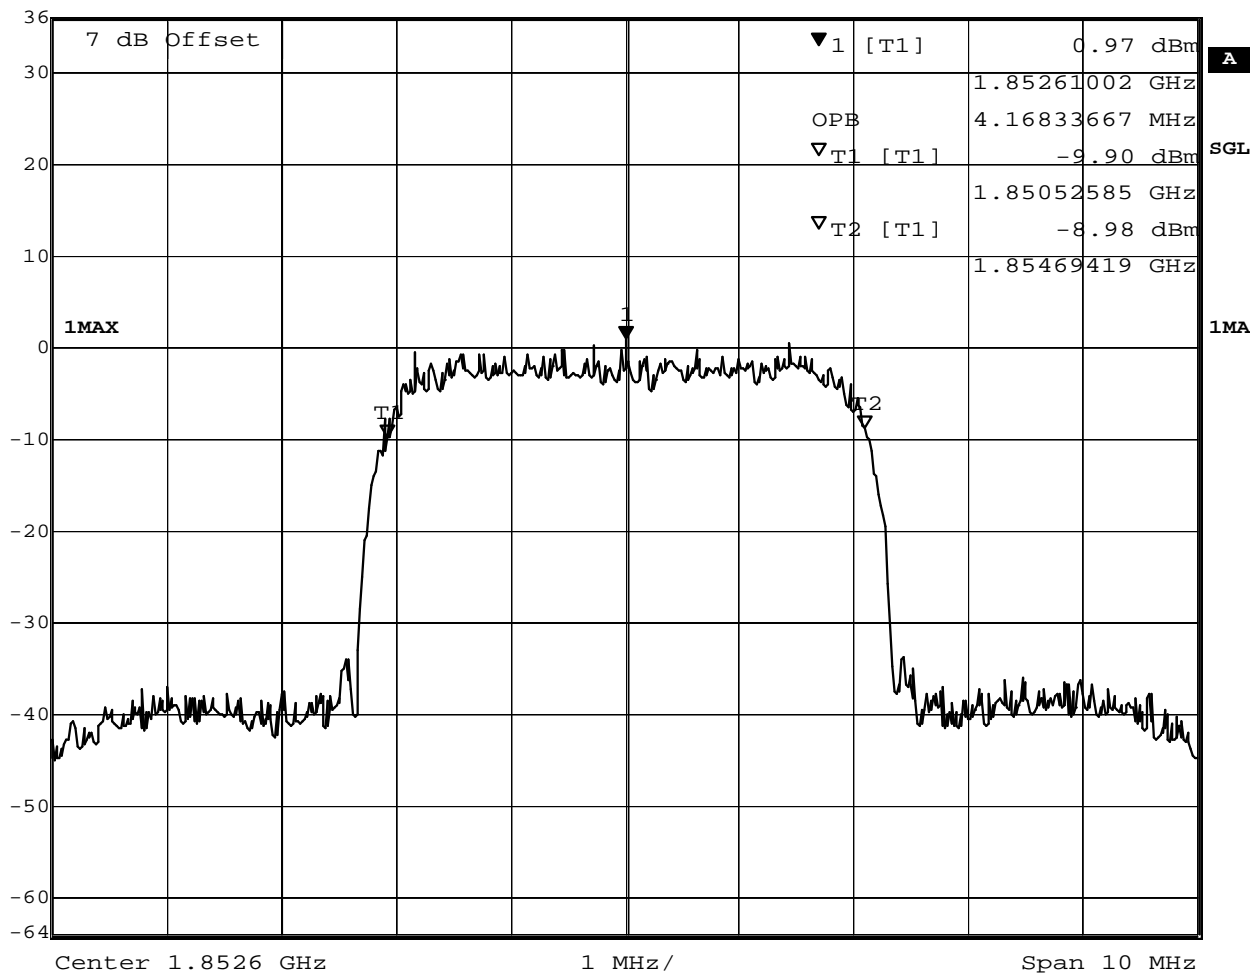


Date: 1.FEB.2007 08:26:57

Measurement diagram

**FCC Part 24 E
Occupied Bandwidth**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9400
Comment 2	
Comment 3	

	UNCAL	Marker 1 [T1]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	1.25 dBm	VBW	3 kHz		
	36 dBm	1.88001002 GHz	SWT	280 ms	Unit	dBm

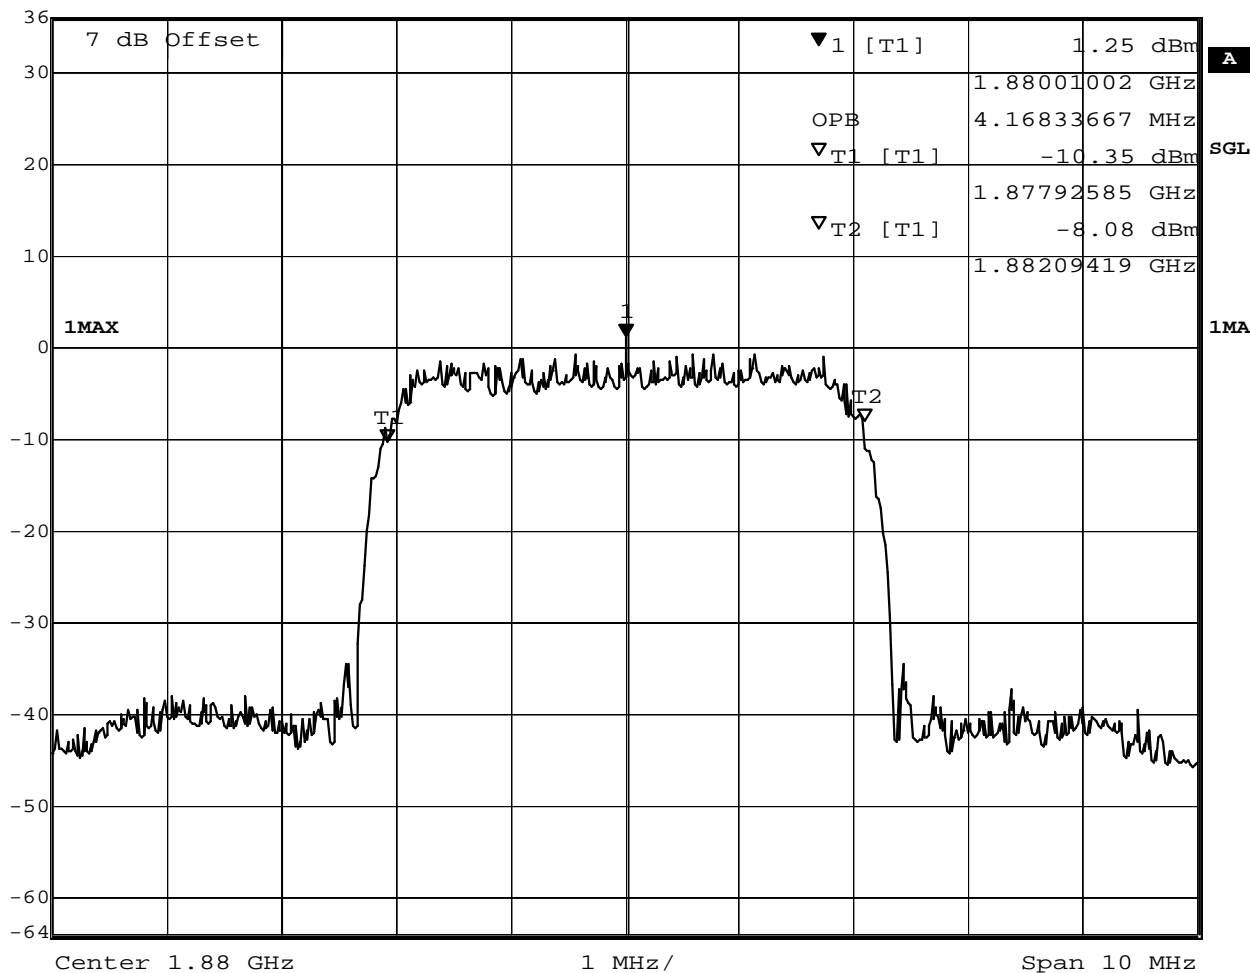

Date: 1.FEB.2007 08:28:44

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

**FCC Part 24 E
Occupied Bandwidth**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9537
Comment 2	
Comment 3	

	UNCAL	Marker 1 [T1]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	-1.05 dBm	VBW	3 kHz		
	36 dBm	1.90676874 GHz	SWT	280 ms	Unit	dBm

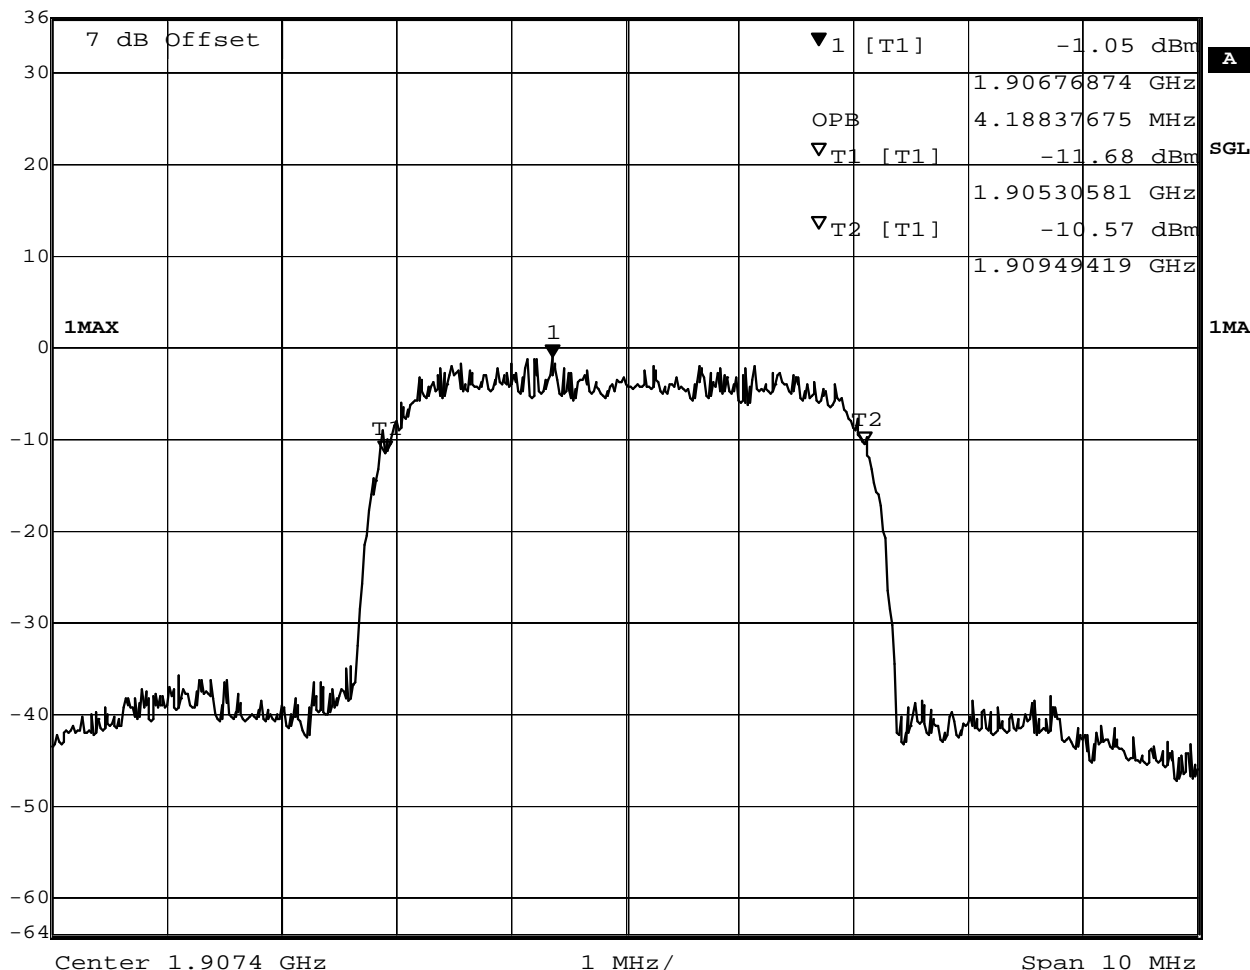


Date: 1.FEB.2007 08:30:33

Measurement diagram

**FCC Part 24 E
Emission Bandwidth**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9263
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	UNCAL	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	4.60921844 MHz	SWT	280 ms	Unit dBm

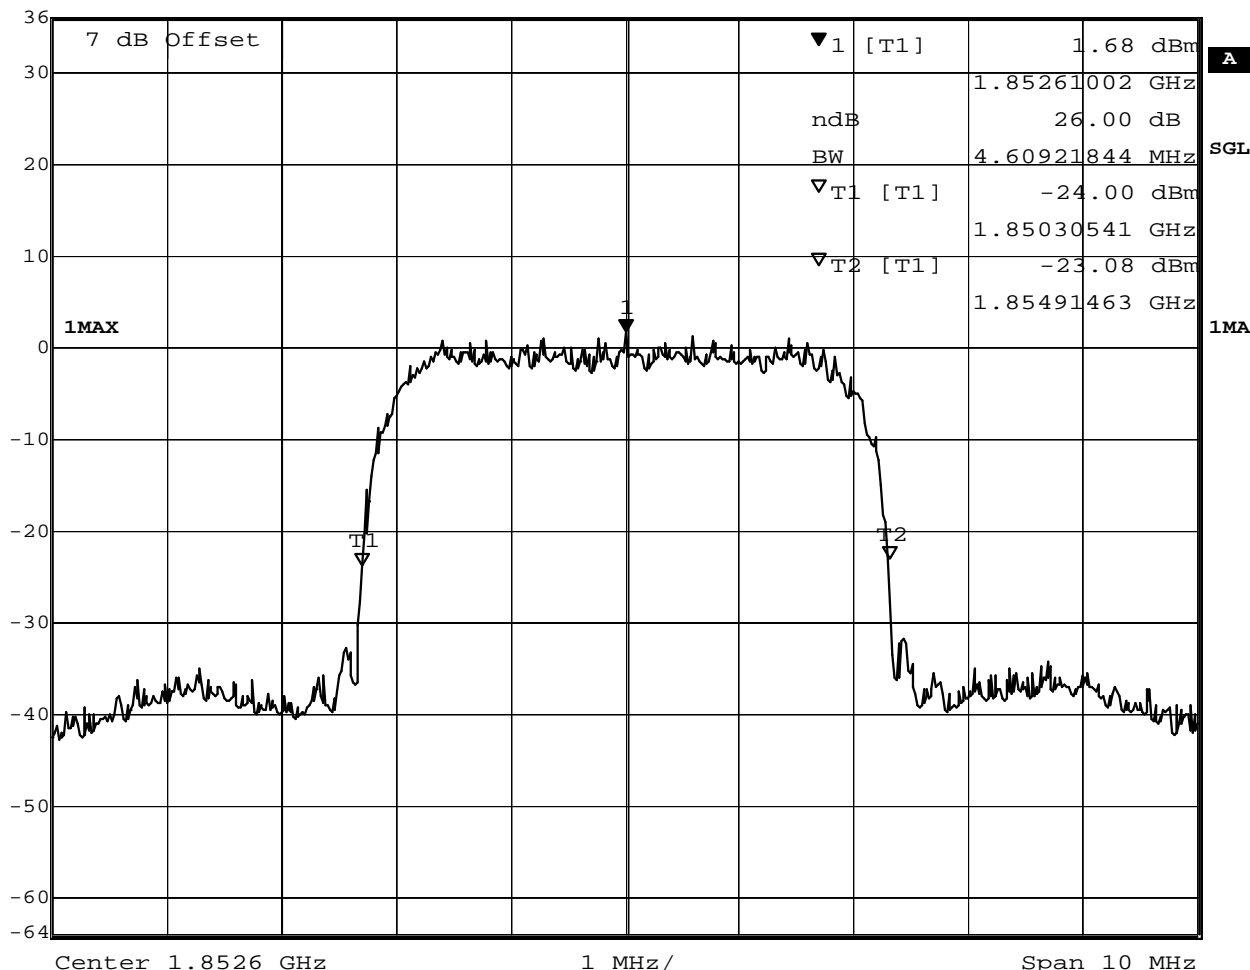


Date: 1.FEB.2007 08:09:05

Measurement diagram

**FCC Part 24 E
Emission Bandwidth**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9400
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	UNCAL	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	4.60921844 MHz	SWT	280 ms	Unit

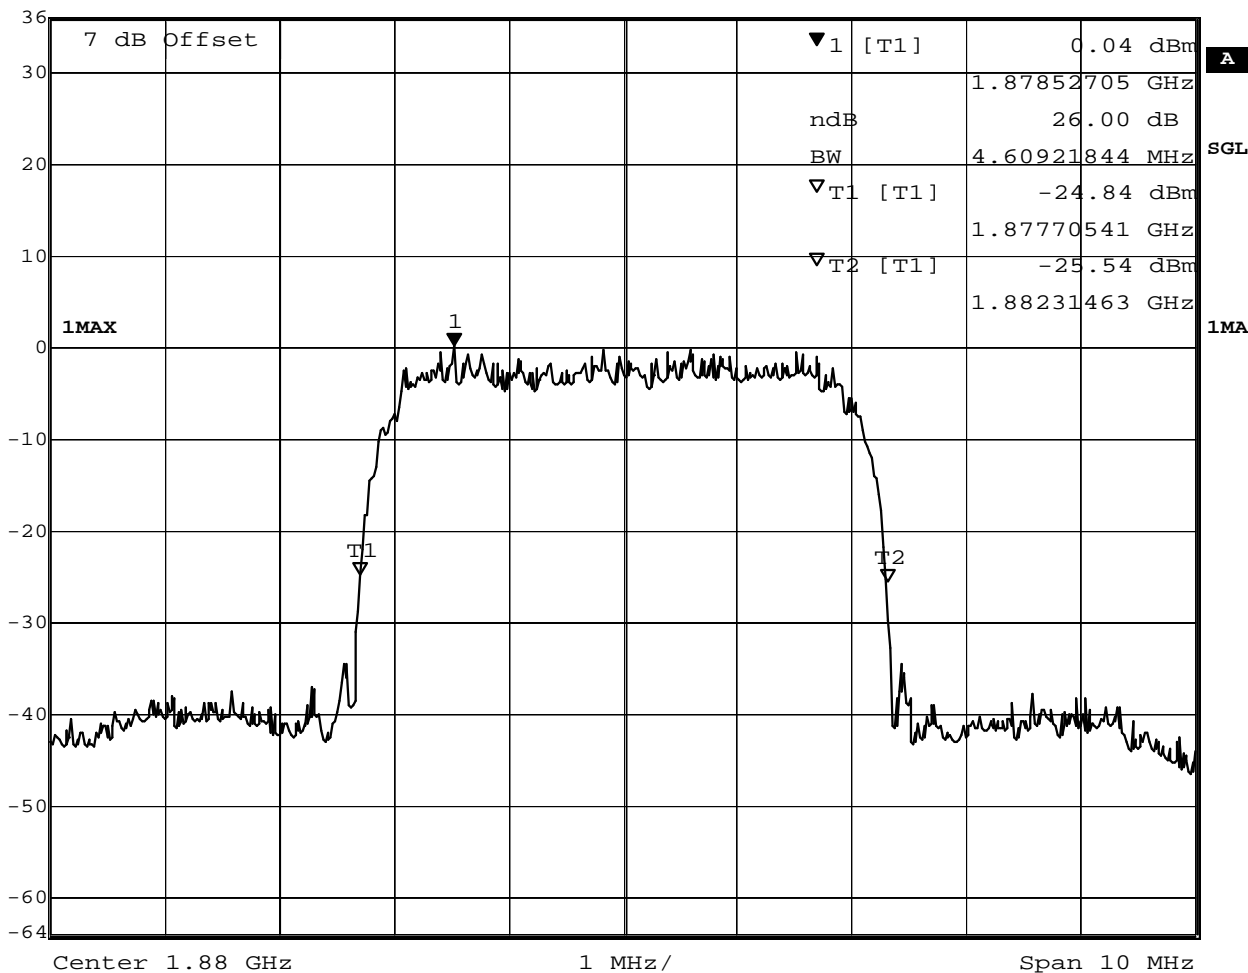

Date: 1.FEB.2007 08:08:01

Measurement diagram

ETS Product Service AG


Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

**FCC Part 24 E
Emission Bandwidth**

EUT	UMTS GSM Phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 V DC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9537
Comment 2	-26 dB Emission Bandwidth
Comment 3	

	UNCAL	Marker 1 [T1 ndB]	RBW	3 kHz	RF Att	50 dB
	Ref Lvl	ndB	26.00 dB	VBW	3 kHz	
	36 dBm	BW	4.60921844 MHz	SWT	280 ms	Unit

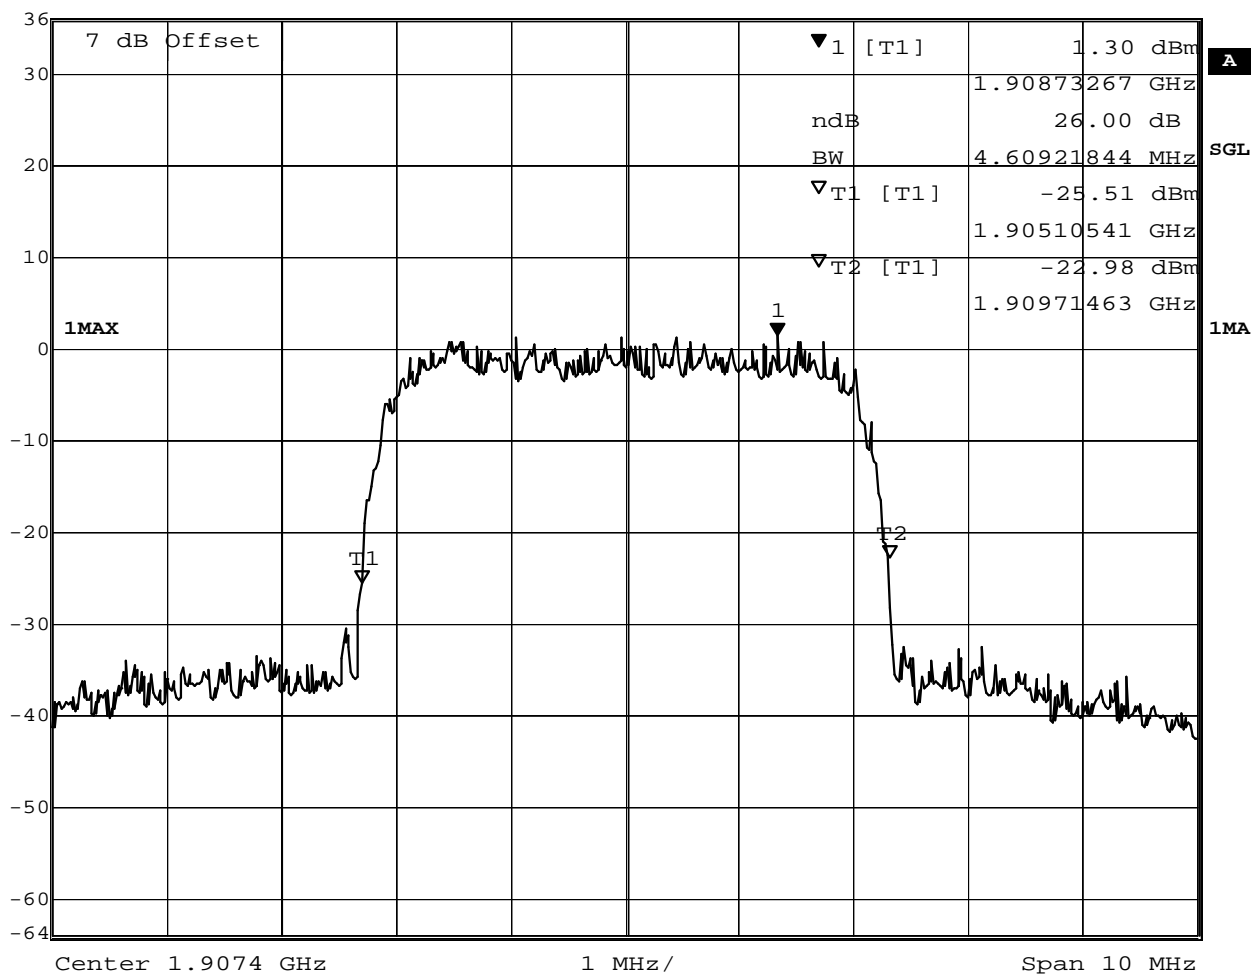

Date: 2.FEB.2007 14:52:45

Measurement diagram

Appendix E

Frequency stability

Appendix F


Spurious emission conducted (antenna terminal)

Appendix G

Spurious emission radiated


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 178.537MHz, Pmax: -66.60dBm, RBW: 100kHz

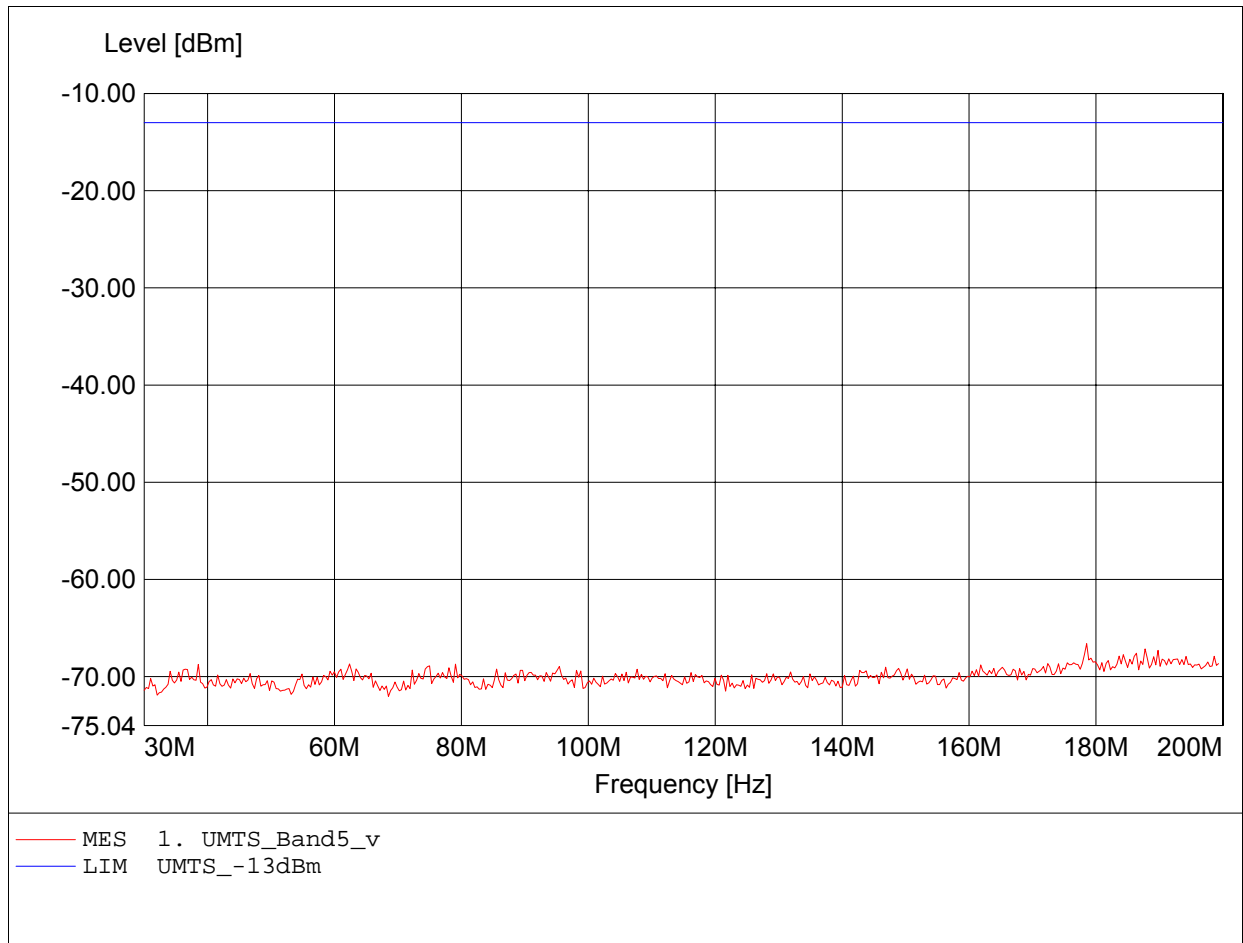


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 62.365MHz, Pmax: -67.74dBm, RBW: 100kHz

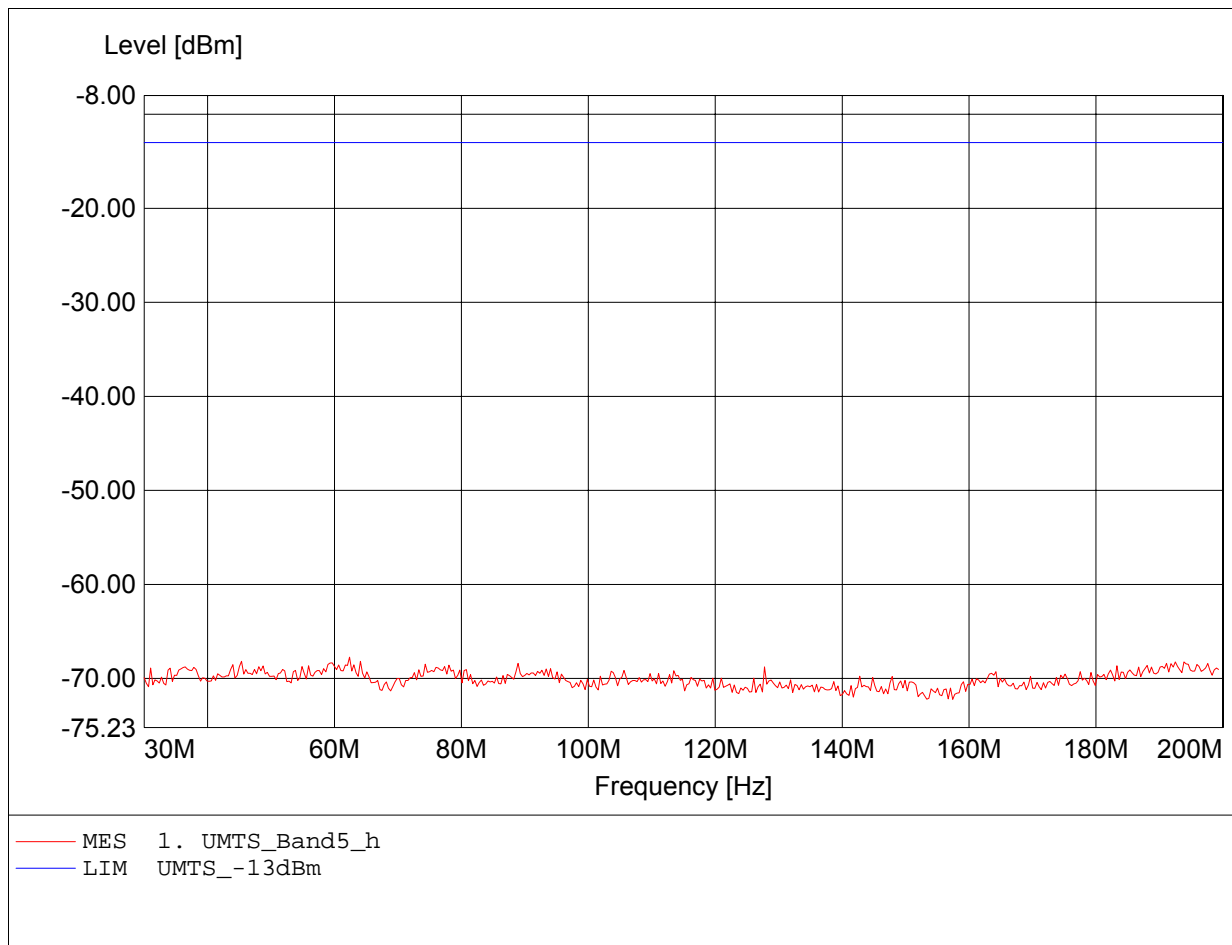


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4133
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 871.263MHz, Pmax: -29.63dBm, RBW: 100kHz

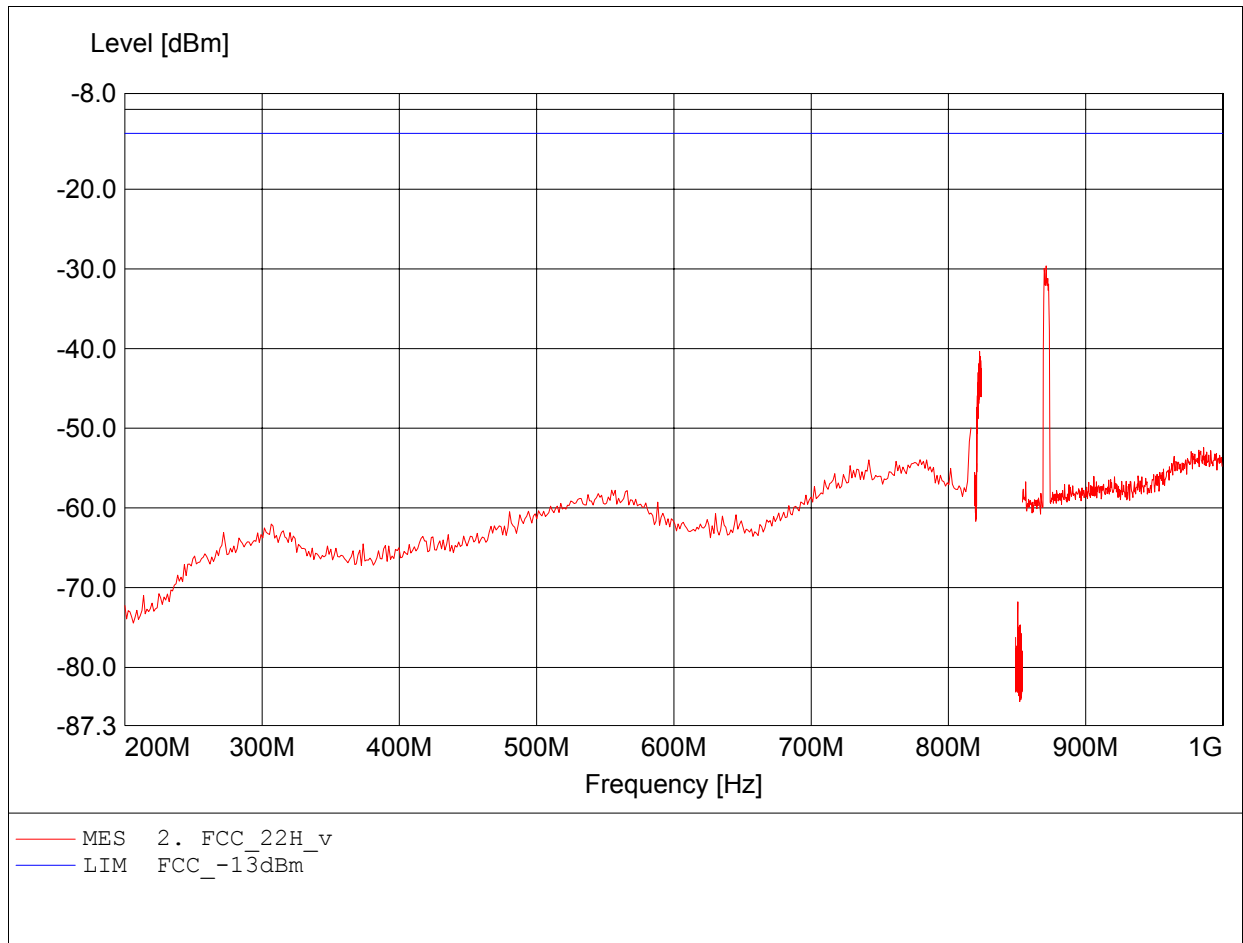


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4133
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 869.800MHz, Pmax: -32.71dBm, RBW: 100kHz

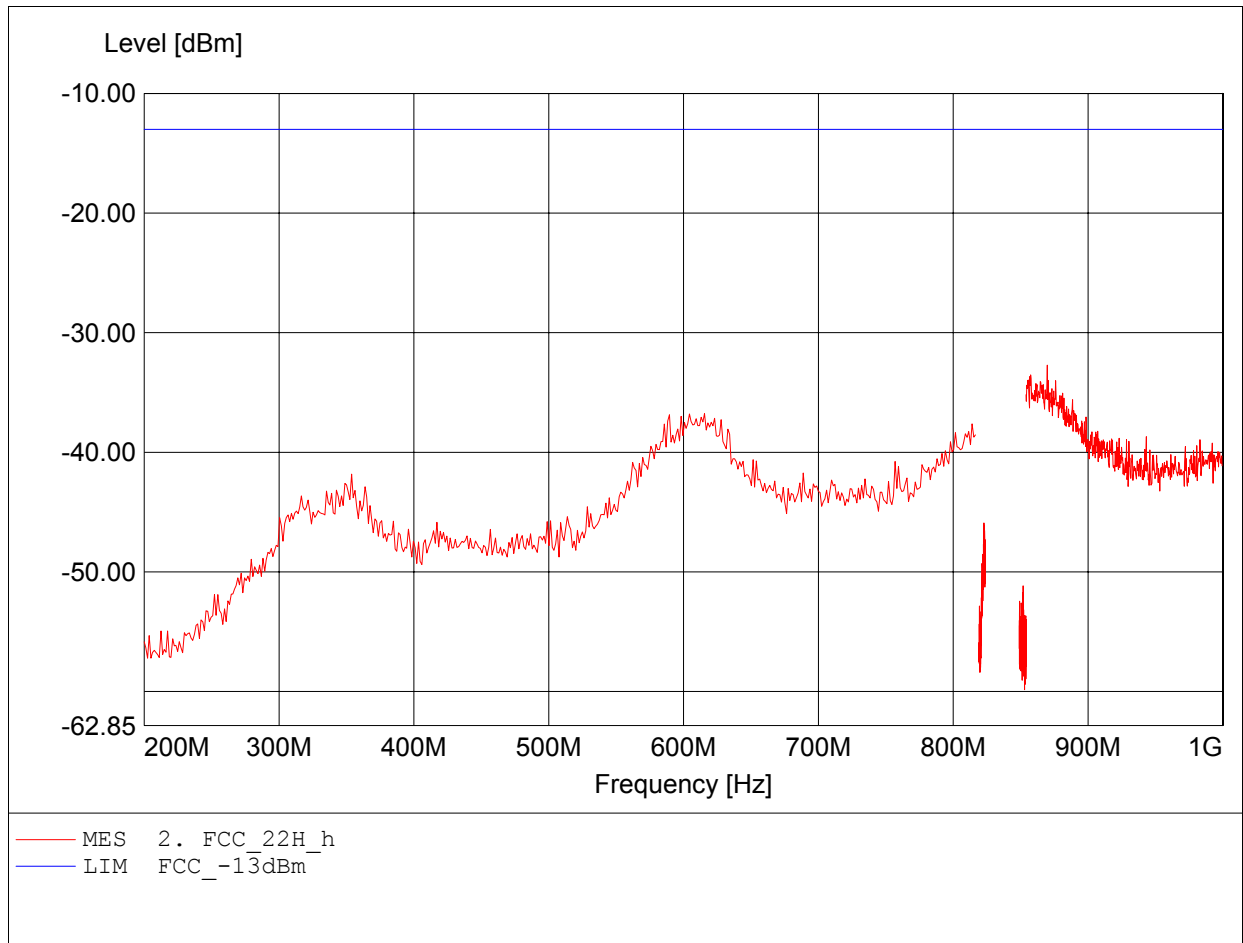


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4133
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.655GHz, Pmax: -41.91dBm, RBW: 1MHz

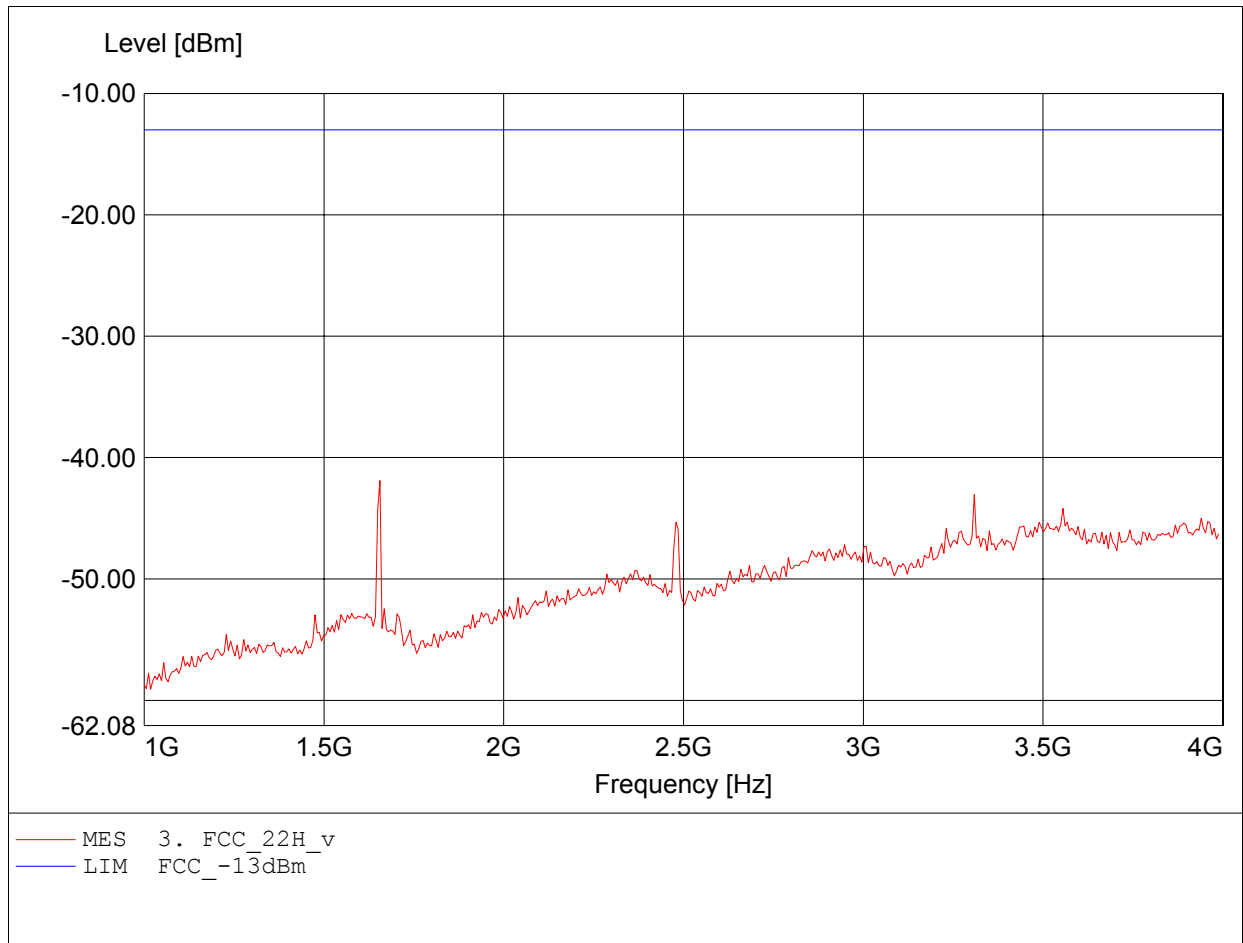


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4133
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 2.479GHz, Pmax: -43.17dBm, RBW: 1MHz

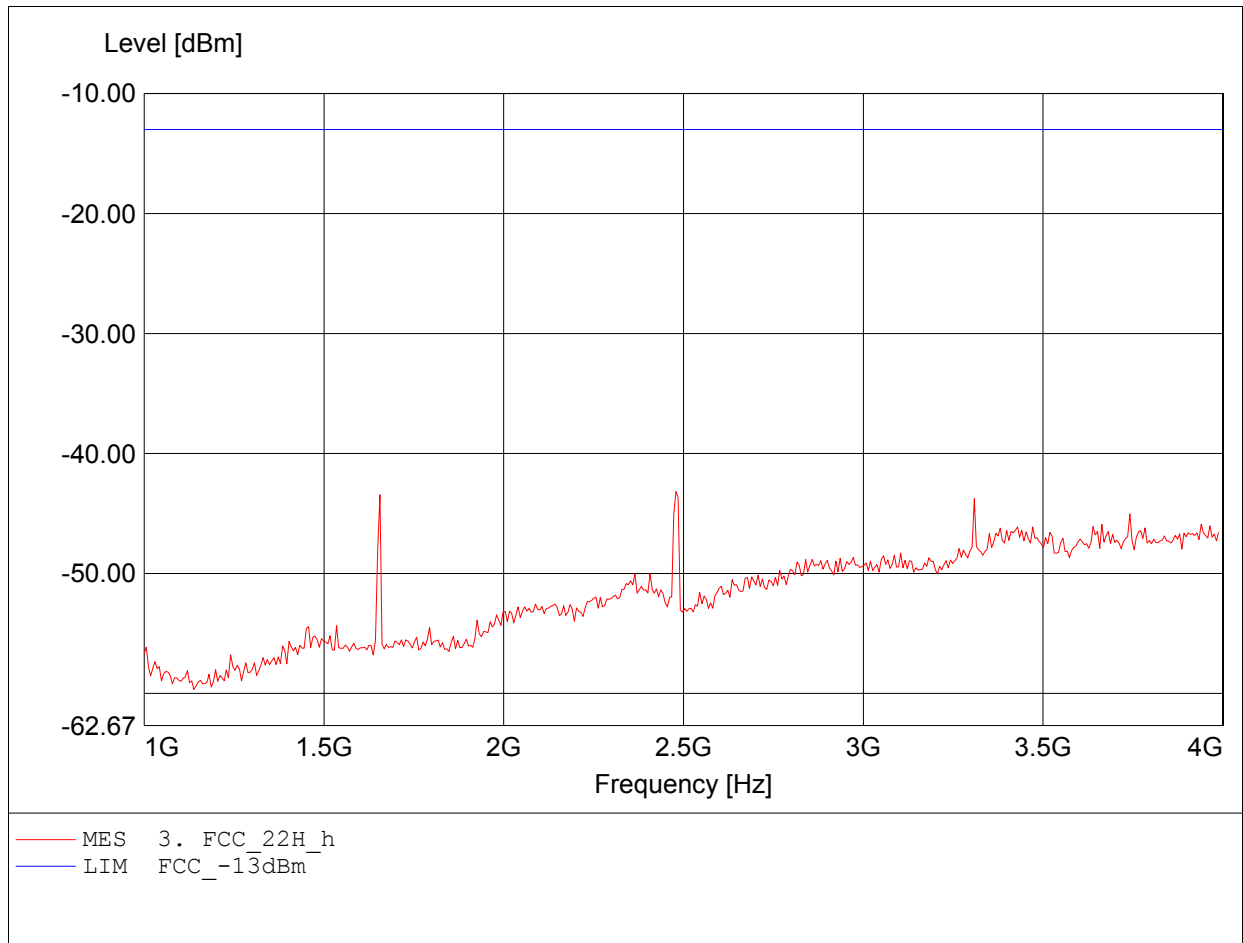


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.551GHz, Pmax: -41.97dBm, RBW: 1MHz

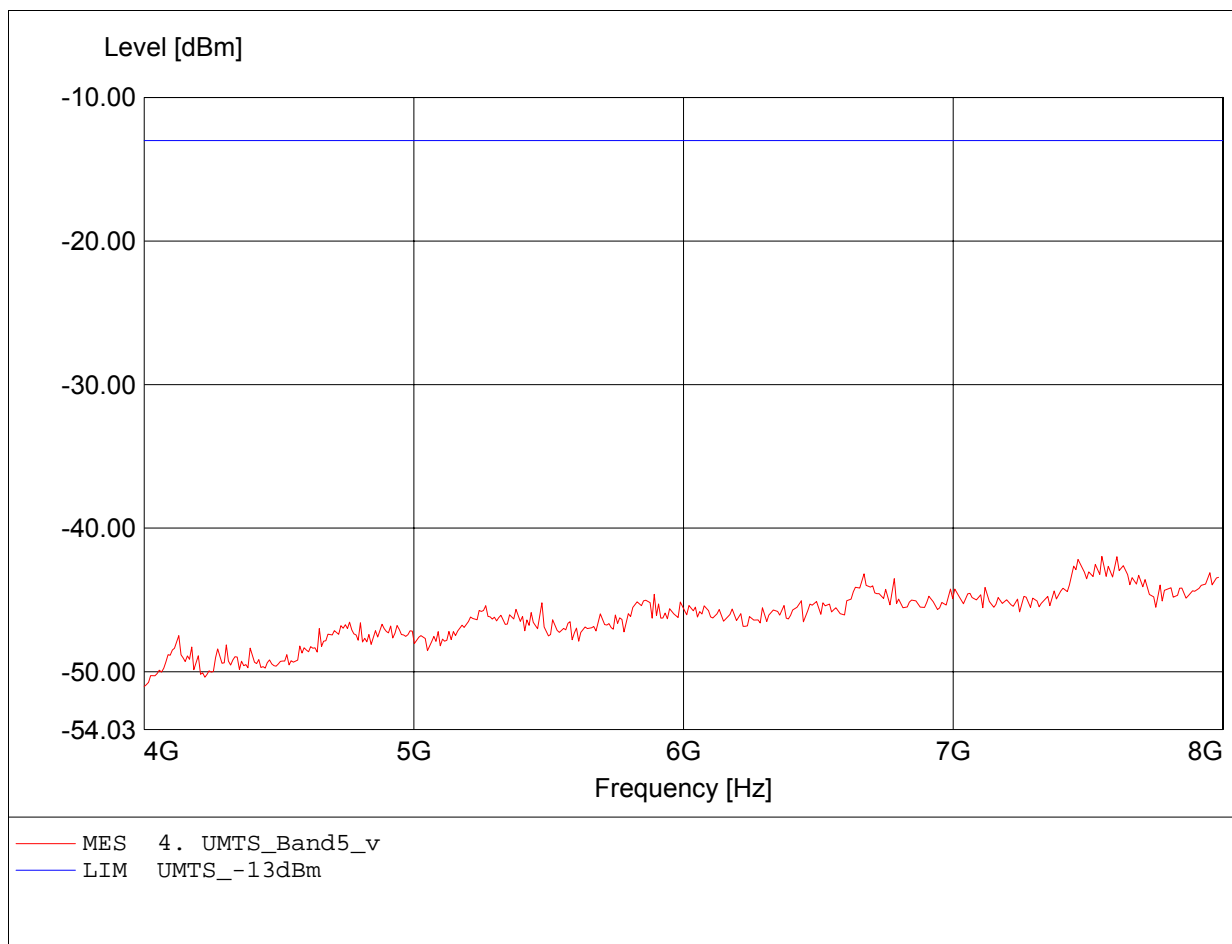


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.960GHz, Pmax: -42.61dBm, RBW: 1MHz

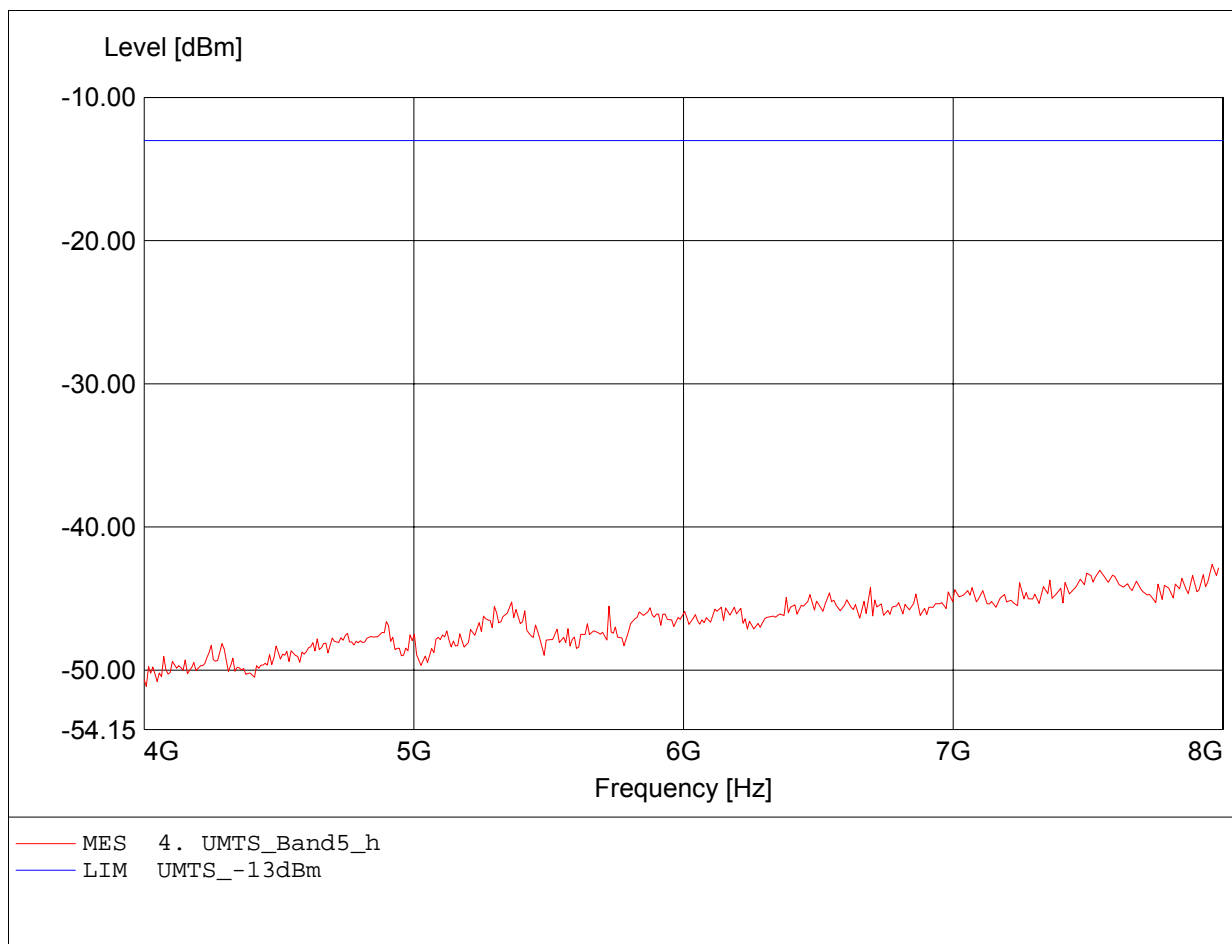


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.158GHz, Pmax: -38.24dBm, RBW: 1MHz

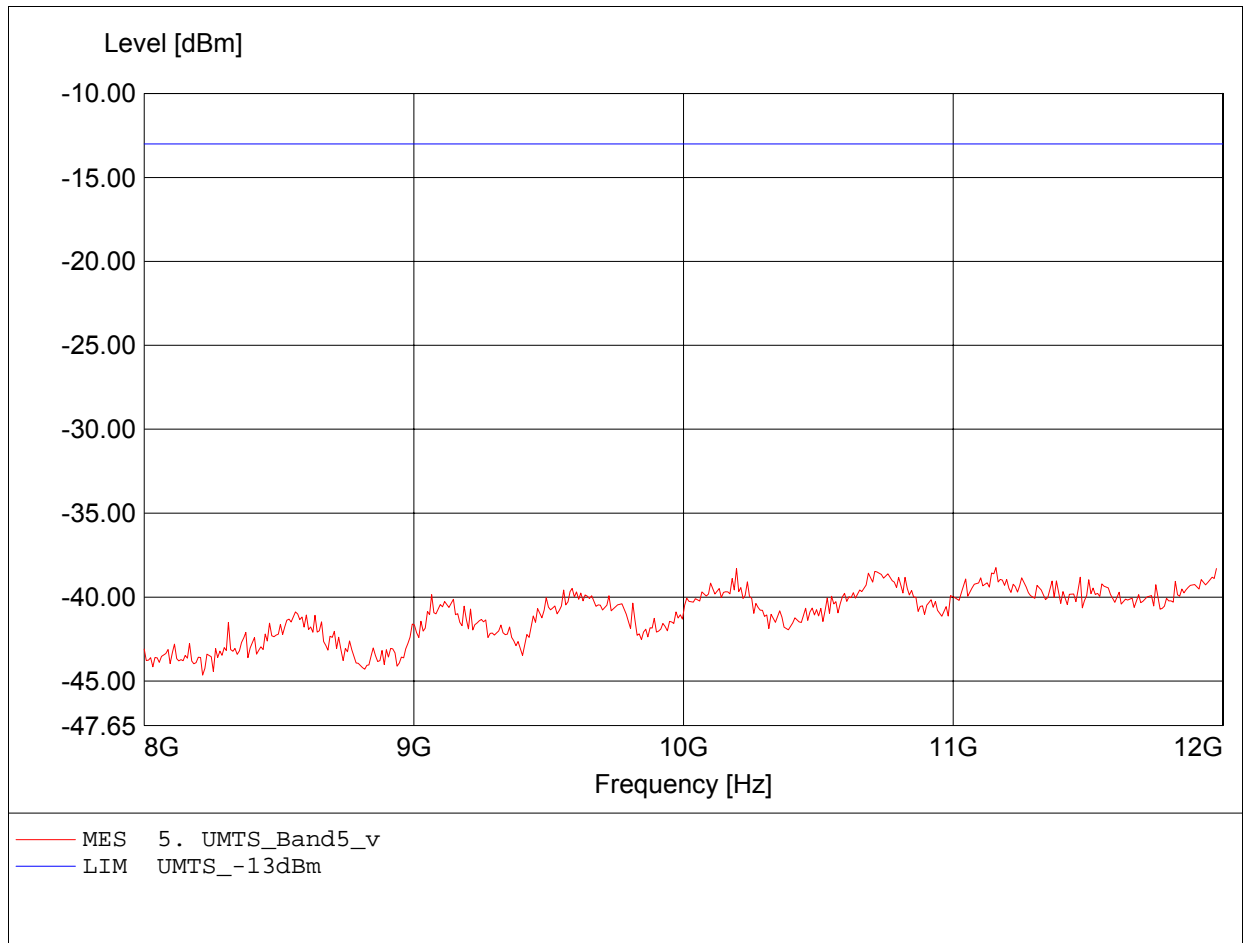


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.717GHz, Pmax: -37.89dBm, RBW: 1MHz

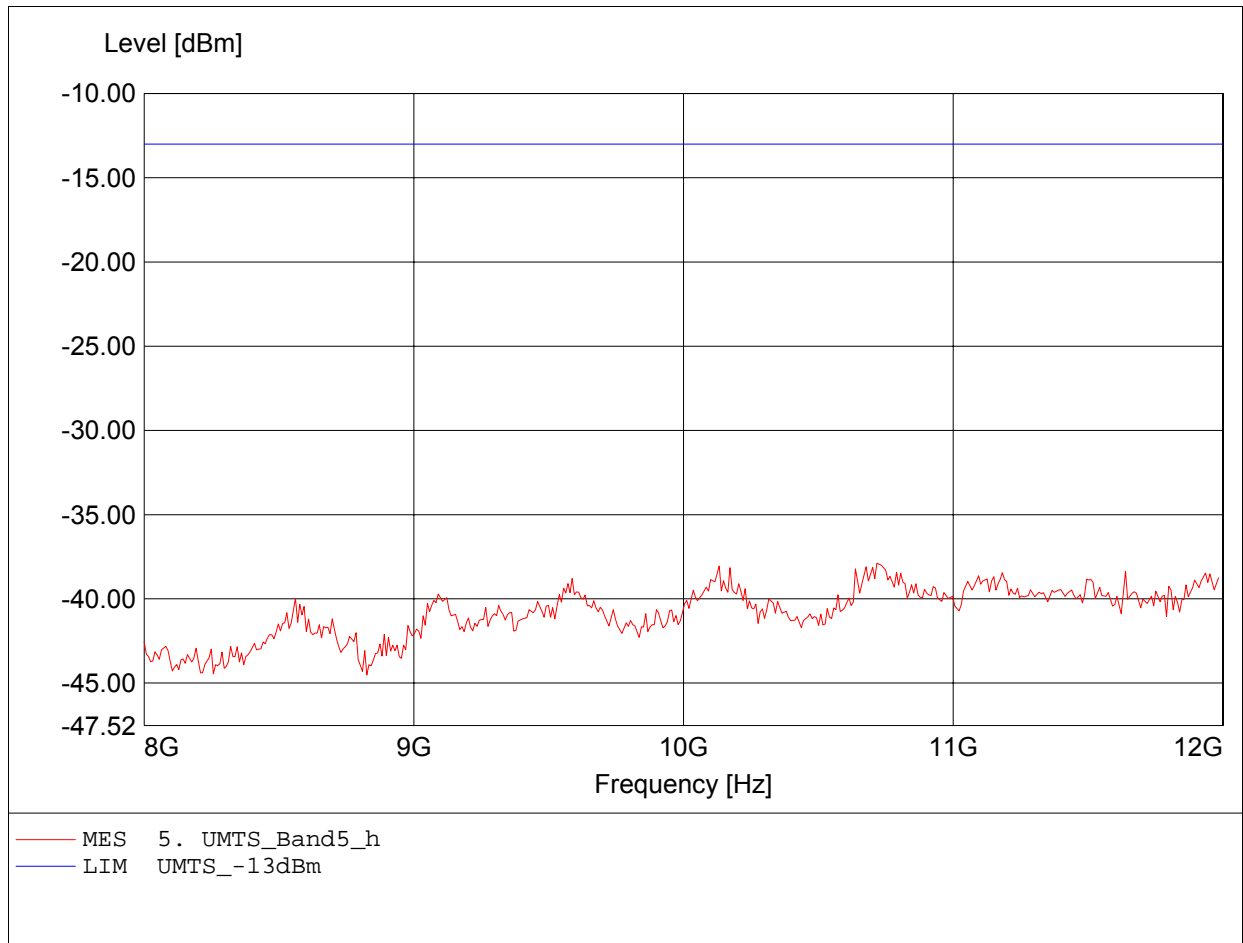


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 191.142MHz, Pmax: -66.94dBm, RBW: 100kHz

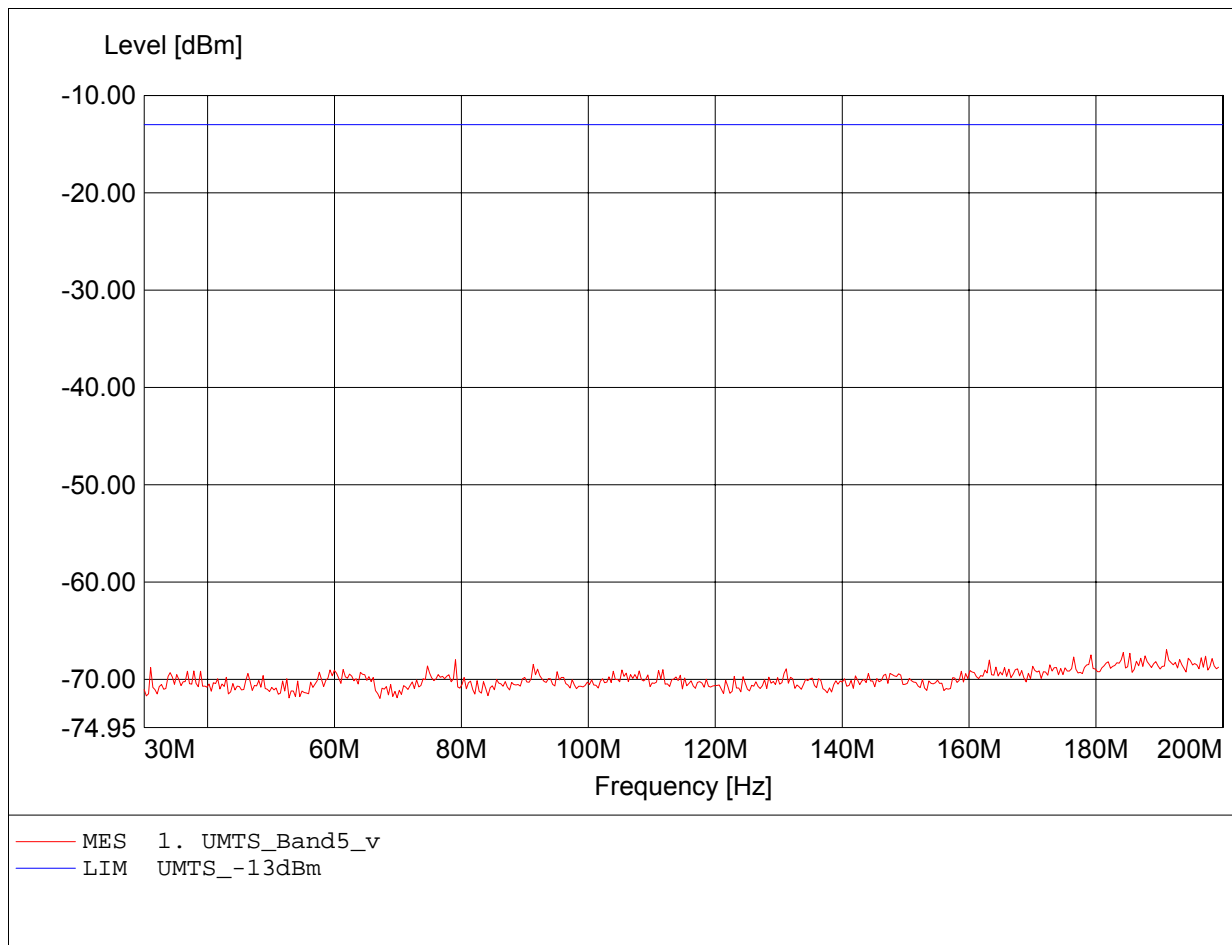


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 36.814MHz, Pmax: -67.44dBm, RBW: 100kHz

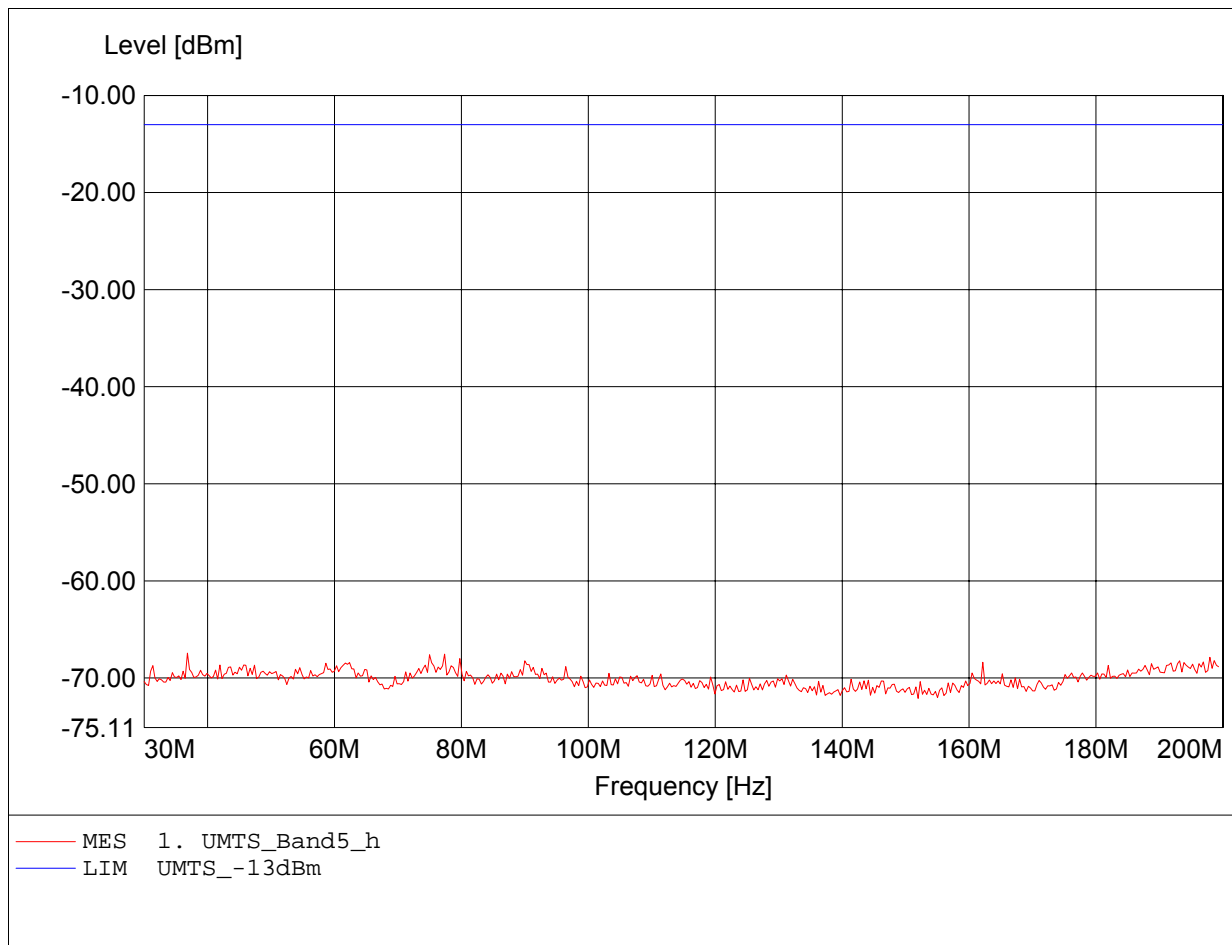


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4175
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 878.870MHz, Pmax: -30.49dBm, RBW: 100kHz

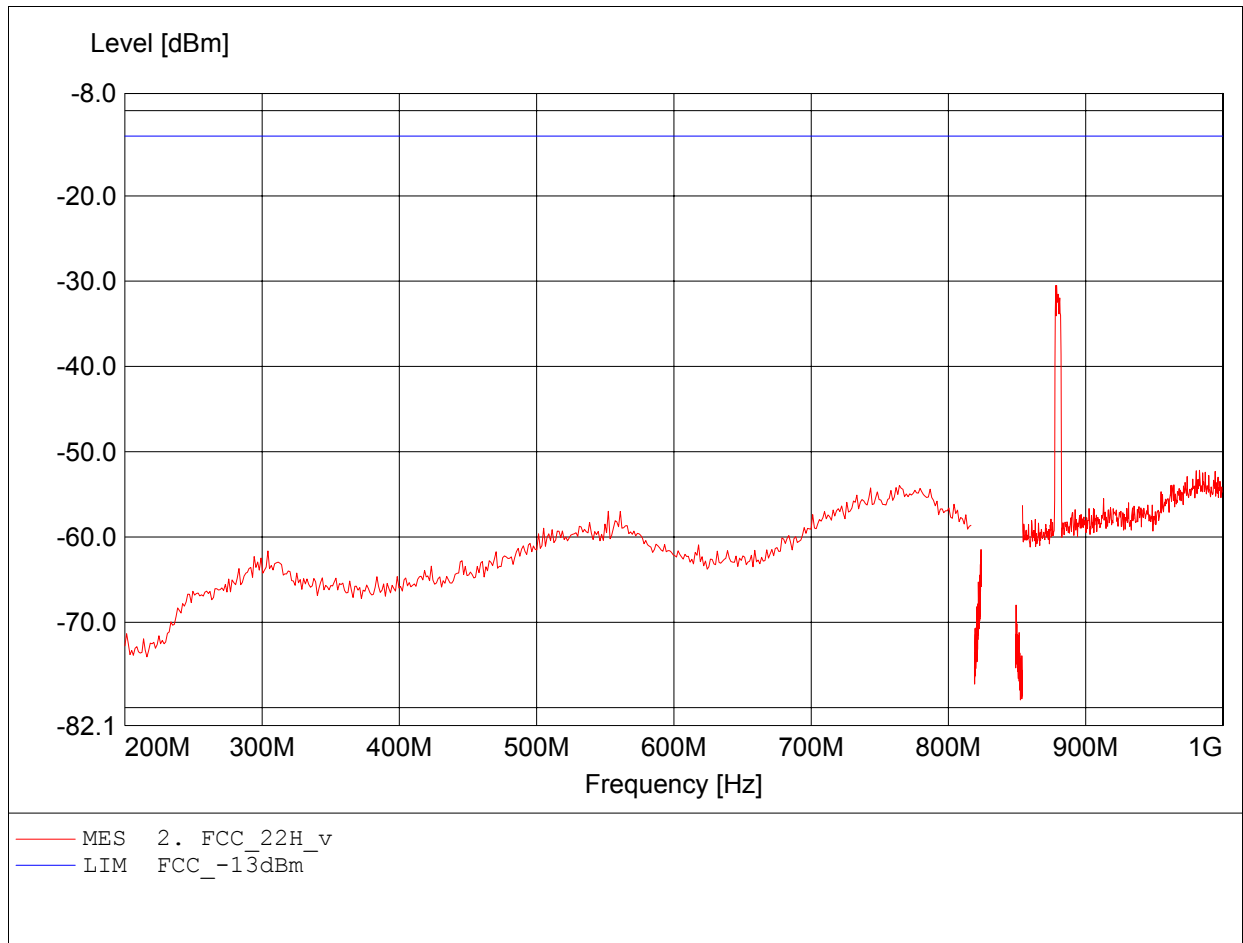


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4175
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 865.996MHz, Pmax: -32.95dBm, RBW: 100kHz

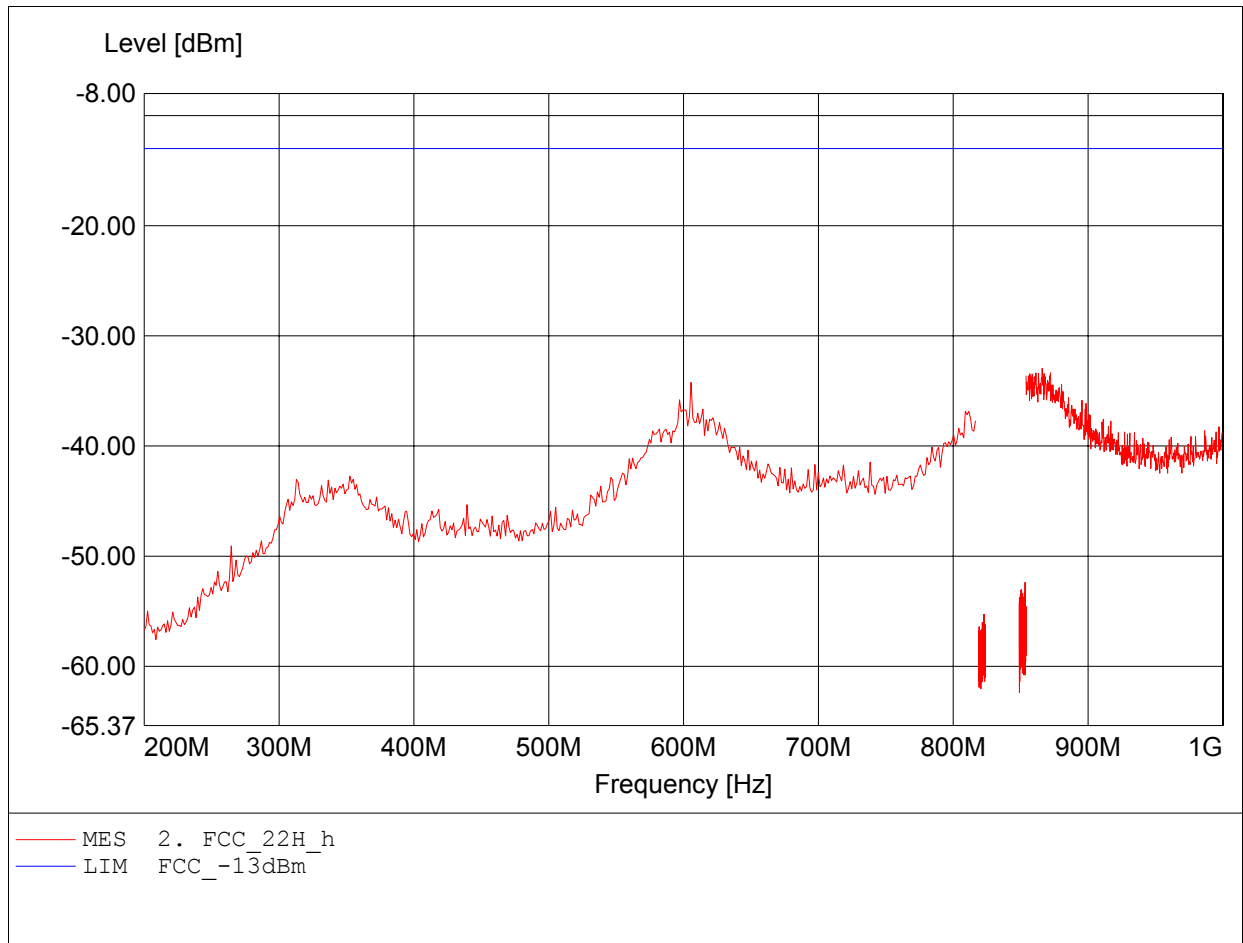


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4175
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.345GHz, Pmax: -44.61dBm, RBW: 1MHz

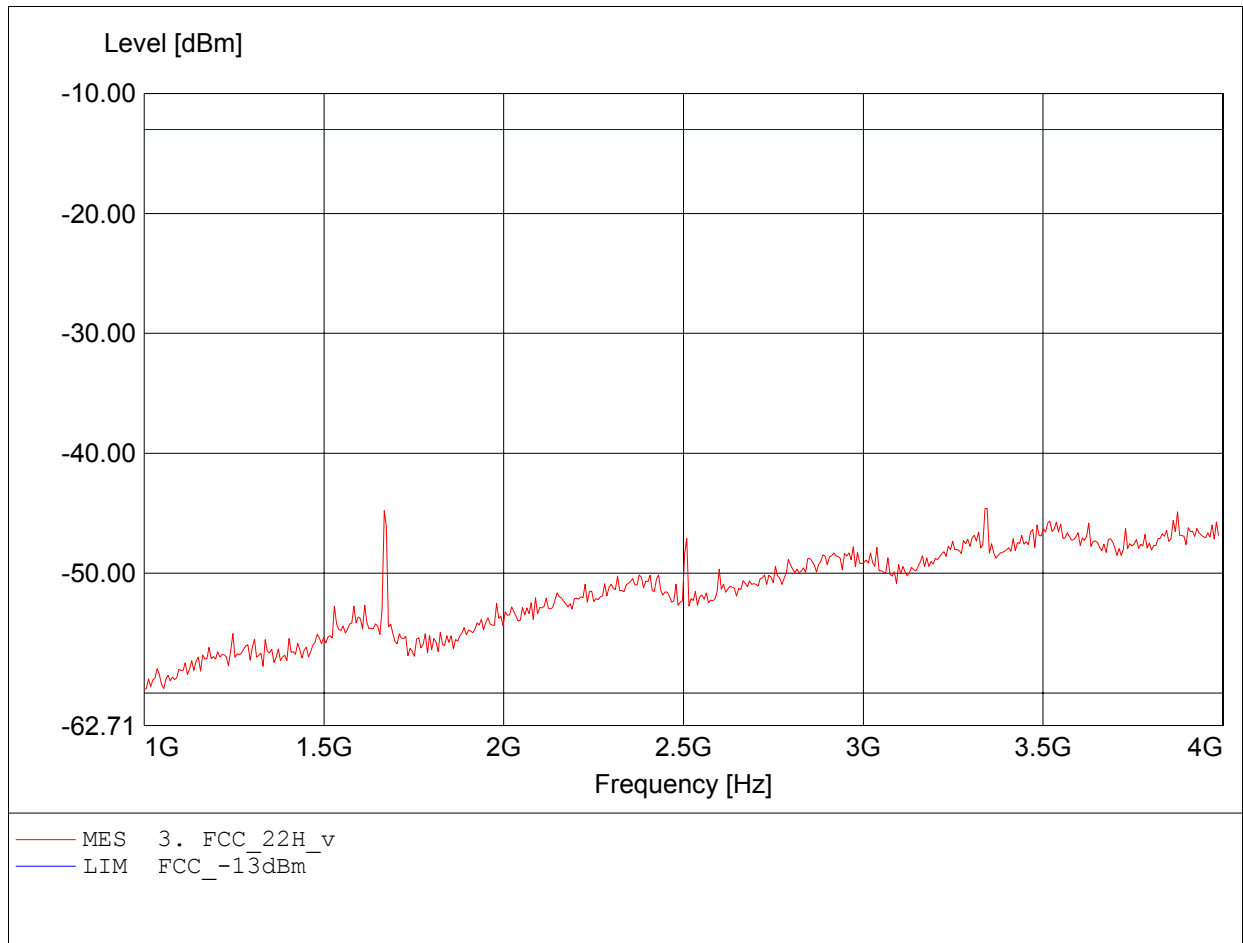


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4175
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.345GHz, Pmax: -41.31dBm, RBW: 1MHz

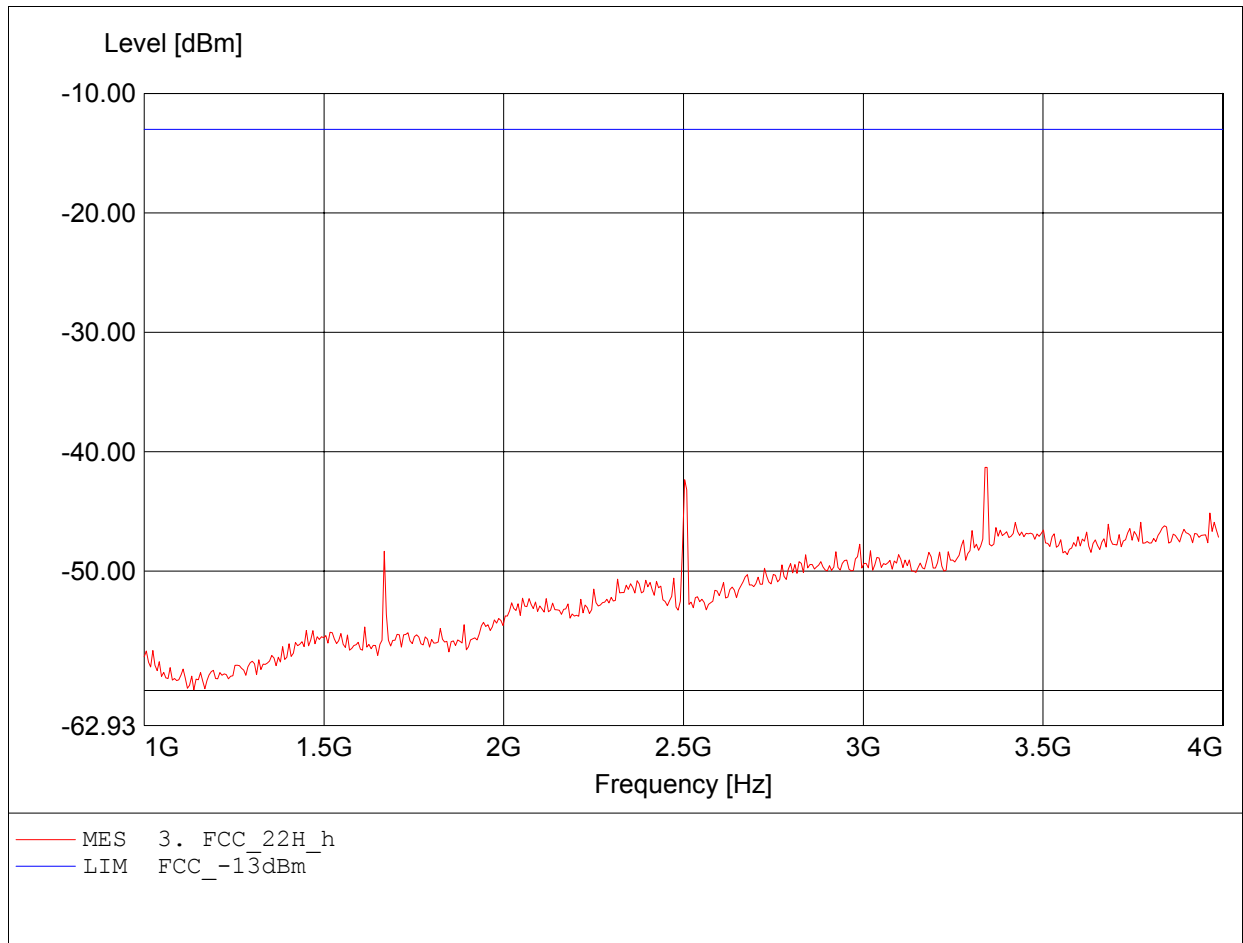


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.567GHz, Pmax: -42.93dBm, RBW: 1MHz

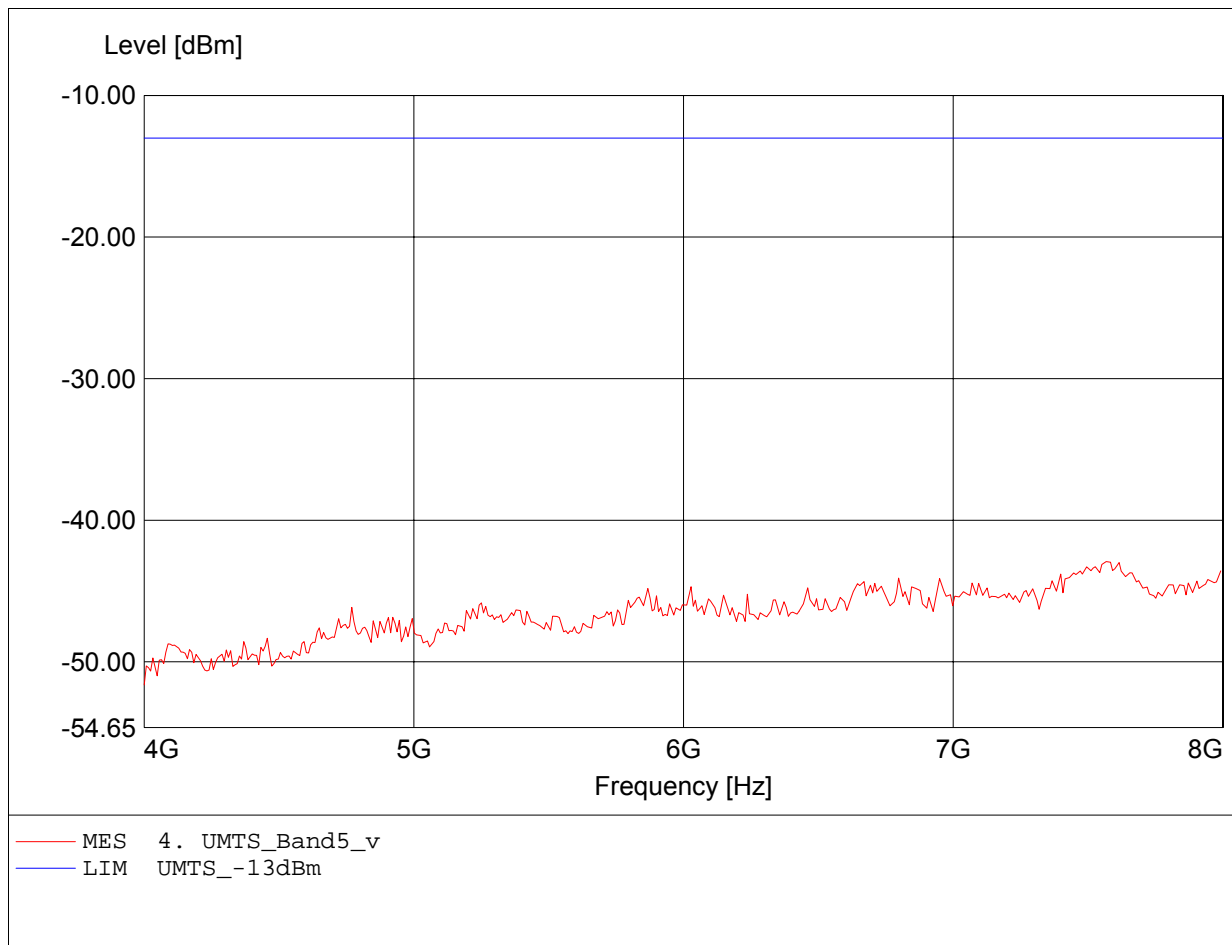


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.535GHz, Pmax: -42.29dBm, RBW: 1MHz

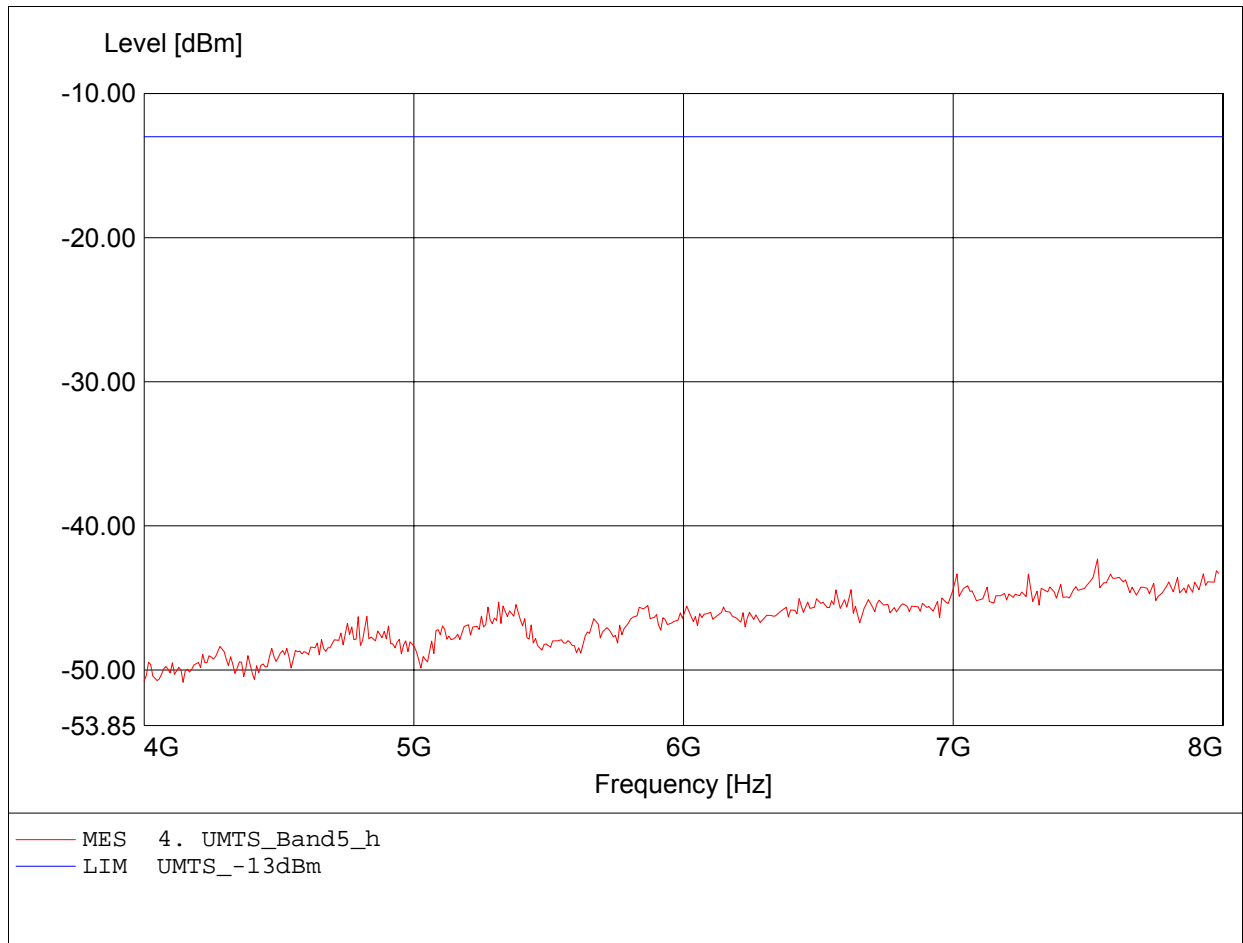


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.758GHz, Pmax: -37.64dBm, RBW: 1MHz

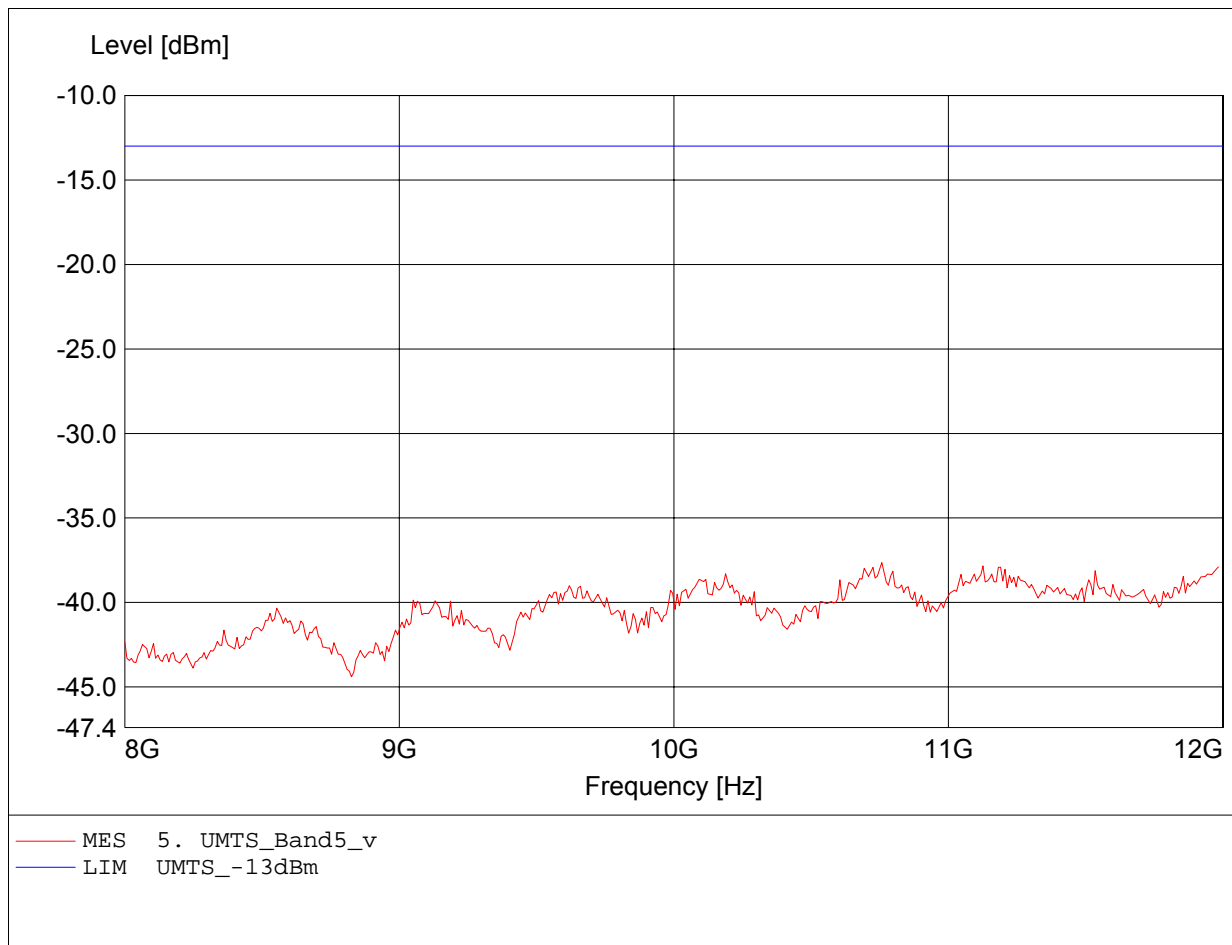


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.741GHz, Pmax: -37.31dBm, RBW: 1MHz

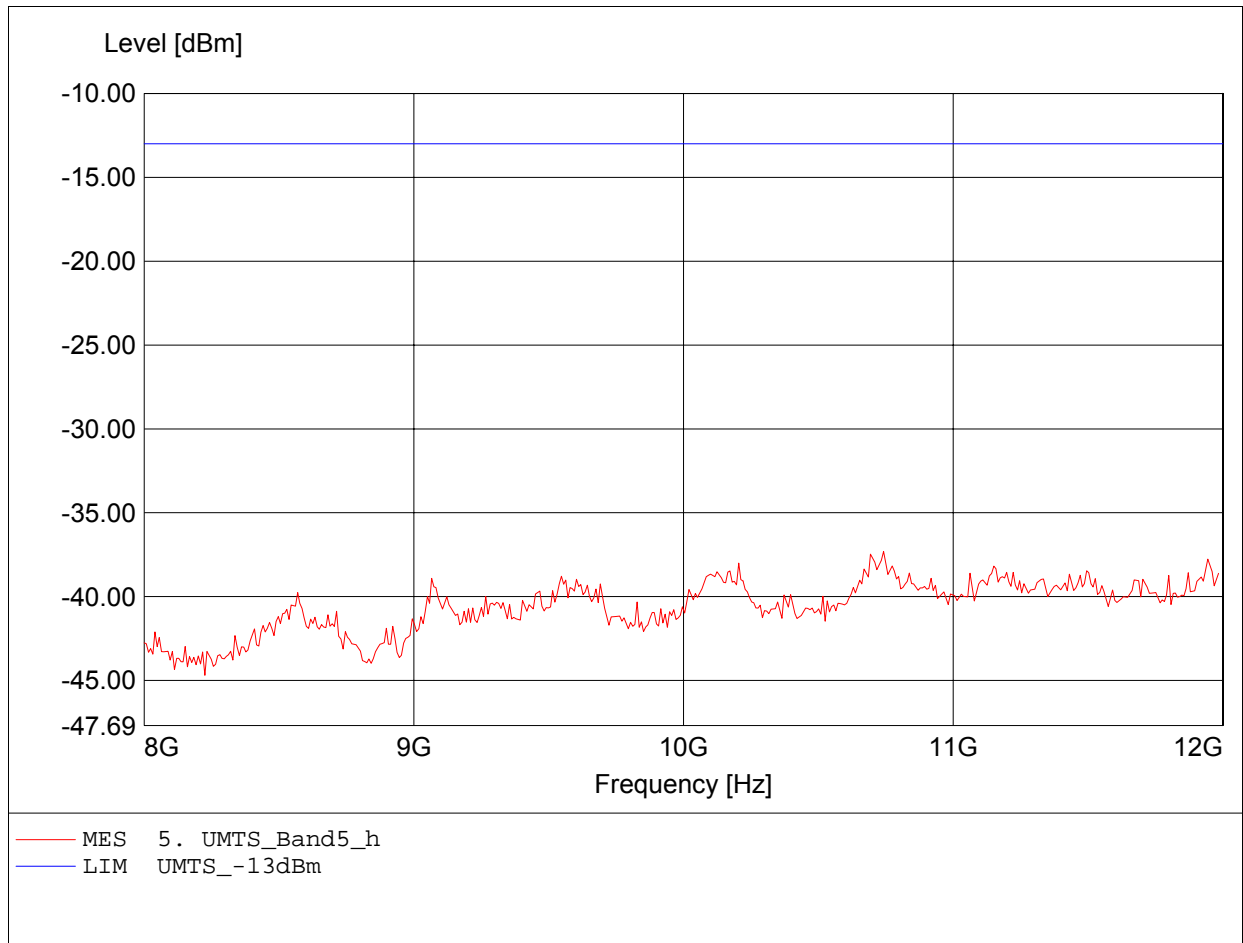


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 180.581MHz, Pmax: -67.38dBm, RBW: 100kHz

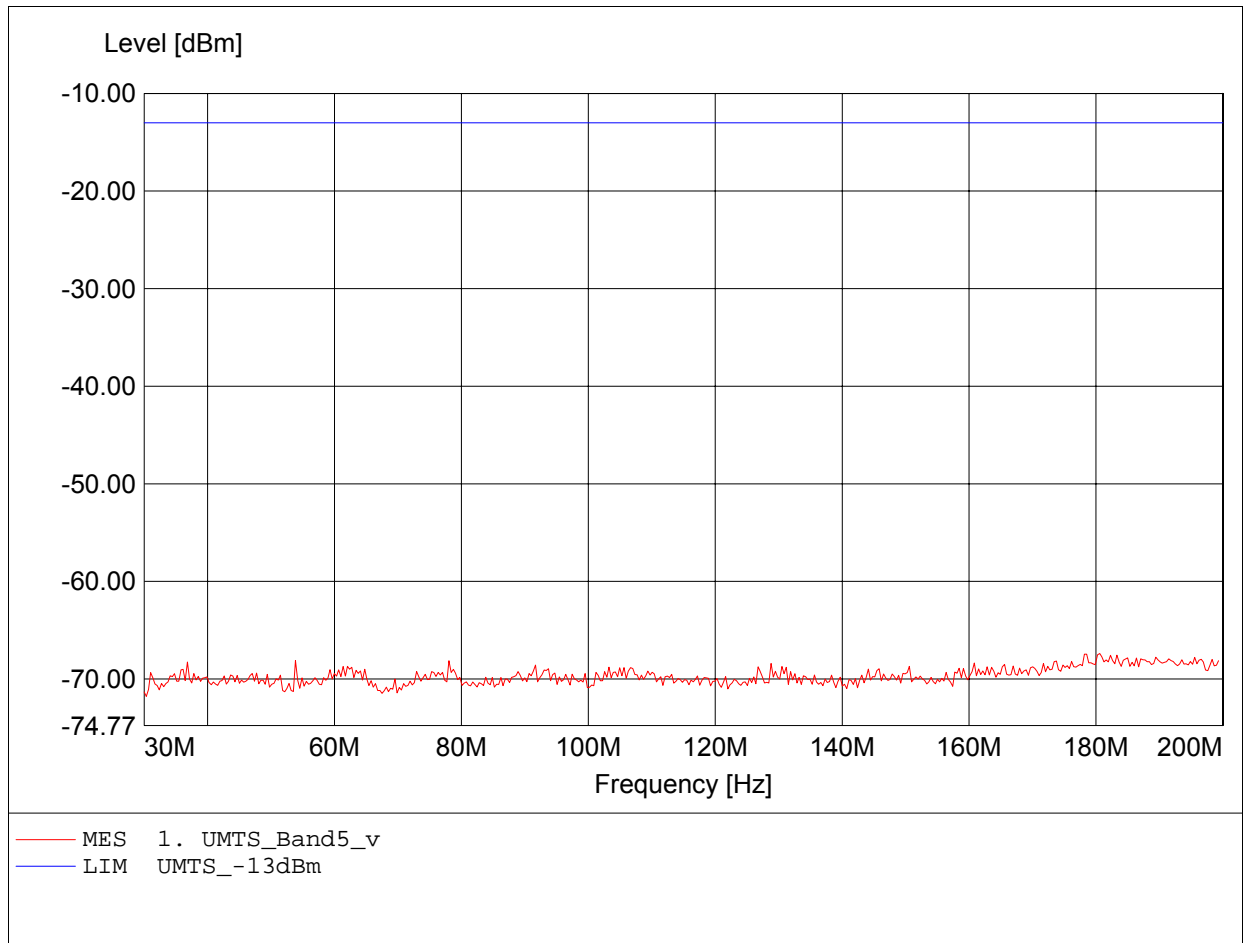


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 74.629MHz, Pmax: -67.41dBm, RBW: 100kHz

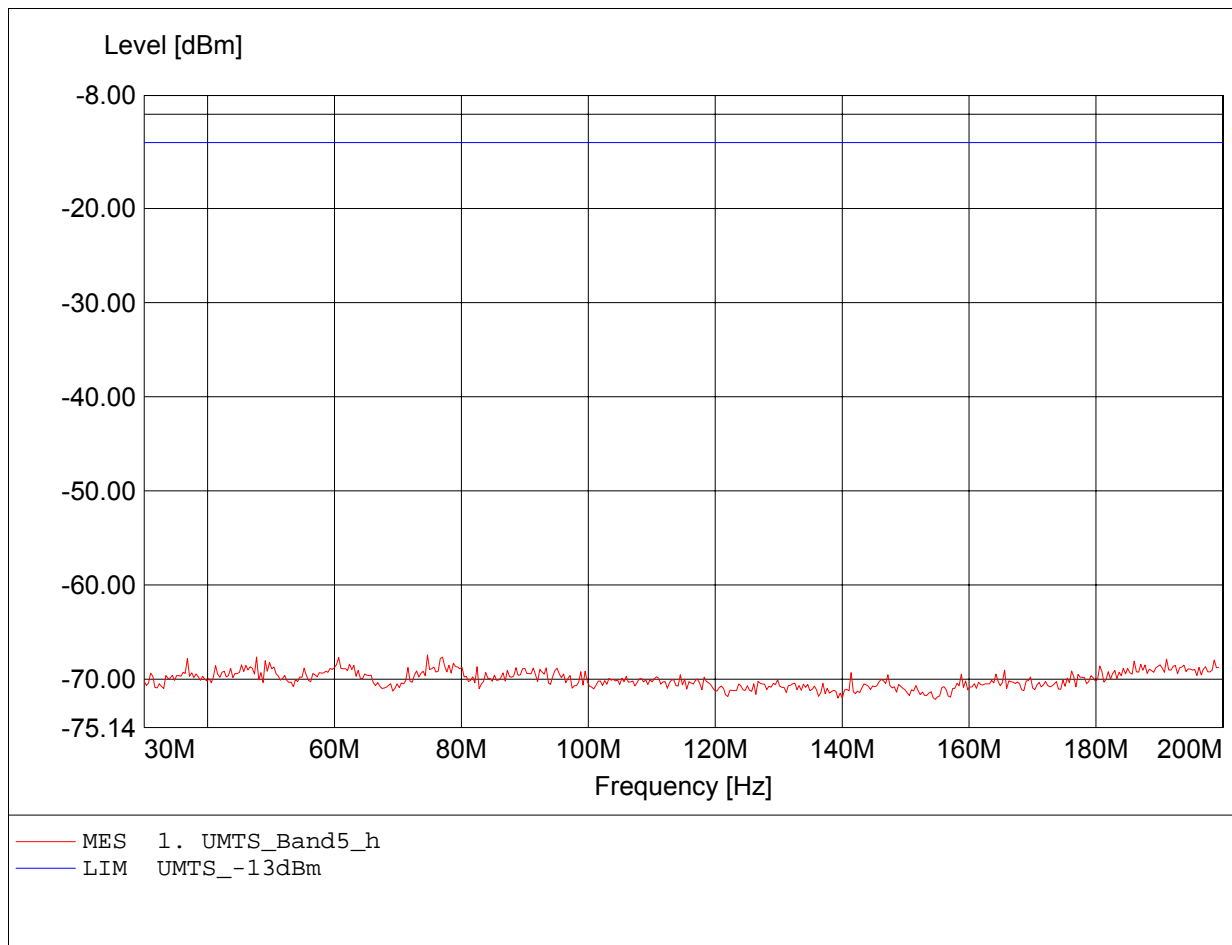


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4232
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 890.573MHz, Pmax: -30.86dBm, RBW: 100kHz

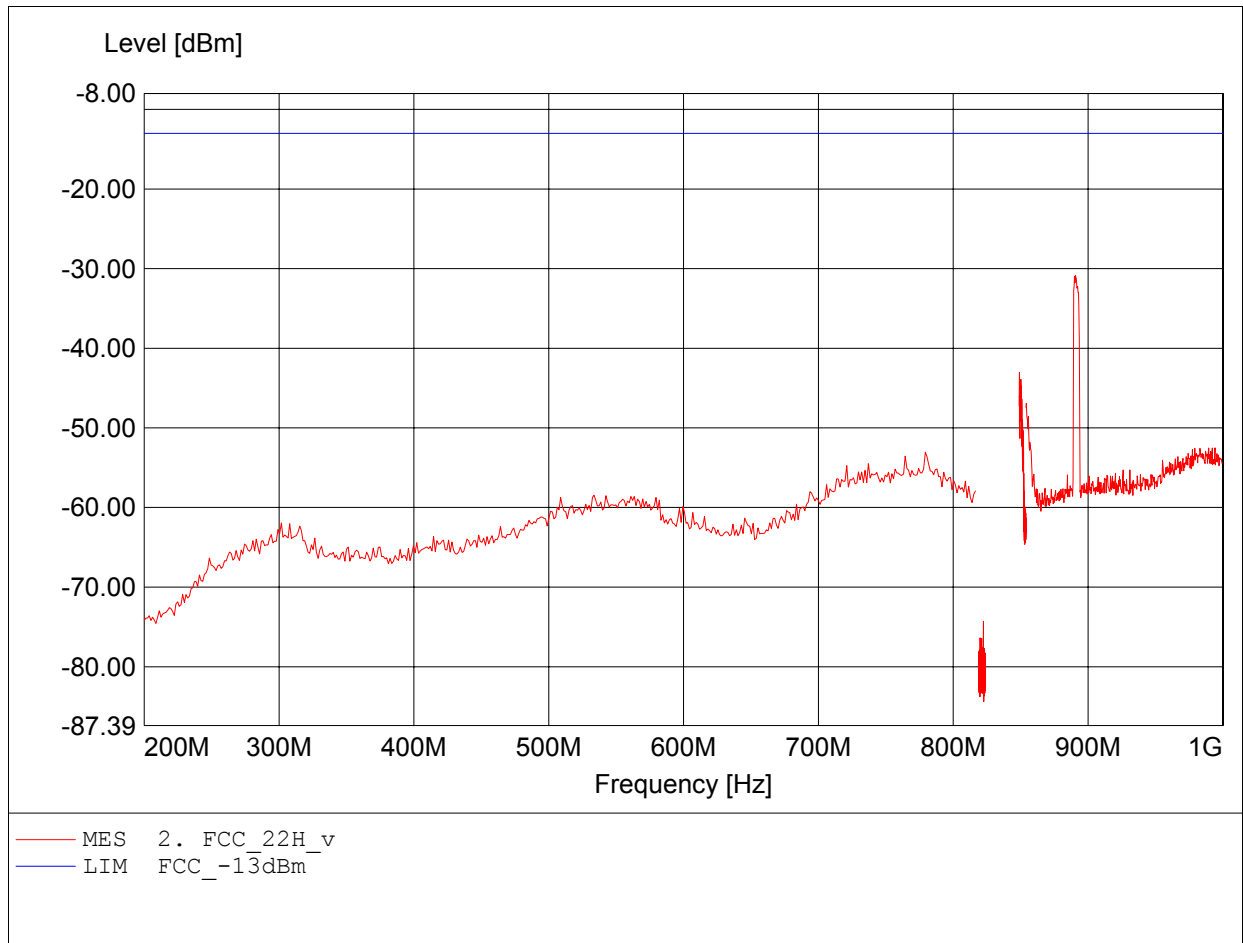


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4232
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL 223+notch
Comment 2: Freq: 854.000MHz, Pmax: -32.63dBm, RBW: 100kHz

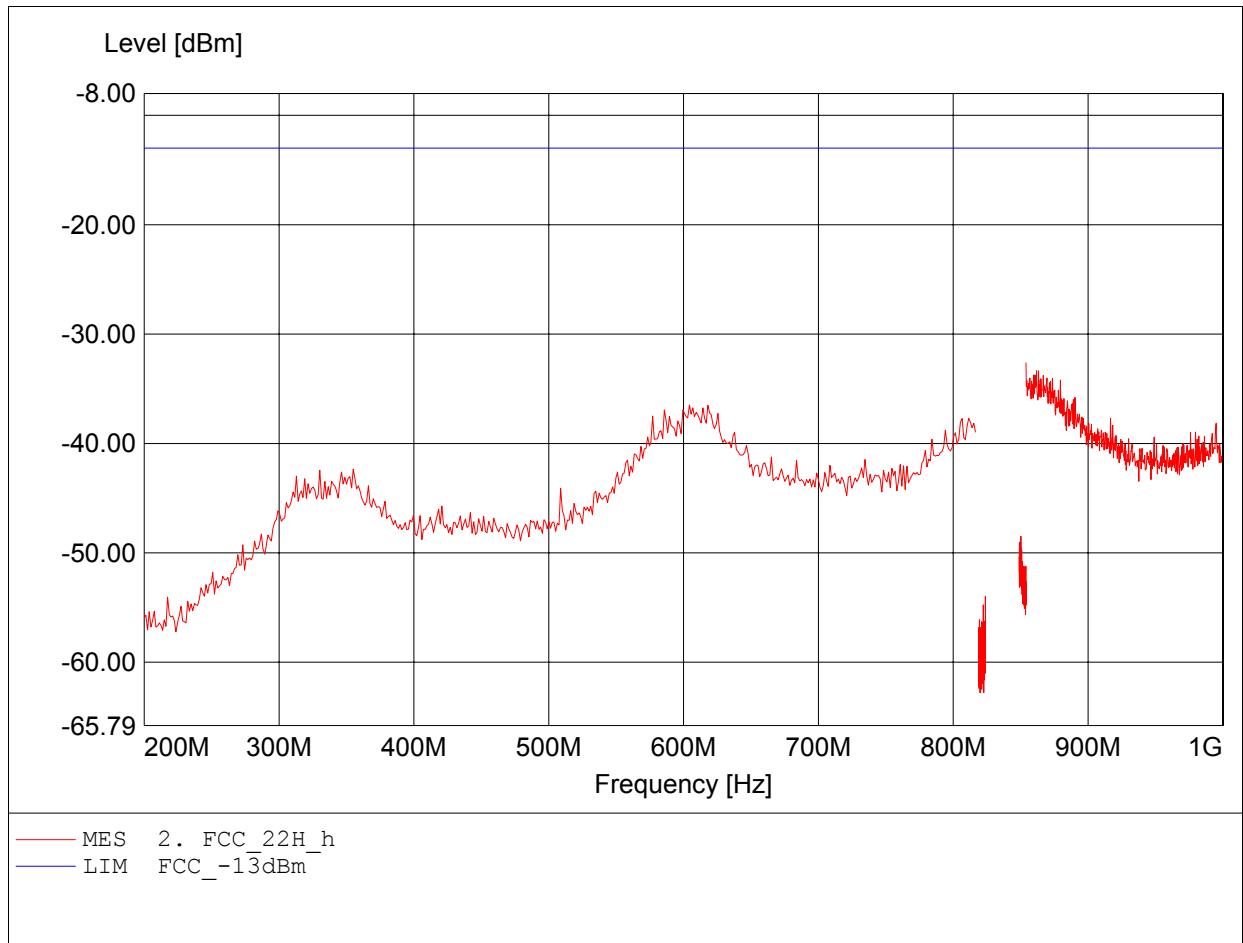


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4232
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.691GHz, Pmax: -36.67dBm, RBW: 1MHz

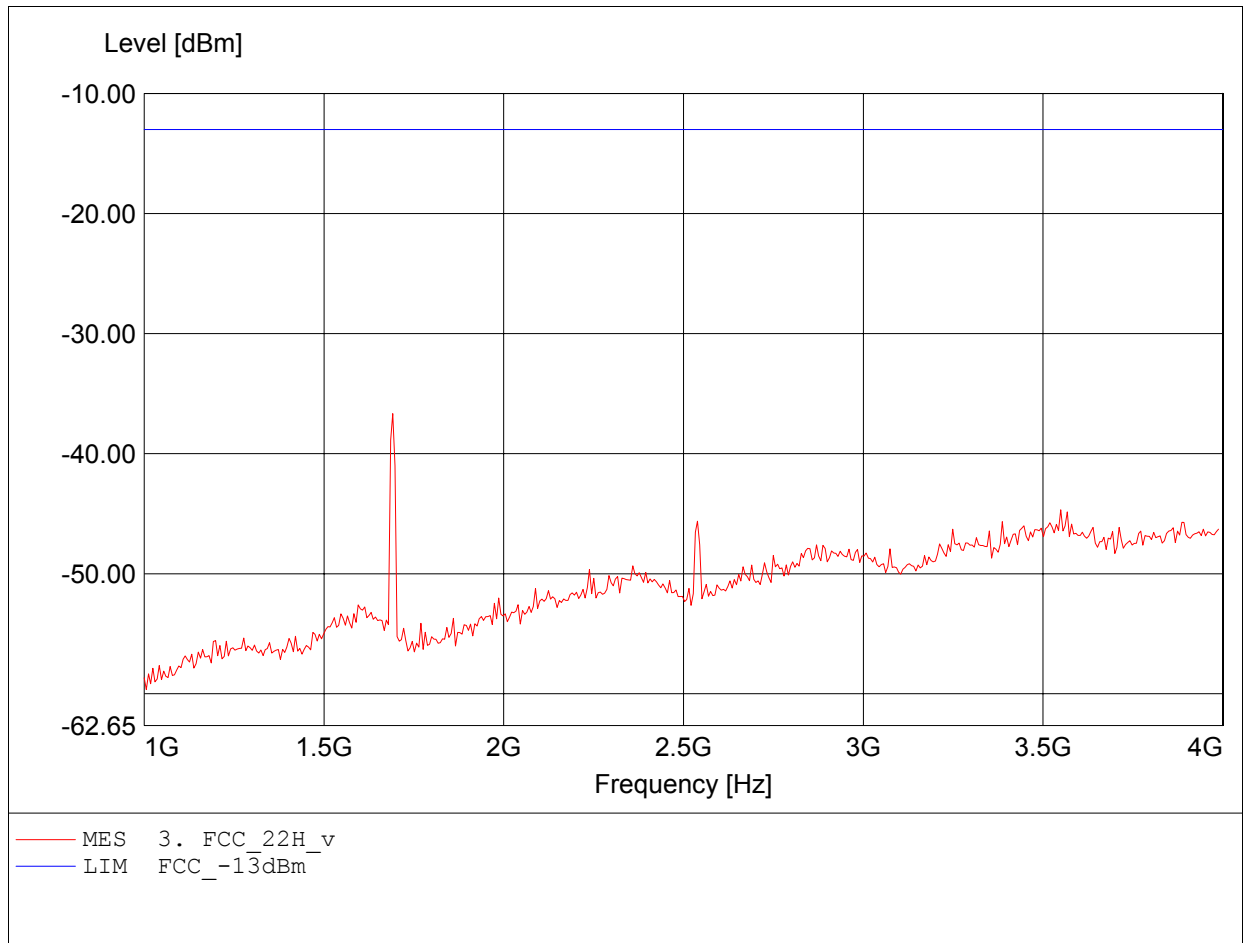


Radiated Emissions Tx
FCC RULES PART 22 SUBPART H

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB V / Ch.: 4232
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §22.917
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 1.691GHz, Pmax: -41.10dBm, RBW: 1MHz

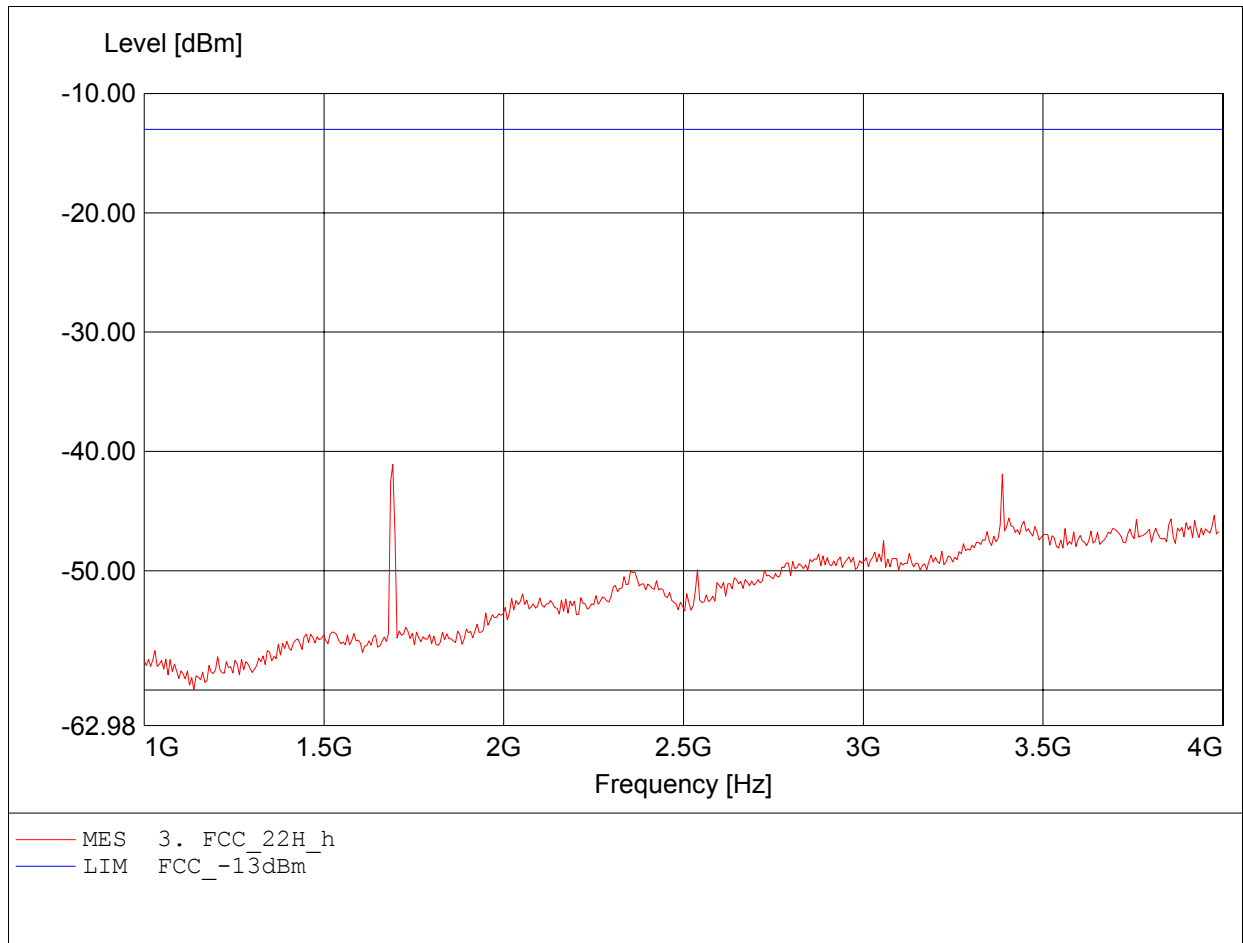


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.535GHz, Pmax: -42.94dBm, RBW: 1MHz

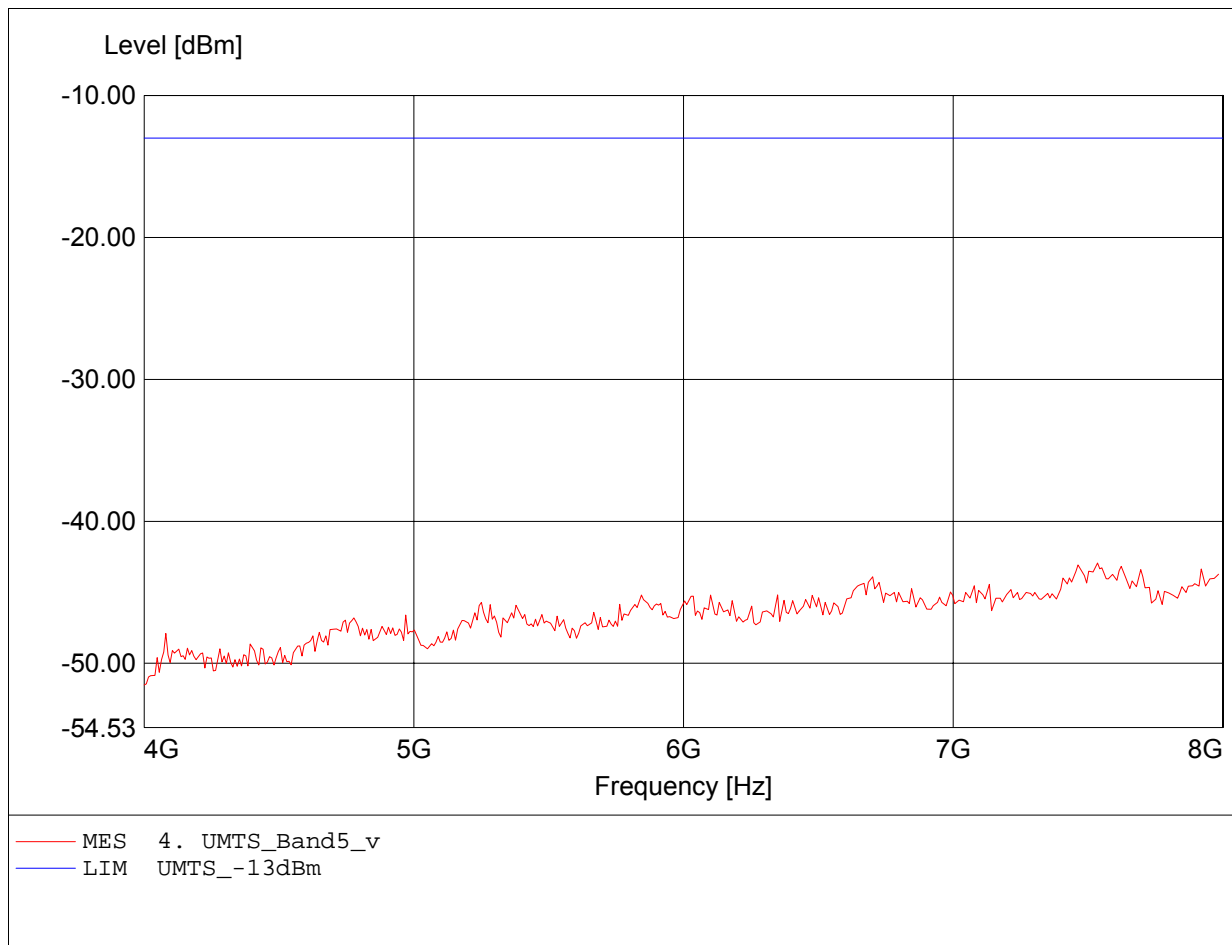


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.984GHz, Pmax: -42.68dBm, RBW: 1MHz

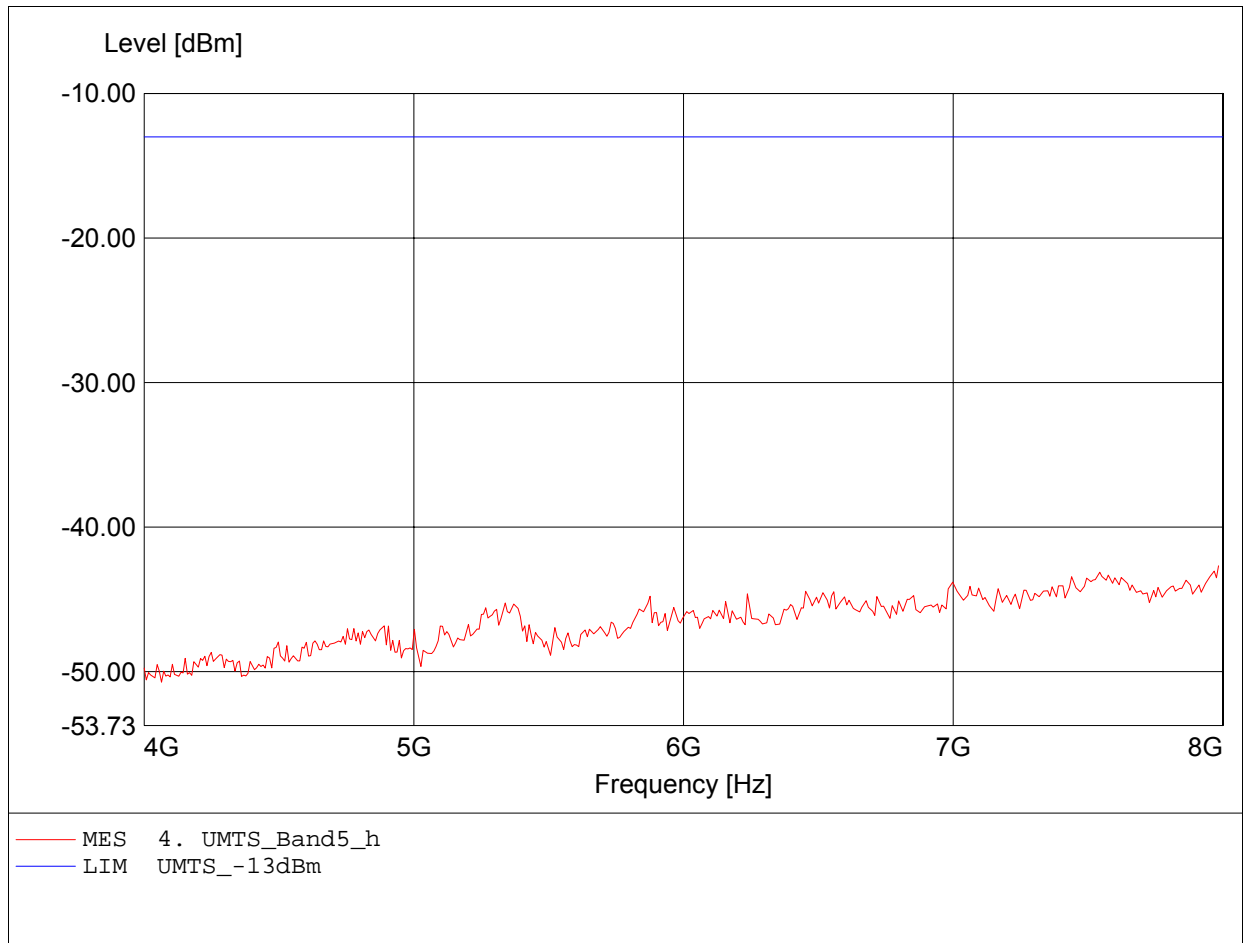


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.944GHz, Pmax: -38.25dBm, RBW: 1MHz

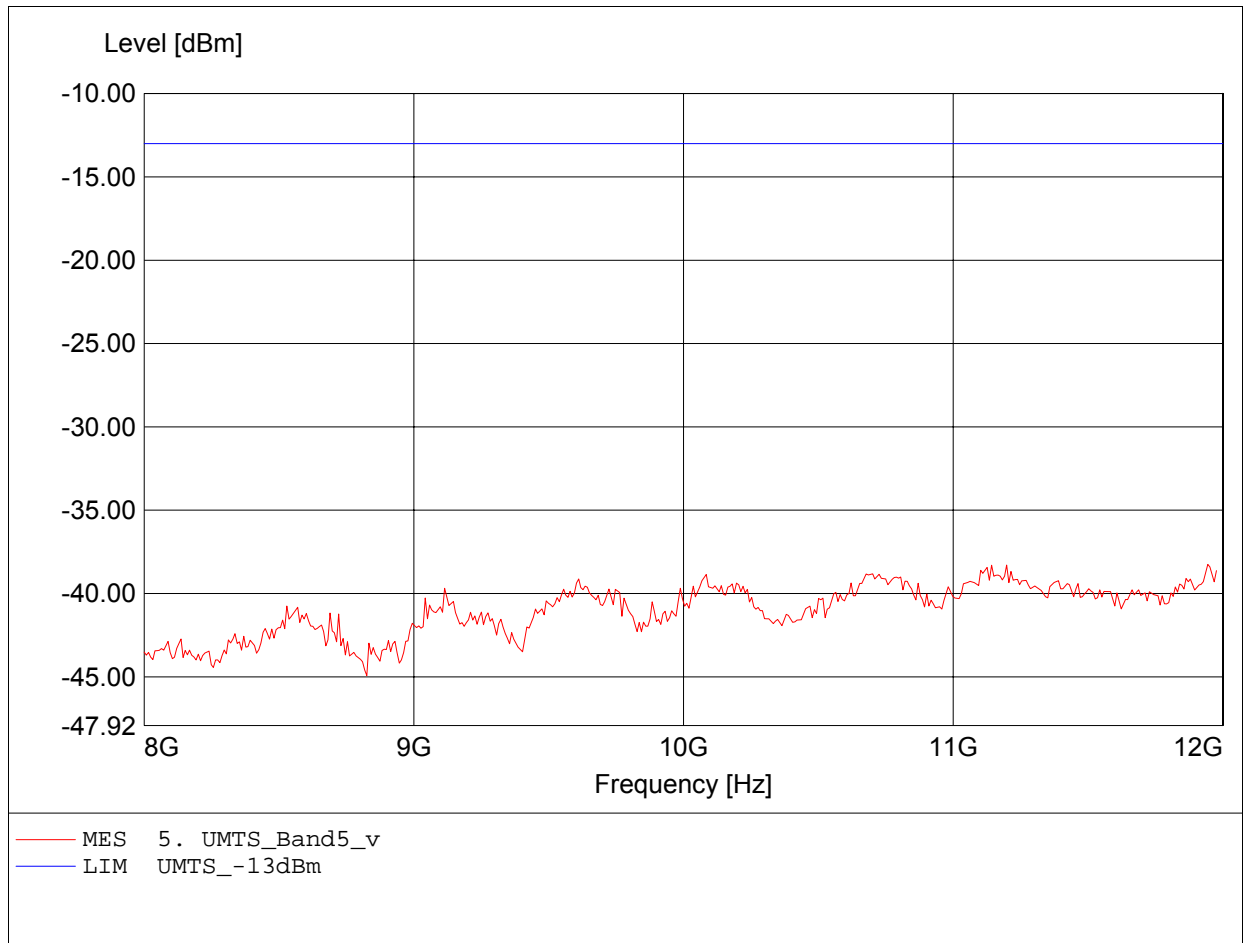


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.685GHz, Pmax: -37.36dBm, RBW: 1MHz

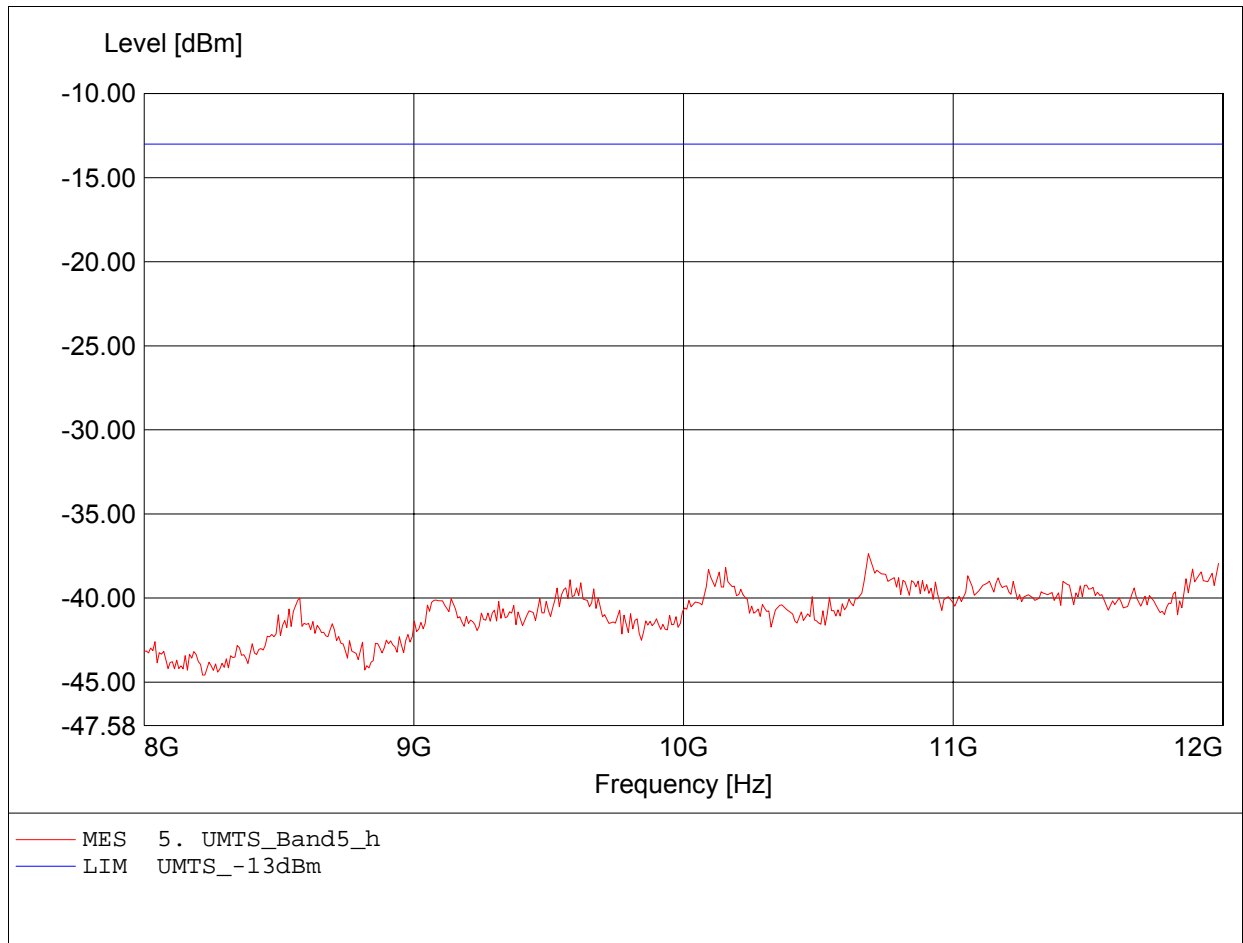


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 190.802MHz, Pmax: -67.61dBm, RBW: 100kHz

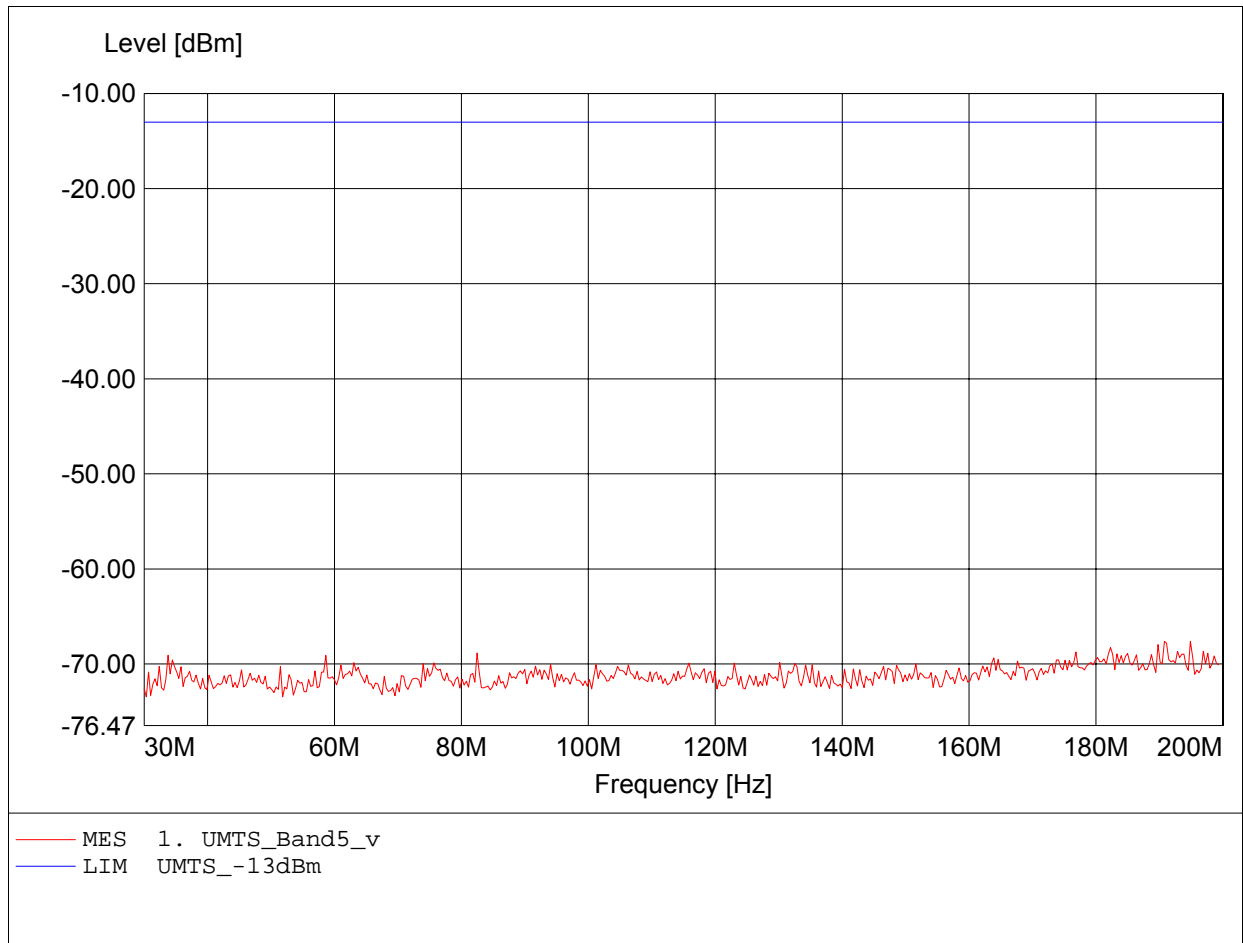


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 190.802MHz, Pmax: -67.71dBm, RBW: 100kHz

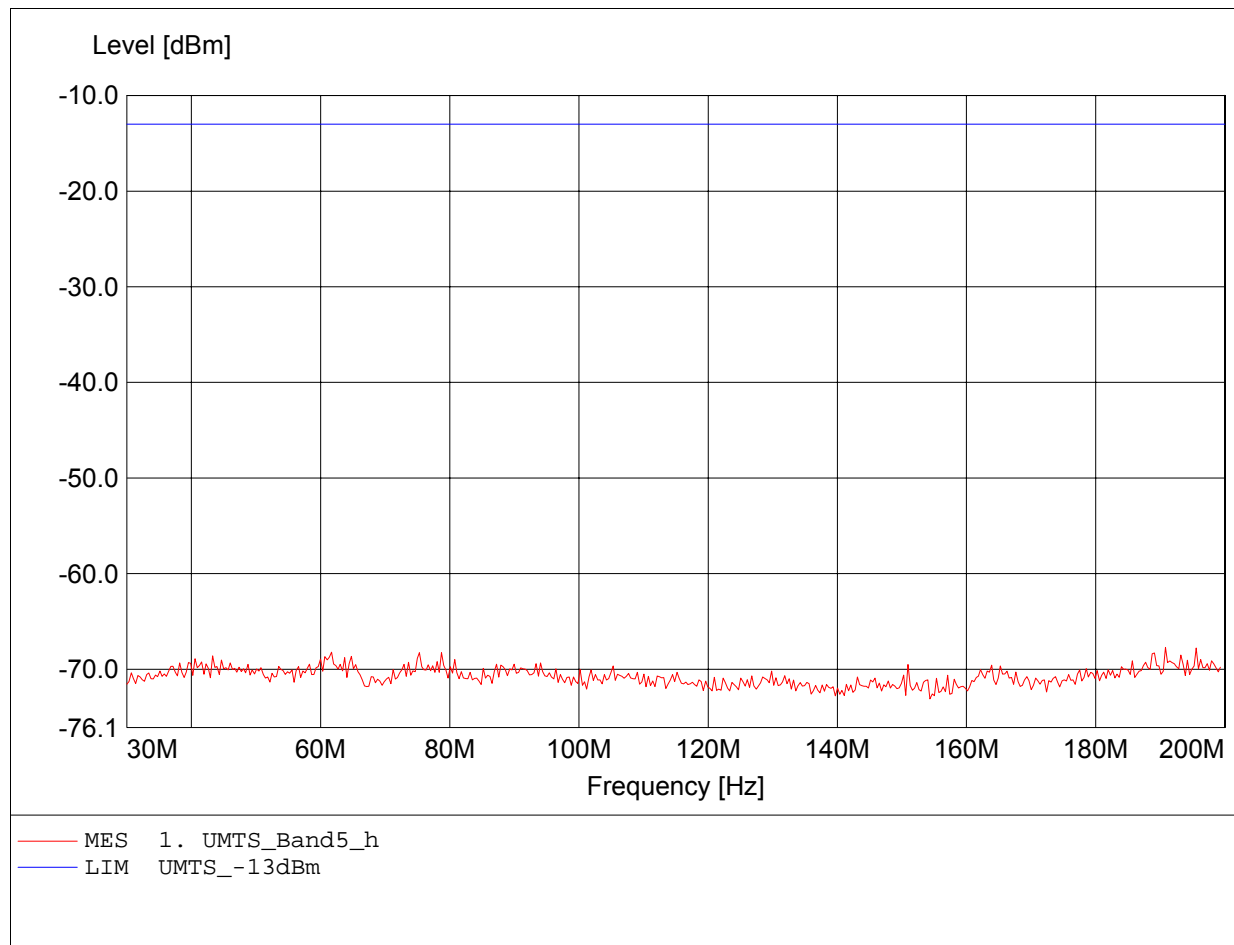


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 825.739MHz, Pmax: -29.94dBm, RBW: 100kHz

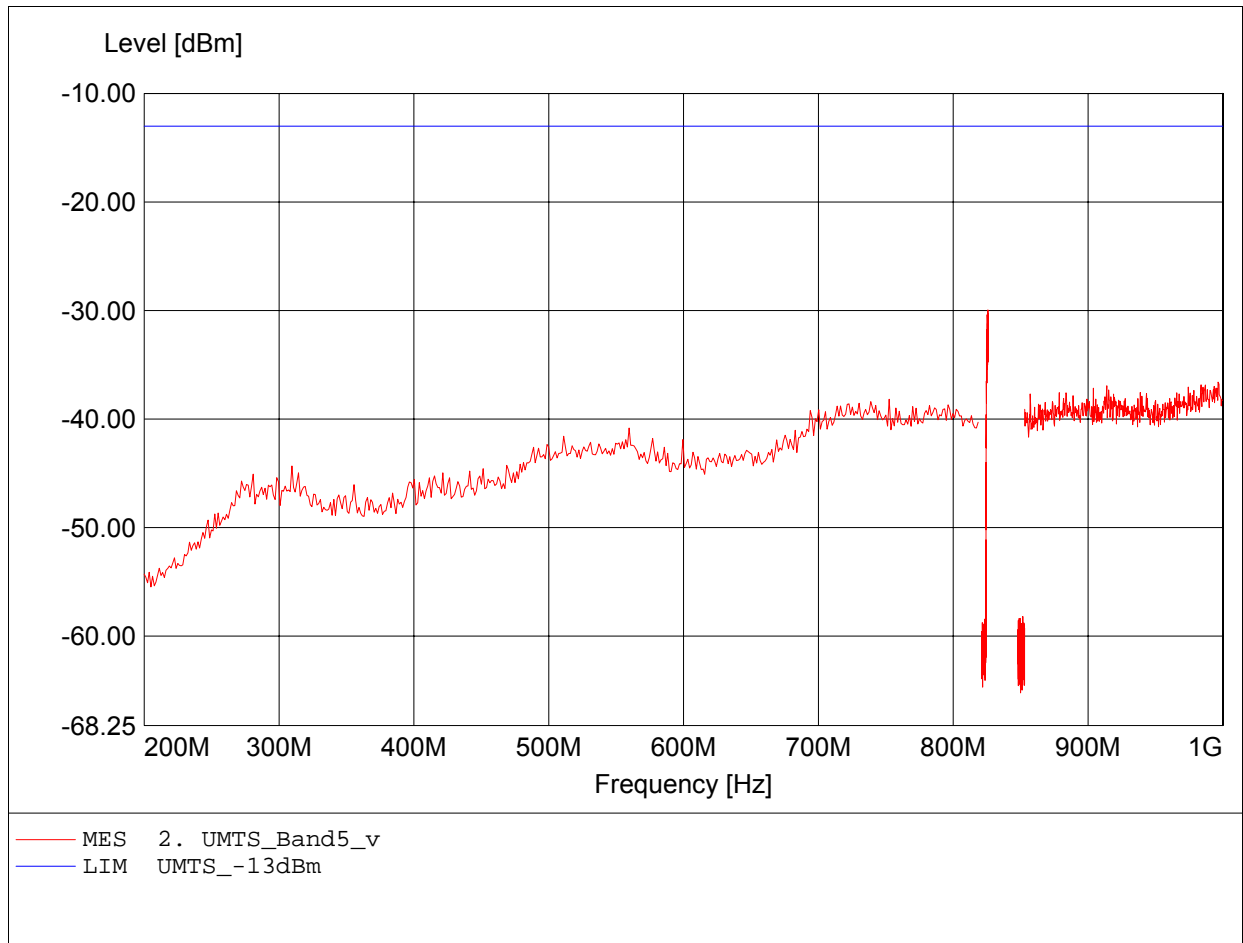


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 857.713MHz, Pmax: -34.22dBm, RBW: 100kHz

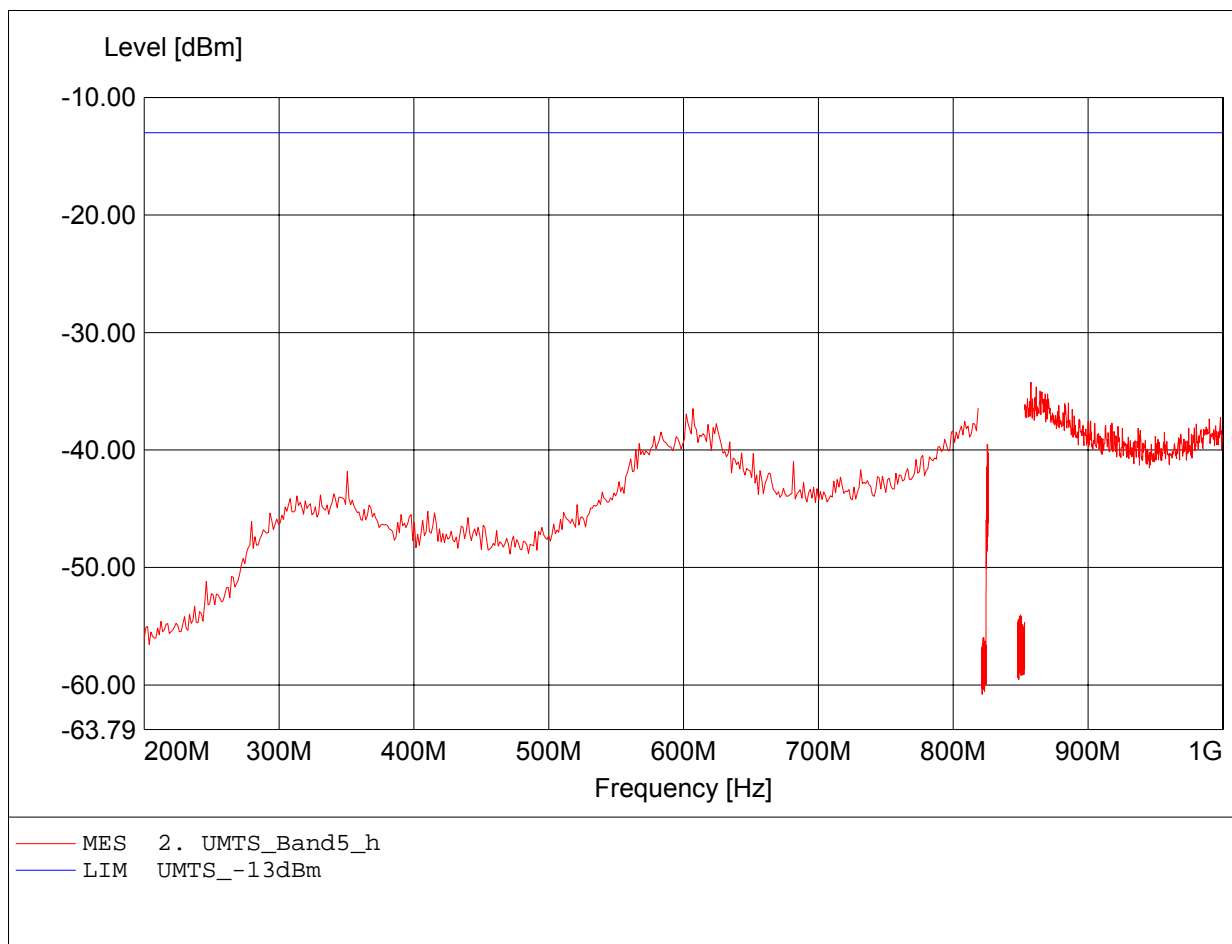


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.850GHz, Pmax: -46.74dBm, RBW: 1MHz

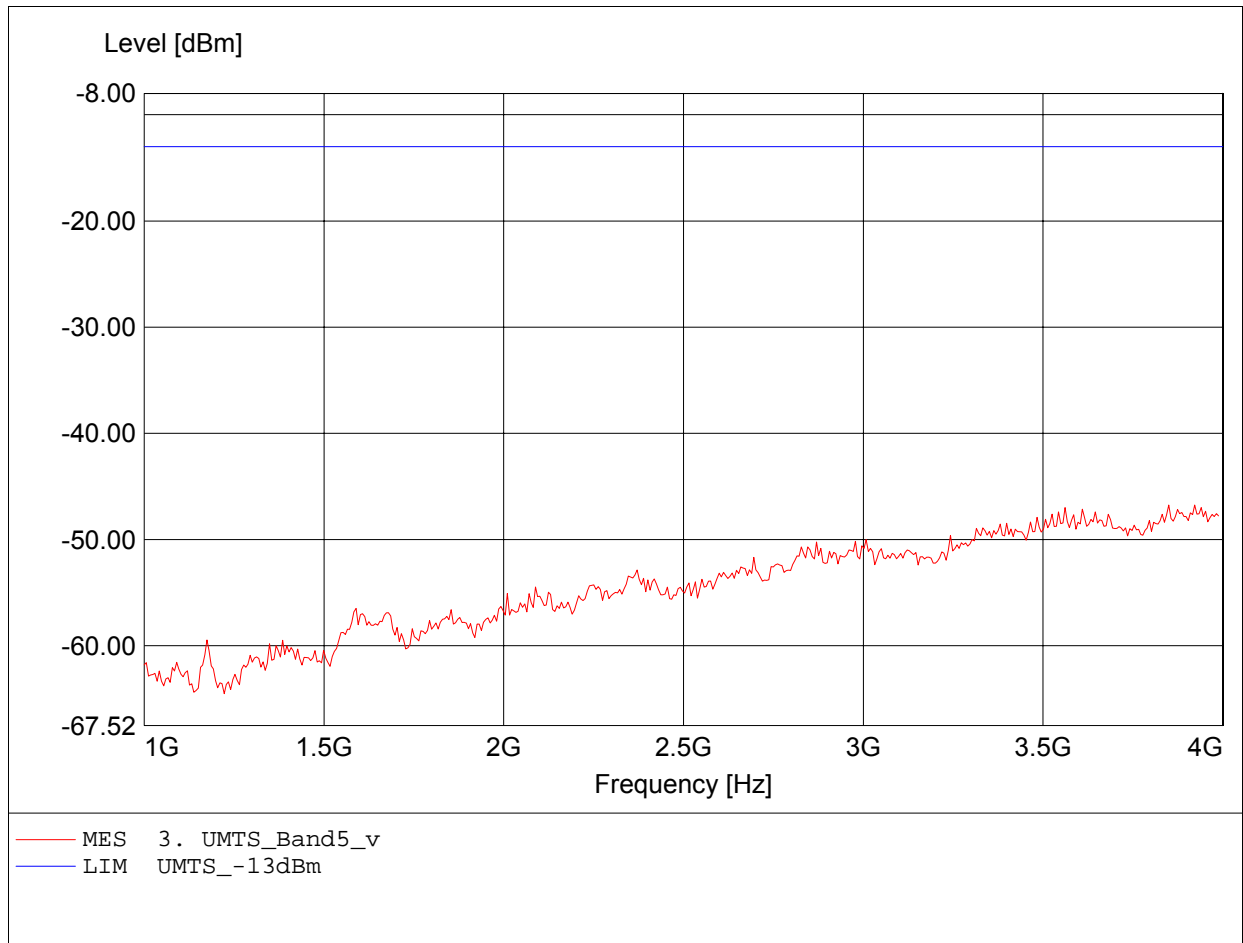


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.970GHz, Pmax: -45.59dBm, RBW: 1MHz

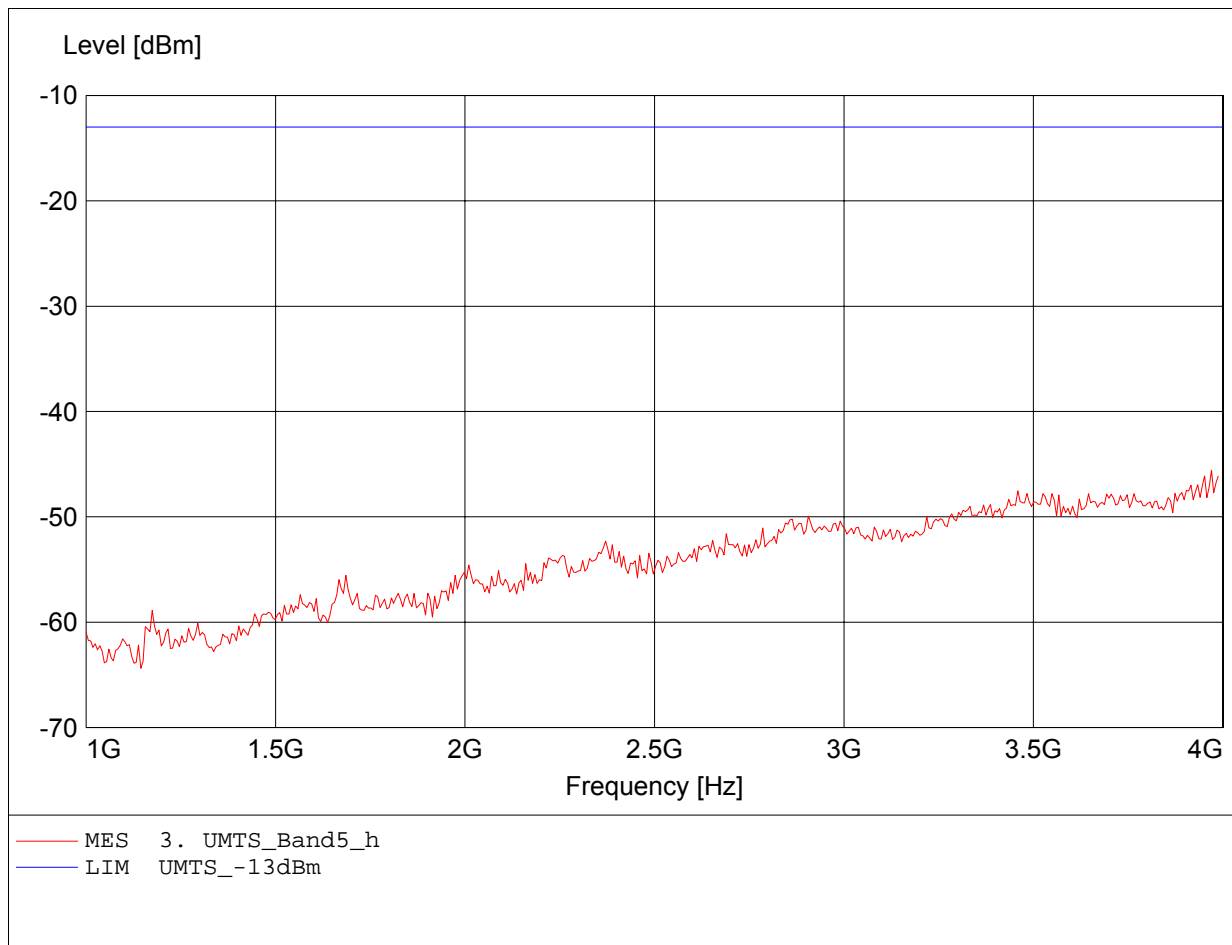


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.543GHz, Pmax: -43.03dBm, RBW: 1MHz

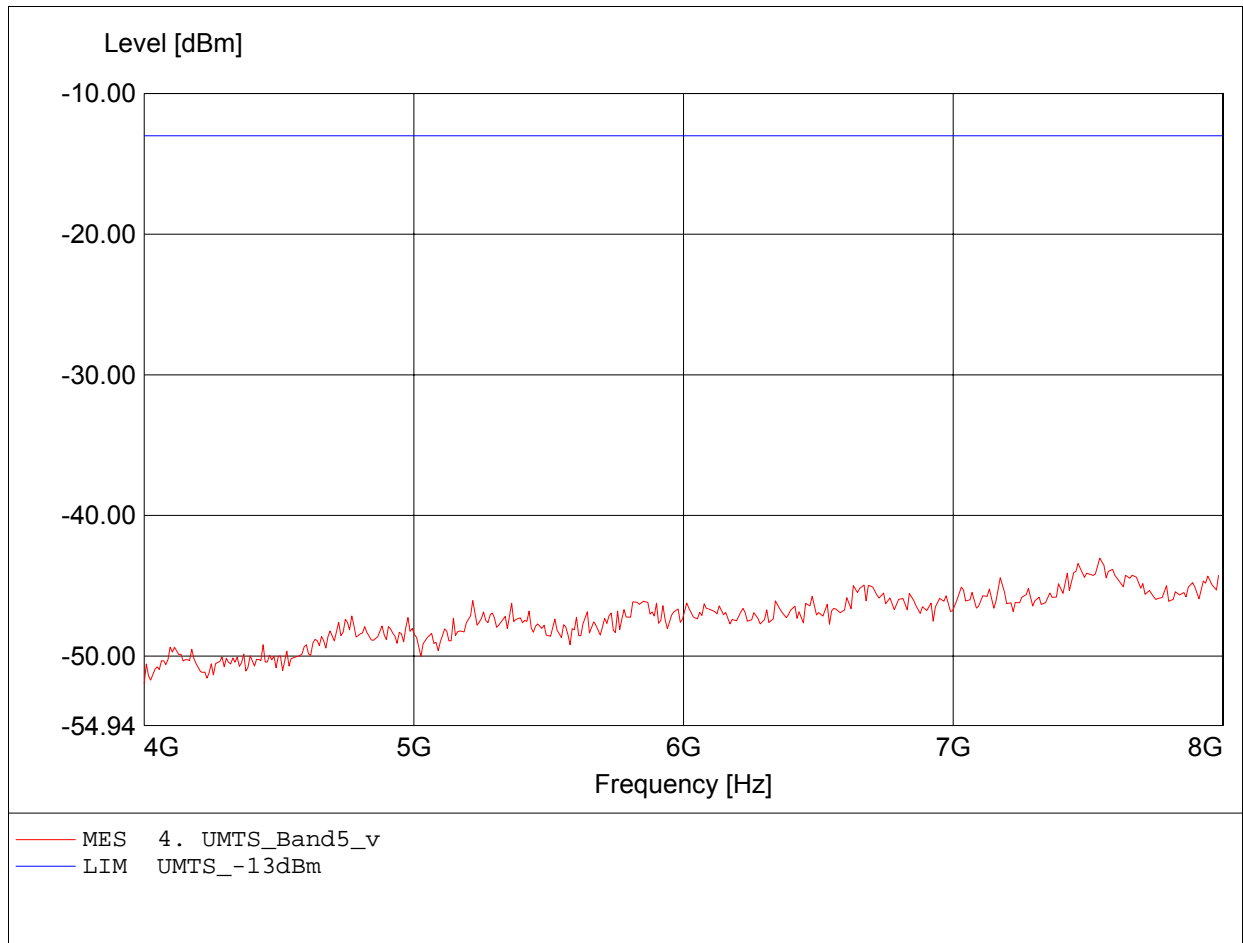


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.535GHz, Pmax: -43.40dBm, RBW: 1MHz

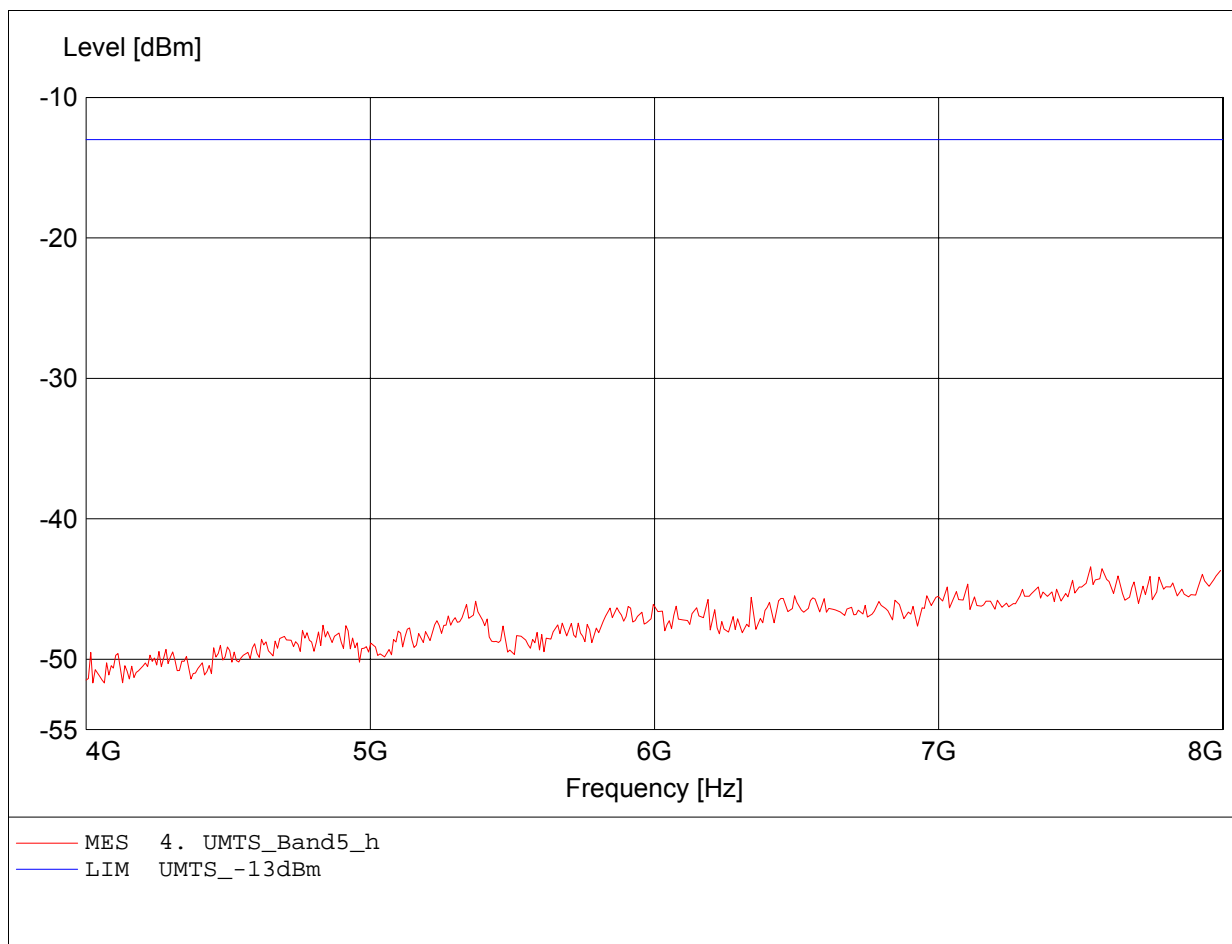


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.431GHz, Pmax: -38.71dBm, RBW: 1MHz

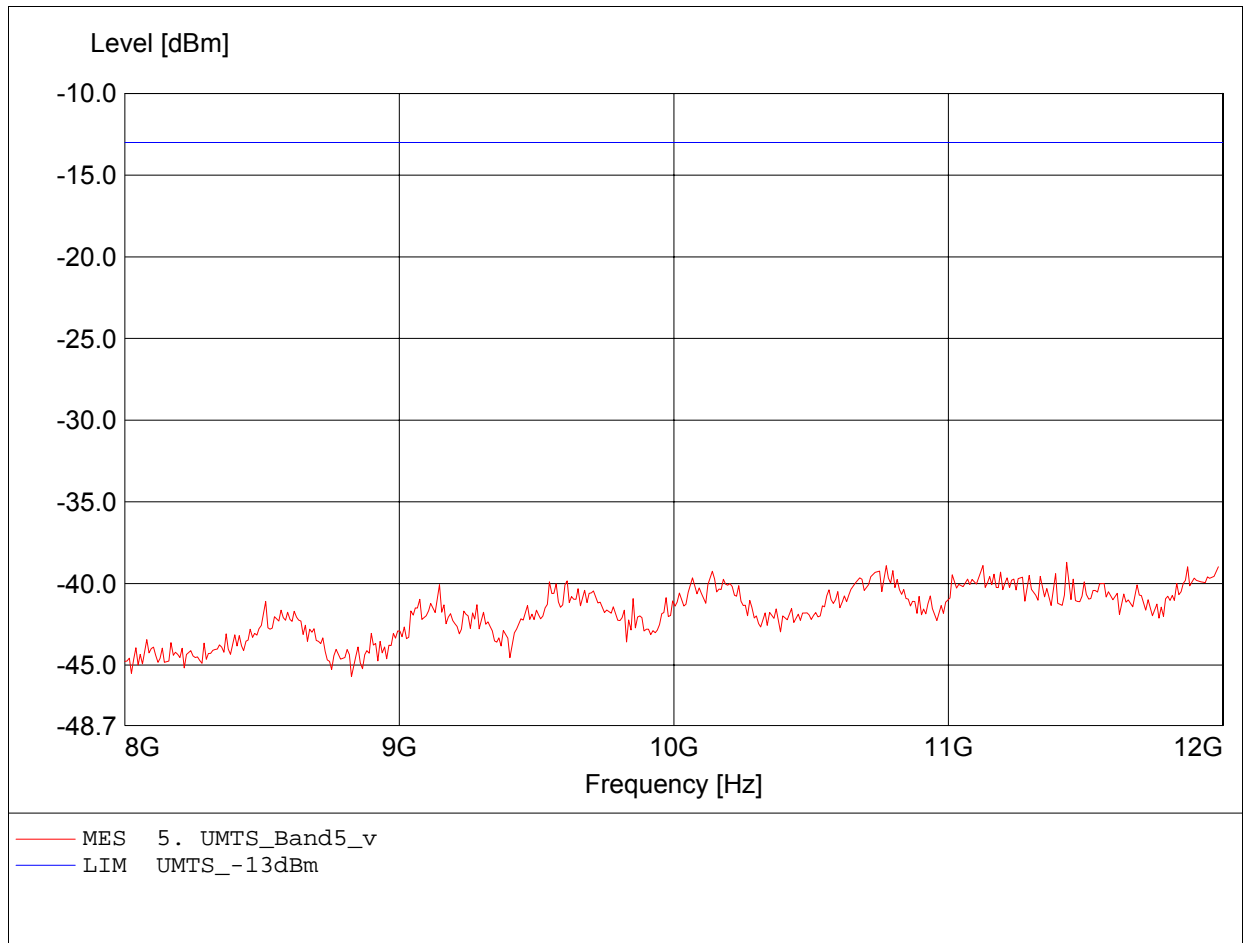


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.693GHz, Pmax: -37.39dBm, RBW: 1MHz

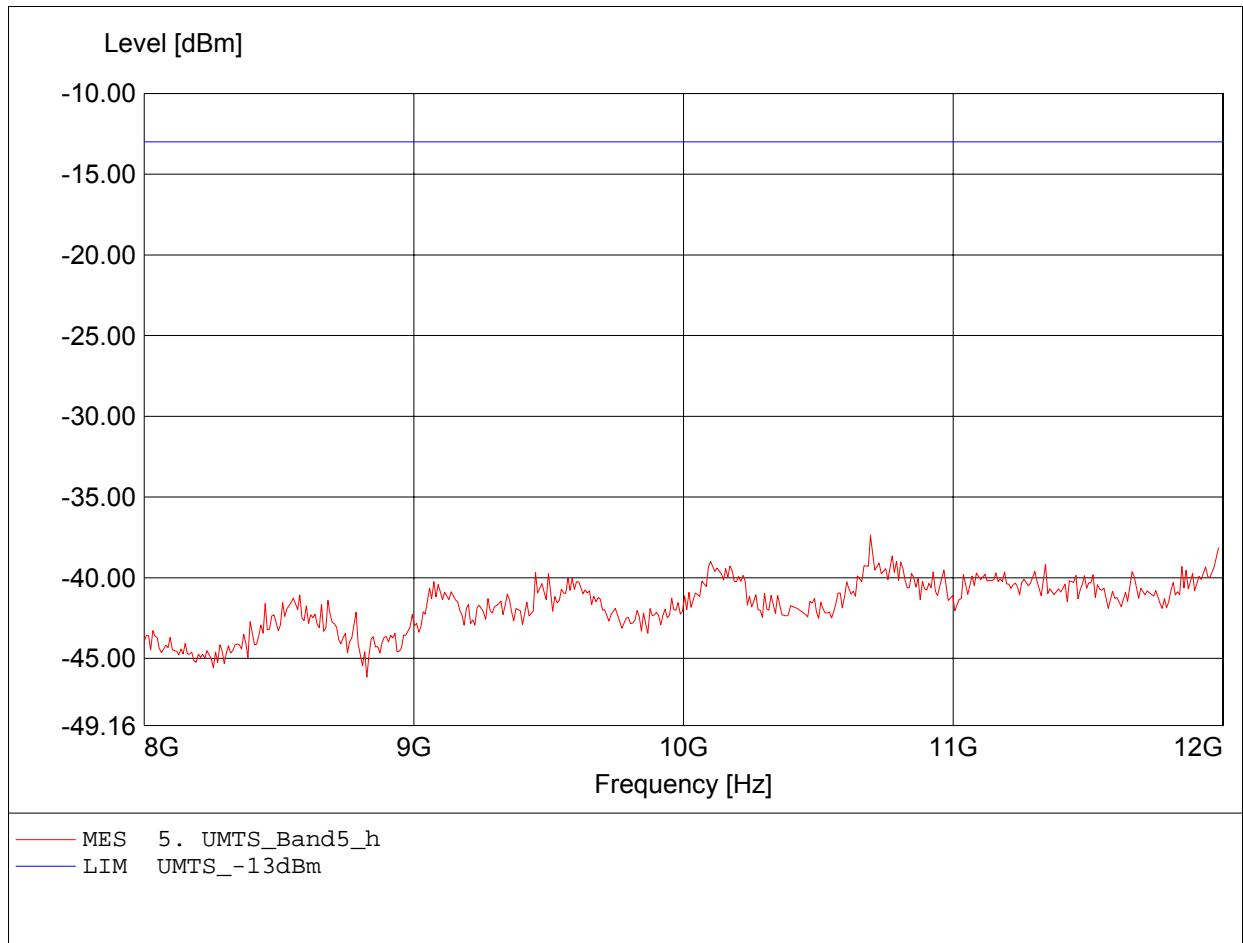


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 188.076MHz, Pmax: -66.91dBm, RBW: 100kHz

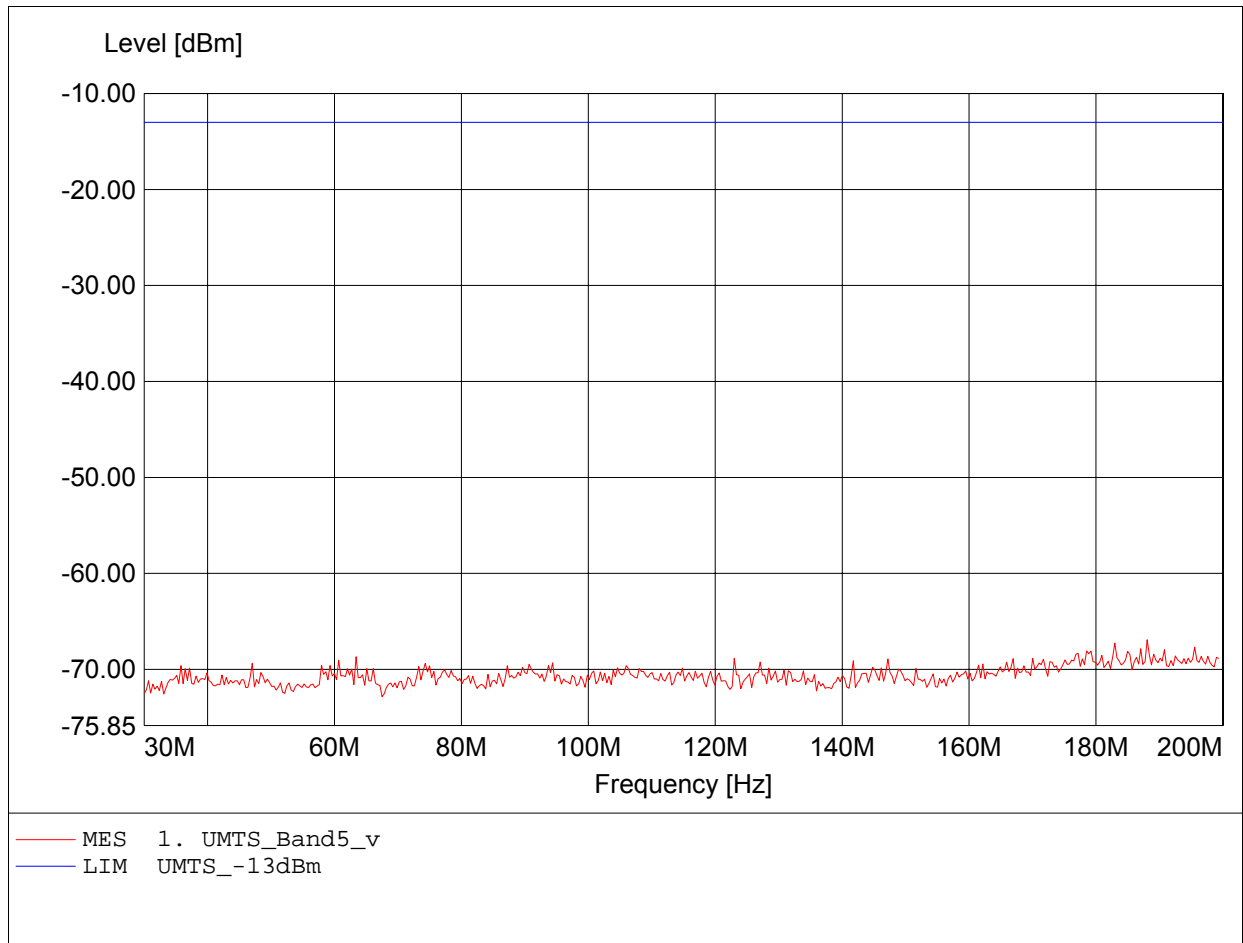


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 63.387MHz, Pmax: -68.34dBm, RBW: 100kHz

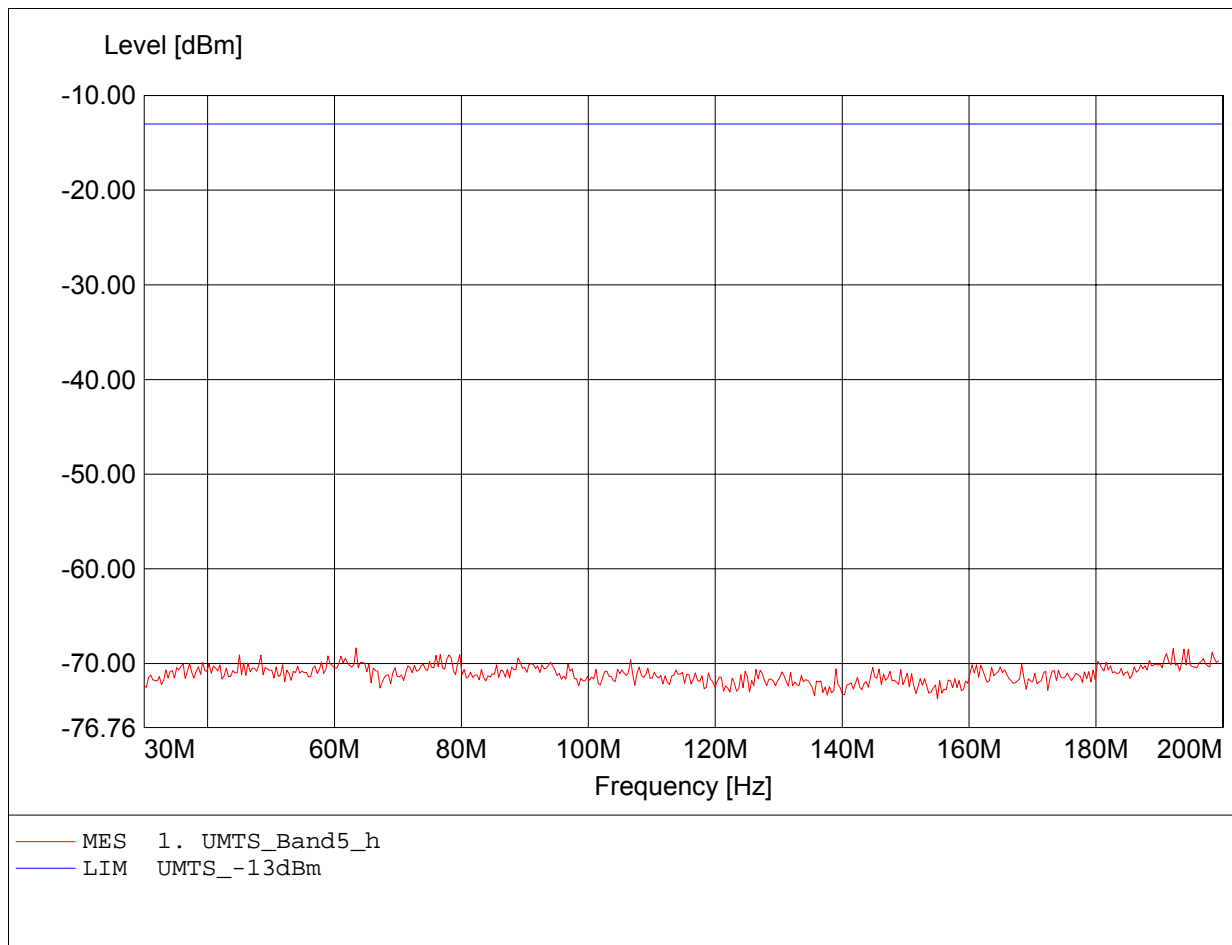


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 992.046MHz, Pmax: -35.89dBm, RBW: 100kHz

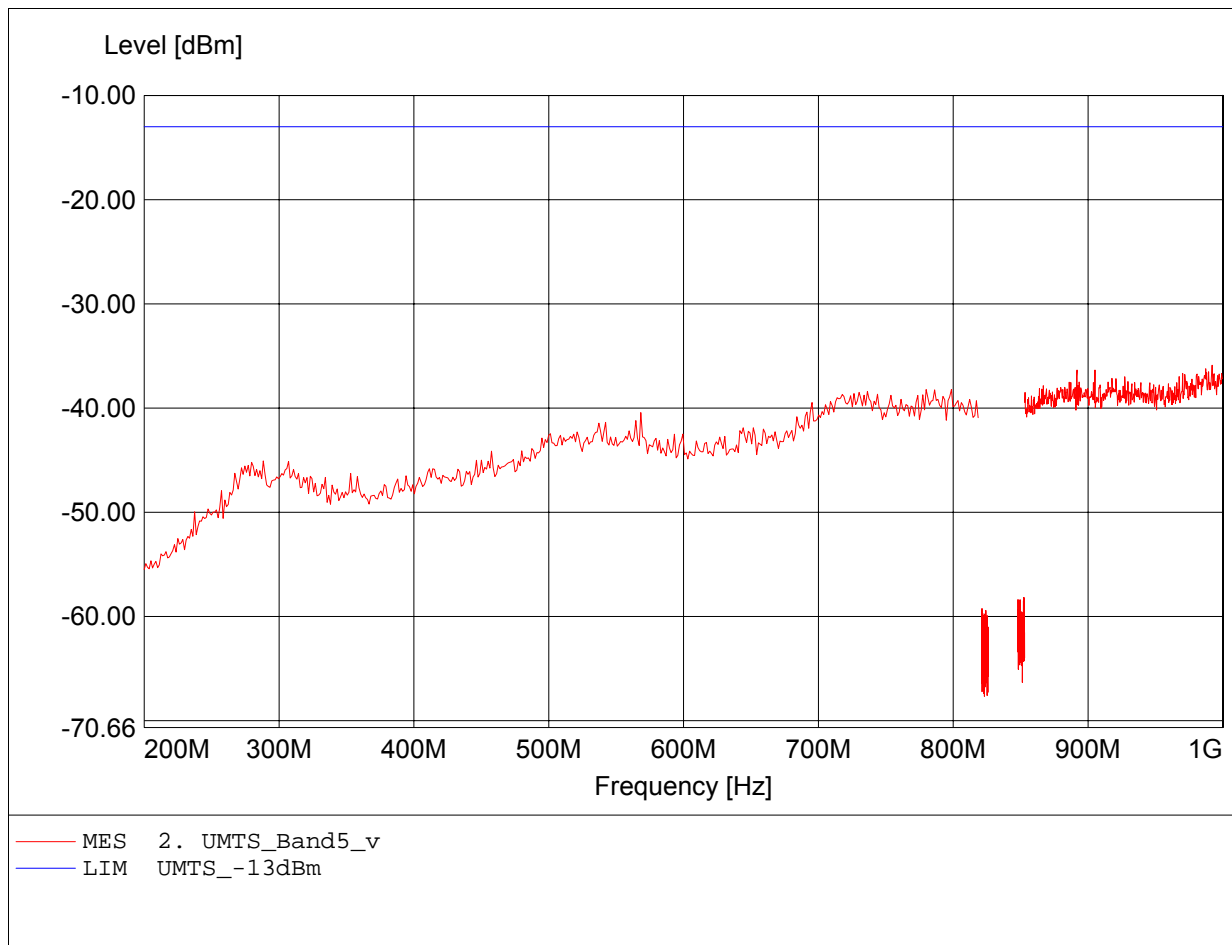


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 862.721MHz, Pmax: -34.35dBm, RBW: 100kHz

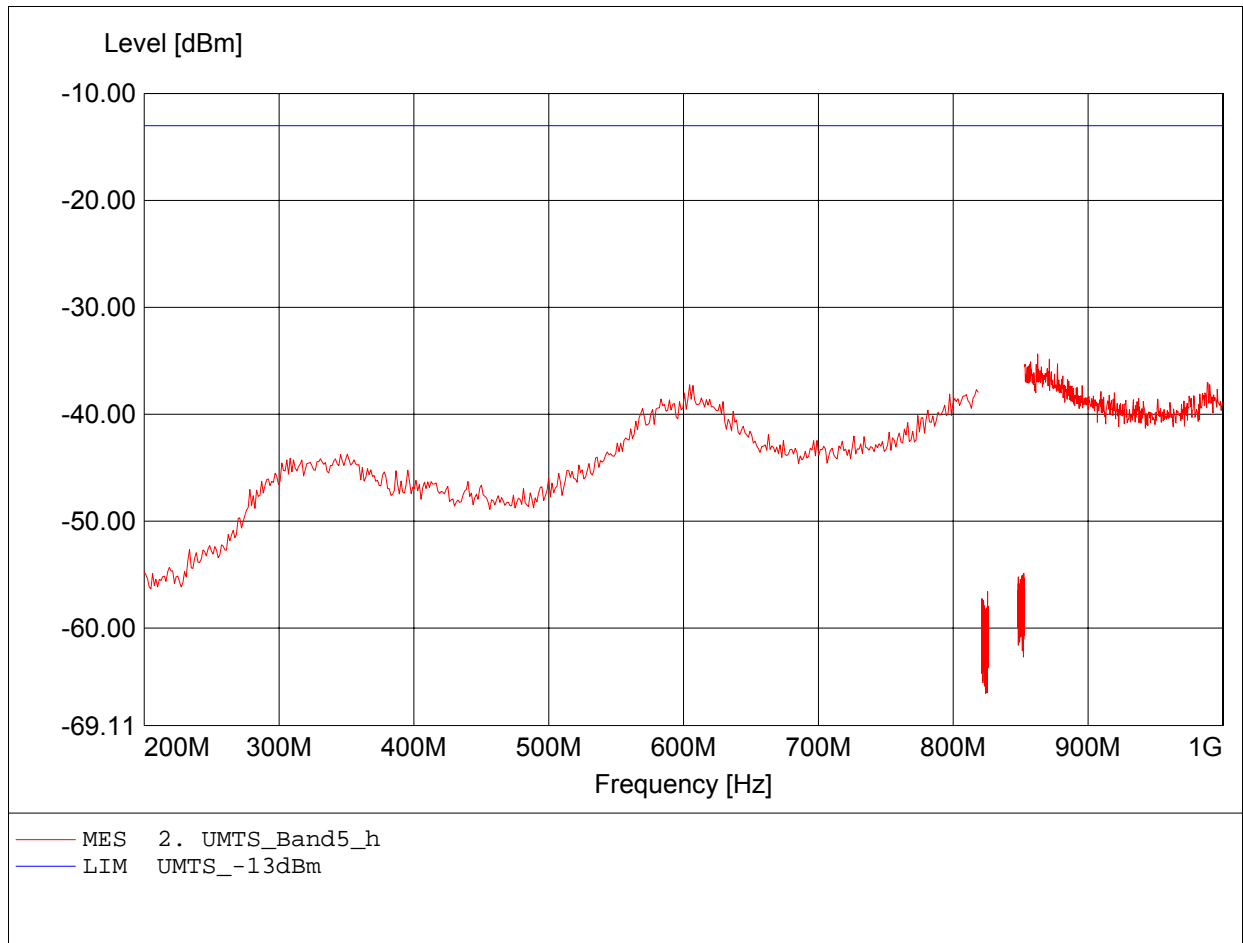


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.910GHz, Pmax: -46.72dBm, RBW: 1MHz

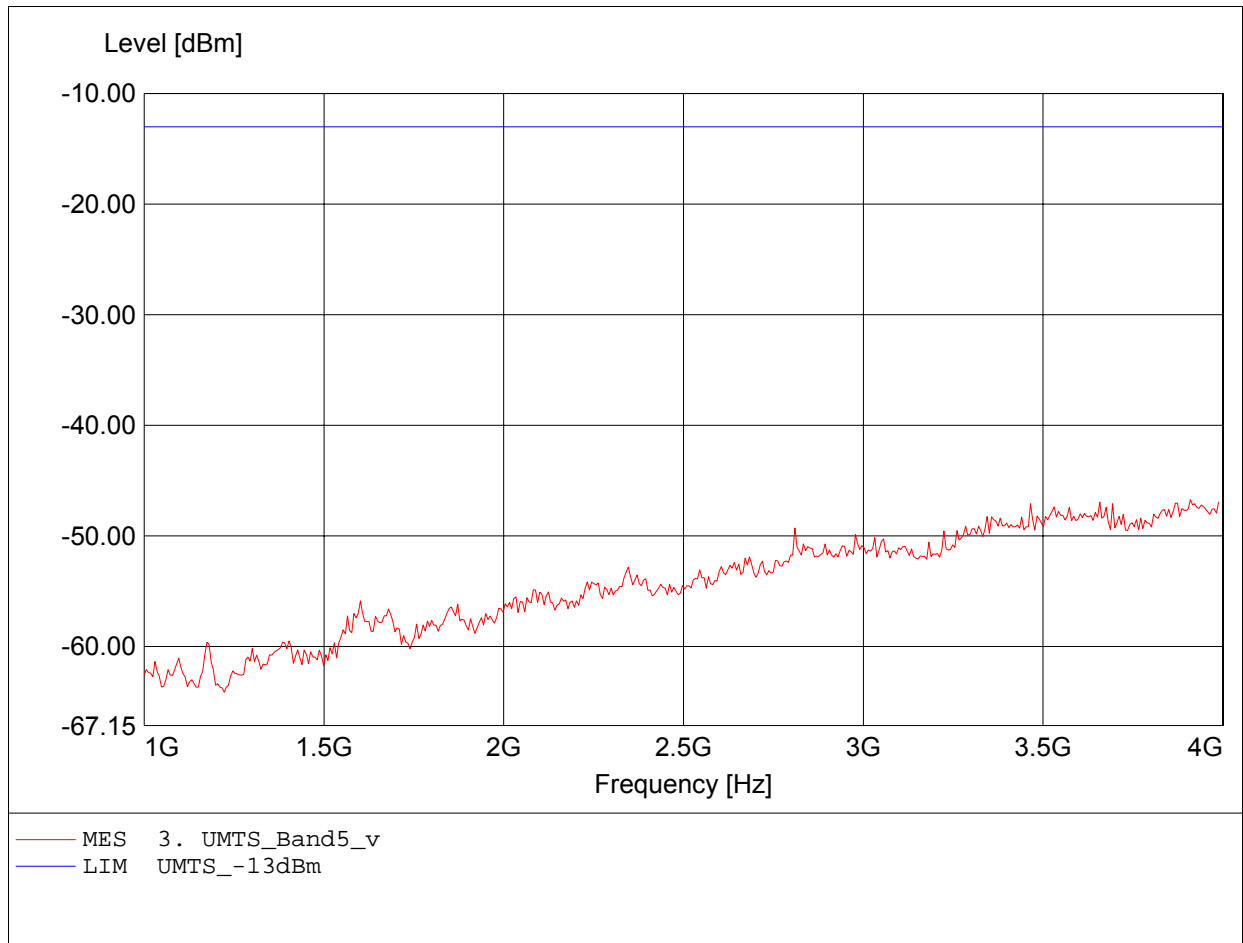


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.964GHz, Pmax: -46.63dBm, RBW: 1MHz

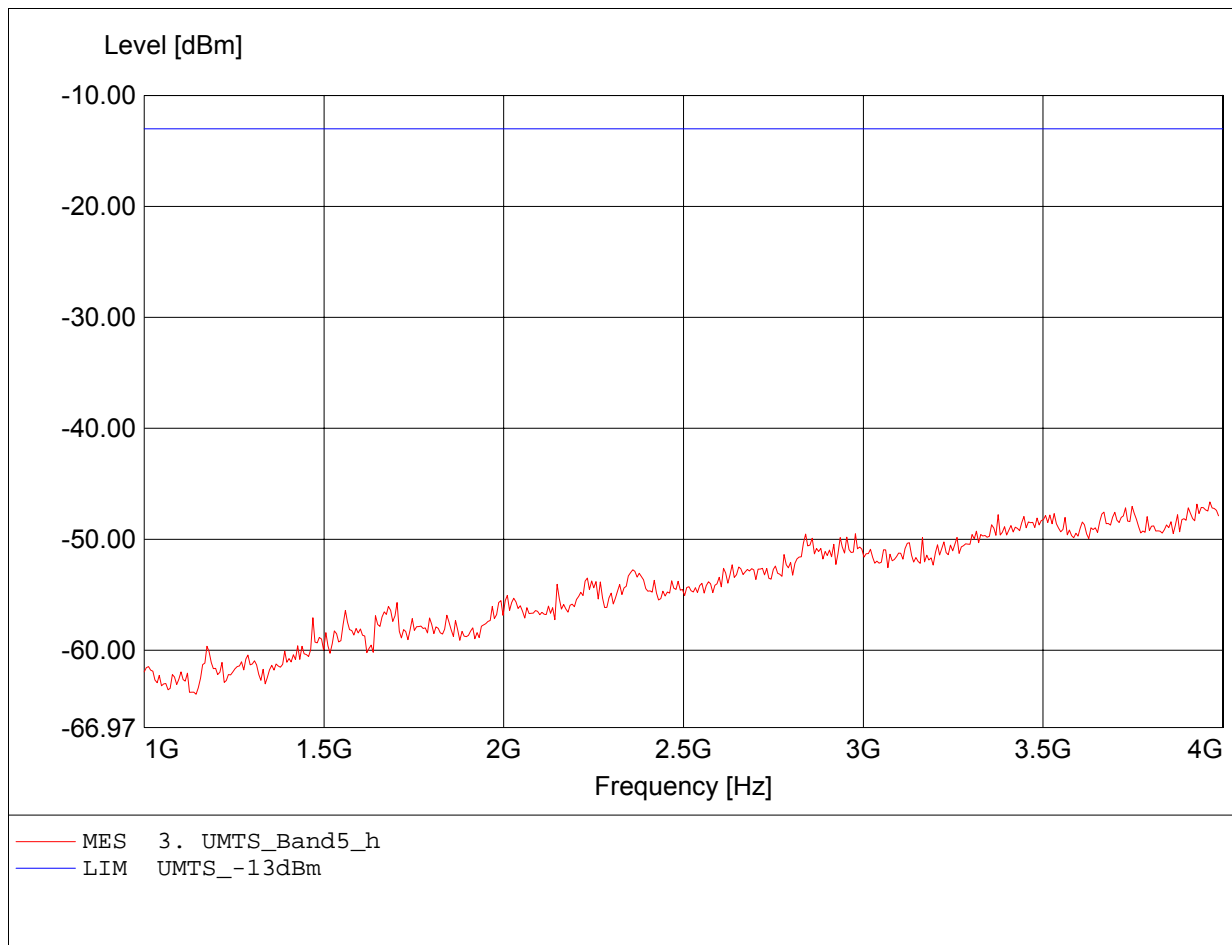


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -43.50dBm, RBW: 1MHz

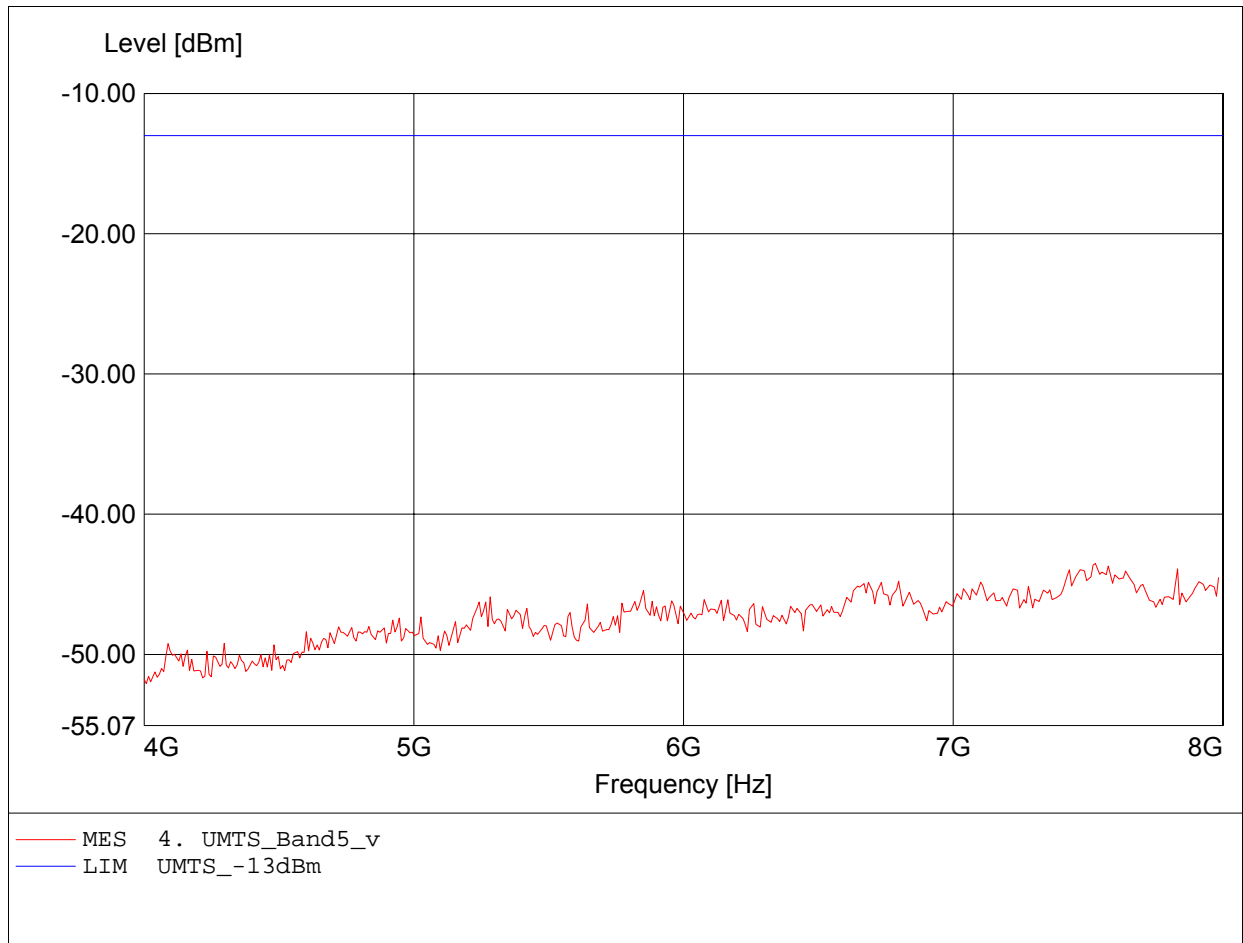


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.535GHz, Pmax: -42.91dBm, RBW: 1MHz

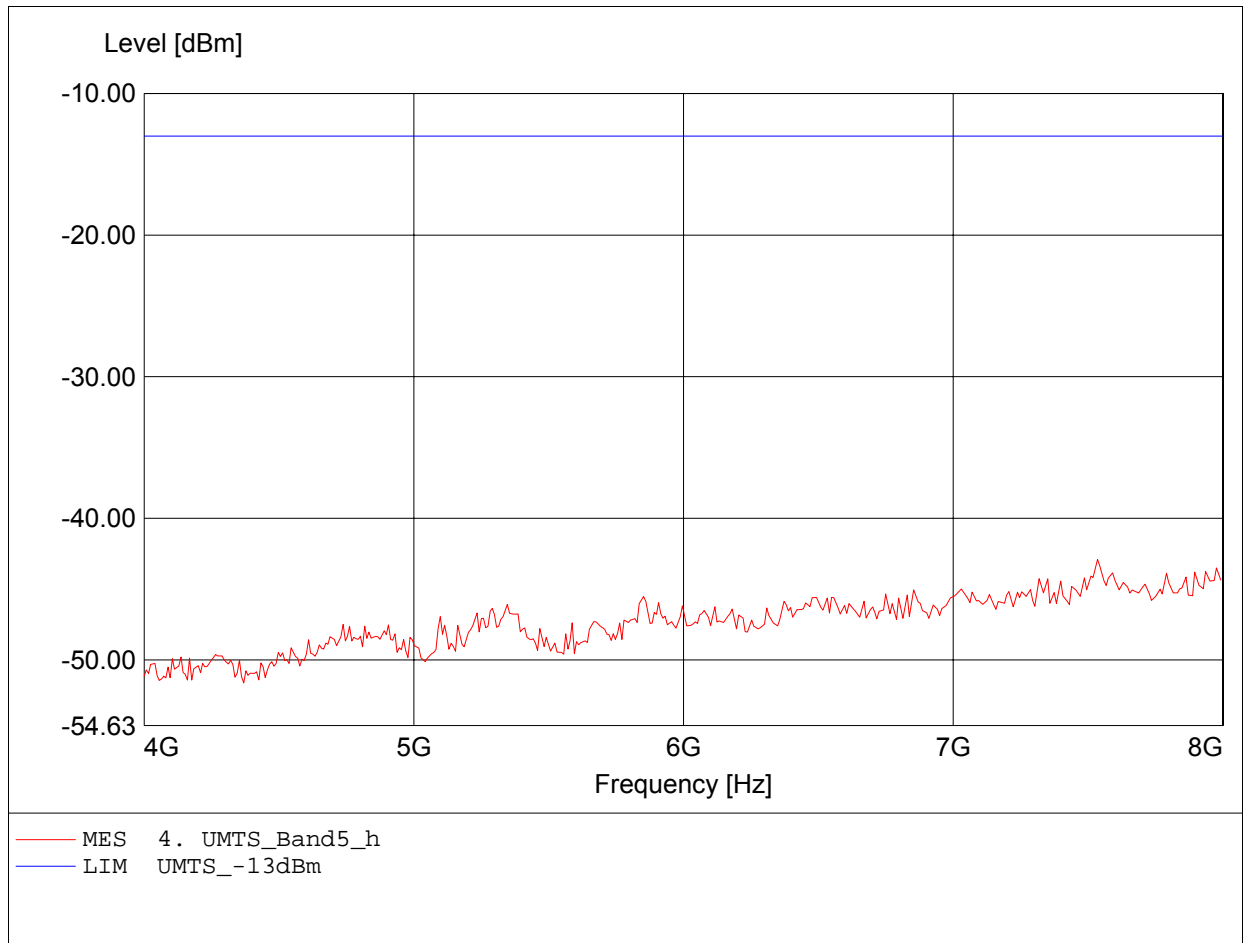


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.766GHz, Pmax: -38.94dBm, RBW: 1MHz

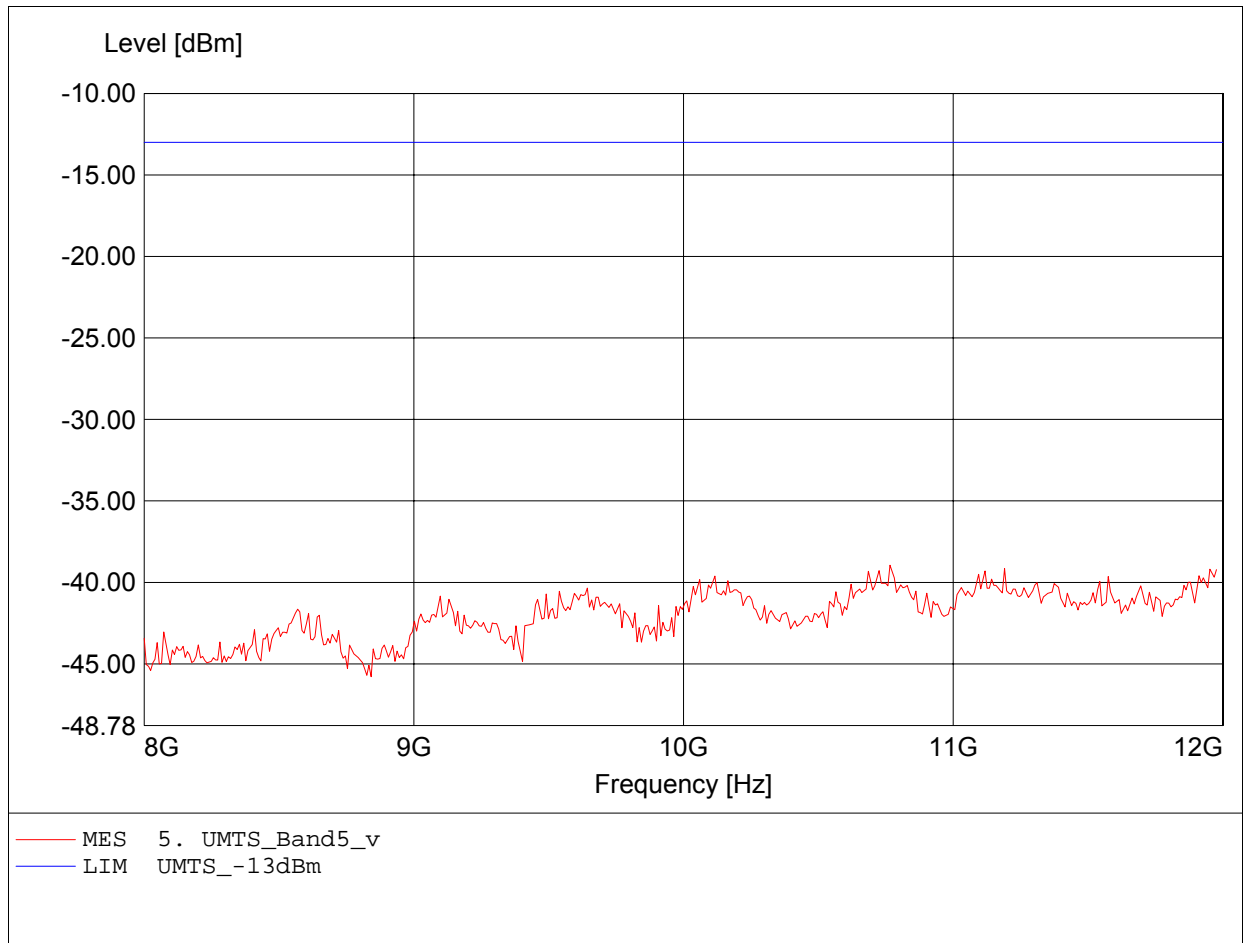


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.677GHz, Pmax: -38.15dBm, RBW: 1MHz

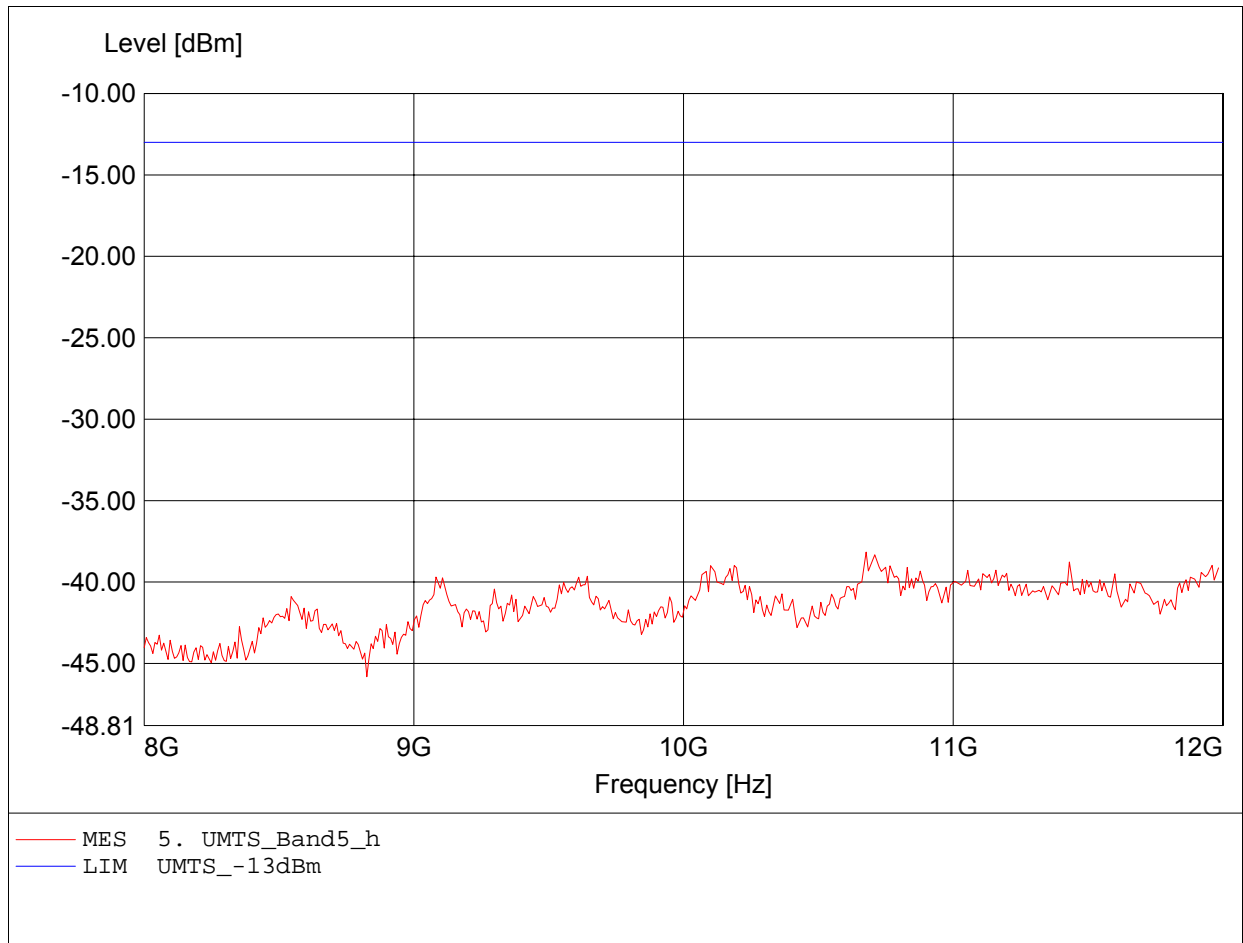


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 178.196MHz, Pmax: -67.59dBm, RBW: 100kHz

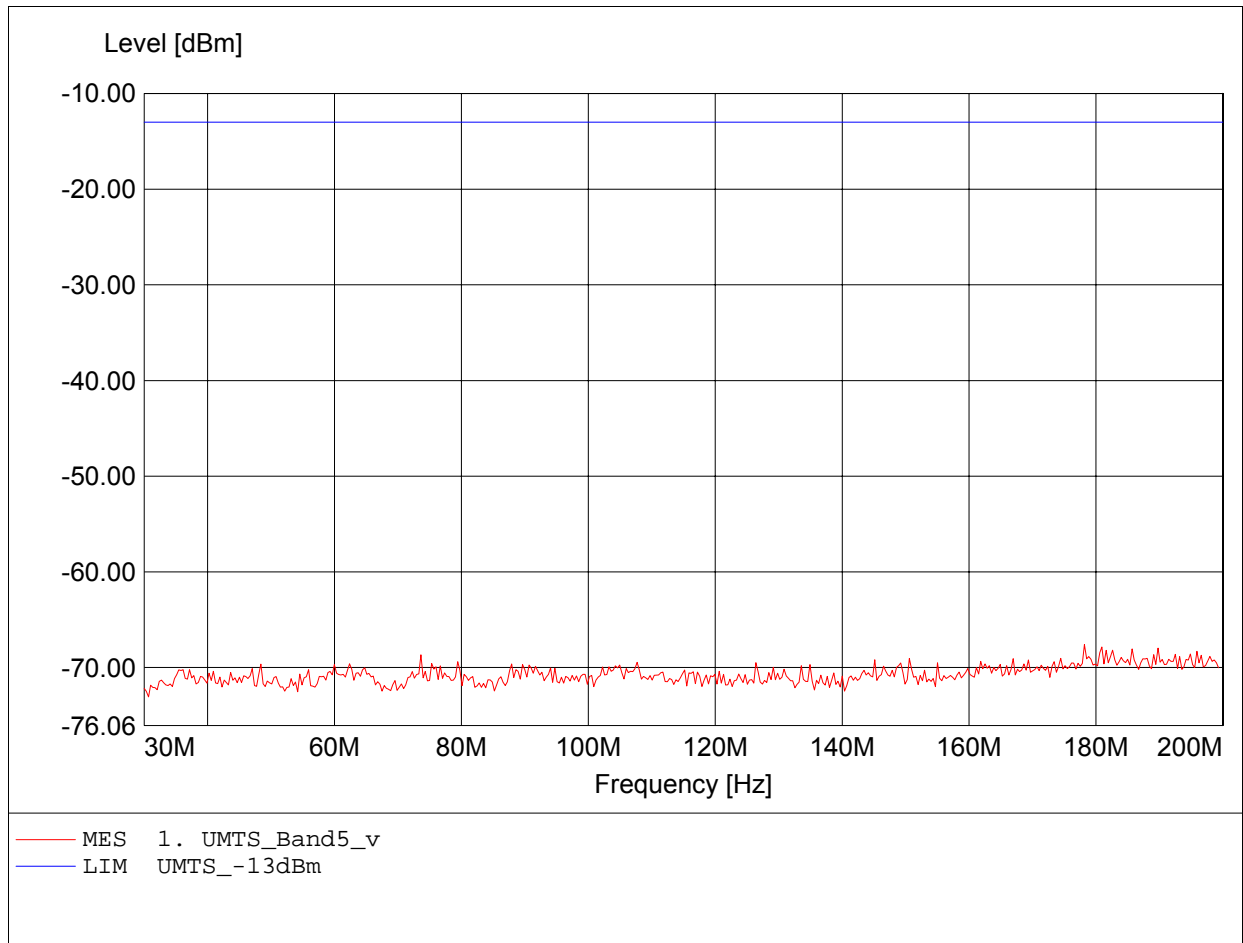


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 193.186MHz, Pmax: -67.45dBm, RBW: 100kHz

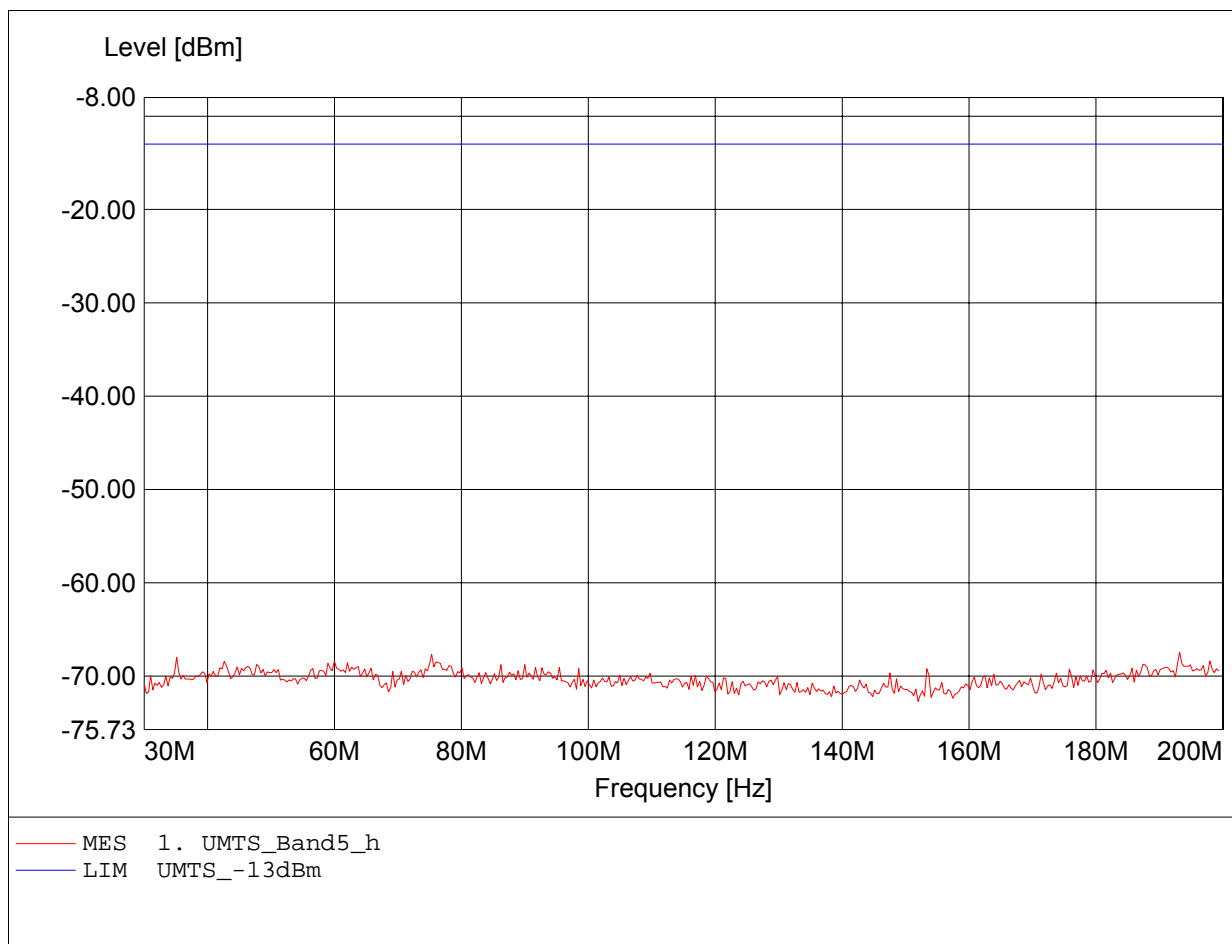


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.070MHz, Pmax: -27.98dBm, RBW: 100kHz

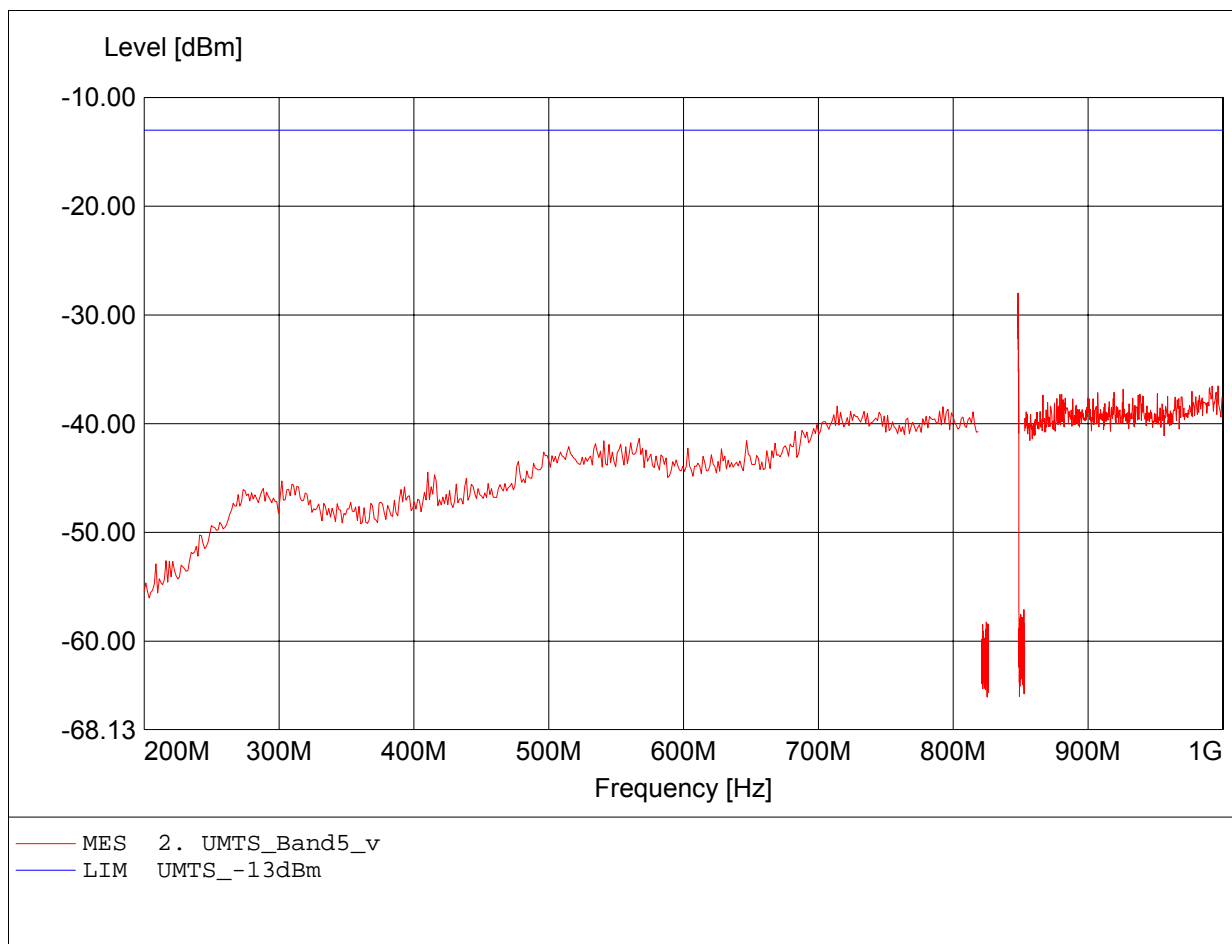


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 862.132MHz, Pmax: -35.22dBm, RBW: 100kHz

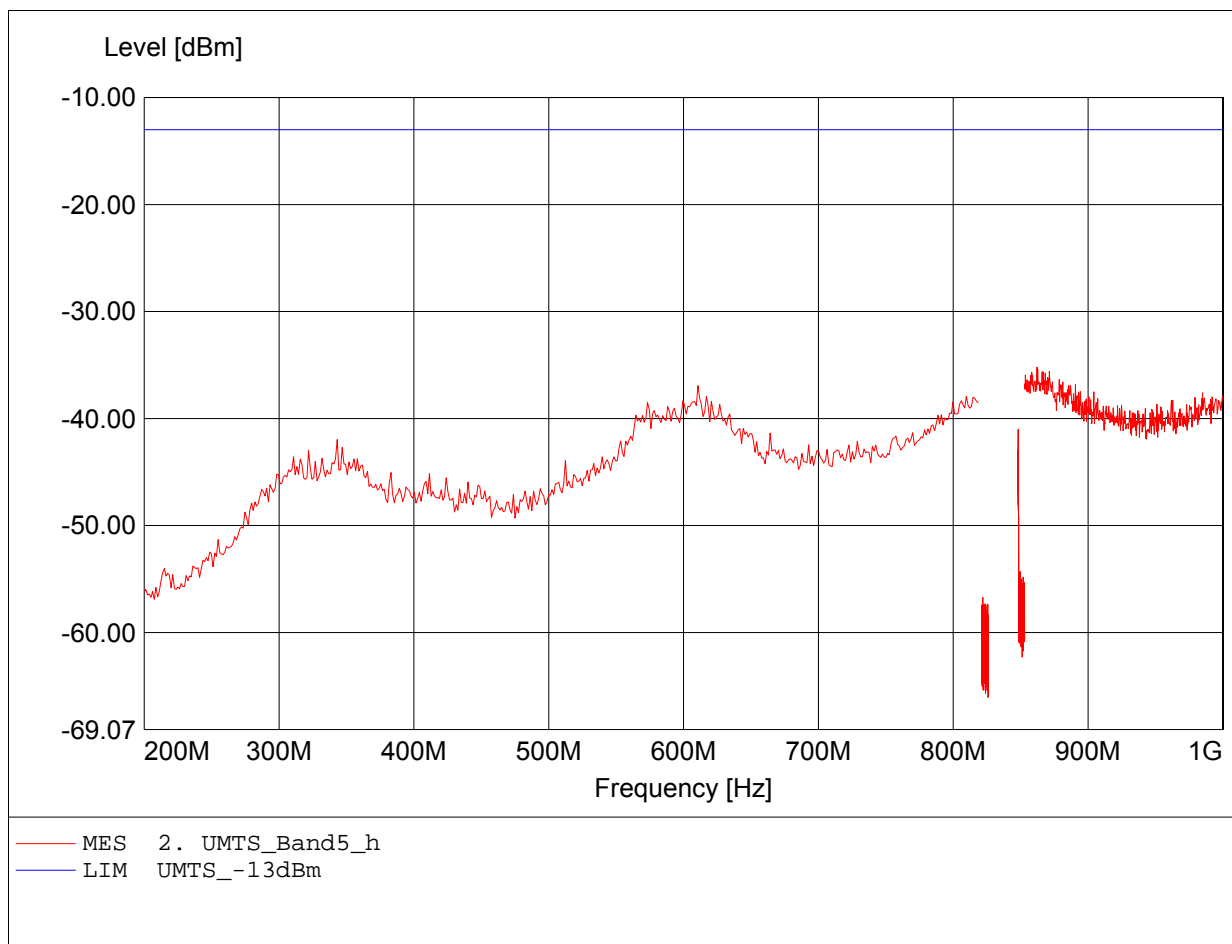


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.928GHz, Pmax: -46.37dBm, RBW: 1MHz

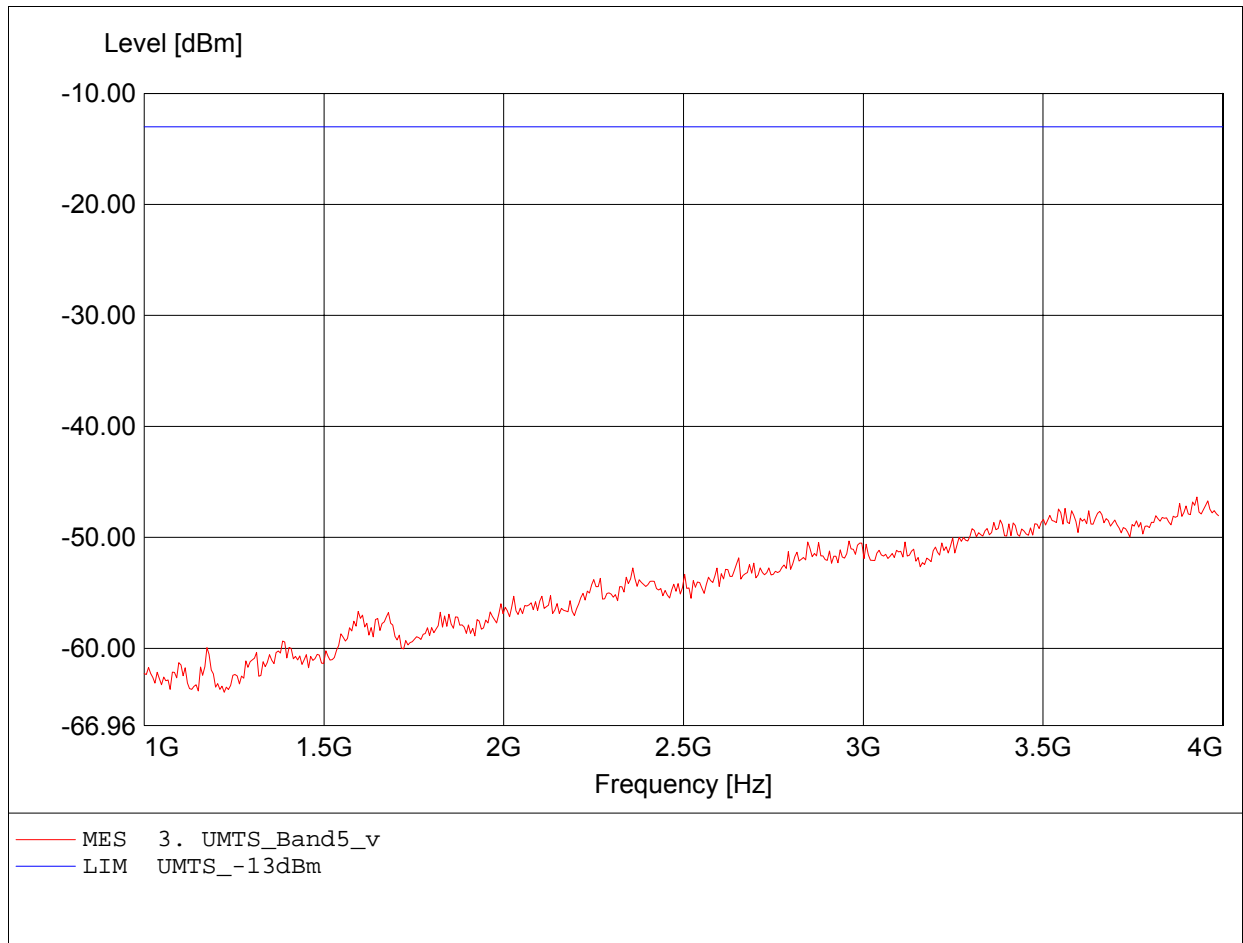


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.952GHz, Pmax: -46.68dBm, RBW: 1MHz

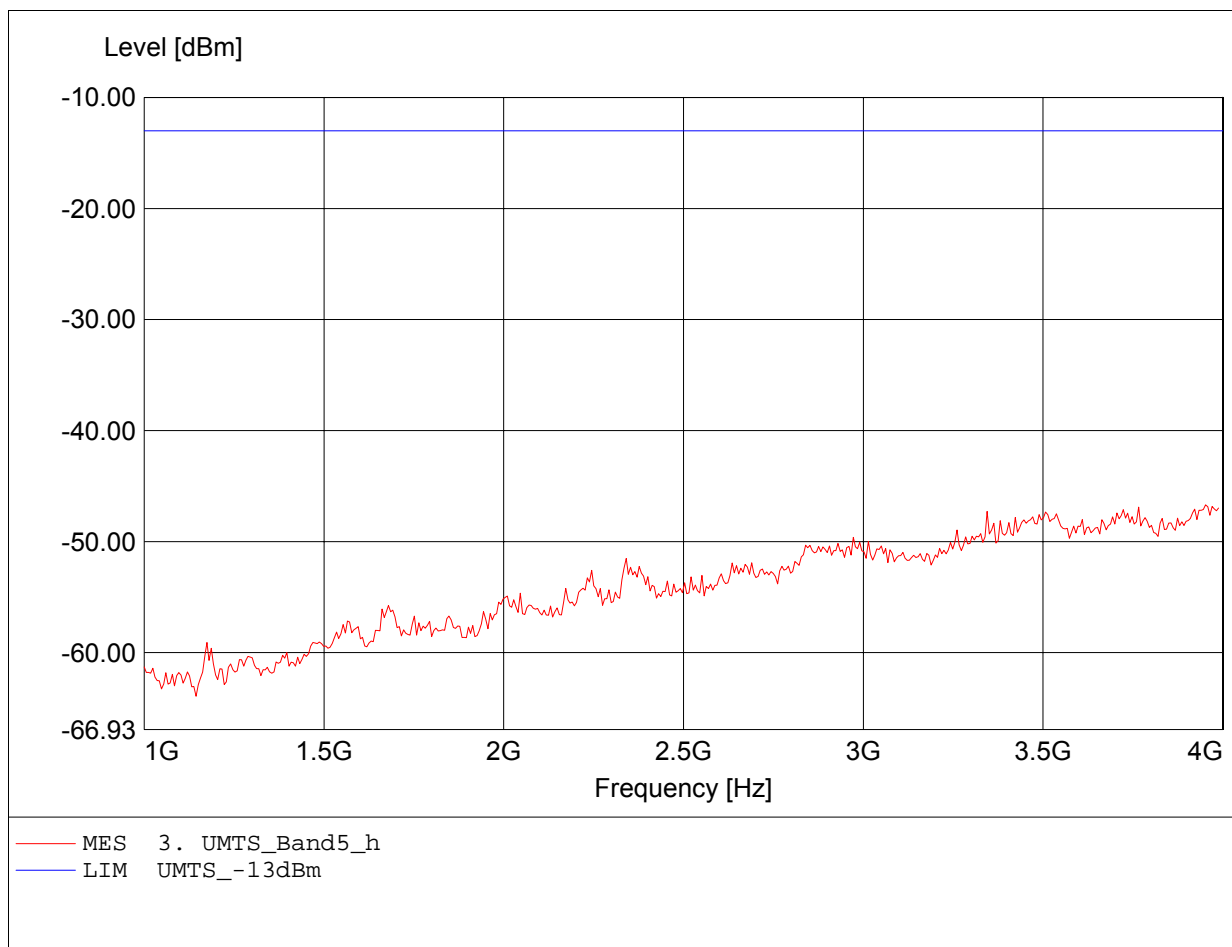


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.551GHz, Pmax: -43.42dBm, RBW: 1MHz

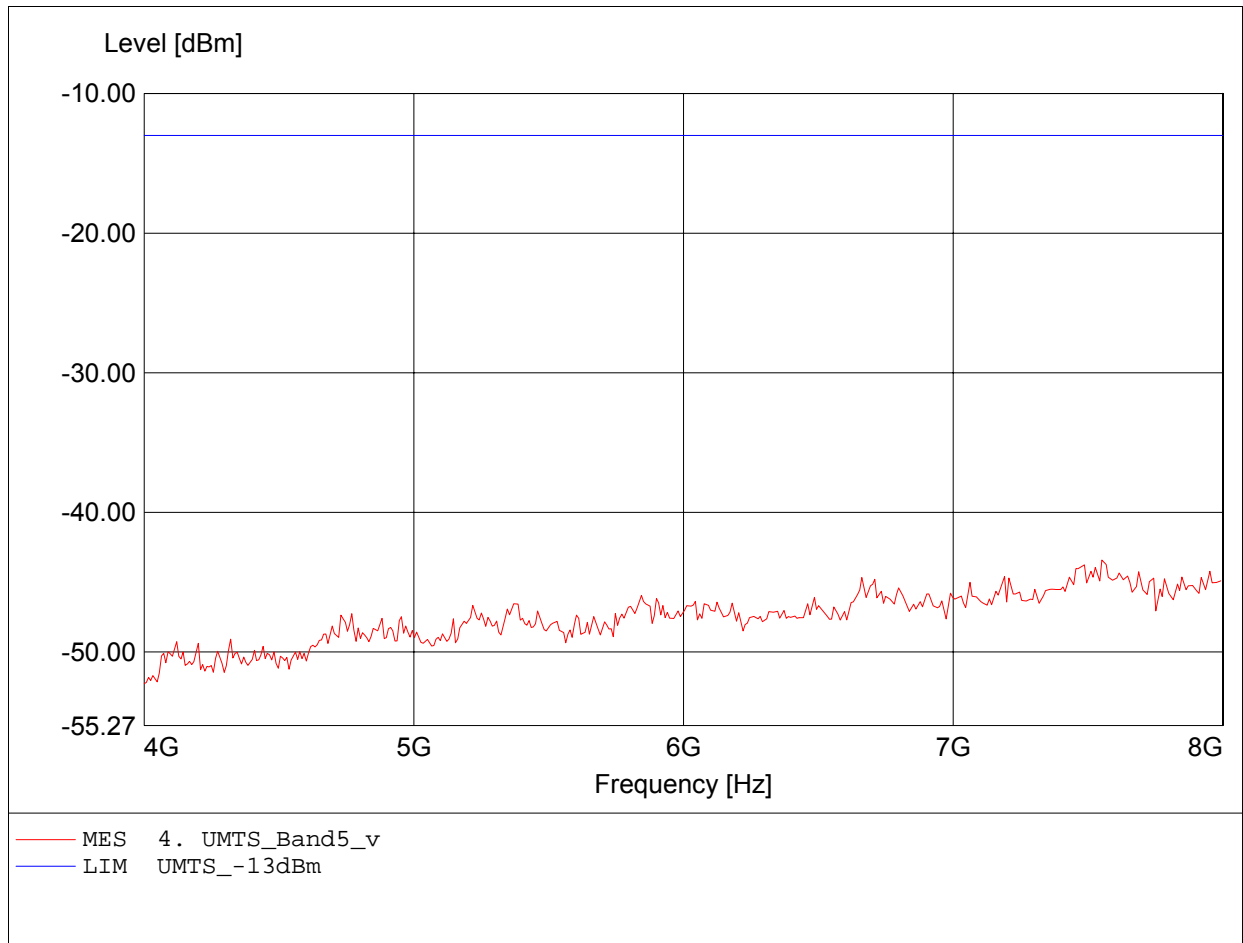


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.968GHz, Pmax: -43.35dBm, RBW: 1MHz

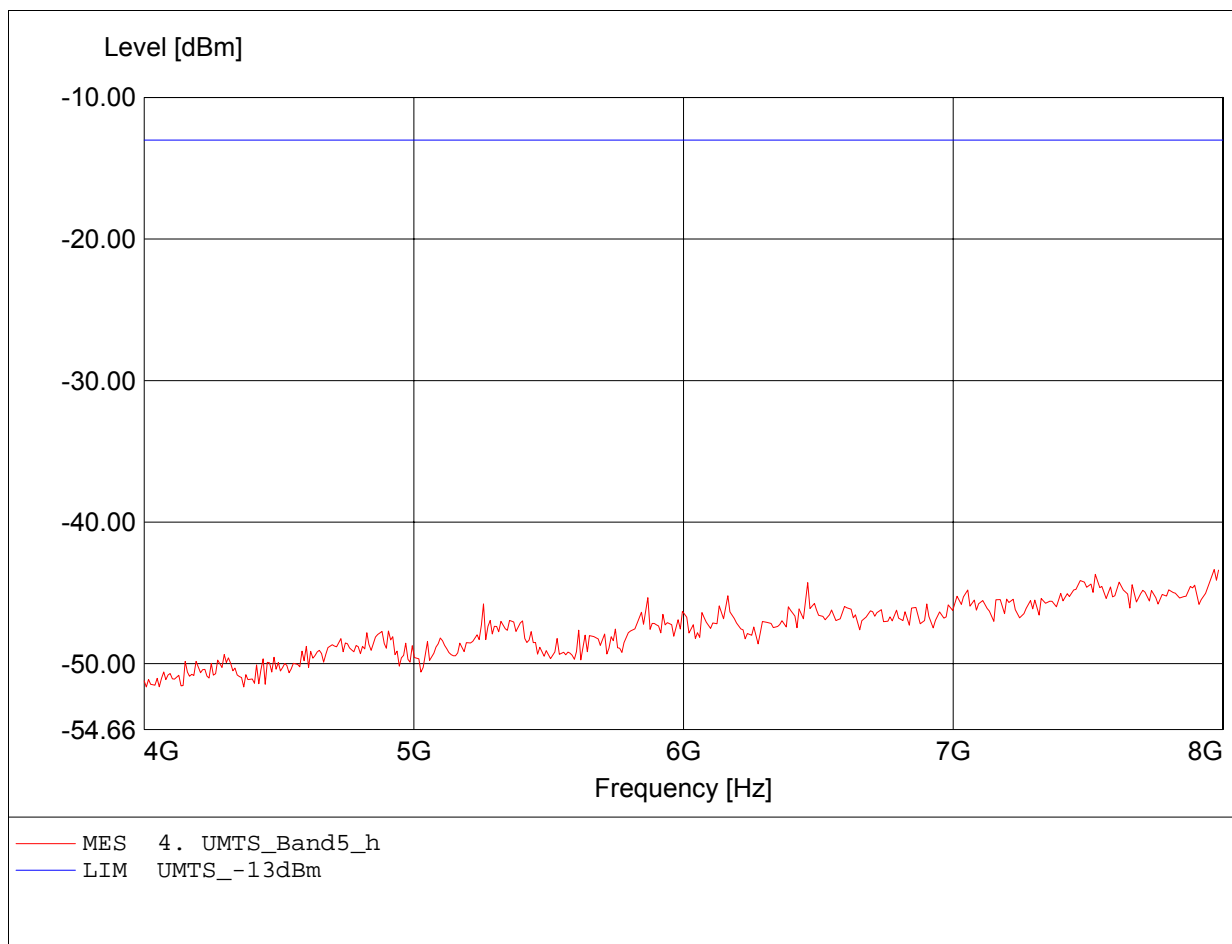


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.960GHz, Pmax: -38.43dBm, RBW: 1MHz

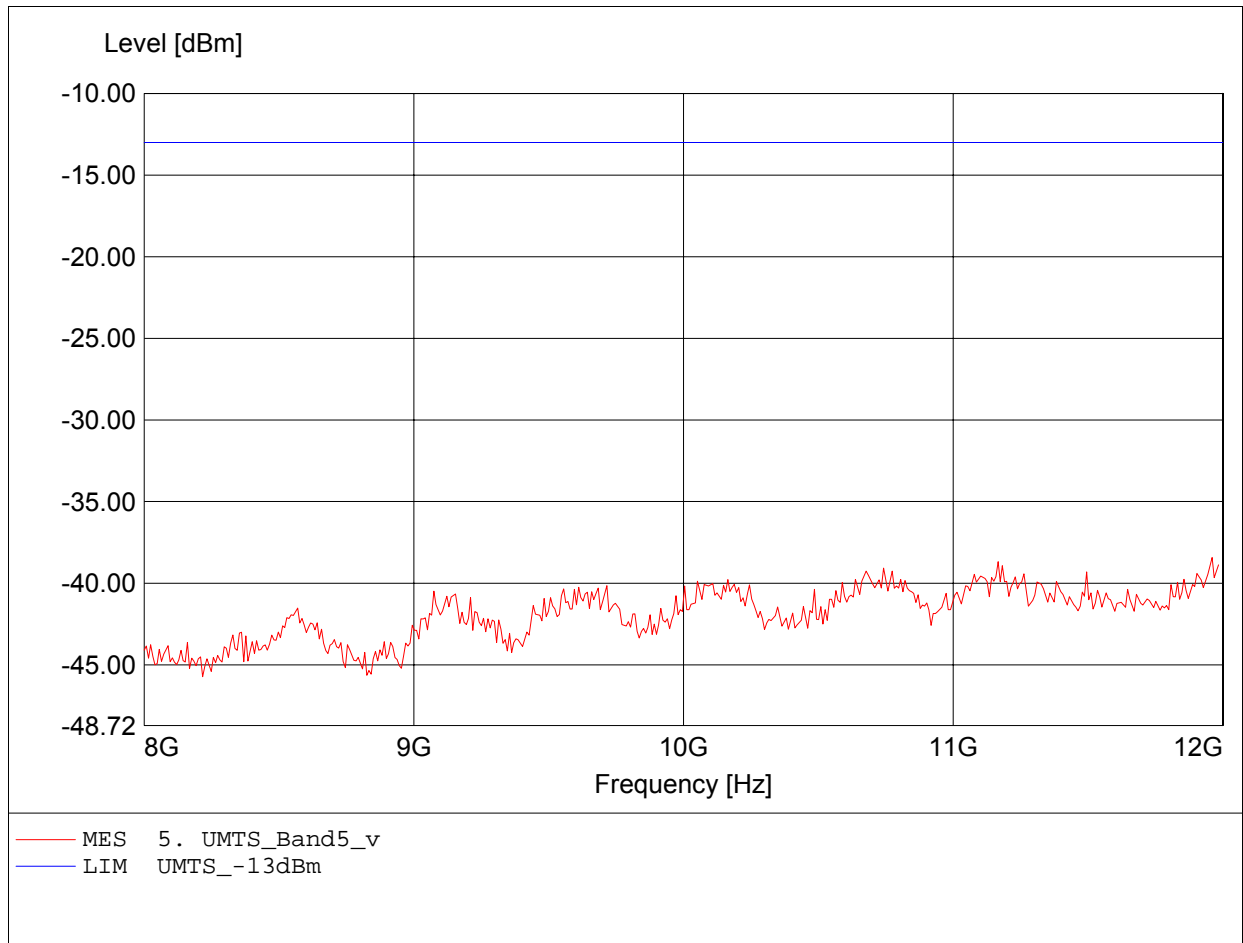


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.701GHz, Pmax: -36.67dBm, RBW: 1MHz

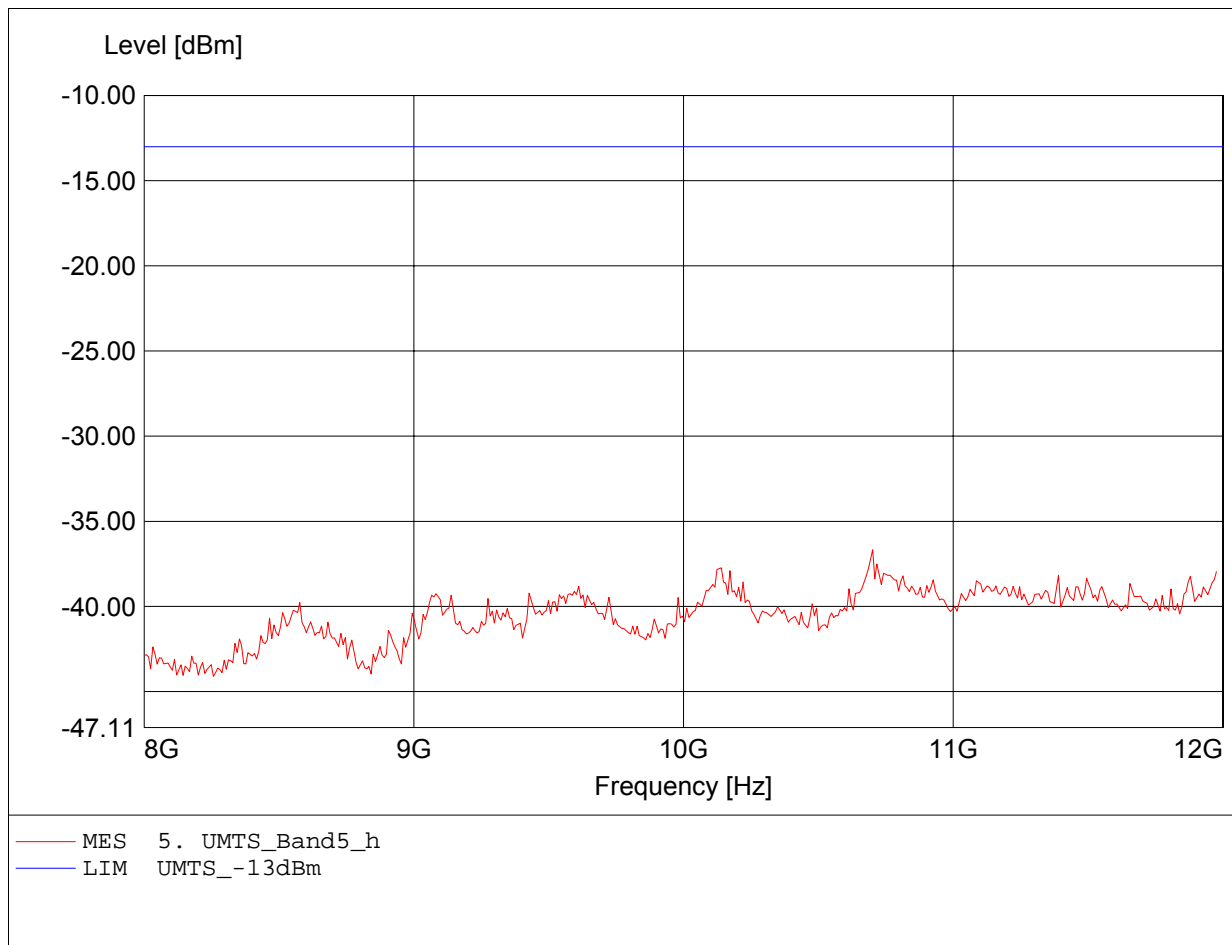


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 195.571MHz, Pmax: -67.69dBm, RBW: 100kHz

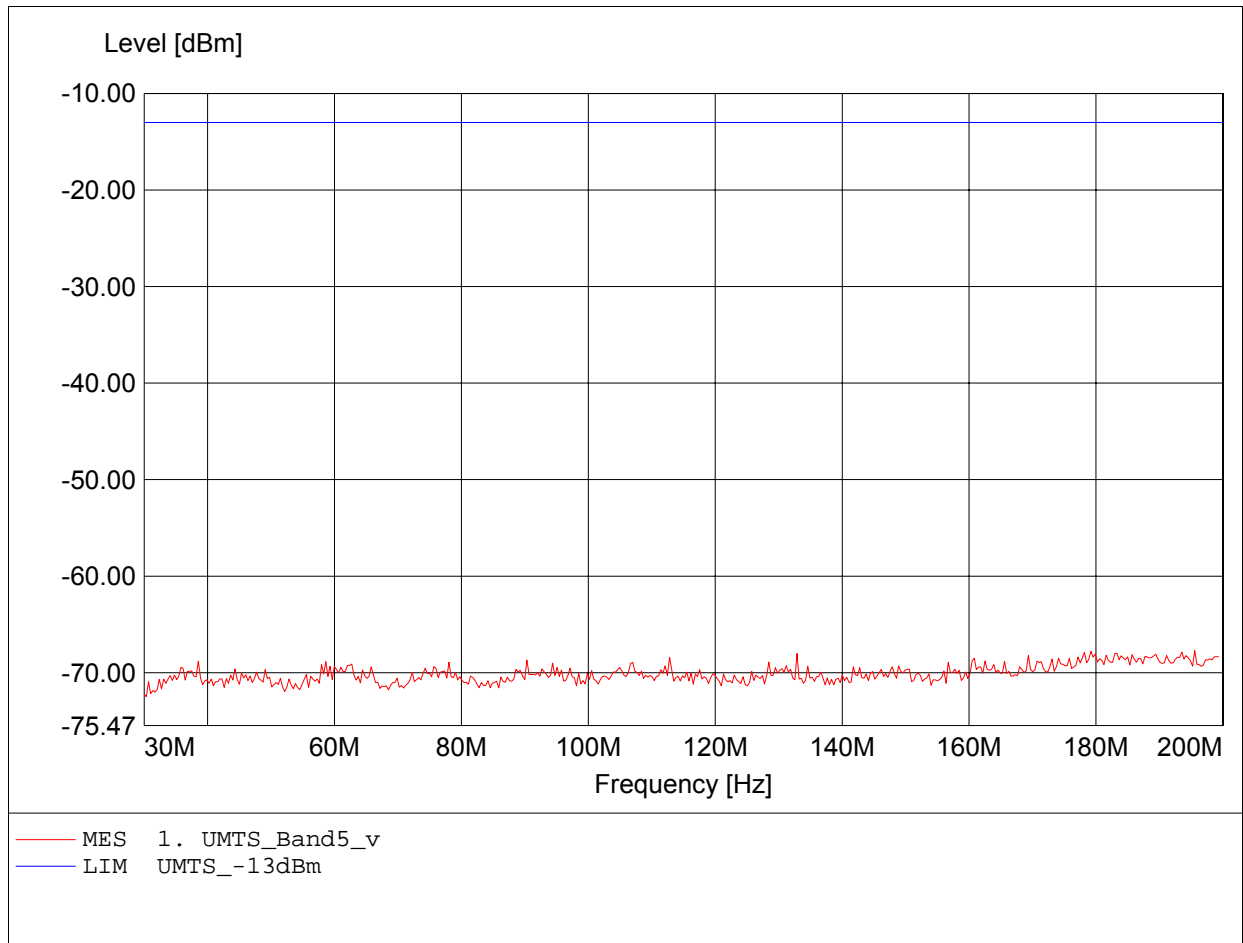


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 94.729MHz, Pmax: -67.77dBm, RBW: 100kHz

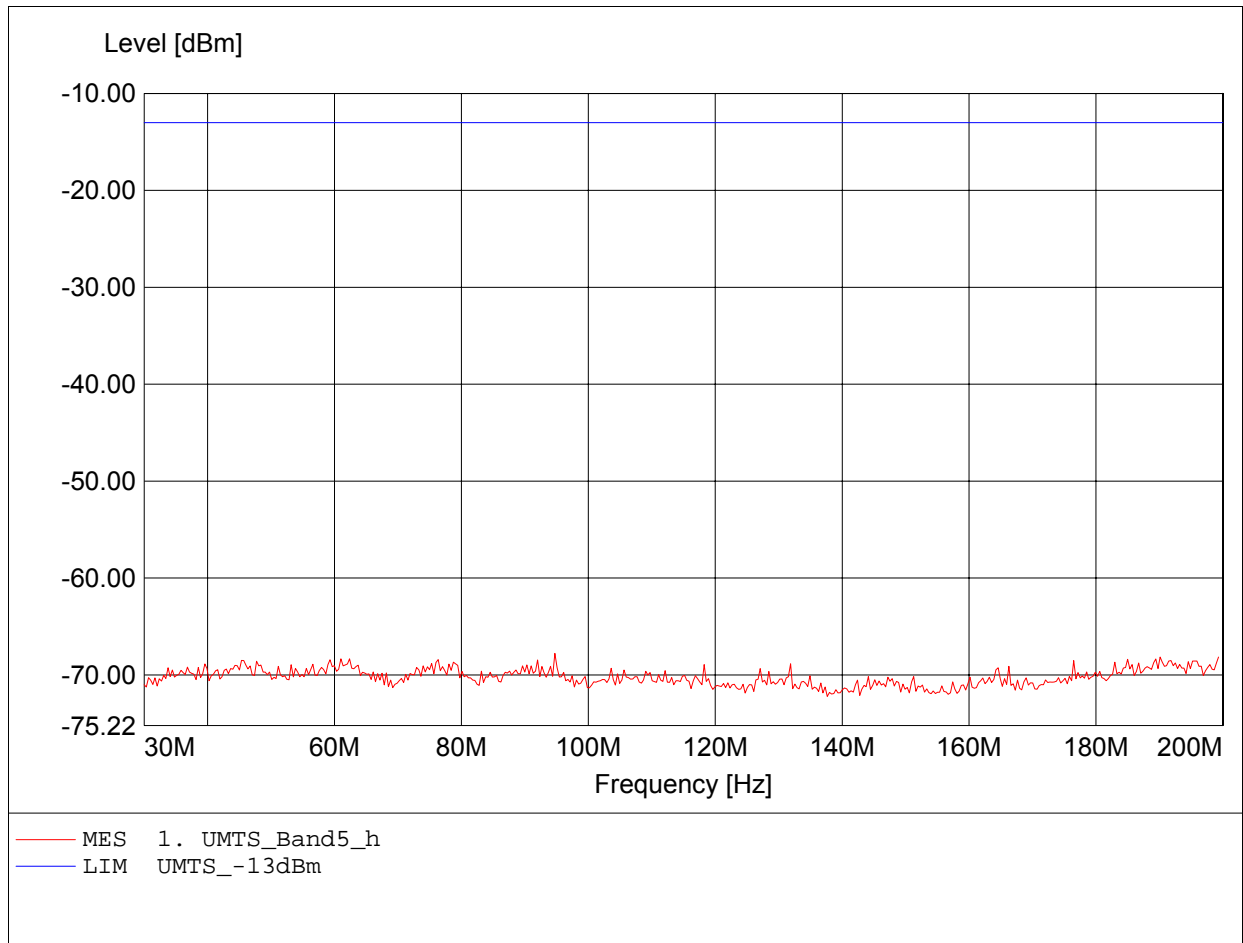


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 871.559MHz, Pmax: -24.36dBm, RBW: 100kHz

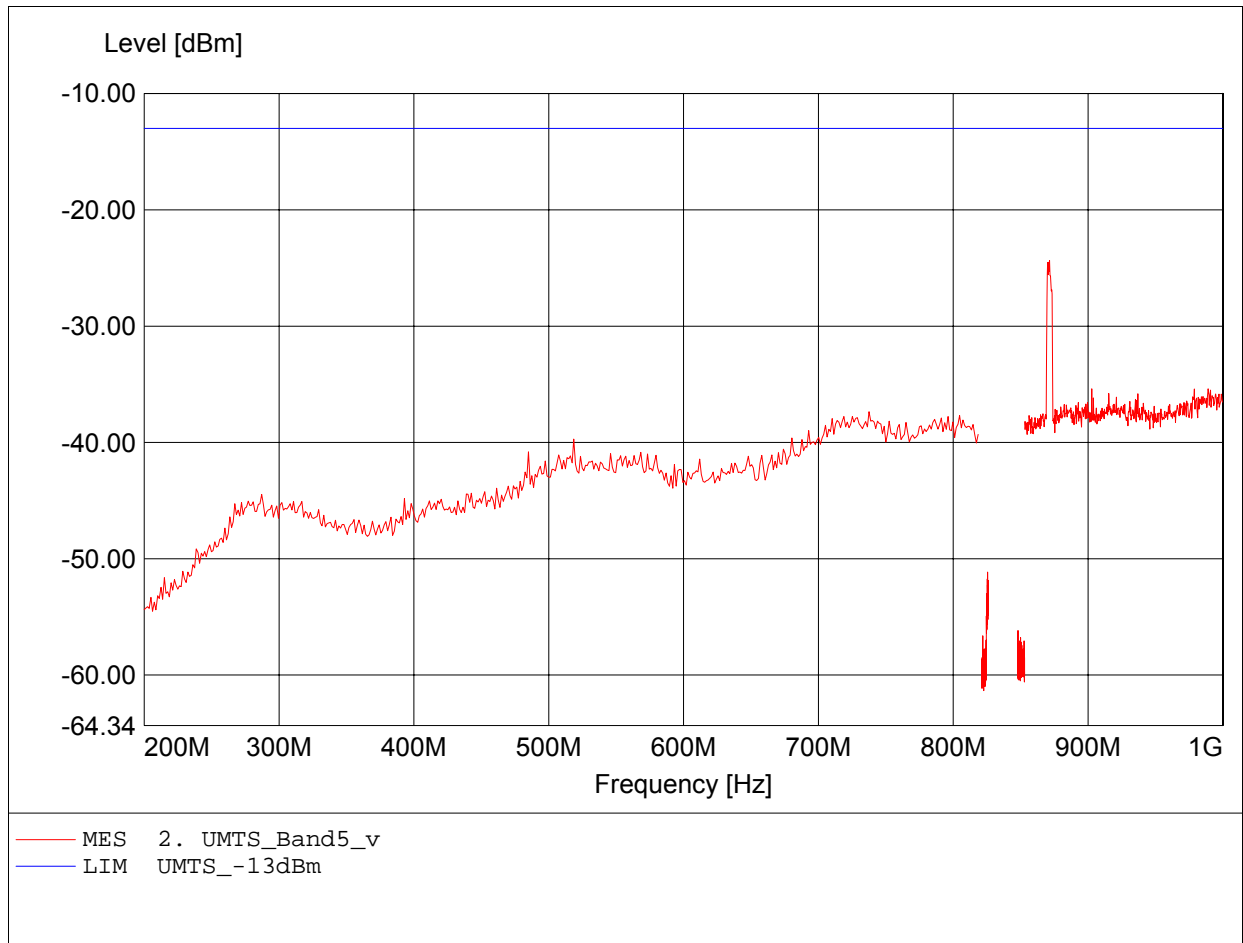


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 856.240MHz, Pmax: -33.34dBm, RBW: 100kHz

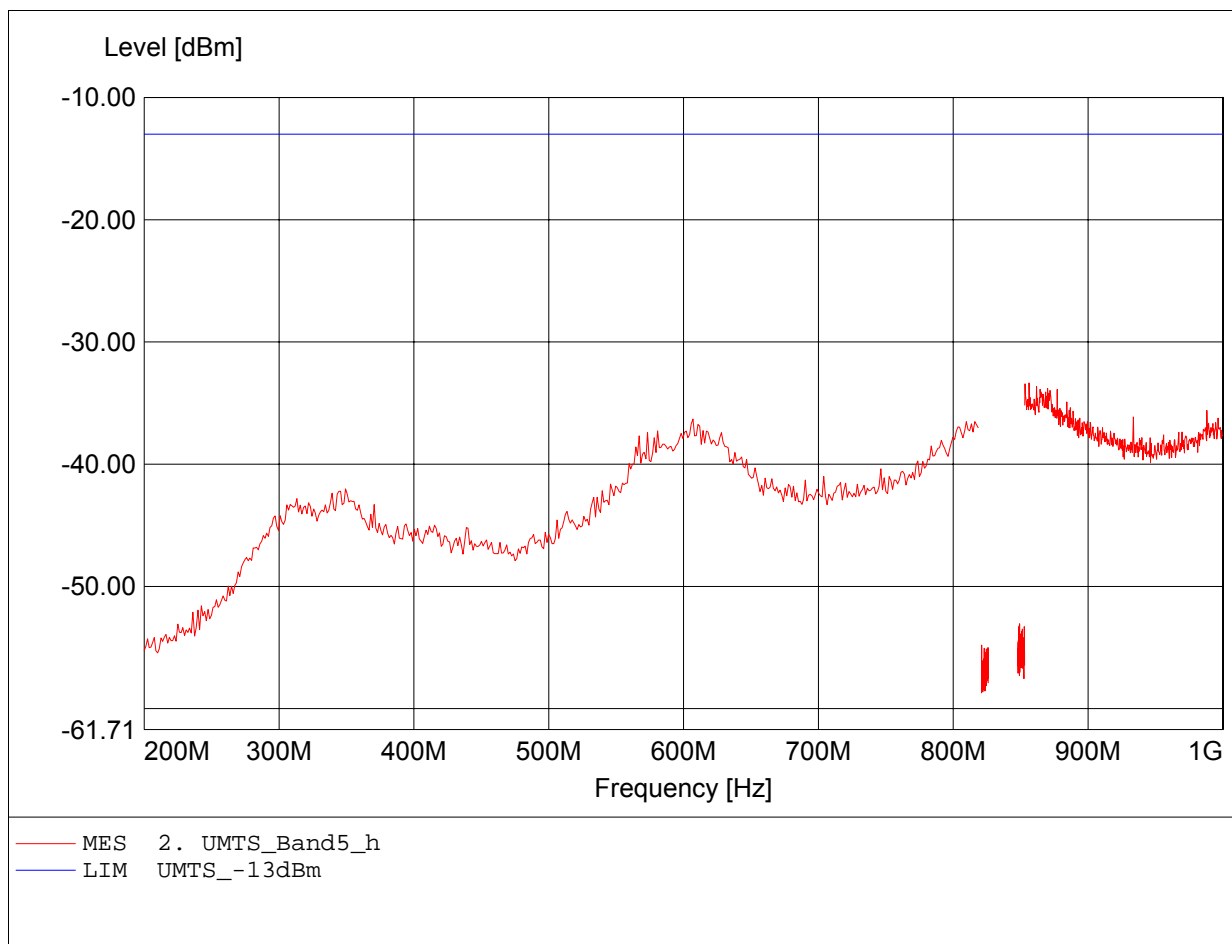


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.922GHz, Pmax: -45.83dBm, RBW: 1MHz

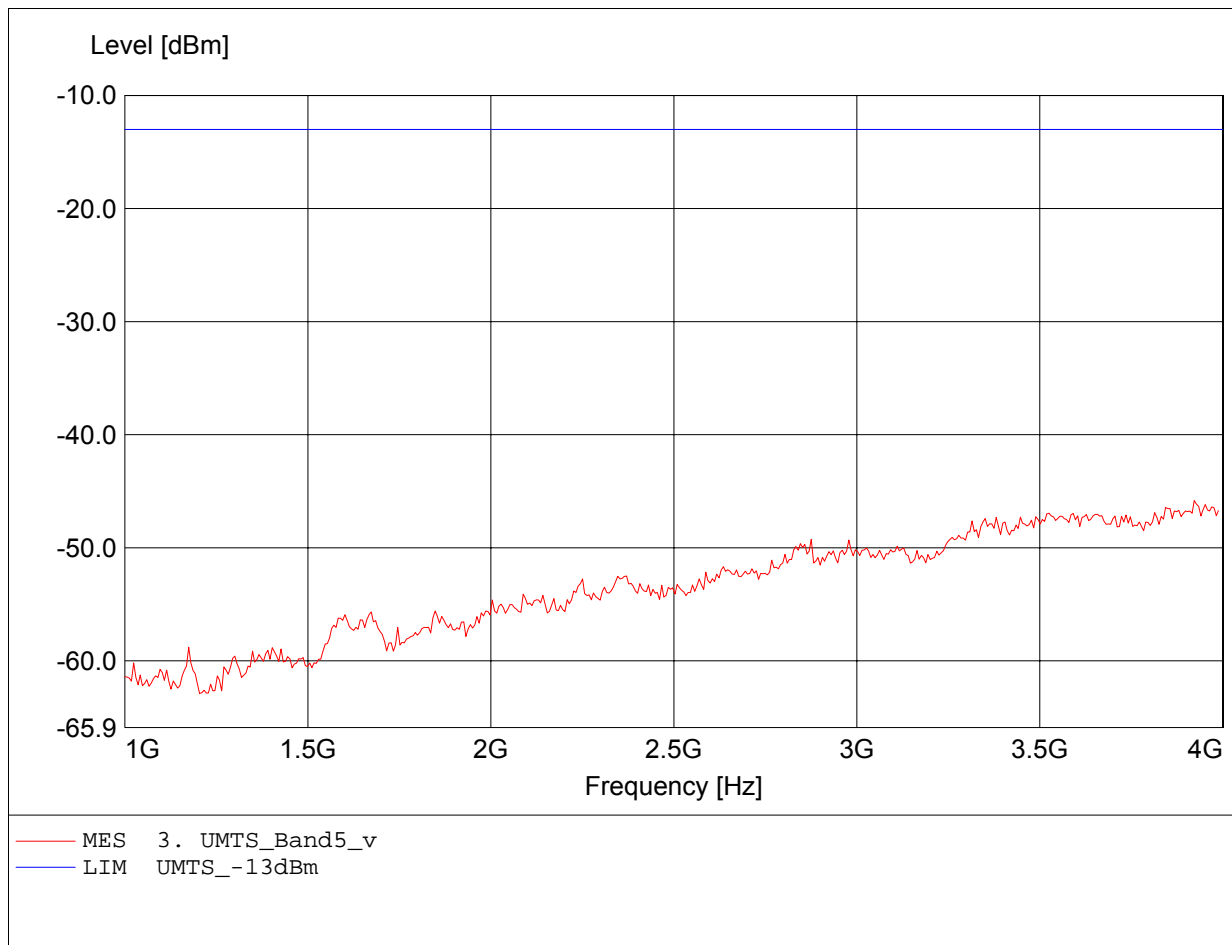


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.519GHz, Pmax: -45.97dBm, RBW: 1MHz

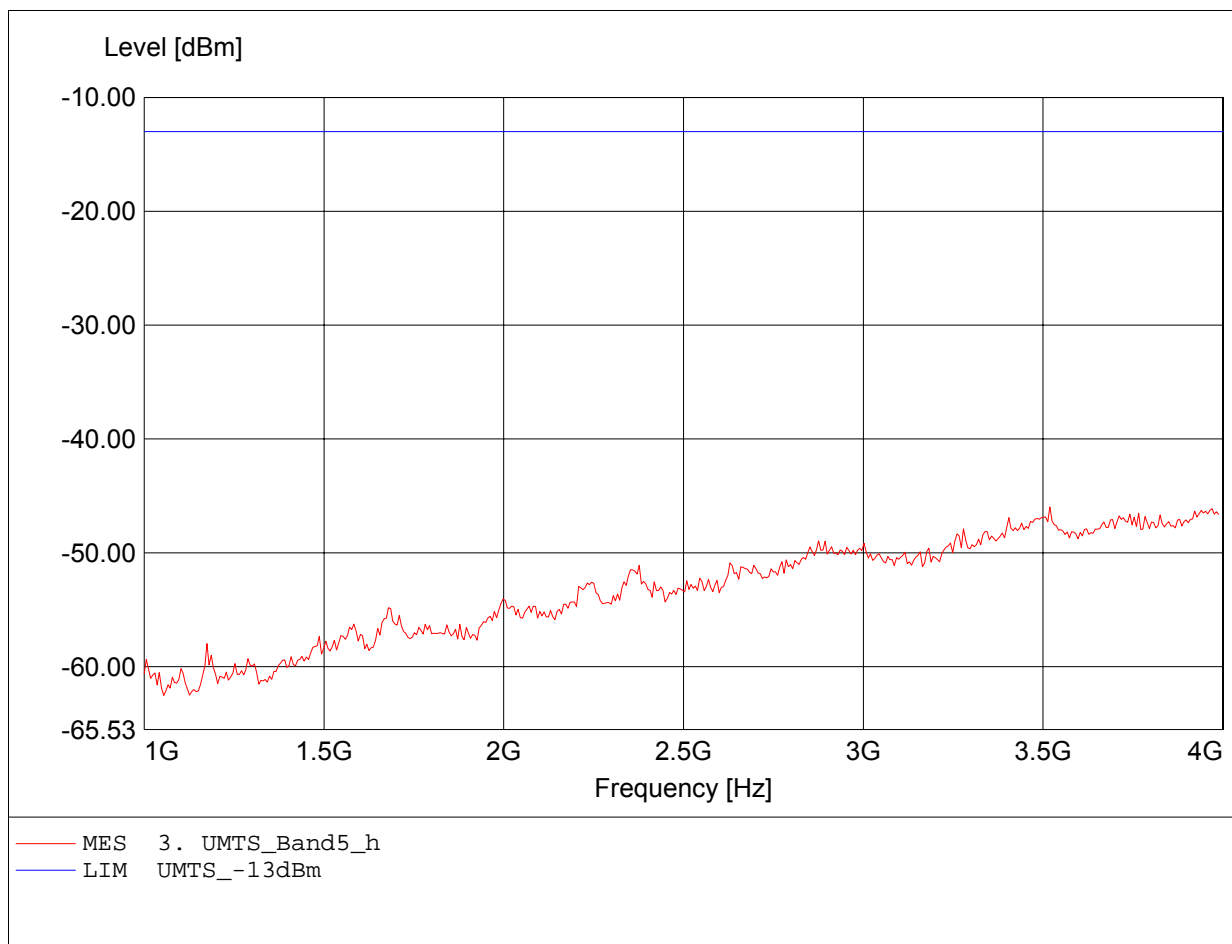


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.952GHz, Pmax: -43.01dBm, RBW: 1MHz

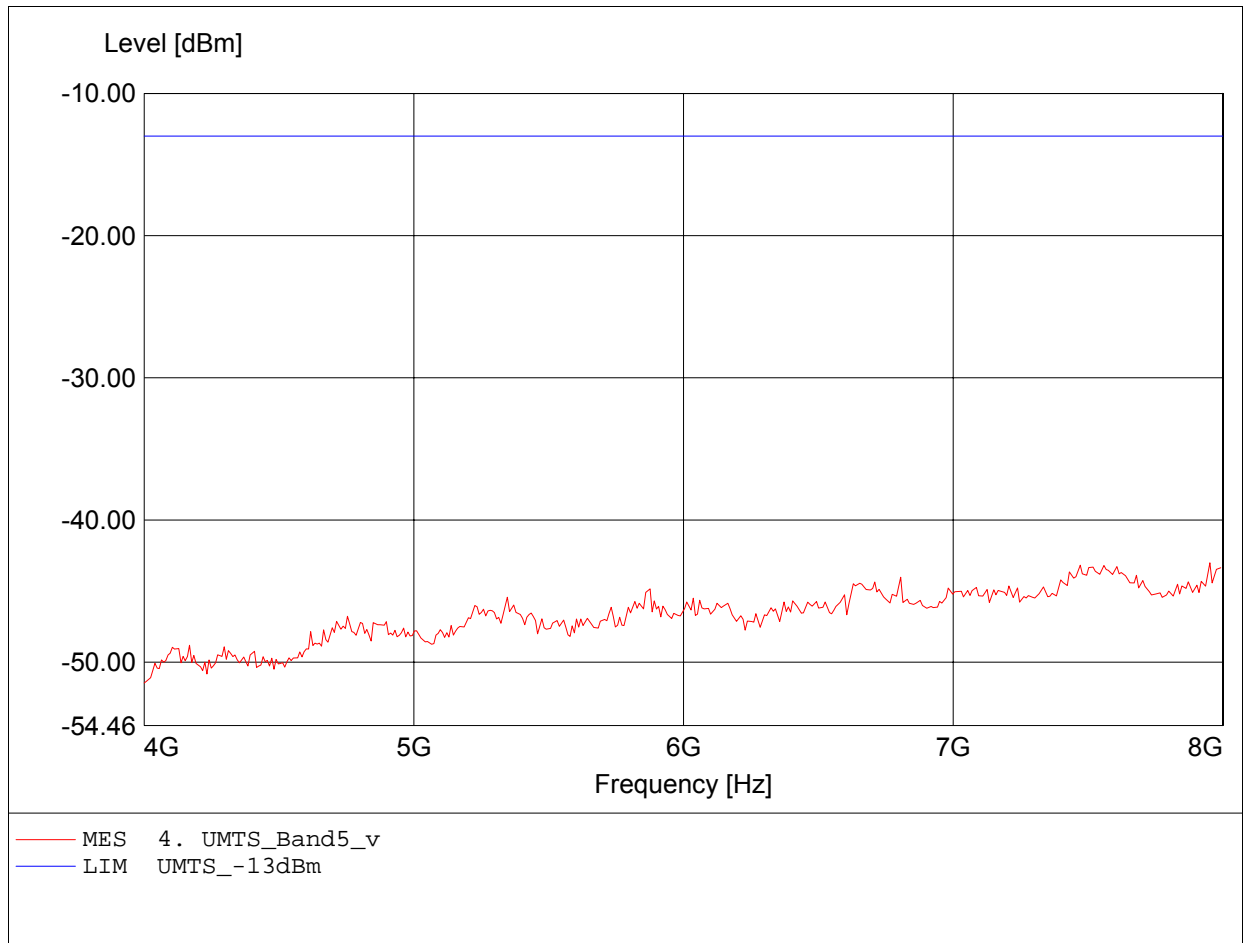


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.399GHz, Pmax: -42.34dBm, RBW: 1MHz

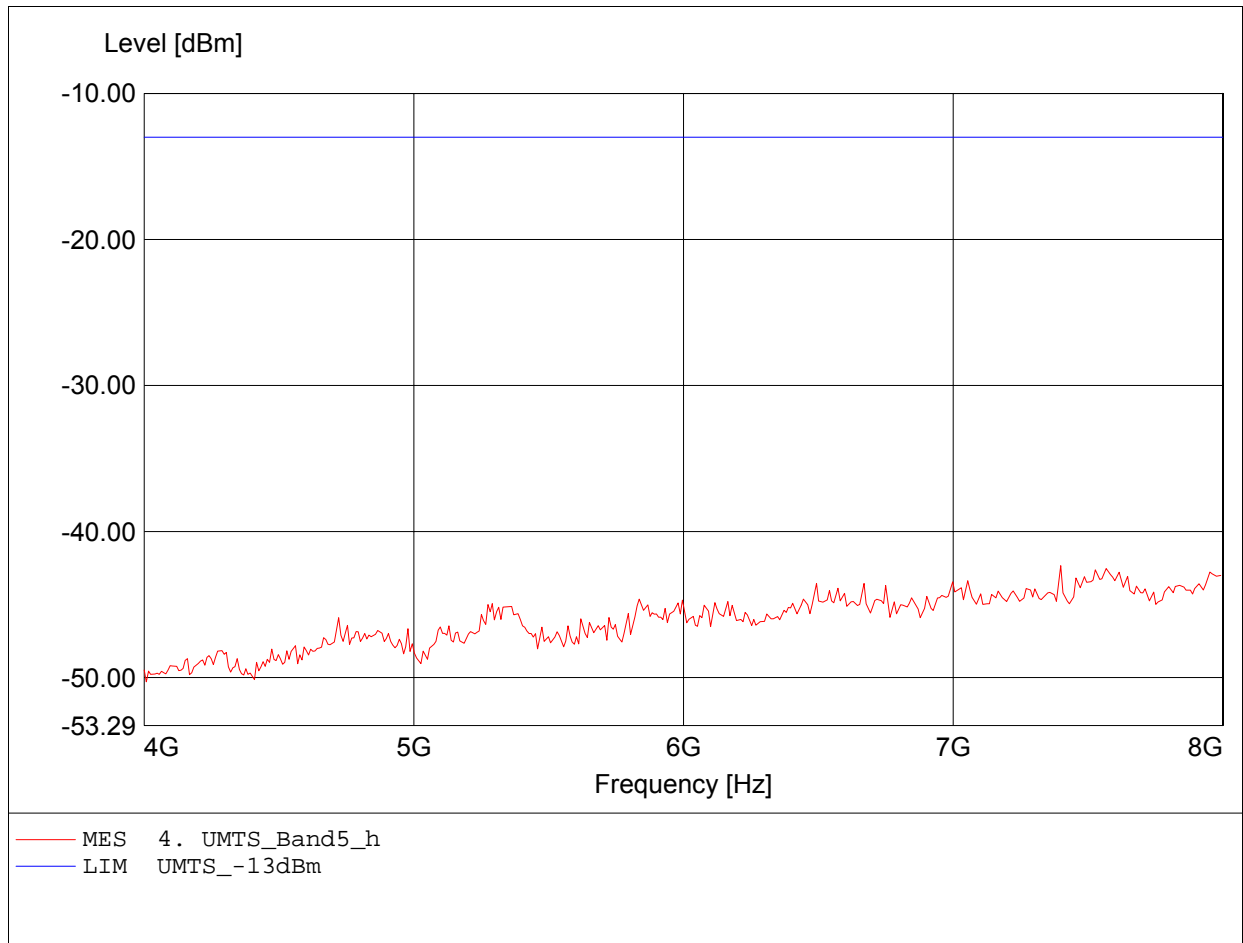


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.693GHz, Pmax: -38.34dBm, RBW: 1MHz

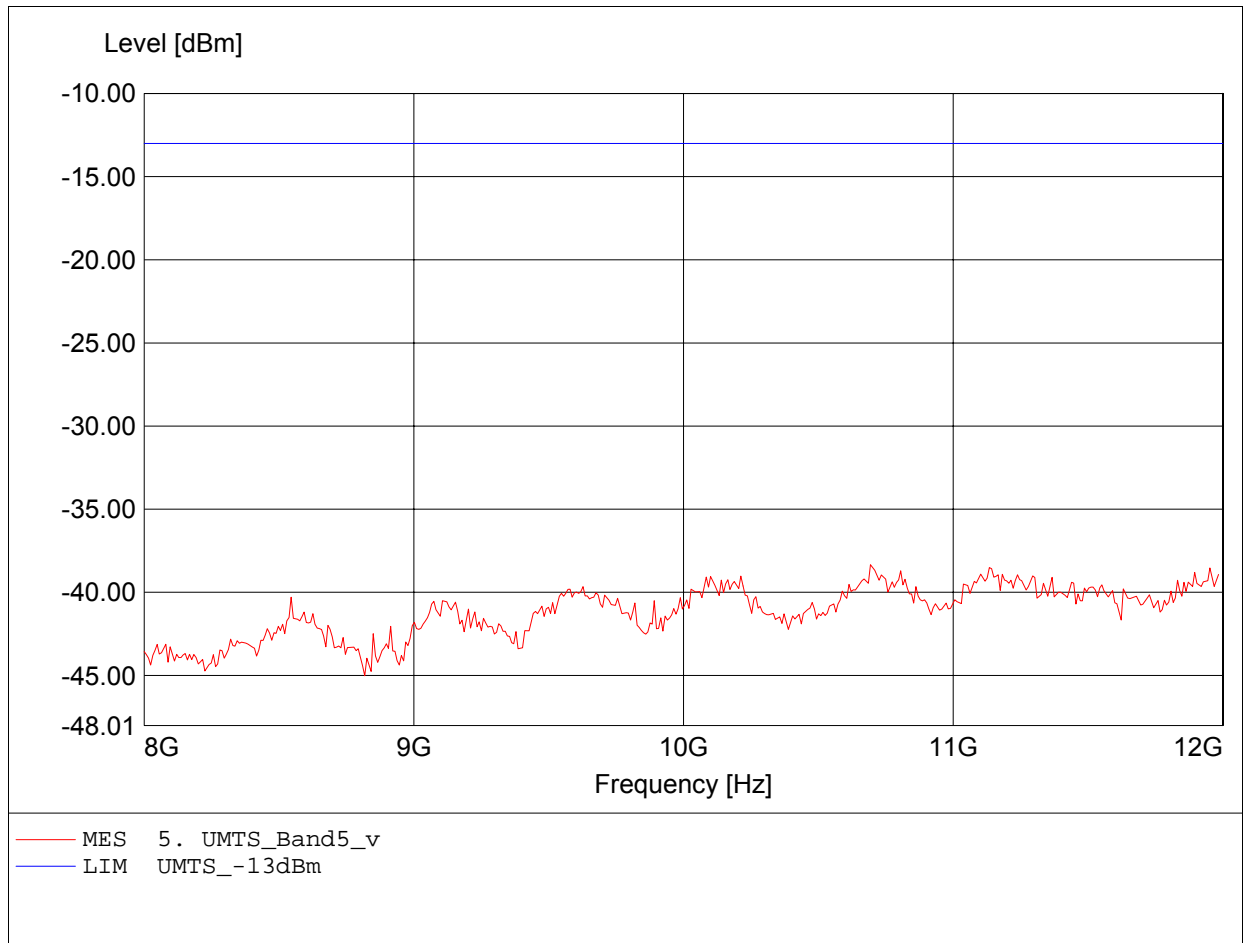


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4133
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.717GHz, Pmax: -37.39dBm, RBW: 1MHz

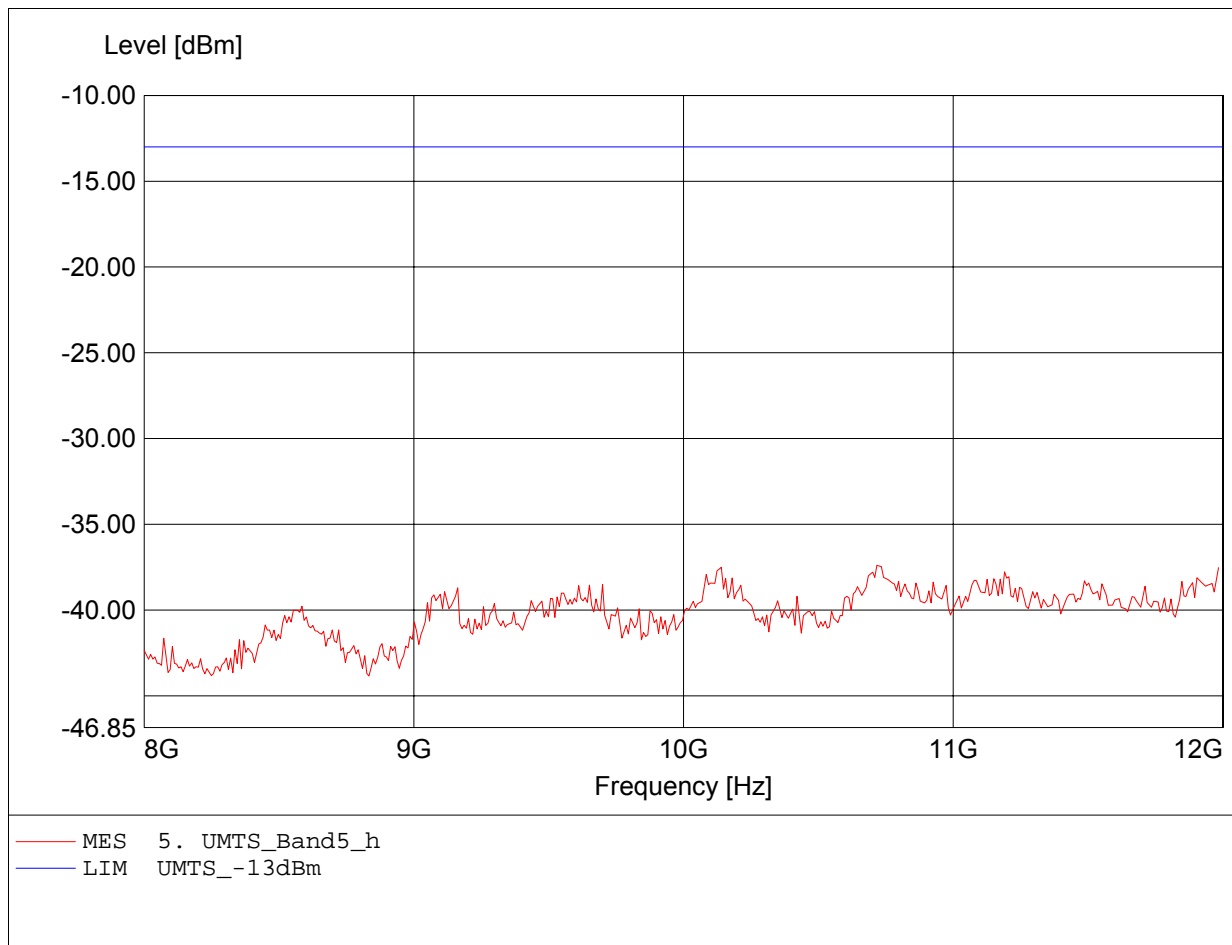


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 192.846MHz, Pmax: -67.04dBm, RBW: 100kHz

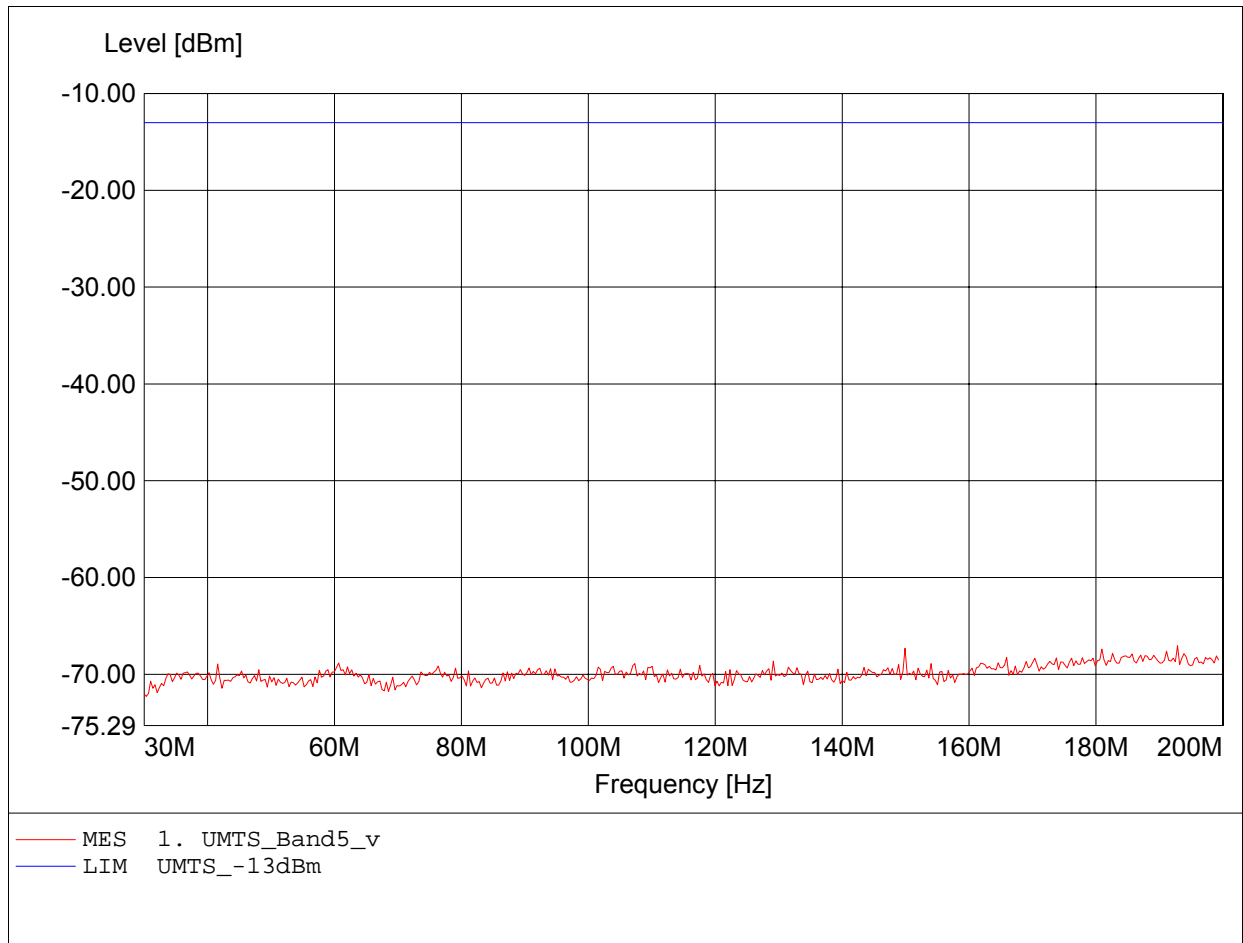


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 46.353MHz, Pmax: -67.53dBm, RBW: 100kHz

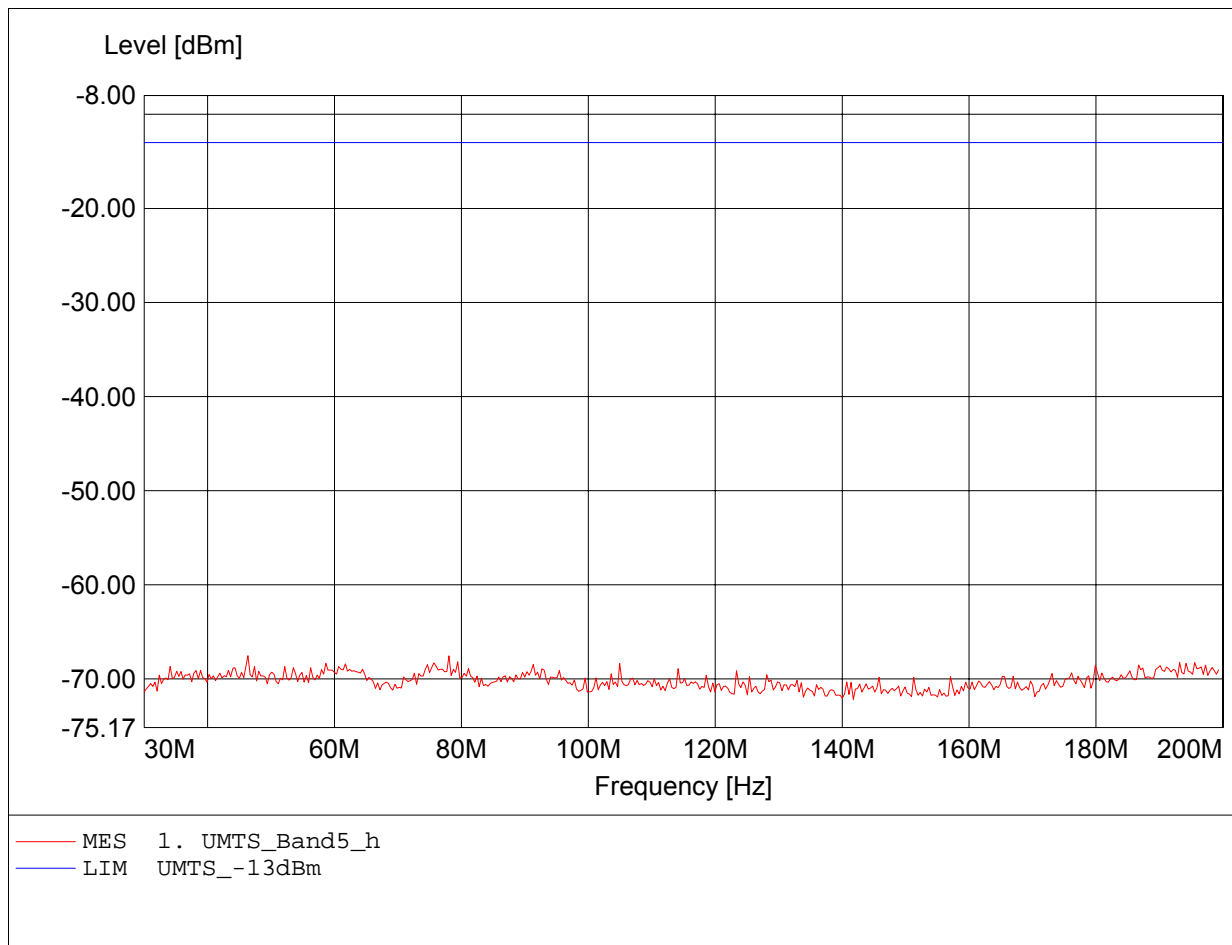


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 878.924MHz, Pmax: -23.85dBm, RBW: 100kHz

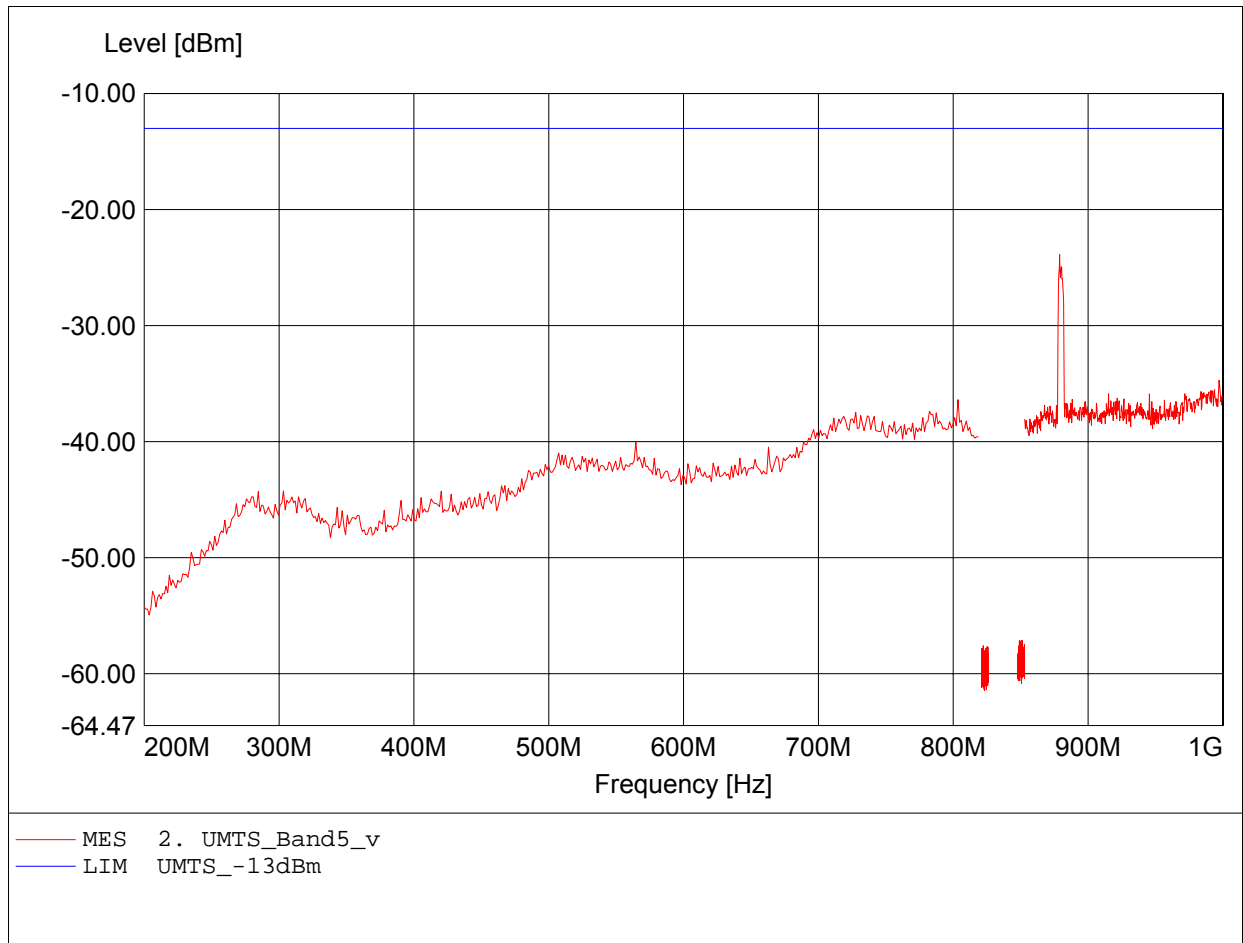


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 856.535MHz, Pmax: -34.06dBm, RBW: 100kHz

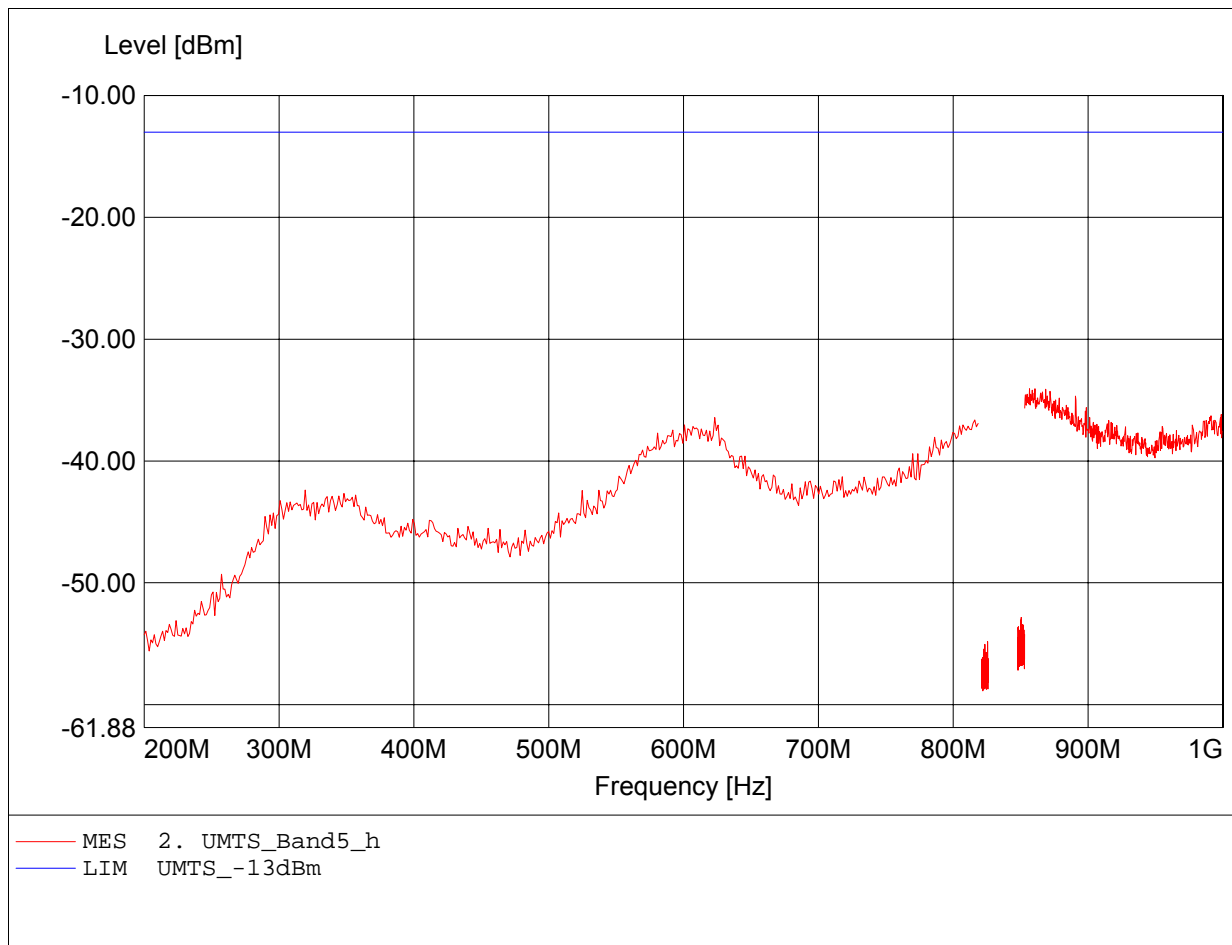


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.651GHz, Pmax: -45.74dBm, RBW: 1MHz

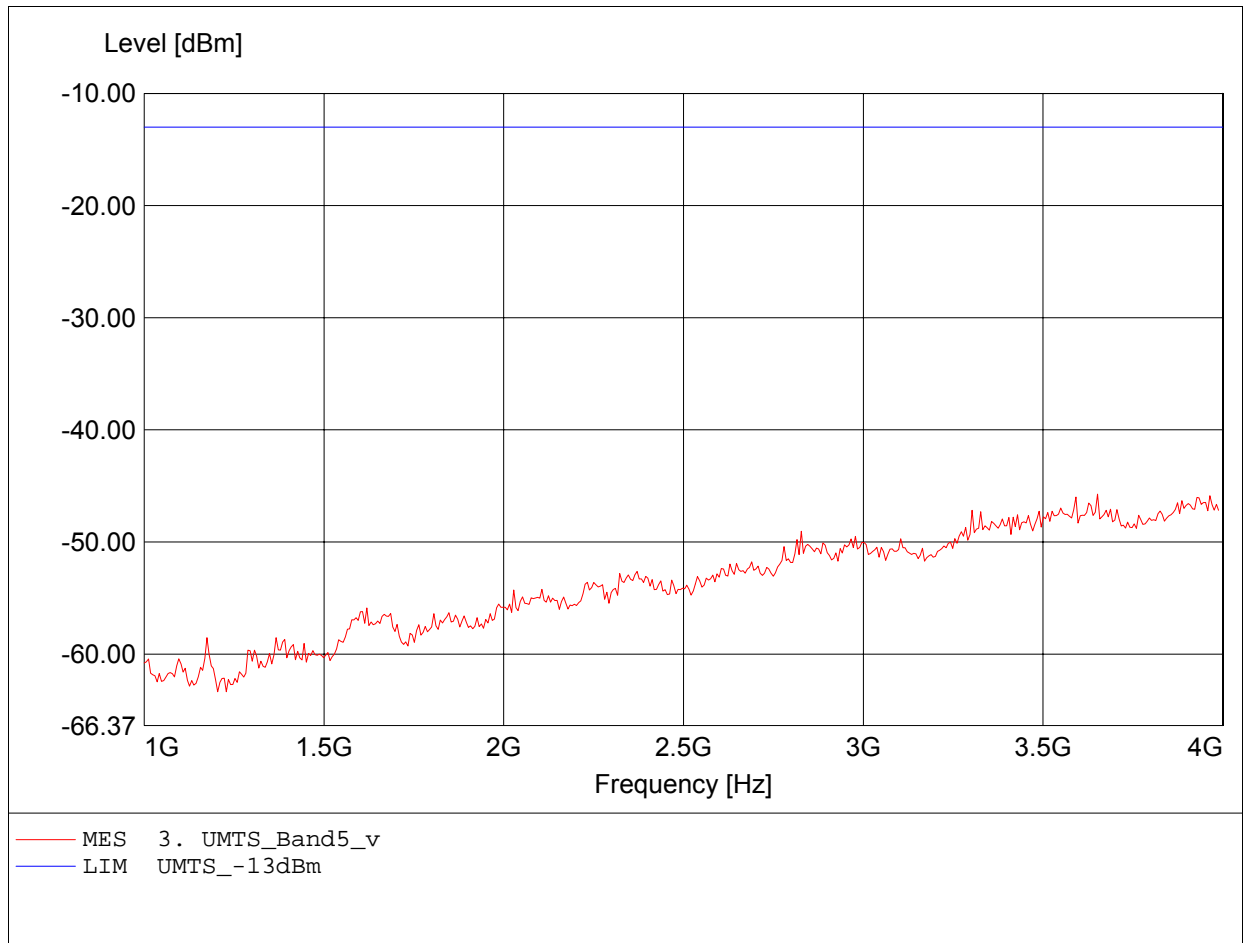


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.964GHz, Pmax: -45.21dBm, RBW: 1MHz

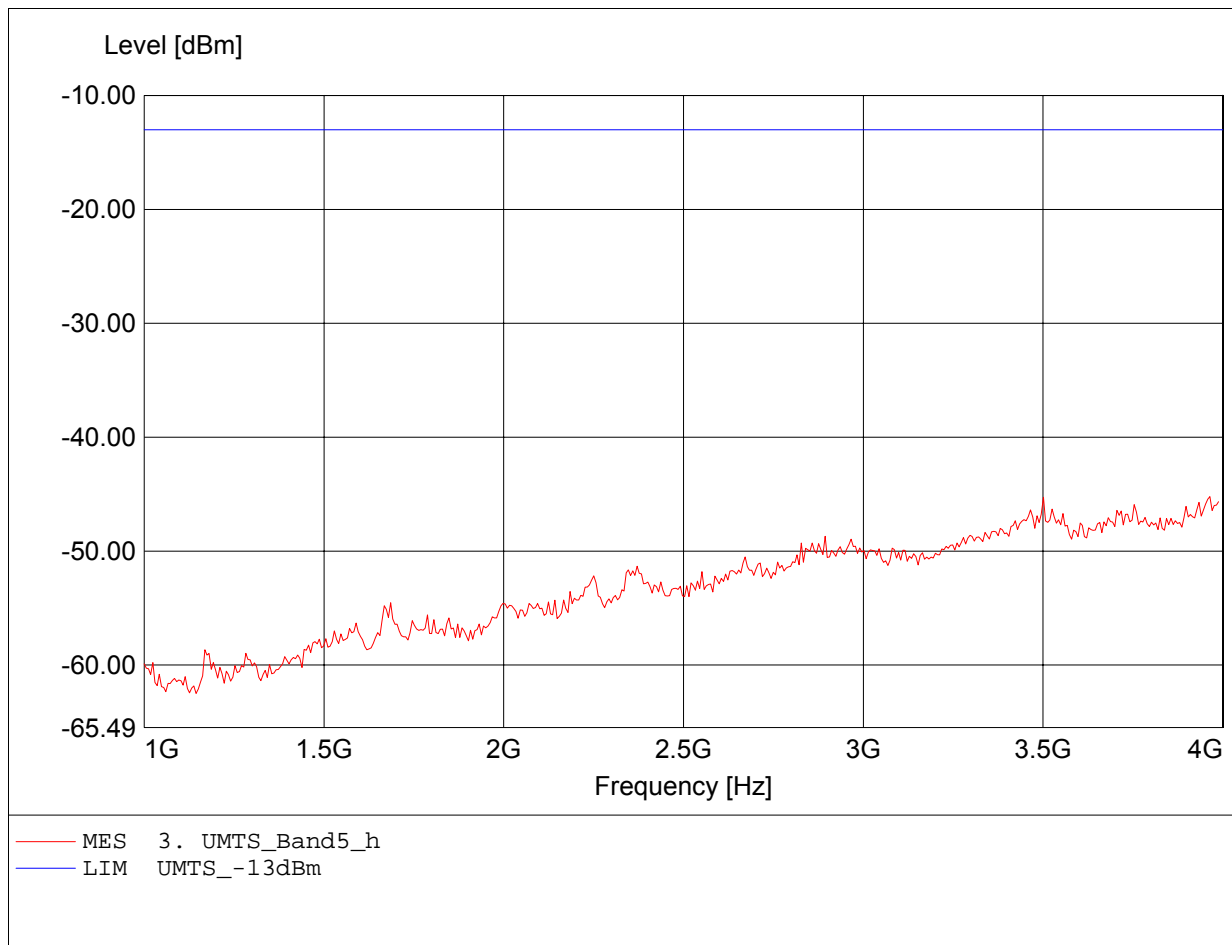


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.575GHz, Pmax: -42.79dBm, RBW: 1MHz

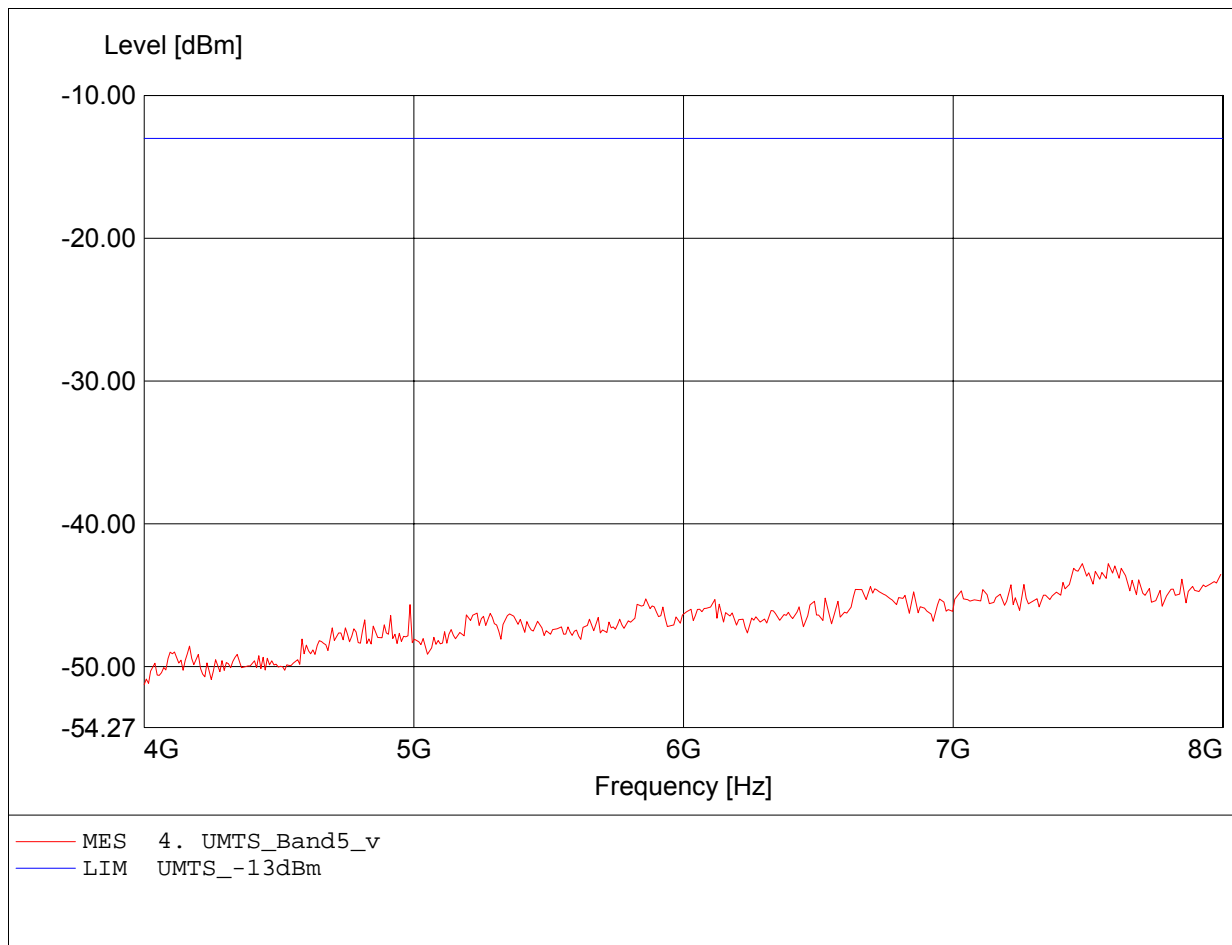


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.976GHz, Pmax: -41.99dBm, RBW: 1MHz

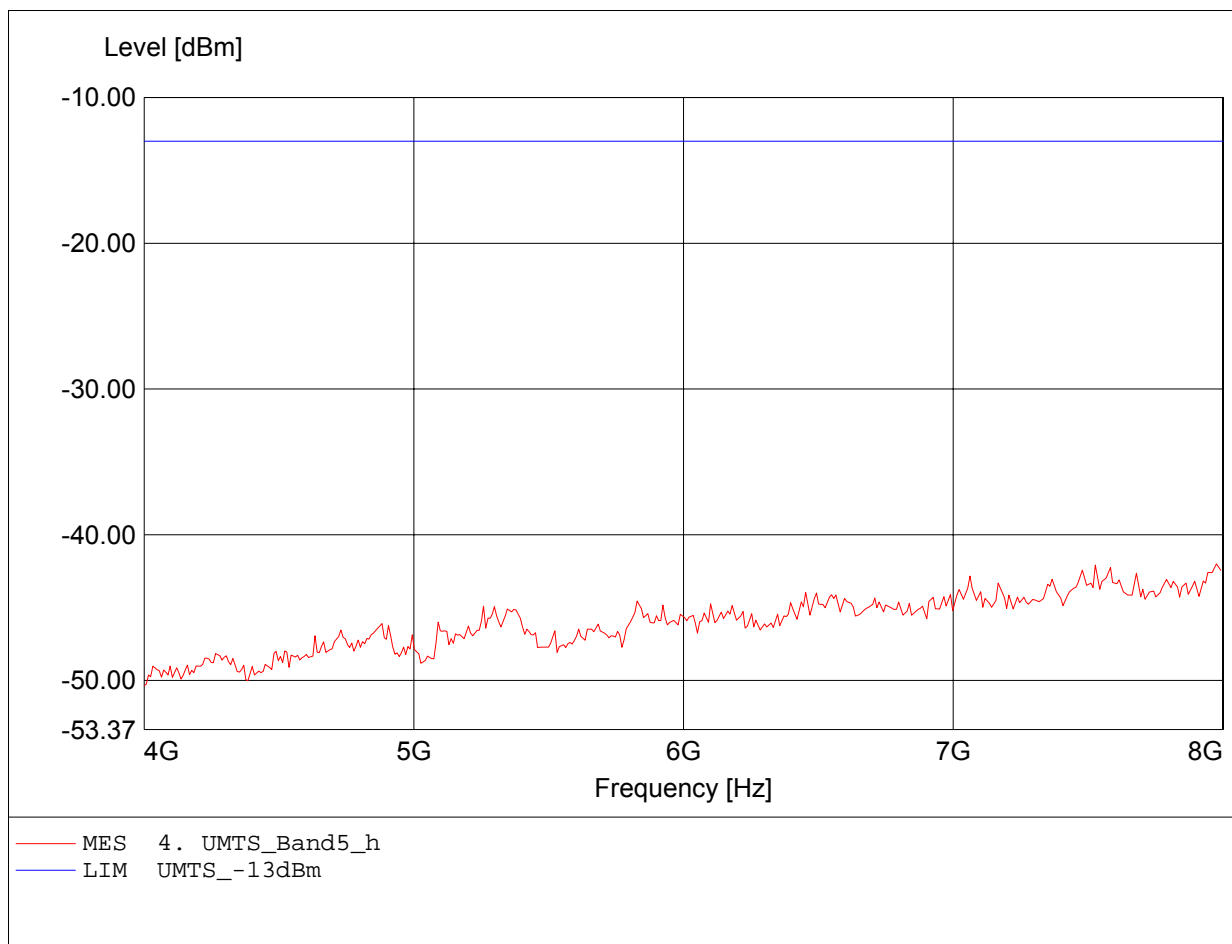


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.150GHz, Pmax: -37.97dBm, RBW: 1MHz

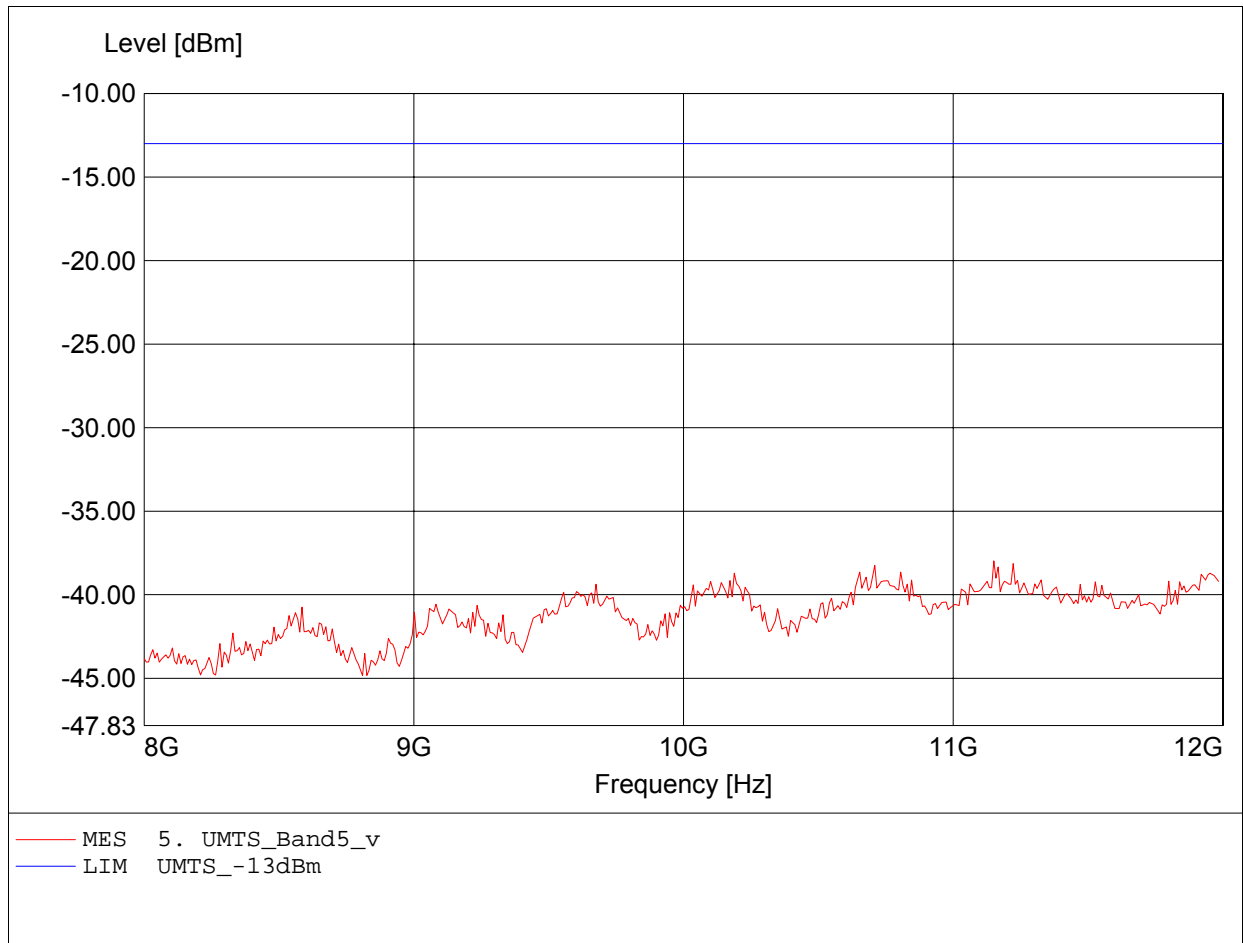


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4175
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.733GHz, Pmax: -36.86dBm, RBW: 1MHz

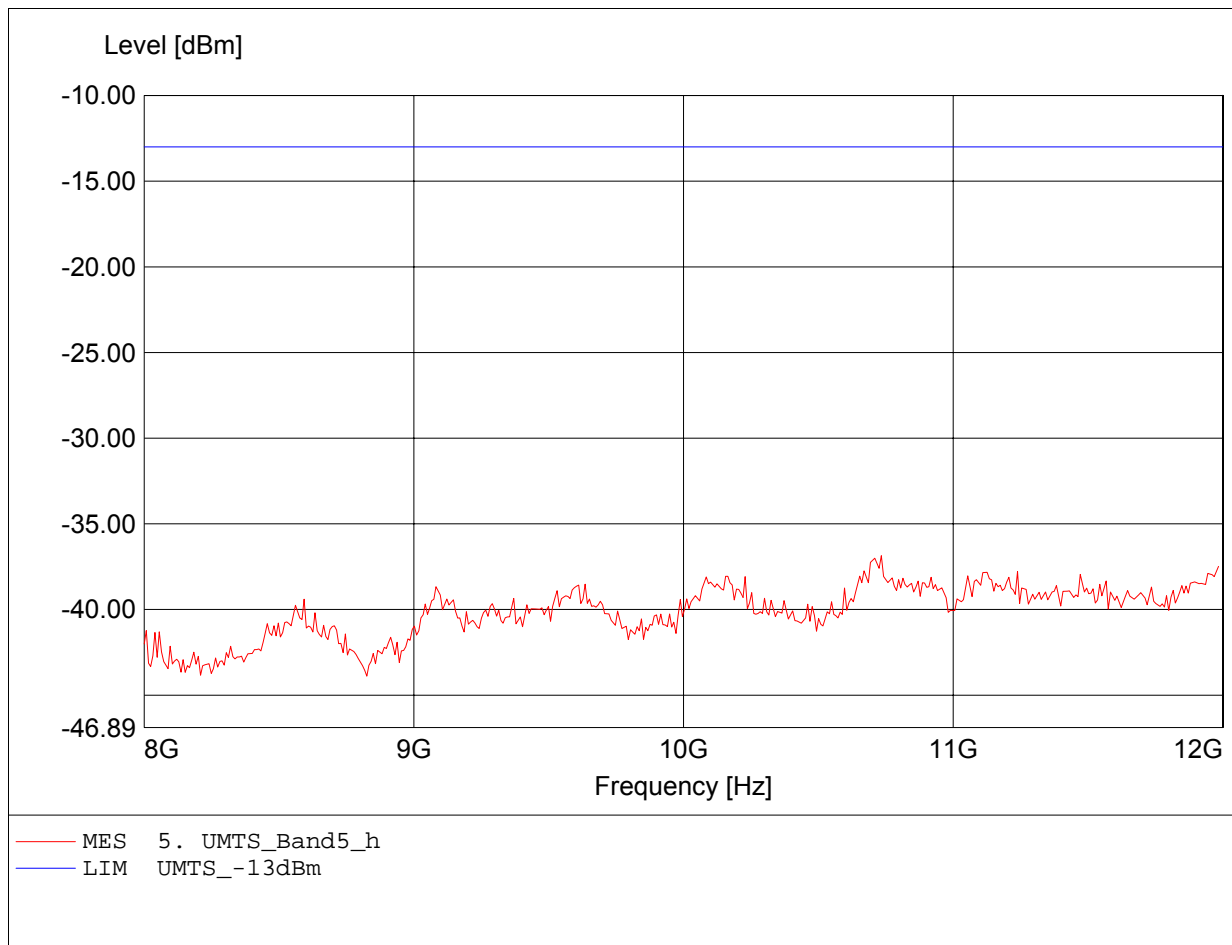


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 182.966MHz, Pmax: -65.94dBm, RBW: 100kHz

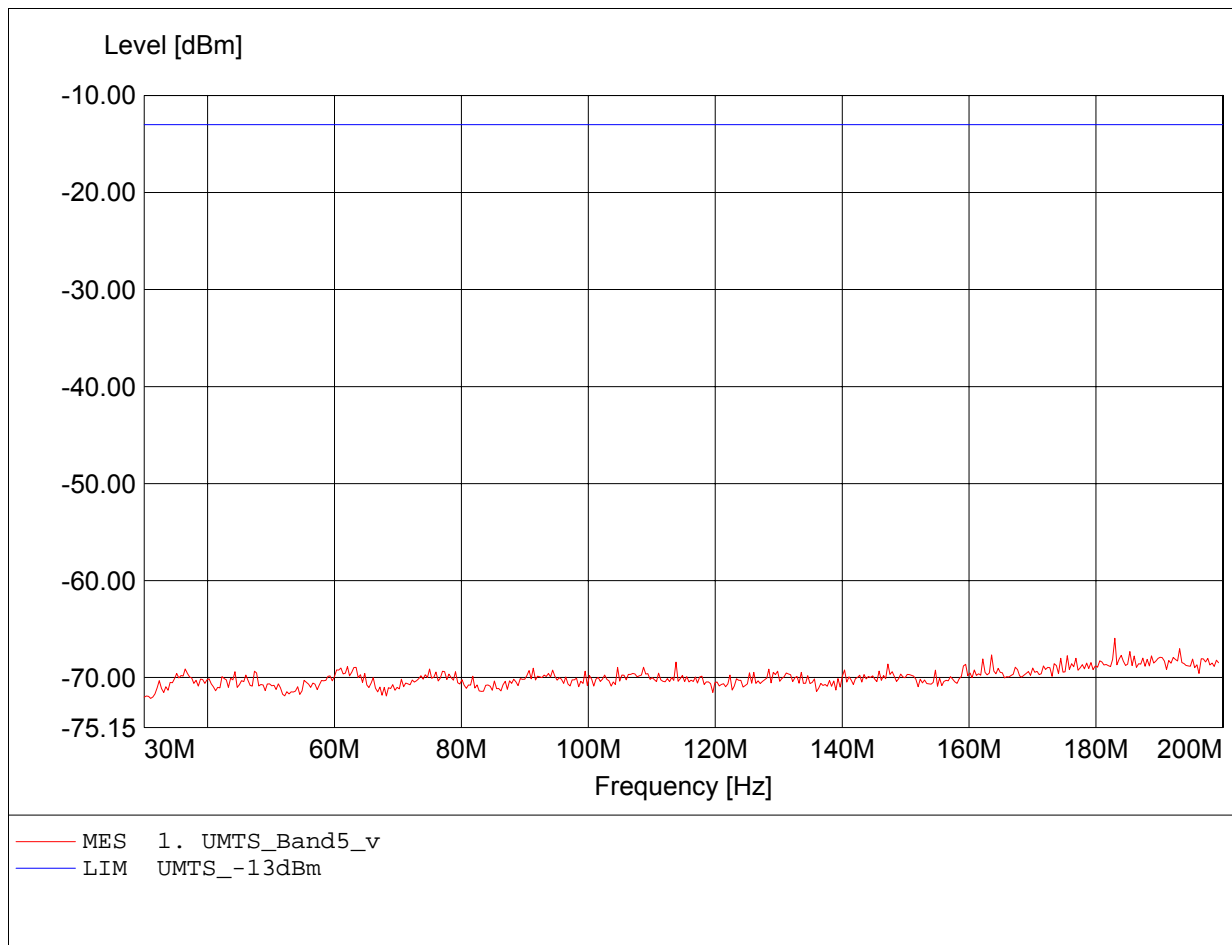


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK116
Comment 2: Freq: 63.046MHz, Pmax: -67.61dBm, RBW: 100kHz

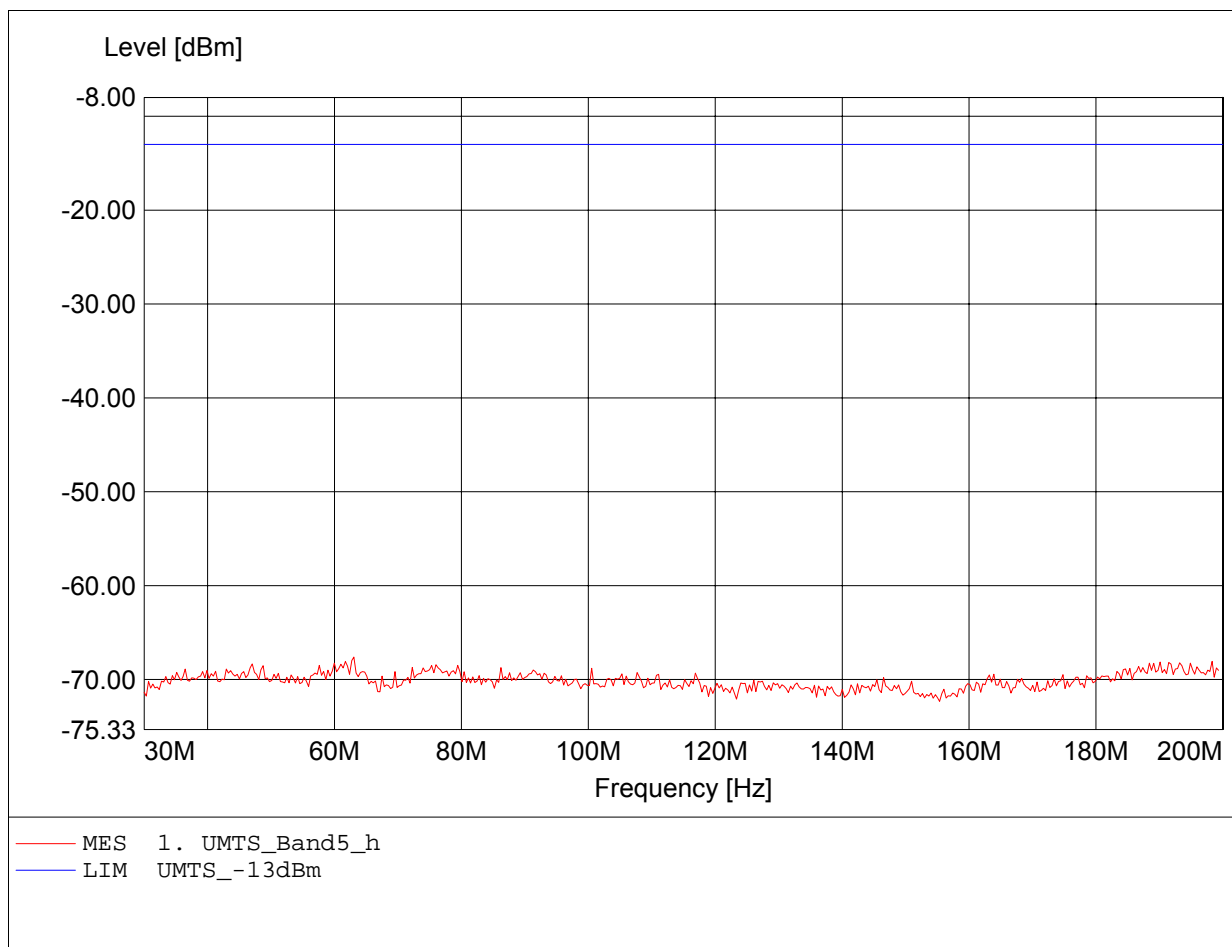


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 890.413MHz, Pmax: -32.74dBm, RBW: 100kHz

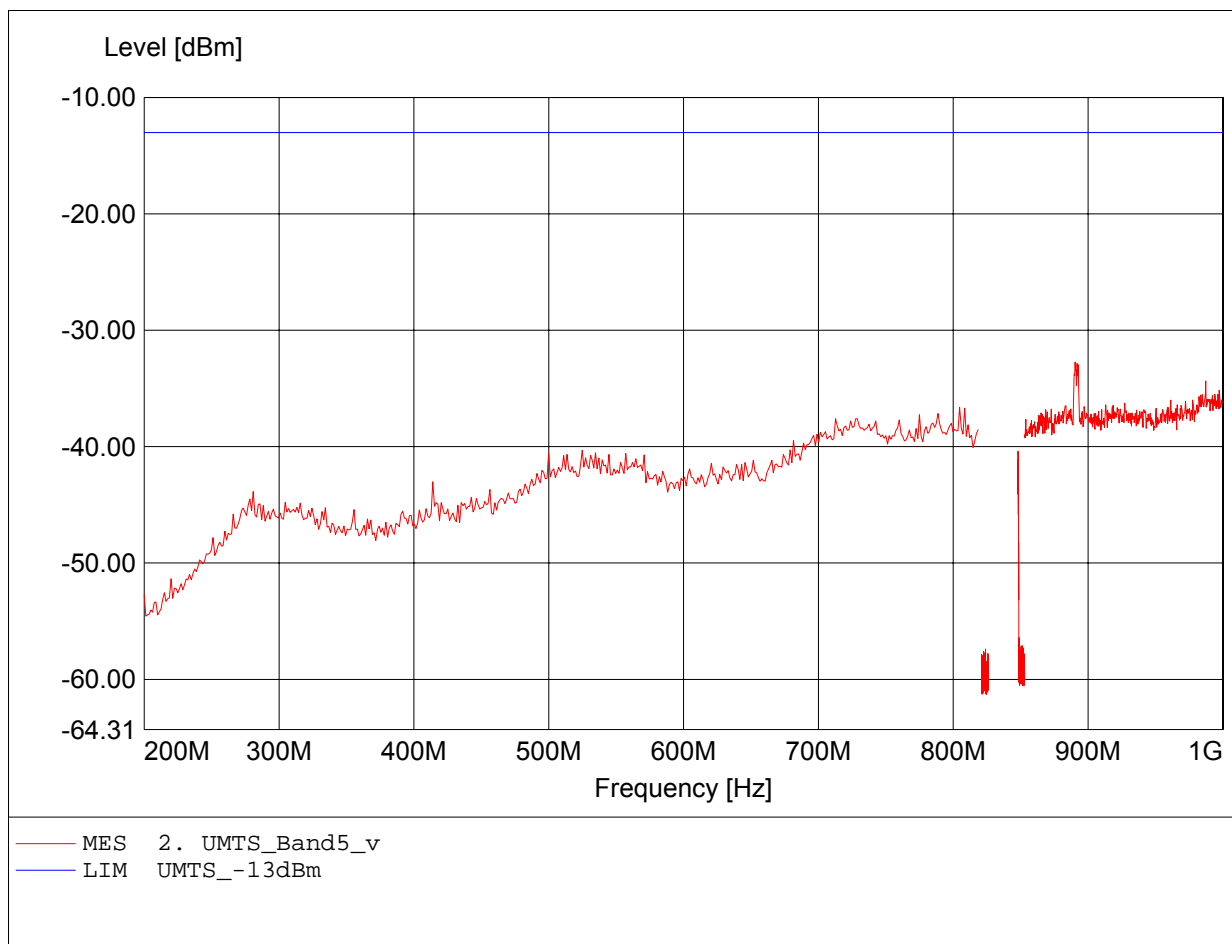


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 853.000MHz, Pmax: -33.81dBm, RBW: 100kHz

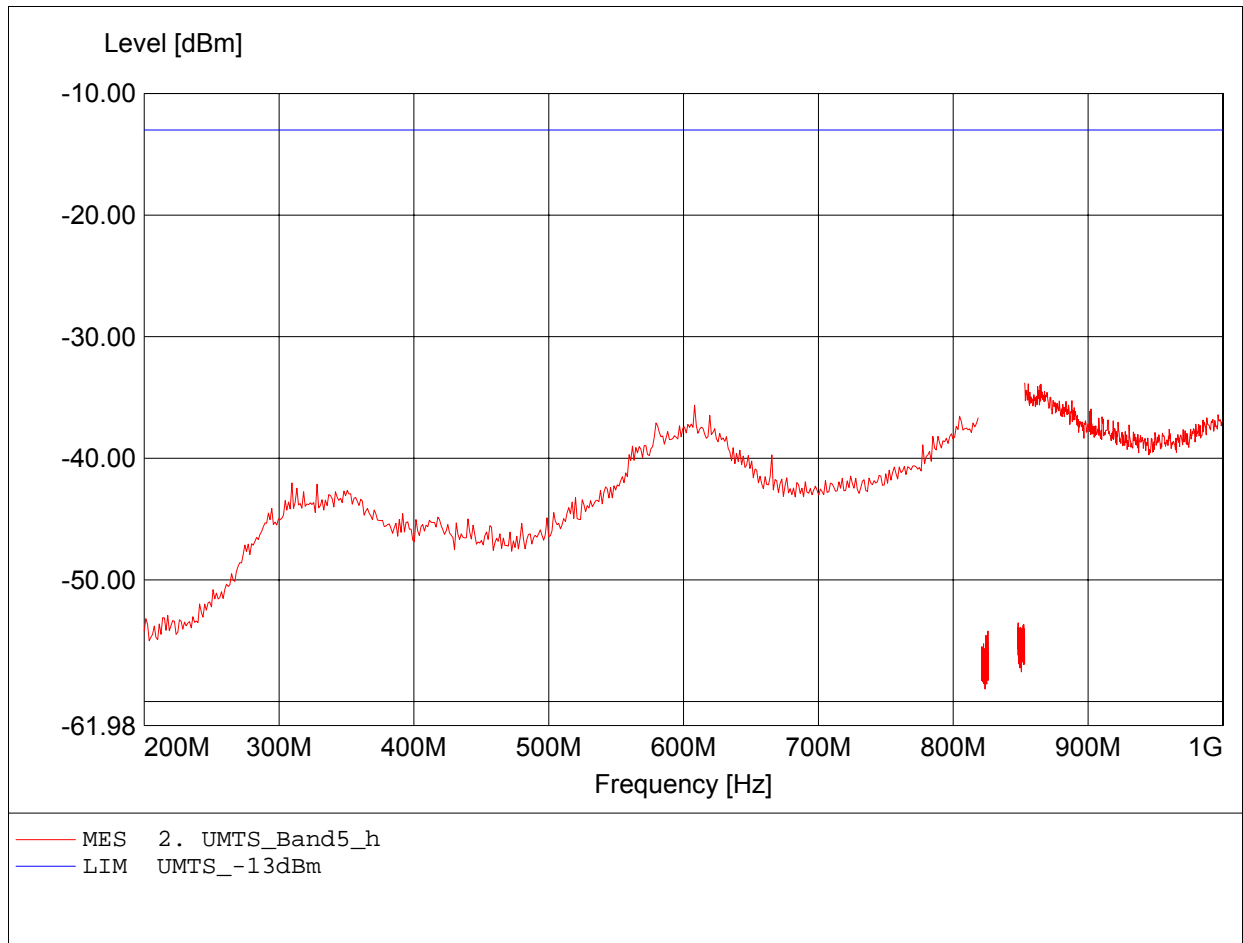


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.940GHz, Pmax: -45.42dBm, RBW: 1MHz

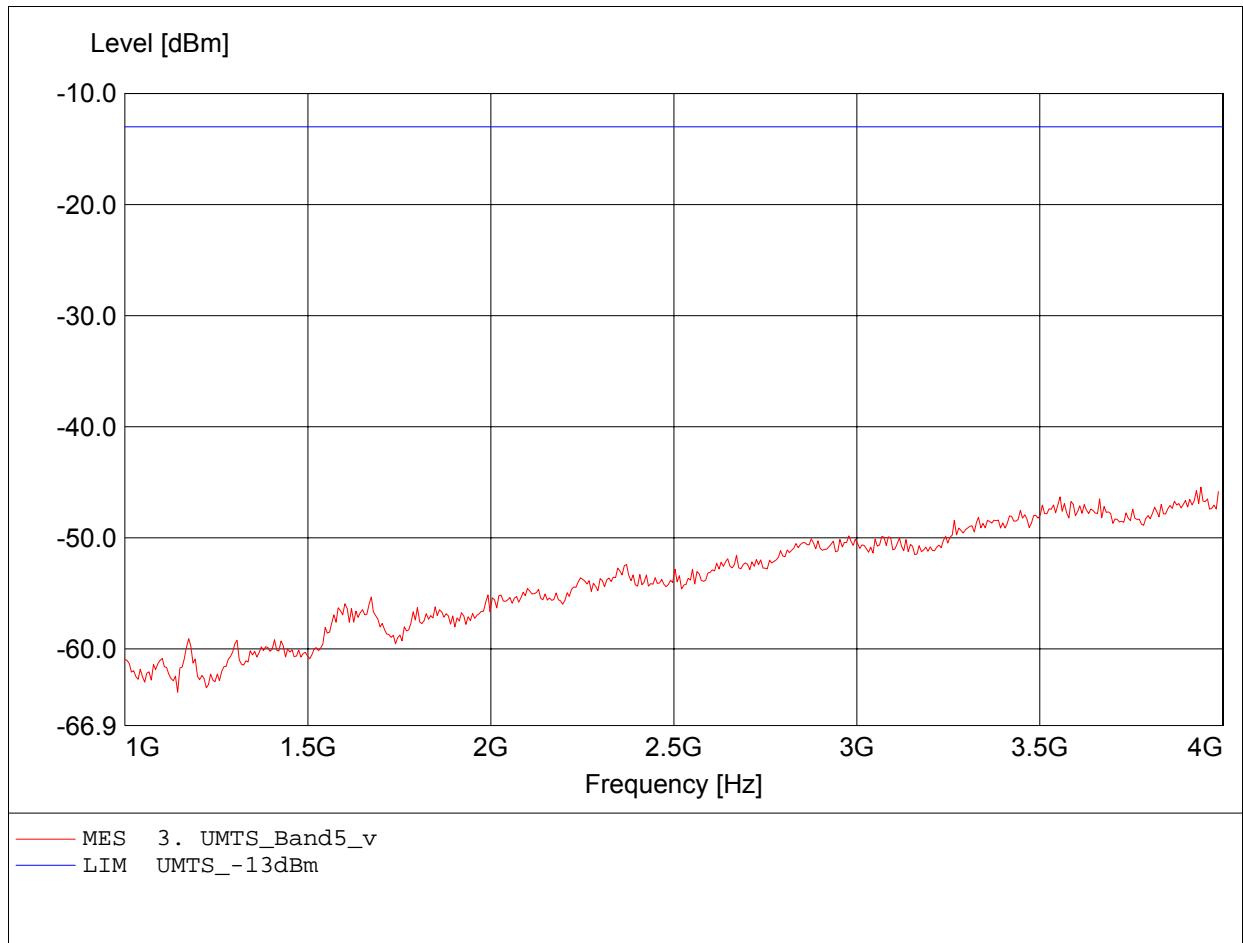


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 3.928GHz, Pmax: -45.47dBm, RBW: 1MHz

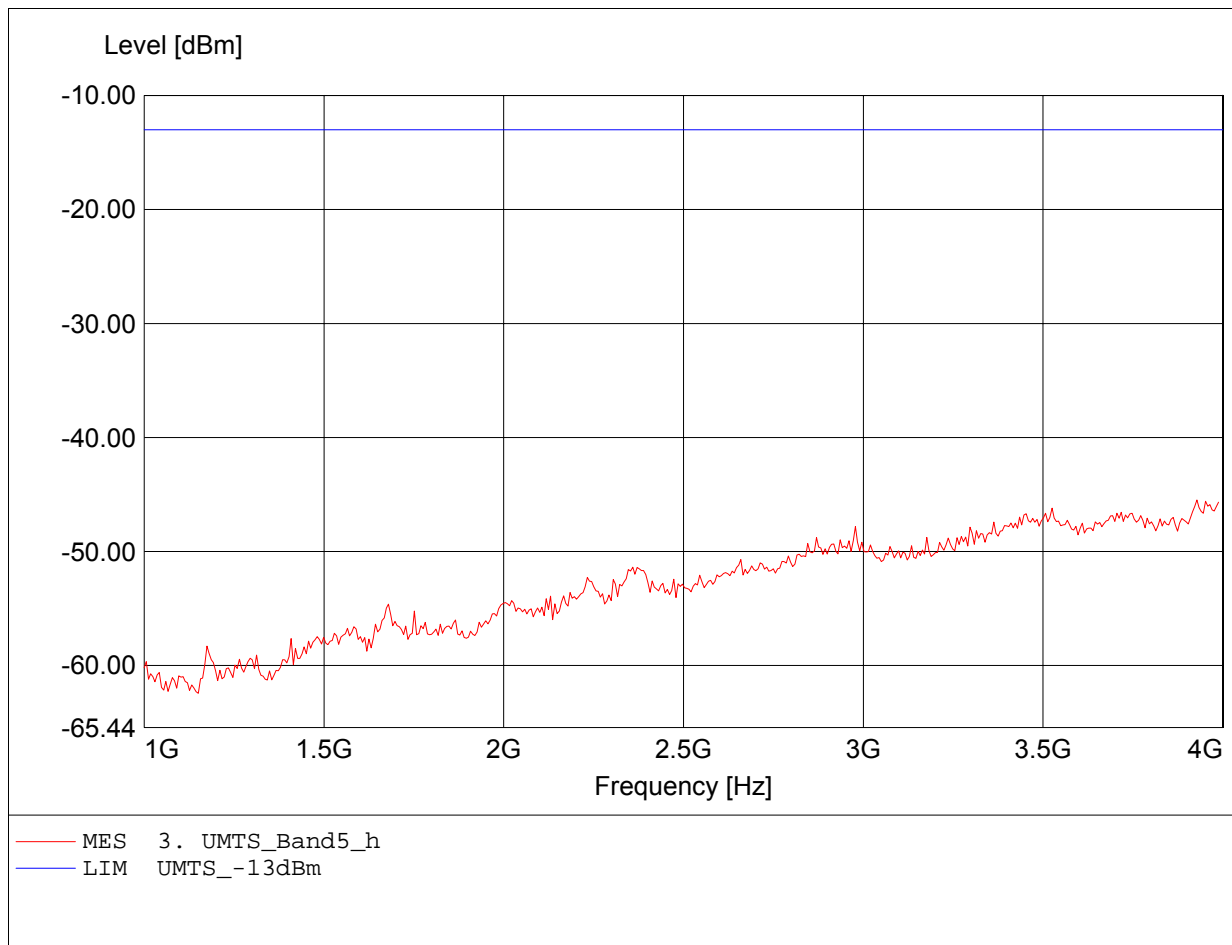


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.623GHz, Pmax: -42.64dBm, RBW: 1MHz

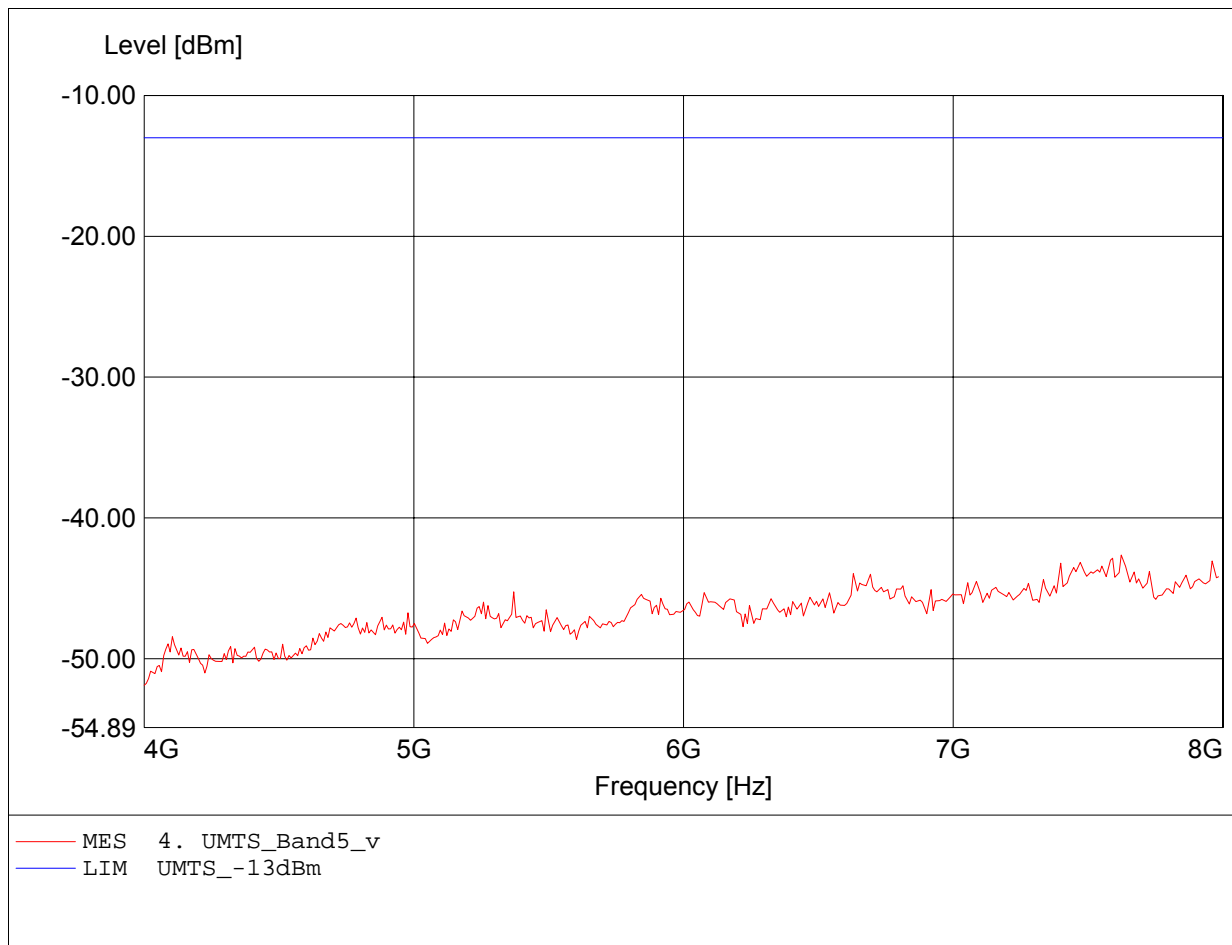


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.984GHz, Pmax: -40.86dBm, RBW: 1MHz

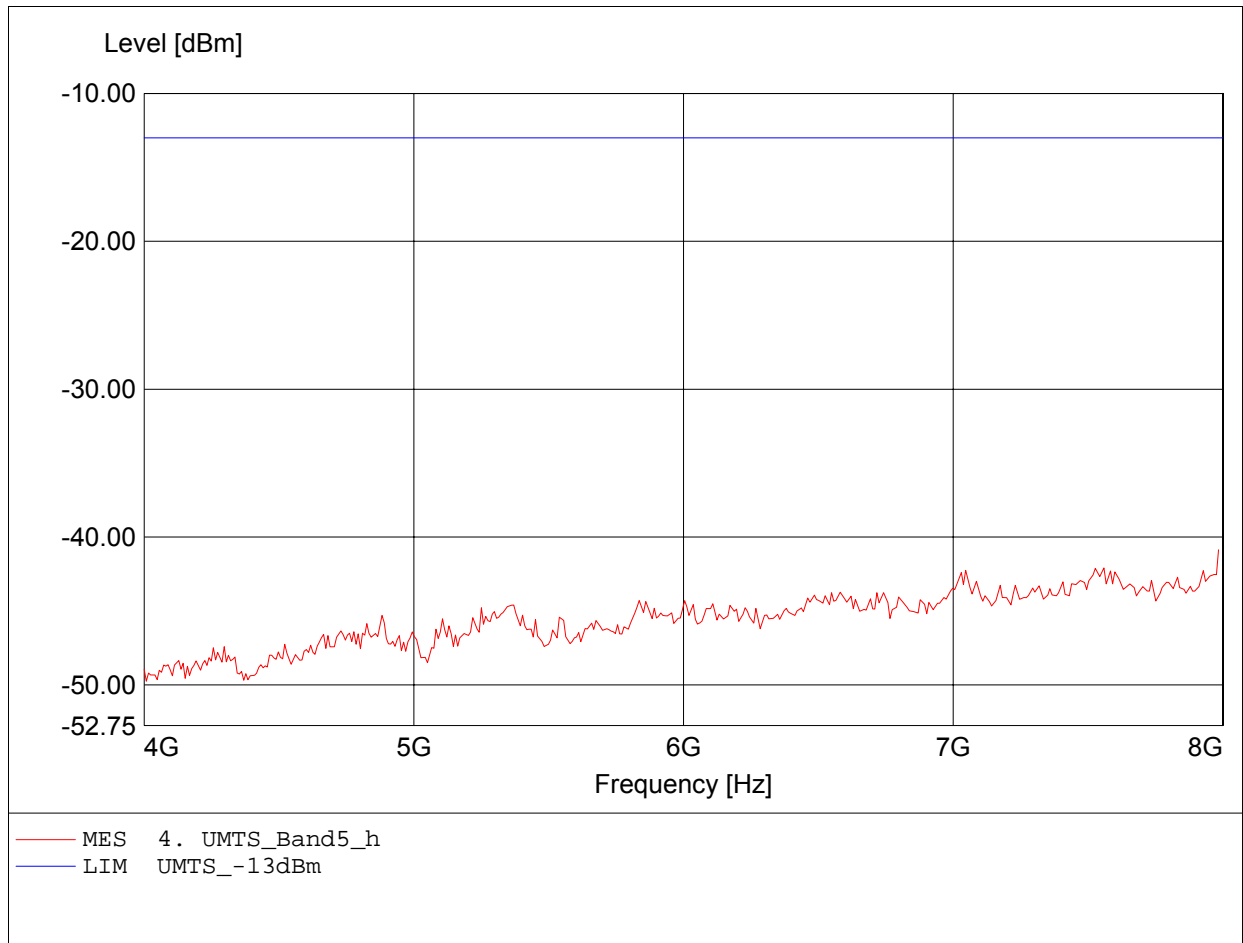


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.198GHz, Pmax: -38.09dBm, RBW: 1MHz

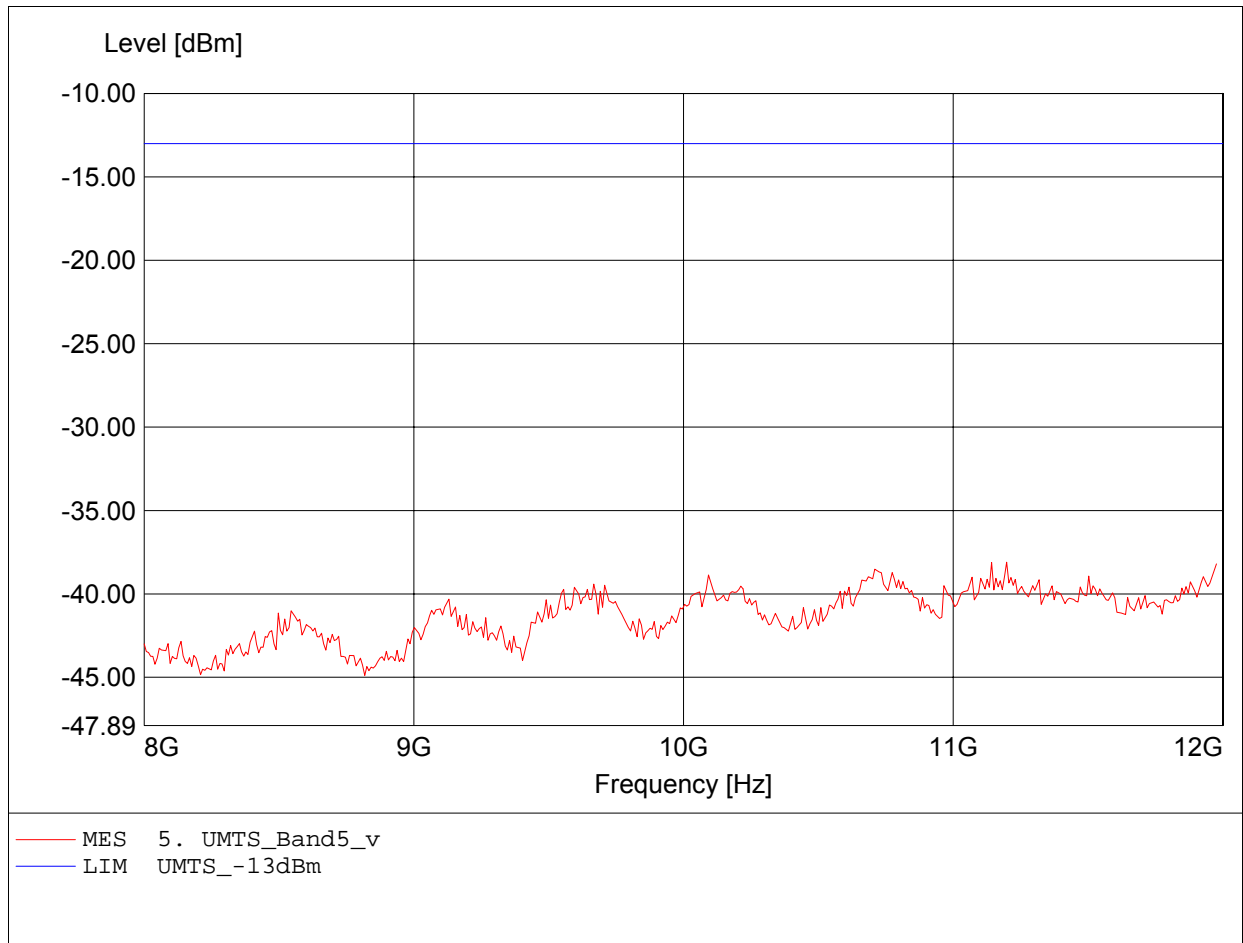


Radiated Emissions Tx
UMTS Operating Band V

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 4232
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.100GHz, Pmax: -36.98dBm, RBW: 1MHz

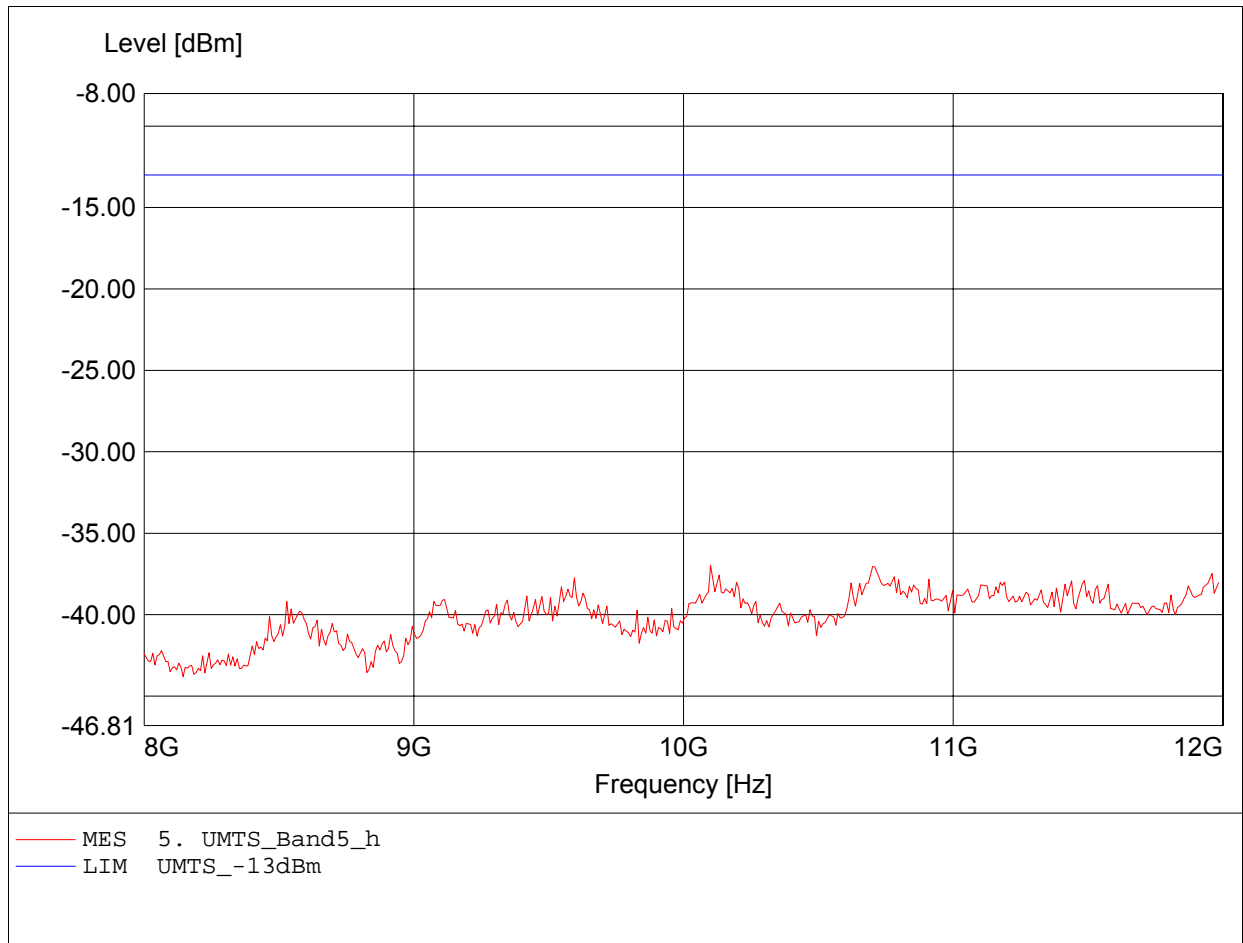


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Pmax: -67.23dBm, RBW: 100kHz

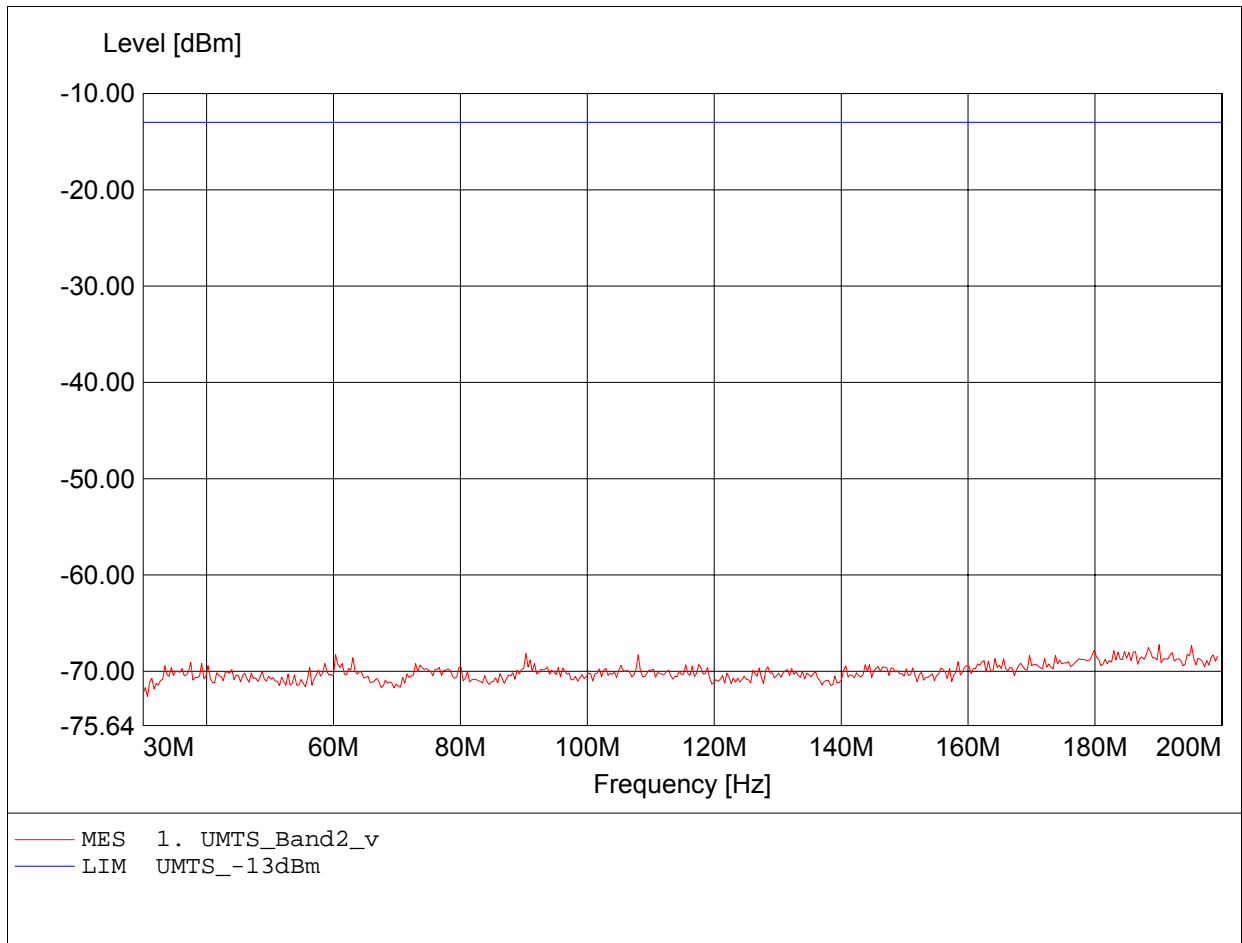


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 60.661MHz, Pmax: -67.58dBm, RBW: 100kHz

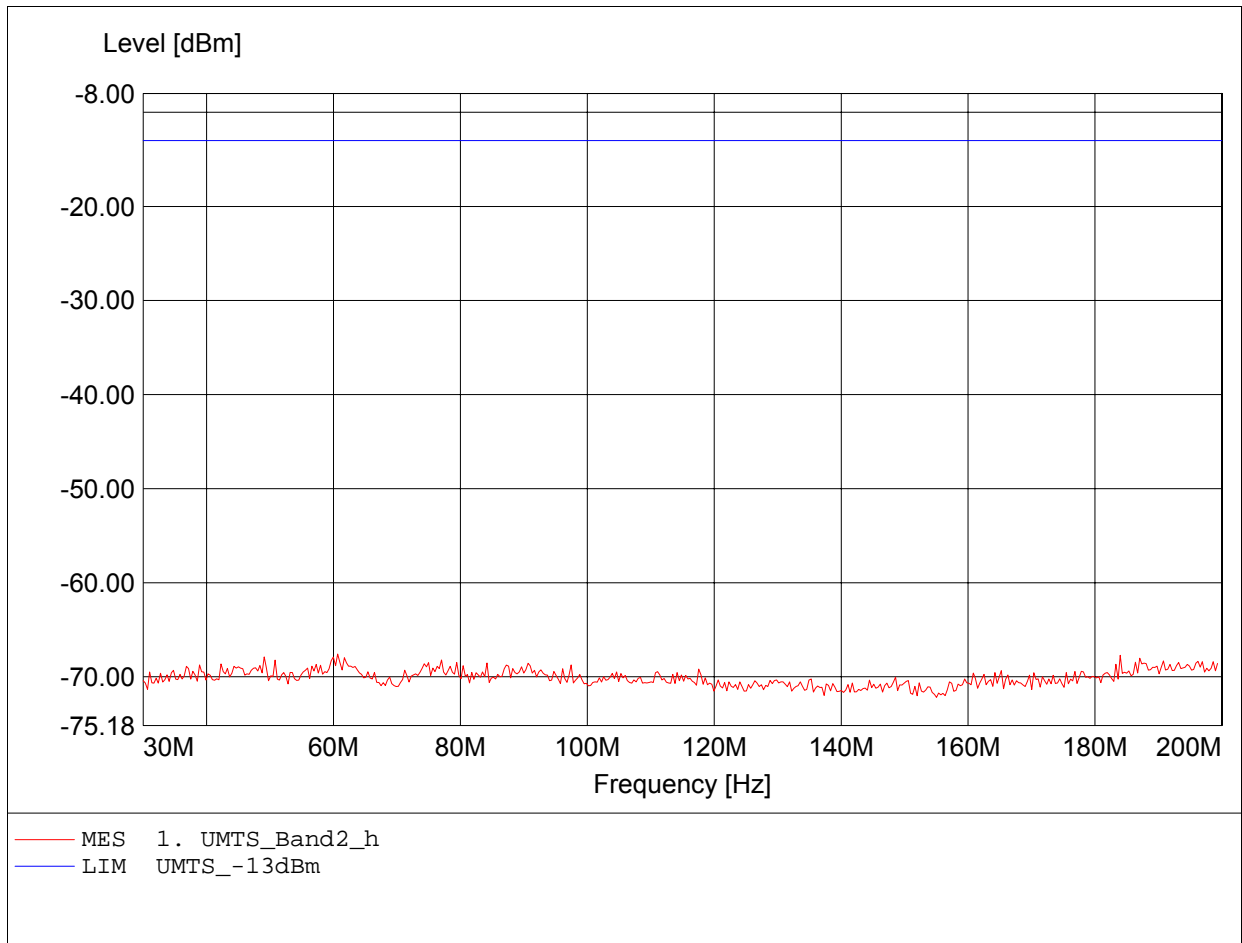


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 988.778MHz, Pmax: -53.29dBm, RBW: 100kHz

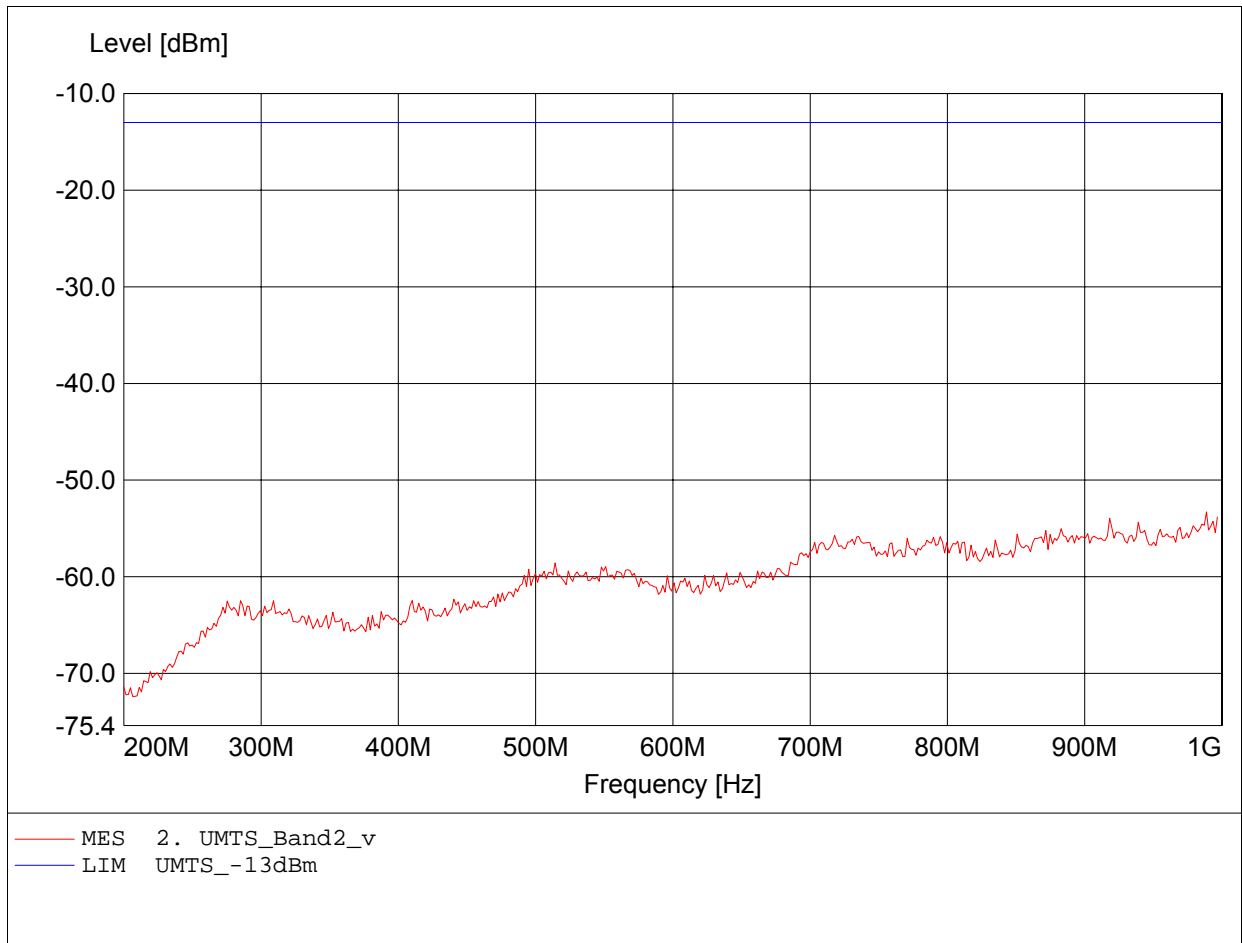


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 857.315MHz, Pmax: -52.65dBm, RBW: 100kHz

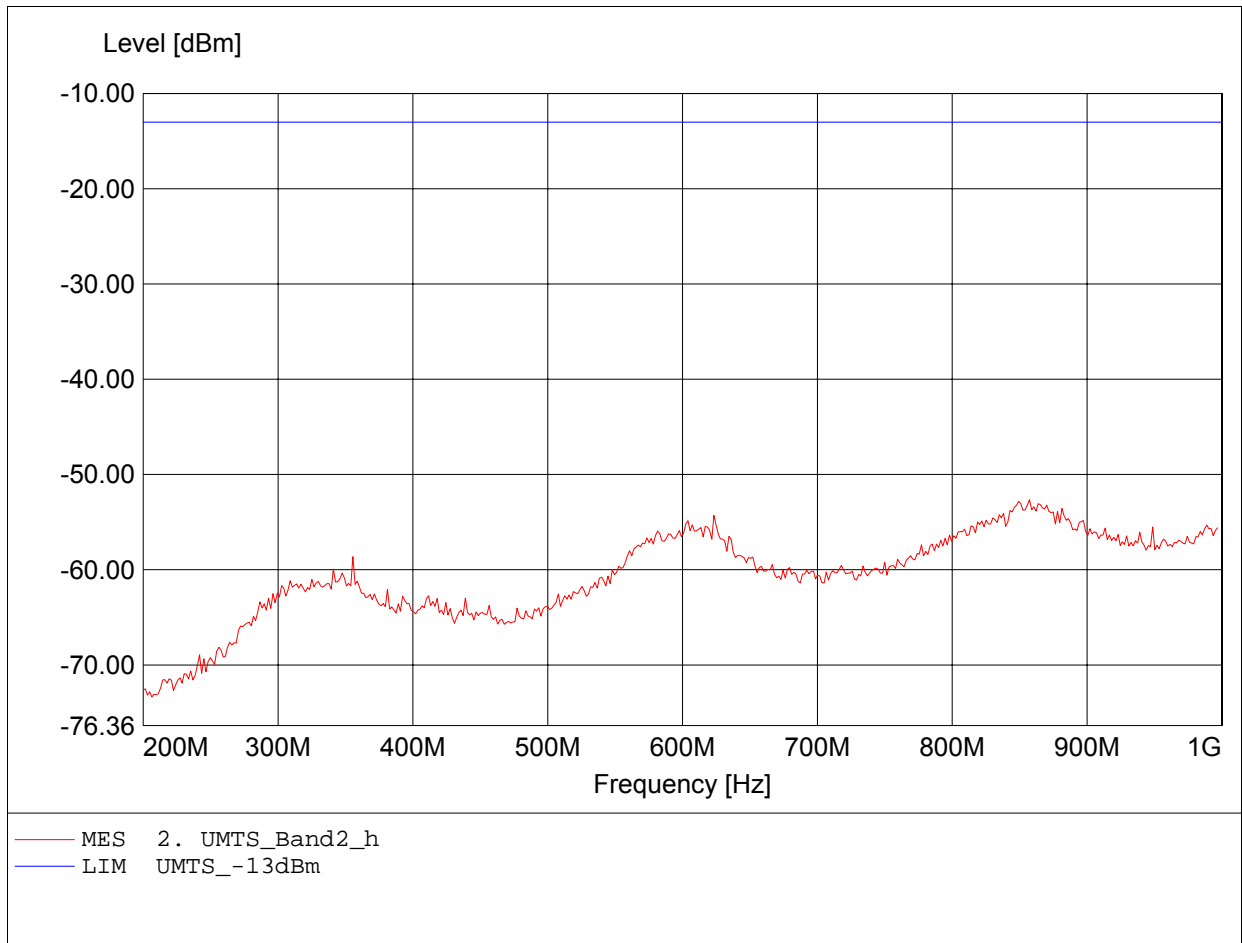


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9263
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.842GHz, Pmax: -26.60dBm, RBW: 1MHz/3kHz

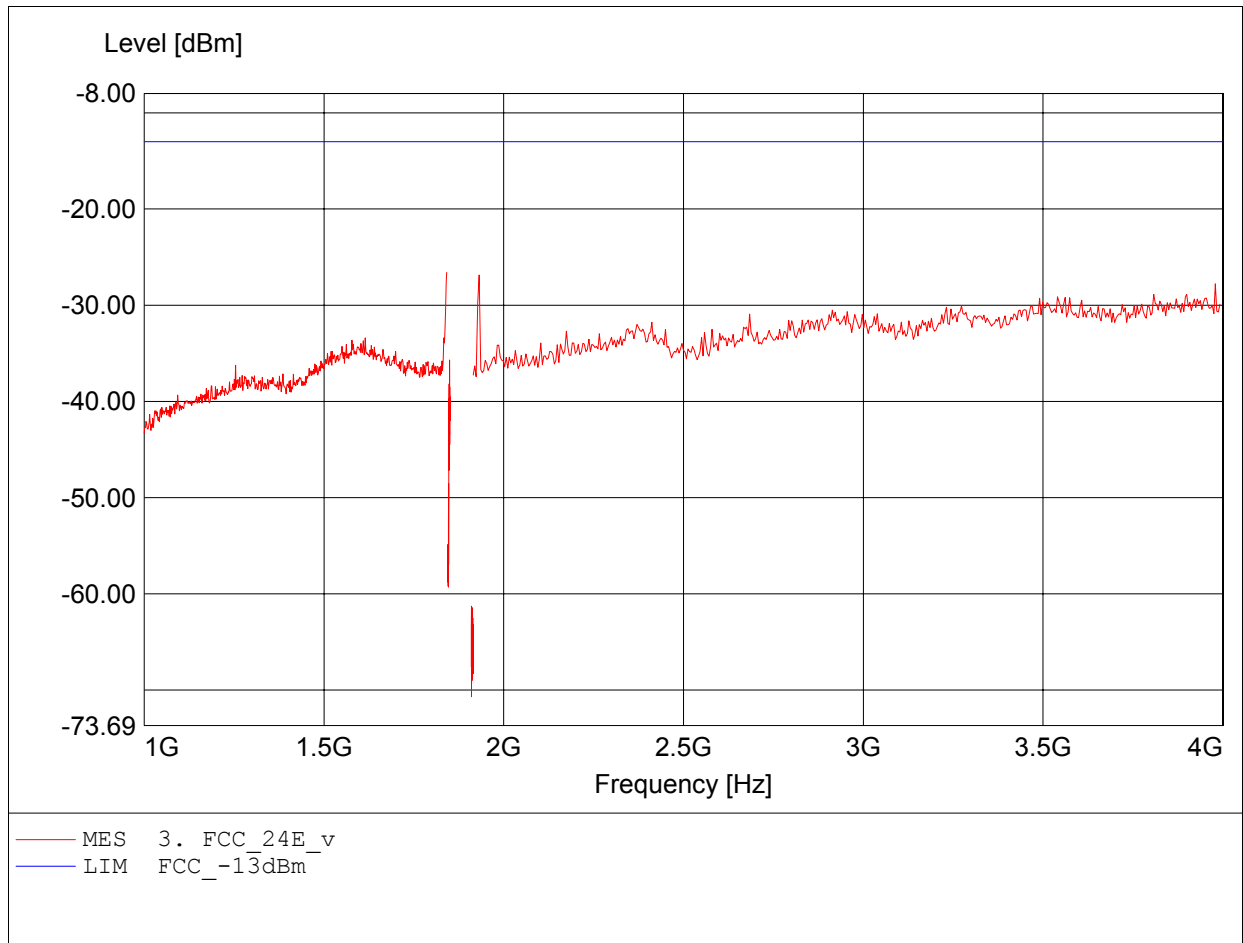


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9263
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.932GHz, Pmax: -28.19dBm, RBW: 1MHz/3kHz

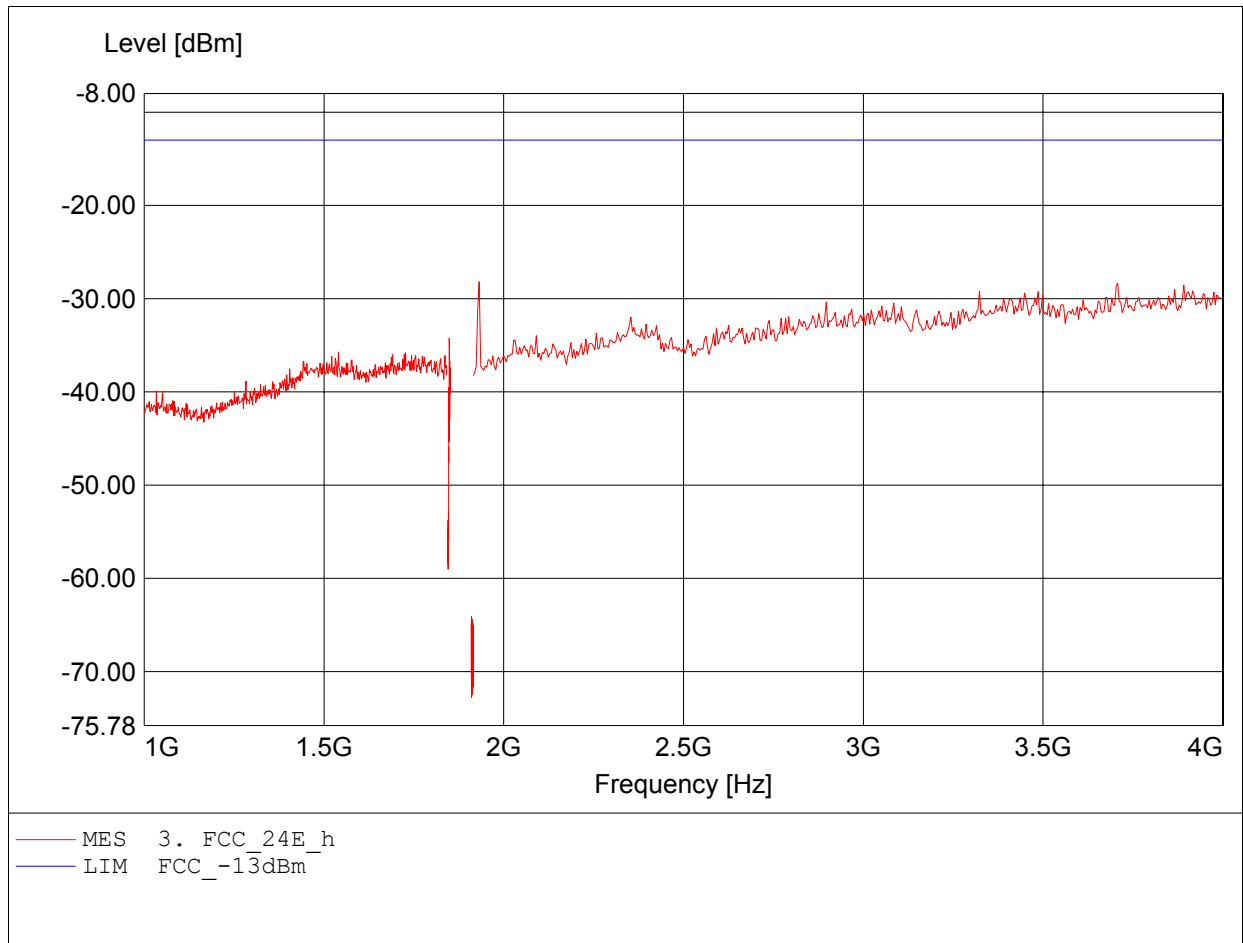


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9263
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.563GHz, Pmax: -38.82dBm, RBW: 1MHz

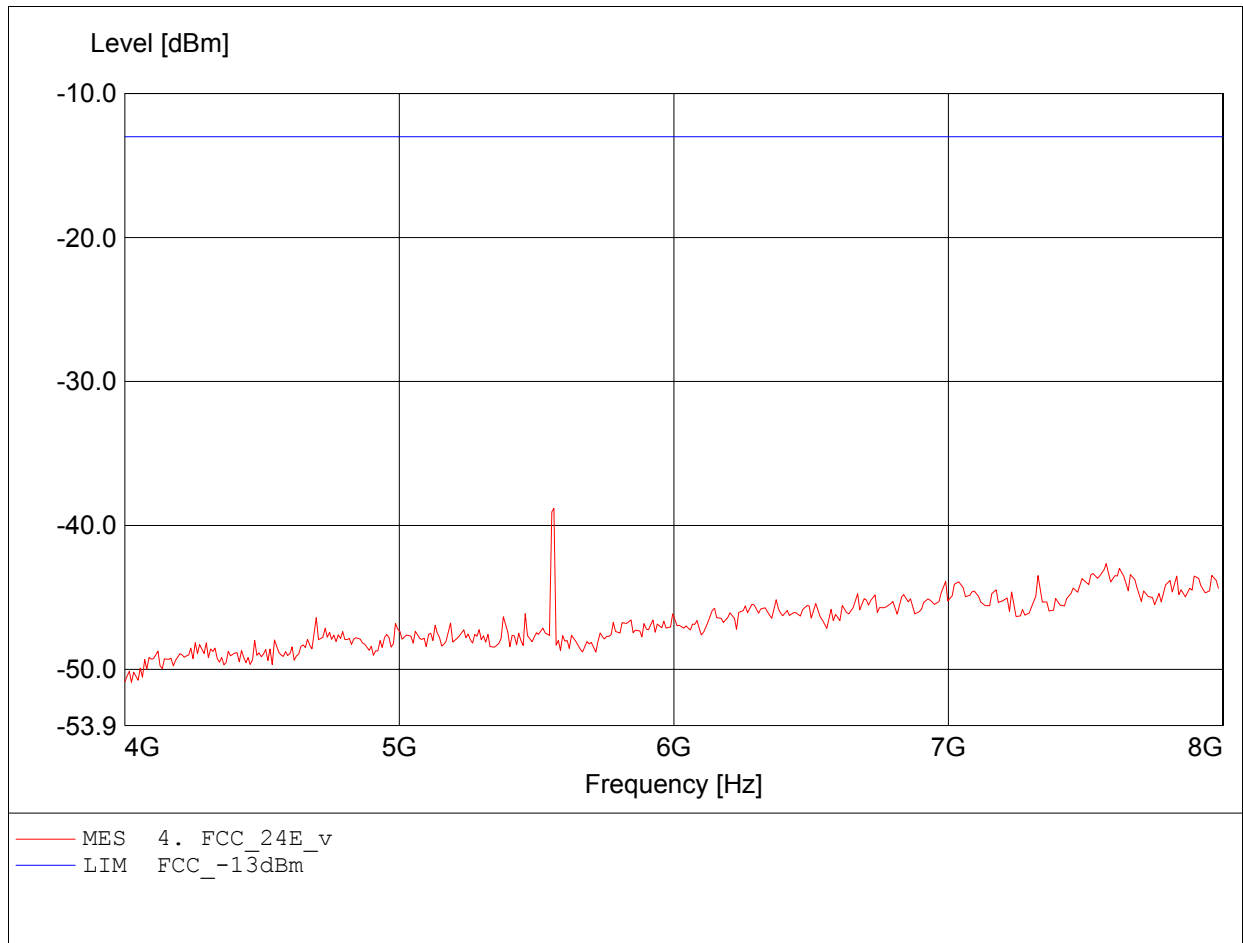


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9263
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.563GHz, Pmax: -34.18dBm, RBW: 1MHz

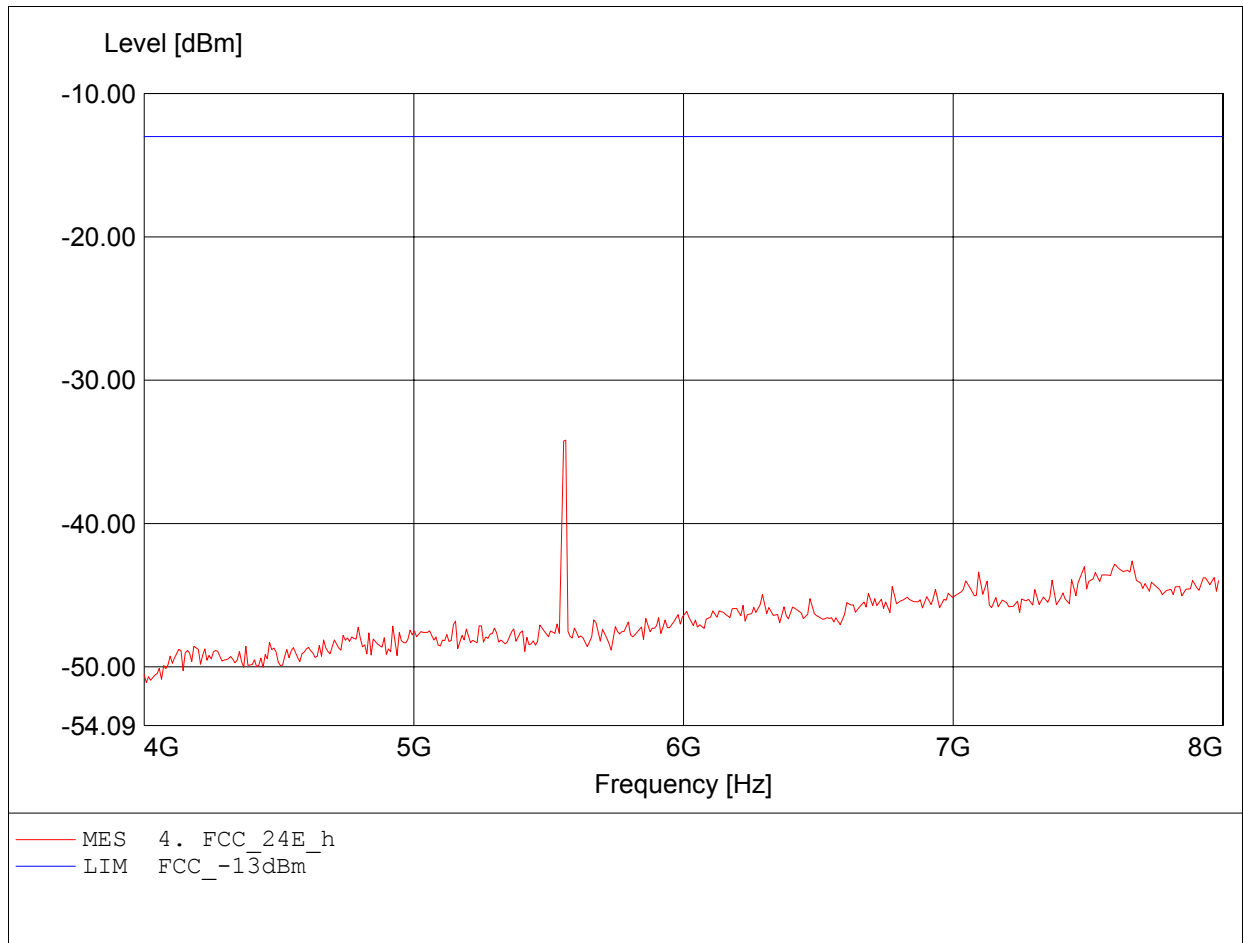


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.701GHz, Pmax: -38.19dBm, RBW: 1MHz

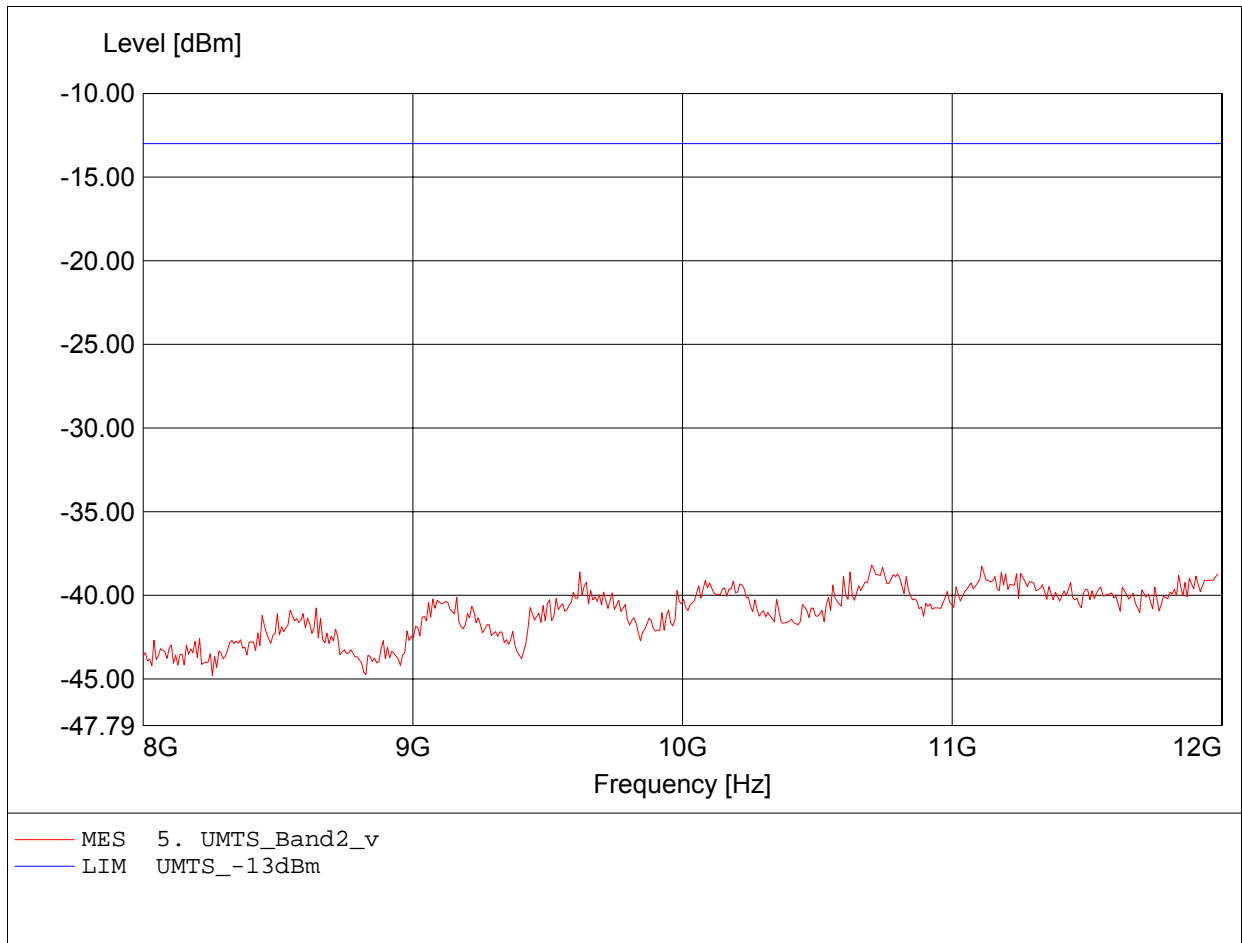


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.725GHz, Pmax: -37.59dBm, RBW: 1MHz

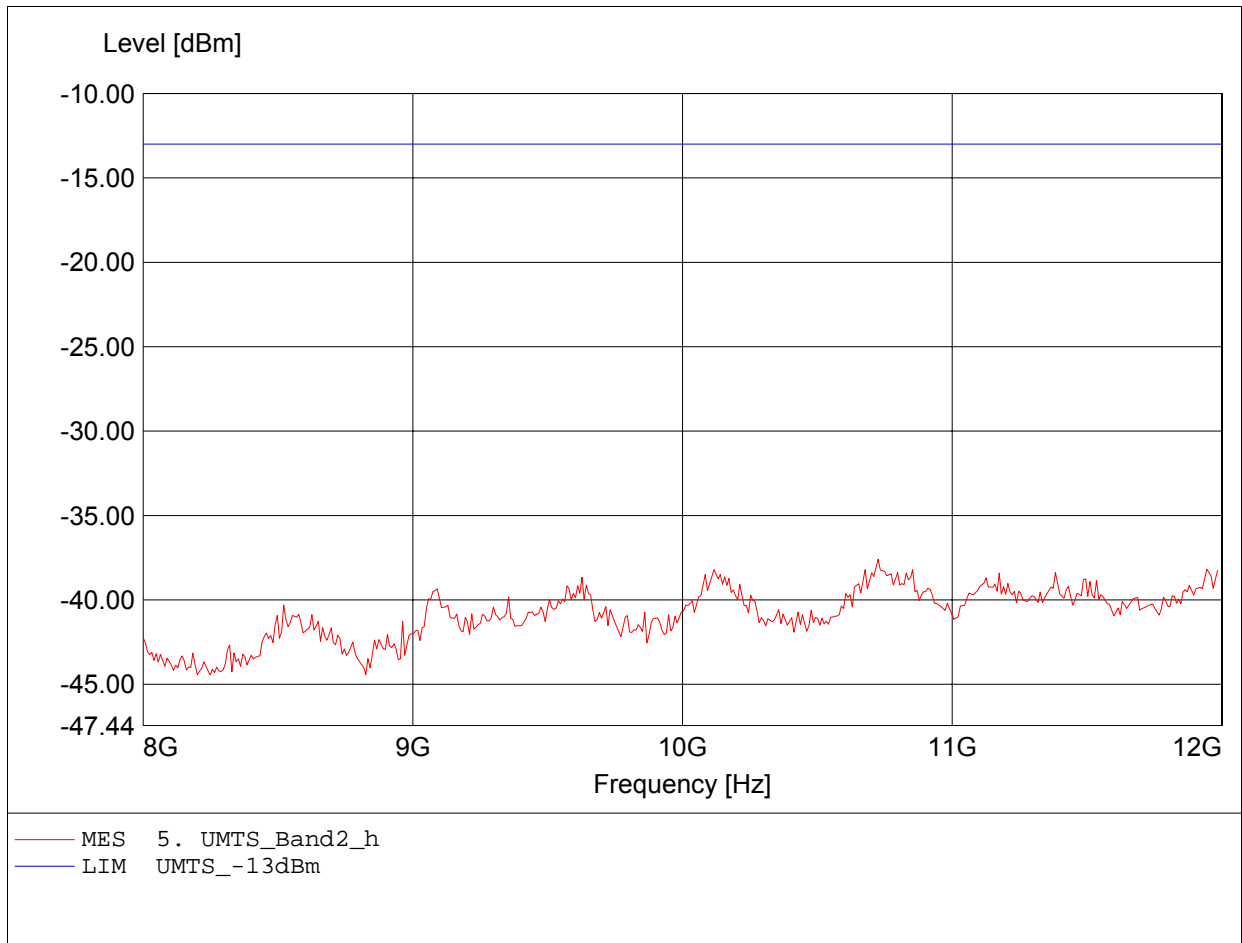


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.860GHz, Pmax: -30.00dBm, RBW: 1MHz

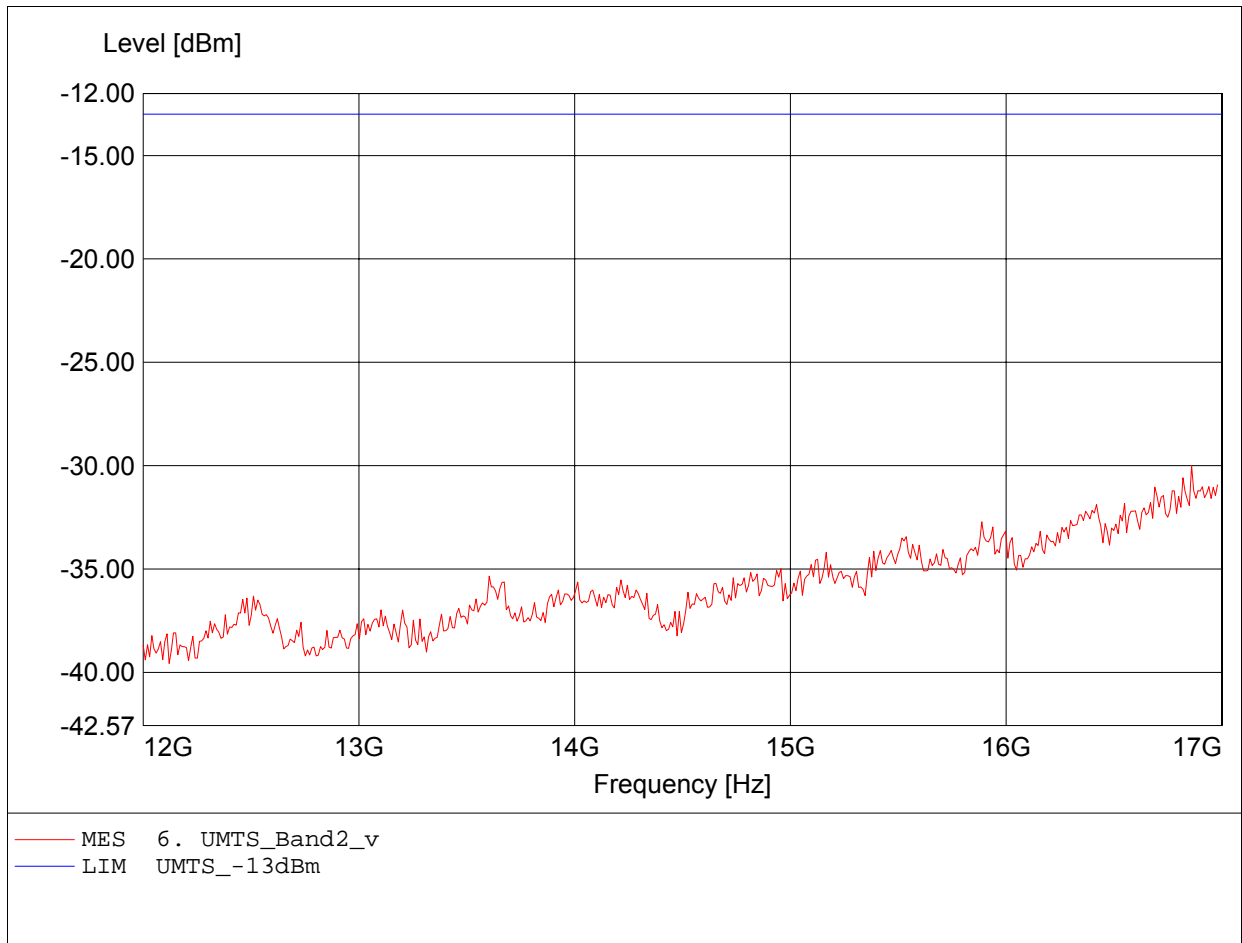


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.930GHz, Pmax: -29.69dBm, RBW: 1MHz

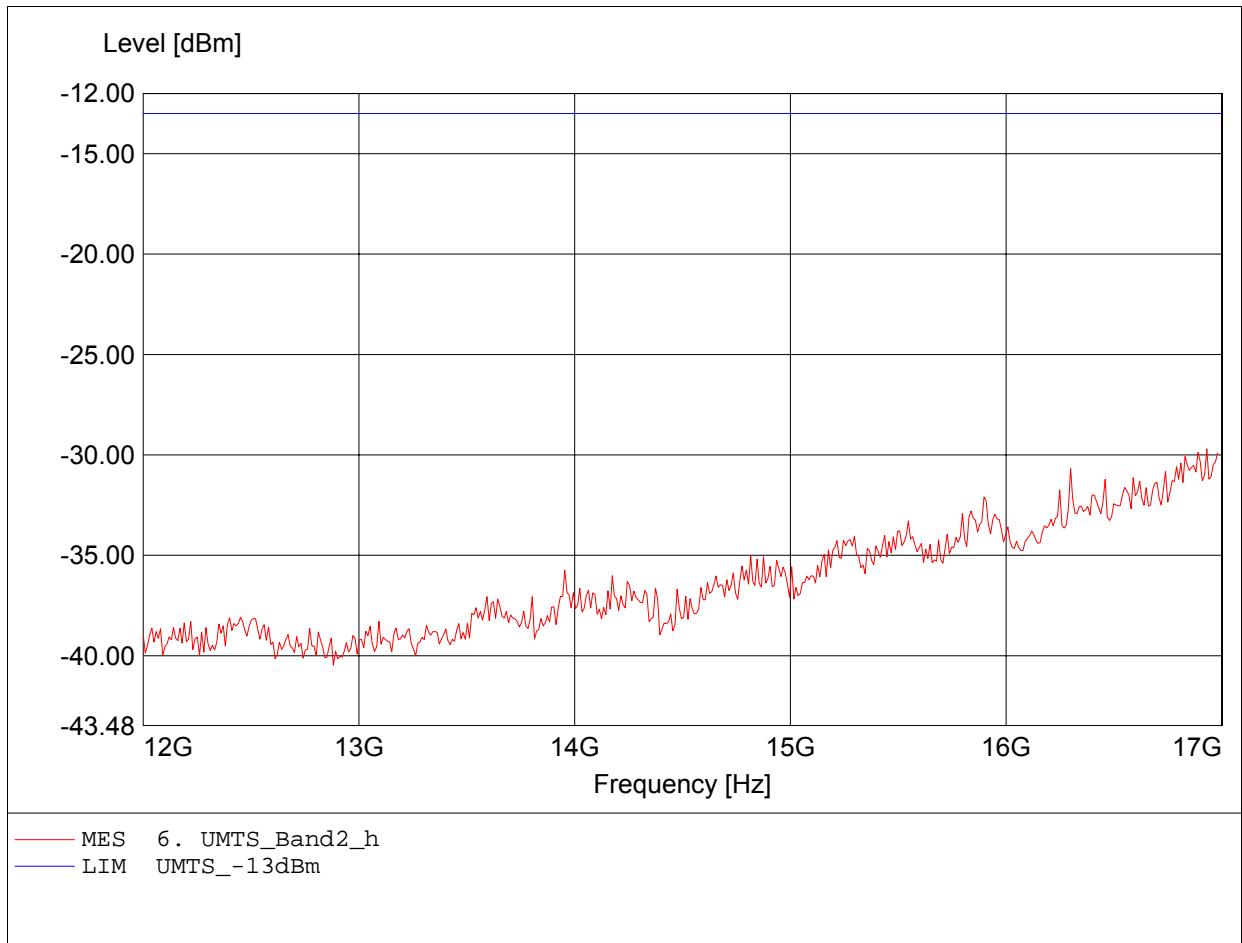


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.043GHz, Pmax: -24.03dBm, RBW: 1MHz

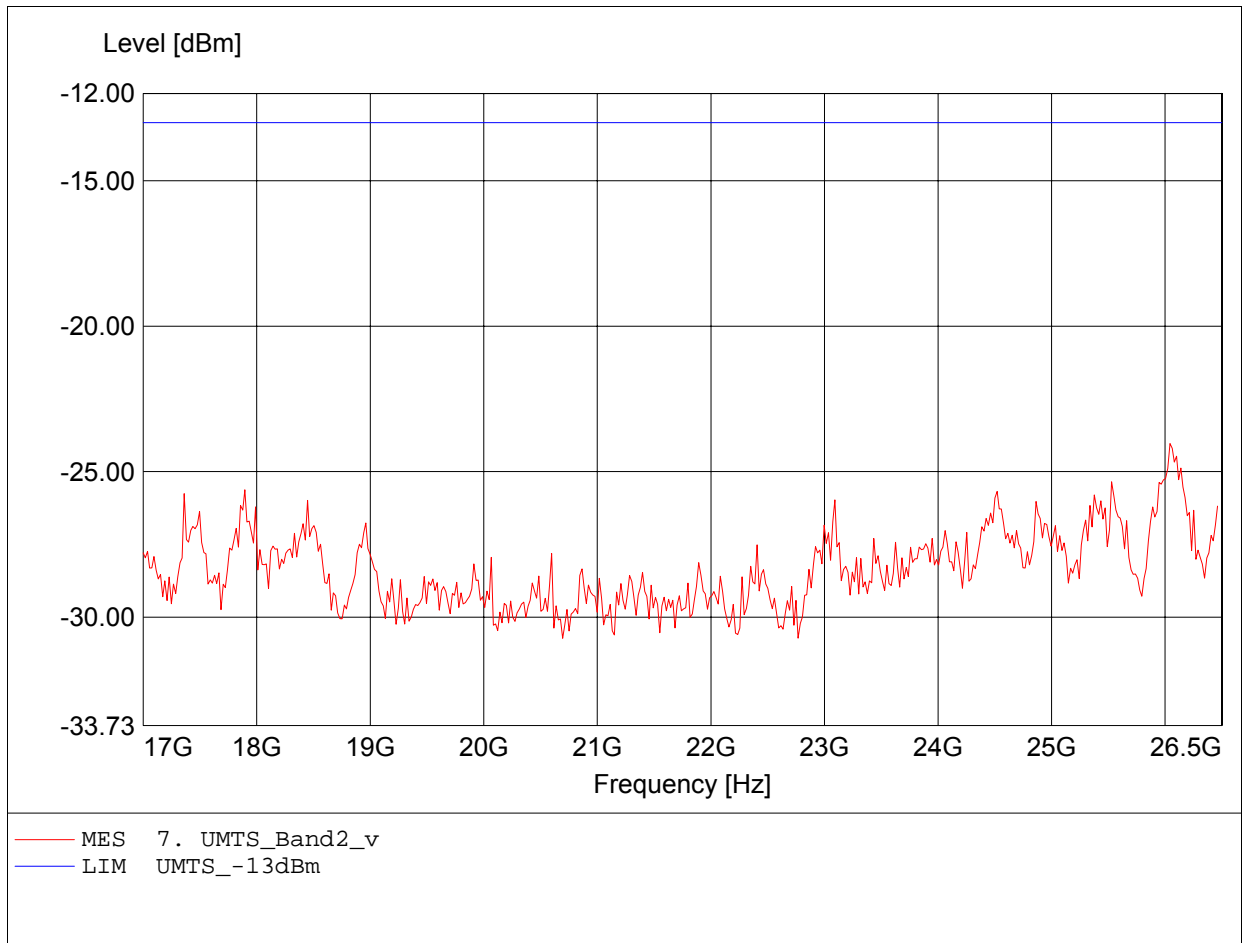


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.958GHz, Pmax: -24.88dBm, RBW: 1MHz

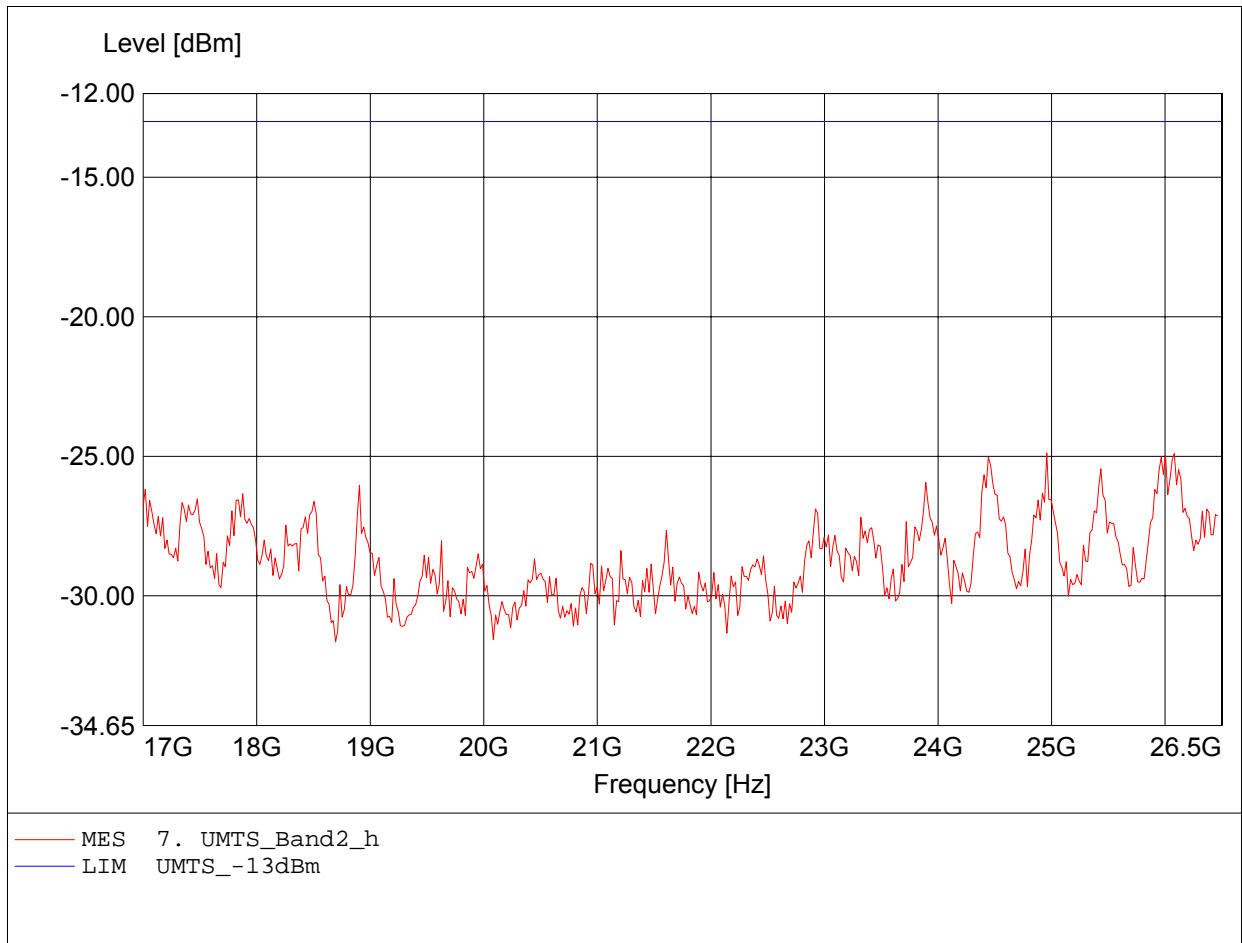


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.010MHz, Pmax: -67.25dBm, RBW: 100kHz

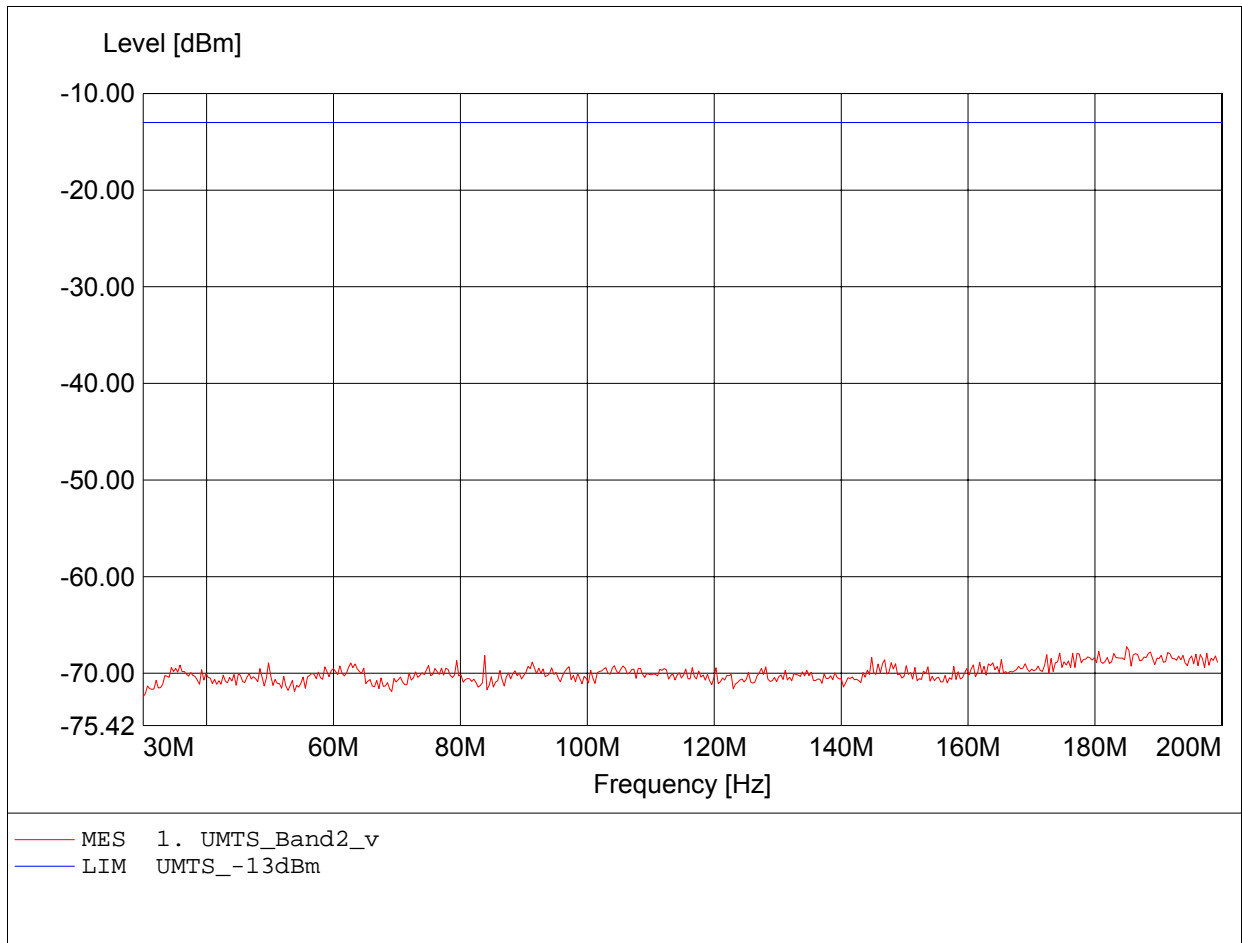


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.186MHz, Pmax: -67.03dBm, RBW: 100kHz

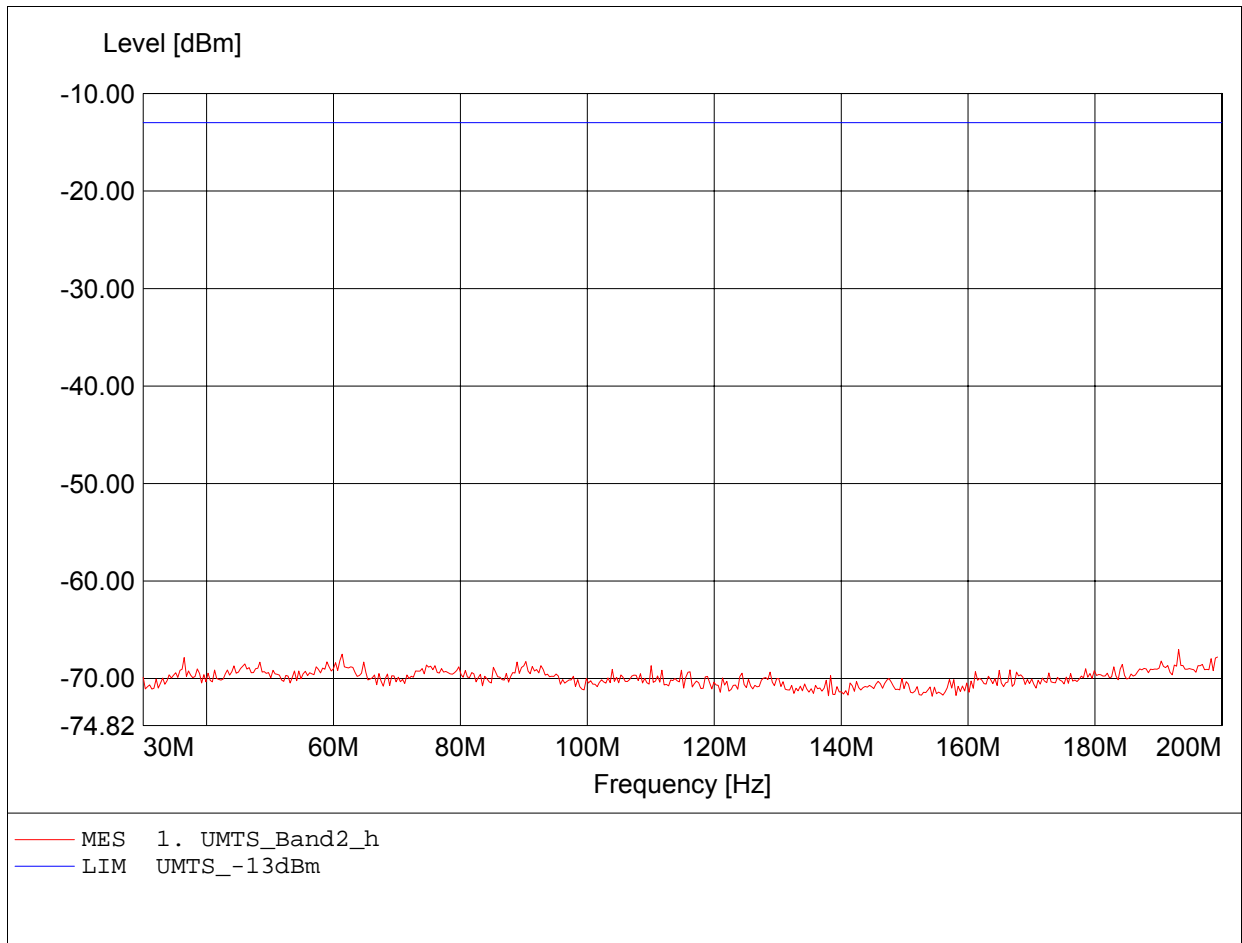


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 990.381MHz, Pmax: -54.13dBm, RBW: 100kHz

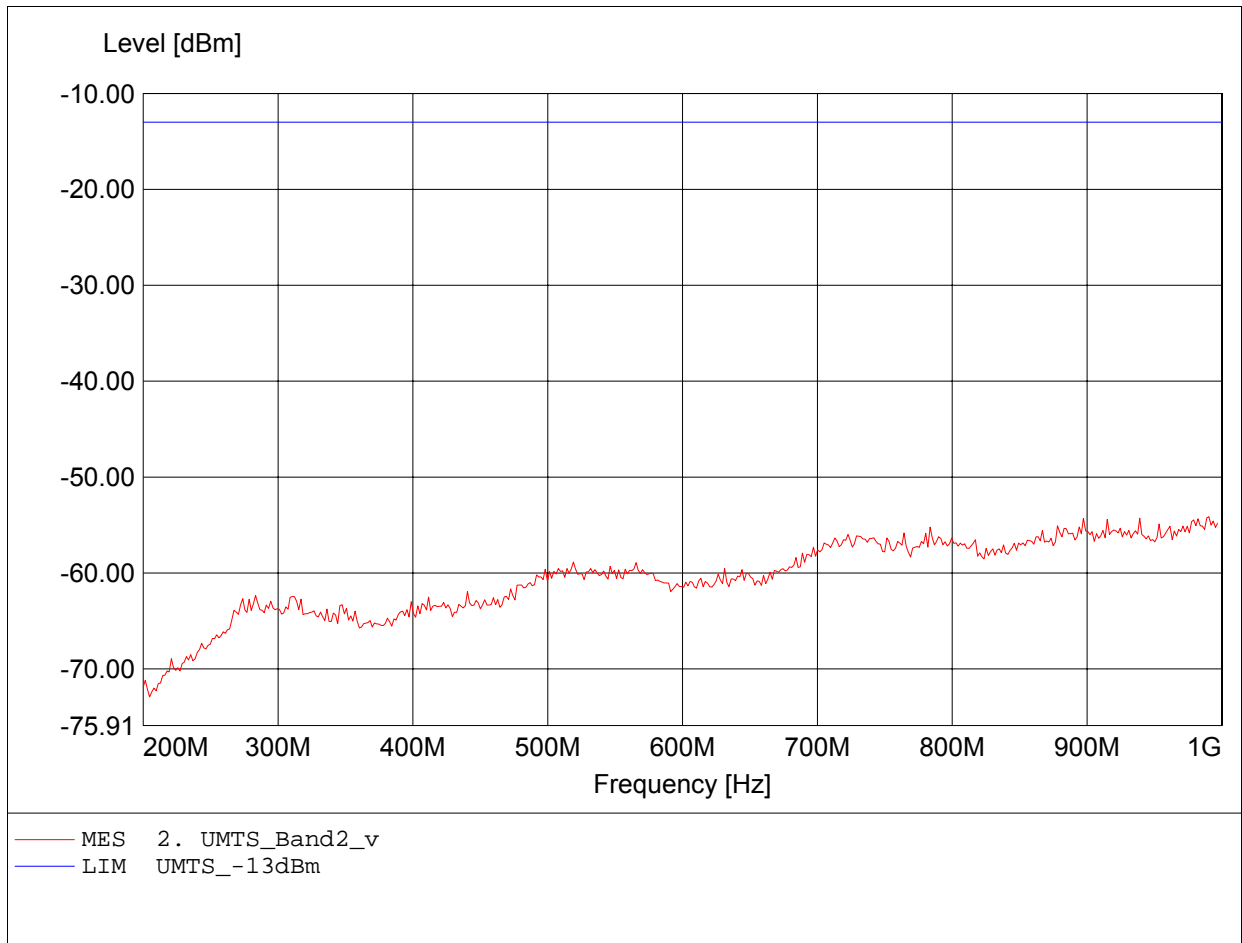


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 850.902MHz, Pmax: -52.54dBm, RBW: 100kHz

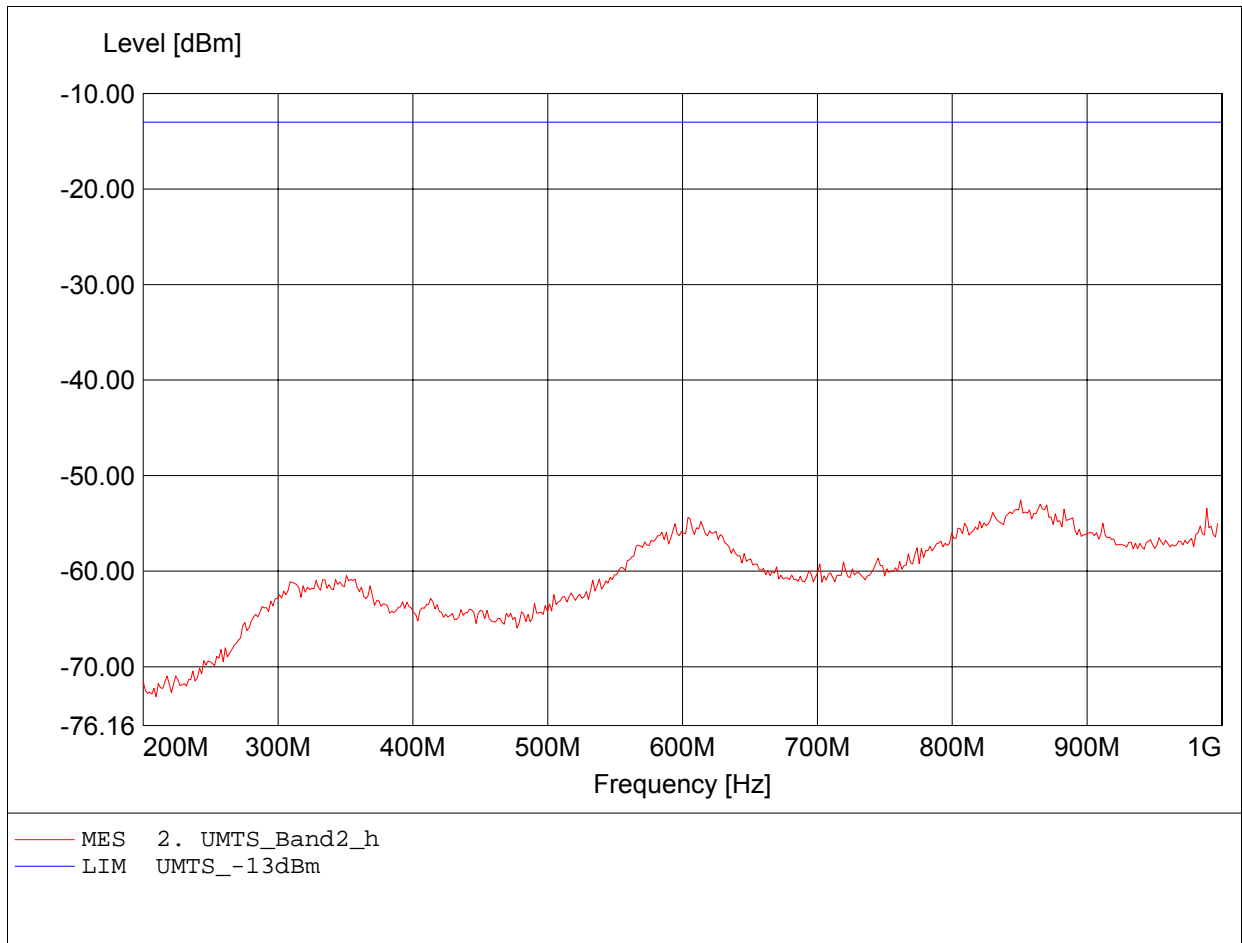


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9400
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.961GHz, Pmax: -27.49dBm, RBW: 1MHz/3kHz

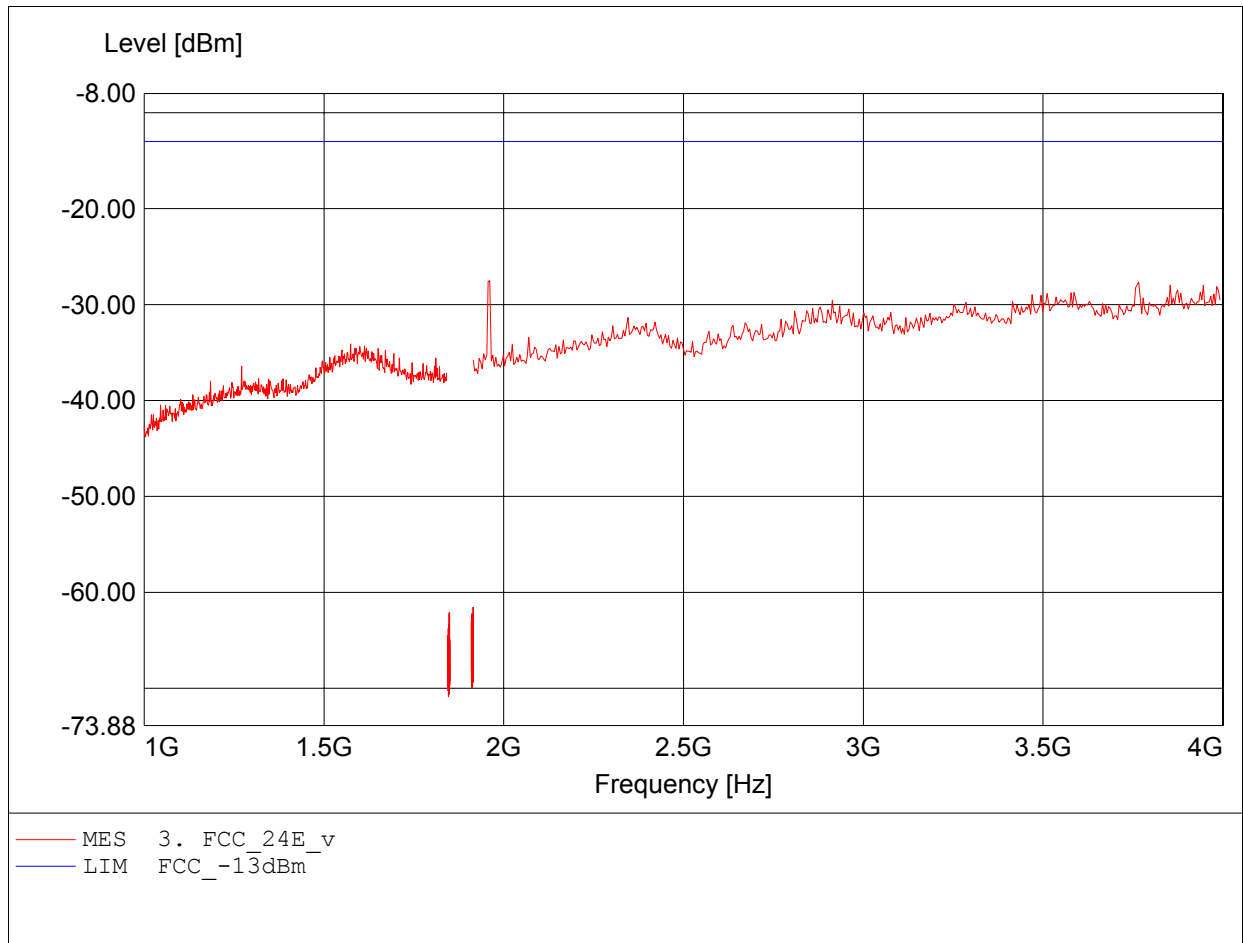


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9400
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.961GHz, Pmax: -26.84dBm, RBW: 1MHz/3kHz

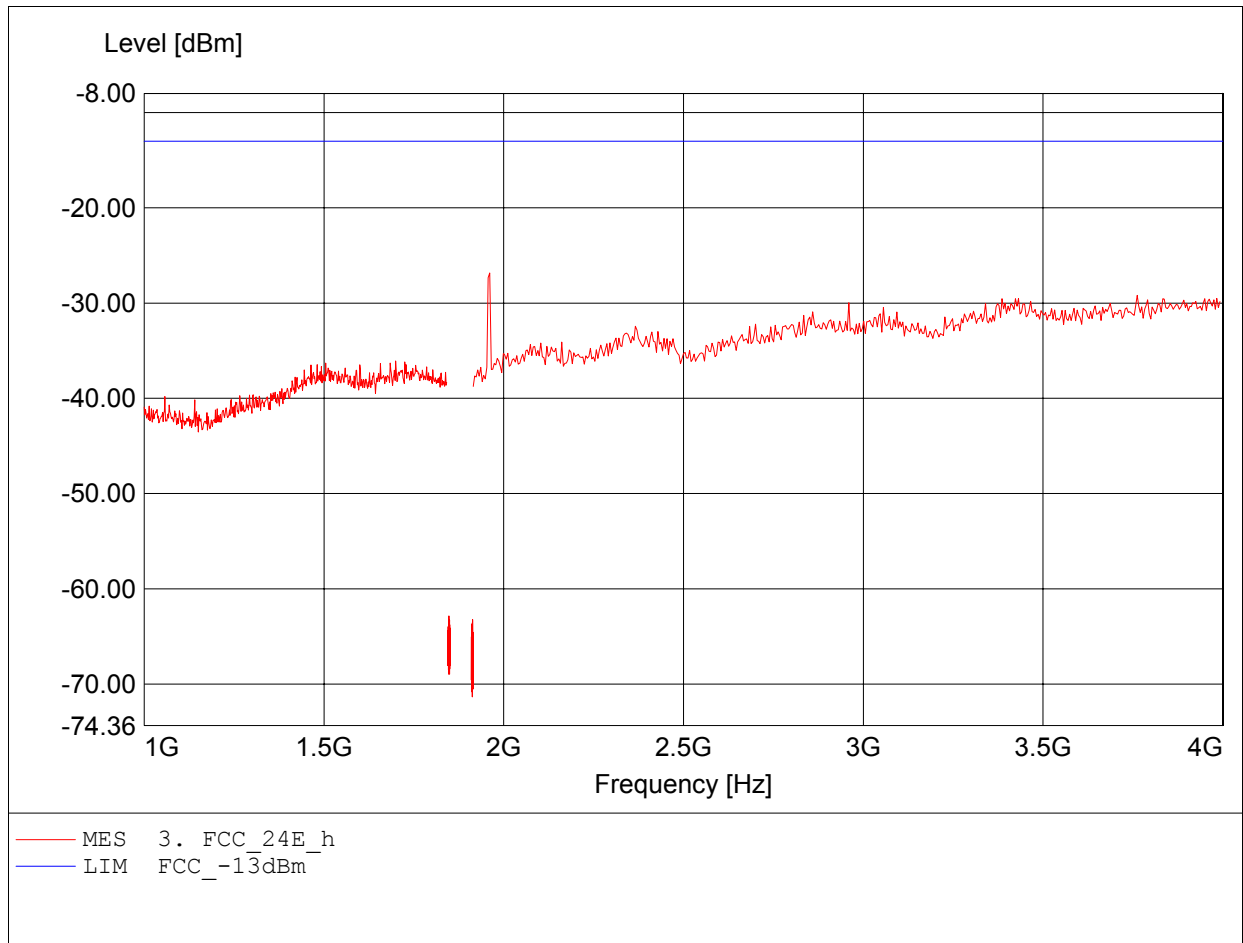


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9400
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.591GHz, Pmax: -42.61dBm, RBW: 1MHz

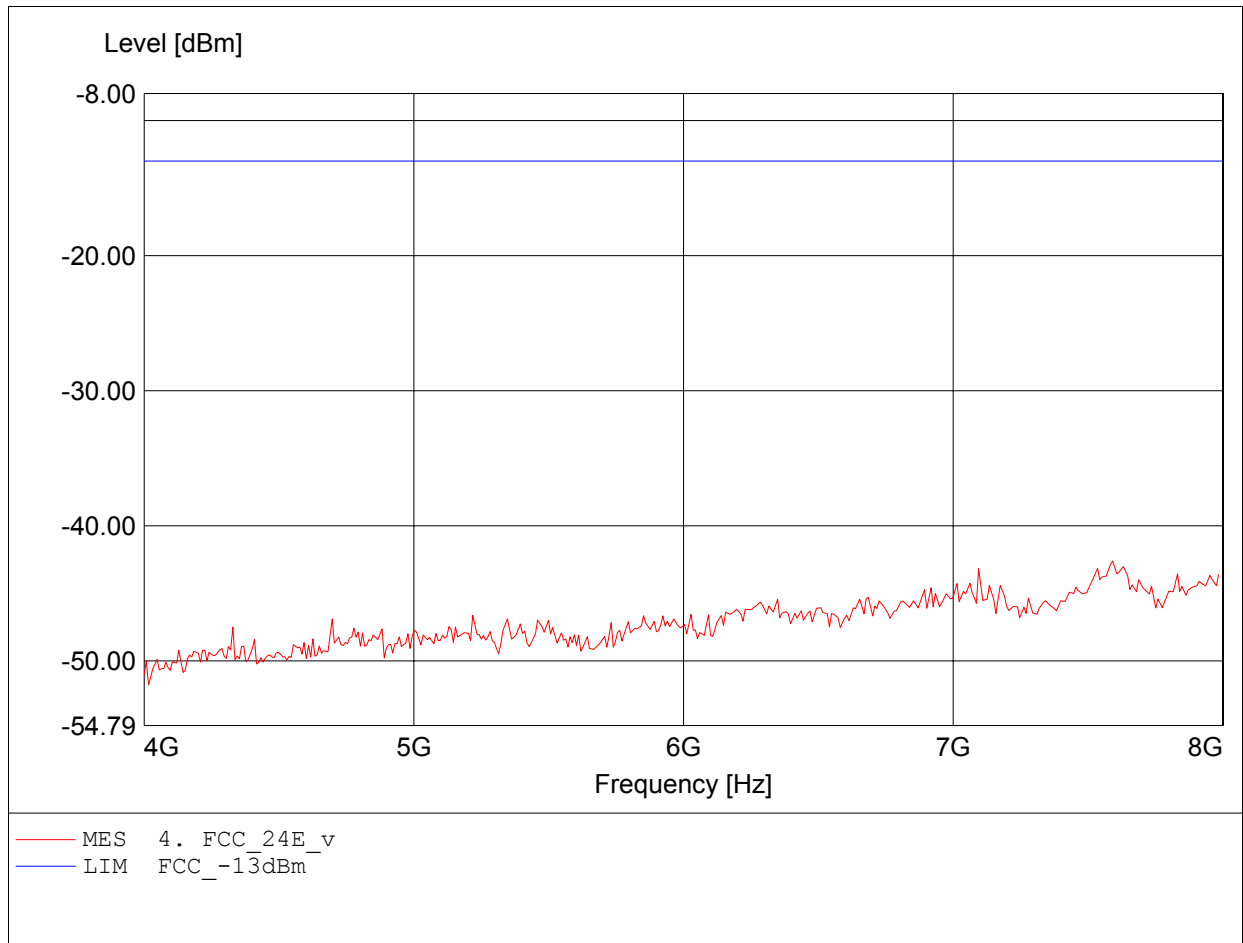


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9400
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.643GHz, Pmax: -36.81dBm, RBW: 1MHz

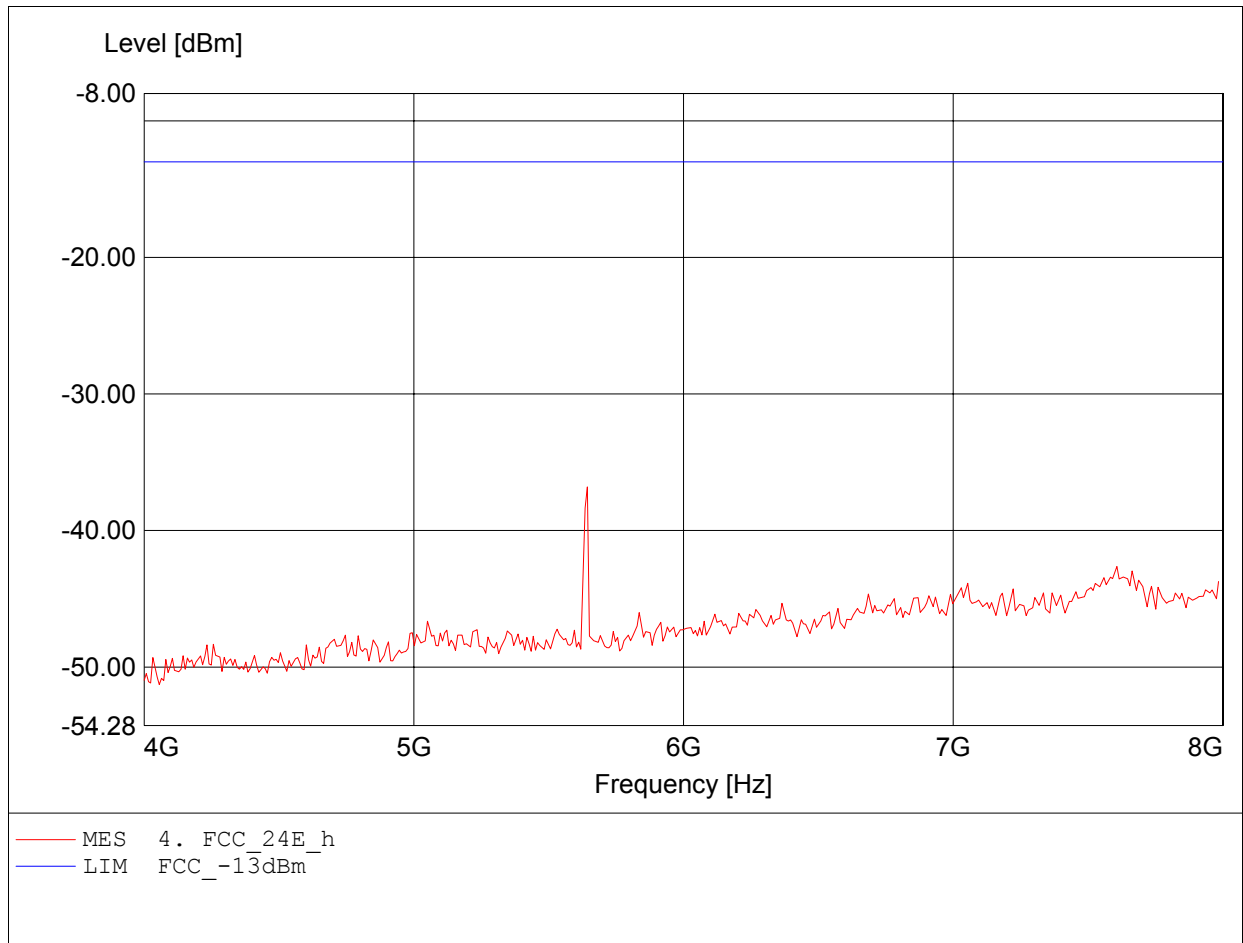


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.166GHz, Pmax: -38.08dBm, RBW: 1MHz

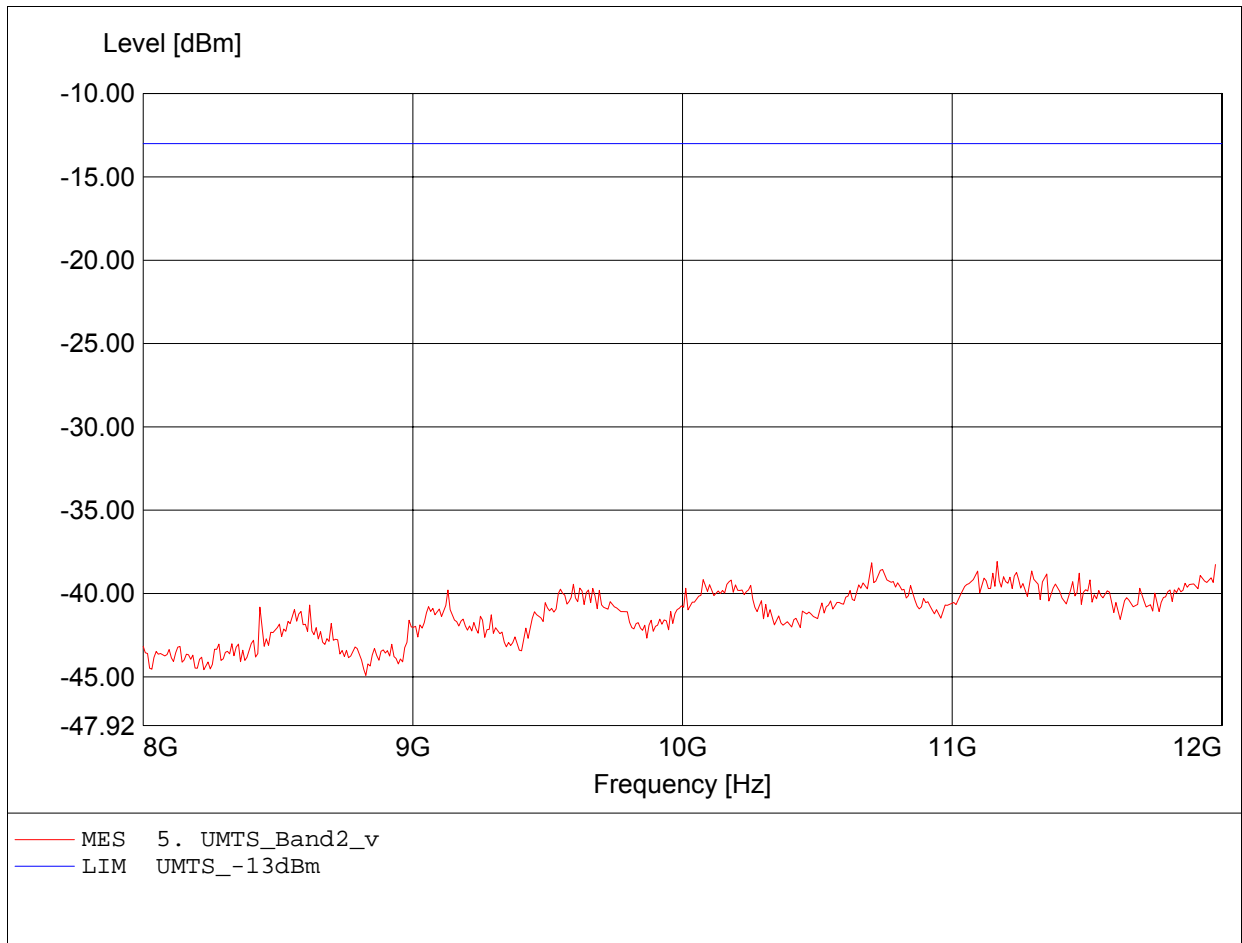


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.725GHz, Pmax: -37.02dBm, RBW: 1MHz

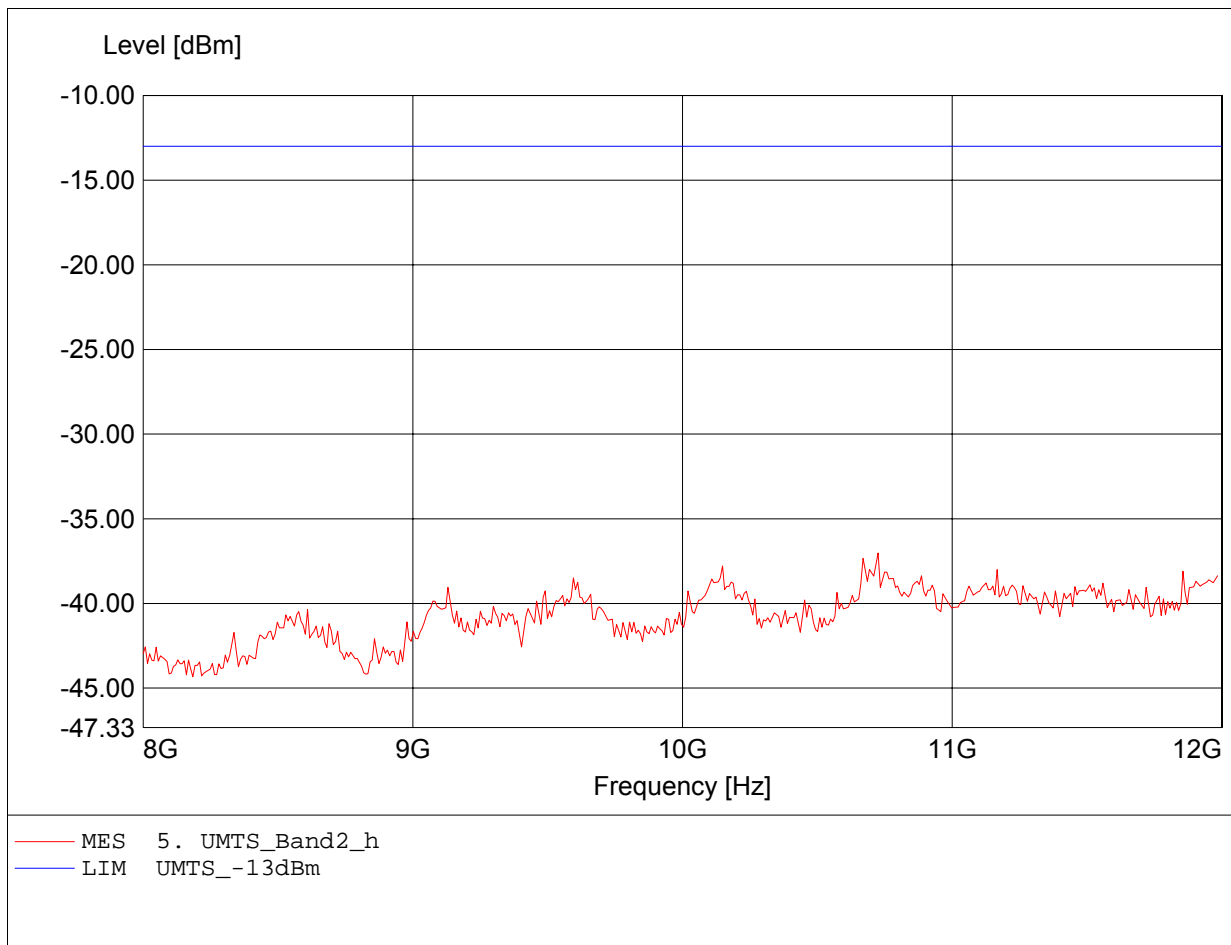


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.880GHz, Pmax: -30.45dBm, RBW: 1MHz

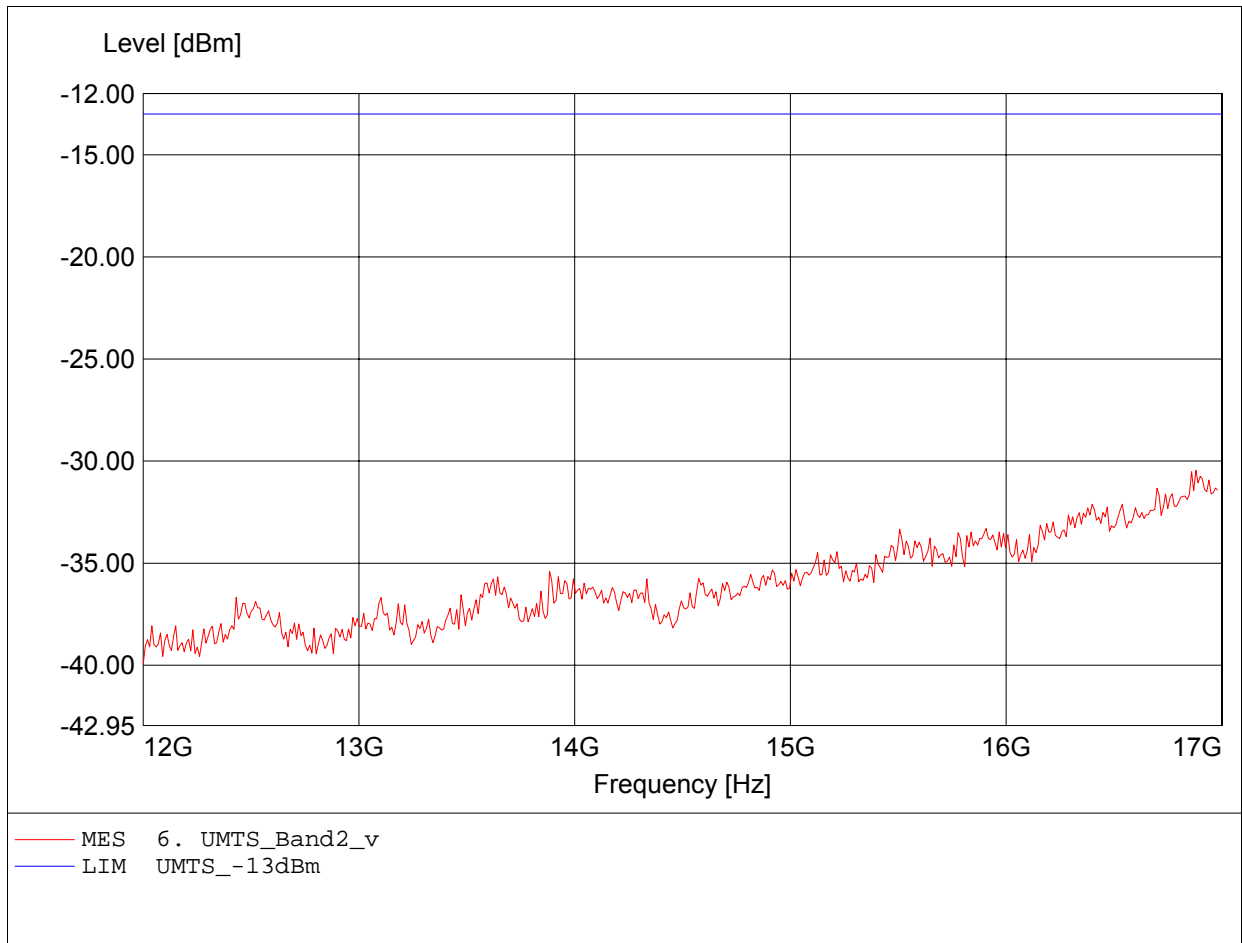


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.980GHz, Pmax: -29.20dBm, RBW: 1MHz

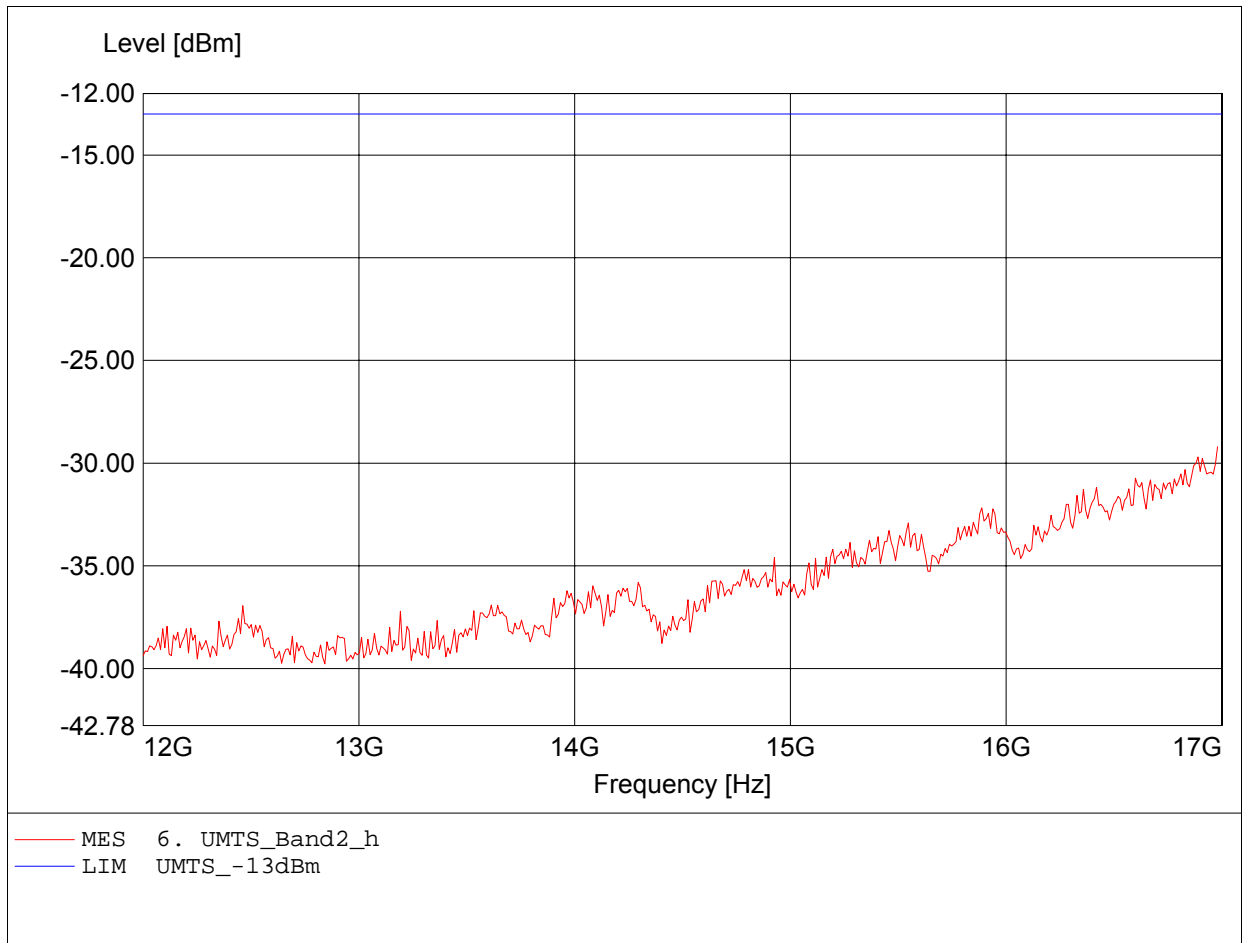


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.100GHz, Pmax: -24.14dBm, RBW: 1MHz

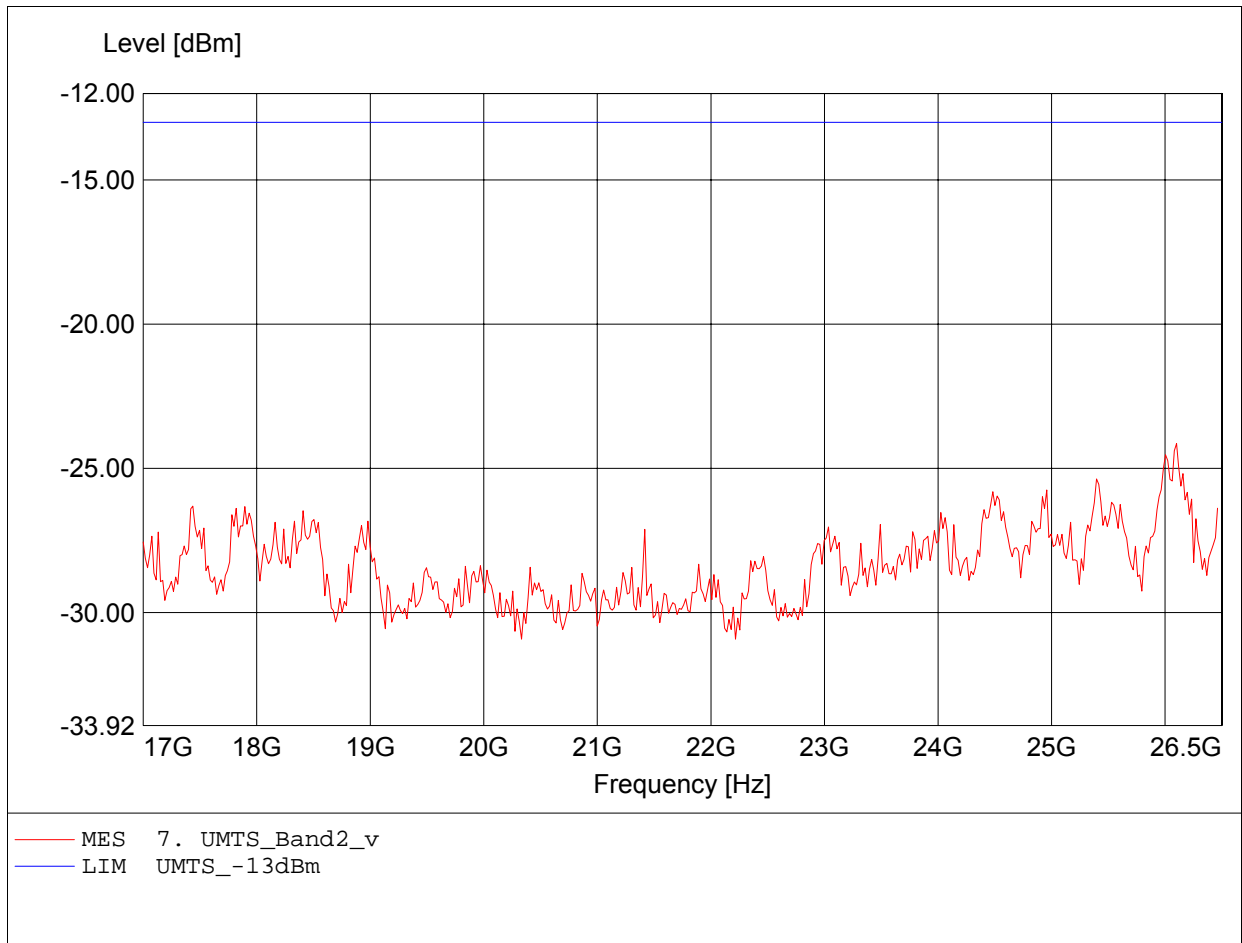


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.948GHz, Pmax: -24.83dBm, RBW: 1MHz

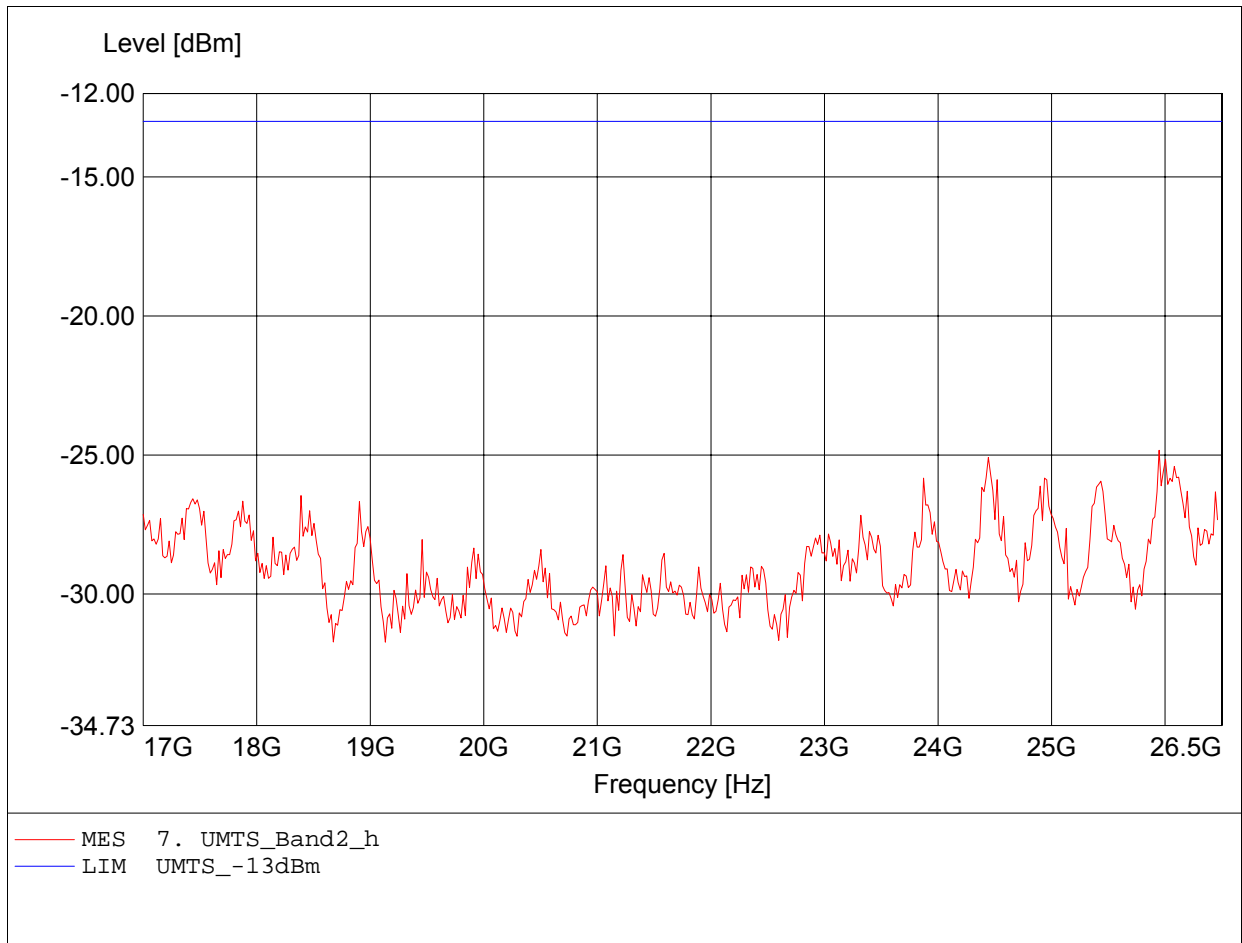


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.824MHz, Pmax: -67.16dBm, RBW: 100kHz

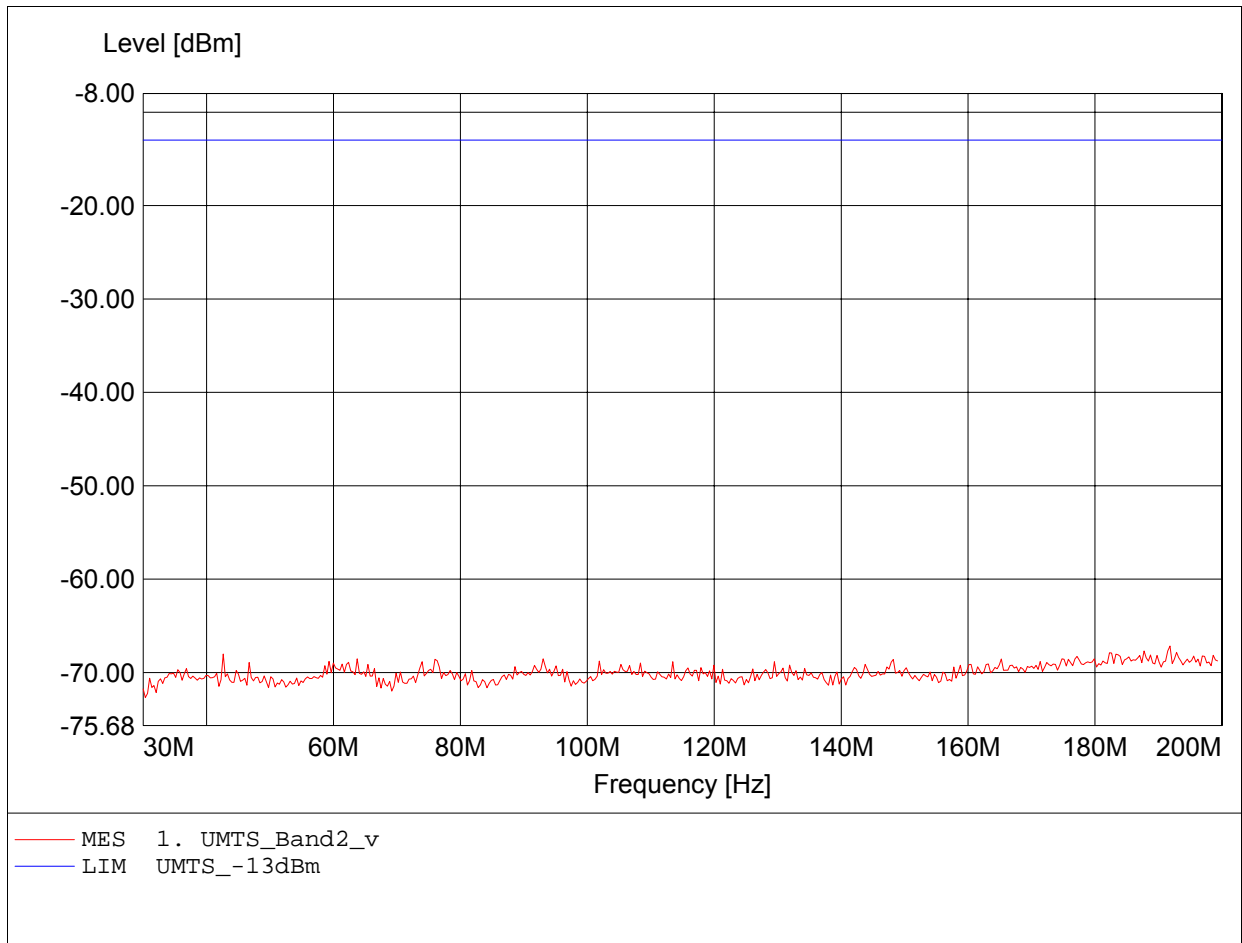


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 92.685MHz, Pmax: -67.38dBm, RBW: 100kHz

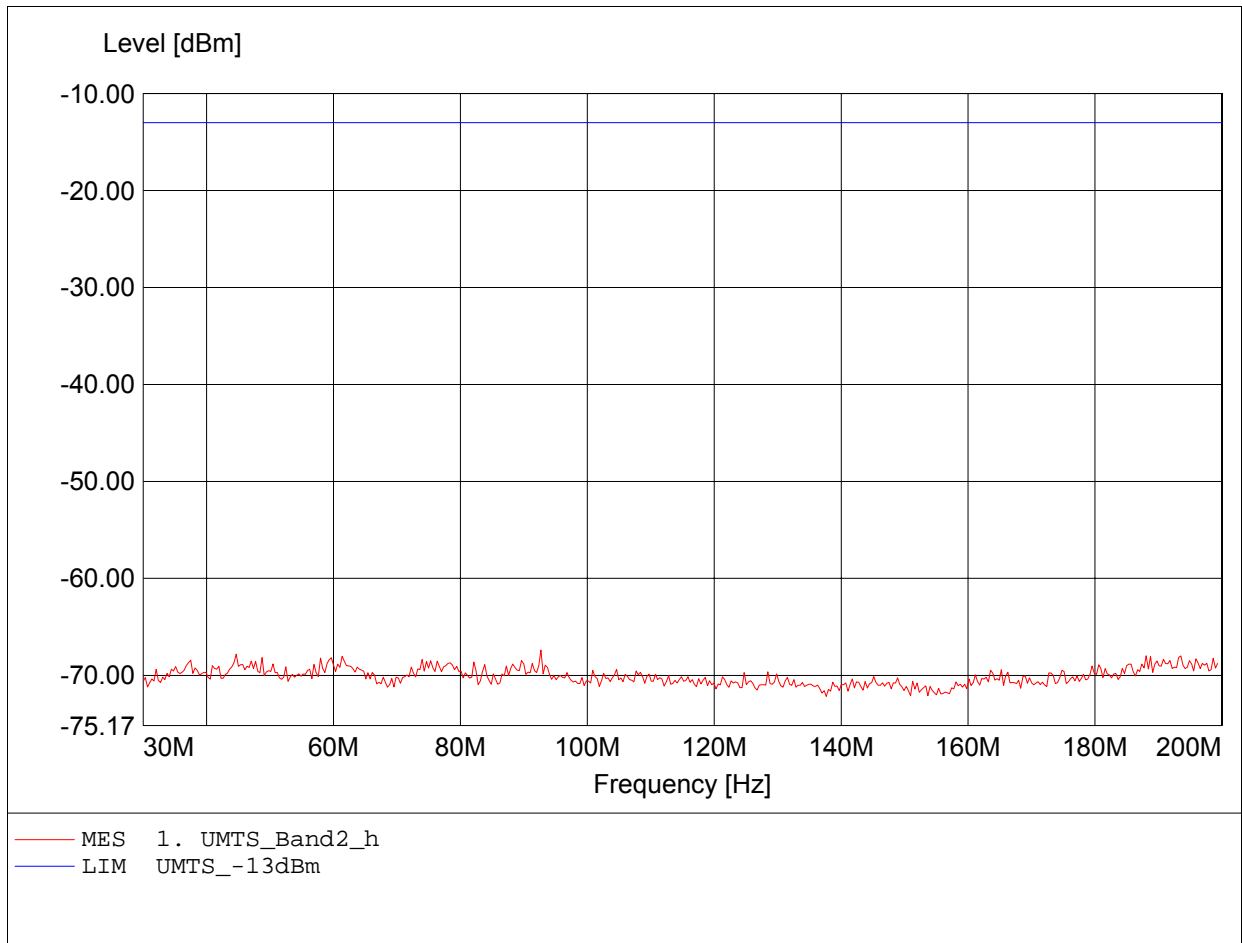


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 987.174MHz, Pmax: -54.29dBm, RBW: 100kHz

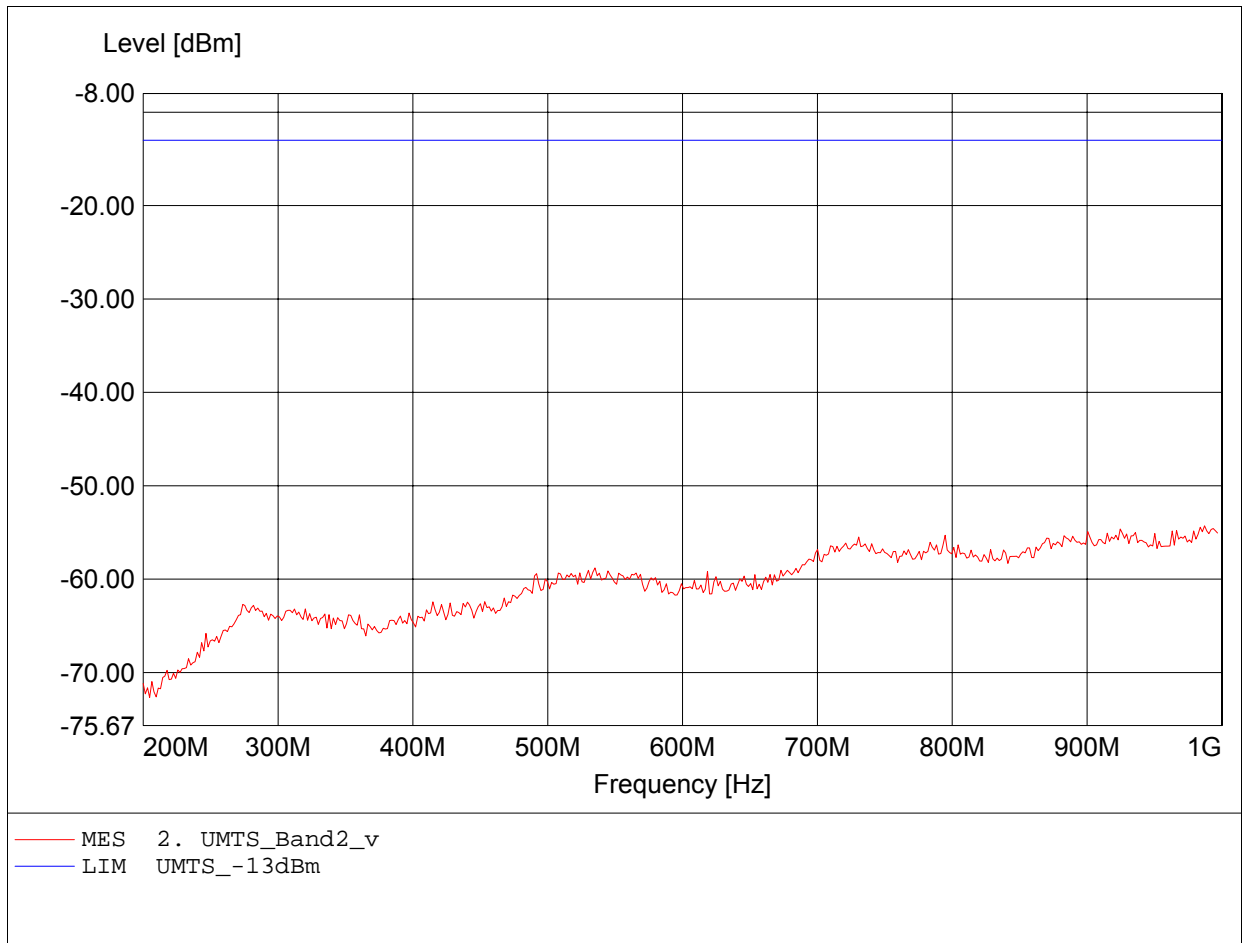


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 863.727MHz, Pmax: -52.01dBm, RBW: 100kHz

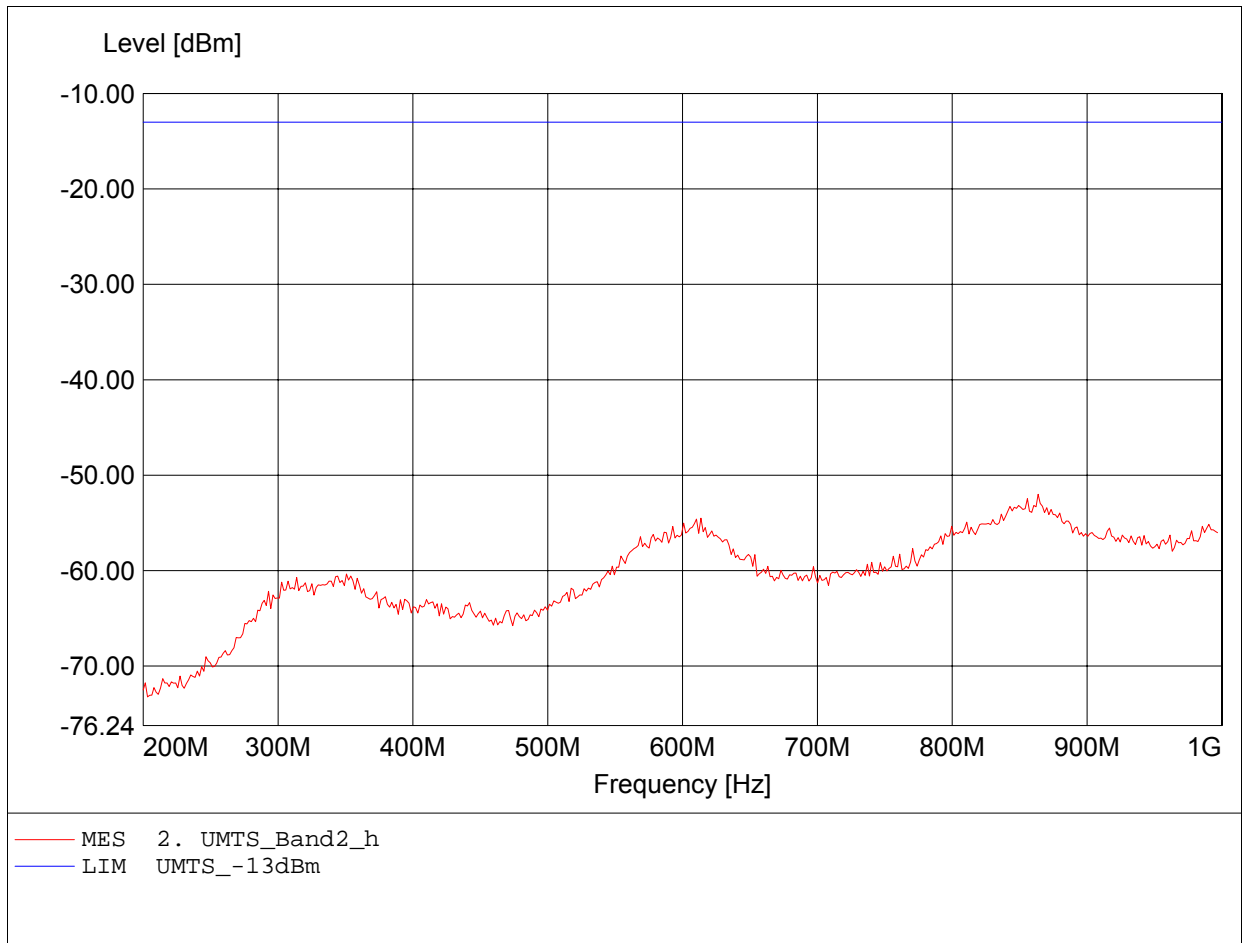


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9537
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.986GHz, Pmax: -27.41dBm, RBW: 1MHz/3kHz

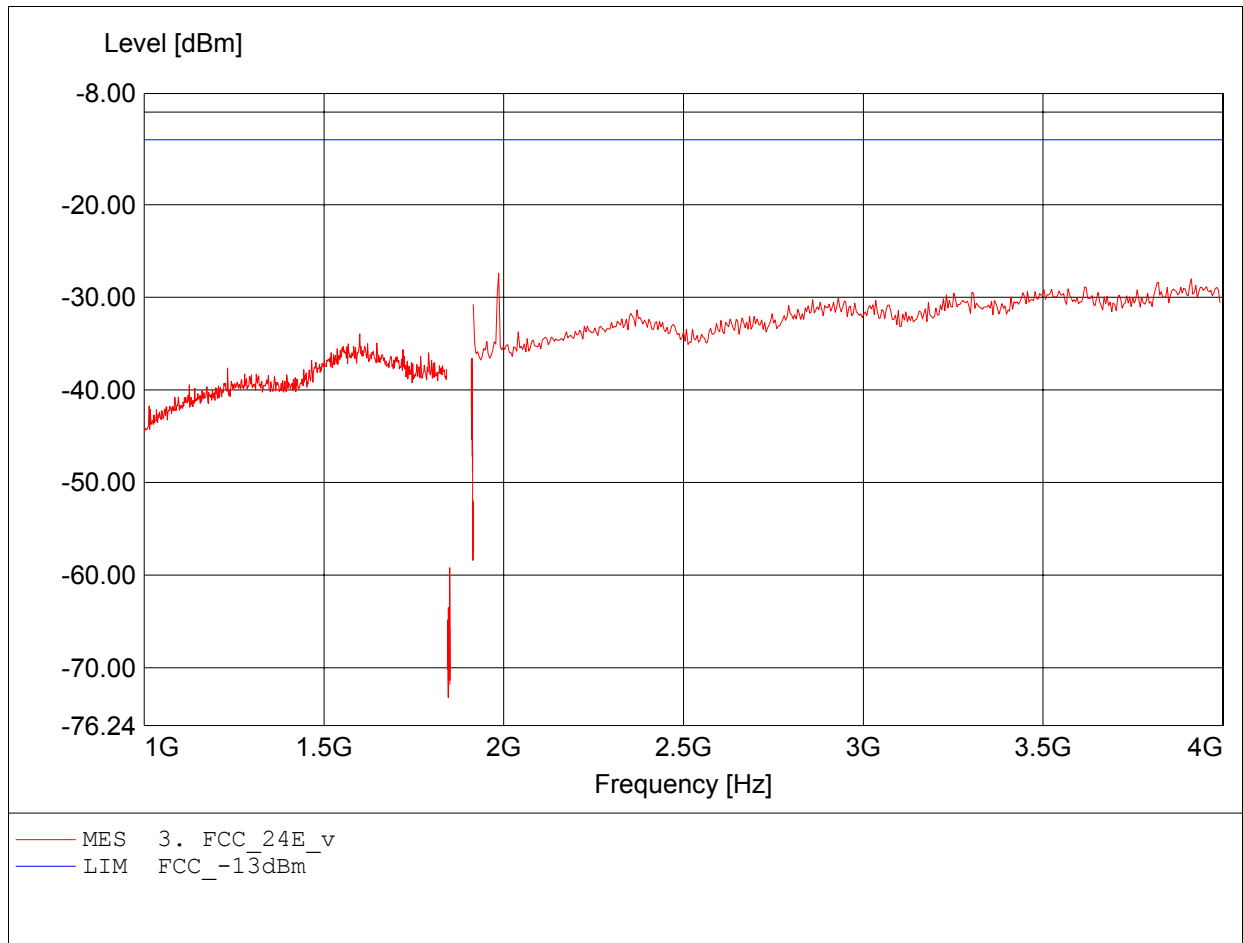


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9537
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.820GHz, Pmax: -17.38dBm, RBW: 1MHz/3kHz

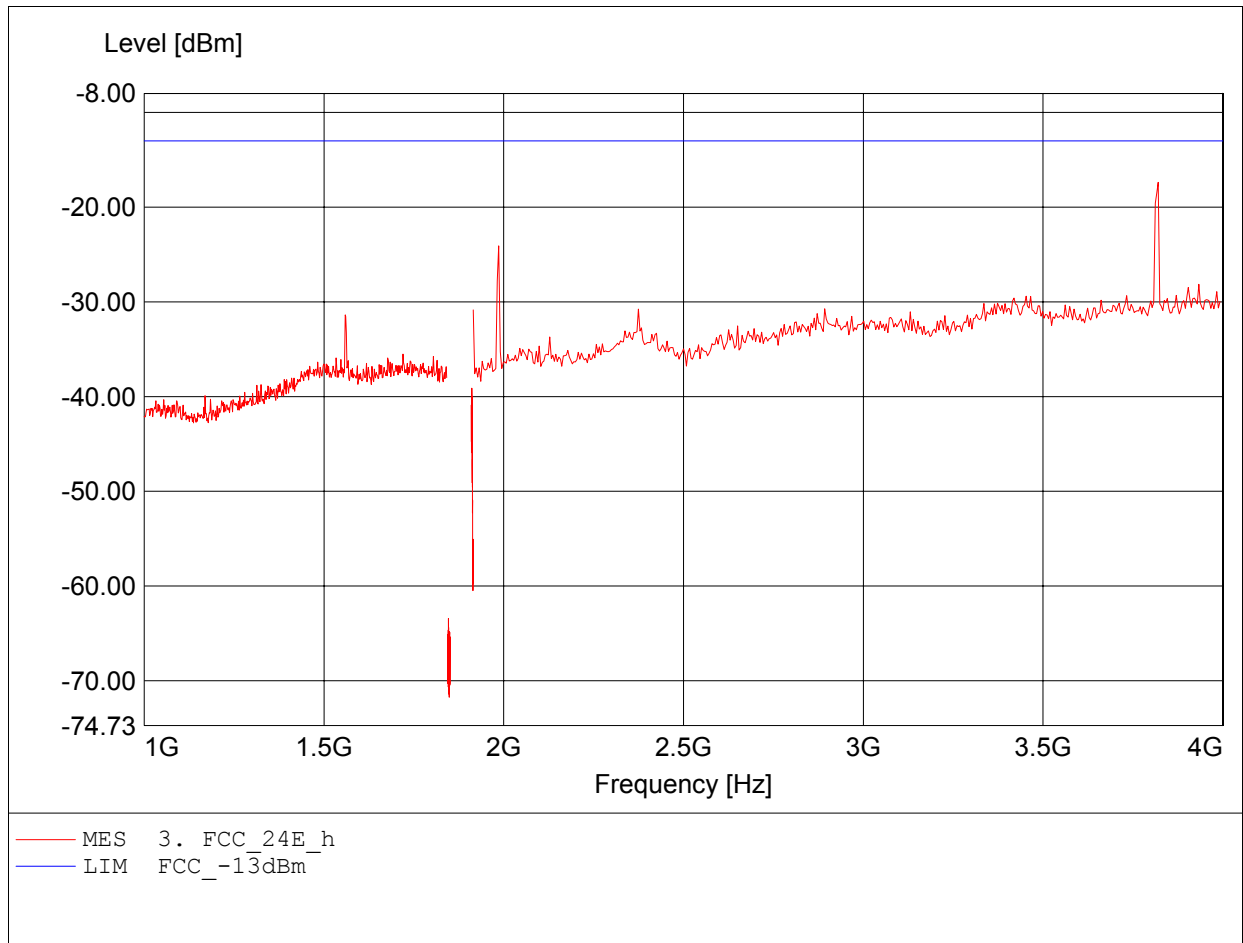


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9537
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.599GHz, Pmax: -42.27dBm, RBW: 1MHz

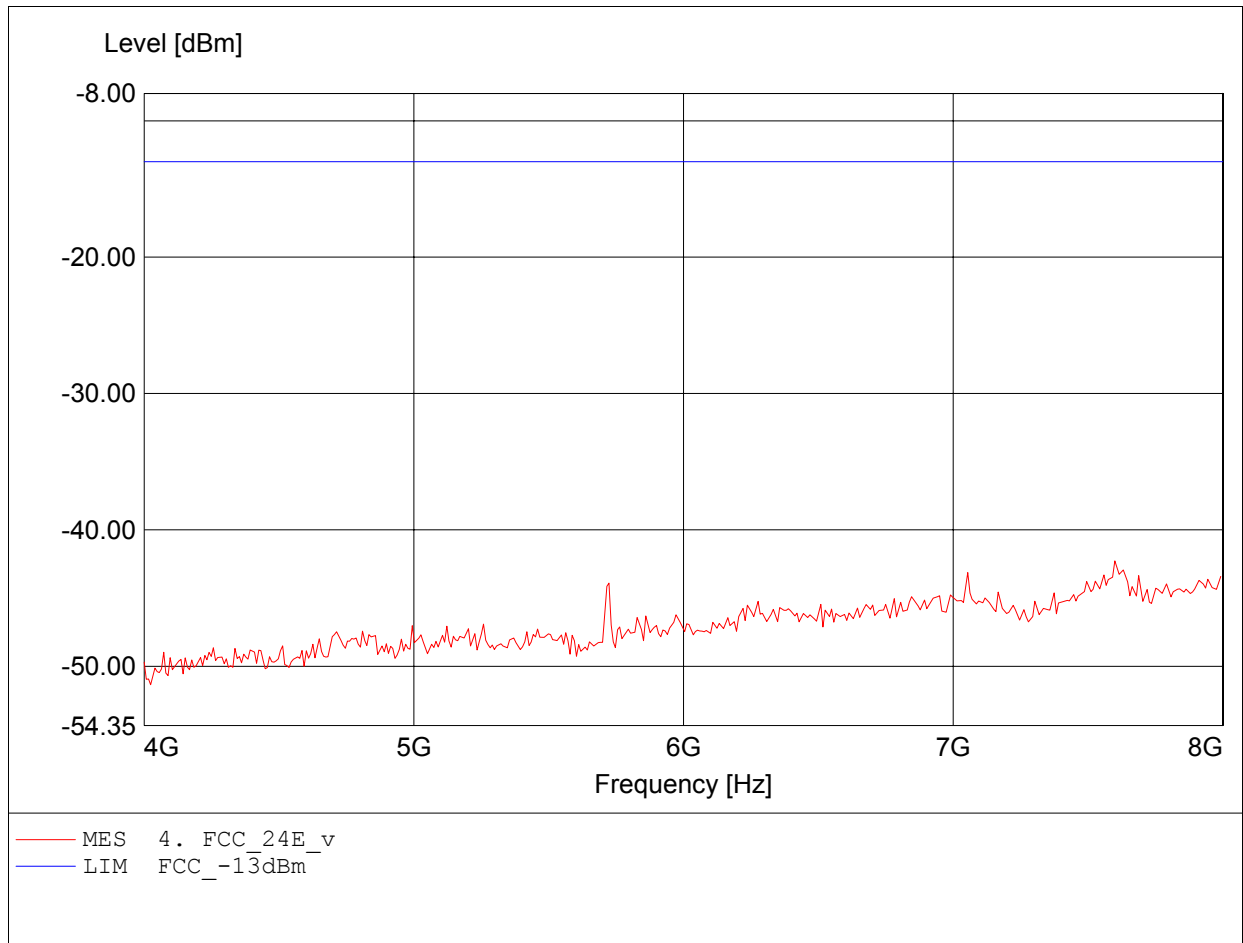


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co., Ltd.
EUT: UMTS GSM phone
Model / Mode: C600 / UMTS OpB II / Ch.: 9537
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.591GHz, Pmax: -42.47dBm, RBW: 1MHz

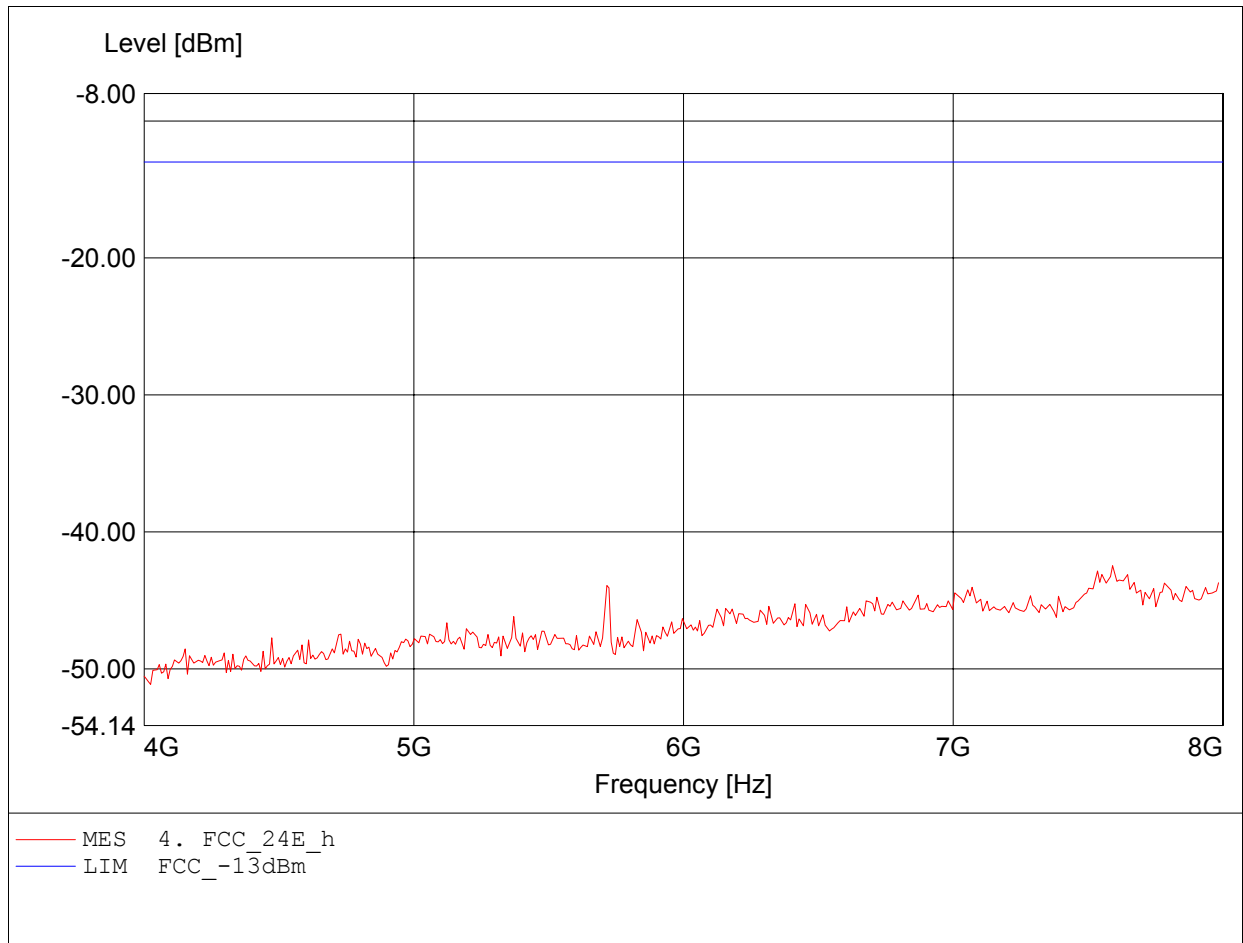


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.214GHz, Pmax: -38.46dBm, RBW: 1MHz

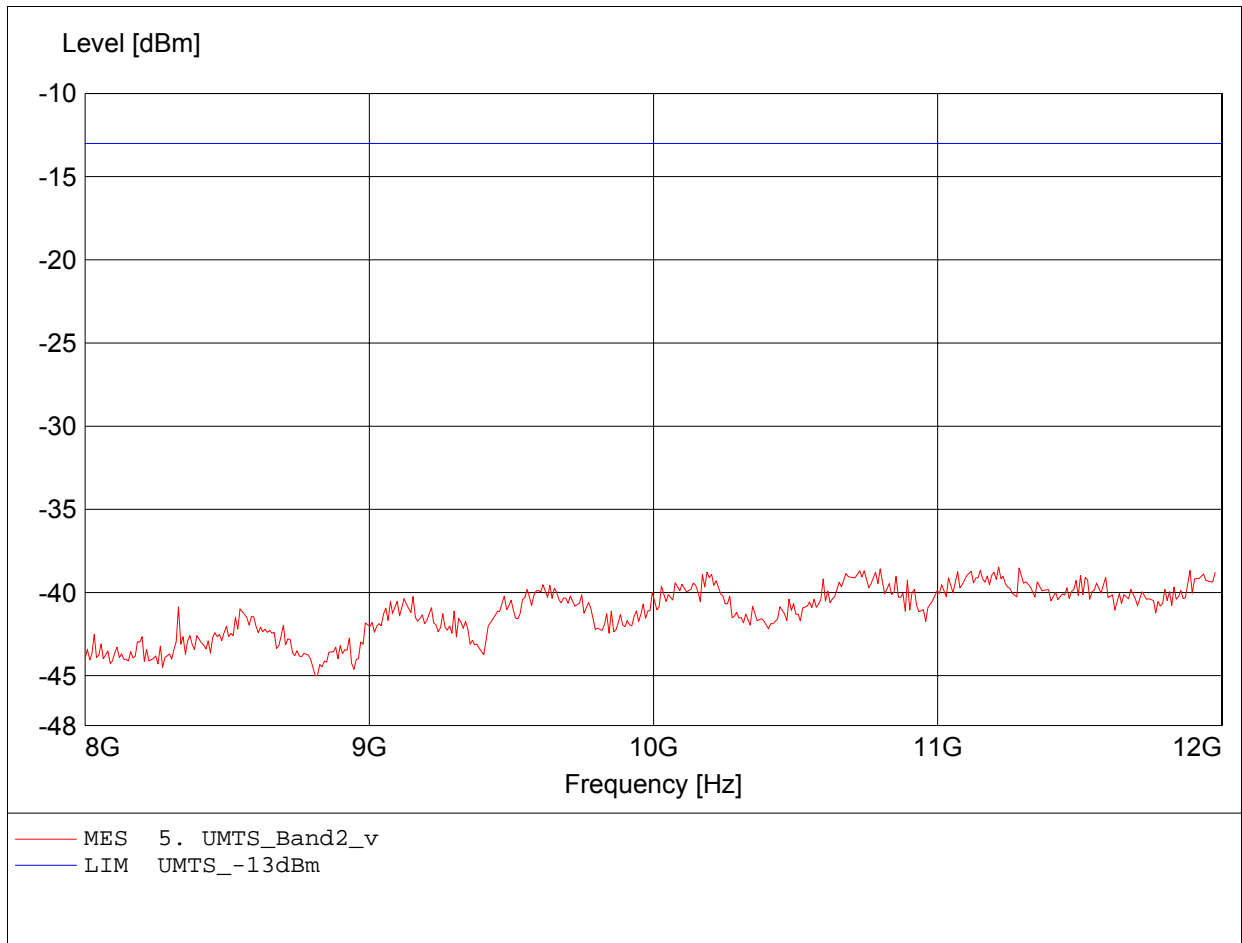


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.725GHz, Pmax: -37.76dBm, RBW: 1MHz

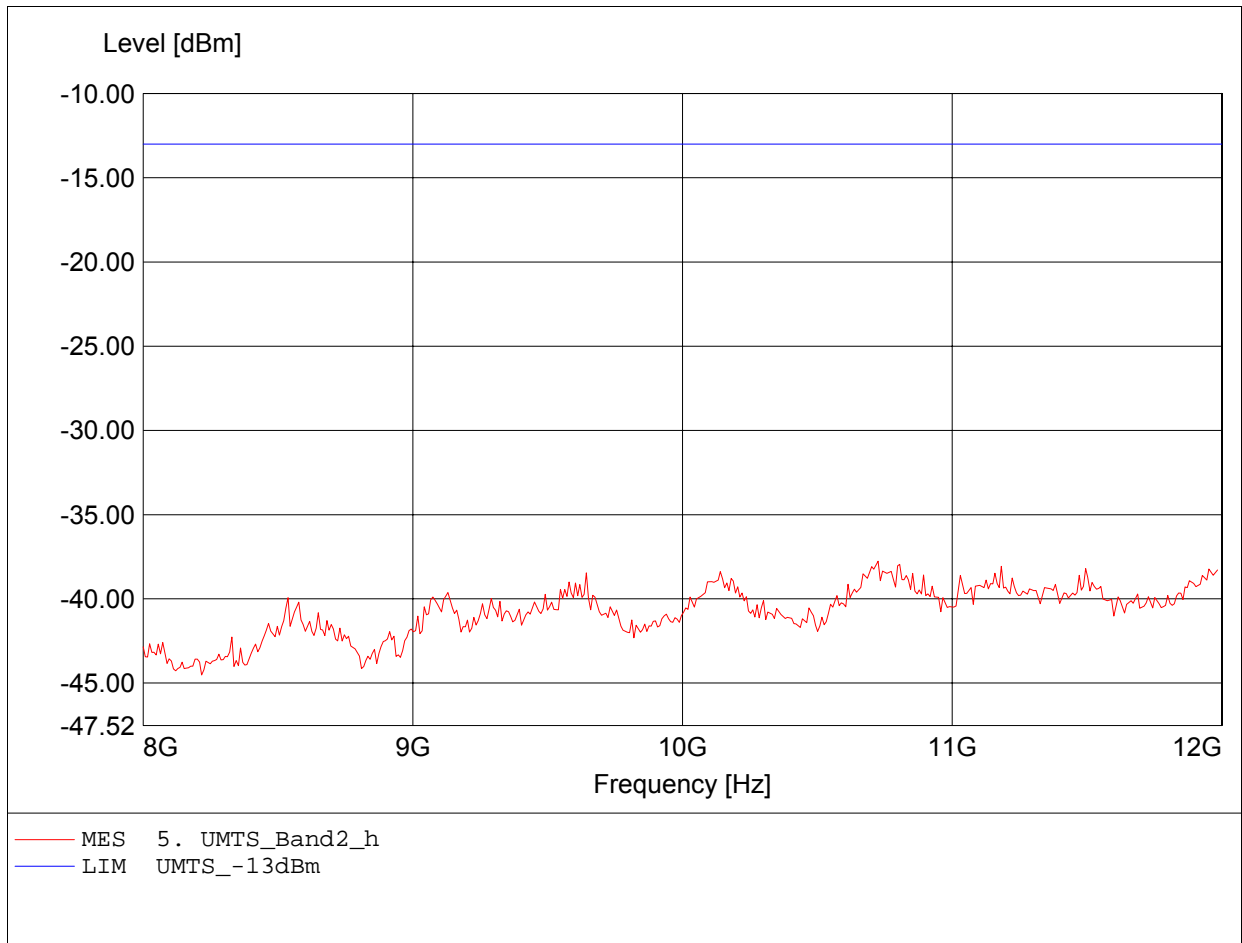


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.940GHz, Pmax: -30.29dBm, RBW: 1MHz

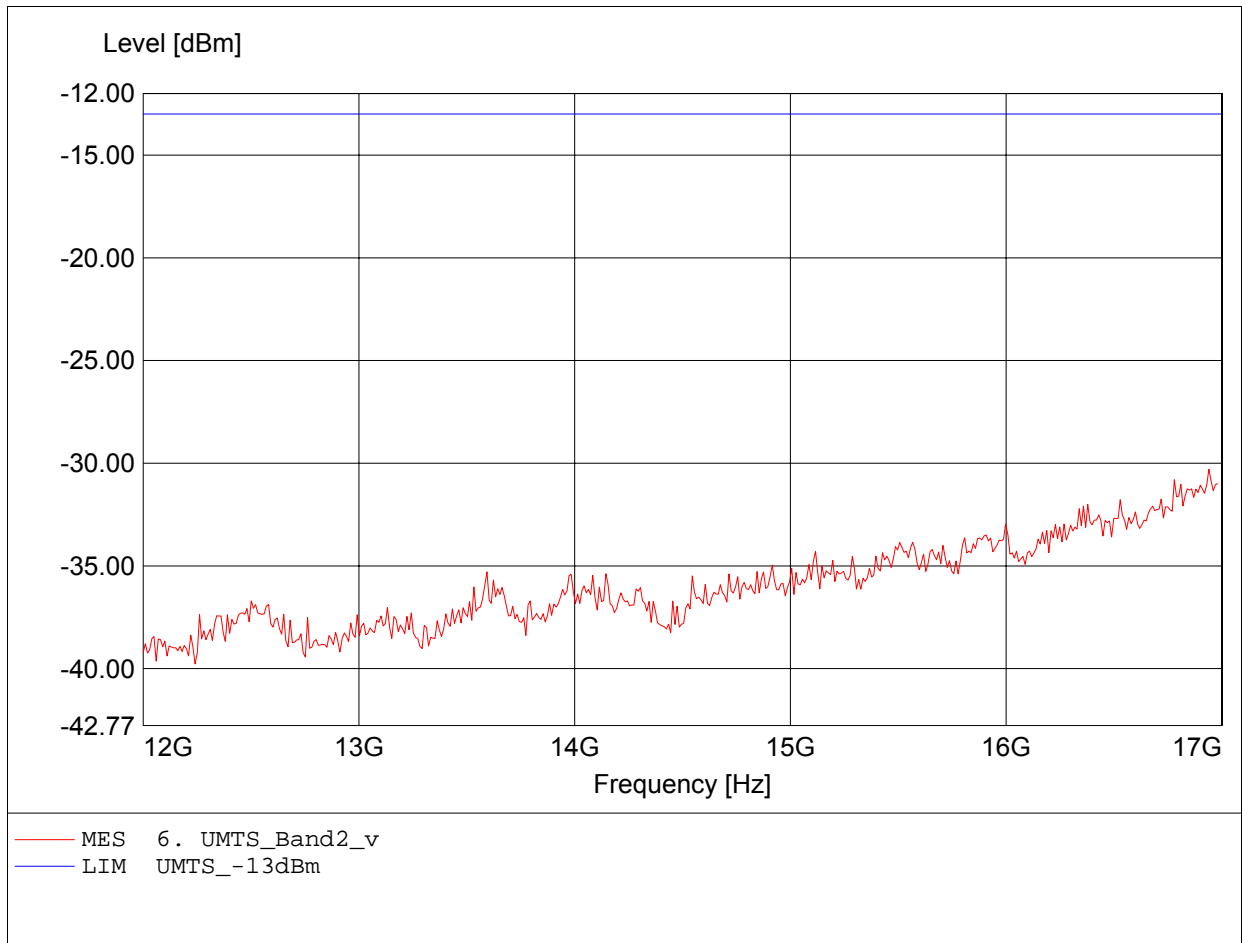


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.920GHz, Pmax: -29.57dBm, RBW: 1MHz

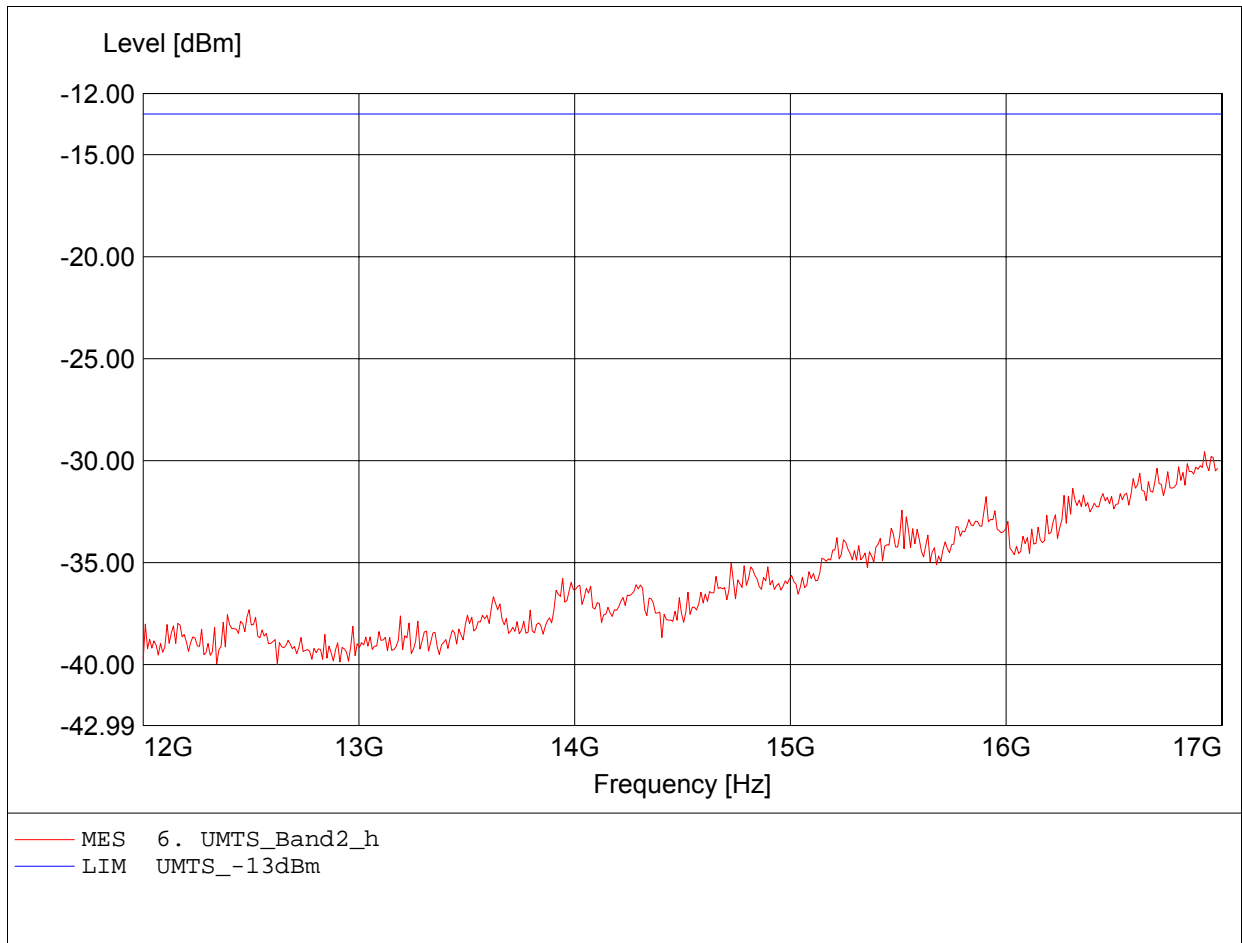


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.100GHz, Pmax: -23.39dBm, RBW: 1MHz

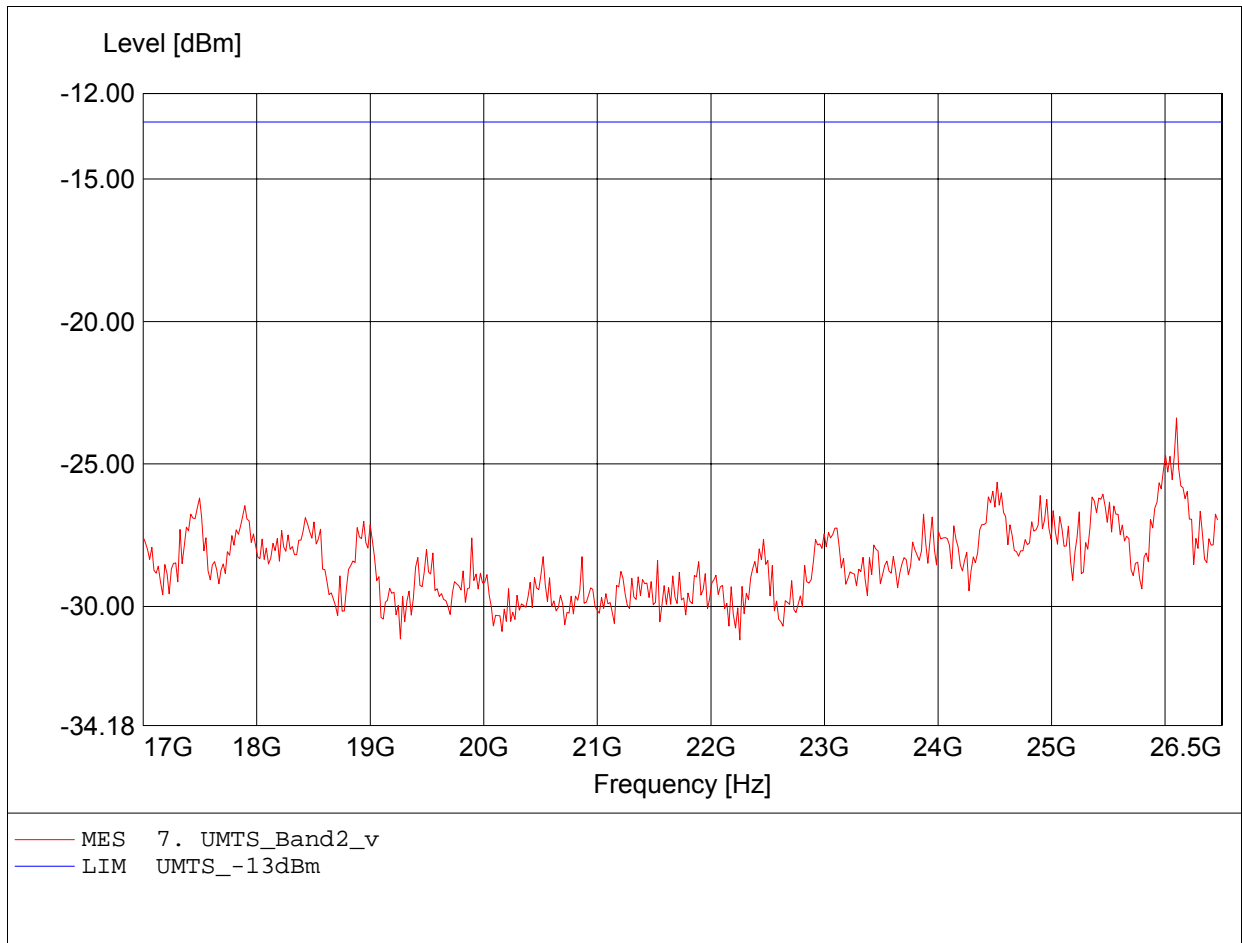


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Unom.: 3.80 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.100GHz, Pmax: -24.55dBm, RBW: 1MHz

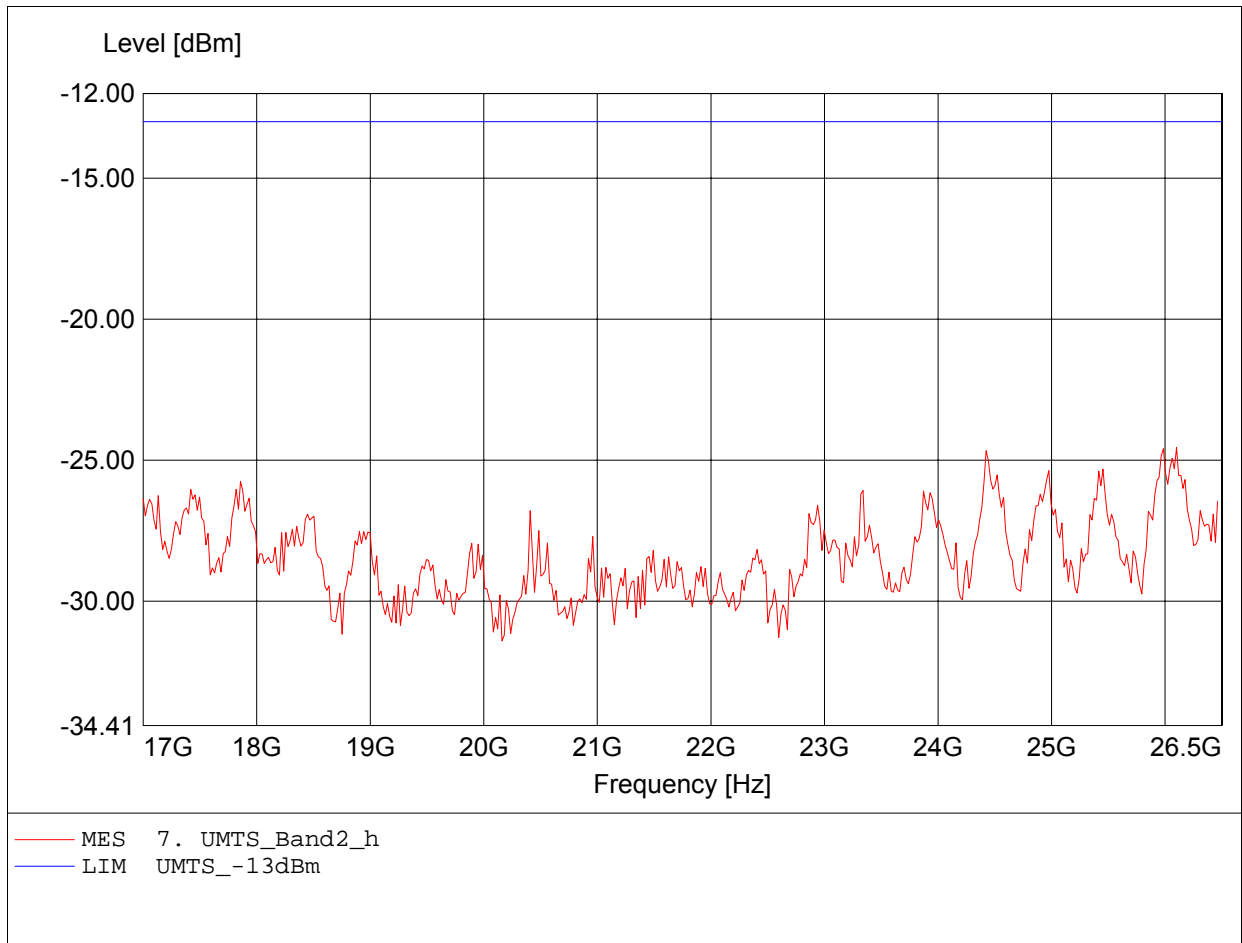


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.142MHz, Pmax: -67.08dBm, RBW: 100kHz

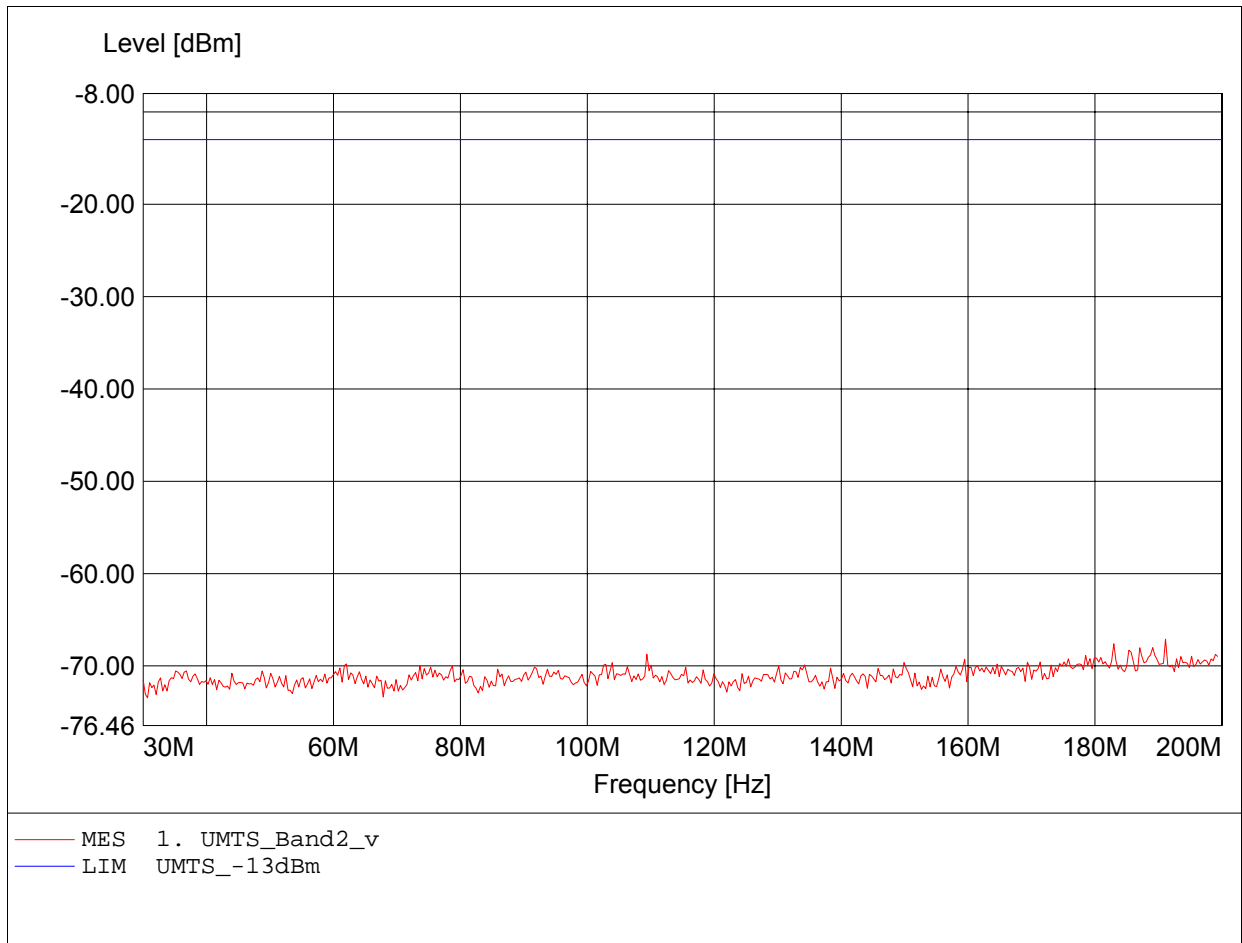


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 47.715MHz, Pmax: -68.26dBm, RBW: 100kHz

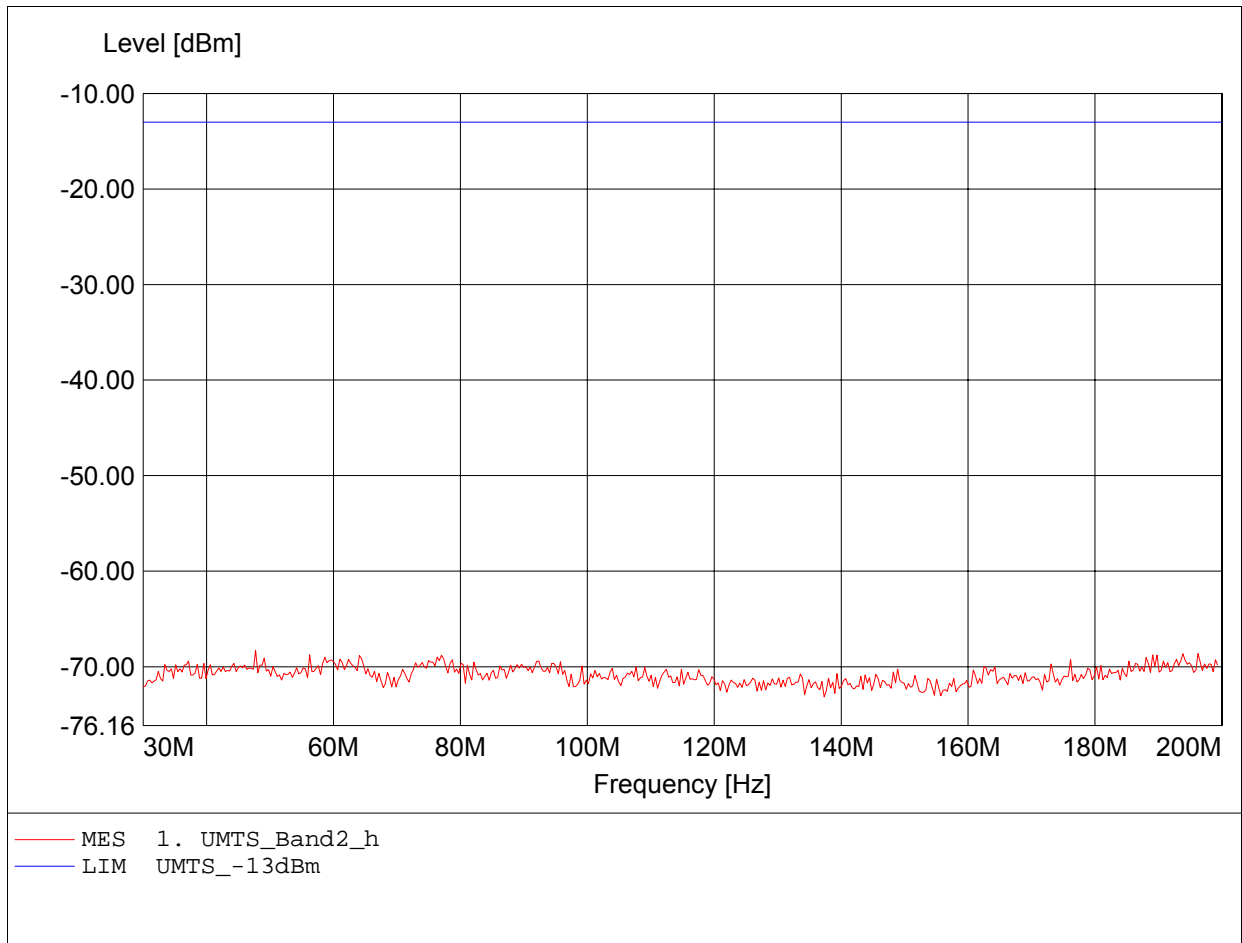


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 991.984MHz, Pmax: -54.55dBm, RBW: 100kHz

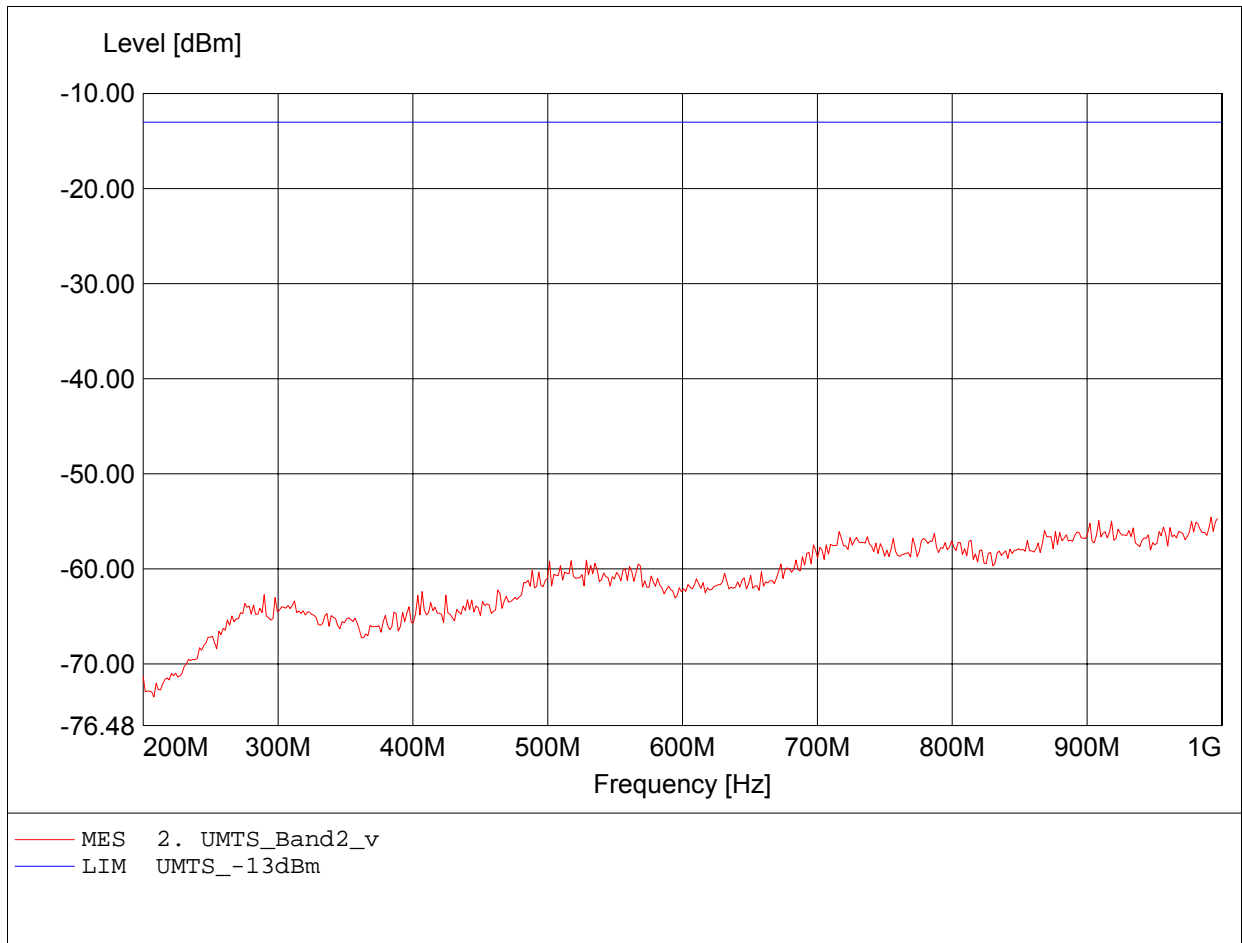


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 868.537MHz, Pmax: -52.47dBm, RBW: 100kHz

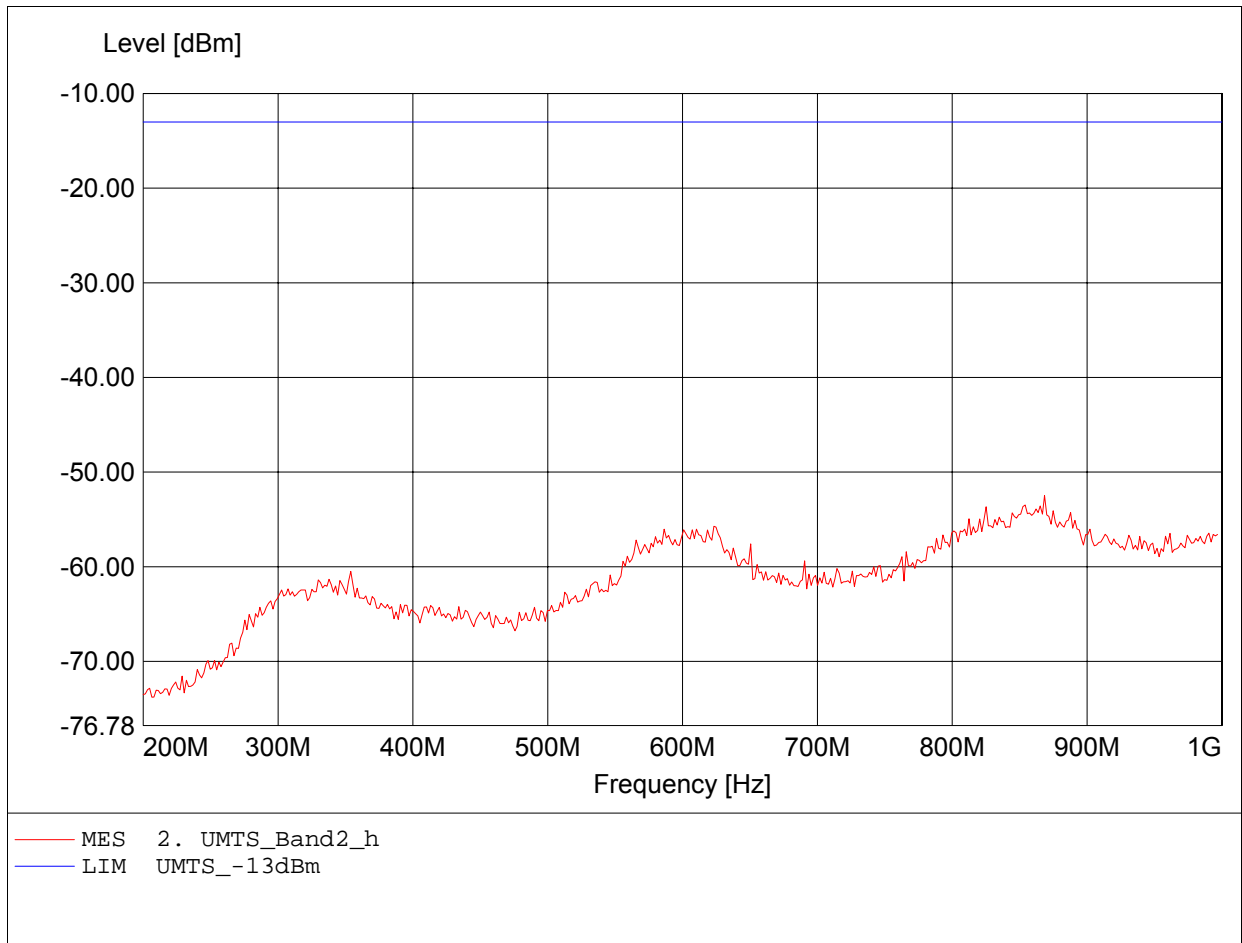


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.852GHz, Pmax: -16.06dBm, RBW: 1MHz/3kHz

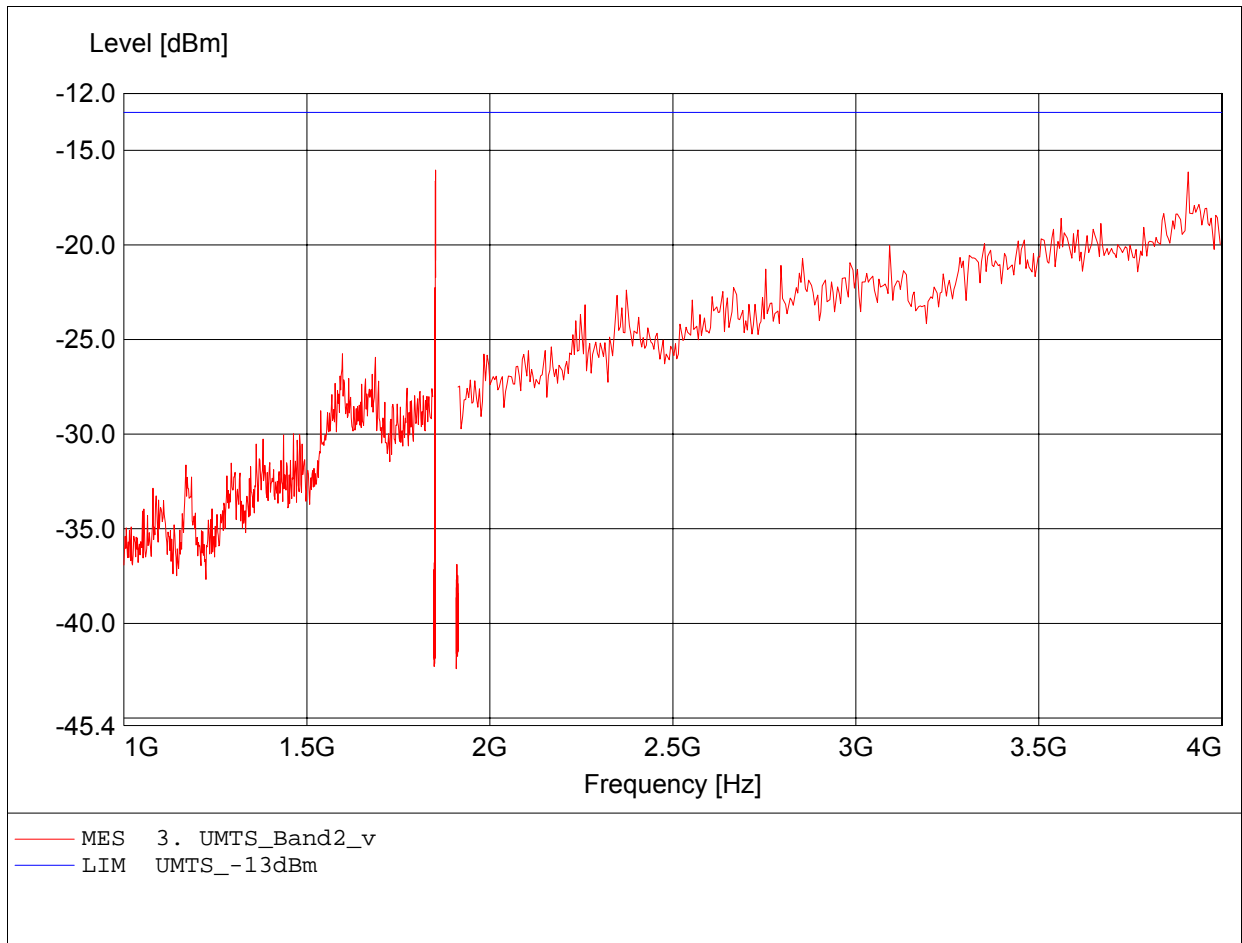


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.895GHz, Pmax: -16.39dBm, RBW: 1MHz/3kHz

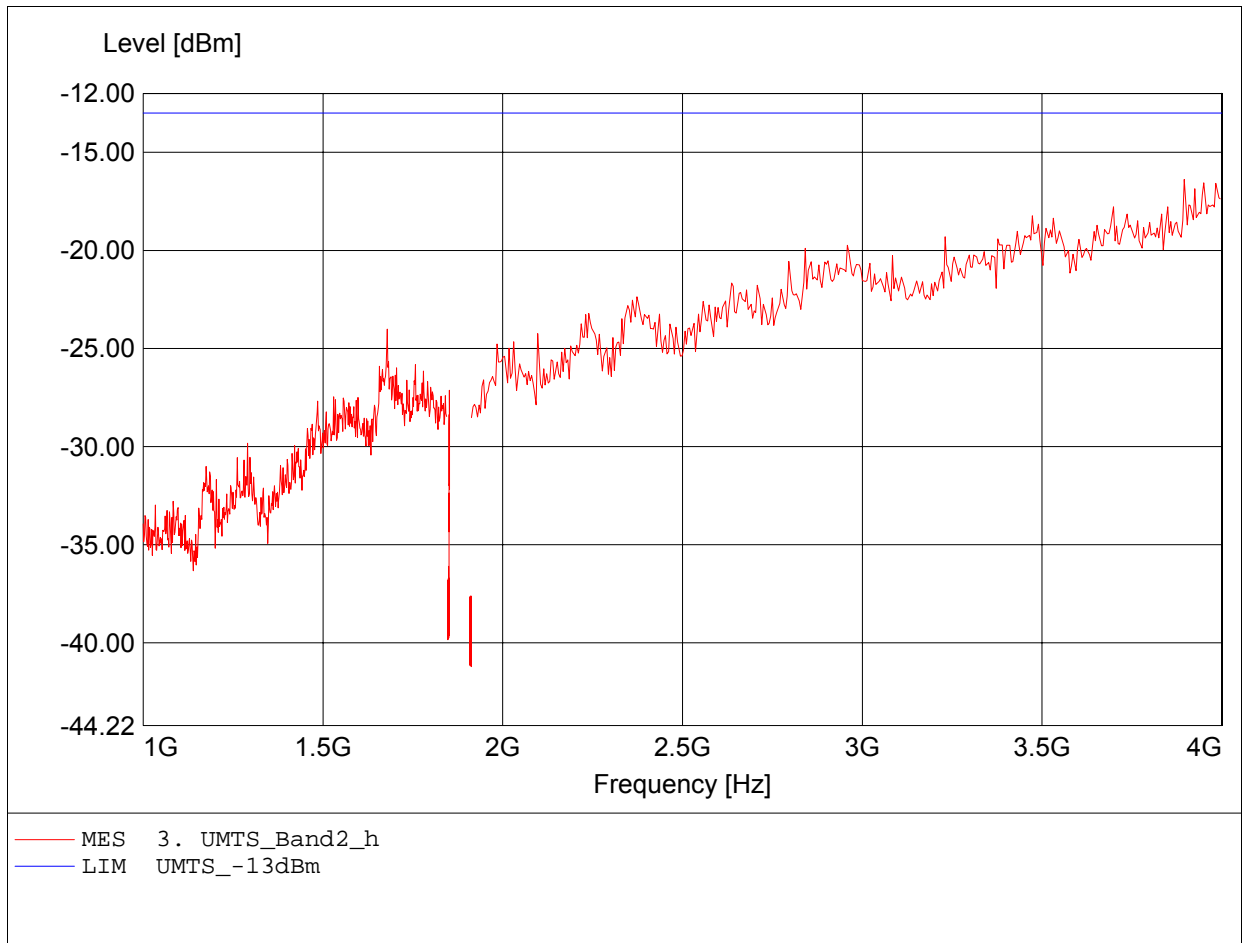


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 6.910GHz, Pmax: -40.29dBm, RBW: 1MHz

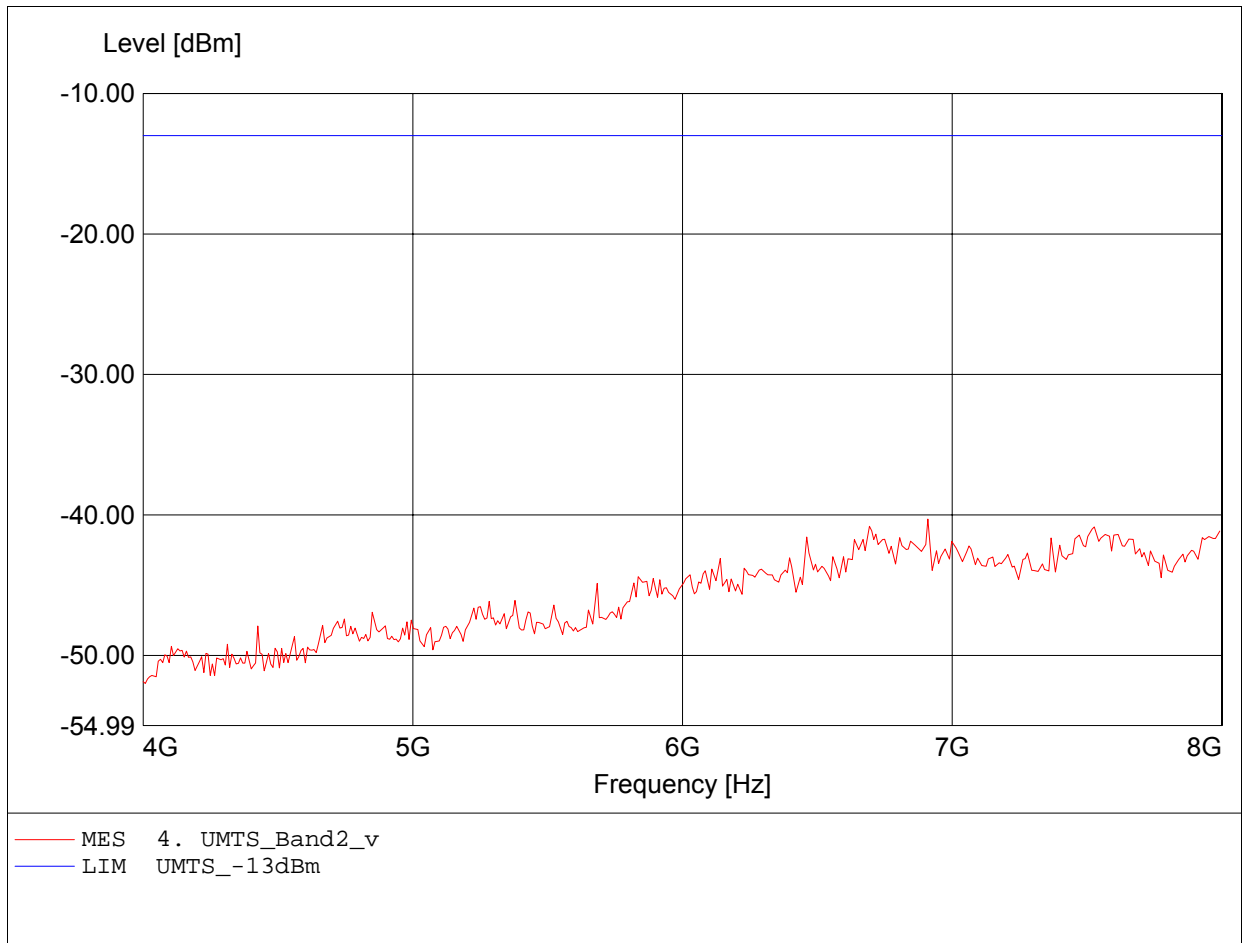


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.984GHz, Pmax: -43.01dBm, RBW: 1MHz

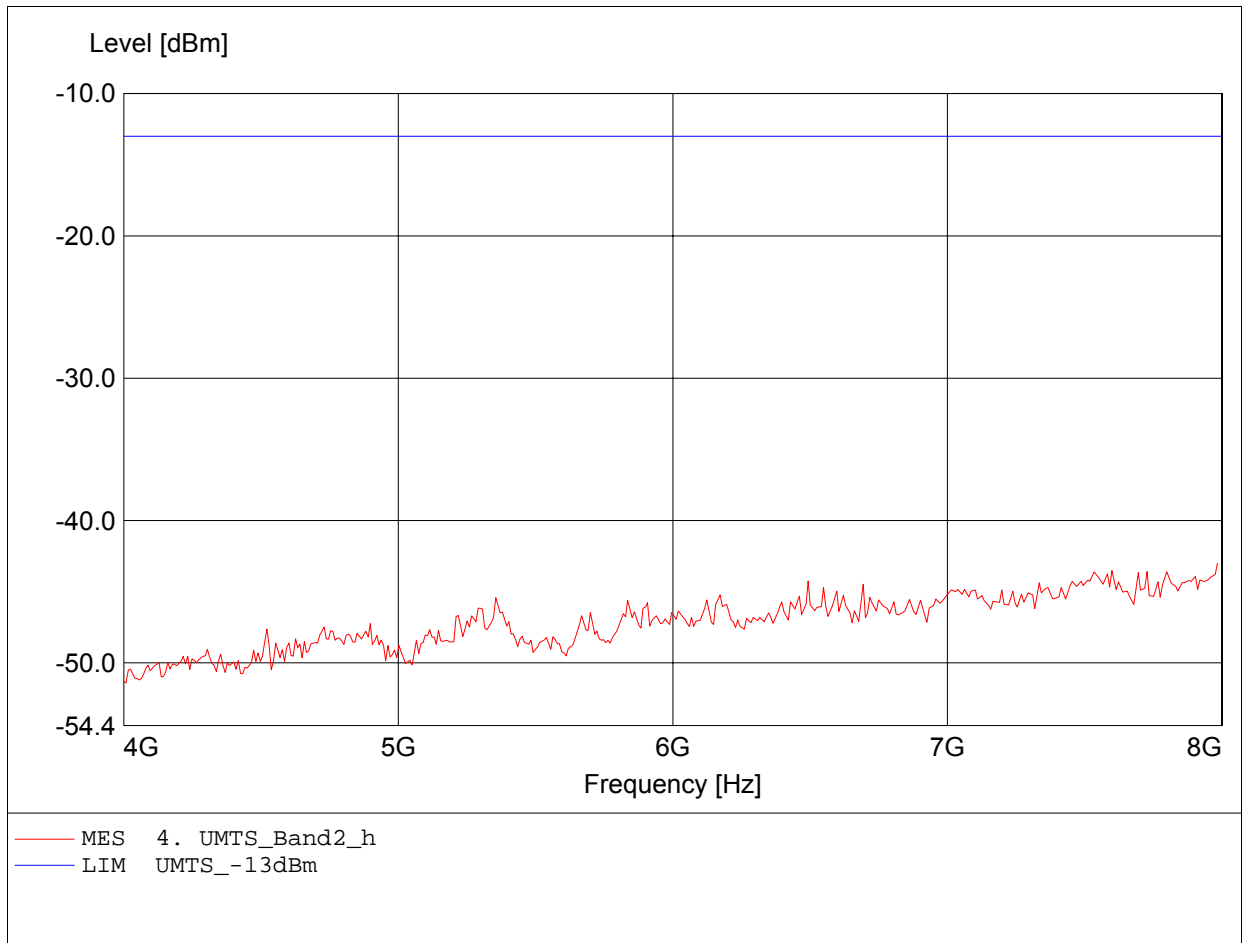


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.717GHz, Pmax: -38.90dBm, RBW: 1MHz

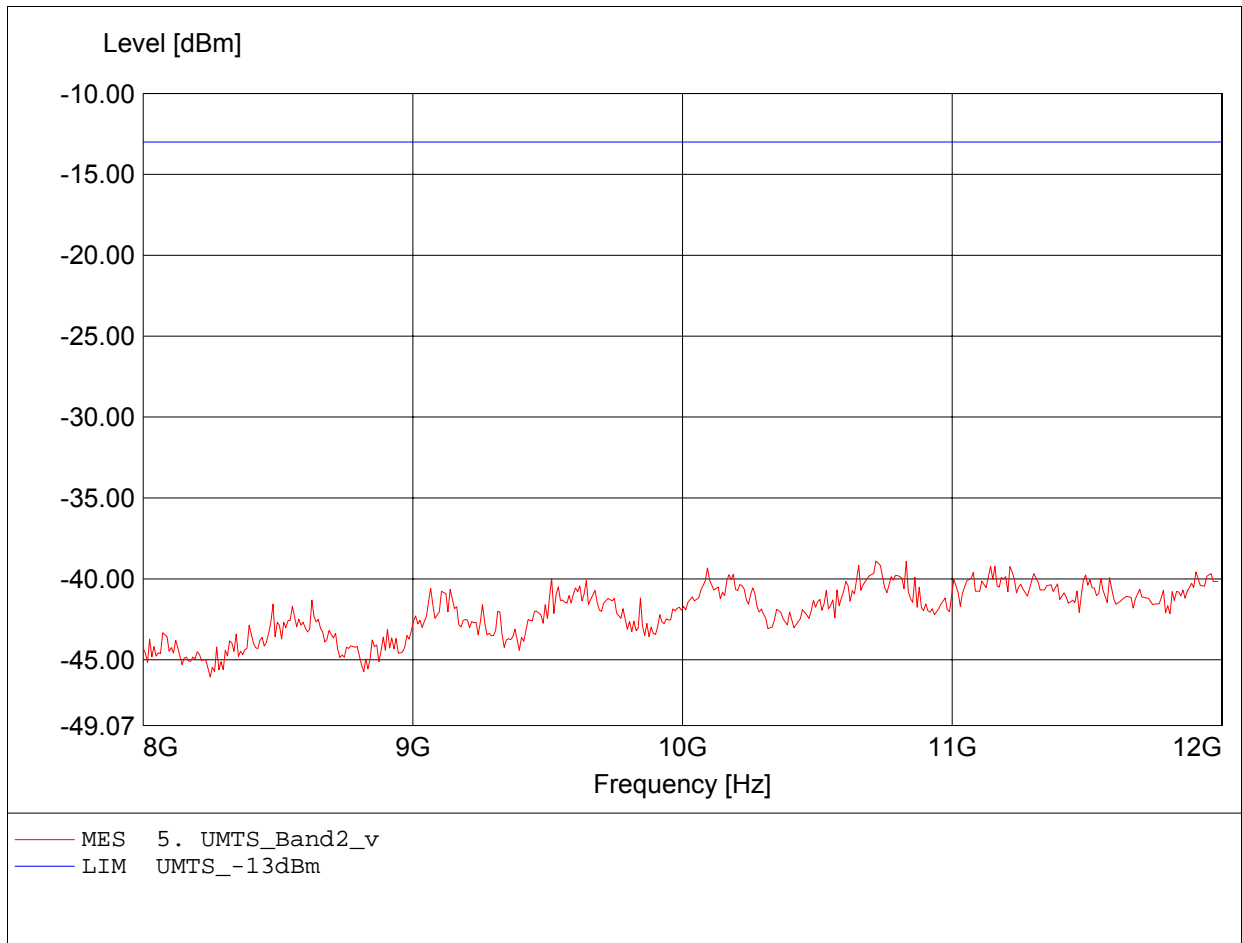


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.156GHz, Pmax: -37.62dBm, RBW: 1MHz

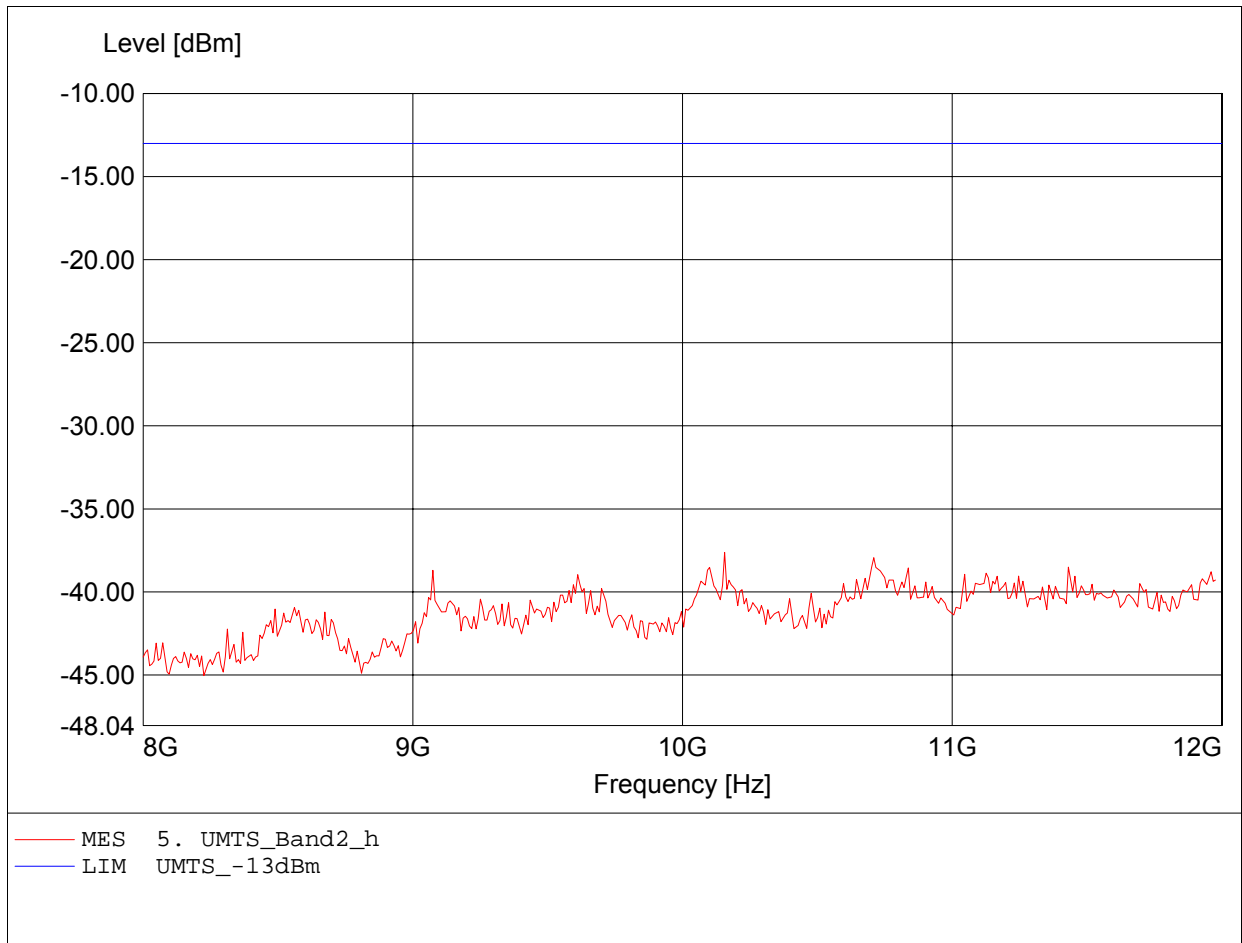


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.900GHz, Pmax: -30.96dBm, RBW: 1MHz

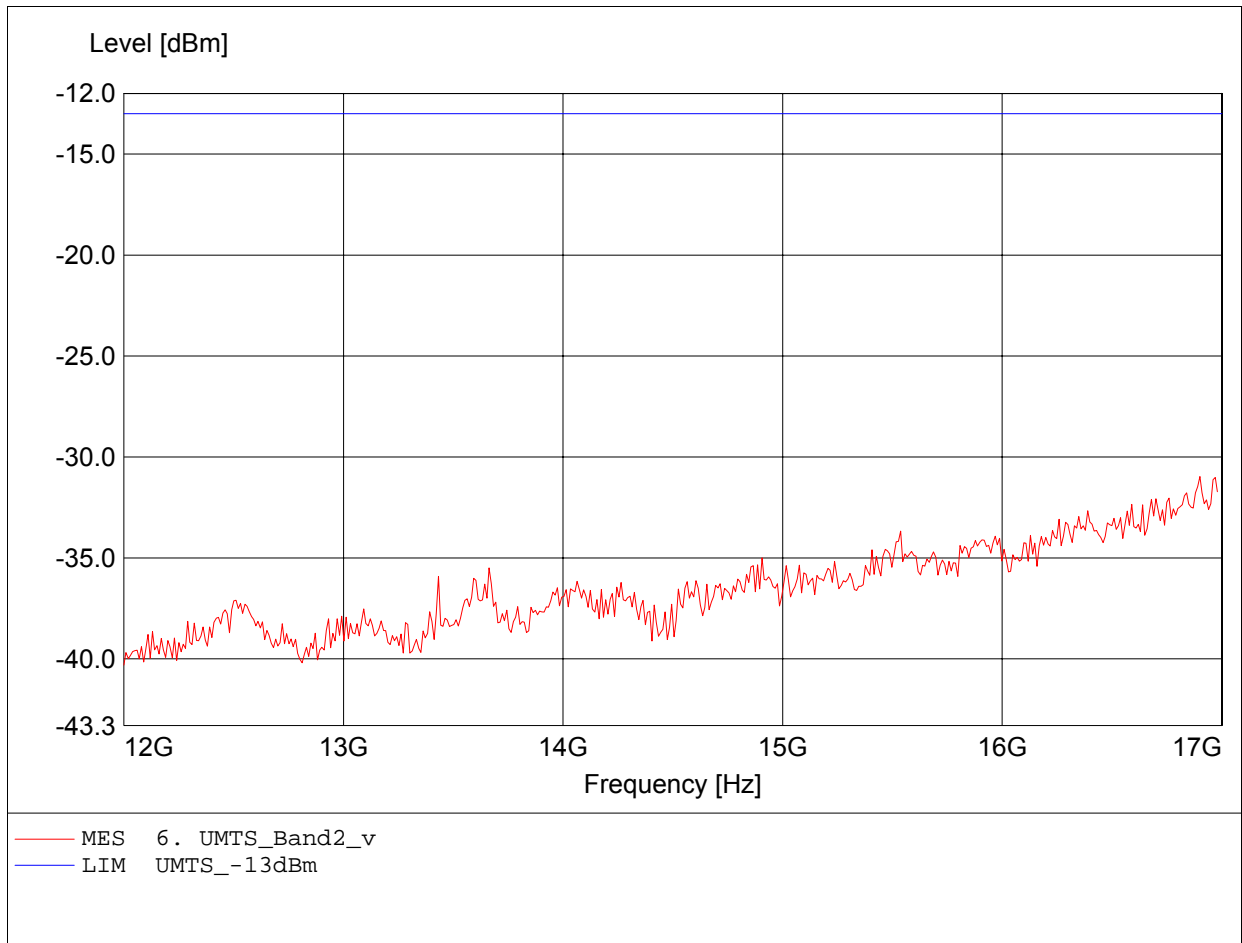


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.910GHz, Pmax: -30.55dBm, RBW: 1MHz

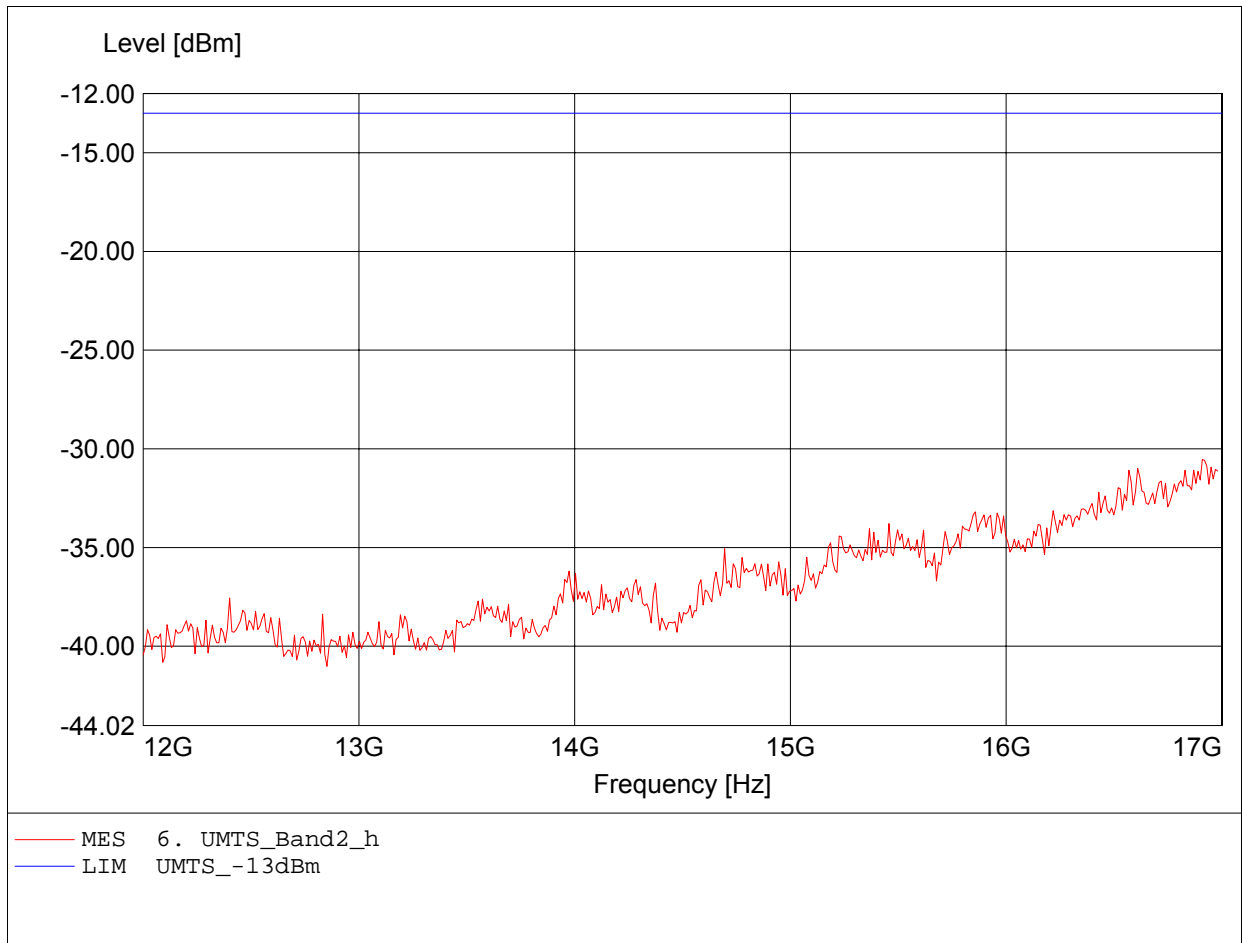


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.062GHz, Pmax: -24.71dBm, RBW: 1MHz

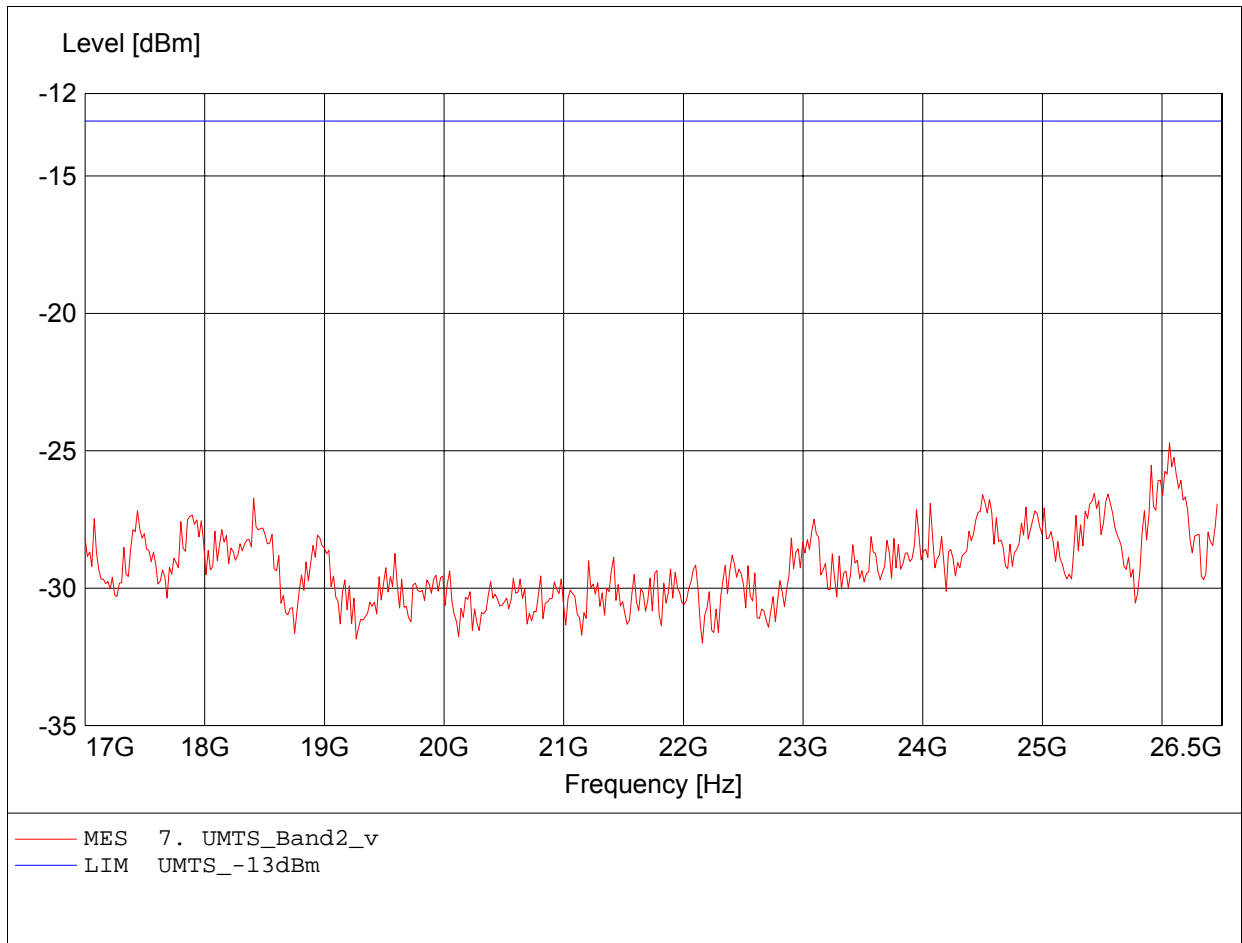


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.444GHz, Pmax: -25.00dBm, RBW: 1MHz

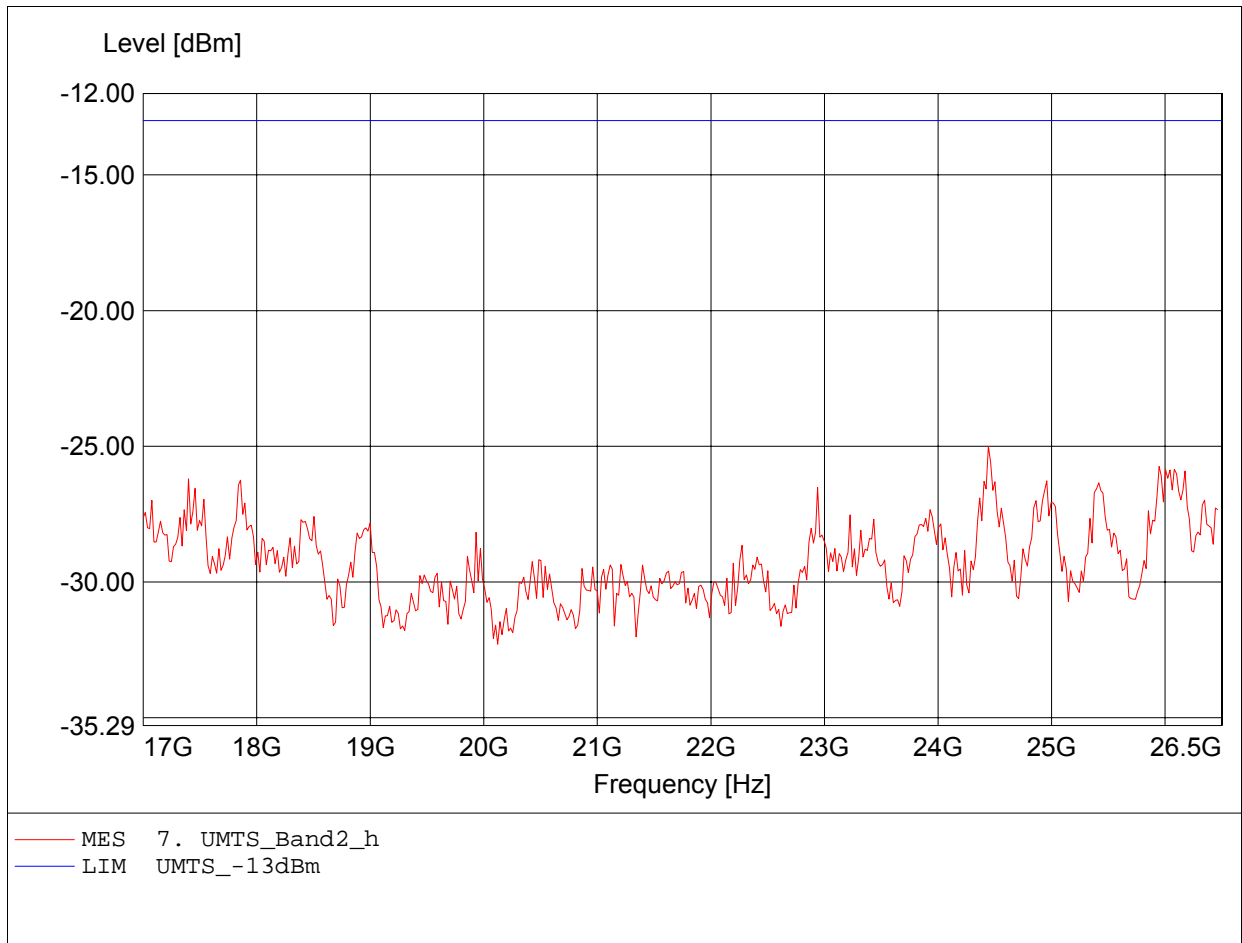


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 176.152MHz, Pmax: -67.83dBm, RBW: 100kHz

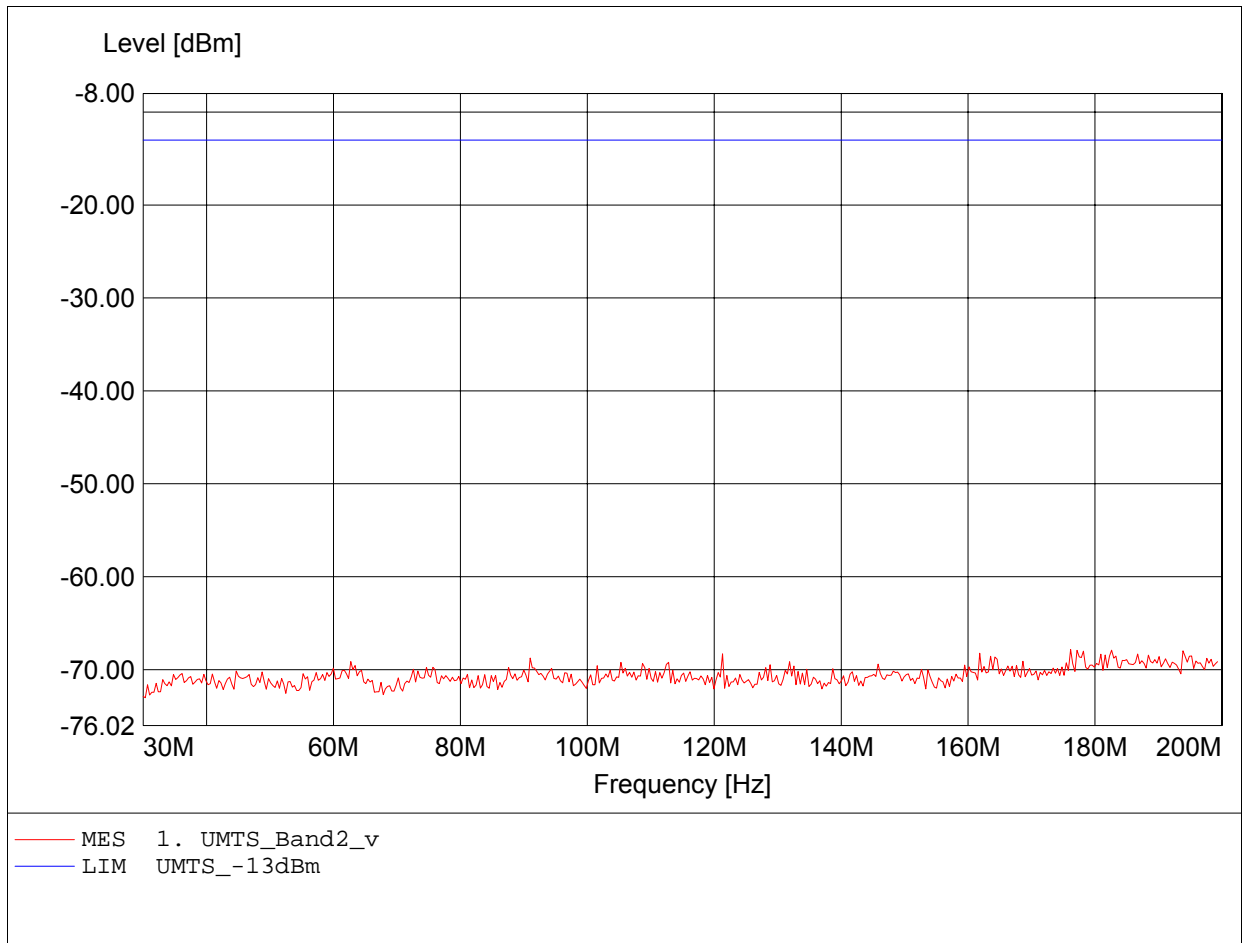


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.417MHz, Pmax: -68.02dBm, RBW: 100kHz

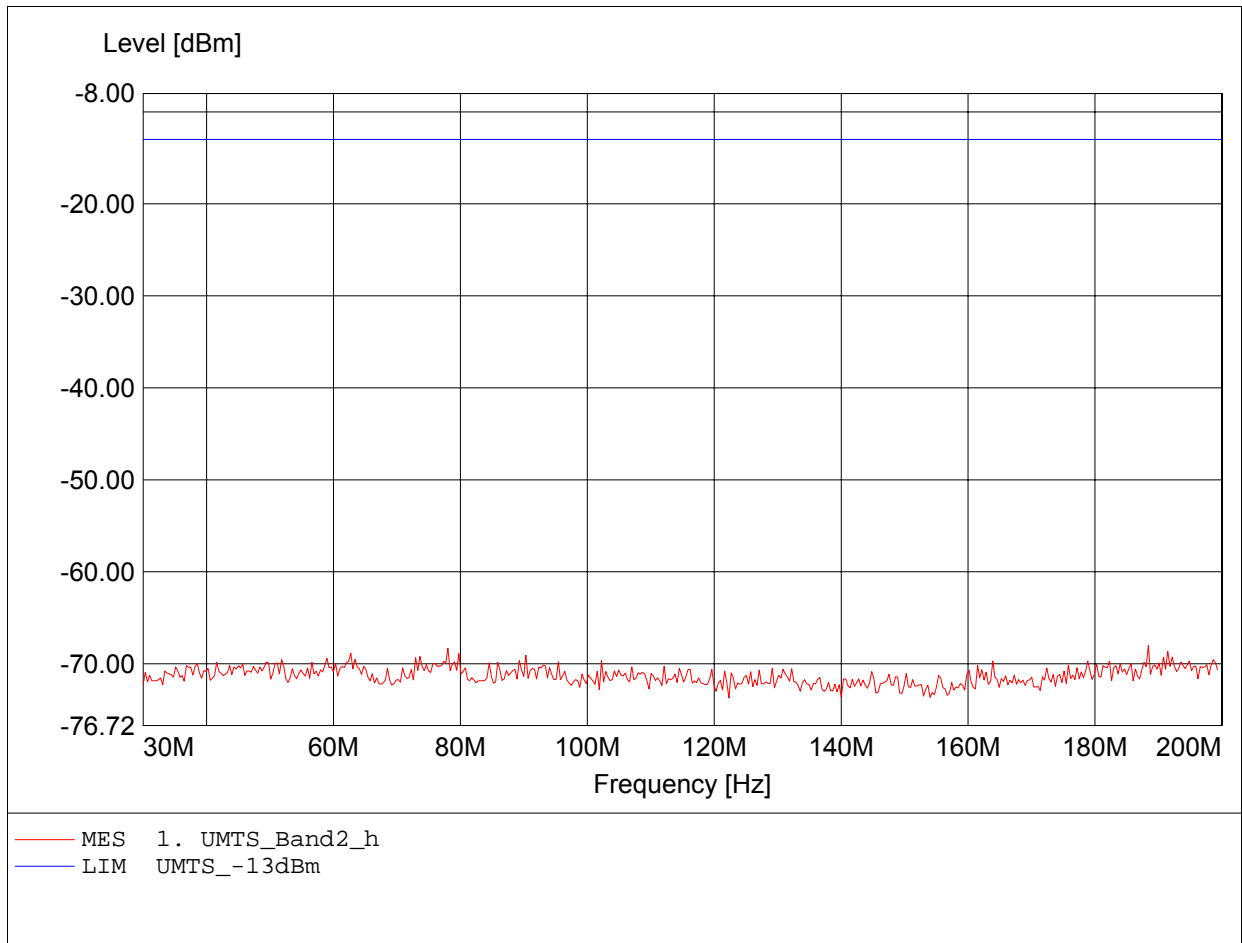


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 995.190MHz, Pmax: -54.02dBm, RBW: 100kHz

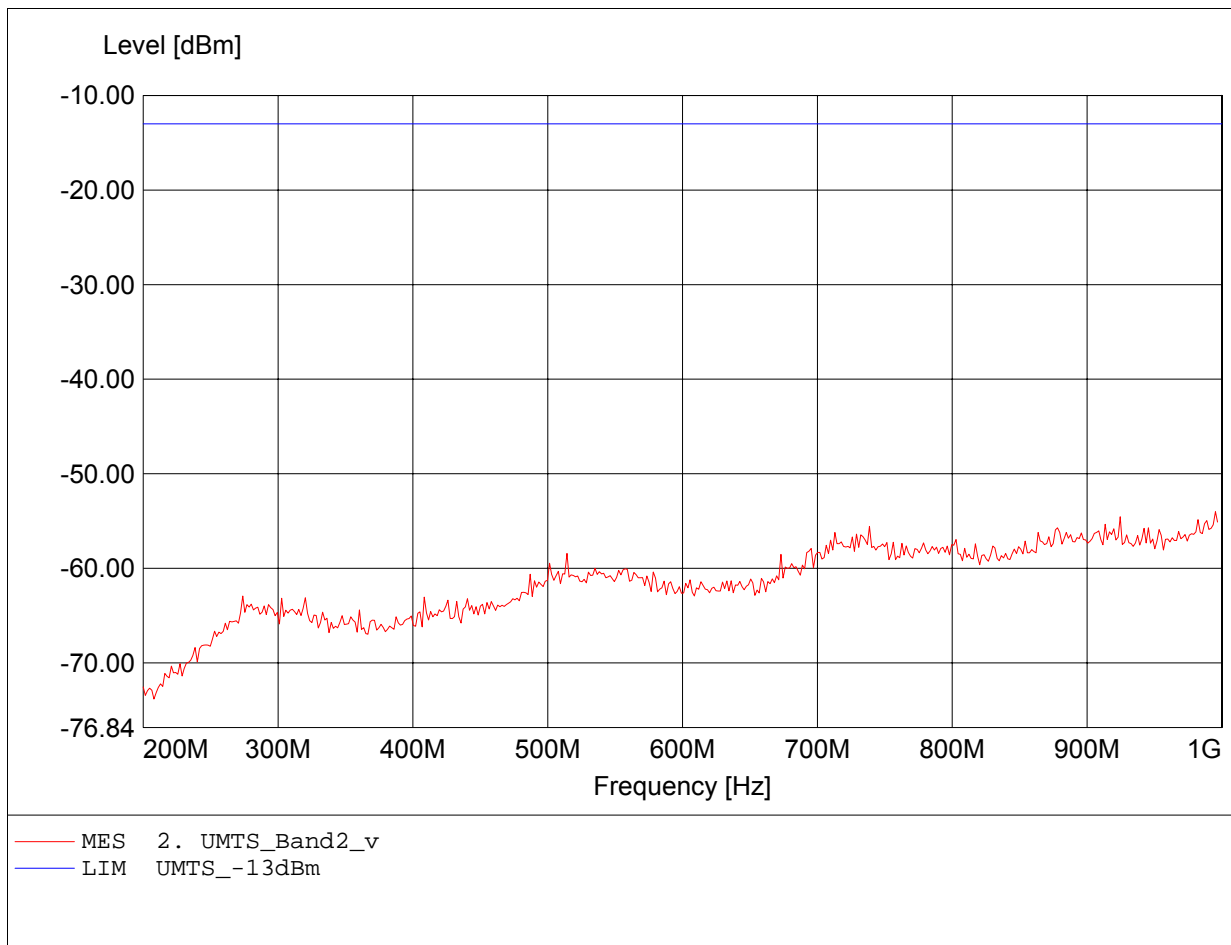


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 860.521MHz, Pmax: -52.96dBm, RBW: 100kHz

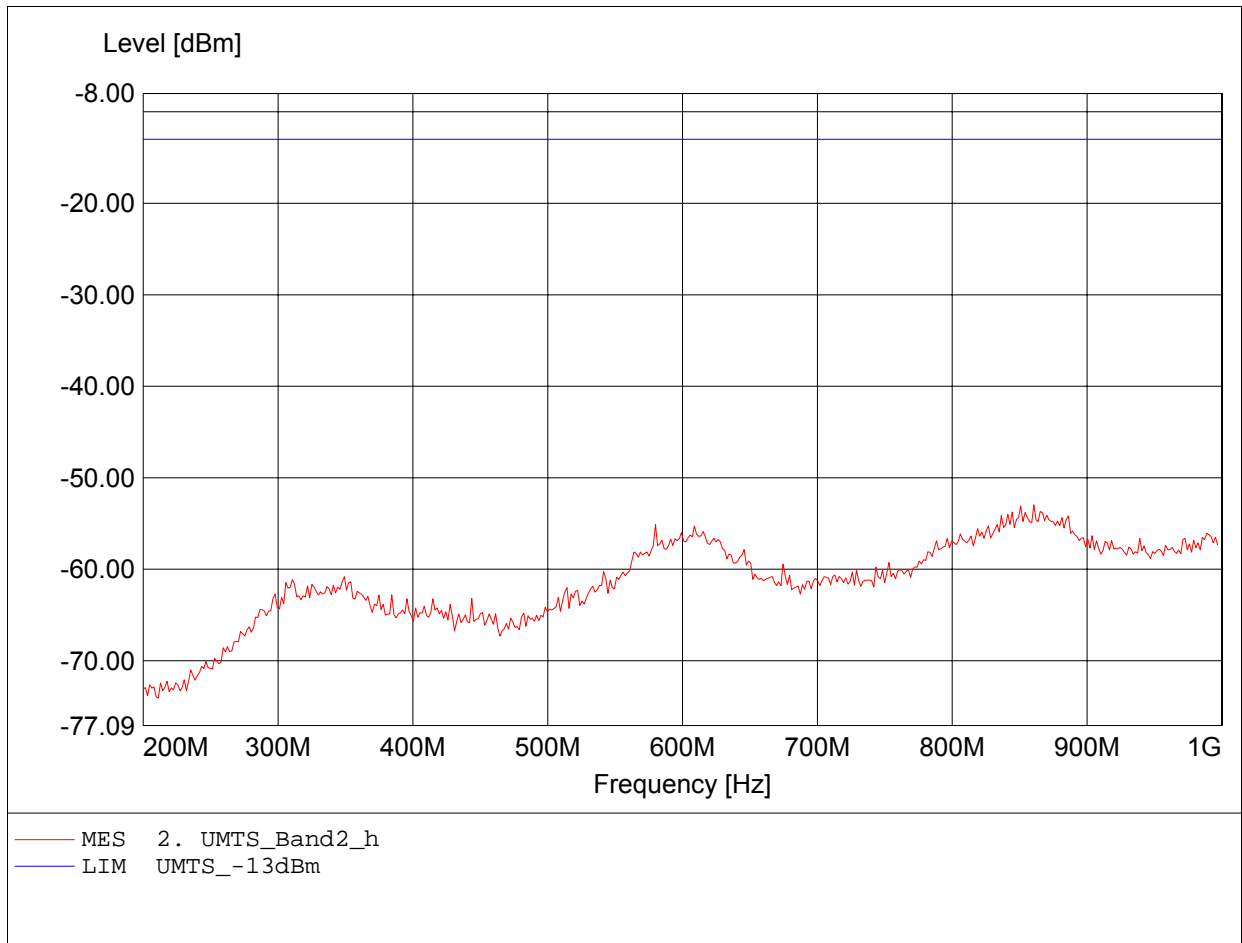


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.941GHz, Pmax: -16.15dBm, RBW: 1MHz/3kHz

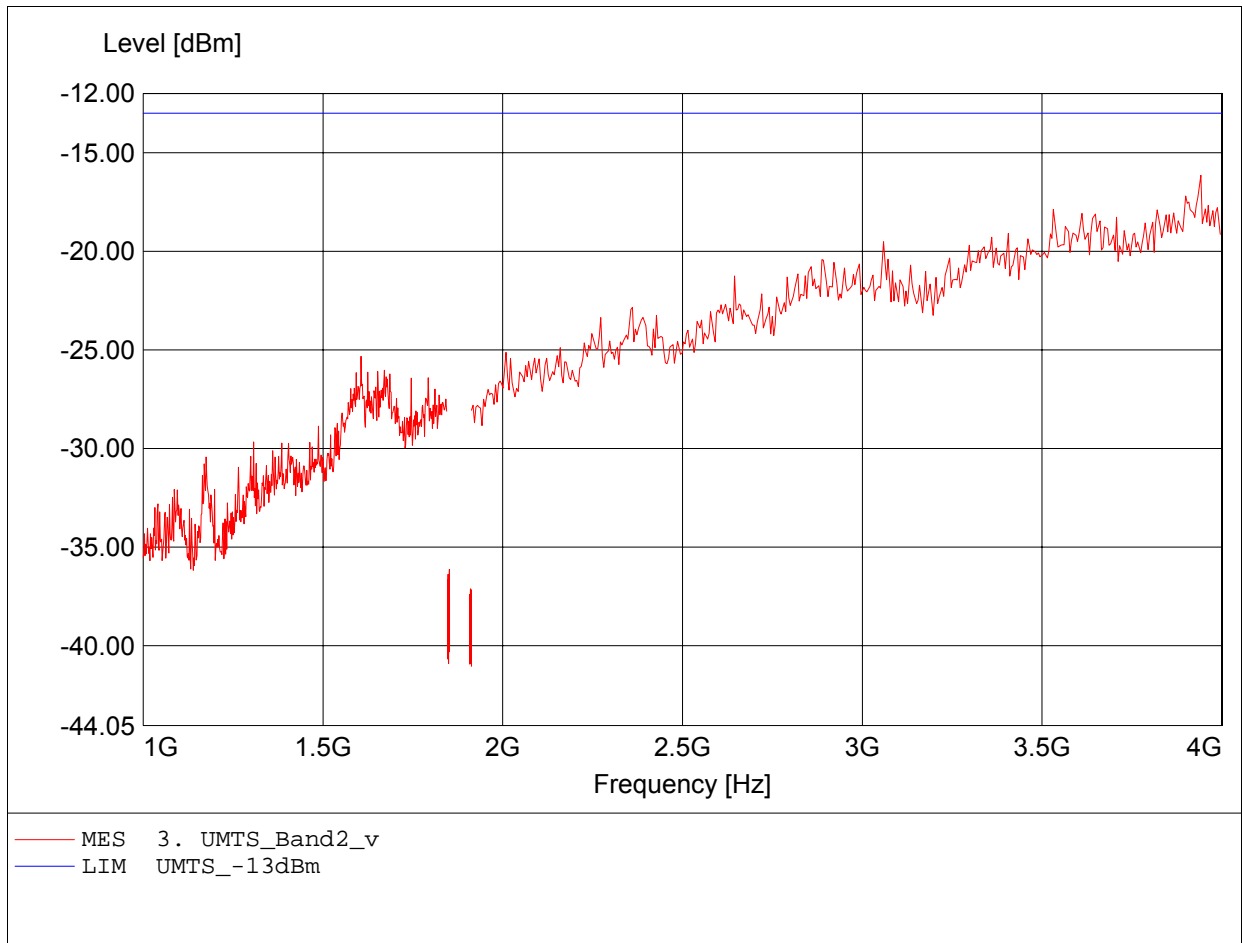


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.983GHz, Pmax: -16.62dBm, RBW: 1MHz/3kHz

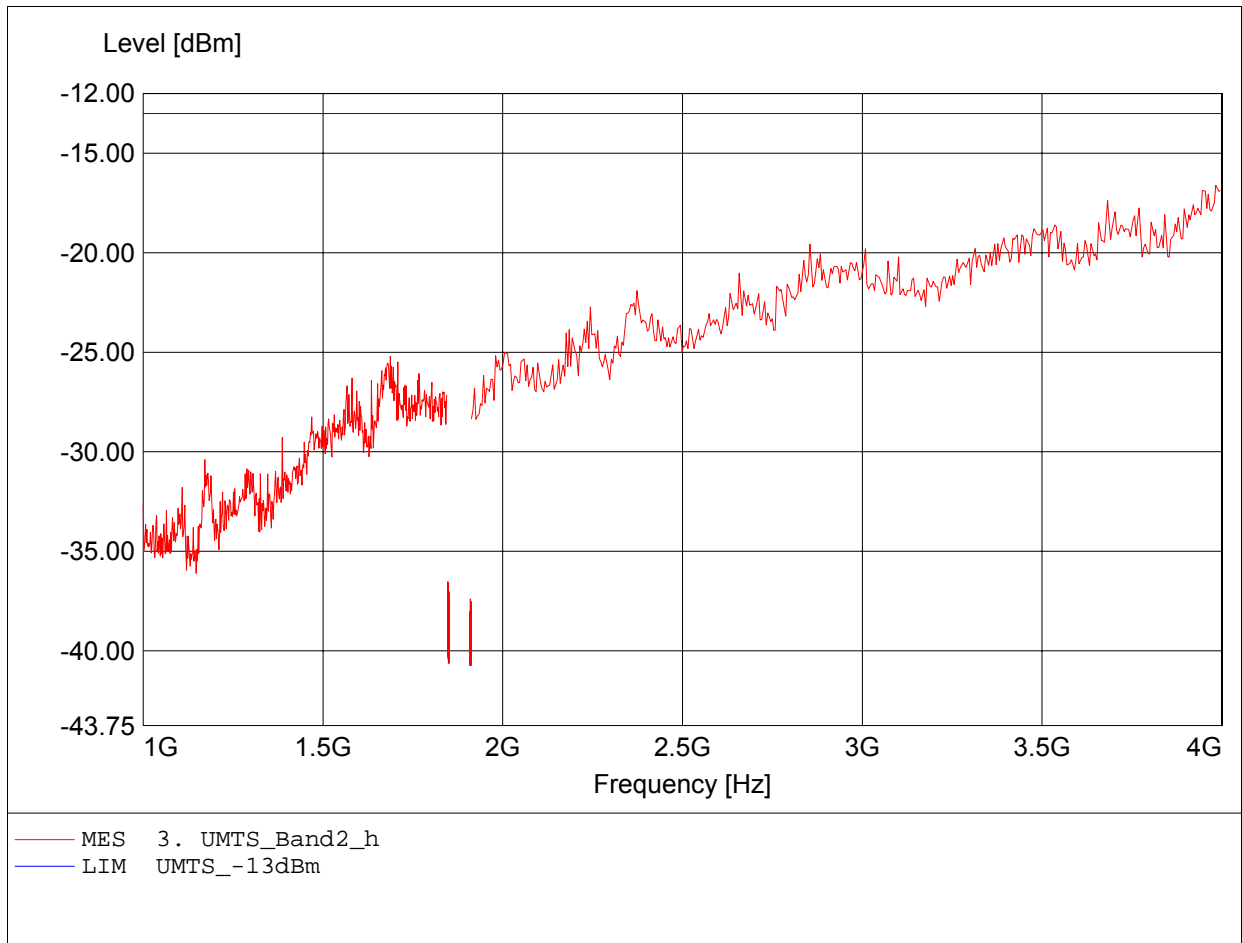


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.615GHz, Pmax: -43.43dBm, RBW: 1MHz

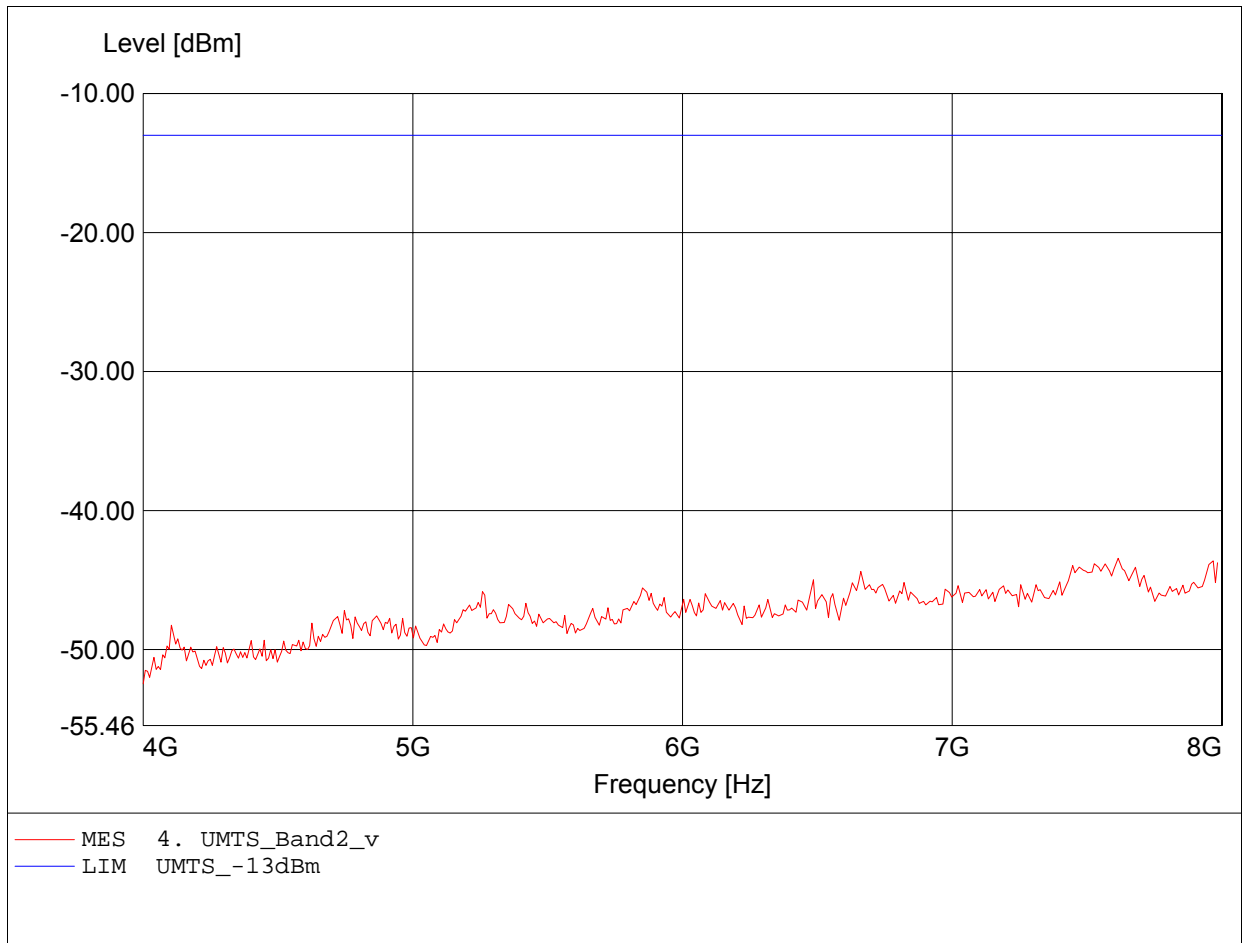


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.984GHz, Pmax: -42.64dBm, RBW: 1MHz

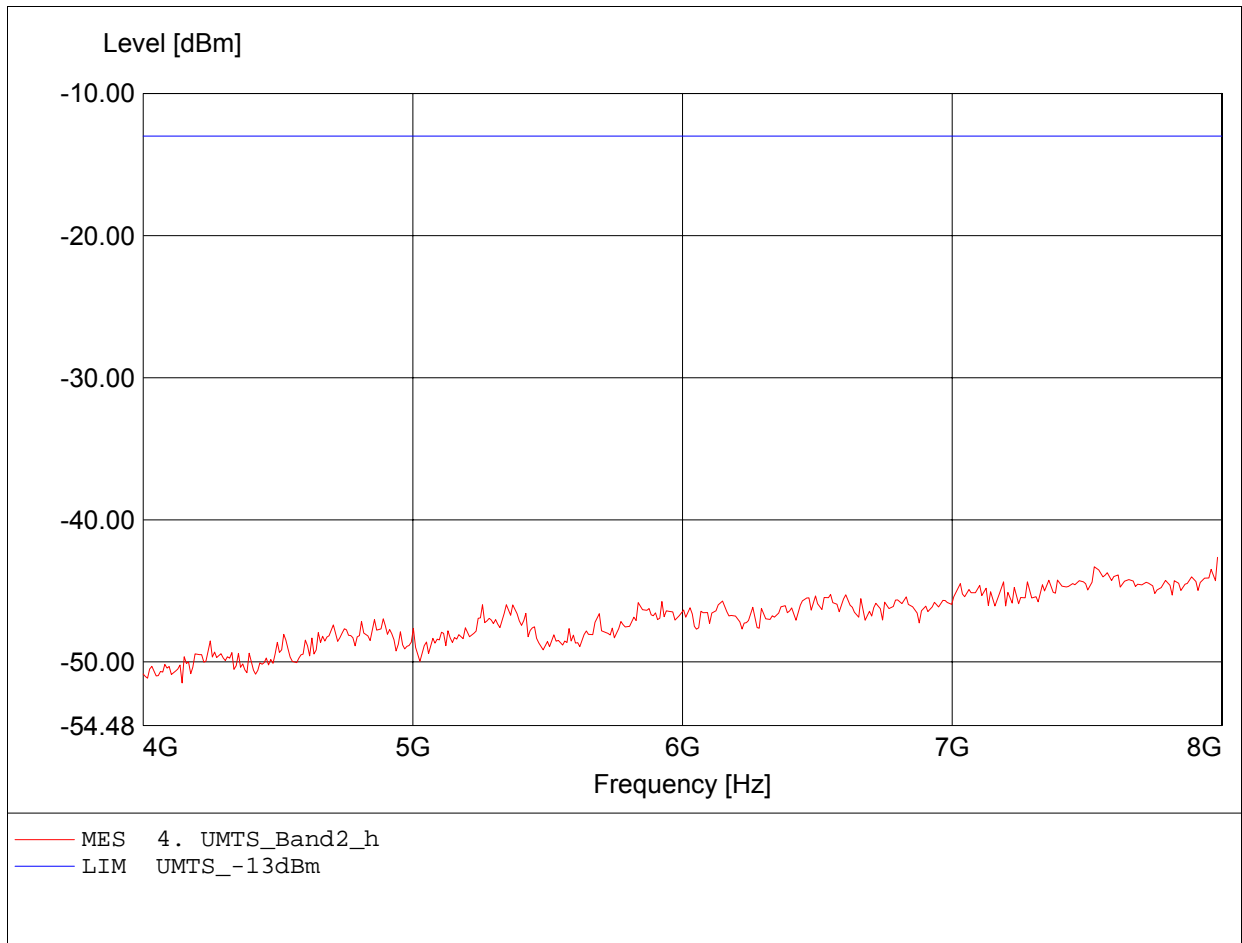


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.126GHz, Pmax: -38.38dBm, RBW: 1MHz

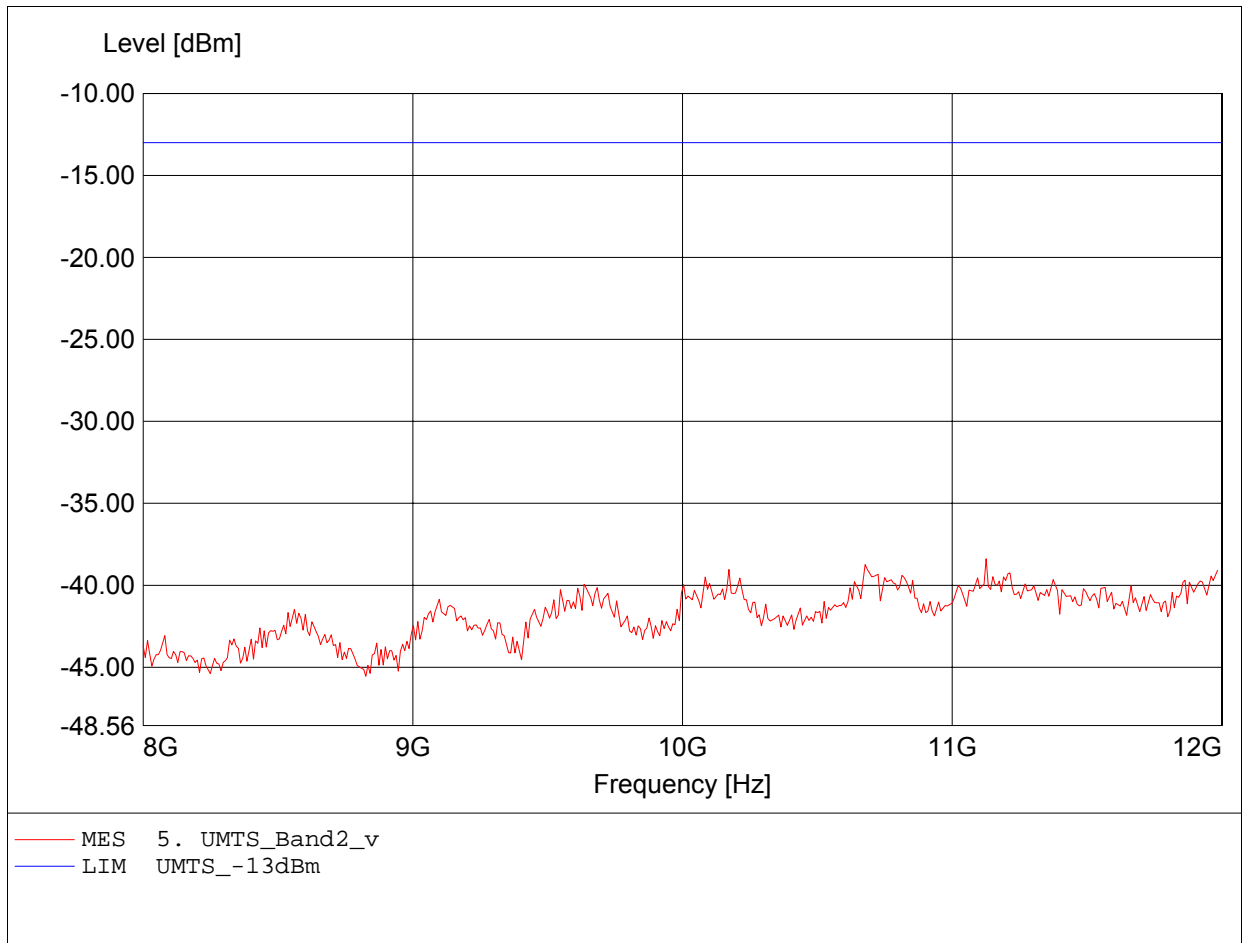


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.709GHz, Pmax: -37.69dBm, RBW: 1MHz

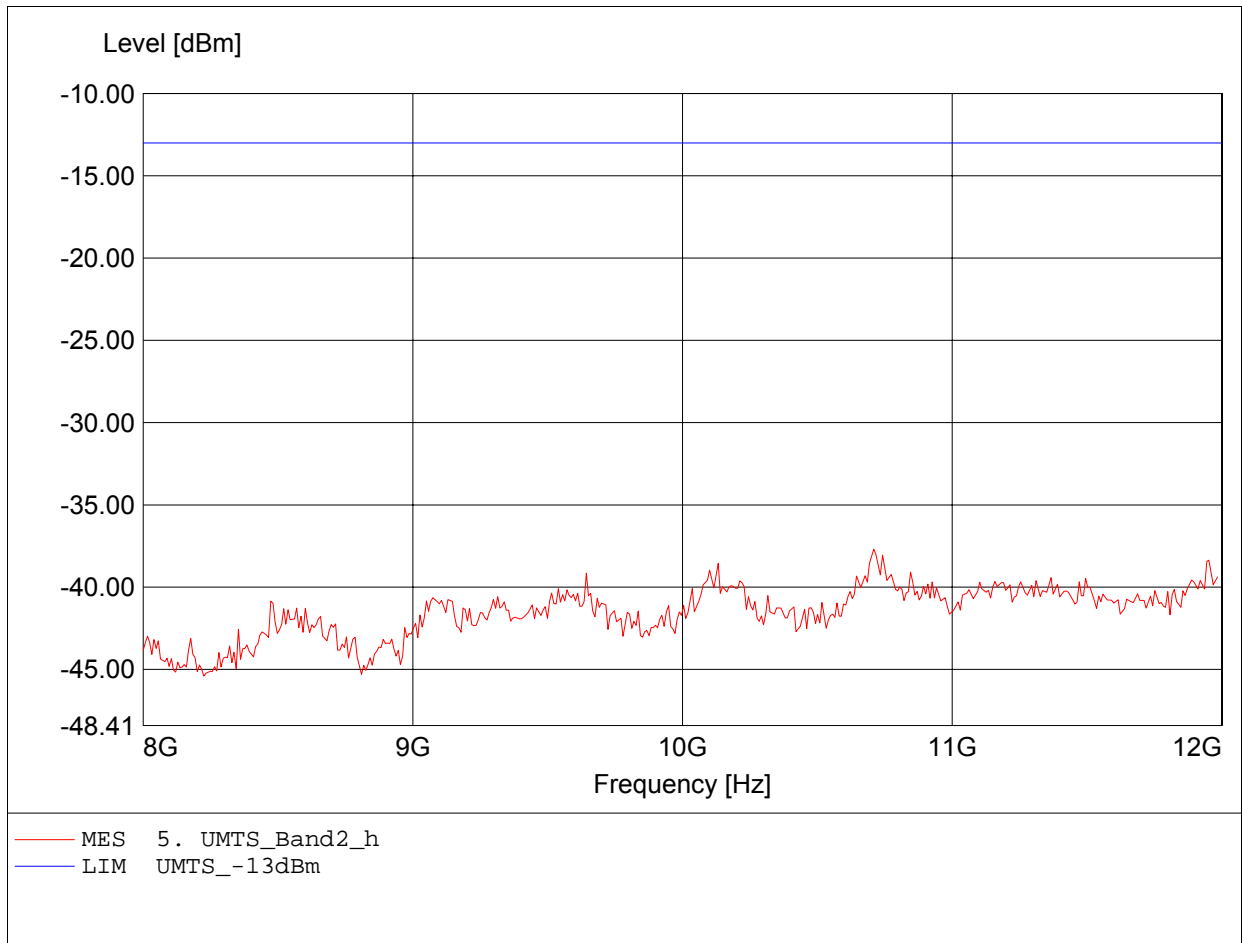


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.900GHz, Pmax: -31.48dBm, RBW: 1MHz

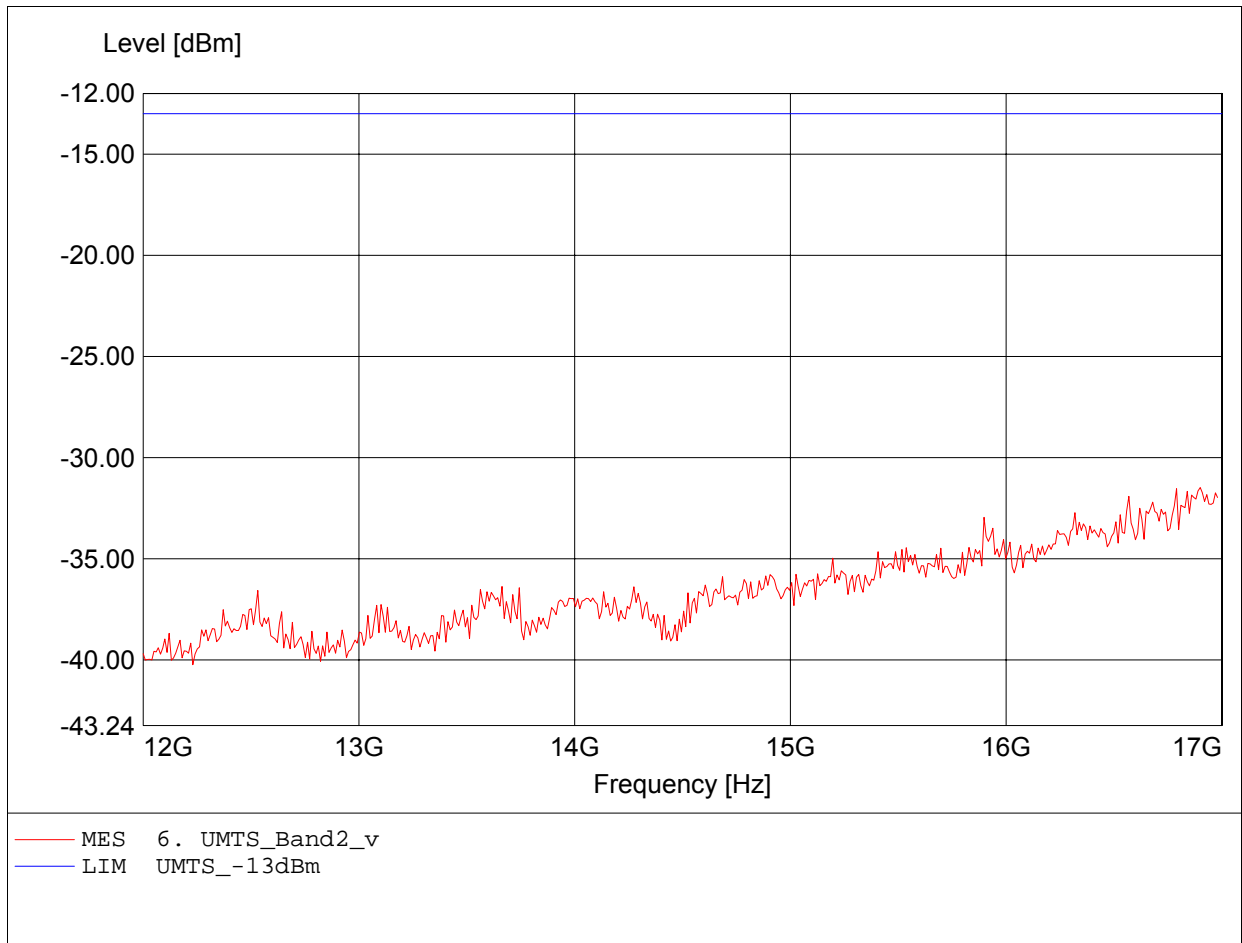


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.890GHz, Pmax: -30.30dBm, RBW: 1MHz

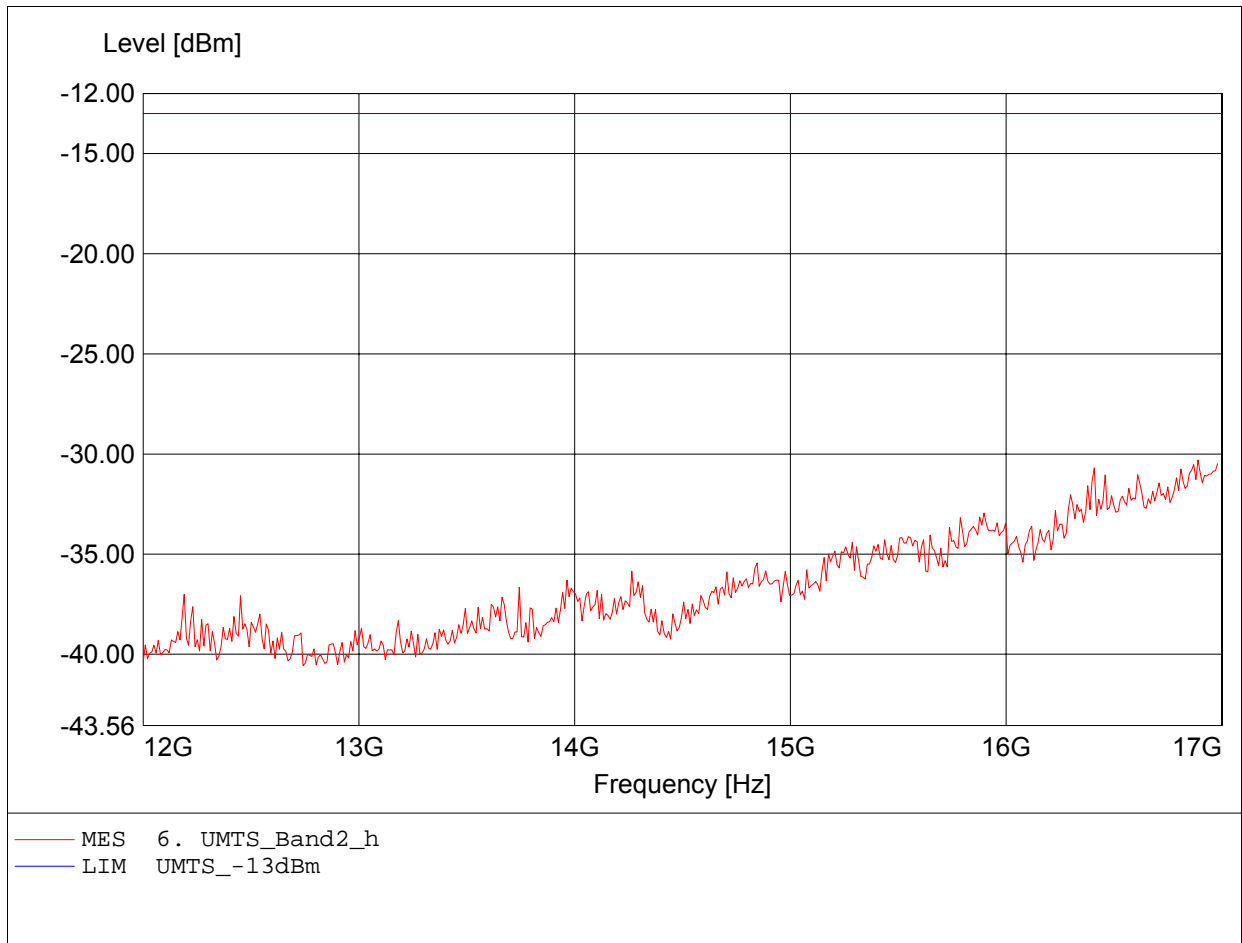


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.100GHz, Pmax: -25.20dBm, RBW: 1MHz

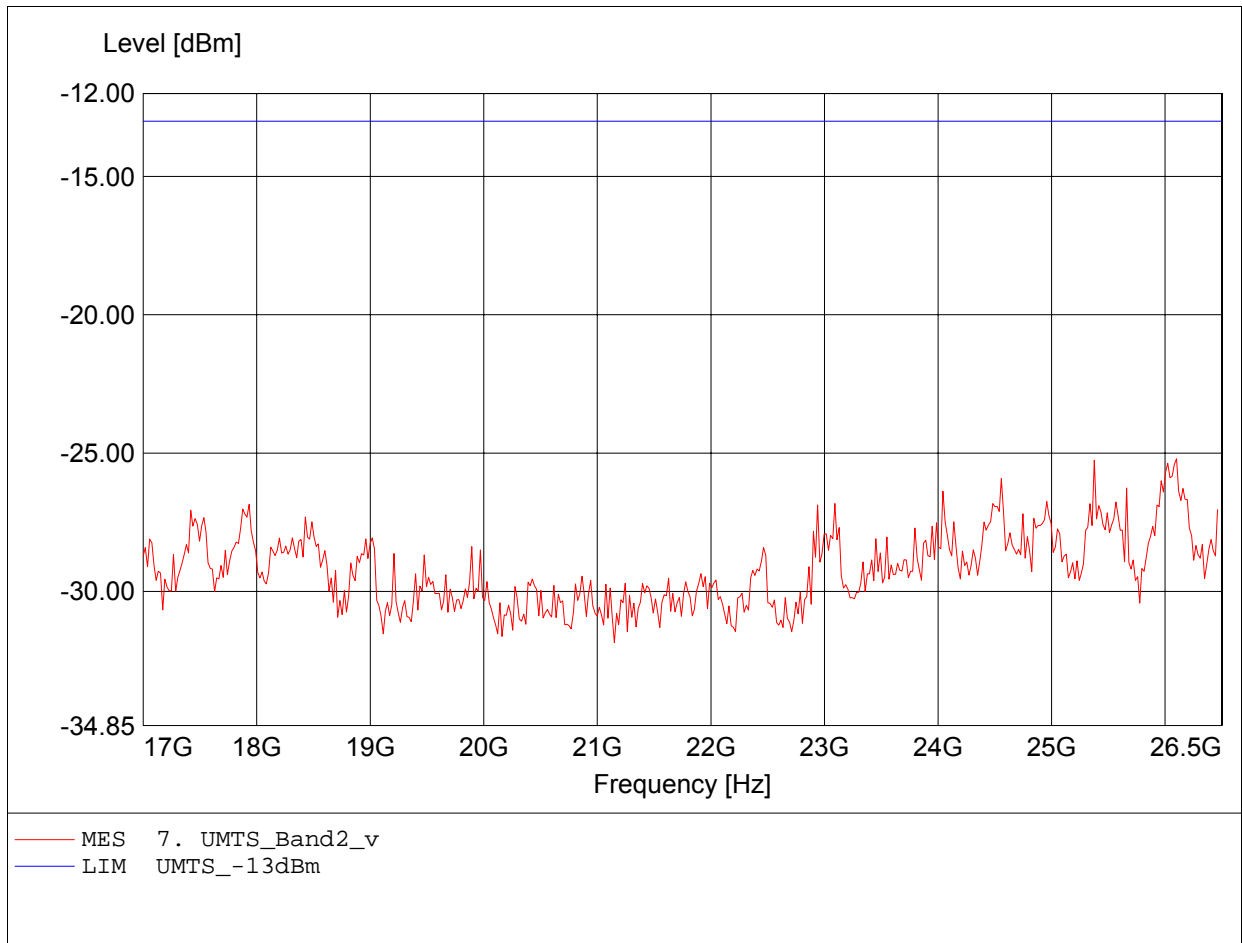


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.444GHz, Pmax: -25.61dBm, RBW: 1MHz

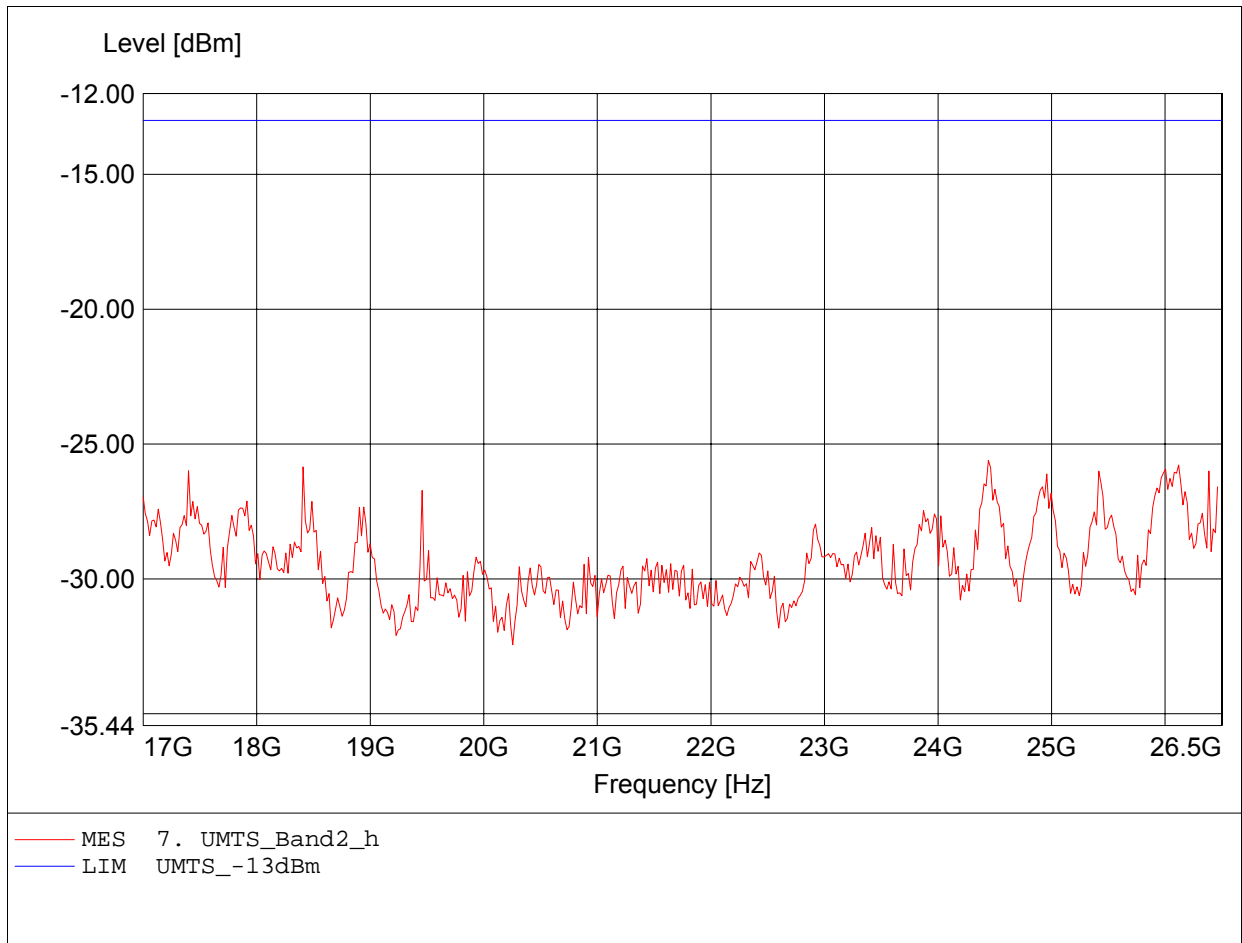


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 189.098MHz, Pmax: -67.24dBm, RBW: 100kHz

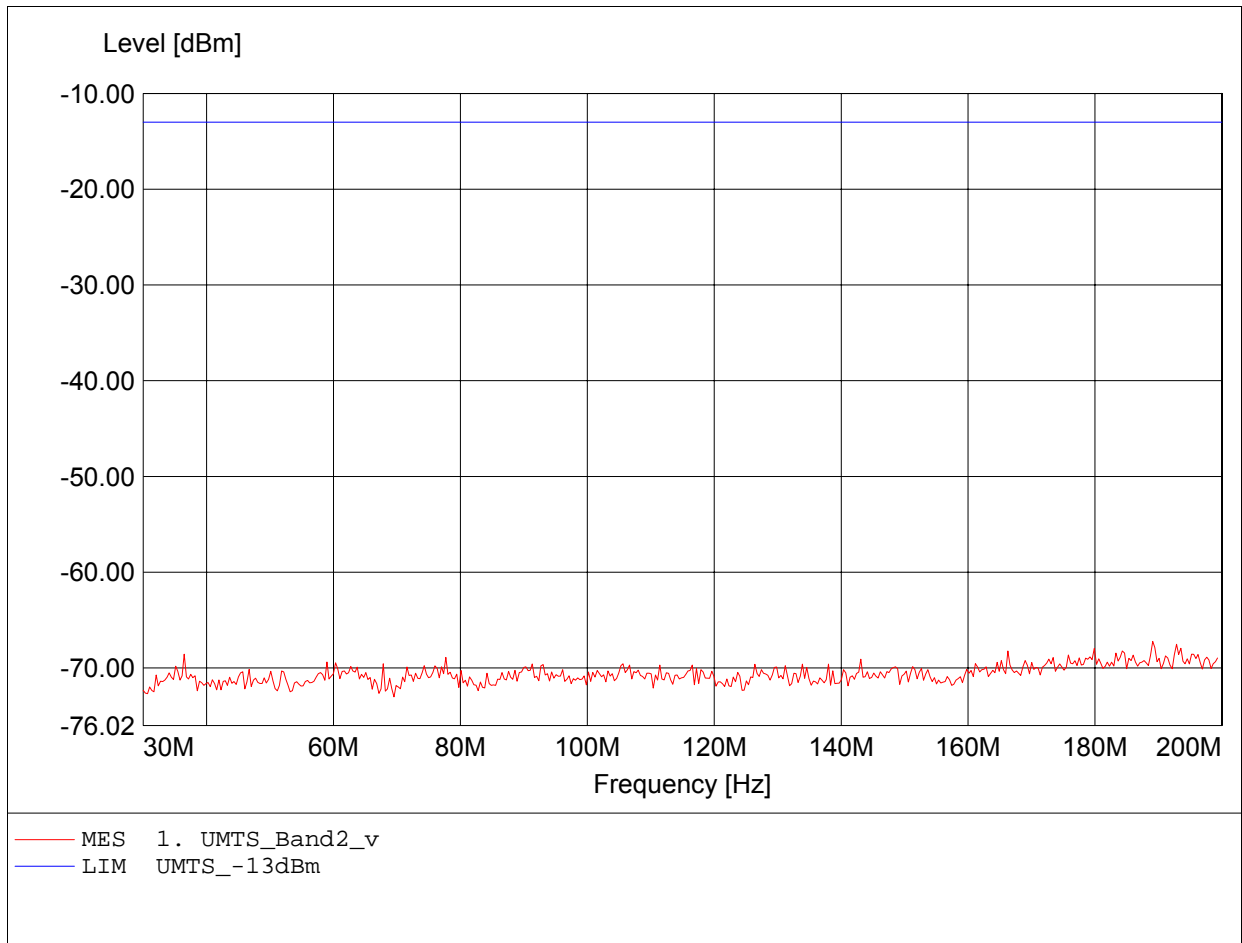


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 75.311MHz, Pmax: -68.62dBm, RBW: 100kHz

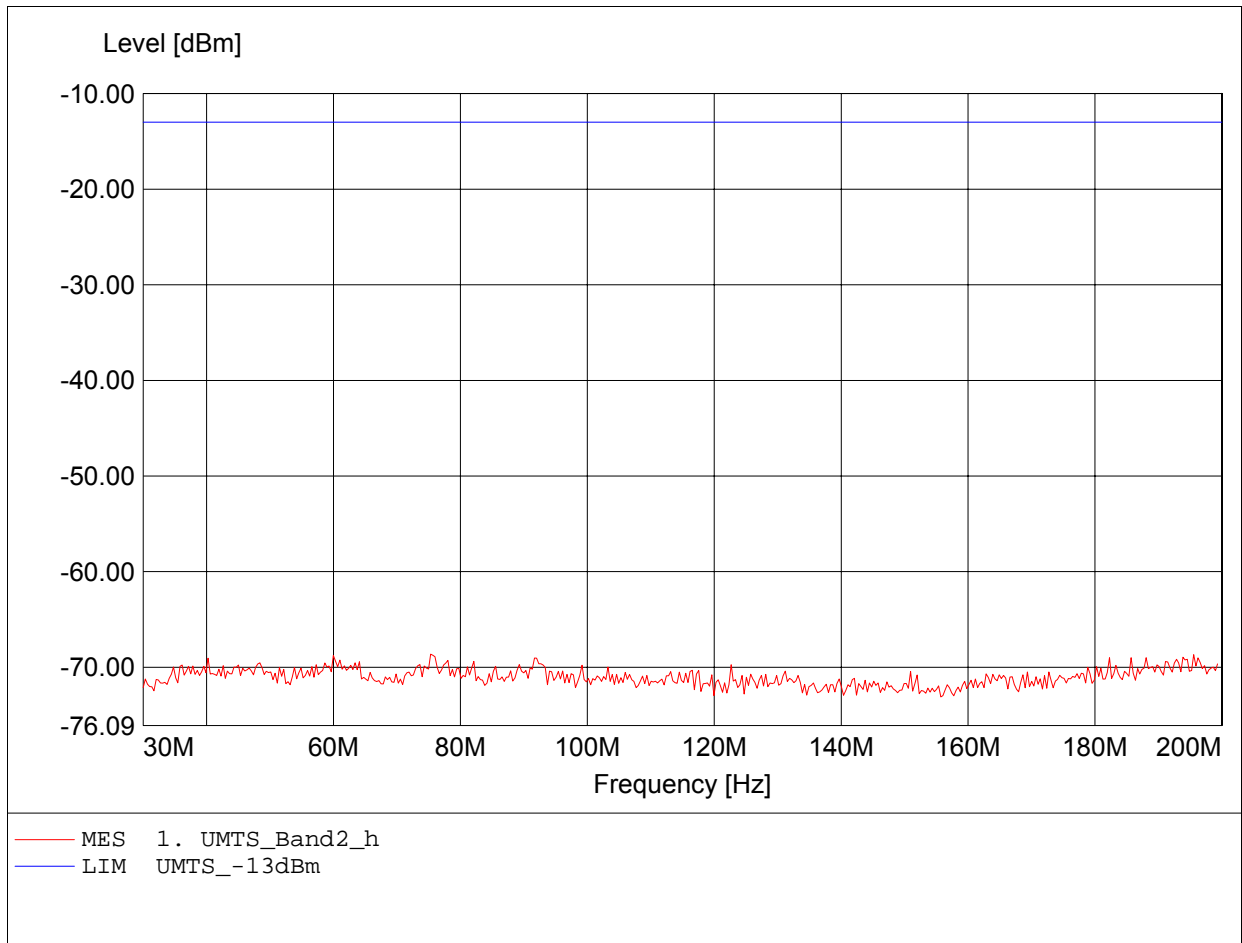


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 991.984MHz, Pmax: -54.48dBm, RBW: 100kHz

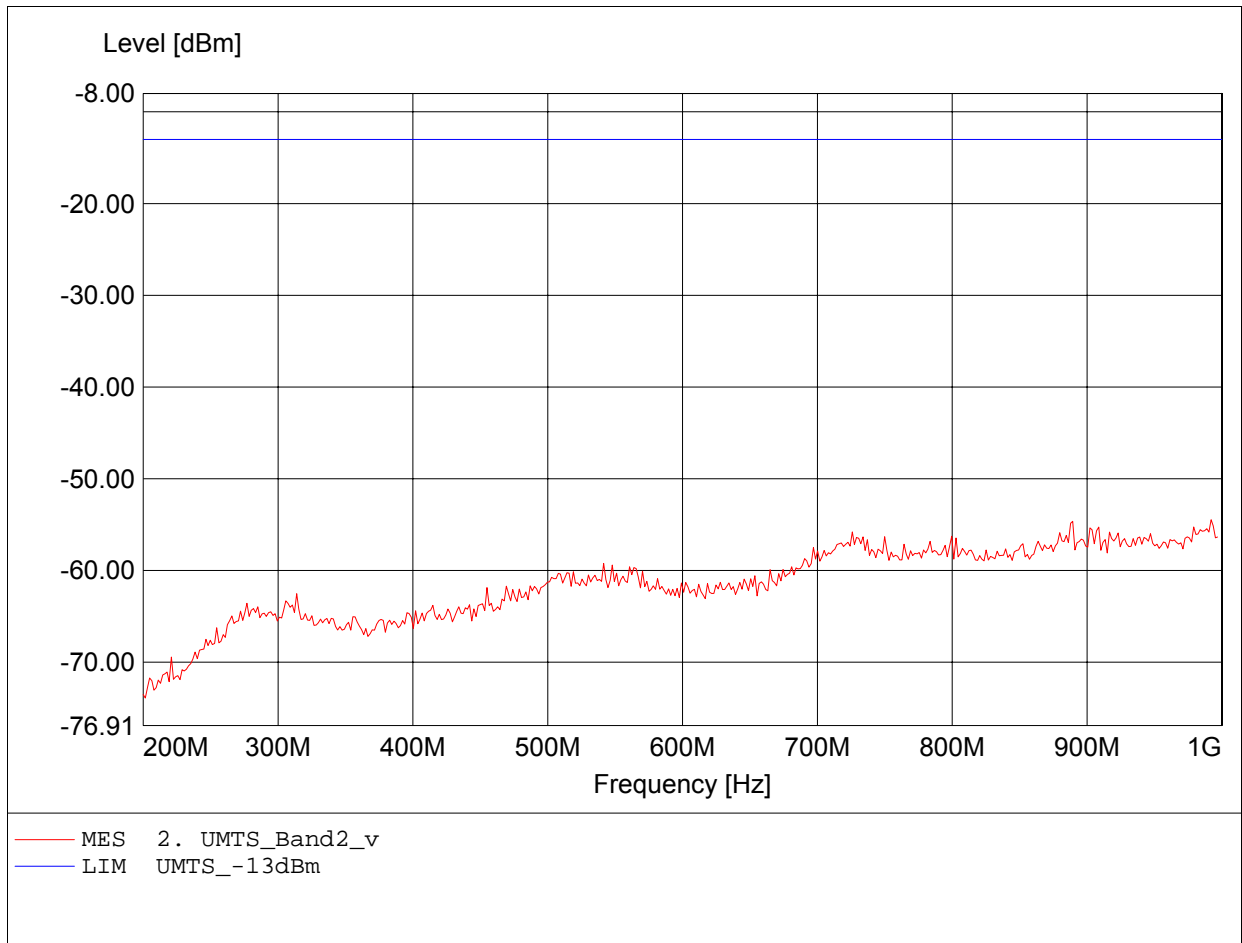


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 871.743MHz, Pmax: -53.60dBm, RBW: 100kHz

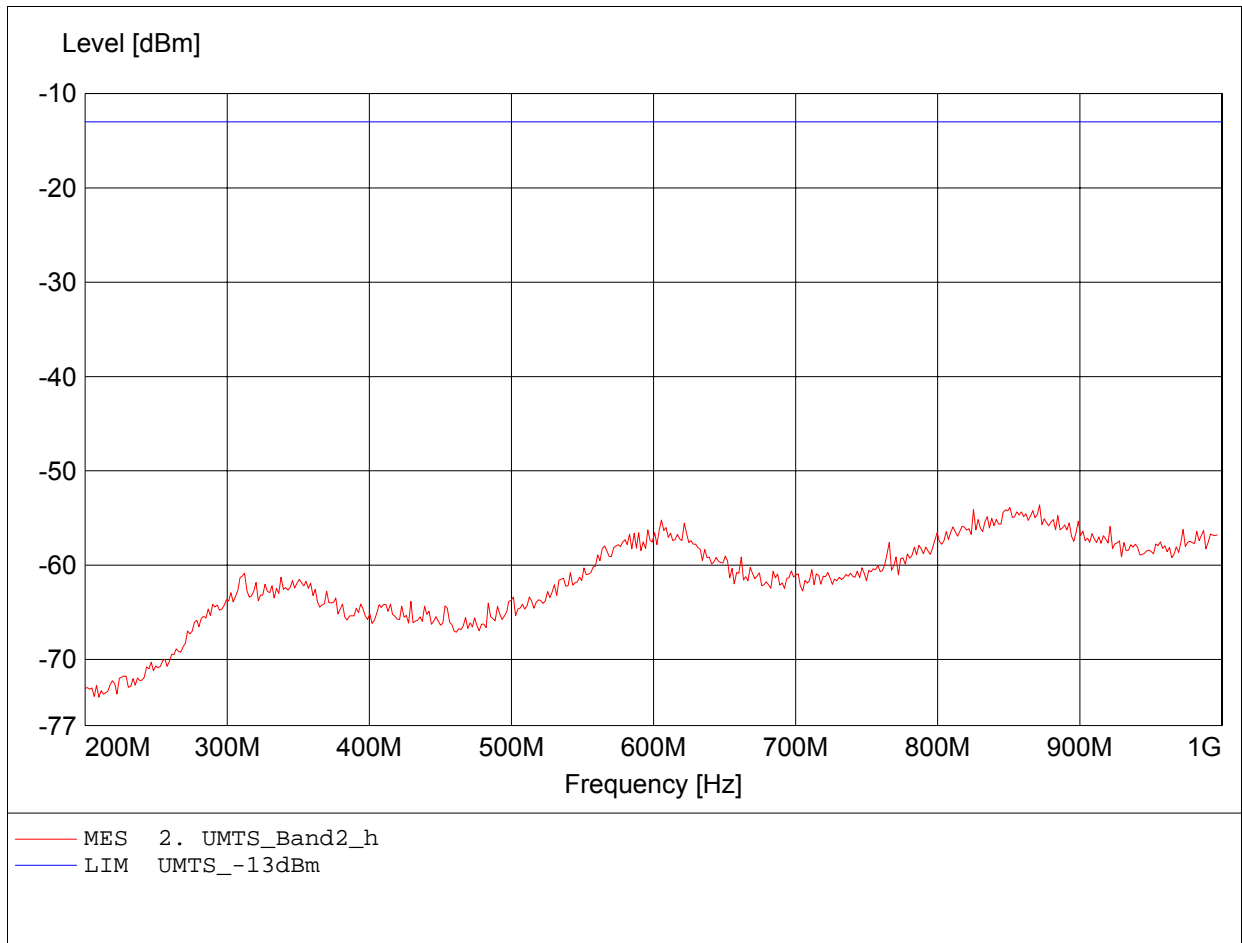


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.937GHz, Pmax: -16.47dBm, RBW: 1MHz/3kHz

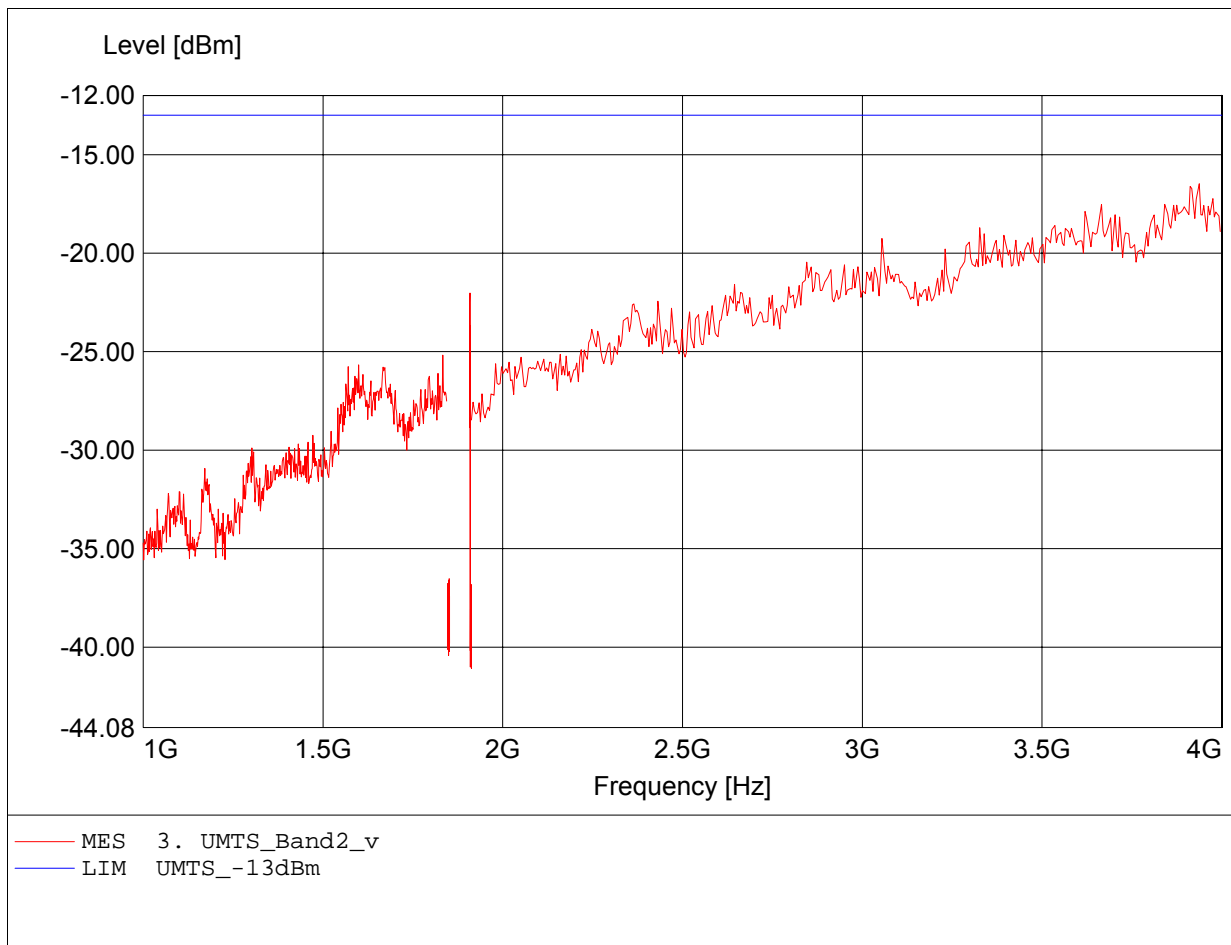


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.954GHz, Pmax: -16.26dBm, RBW: 1MHz/3kHz

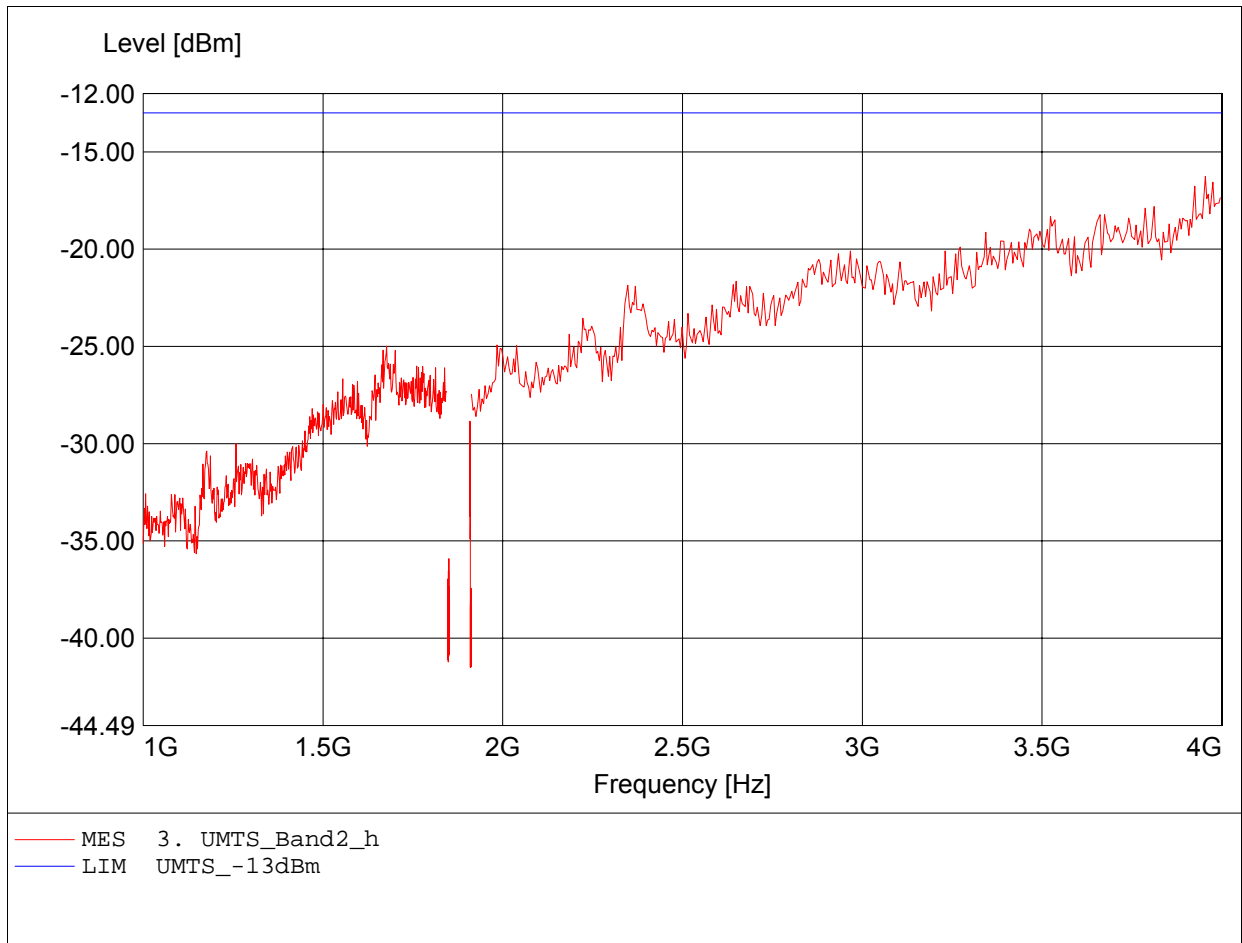


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.487GHz, Pmax: -41.83dBm, RBW: 1MHz

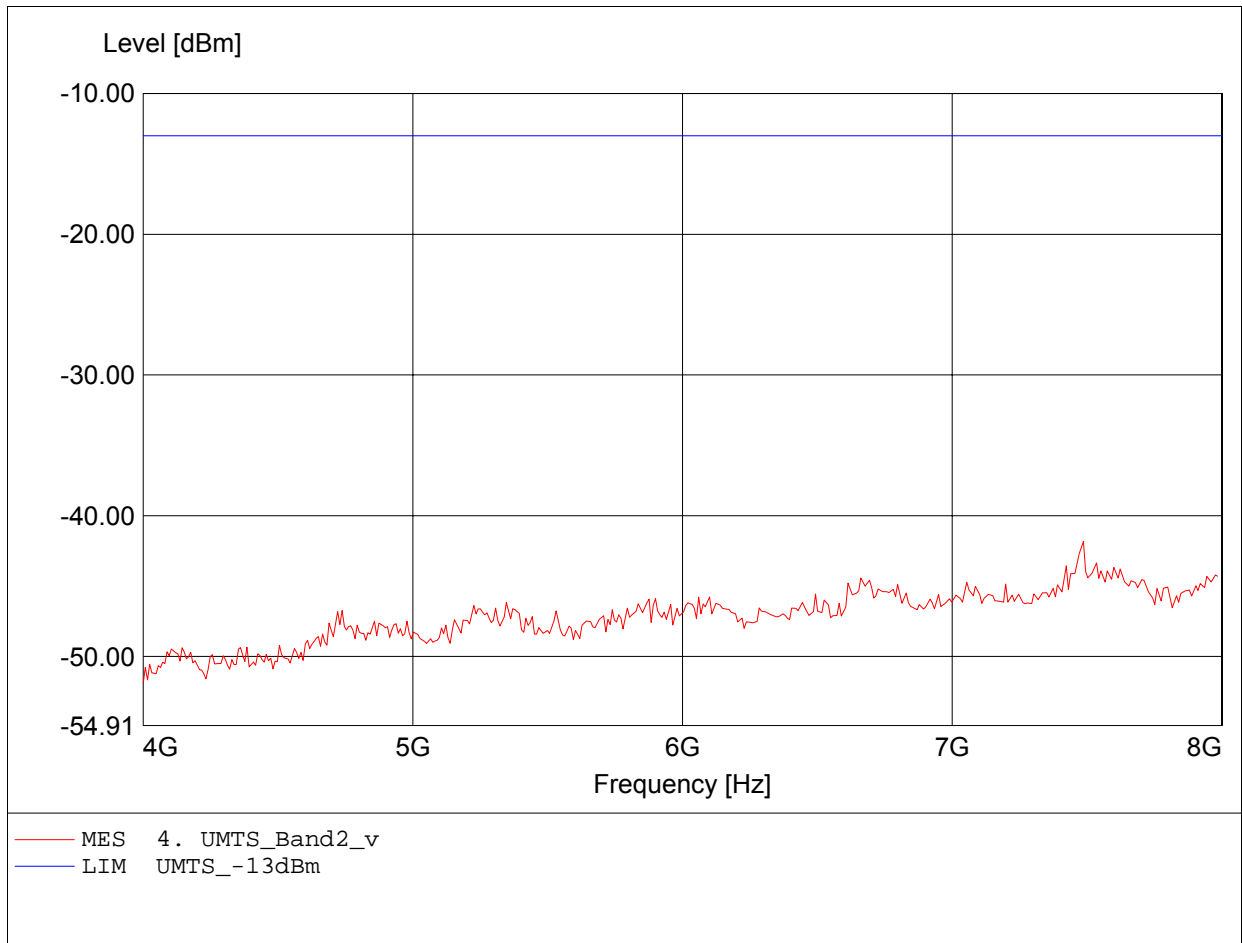


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.968GHz, Pmax: -42.74dBm, RBW: 1MHz

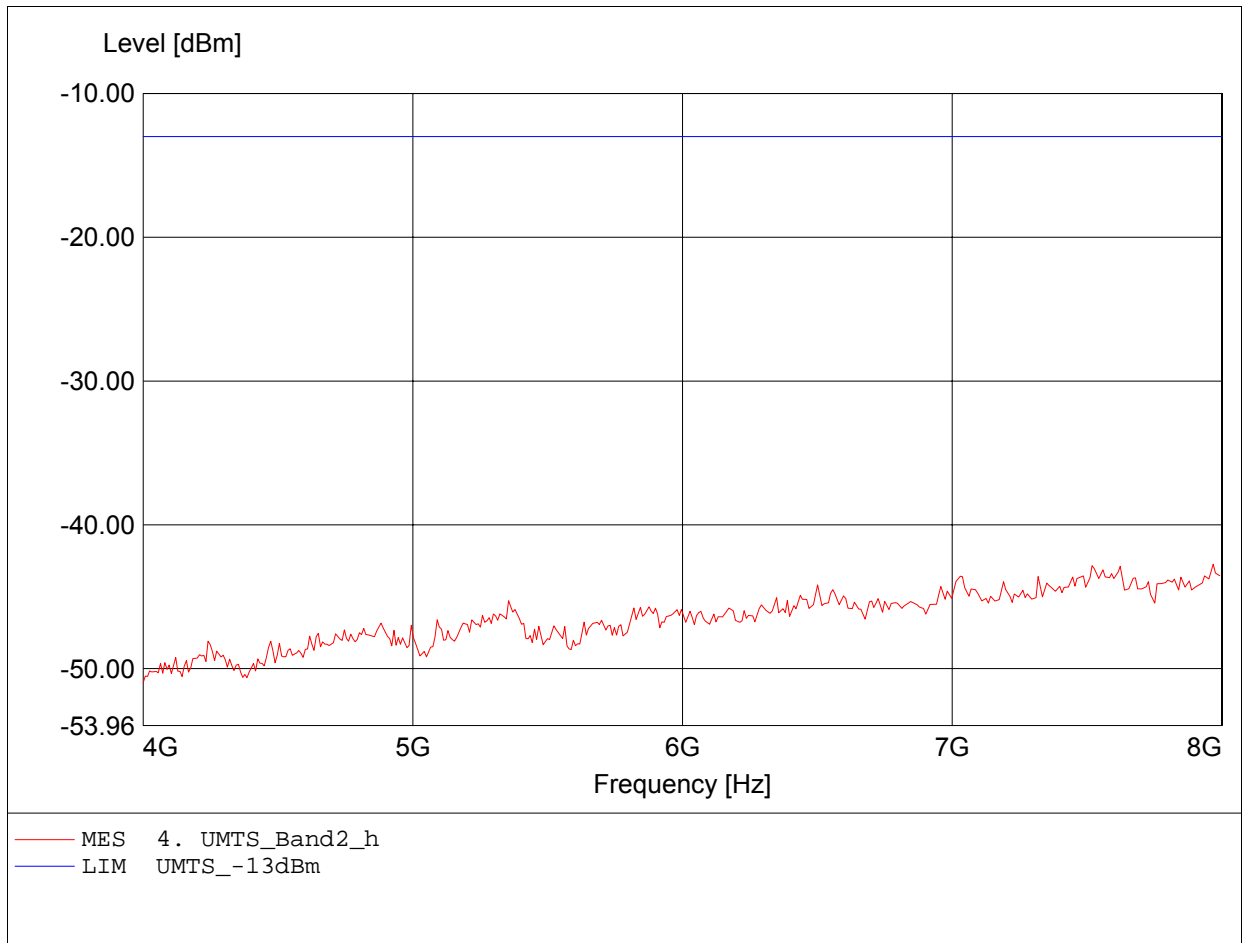


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.212GHz, Pmax: -38.20dBm, RBW: 1MHz

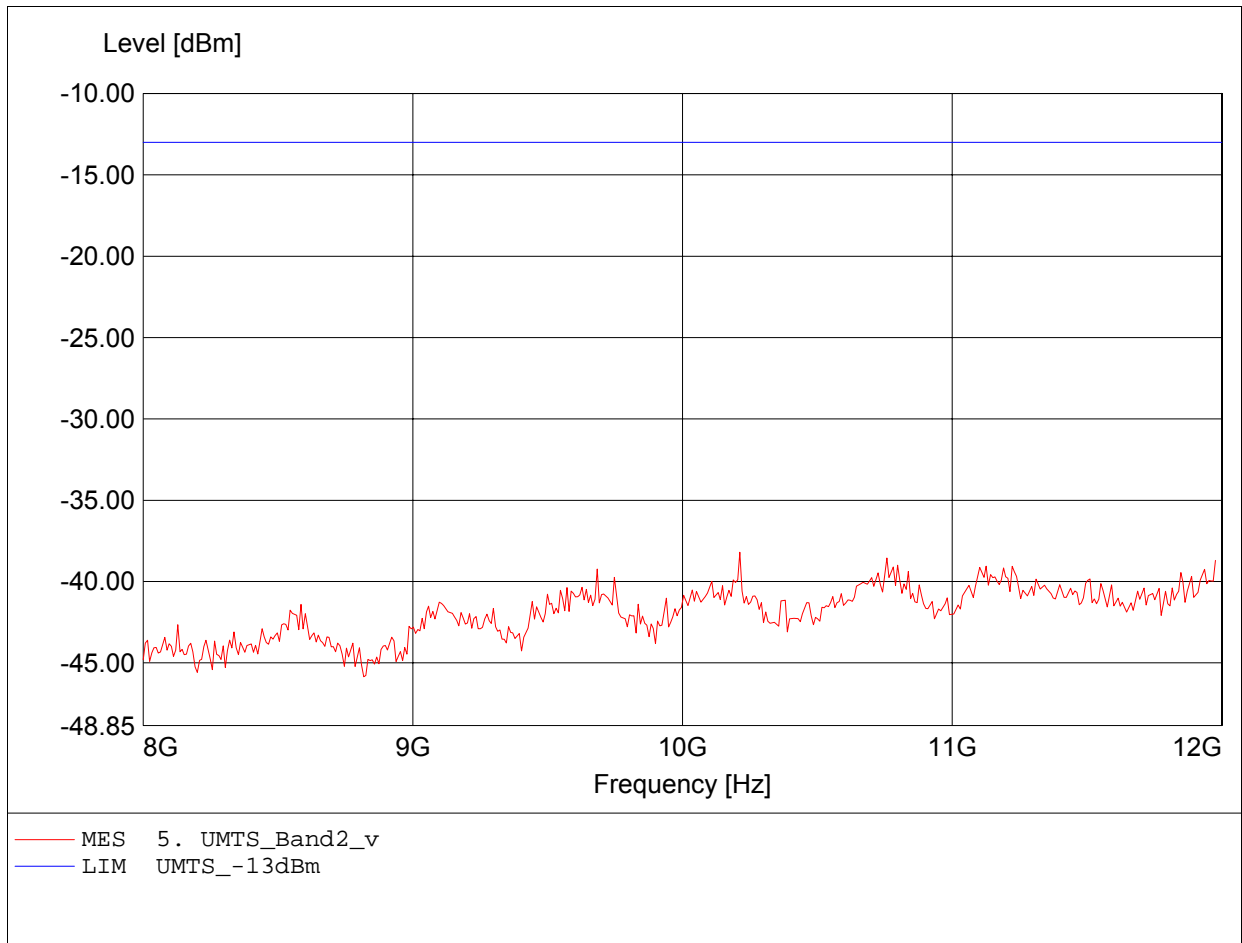


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.693GHz, Pmax: -38.35dBm, RBW: 1MHz

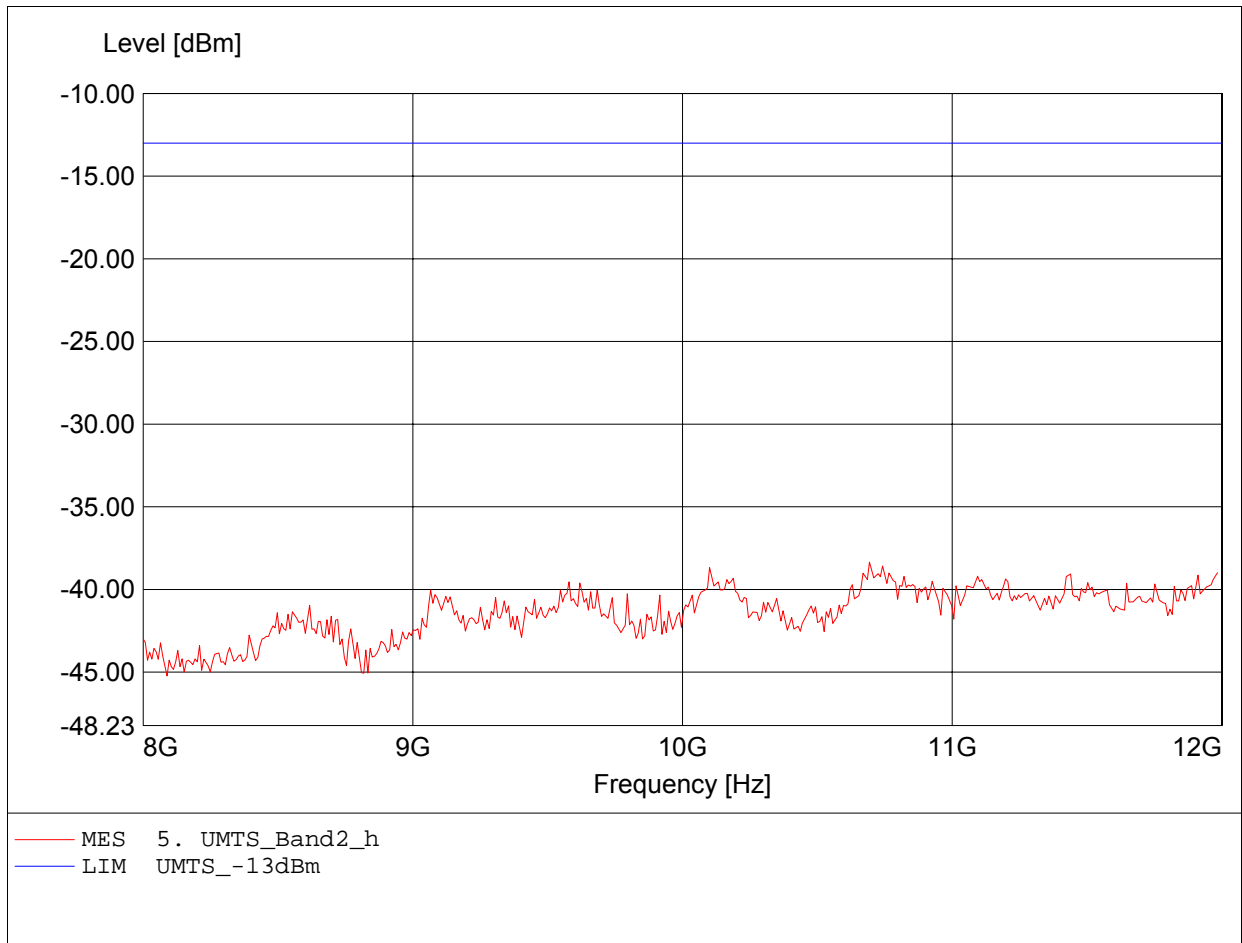


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.900GHz, Pmax: -31.11dBm, RBW: 1MHz

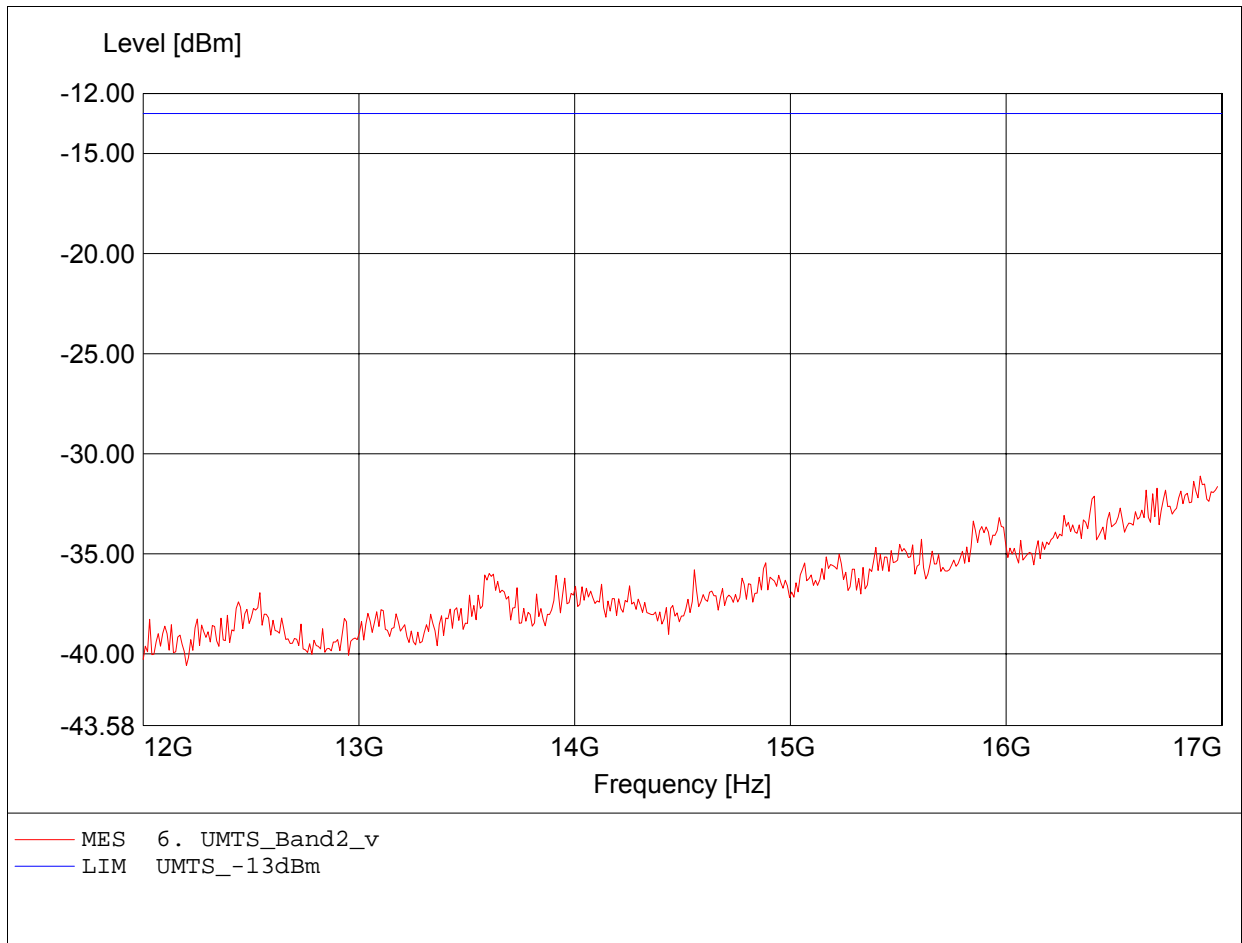


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.870GHz, Pmax: -29.70dBm, RBW: 1MHz

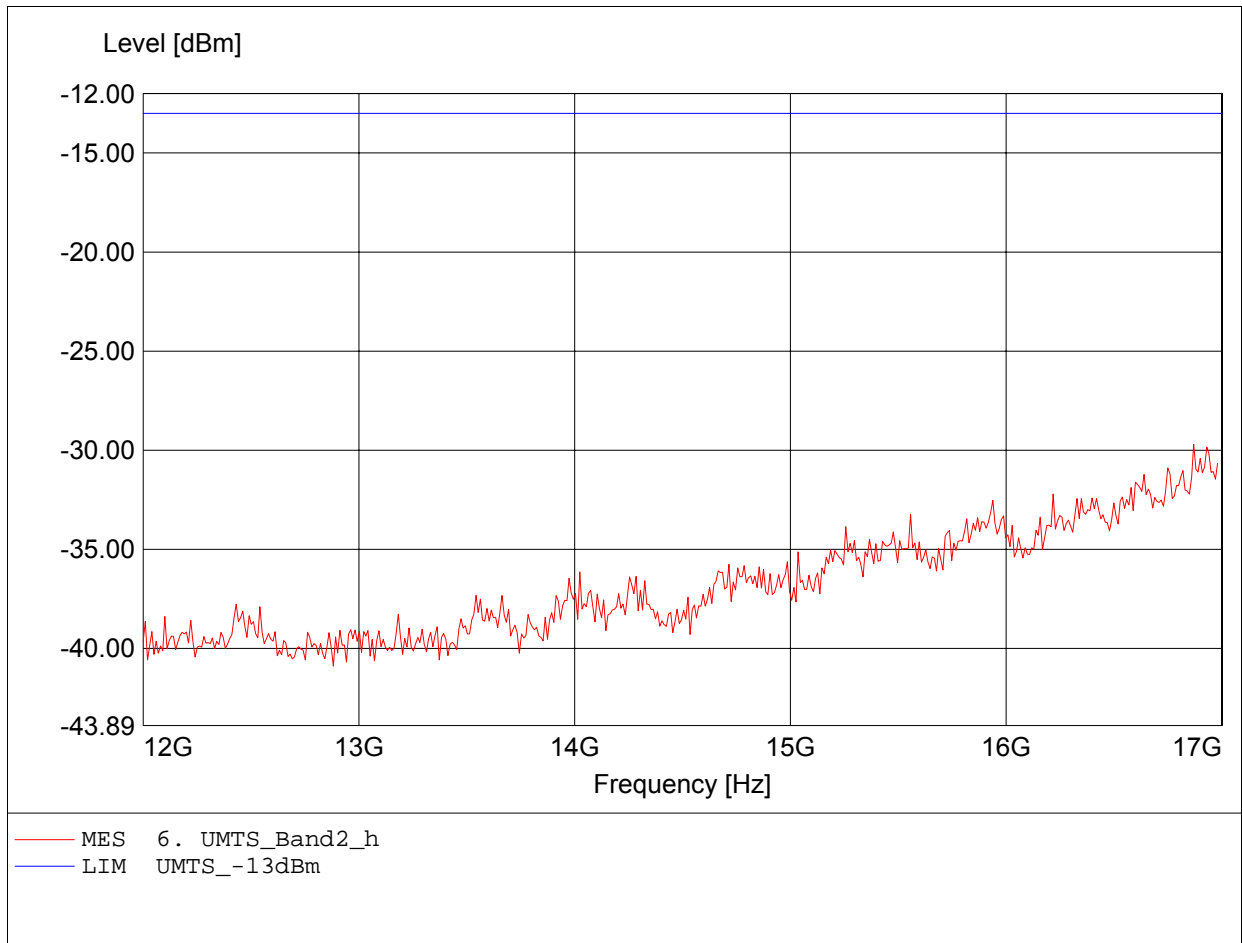


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.100GHz, Pmax: -24.31dBm, RBW: 1MHz

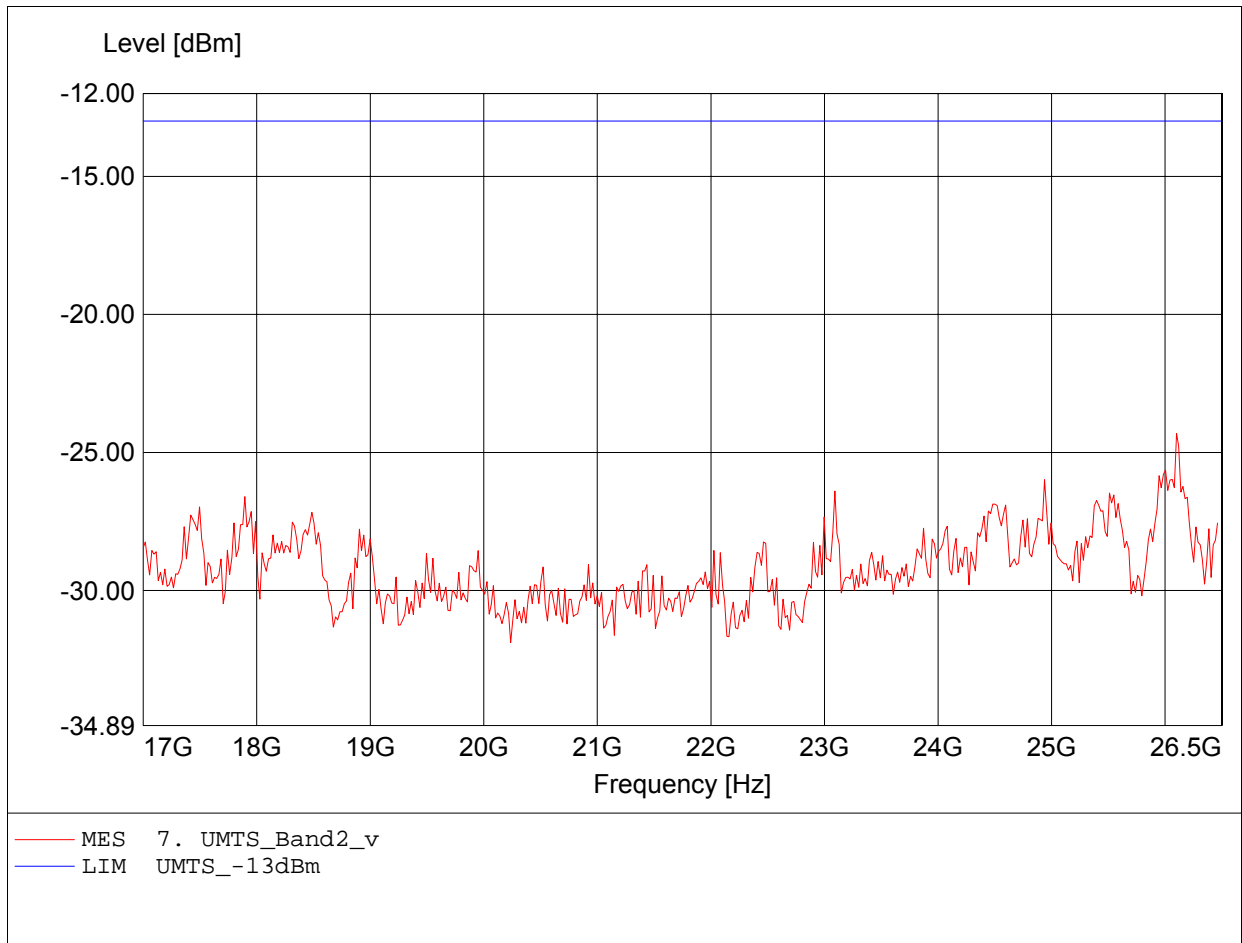


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umin.: 3.60 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.005GHz, Pmax: -24.47dBm, RBW: 1MHz

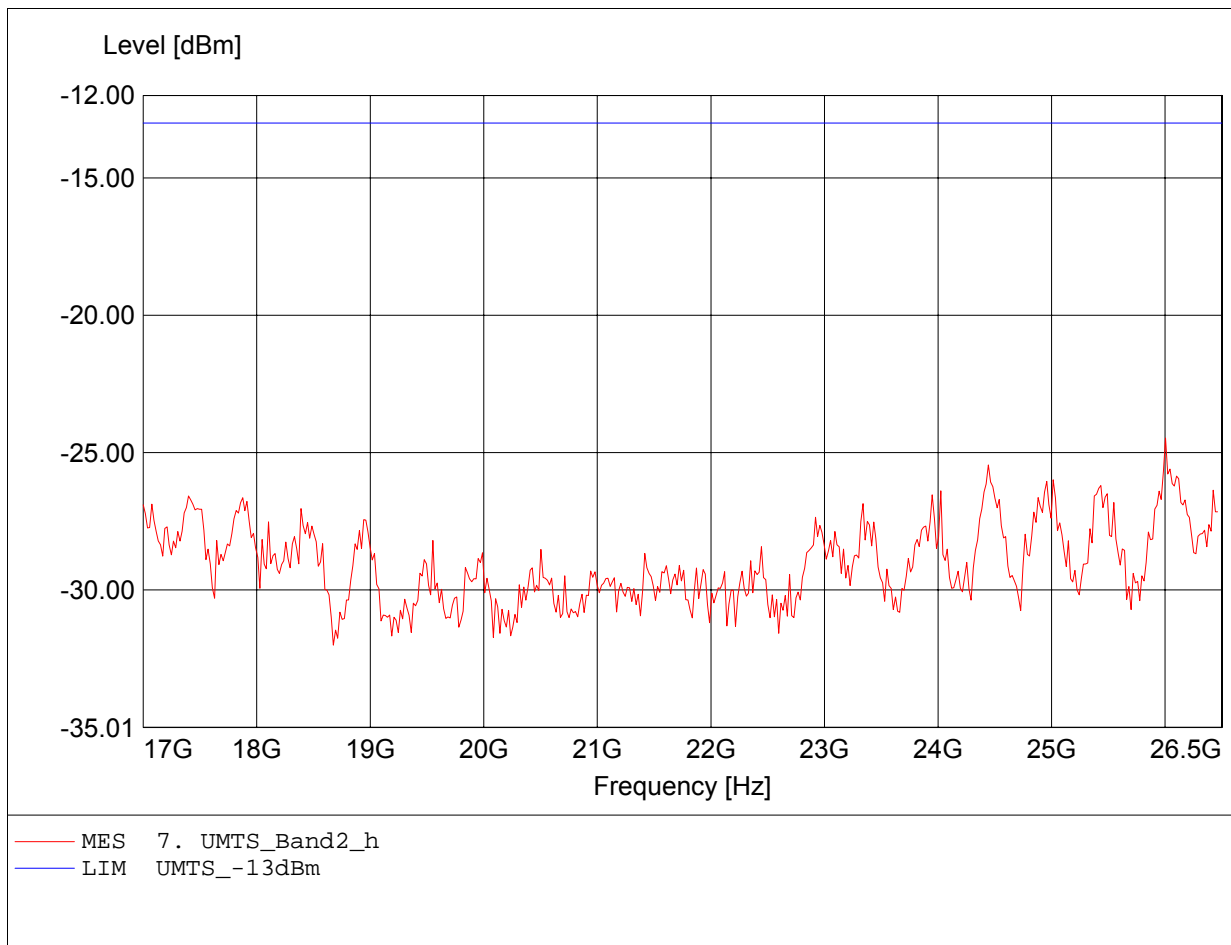


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.010MHz, Pmax: -60.12dBm, RBW: 100kHz

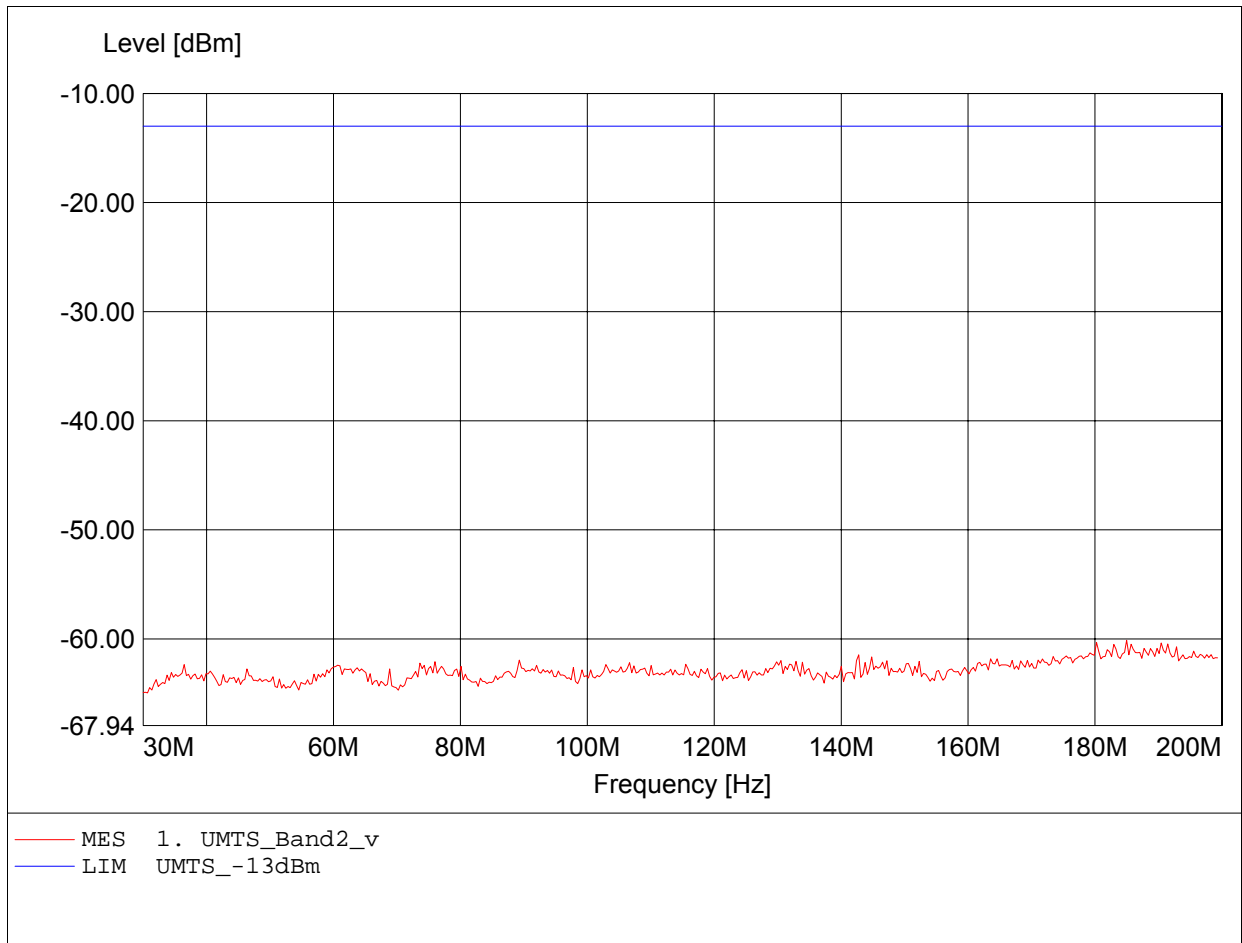


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 36.473MHz, Pmax: -61.13dBm, RBW: 100kHz

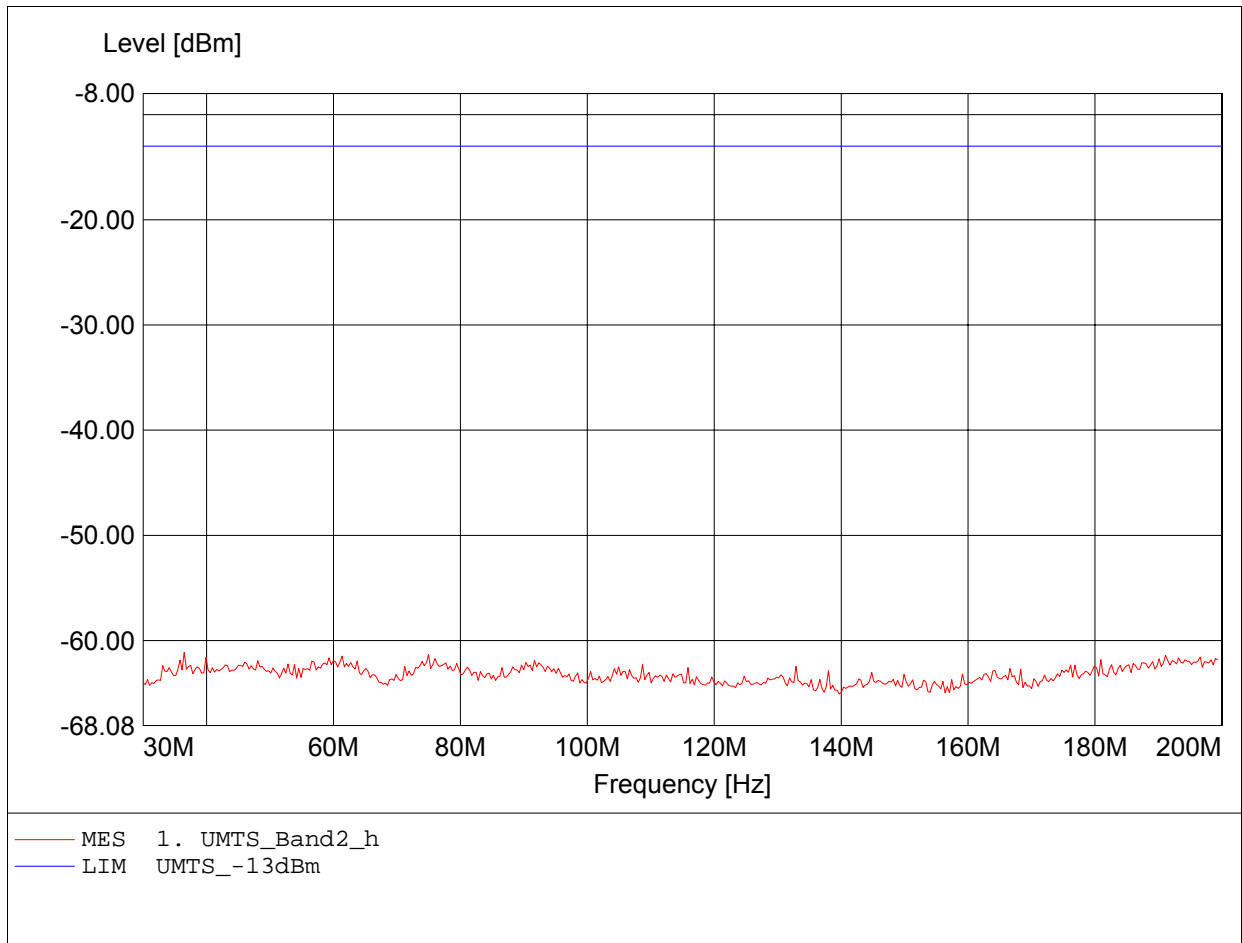


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 967.936MHz, Pmax: -47.02dBm, RBW: 100kHz

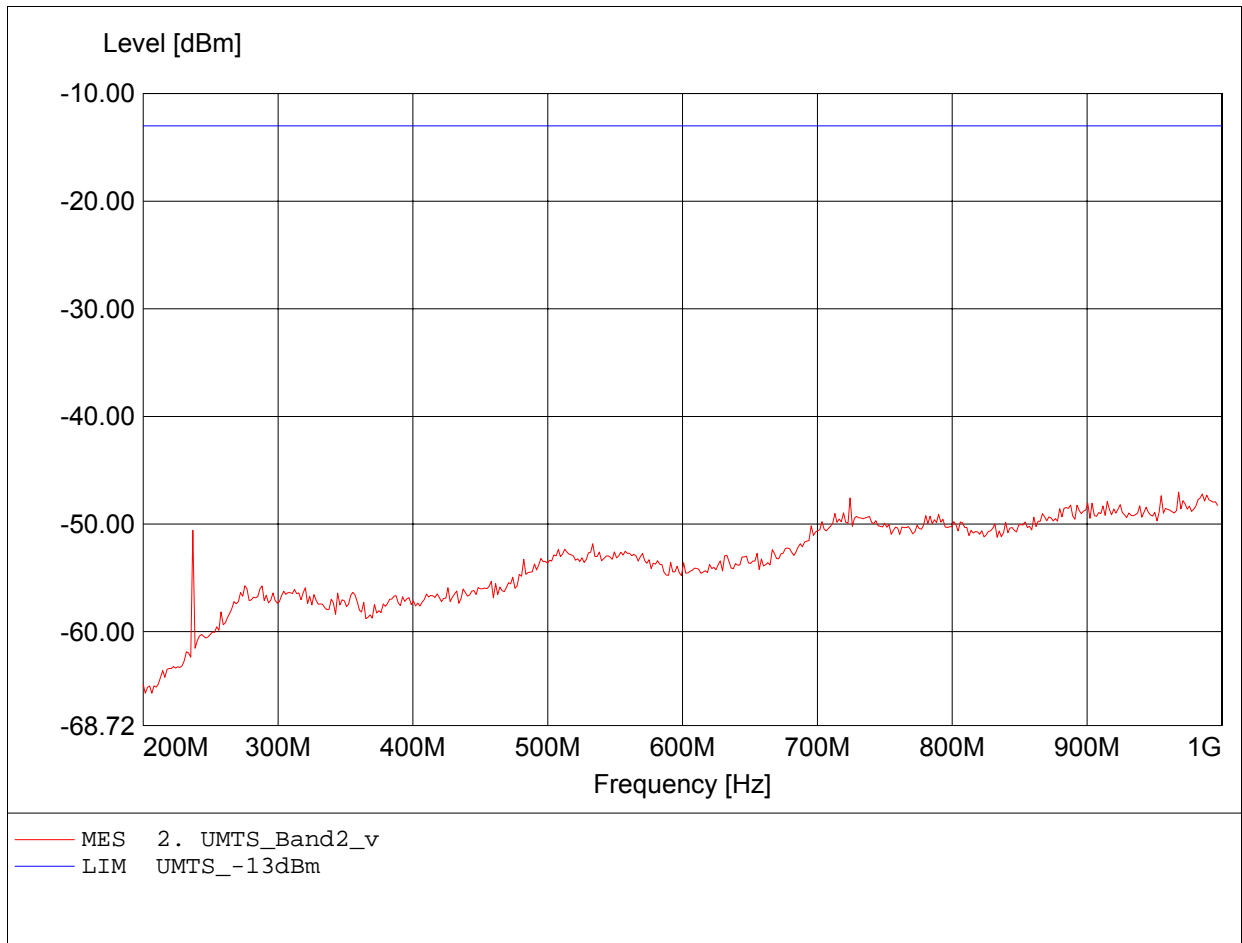


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 873.347MHz, Pmax: -46.17dBm, RBW: 100kHz

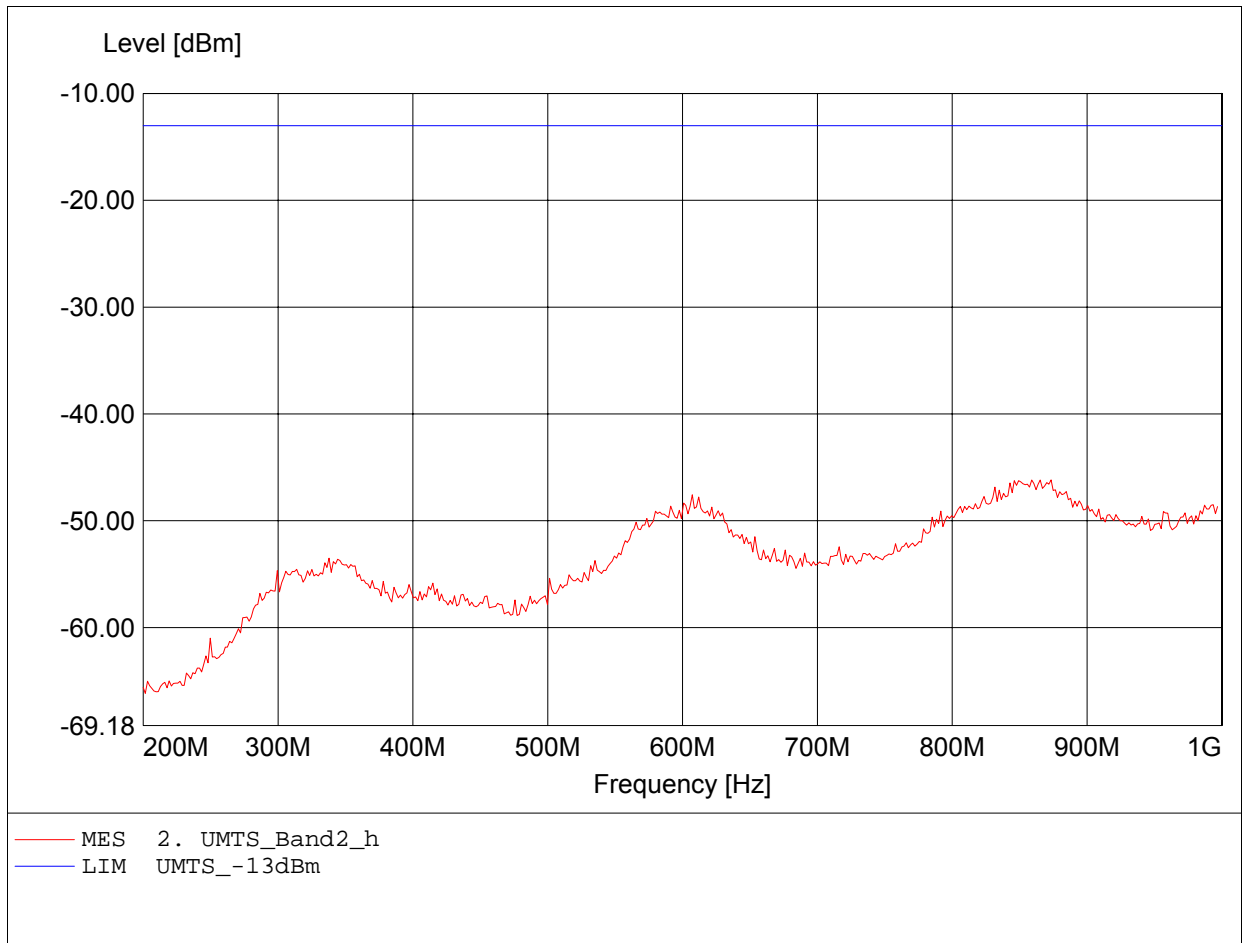


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.971GHz, Pmax: -16.69dBm, RBW: 1MHz/3kHz

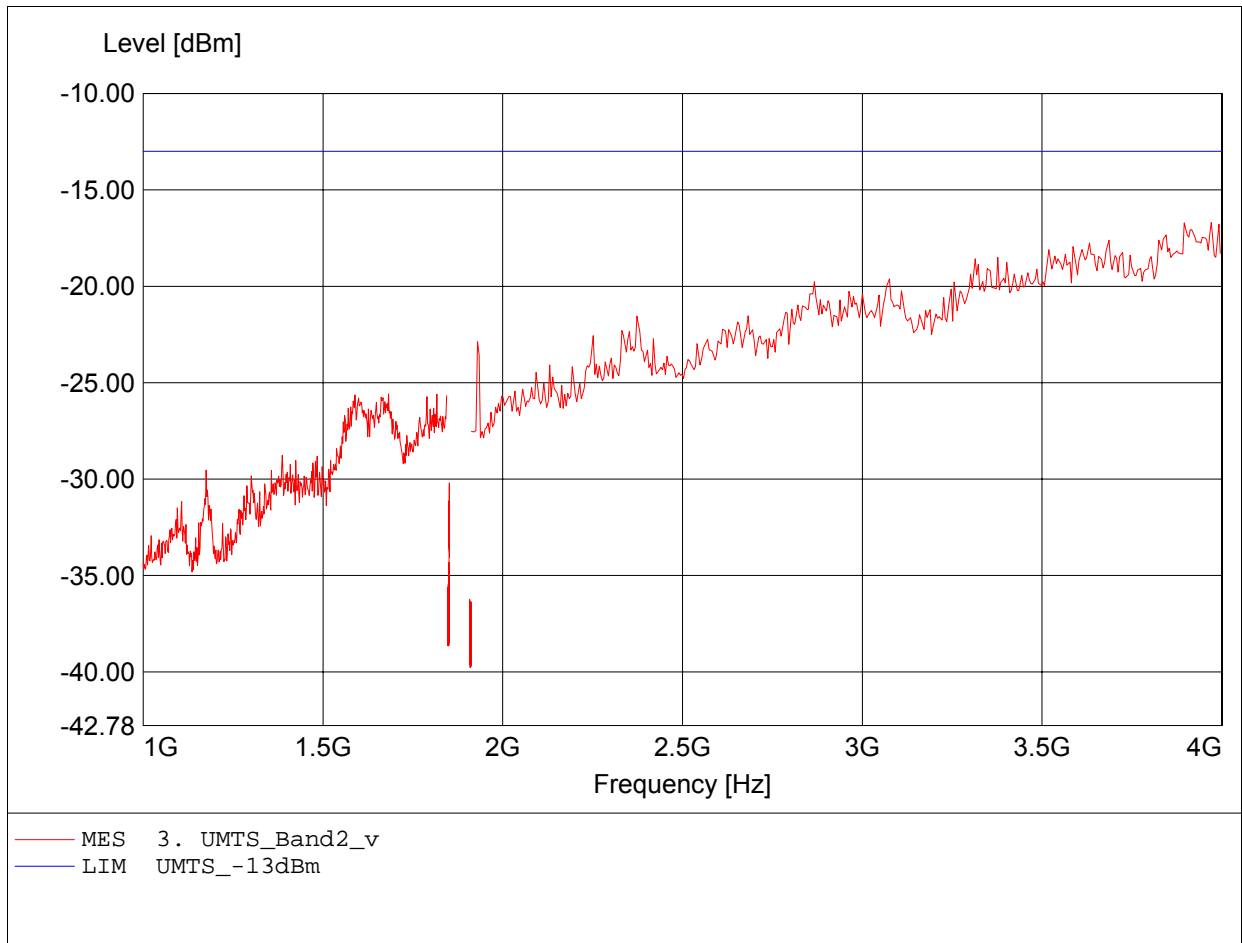


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.929GHz, Pmax: -16.08dBm, RBW: 1MHz/3kHz

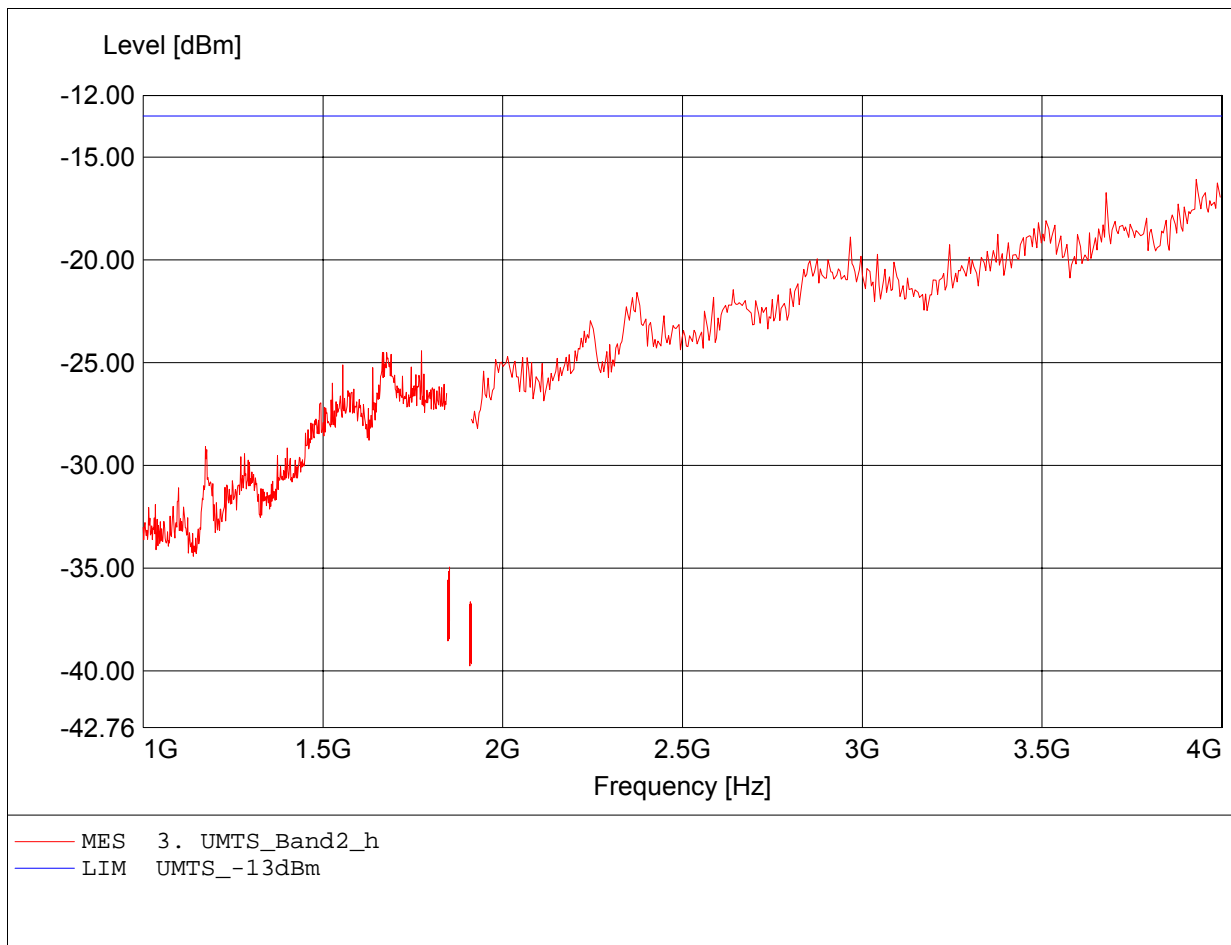


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.567GHz, Pmax: -41.96dBm, RBW: 1MHz

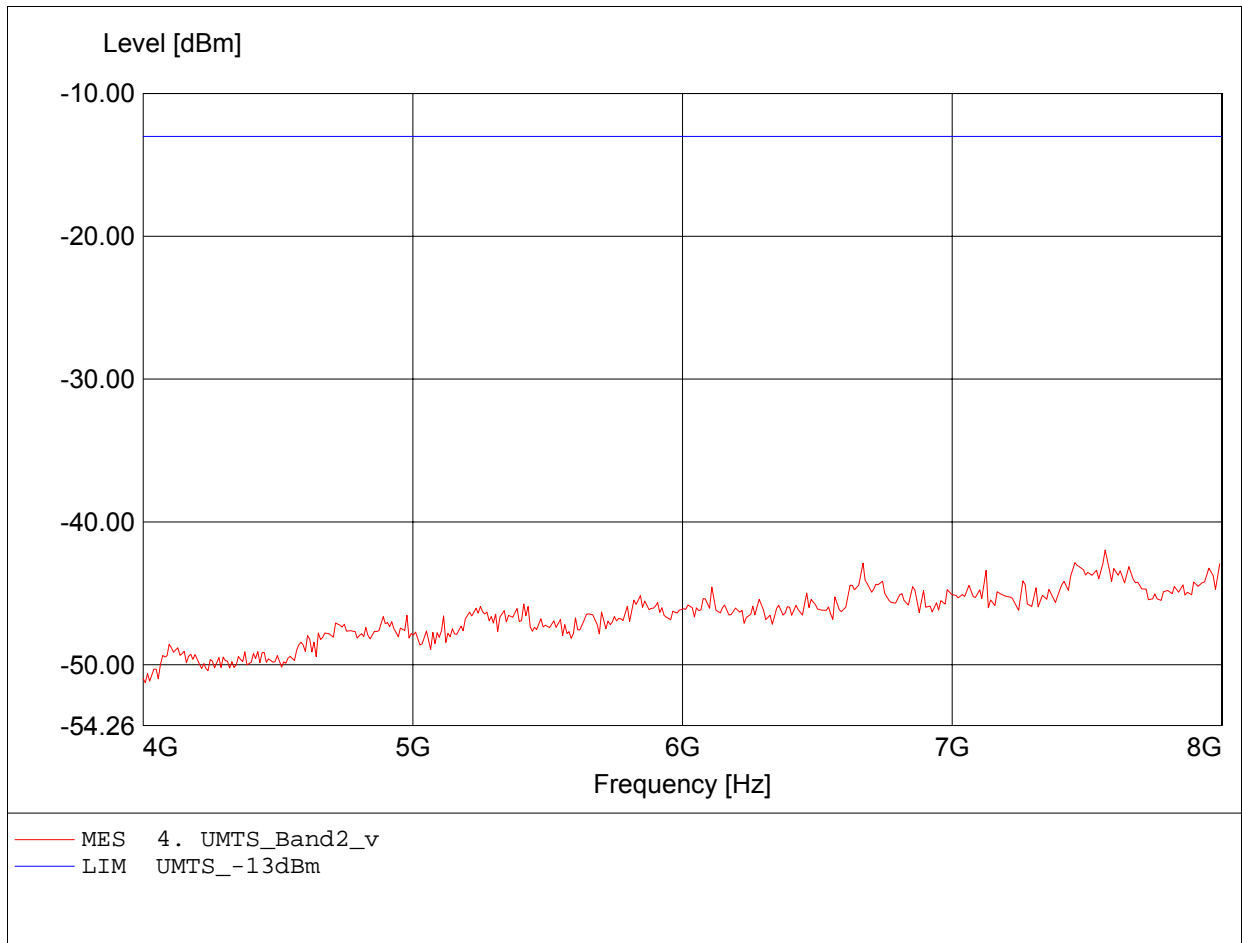


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.655GHz, Pmax: -41.76dBm, RBW: 1MHz

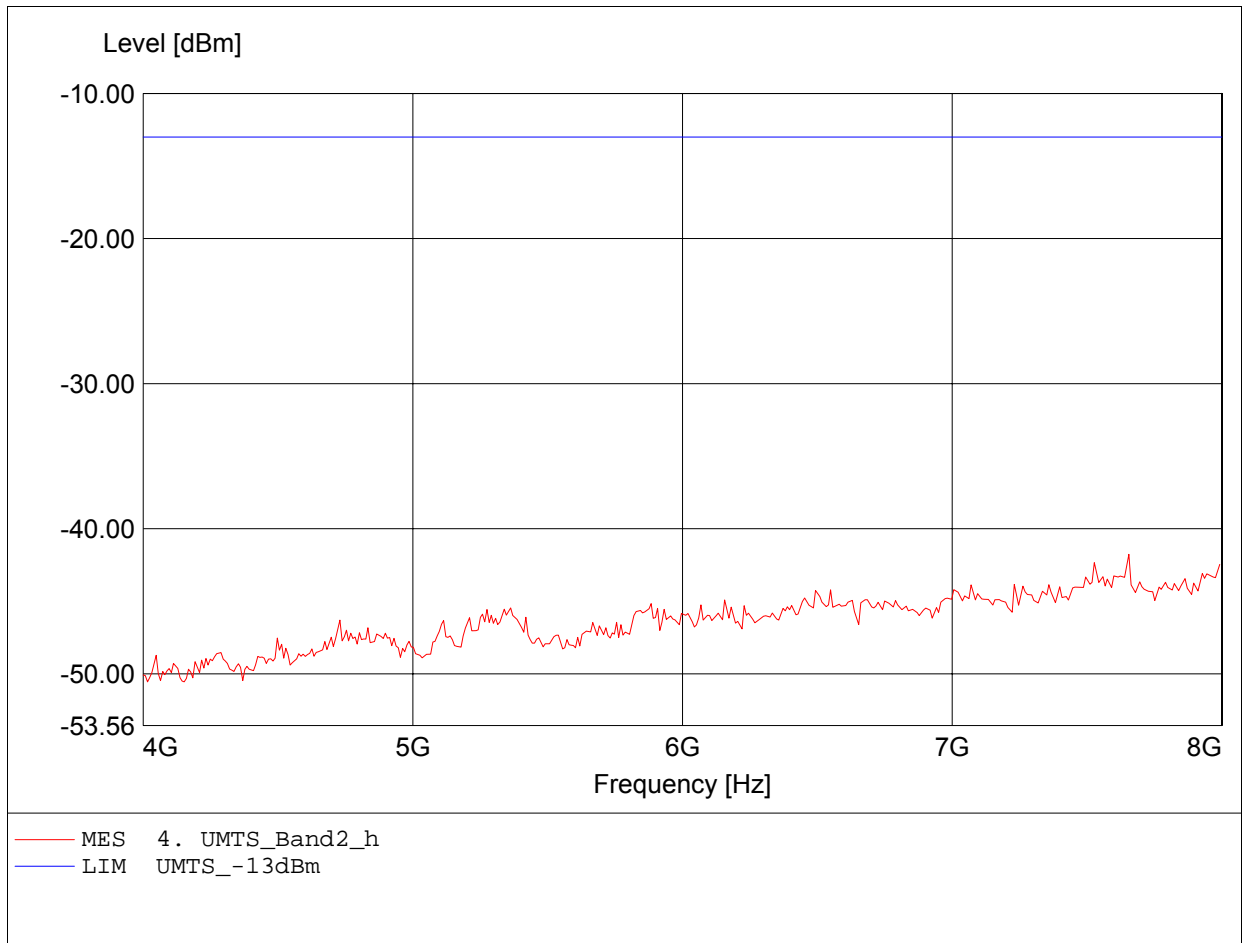


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.134GHz, Pmax: -37.38dBm, RBW: 1MHz

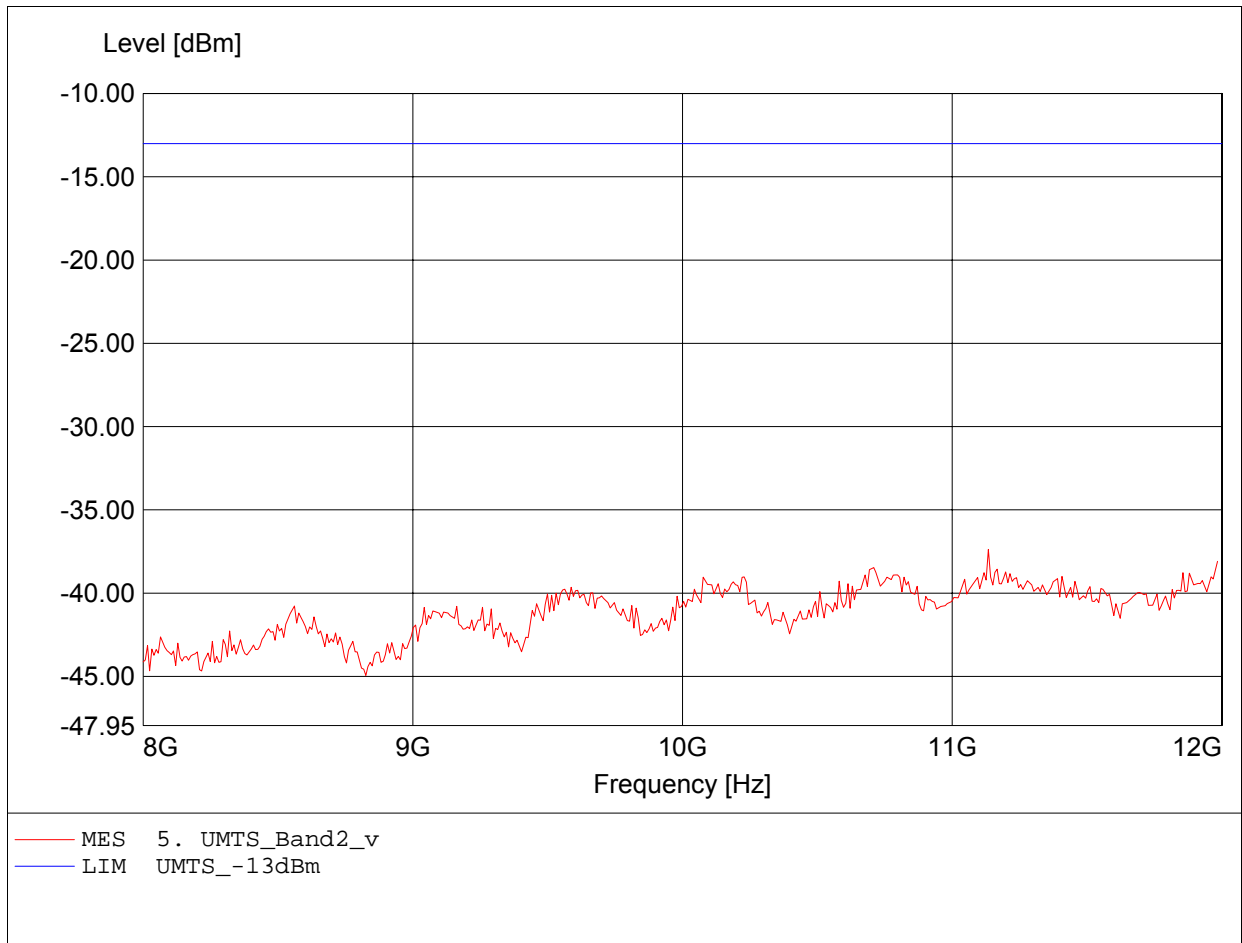


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.156GHz, Pmax: -37.53dBm, RBW: 1MHz

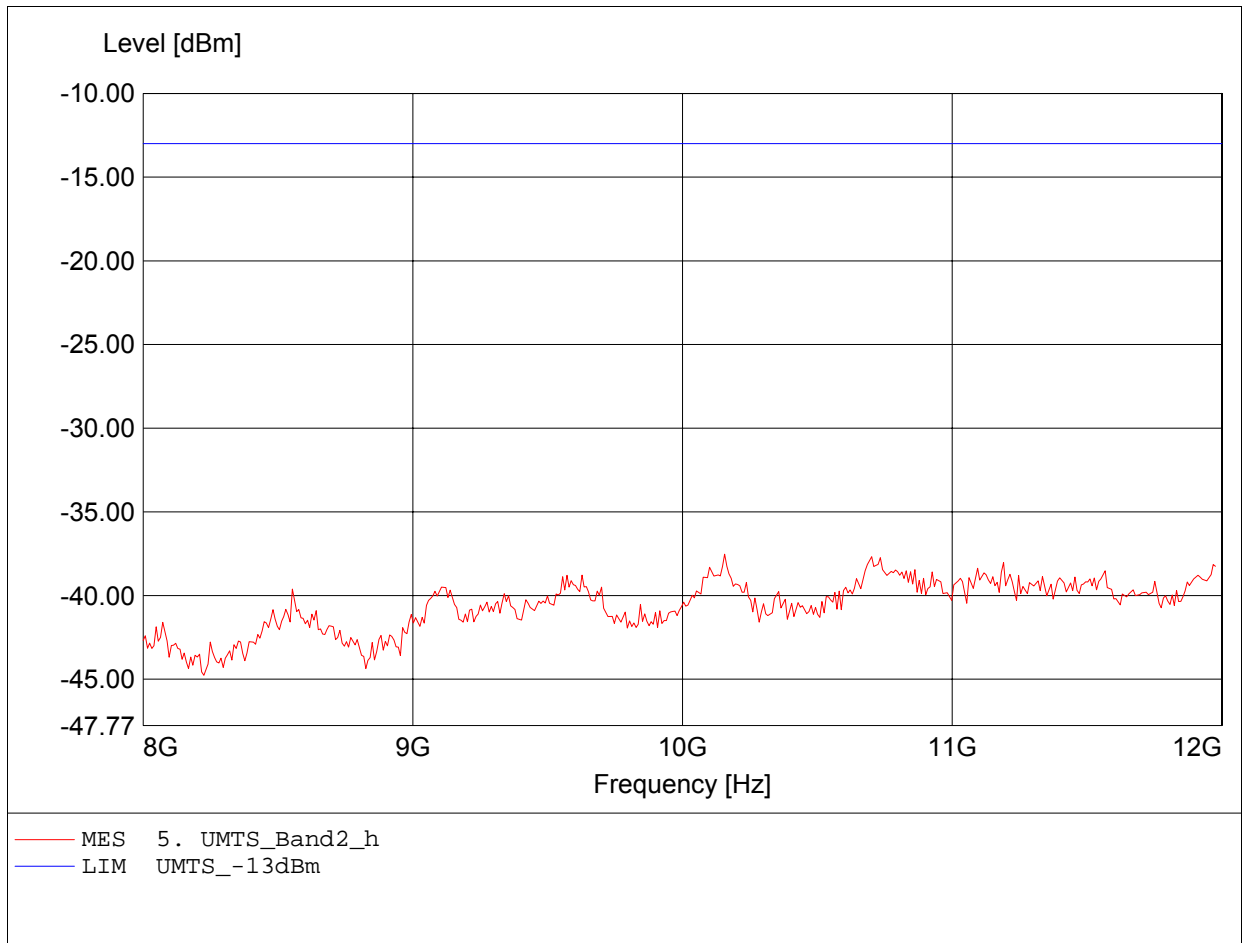


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.890GHz, Pmax: -30.46dBm, RBW: 1MHz

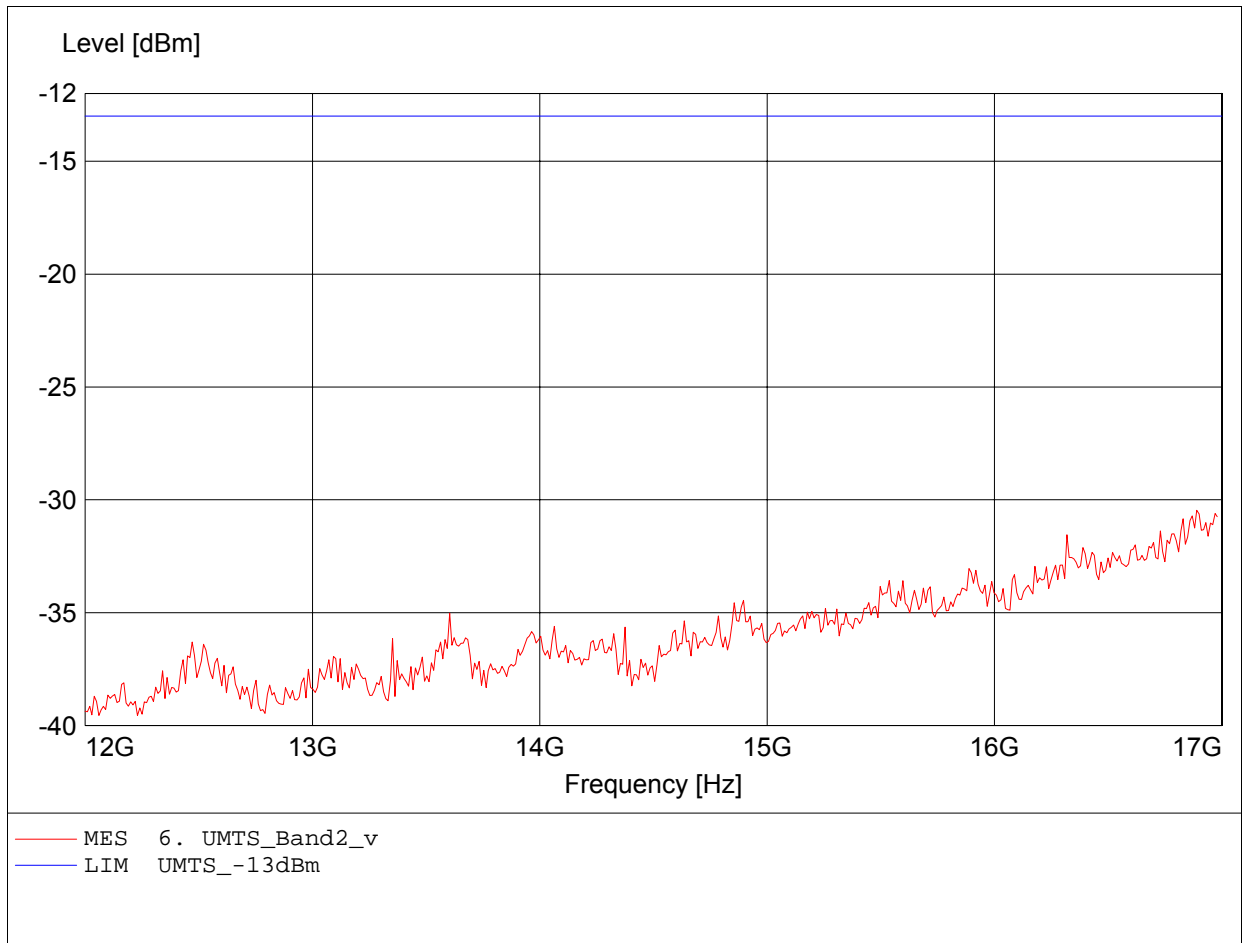


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.890GHz, Pmax: -29.40dBm, RBW: 1MHz

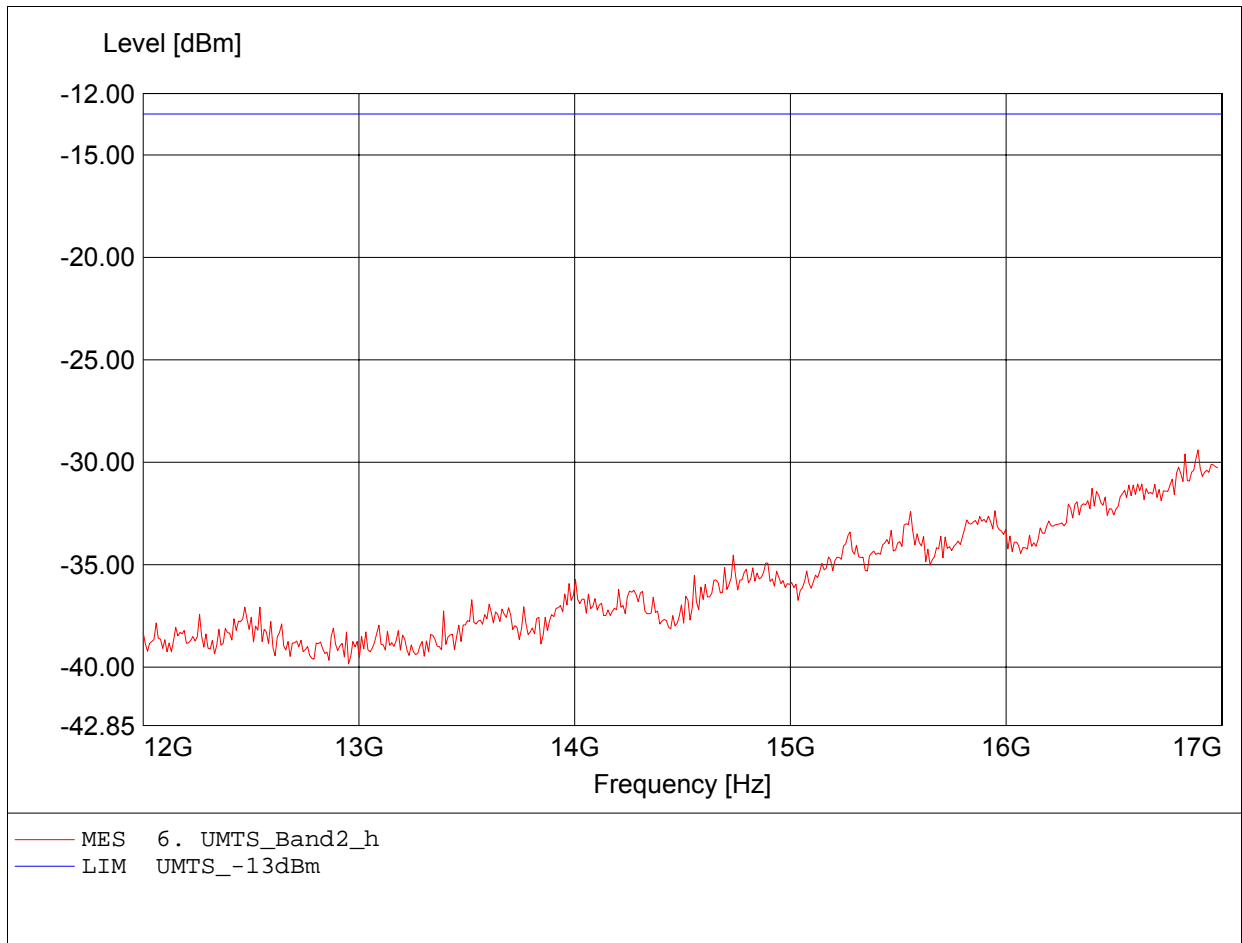


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.119GHz, Pmax: -24.12dBm, RBW: 1MHz

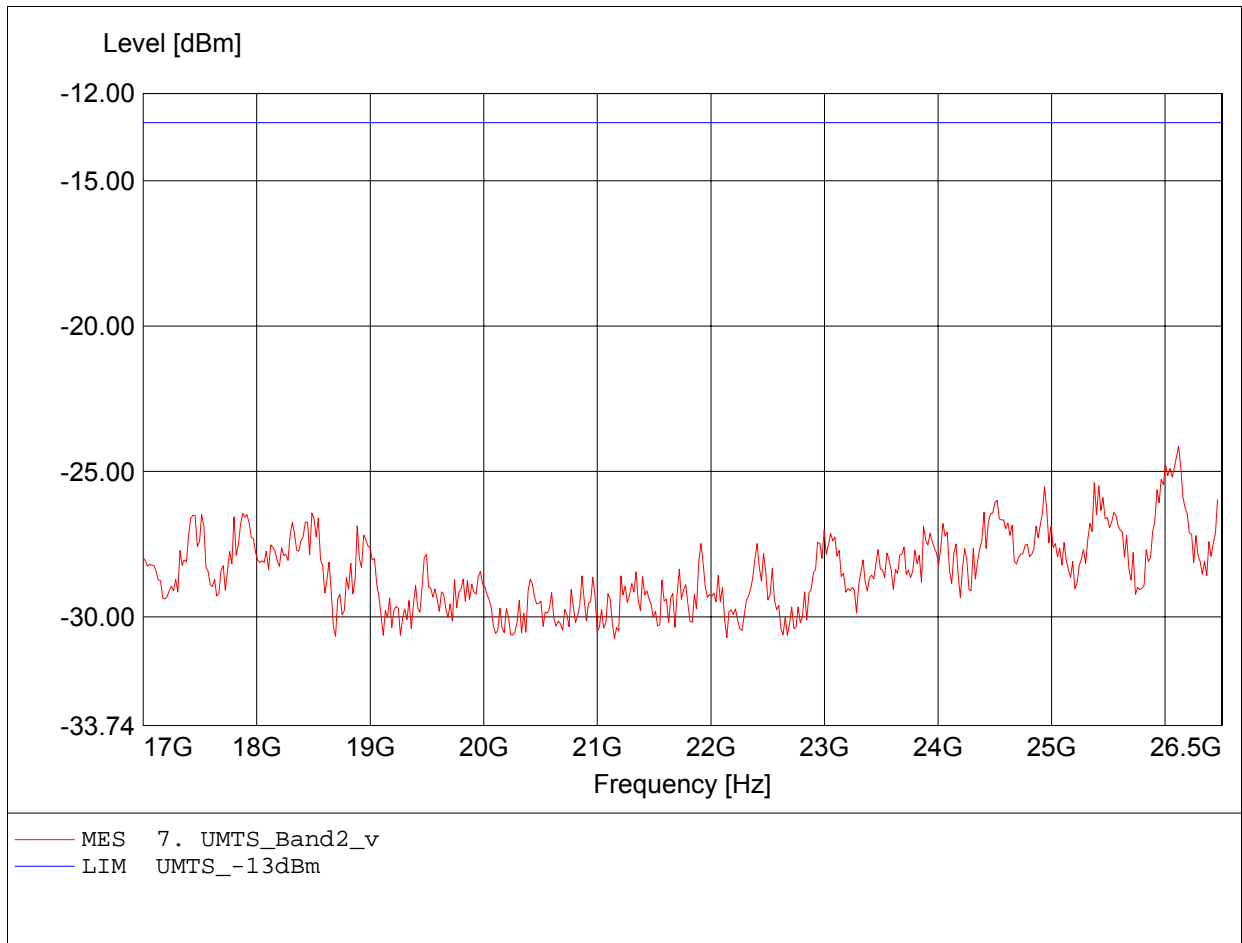


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9263
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.463GHz, Pmax: -24.48dBm, RBW: 1MHz

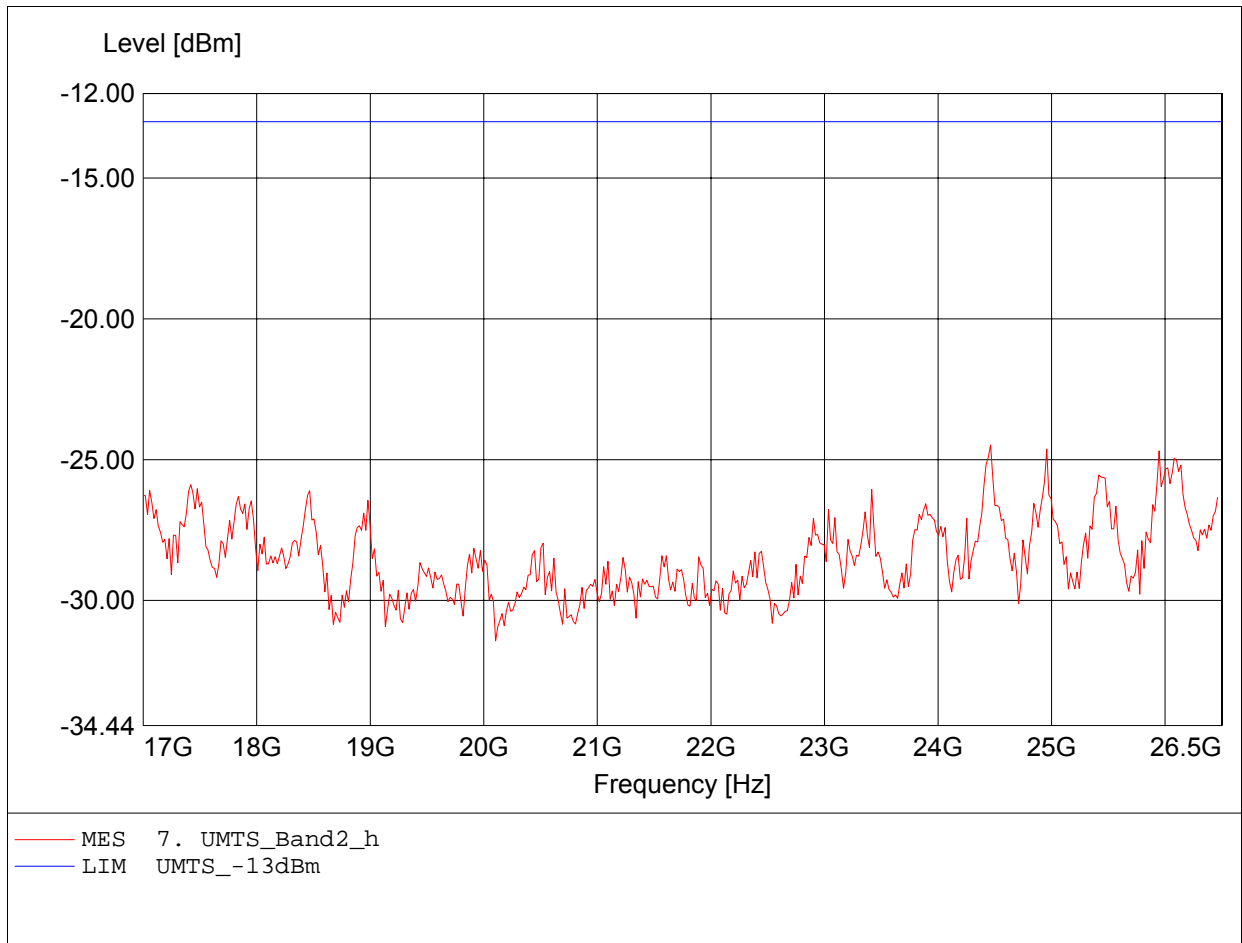


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.253MHz, Pmax: -60.34dBm, RBW: 100kHz

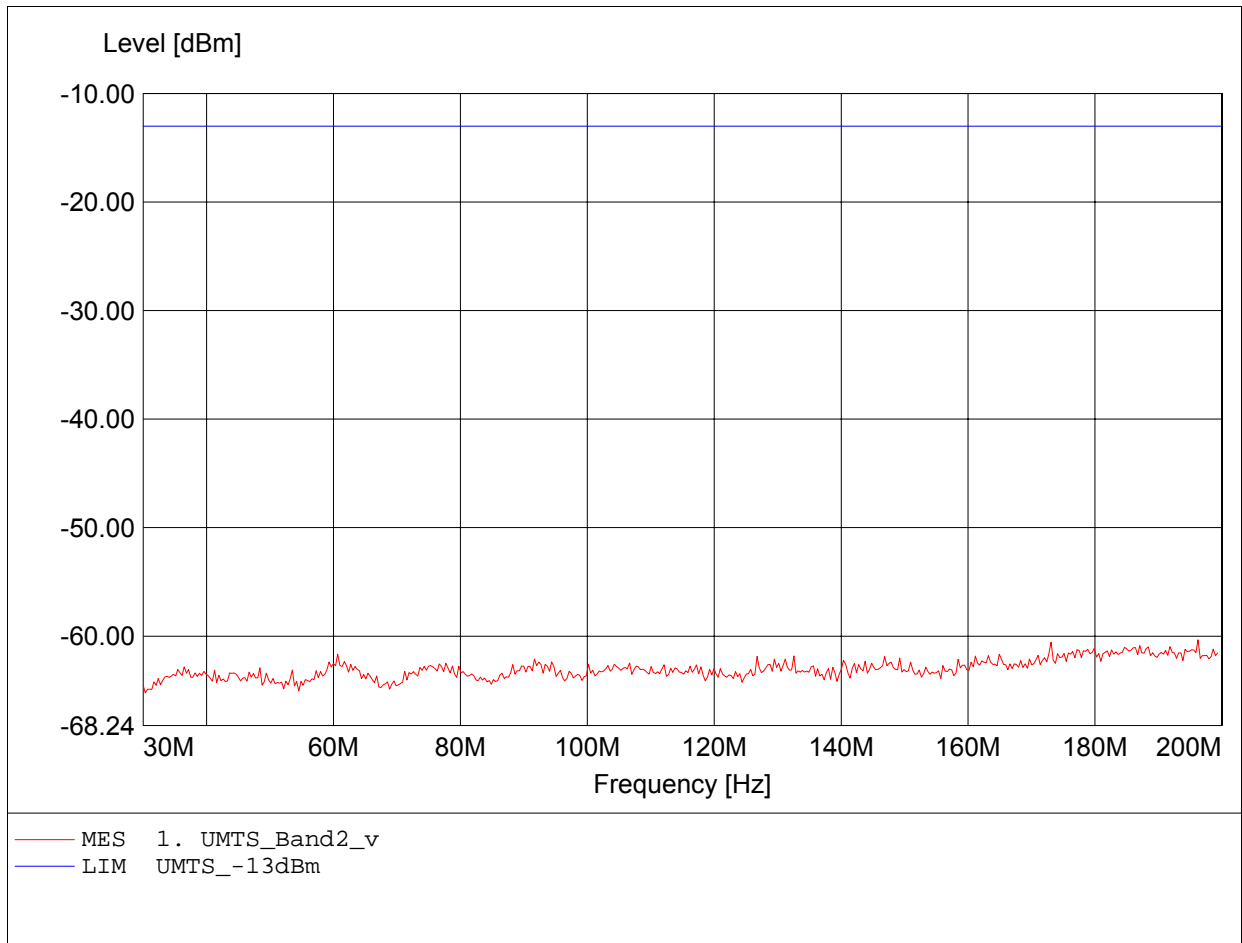


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 77.355MHz, Pmax: -61.09dBm, RBW: 100kHz

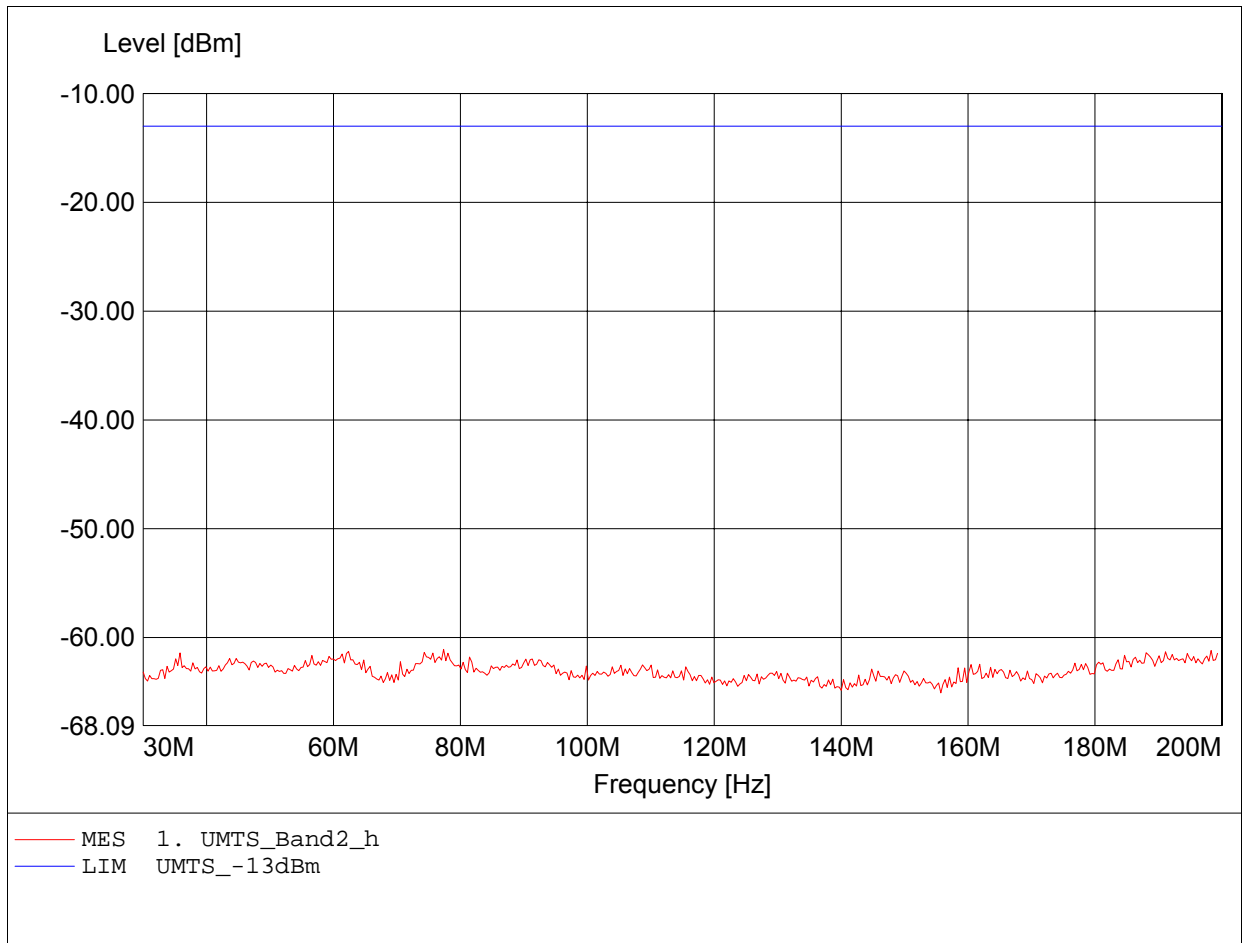


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 987.174MHz, Pmax: -46.82dBm, RBW: 100kHz

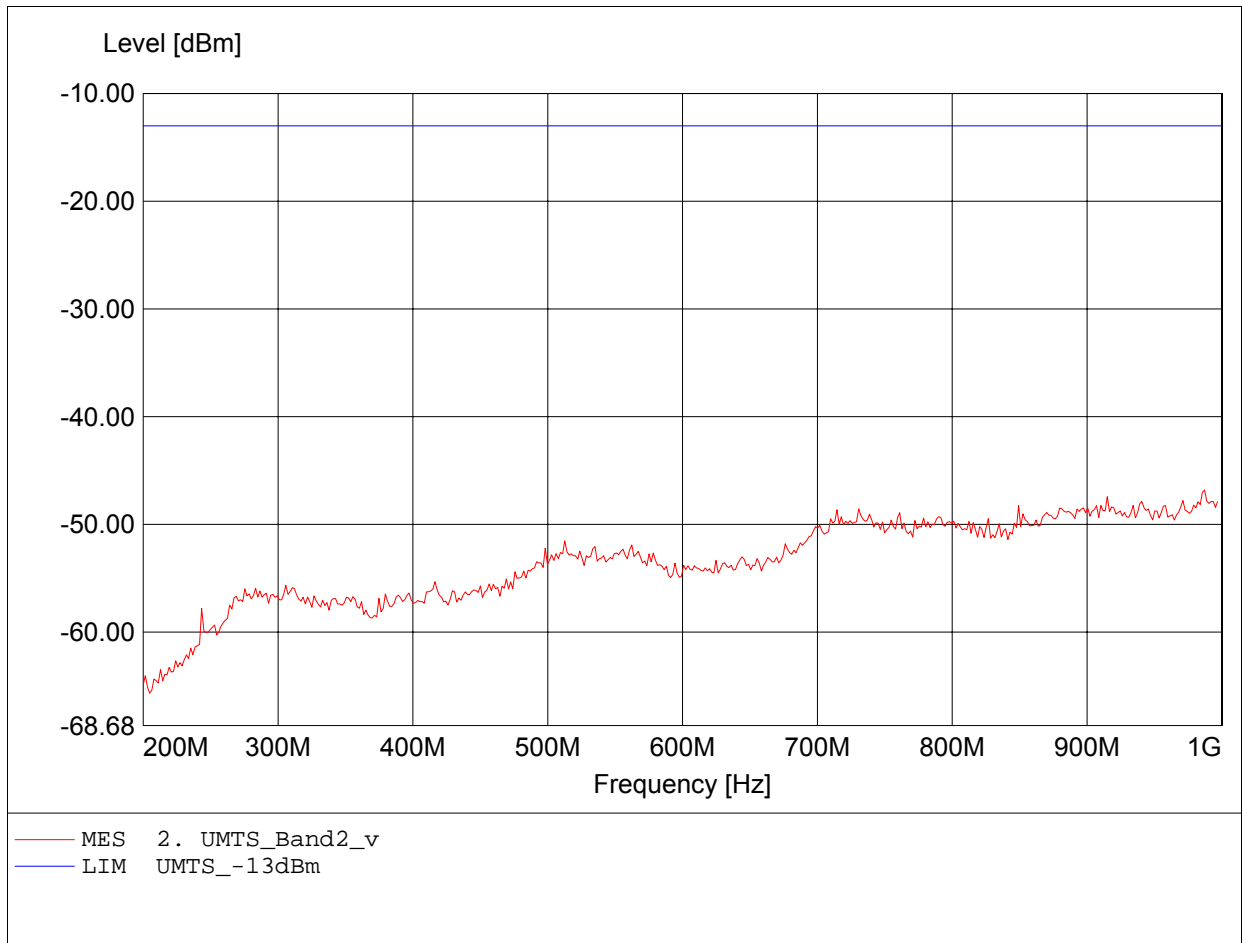


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 866.934MHz, Pmax: -46.07dBm, RBW: 100kHz

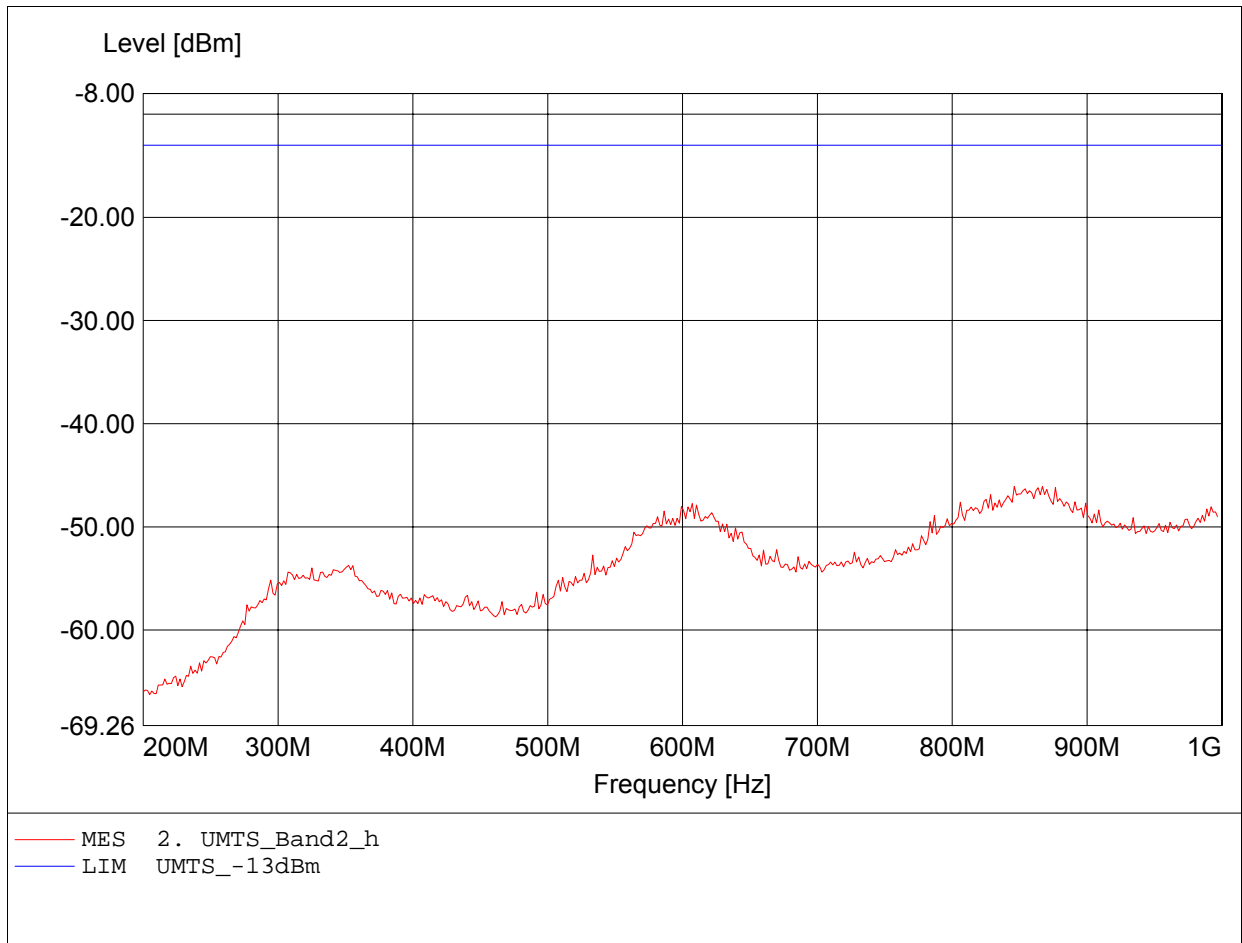


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.933GHz, Pmax: -16.05dBm, RBW: 1MHz/3kHz

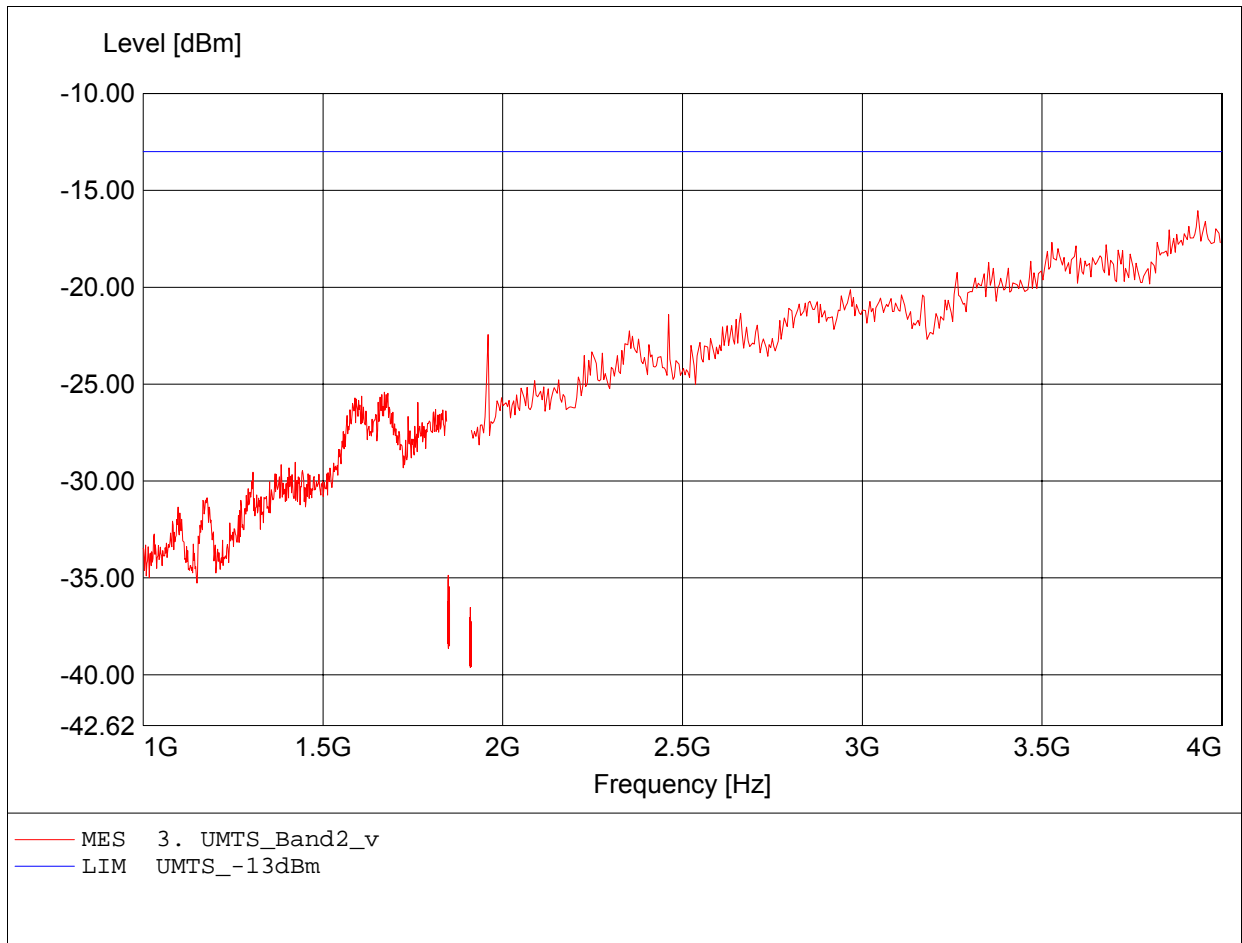


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.987GHz, Pmax: -16.13dBm, RBW: 1MHz/3kHz

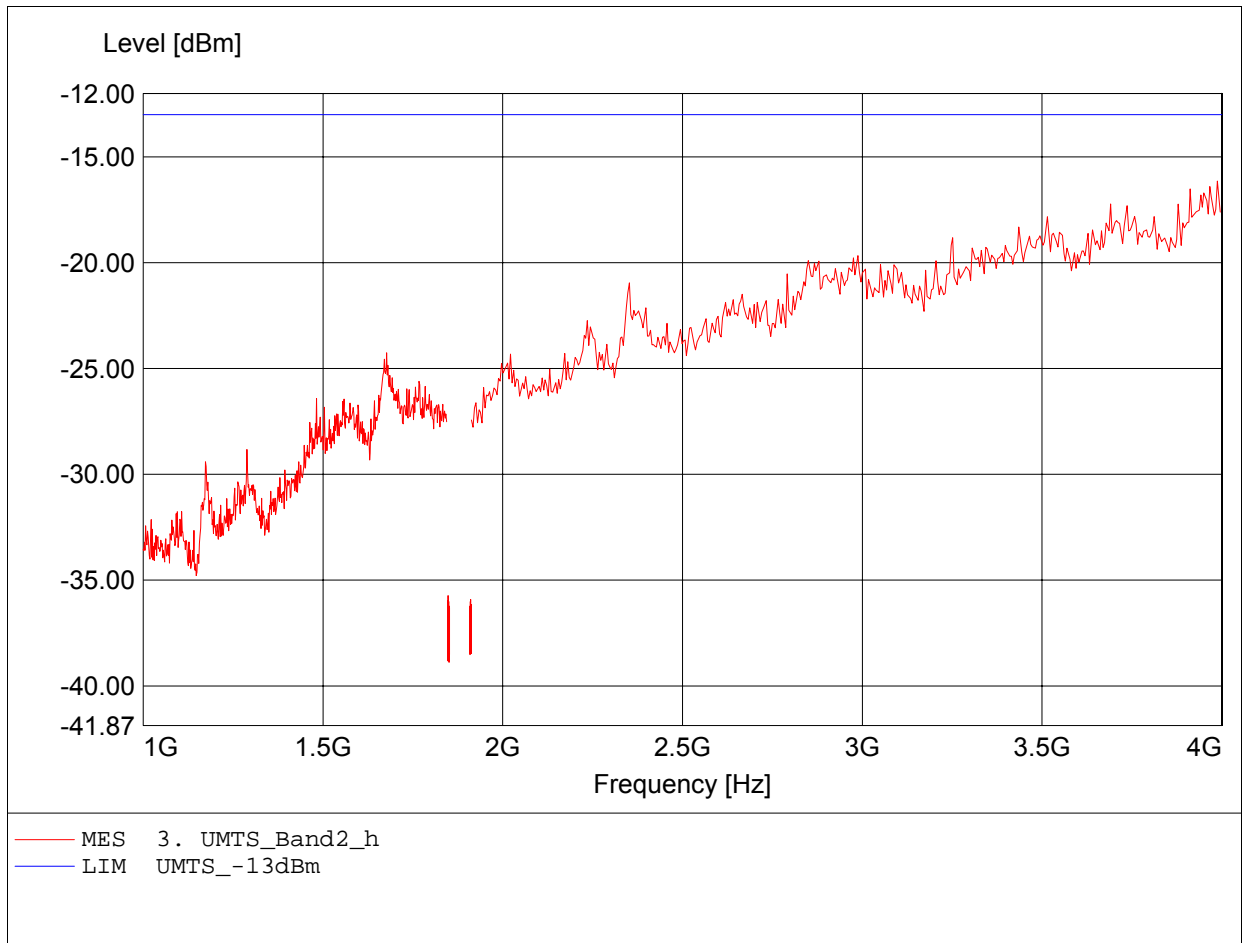


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.535GHz, Pmax: -42.51dBm, RBW: 1MHz

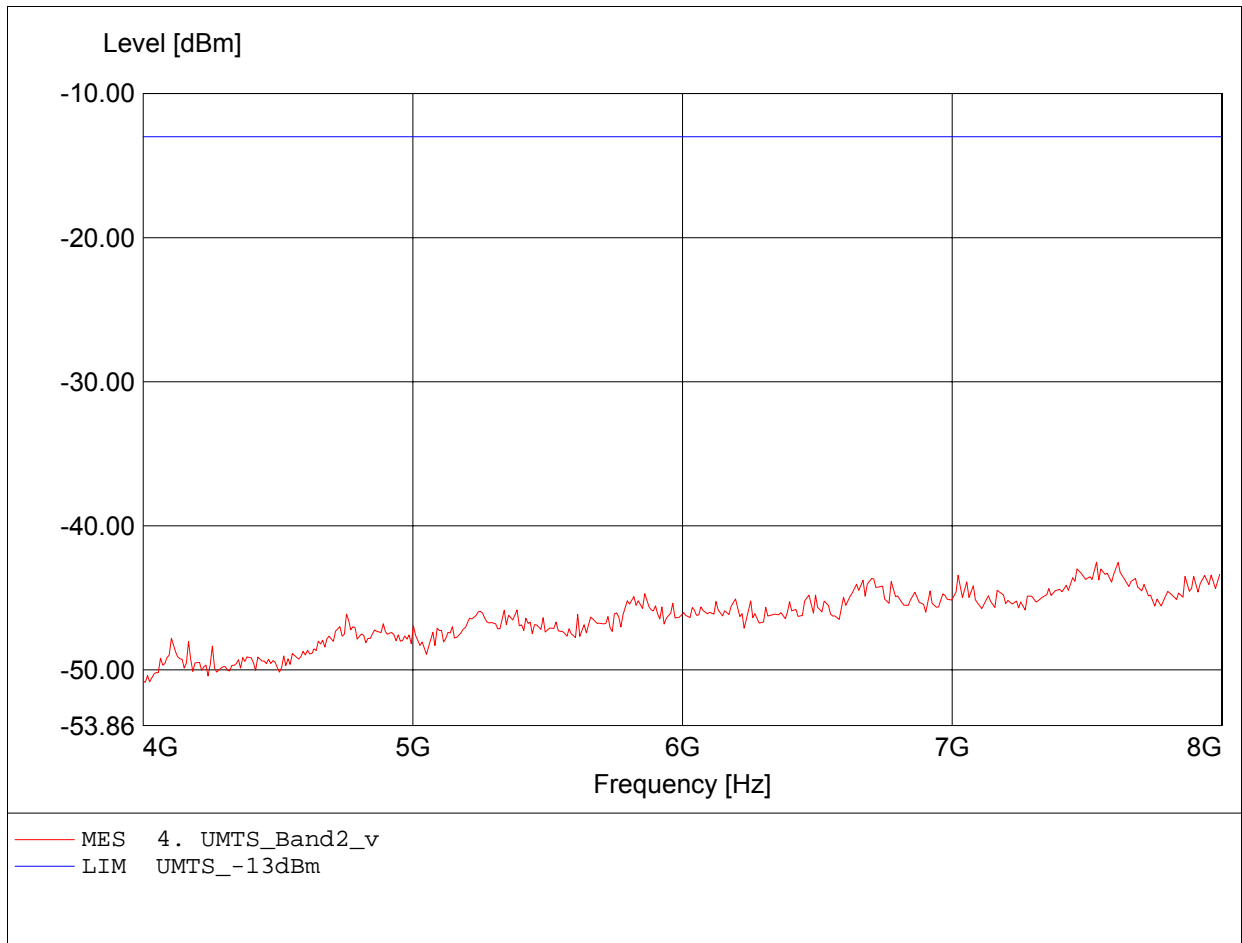


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.992GHz, Pmax: -42.56dBm, RBW: 1MHz

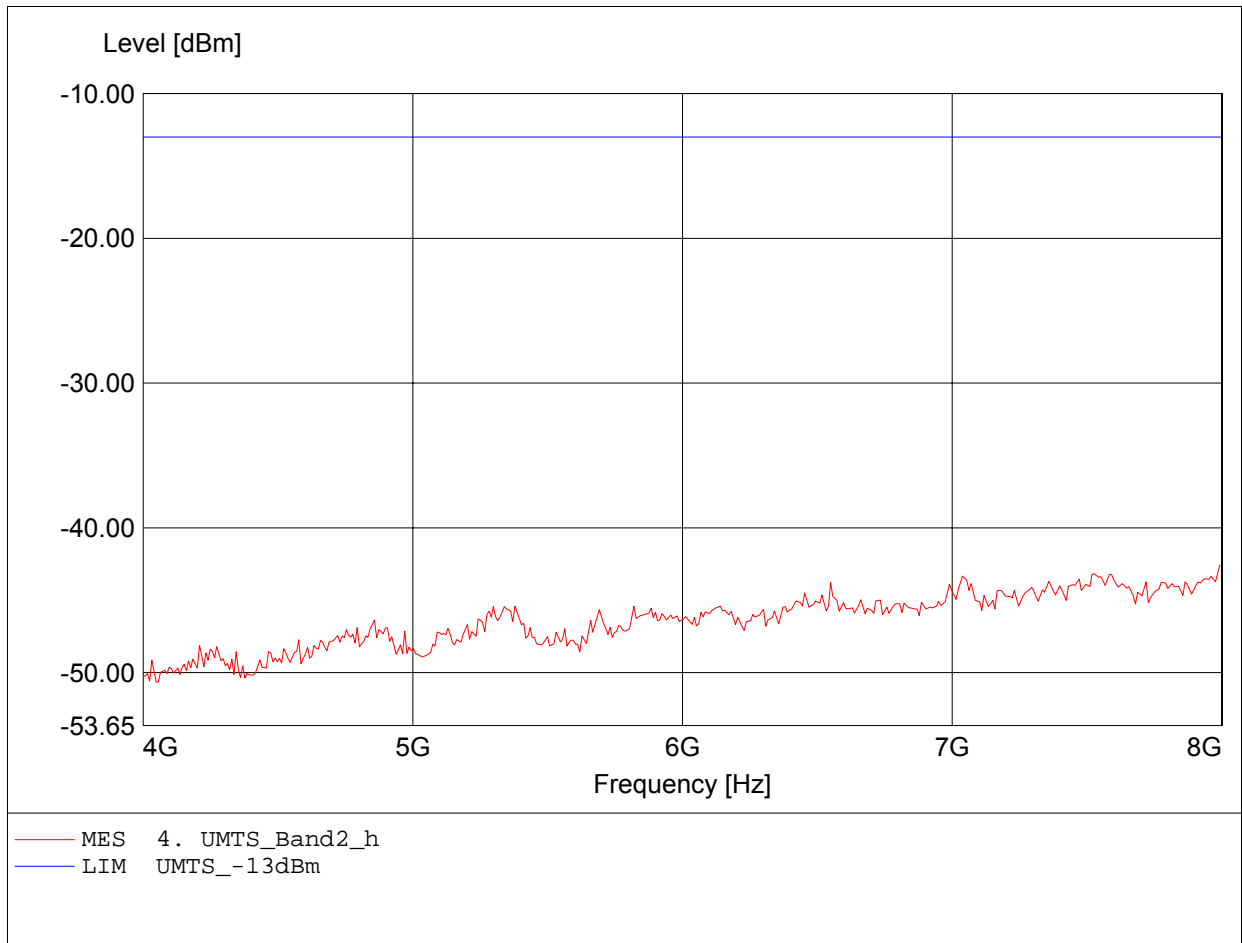


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.960GHz, Pmax: -38.08dBm, RBW: 1MHz

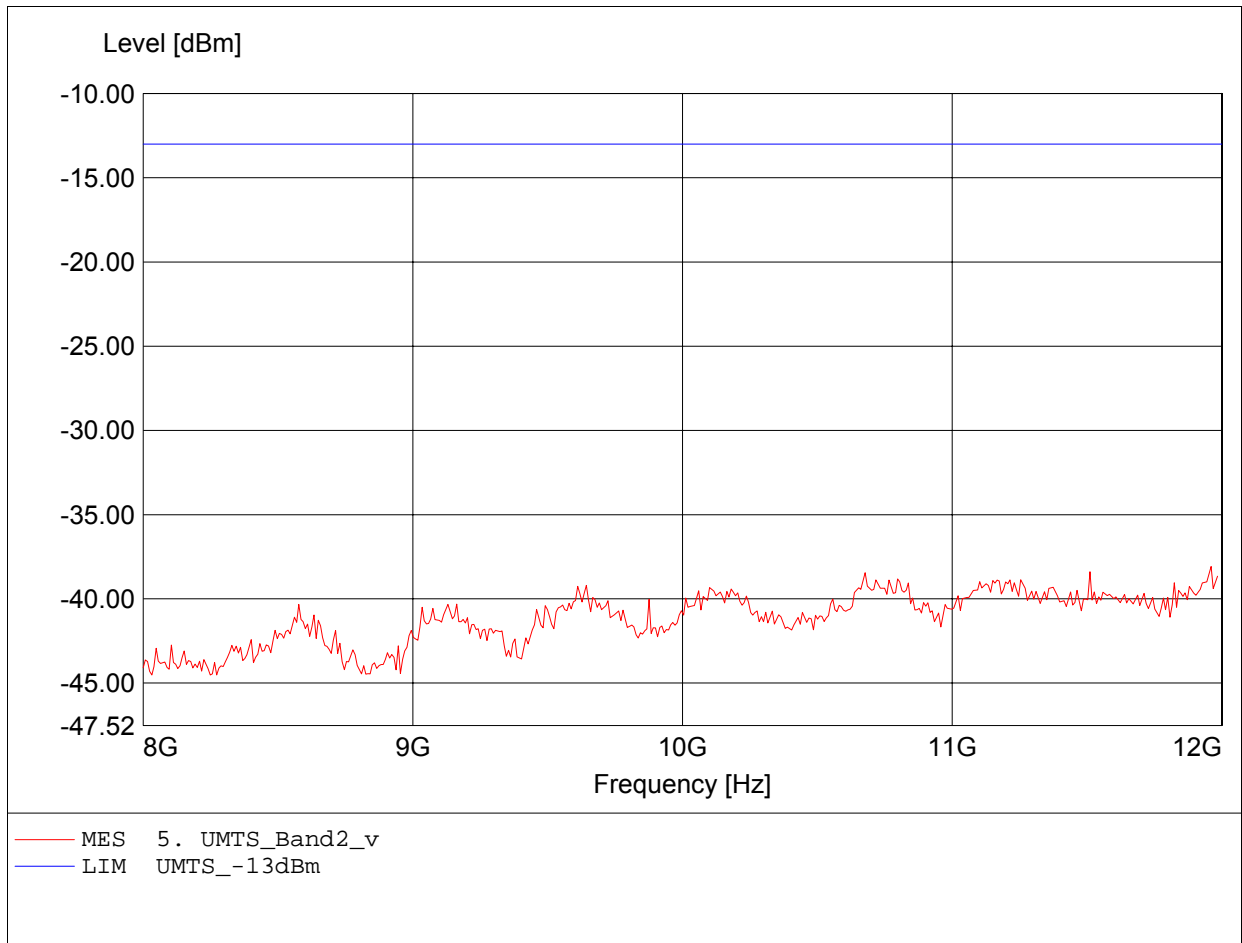


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.709GHz, Pmax: -37.47dBm, RBW: 1MHz

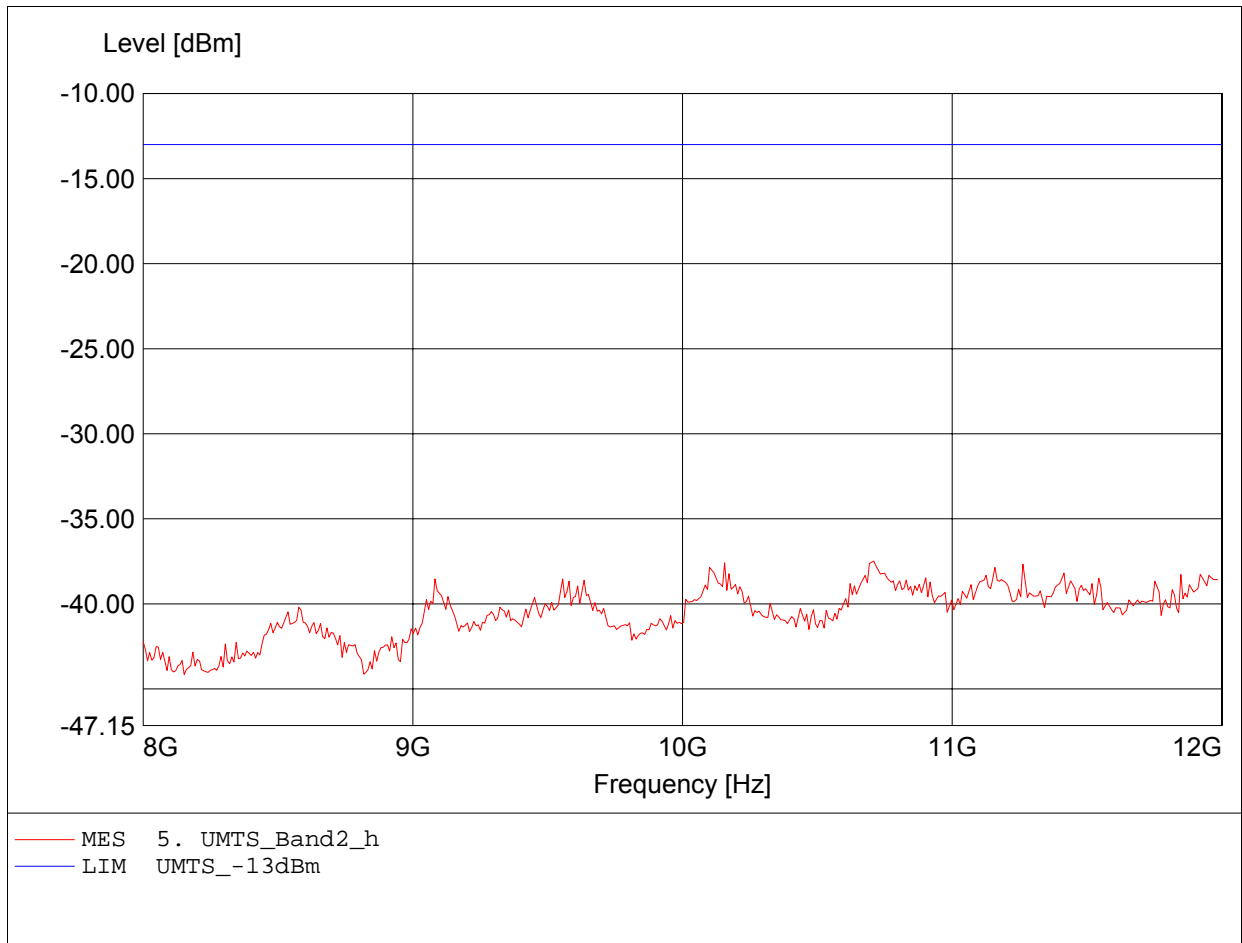


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.970GHz, Pmax: -29.72dBm, RBW: 1MHz

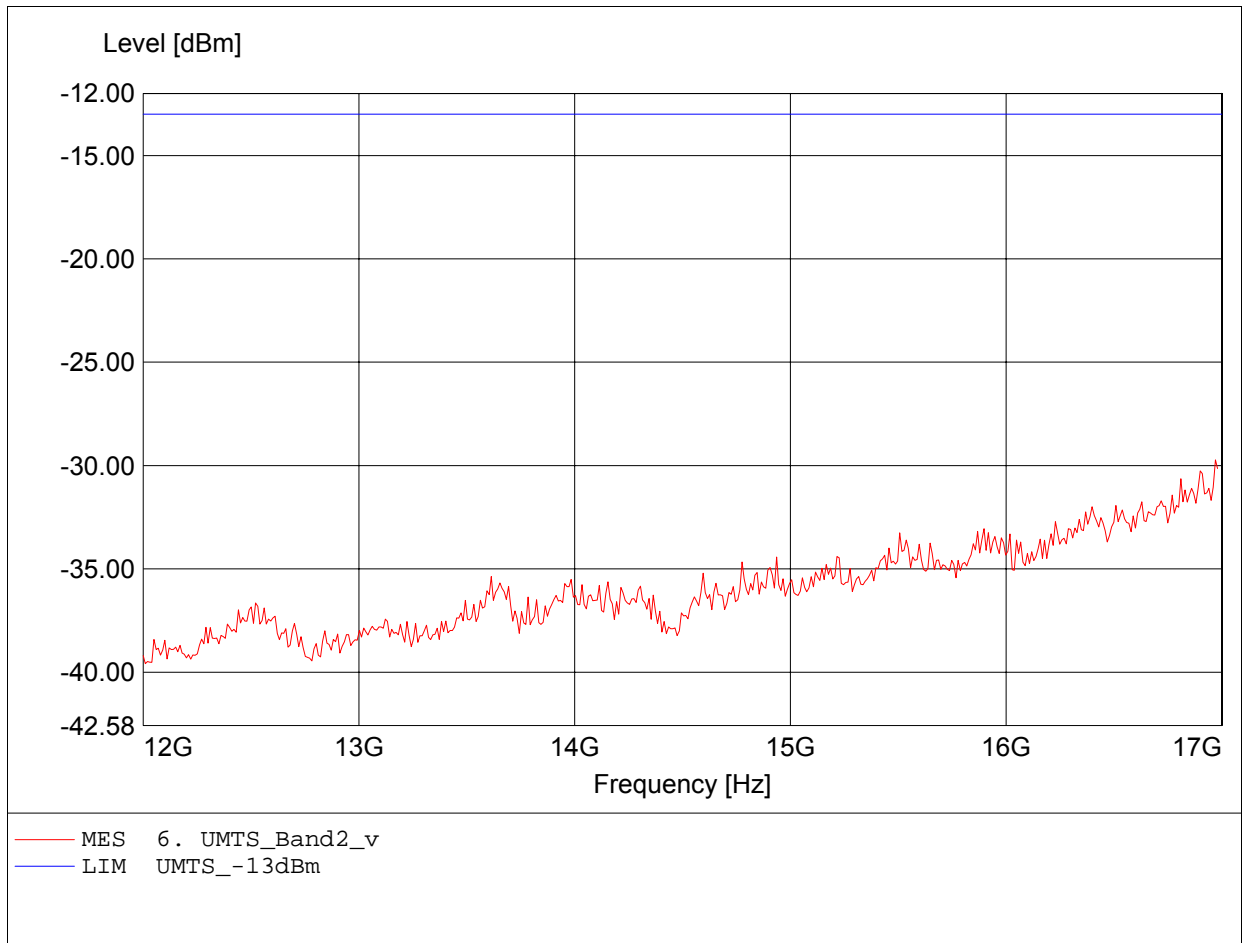


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.900GHz, Pmax: -29.07dBm, RBW: 1MHz

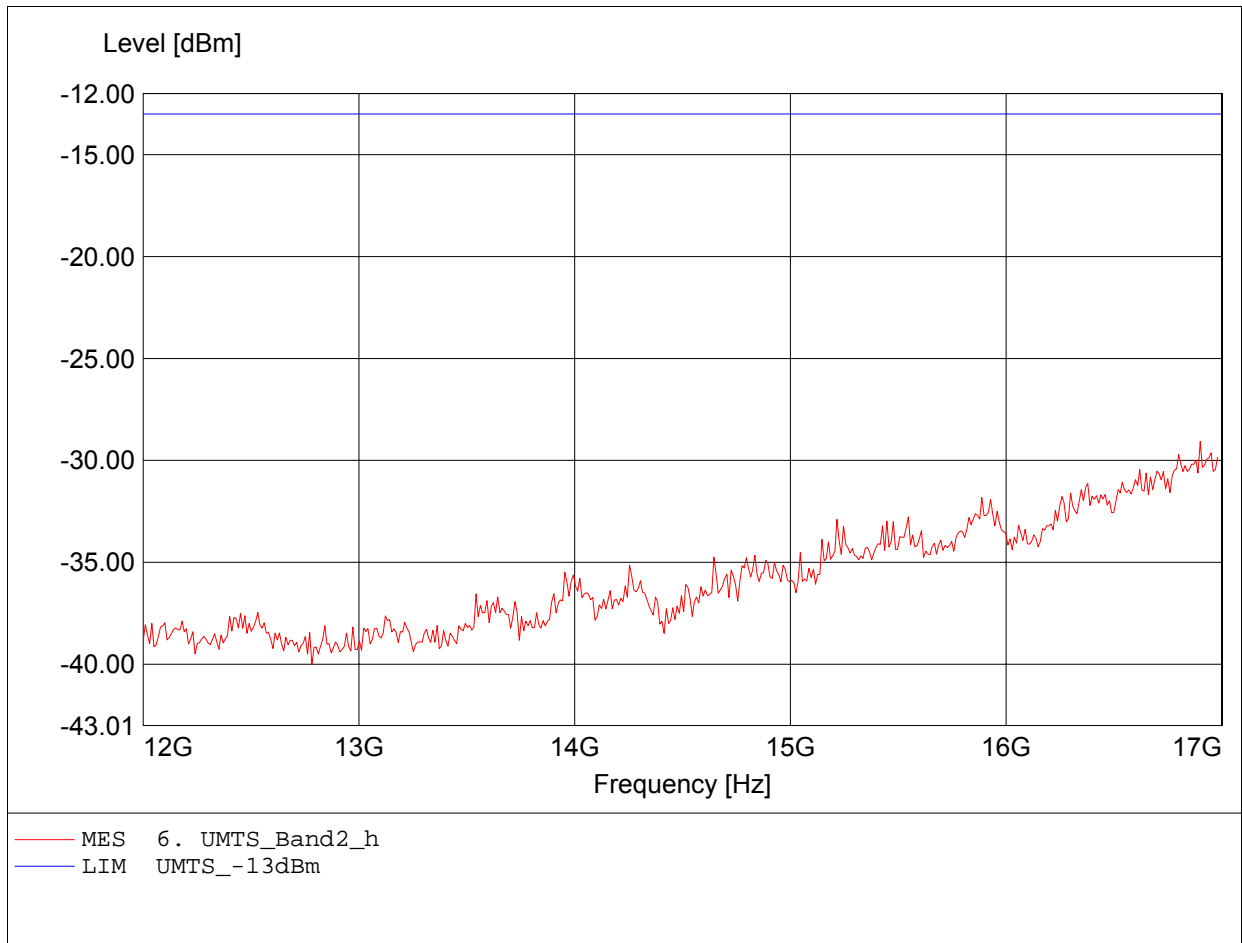


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.081GHz, Pmax: -24.09dBm, RBW: 1MHz

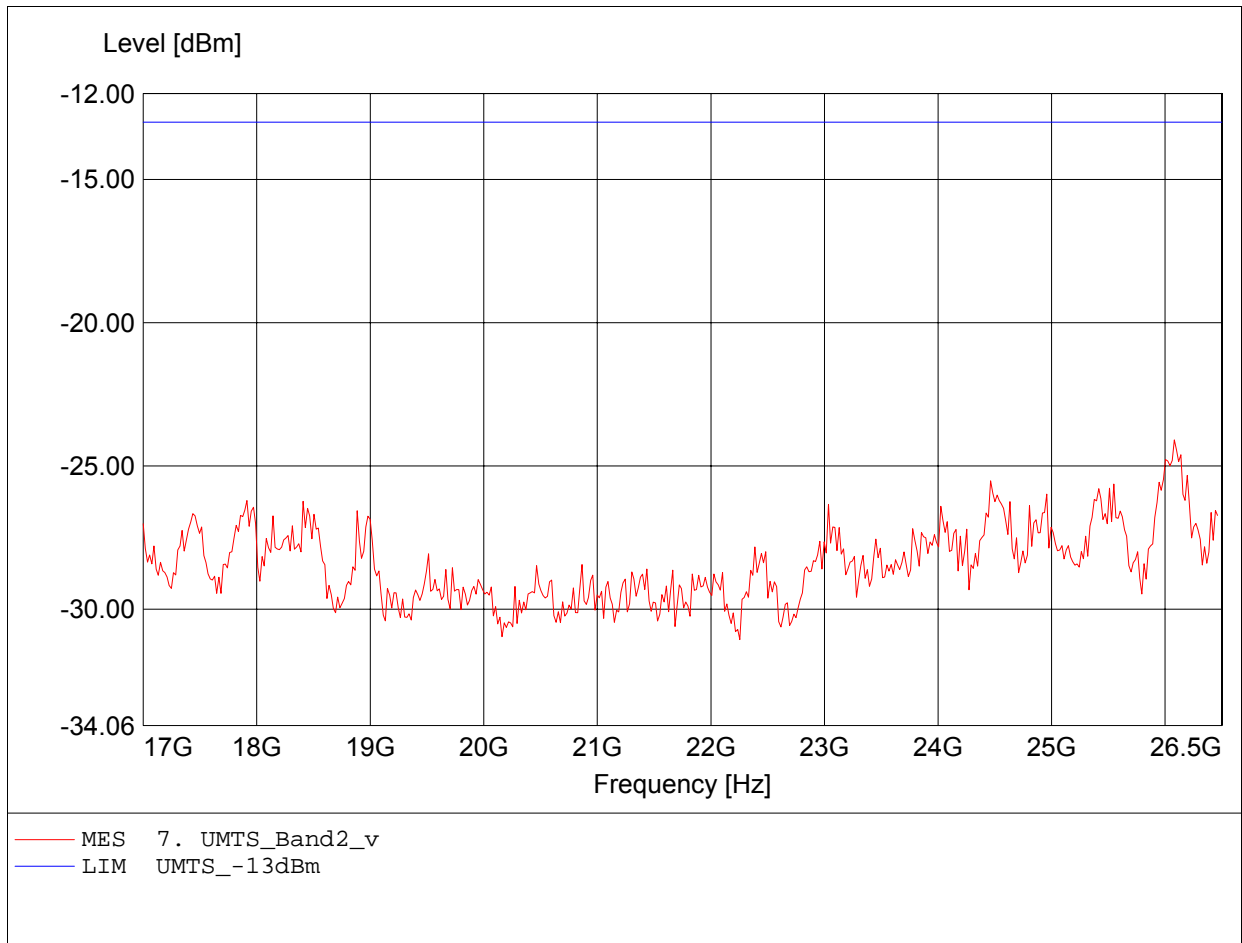


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9400
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.005GHz, Pmax: -24.36dBm, RBW: 1MHz

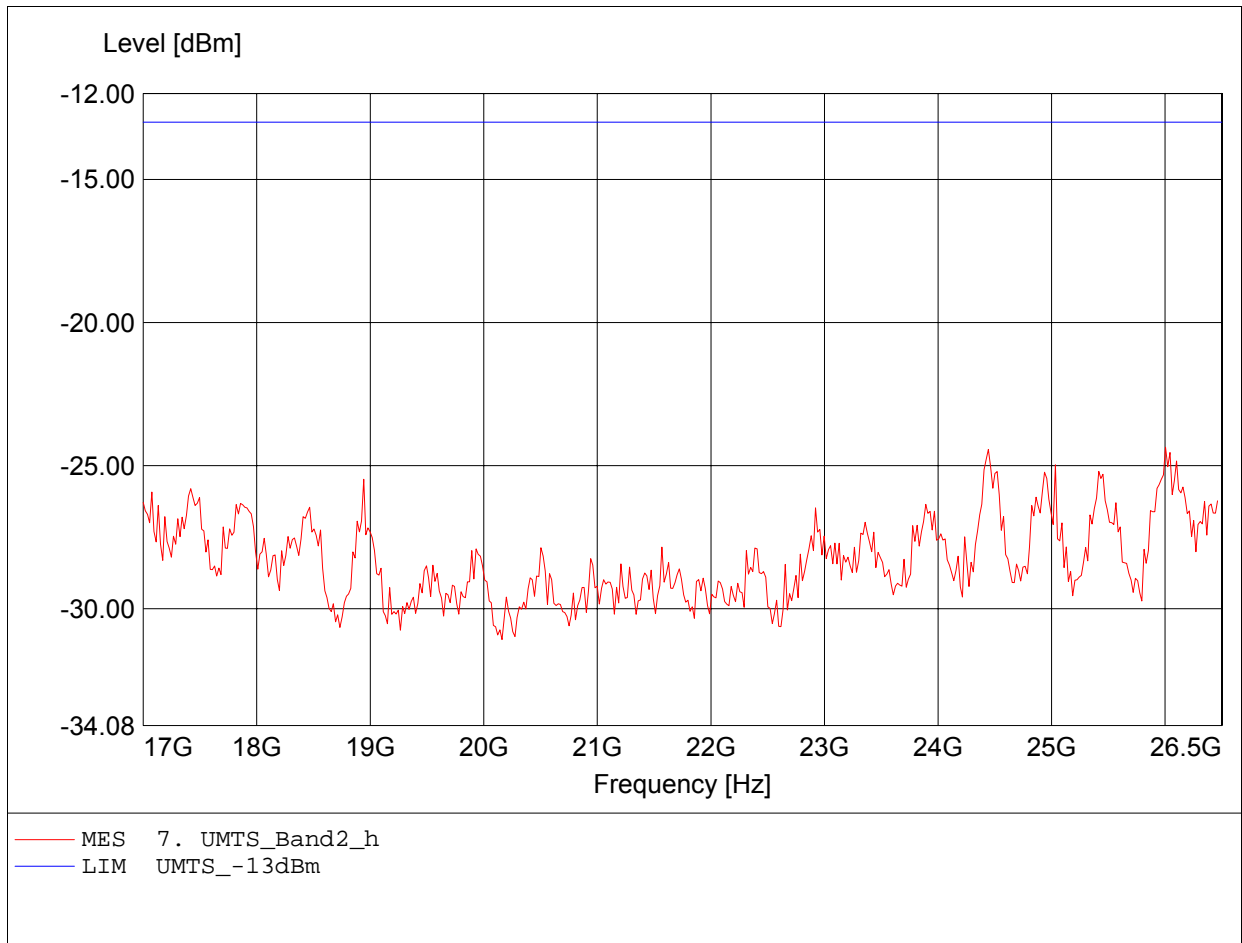


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.912MHz, Pmax: -60.04dBm, RBW: 100kHz

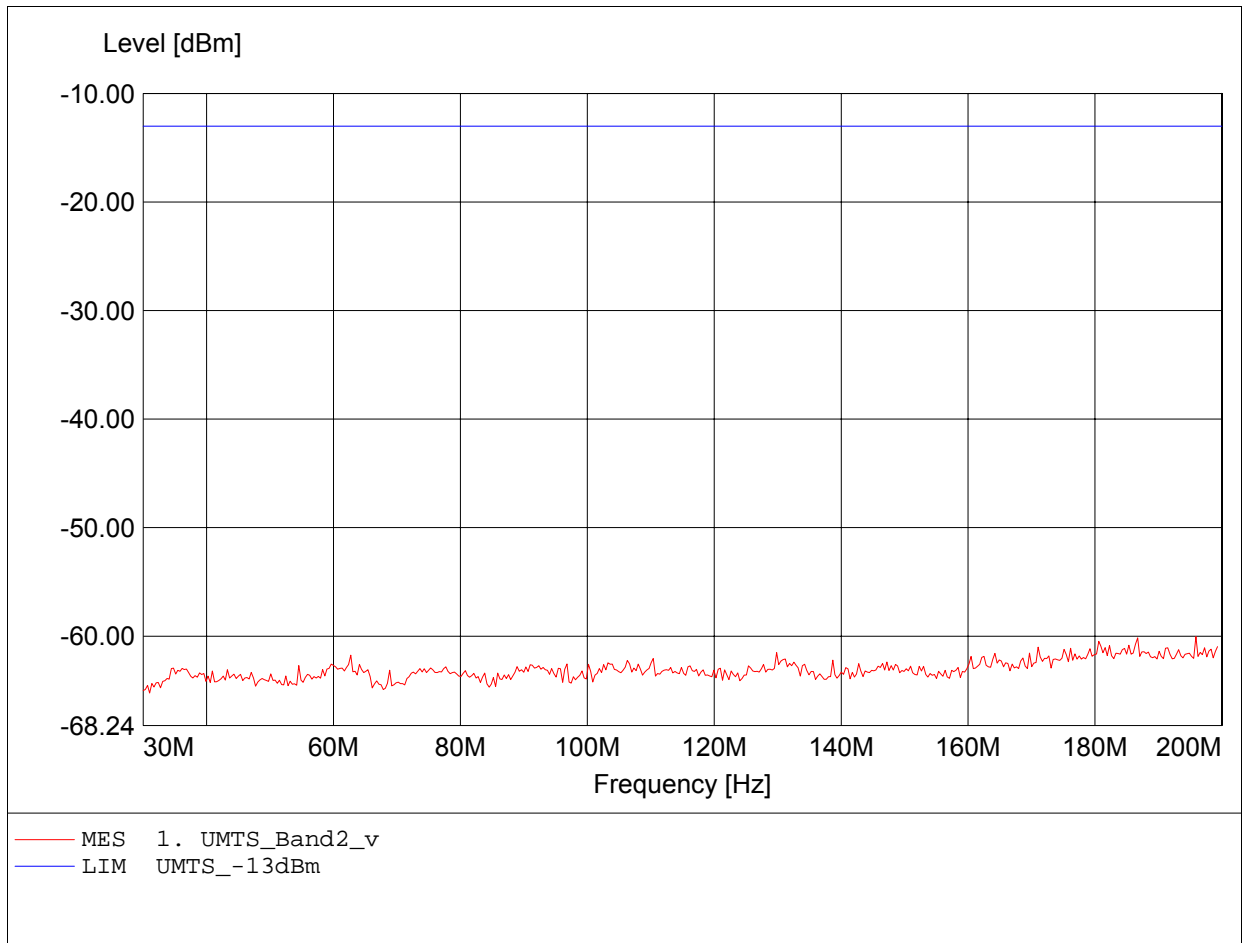


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.912MHz, Pmax: -60.45dBm, RBW: 100kHz

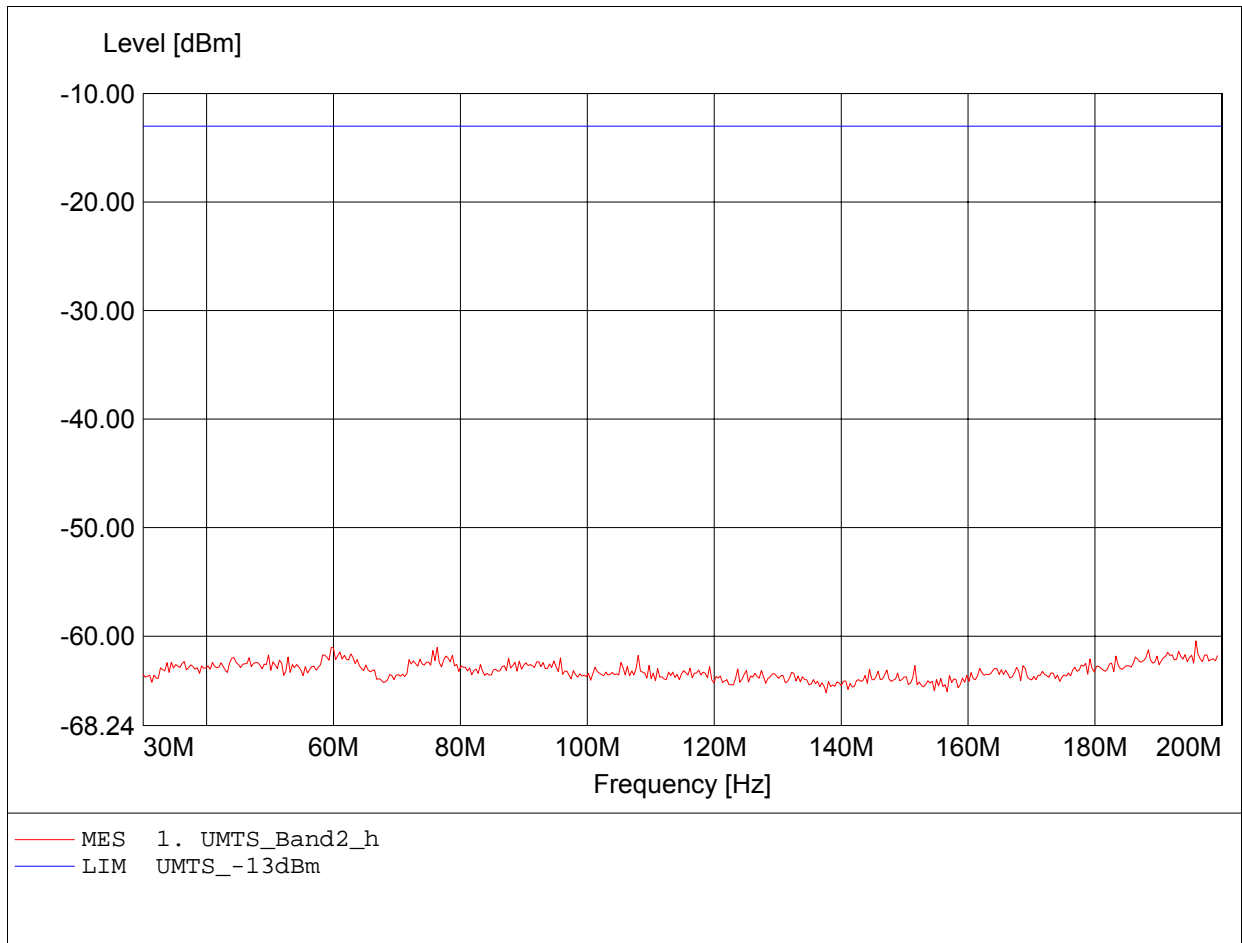


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 990.381MHz, Pmax: -46.49dBm, RBW: 100kHz

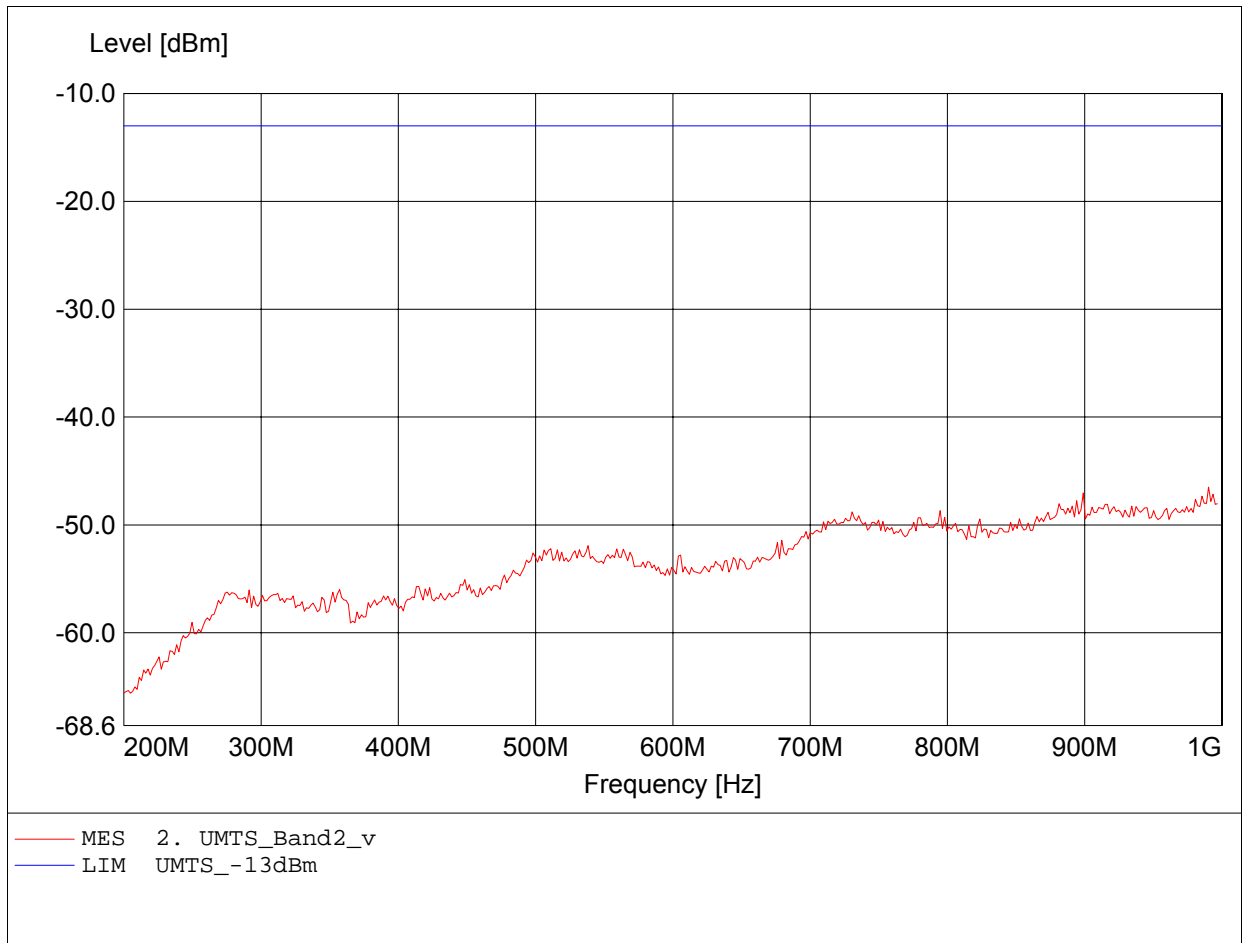


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 868.537MHz, Pmax: -45.08dBm, RBW: 100kHz

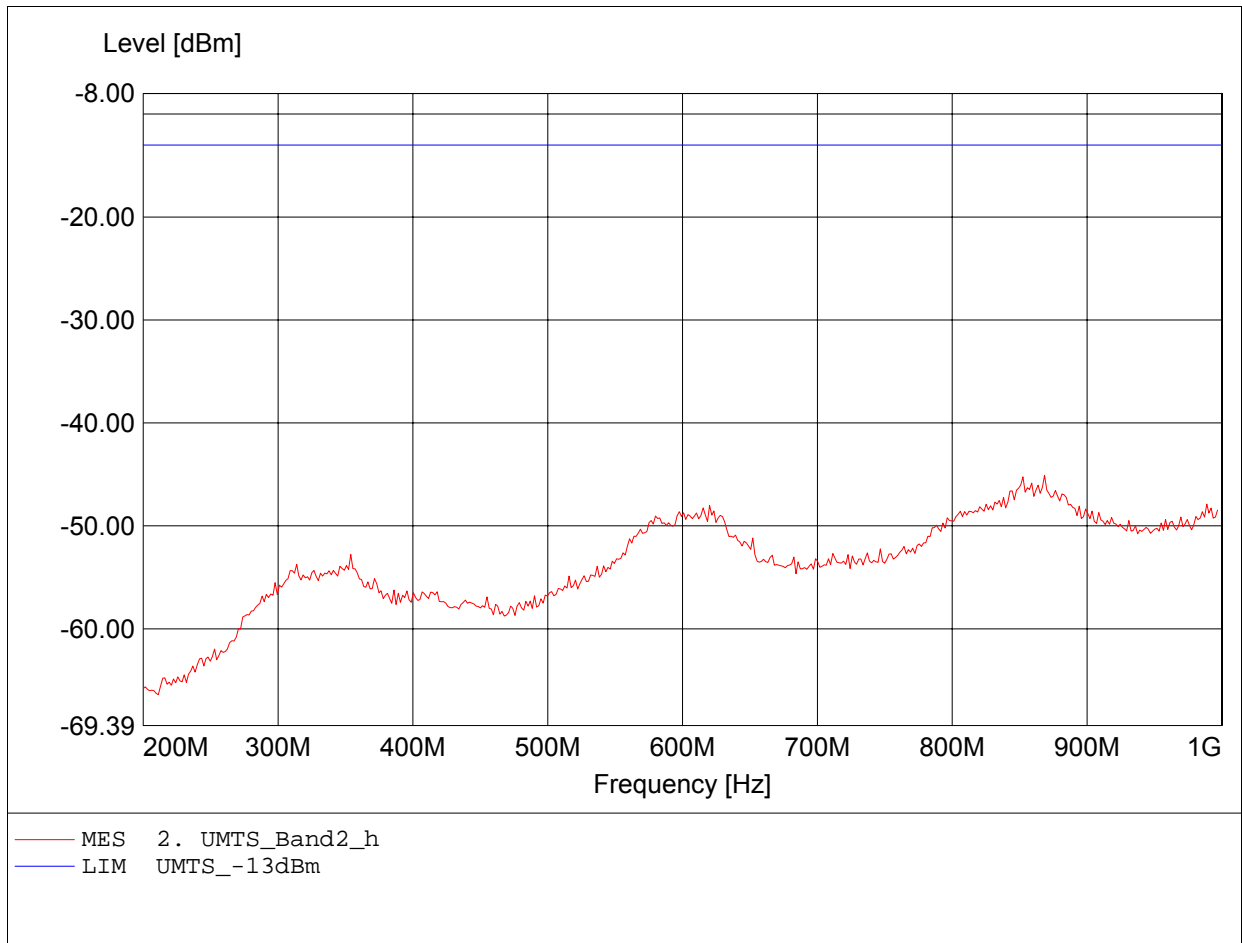


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.954GHz, Pmax: -15.99dBm, RBW: 1MHz/3kHz

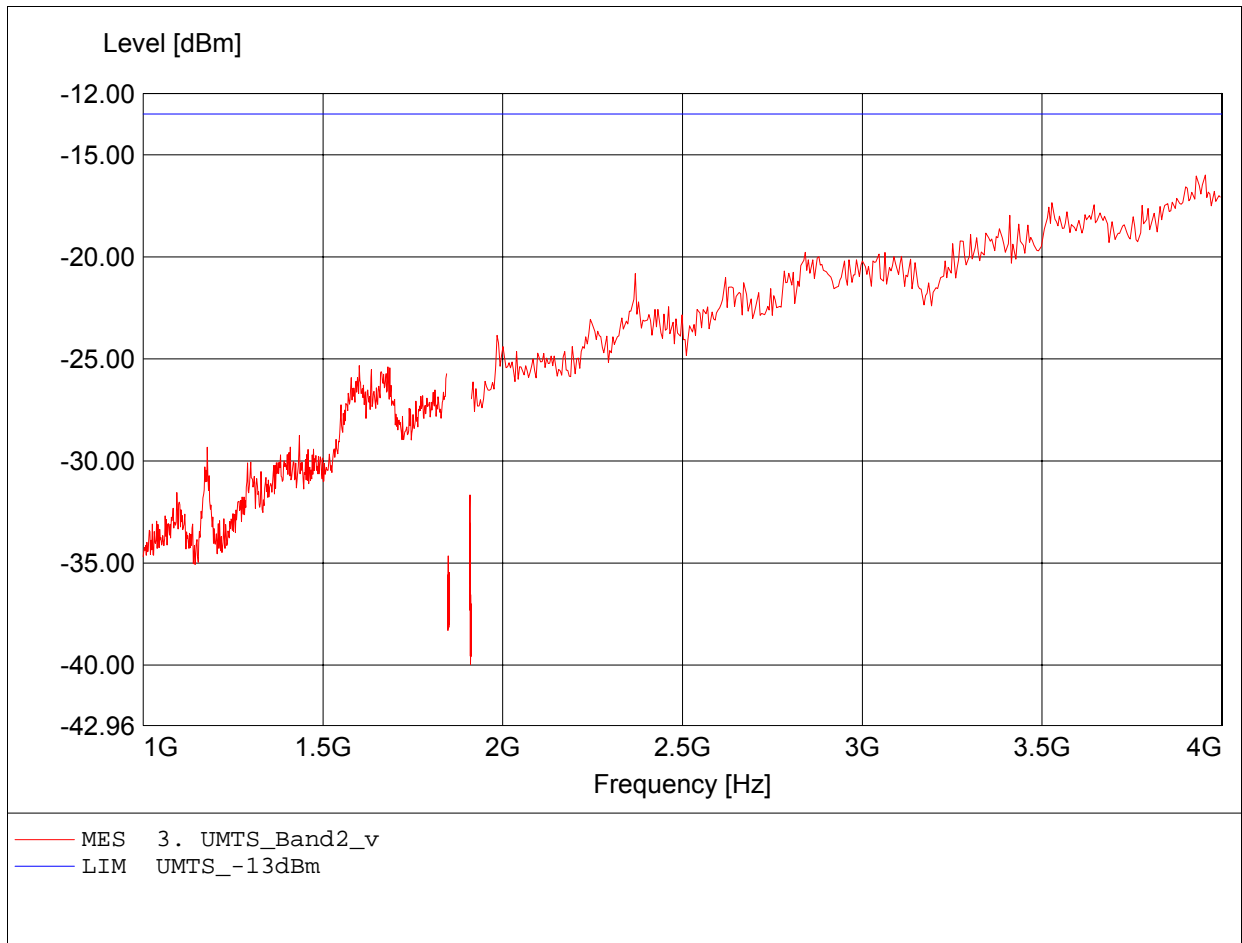


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.983GHz, Pmax: -16.09dBm, RBW: 1MHz/3kHz

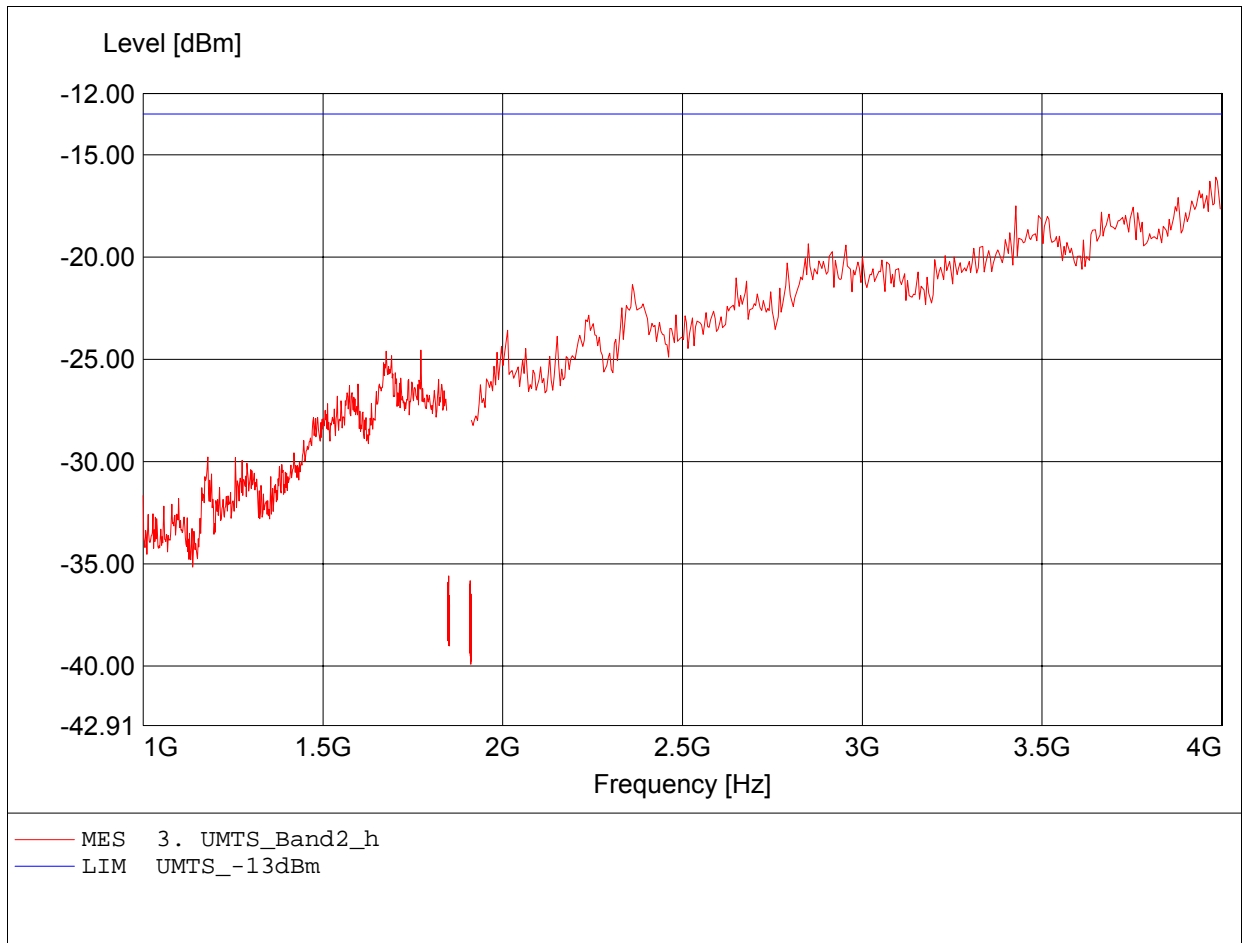


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -43.04dBm, RBW: 1MHz

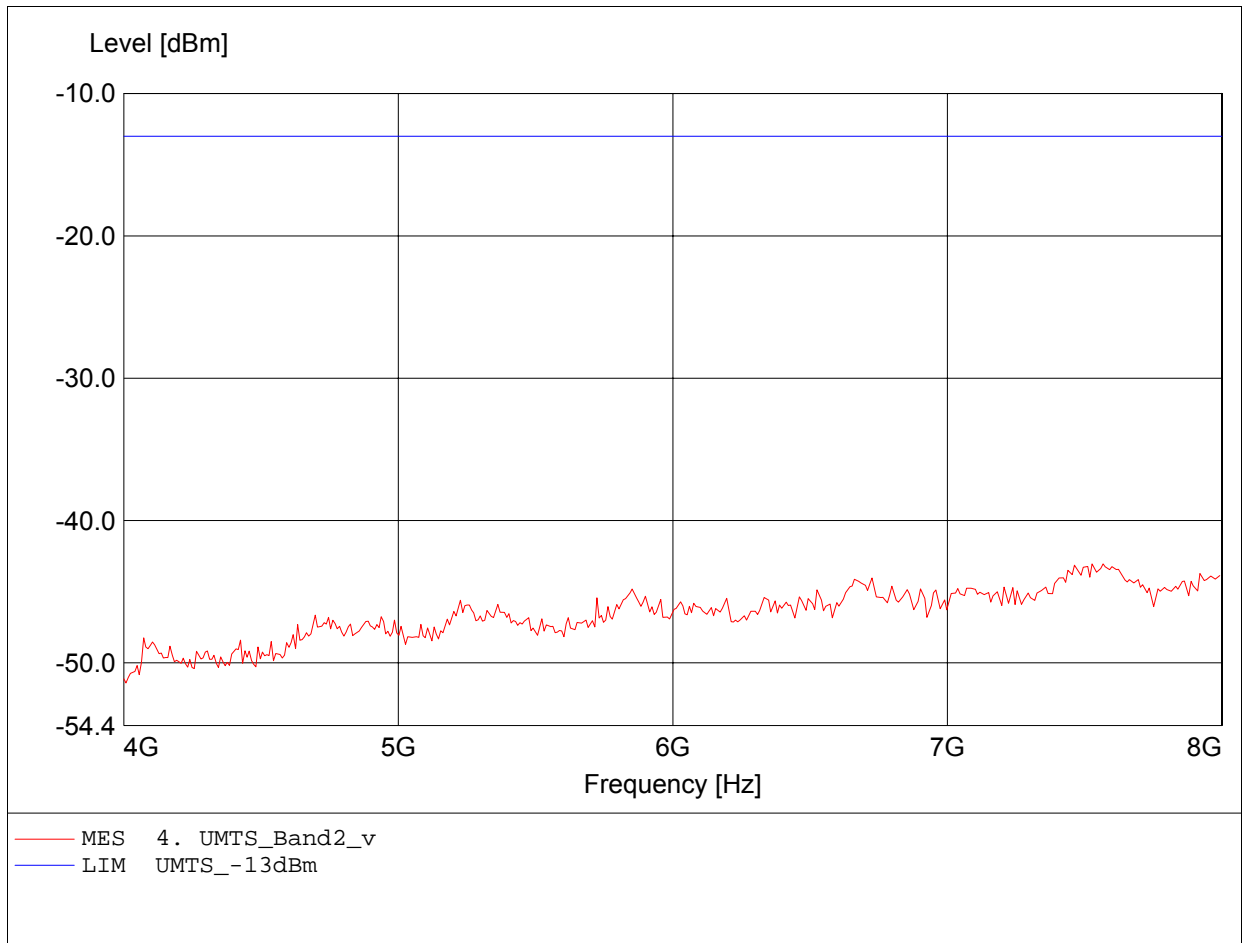


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.816GHz, Pmax: -42.31dBm, RBW: 1MHz

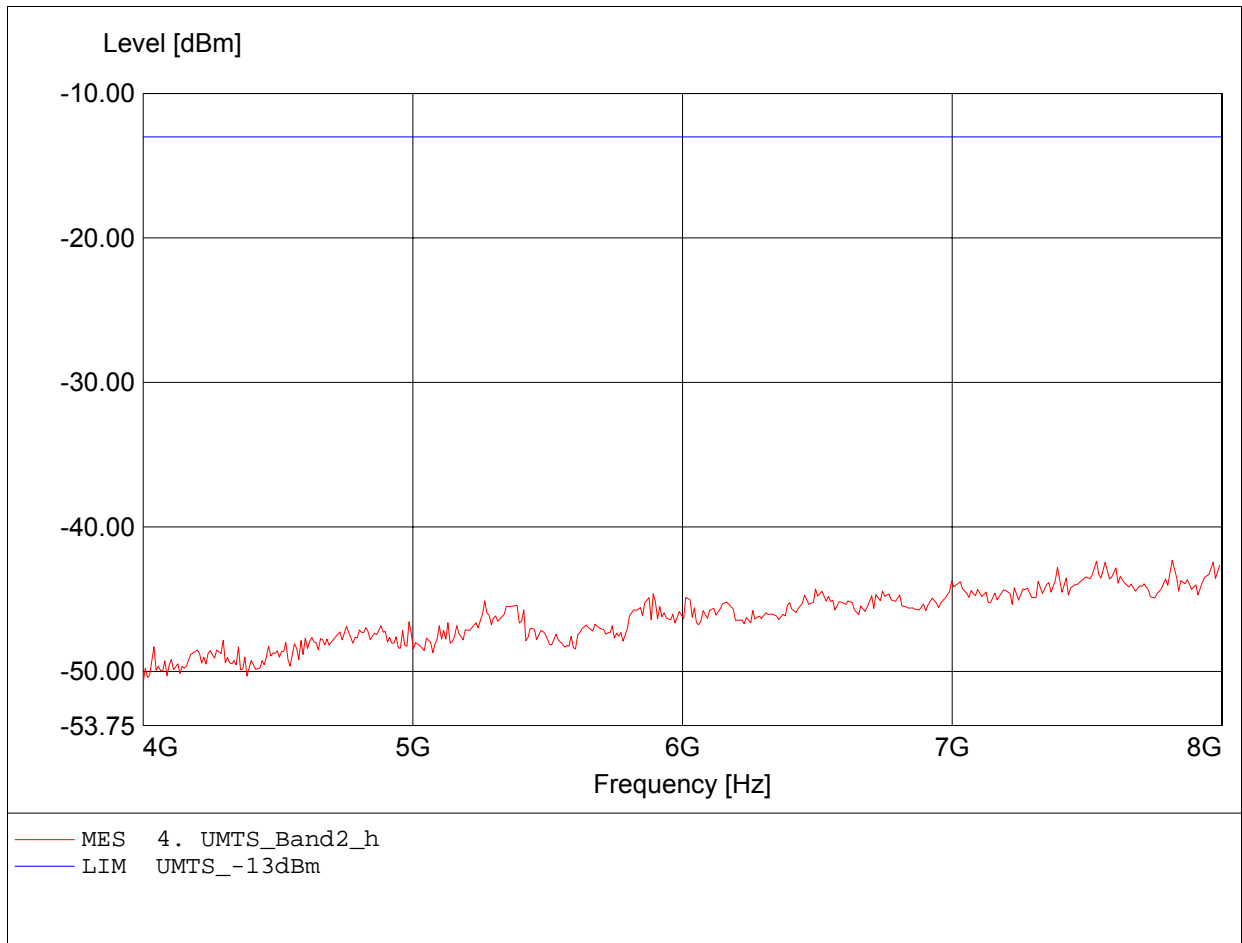


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.126GHz, Pmax: -38.25dBm, RBW: 1MHz

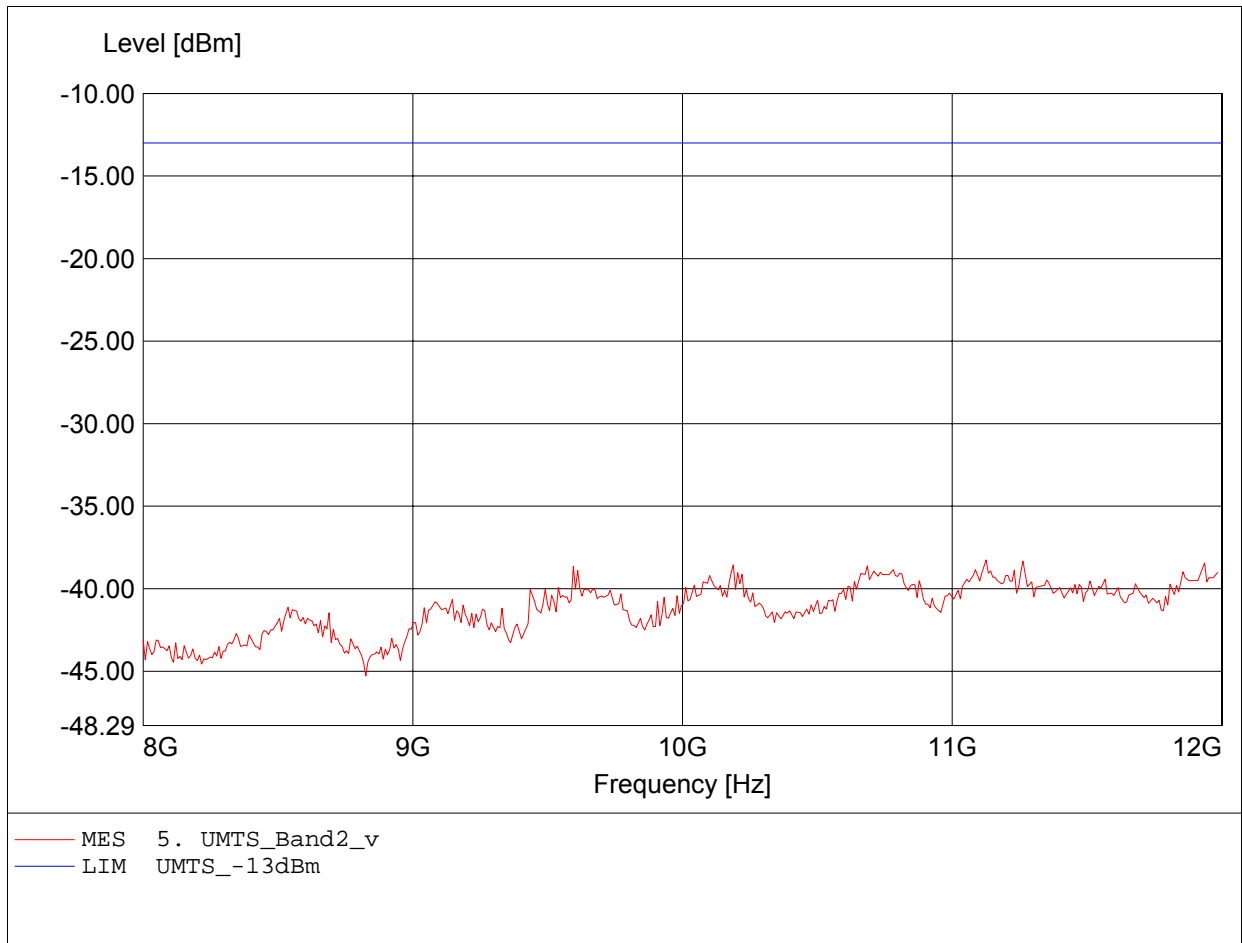


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.559GHz, Pmax: -37.47dBm, RBW: 1MHz

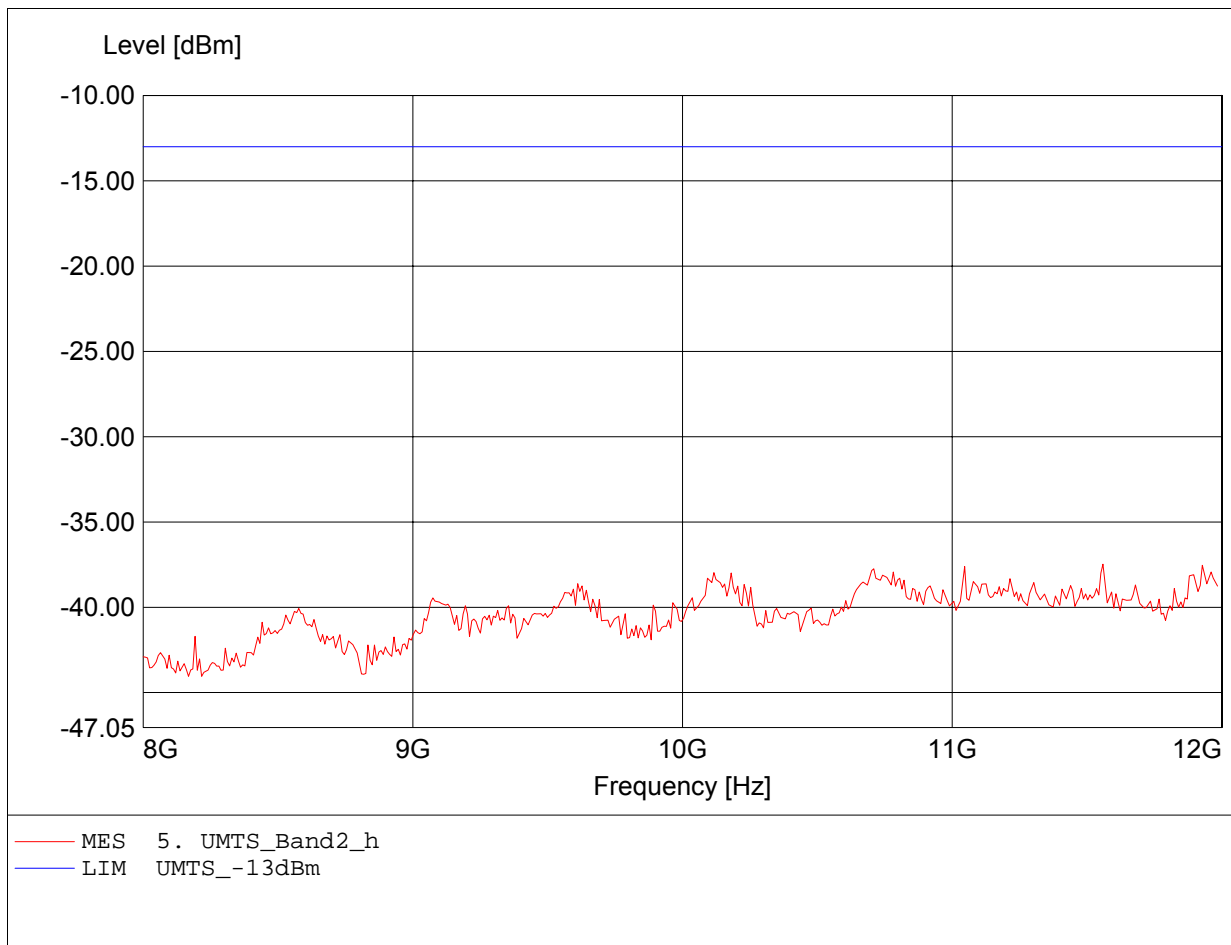


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.960GHz, Pmax: -30.14dBm, RBW: 1MHz

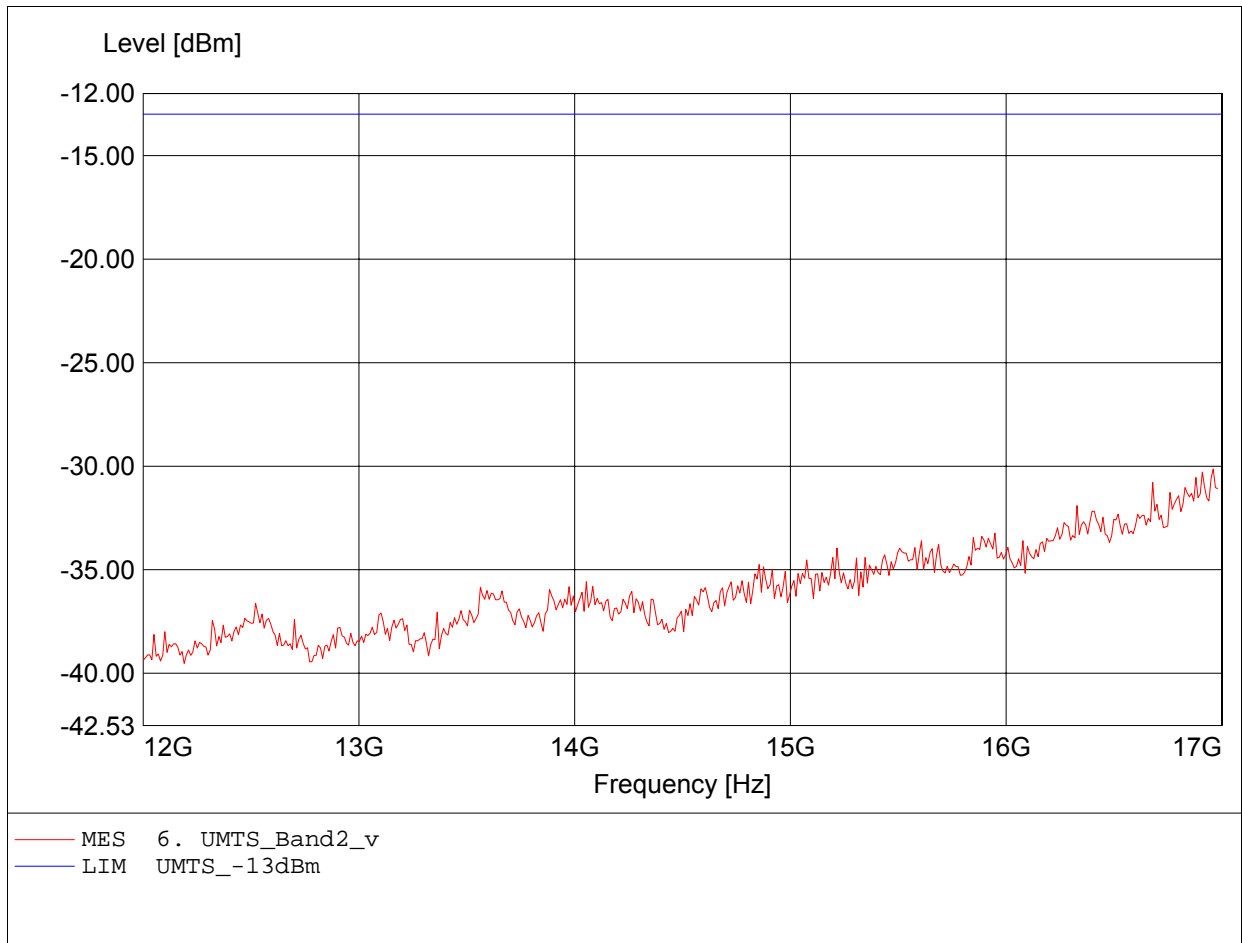


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 16.870GHz, Pmax: -28.67dBm, RBW: 1MHz

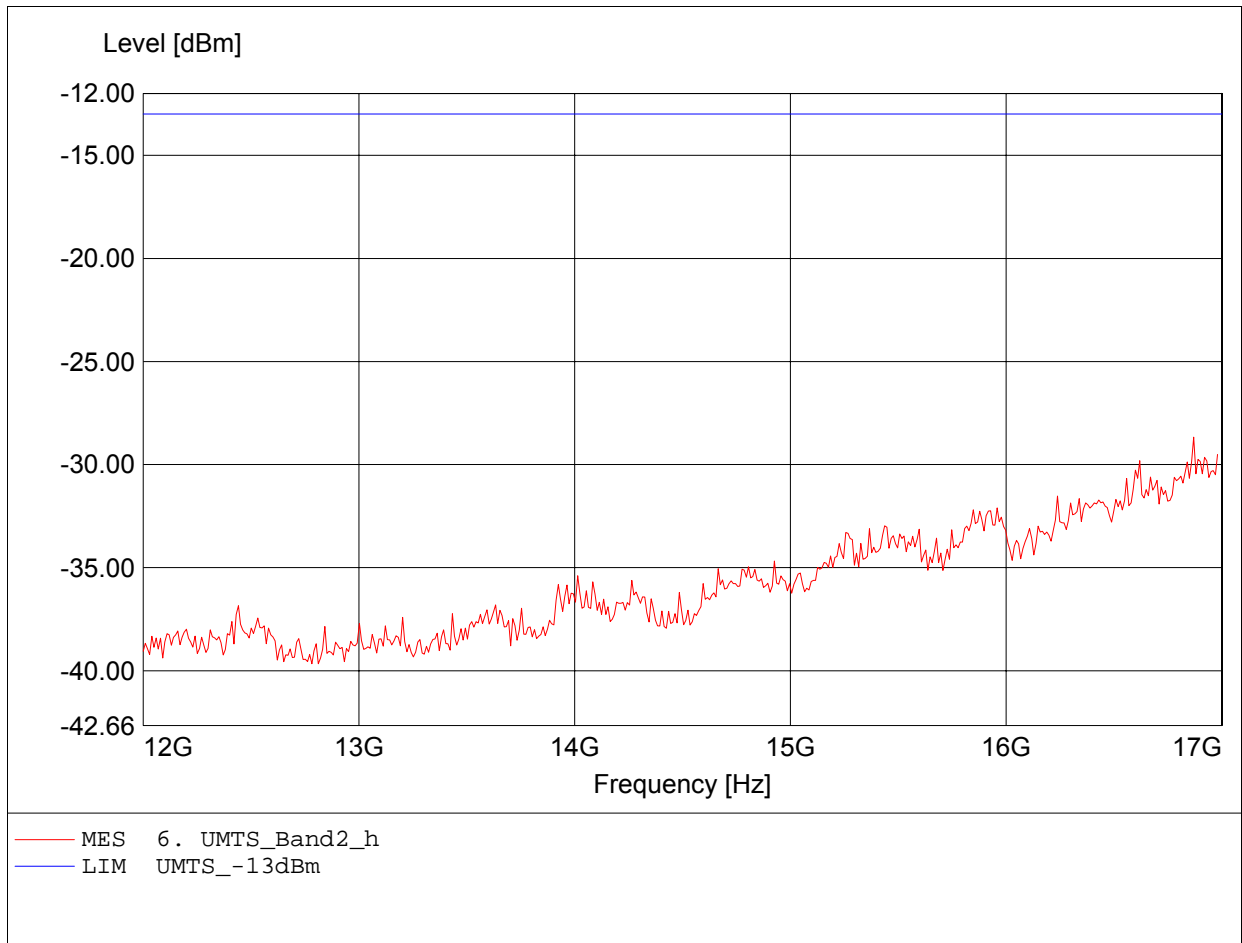


Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.081GHz, Pmax: -24.11dBm, RBW: 1MHz

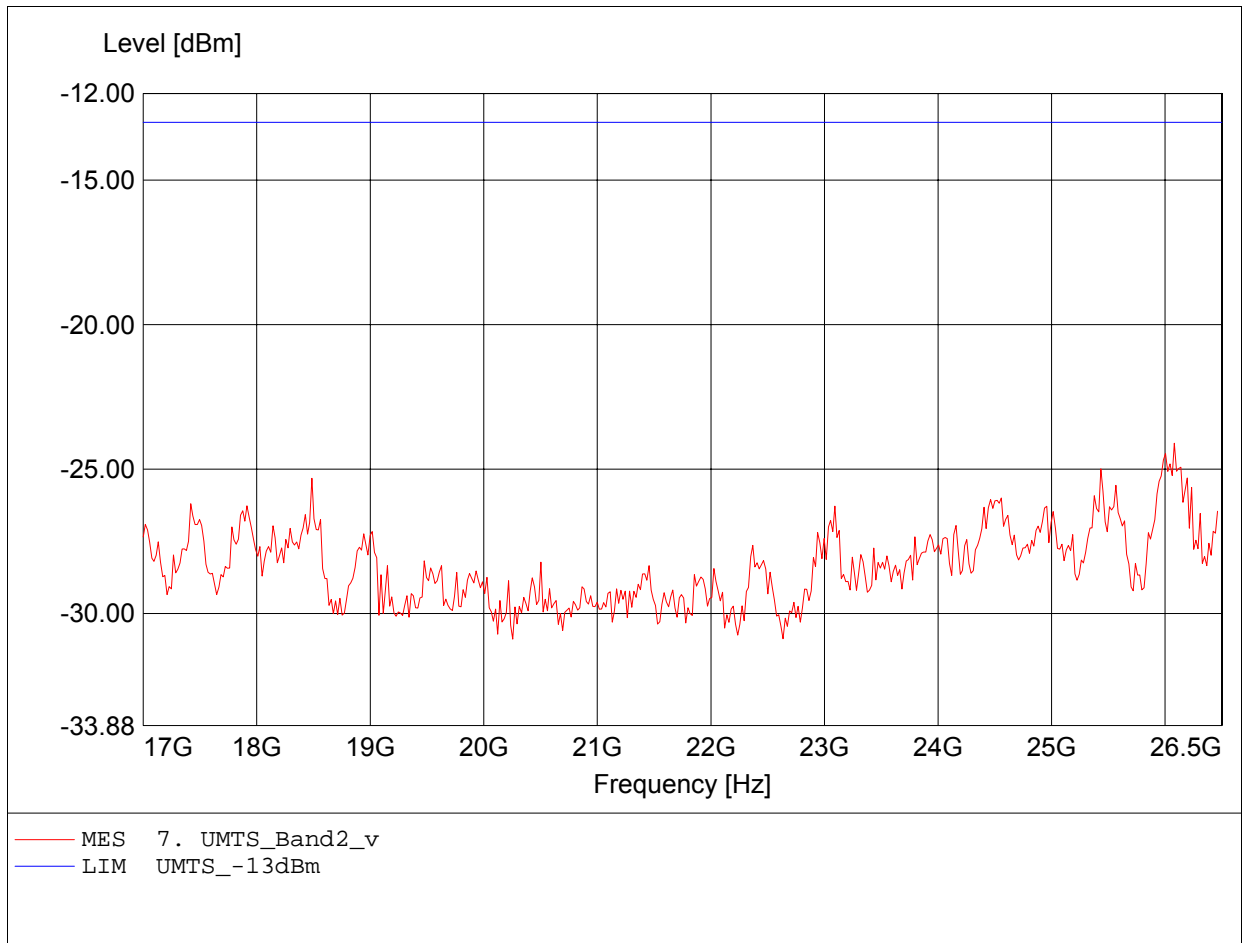

Radiated Emissions Tx
UMTS Operating Band II

Approval Holder: PANTECH CO., LTD.
EUT: UMTS GSM PHONE
Model / Channel: C600 / 9537
Test Site / Operator: ETS / Mr. Schlaps
Operating Conditions: 23°C / Umax.: 4.20 V DC
Test Specification: mode: Tx
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.100GHz, Pmax: -23.73dBm, RBW: 1MHz

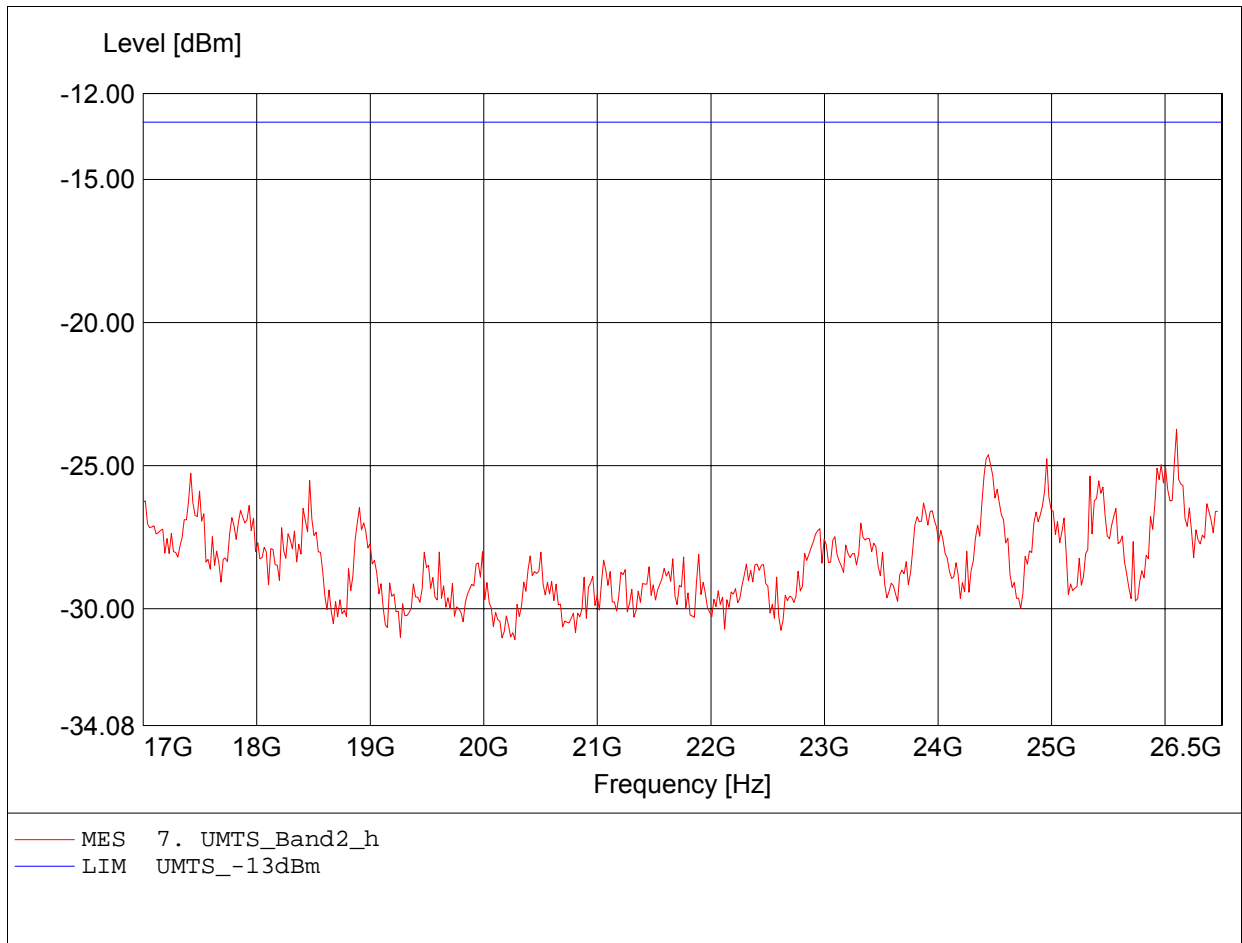

Appendix H


Block edge compliance

**FCC Part 22 H
Higher band edge**

EUT	UTMS GSM phone
Model	C600 / Mode: UMTS OpB V
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 22 Subpart H - Cellular Radiotelephone Service
Comment 1	Channel: 4232
Comment 2	
Comment 3	



Marker 1 [T1]	RBW	50 kHz	RF Att	50 dB
Ref Lvl	24.39 dBm	VBW	50 kHz	
36 dBm	846.46492986 MHz	SWT	10 ms	Unit dBm

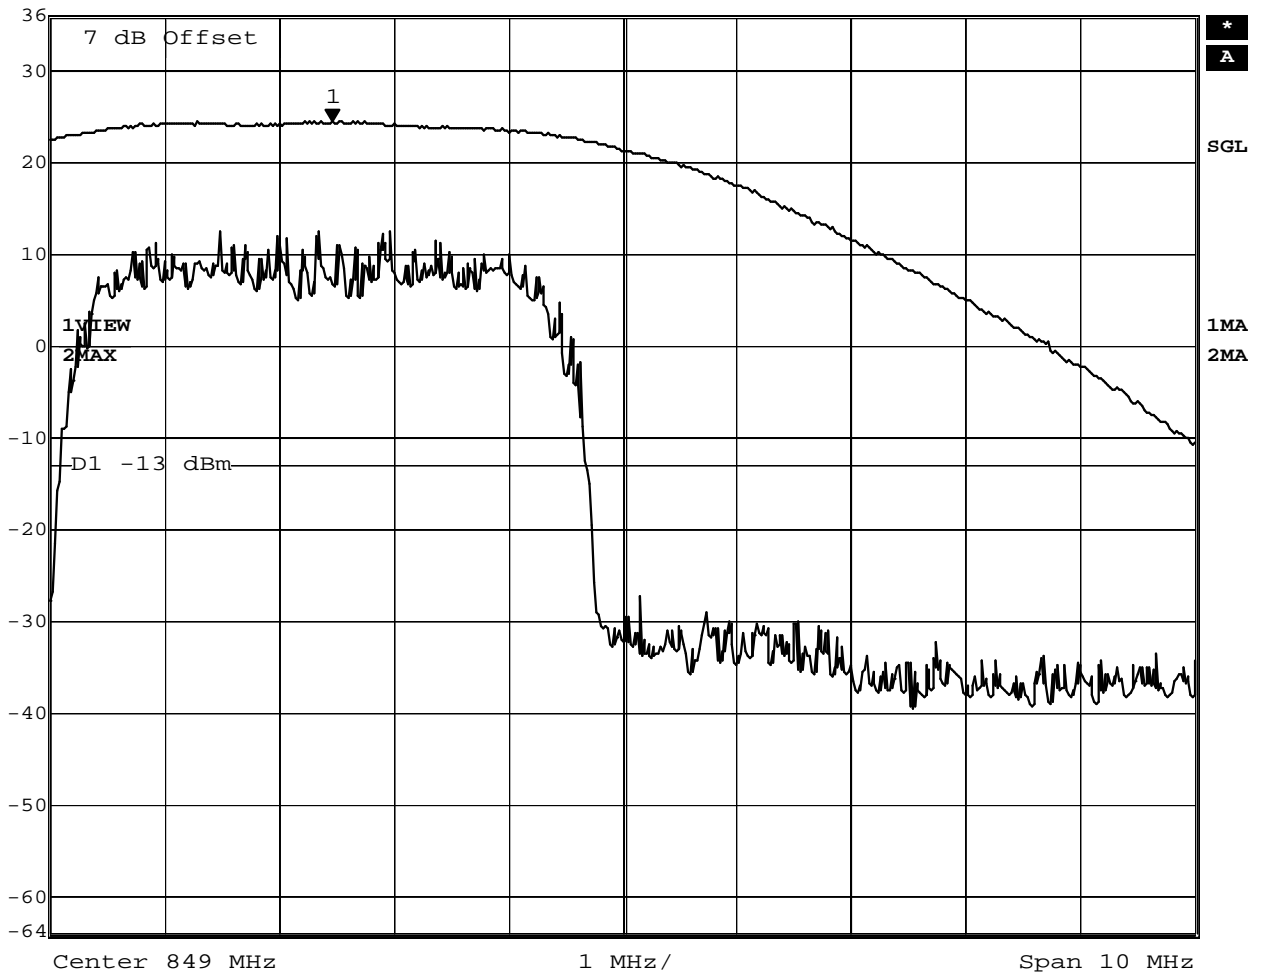

Date: 1.FEB.2007 09:03:18


Measurement diagram

**FCC Part 24 E
Lower Block edge**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9263
Comment 2	
Comment 3	



Marker 1 [T1]	RBW	50 kHz	RF Att	50 dB
Ref Lvl	24.44 dBm	VBW	50 kHz	
36 dBm	1.85287575 GHz	SWT	10 ms	Unit dBm

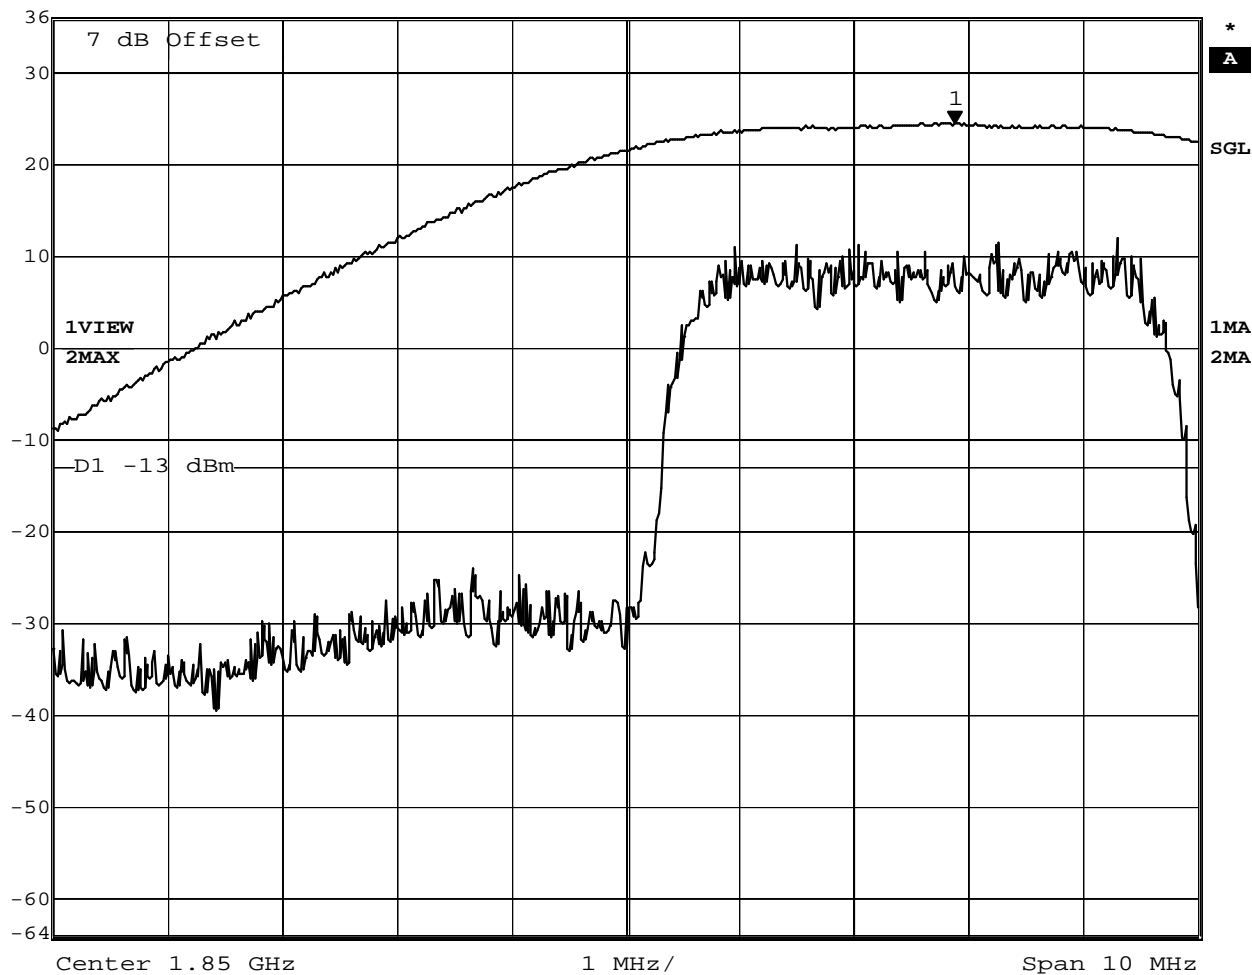

Date: 1.FEB.2007 08:11:40


Measurement diagram

**FCC Part 24 E
Higher Block edge**

EUT	UMTS GSM phone
Model	C600 / Mode: UMTS OpB II
Approval Holder	Pantech Co., Ltd.
Temperature / Voltage	23°C / Unom.: 3.80 VDC
Test Site / Operator	ETS / Mr. Meng
Test Specification	FCC Part 24 Subpart E - Broadband PCS
Comment 1	Channel: 9537
Comment 2	
Comment 3	



Marker 1 [T1]	RBW	50 kHz	RF Att	50 dB
Ref Lvl	22.67 dBm	VBW	50 kHz	
36 dBm	1.90760521 GHz	SWT	10 ms	Unit dBm

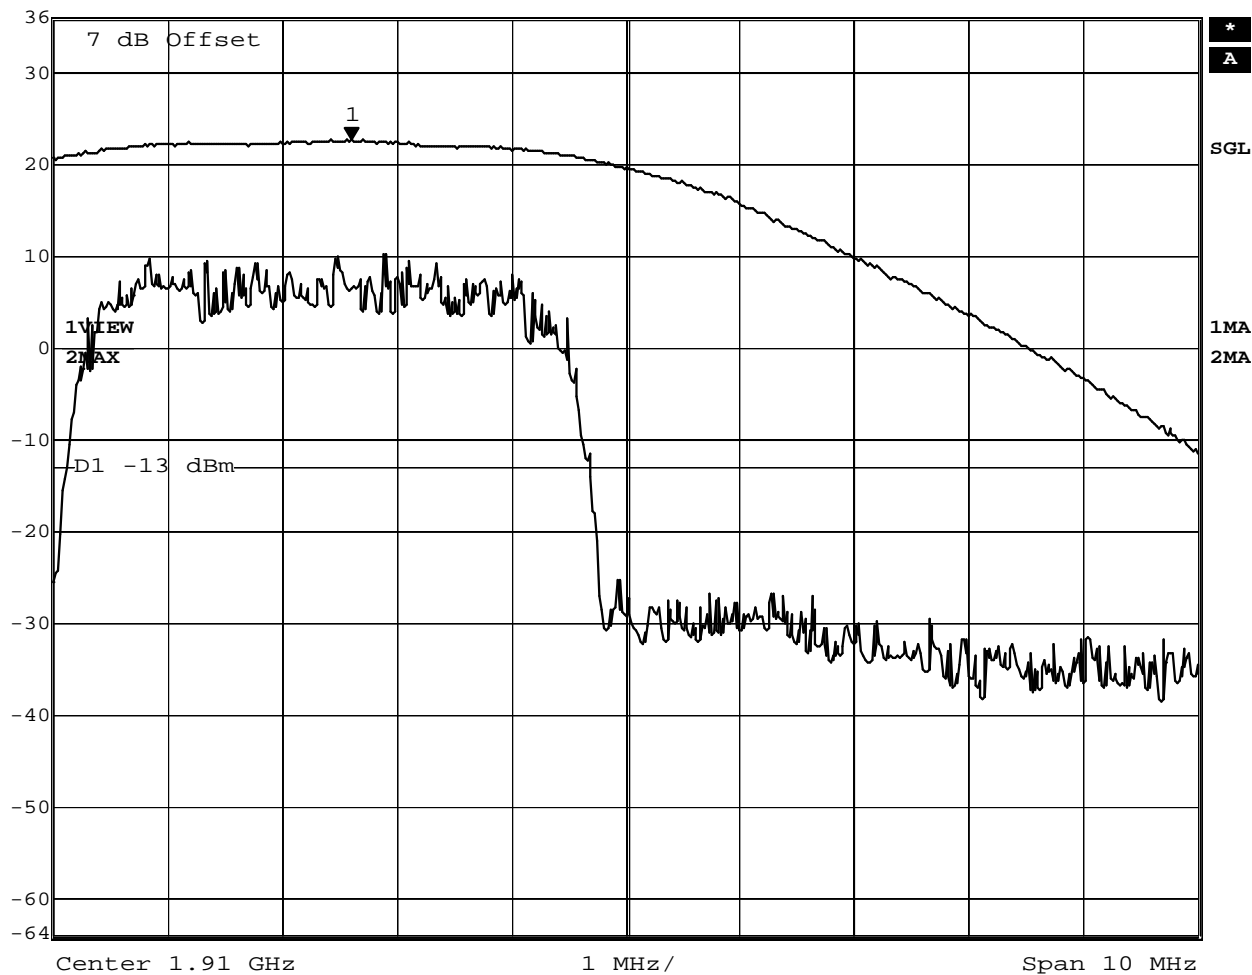

Date: 1.FEB.2007 08:12:55

Measurement diagram

ETS Product Service AG

Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


Page 1 of 1

Appendix I

AC power line conducted emissions


EMI voltage test in the ac-mains according to FCC part 15

EUT: UMTS GSM phone
Manufacturer: Pantech Co., Ltd.
Operating Condition: Unom: 120 VAC(AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Meng
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: C600
Adaptor: 5070U-EU

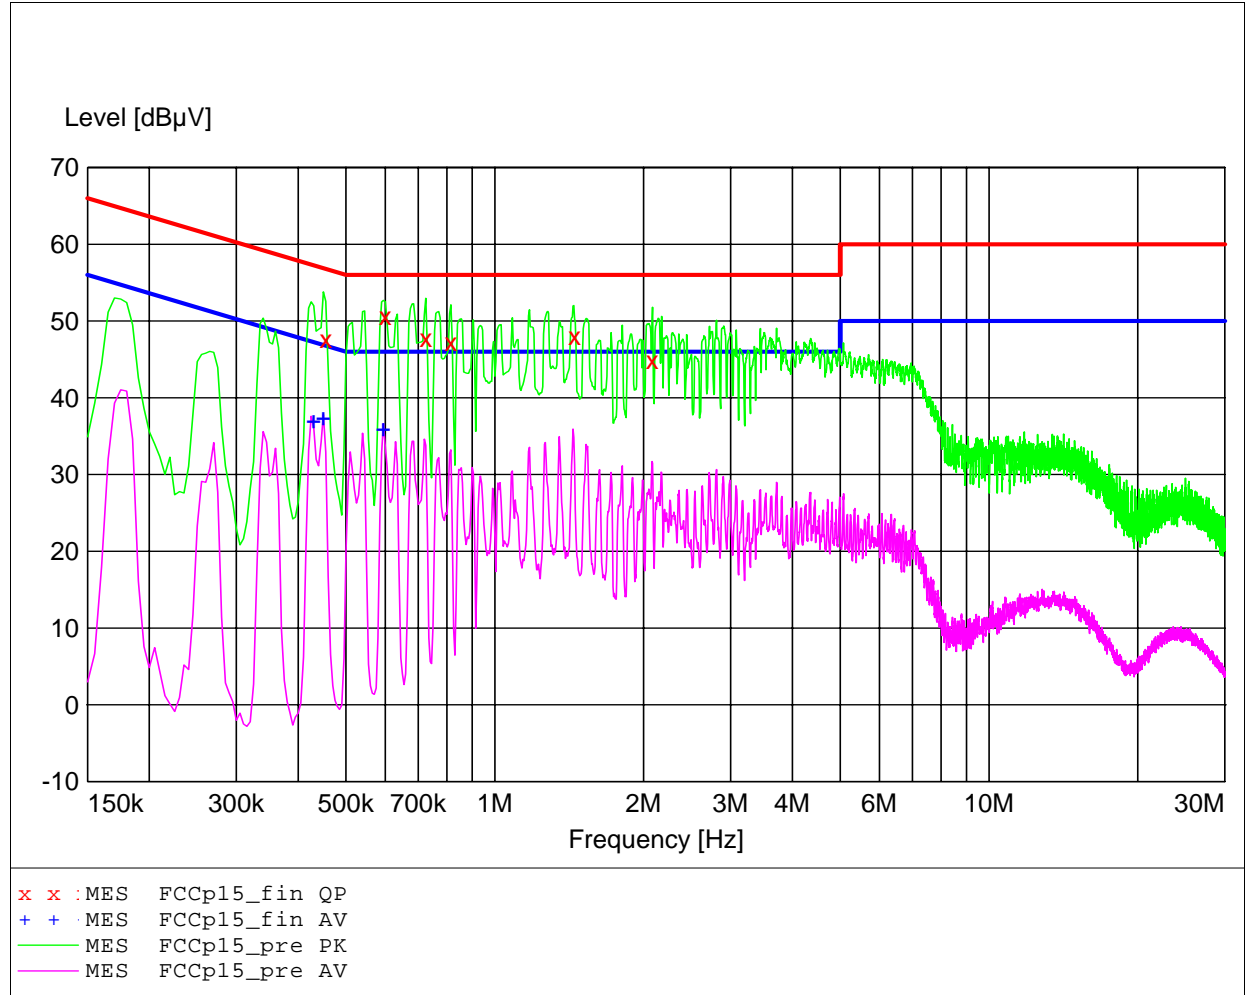

EMI voltage test in the ac-mains according to FCC part 15

EUT: UMTS GSM phone
Manufacturer: Pantech Co., Ltd.
Operating Condition: Unom: 120 VAC(AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Meng
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: C600
Adaptor: 5070U-EU

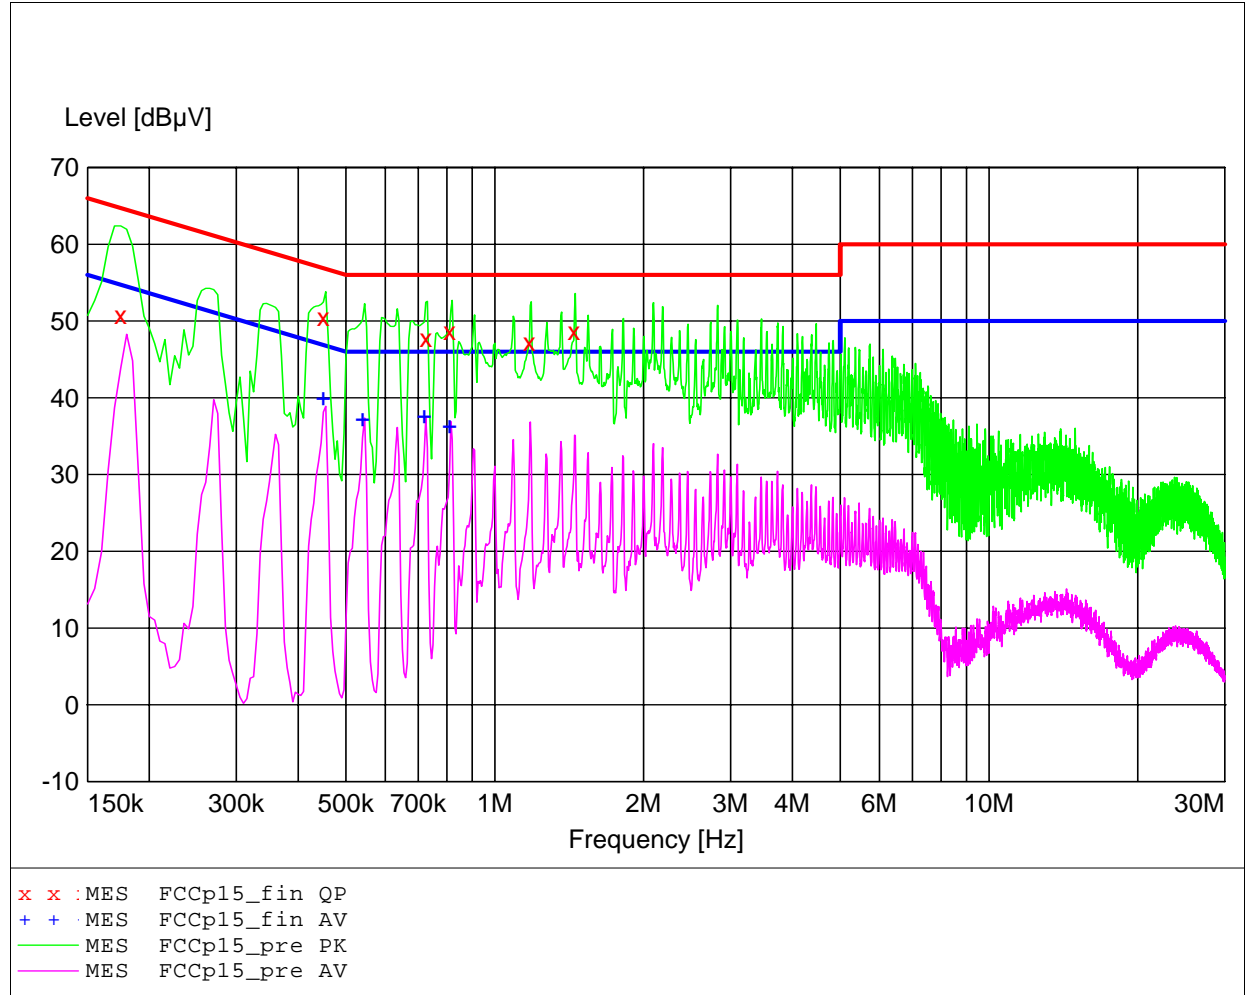

Appendix J

Receiver radiated emission