




## Appendix B

RF Power Output




Marker 1 [T1]      RBW    3 MHz    RF Att    50 dB  
Ref Lvl            29.88 dBm    VBW    3 MHz  
36 dBm            1.85016994 GHz    SWT    5 ms    Unit        dBm

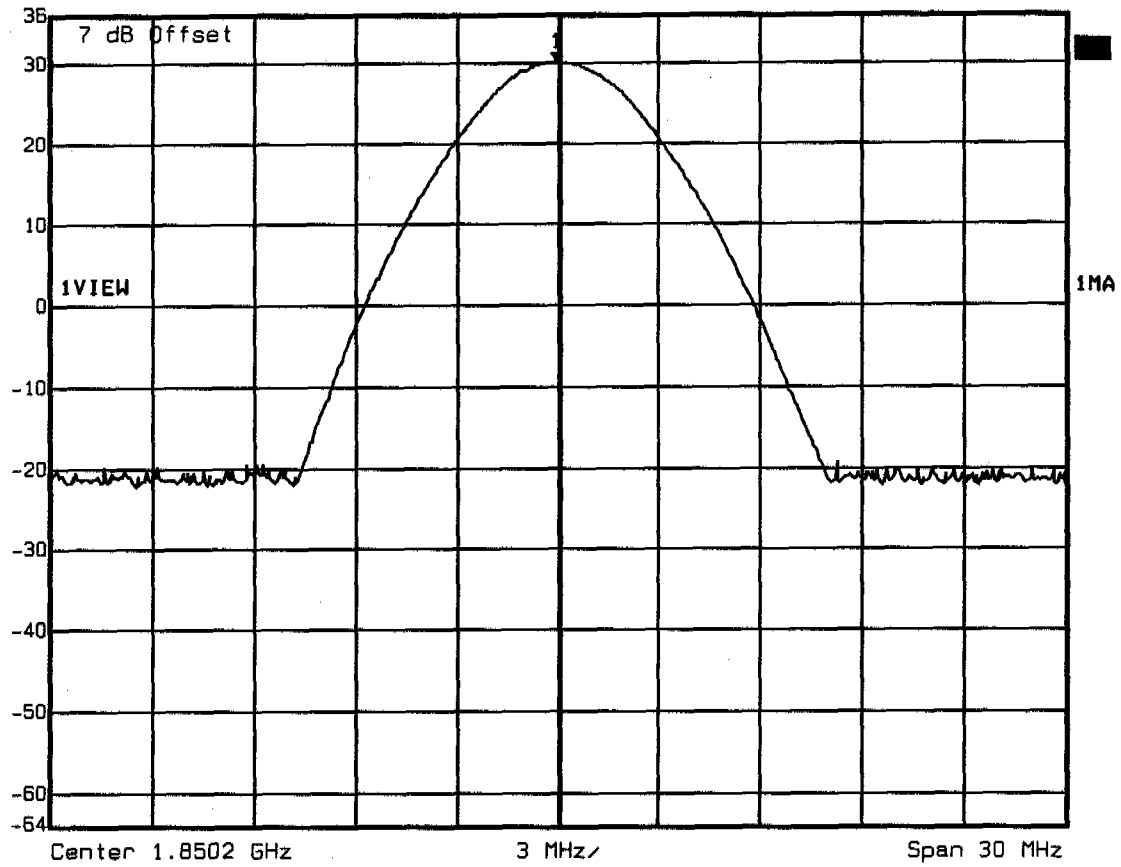

Title:      Output Power Conducted / Channel 512  
Comment A: Triple Band / GF260  
Date:      19.AUG.2004 08:52:06




Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 29.87 dBm VBW 3 MHz  
36 dBm 1.87970958 GHz SWT 5 ms Unit dBm

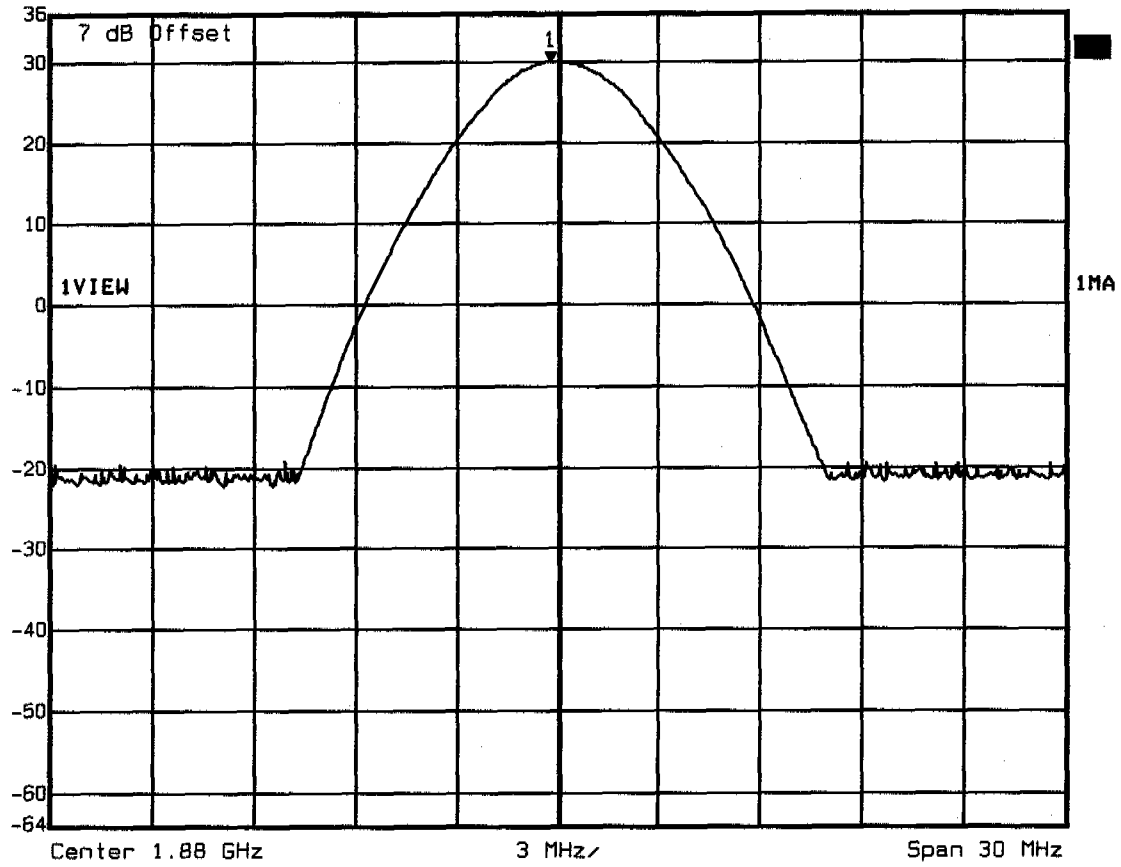

Title: Output Power Conducted / Channel 661  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 08:52:51




Marker 1 [T1]      RBW    3 MHz    RF Att    50 dB  
Ref Lvl            29.81 dBm    VBW    3 MHz  
36 dBm            1.90970982 GHz    SWT    5 ms    Unit        dBm

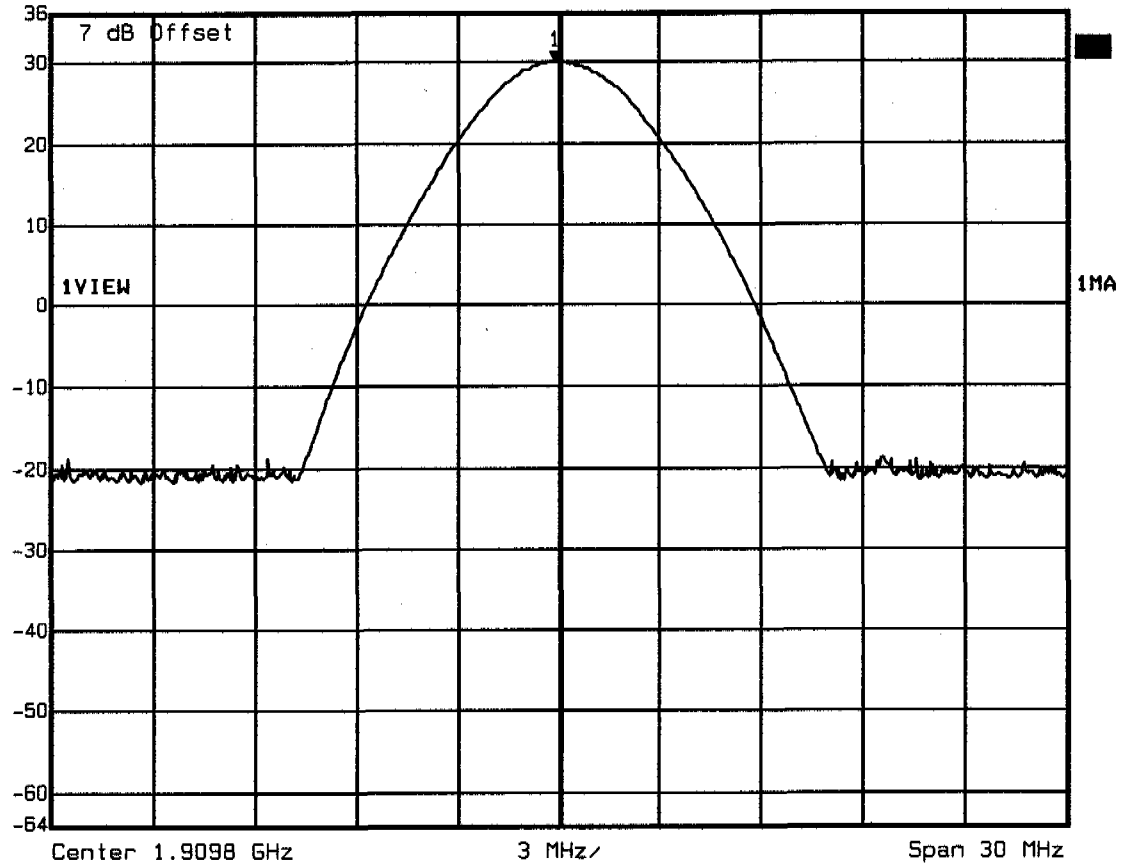

Title:      Output Power Conducted / Channel 810  
Comment A: Triple Band / GF260  
Date:      19.AUG.2004 08:53:40




Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 32.82 dBm VBW 3 MHz  
36 dBm 824.10981964 MHz SWT 5 ms Unit dBm

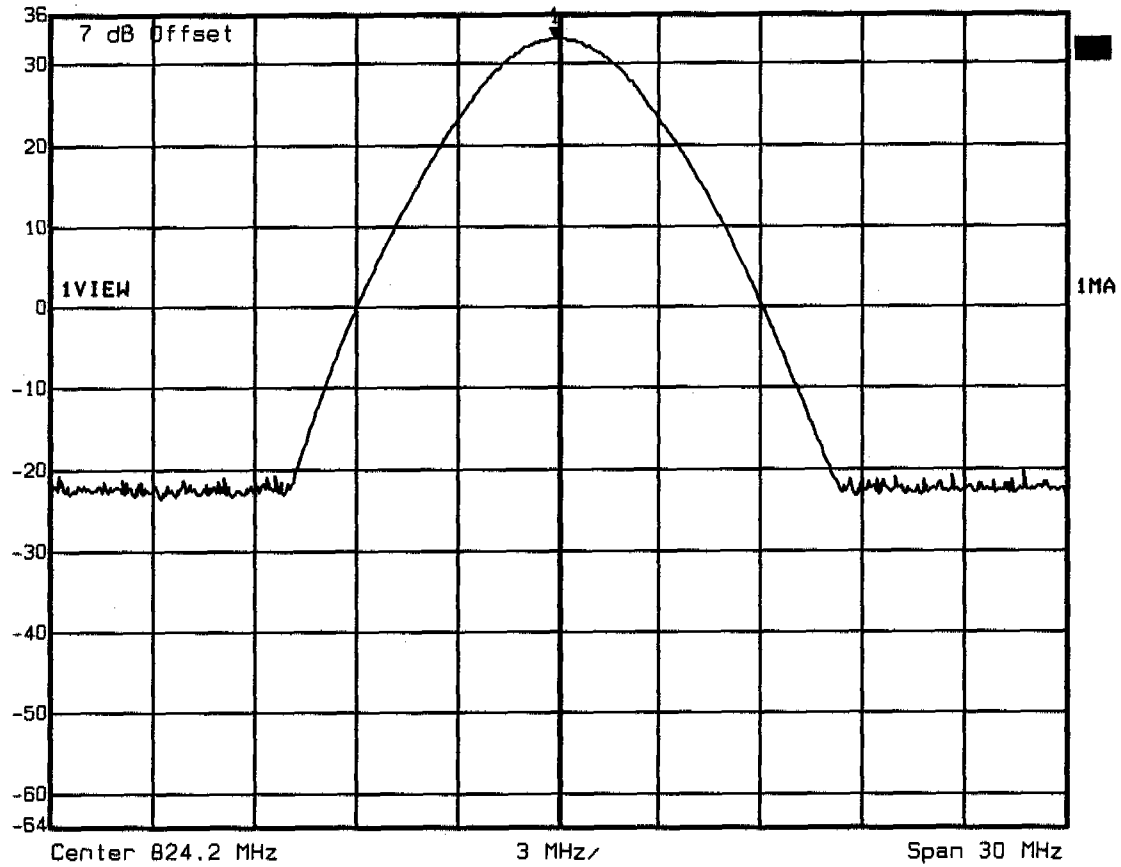

Title: Output Power Conducted / Channel 128  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 09:30:38




Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 32.00 dBm VBW 3 MHz  
36 dBm 836.16993988 MHz SWT 5 ms Unit dBm

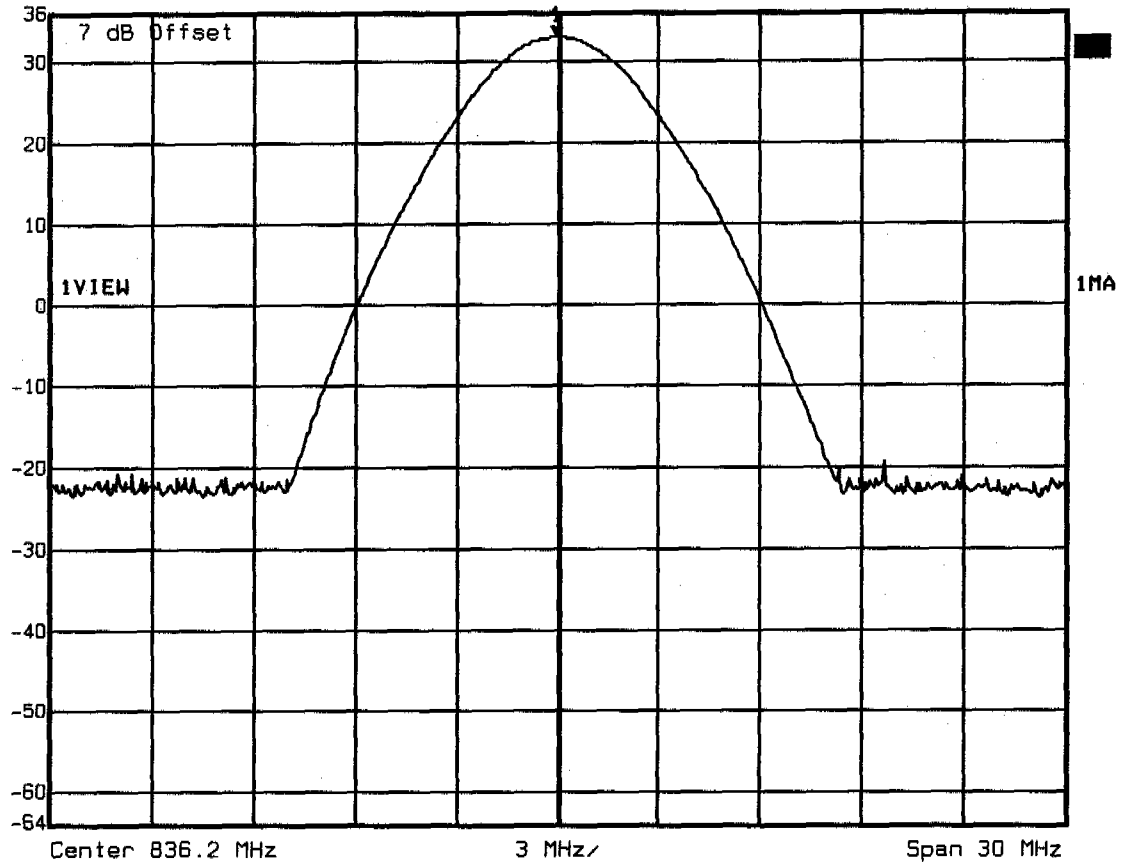

Title: Output Power Conducted / Channel 188  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 09:32:43



Marker 1 [T1] RBW 3 MHz RF Att 50 dB  
Ref Lvl 32.82 dBm VBW 3 MHz  
36 dBm 848.89018036 MHz SWT 5 ms Unit dBm

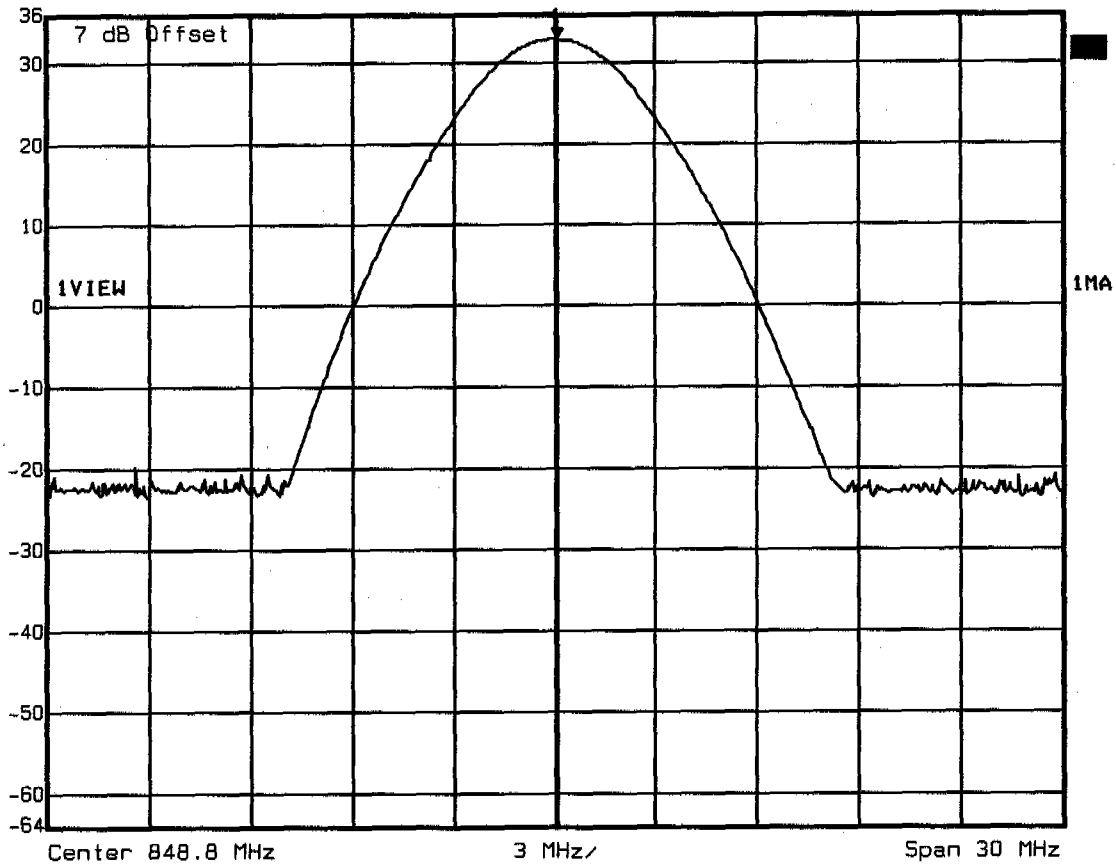

Title: Output Power Conducted / Channel 251  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 09:33:37




## Appendix C

ERP, EIRP




**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.850GHz, Pmax: 29.74dBm, RBW: 3MHz

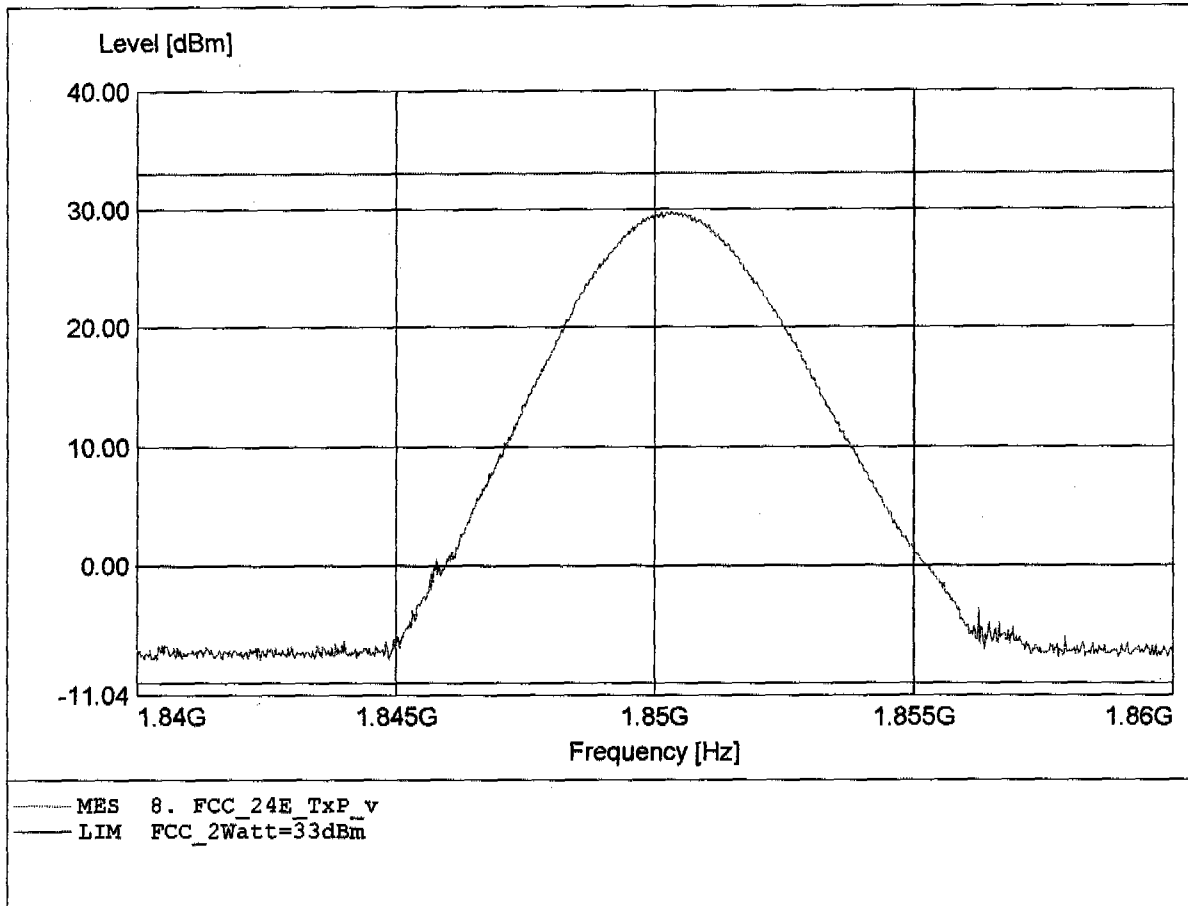


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.850GHz, Pmax: 22.76dBm, RBW: 3MHz

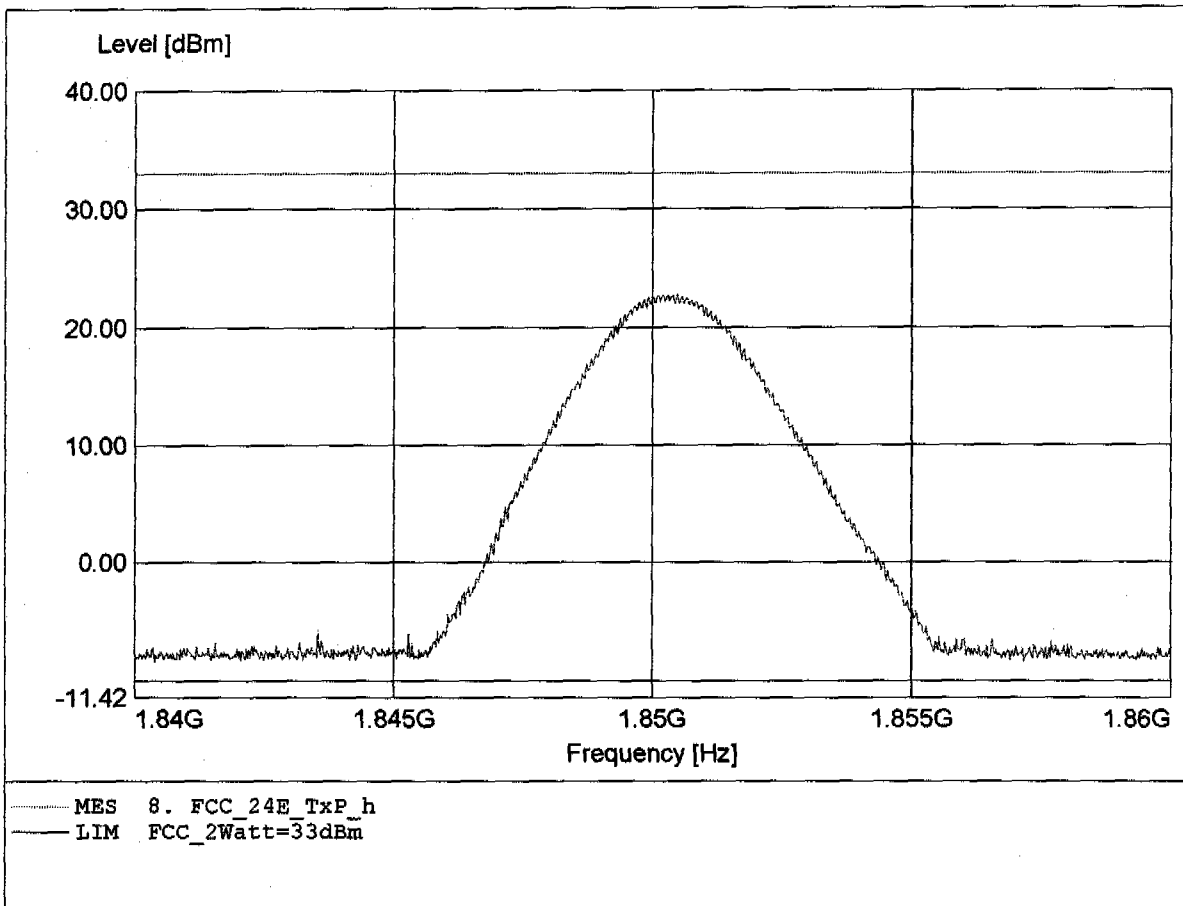


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.880GHz, Pmax: 27.30dBm, RBW: 3MHz

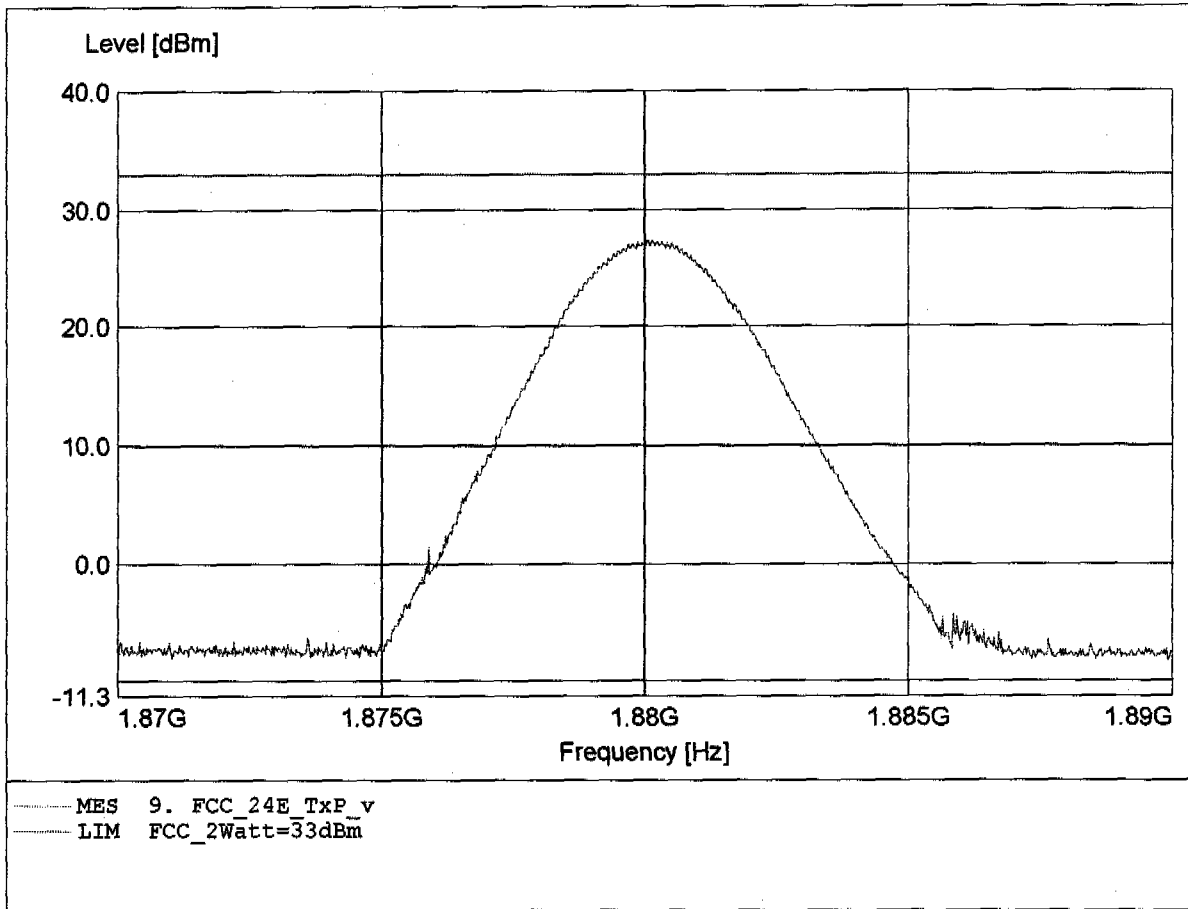


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.880GHz, Pmax: 22.52dBm, RBW: 3MHz

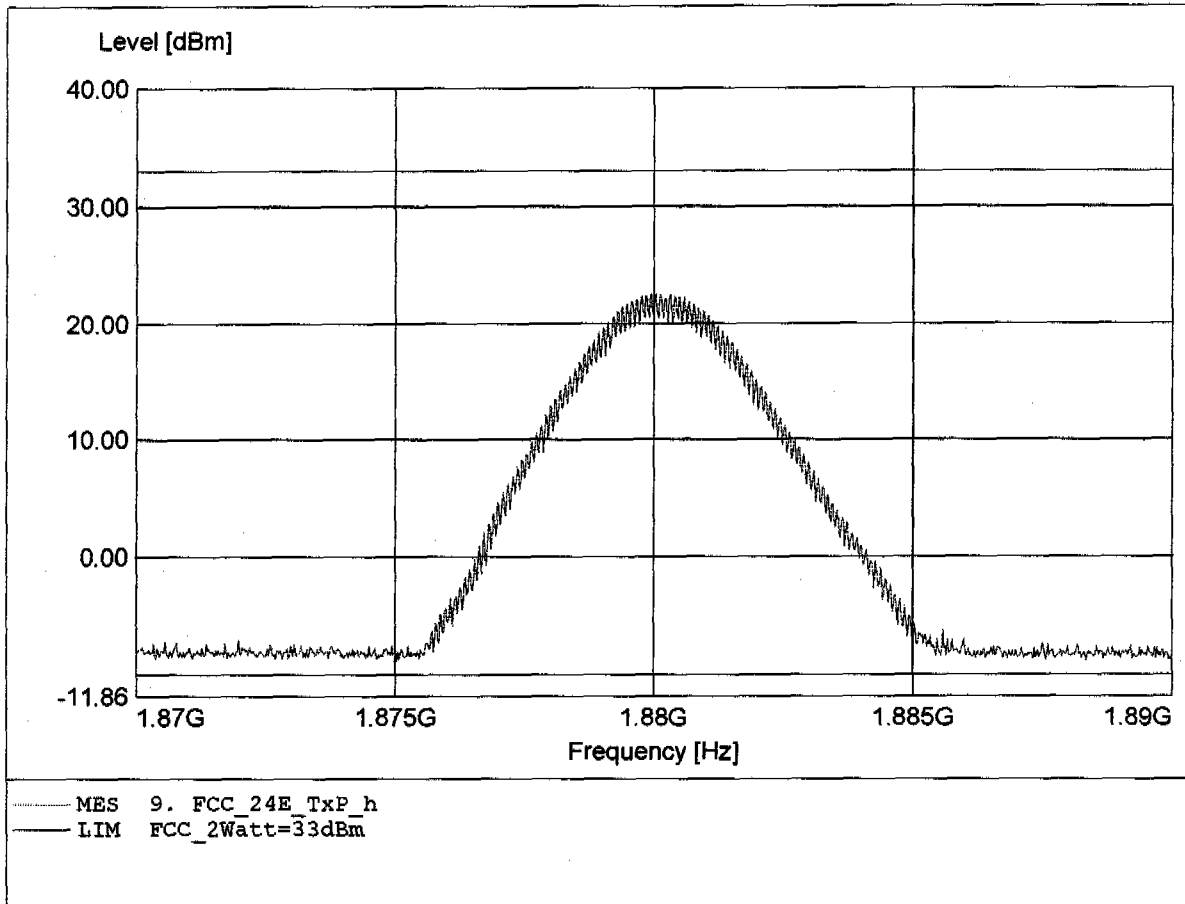


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.910GHz, Pmax: 27.81dBm, RBW: 3MHz

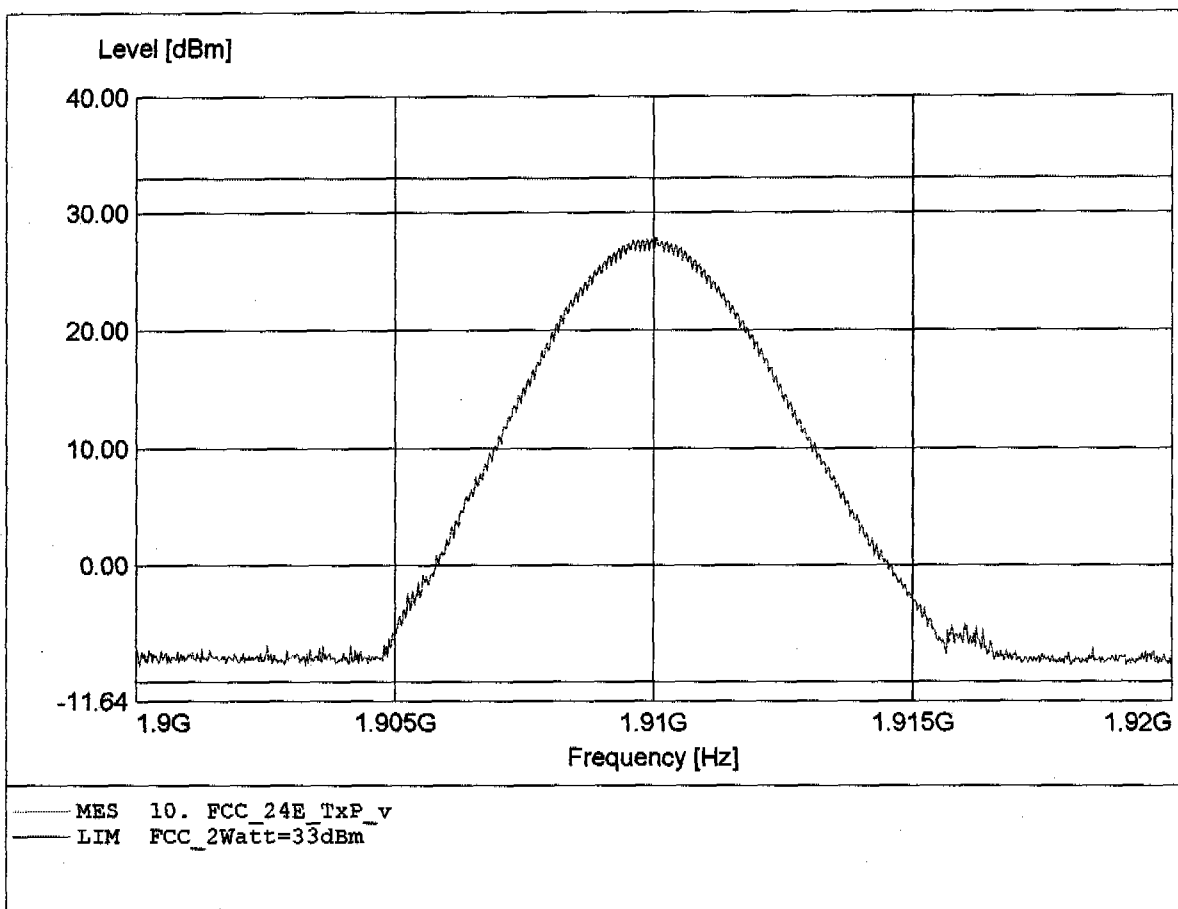


**Equivalent Isotropically Radiated Power  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.232  
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0  
Comment 2: Freq: 1.910GHz, Pmax: 21.42dBm, RBW: 3MHz

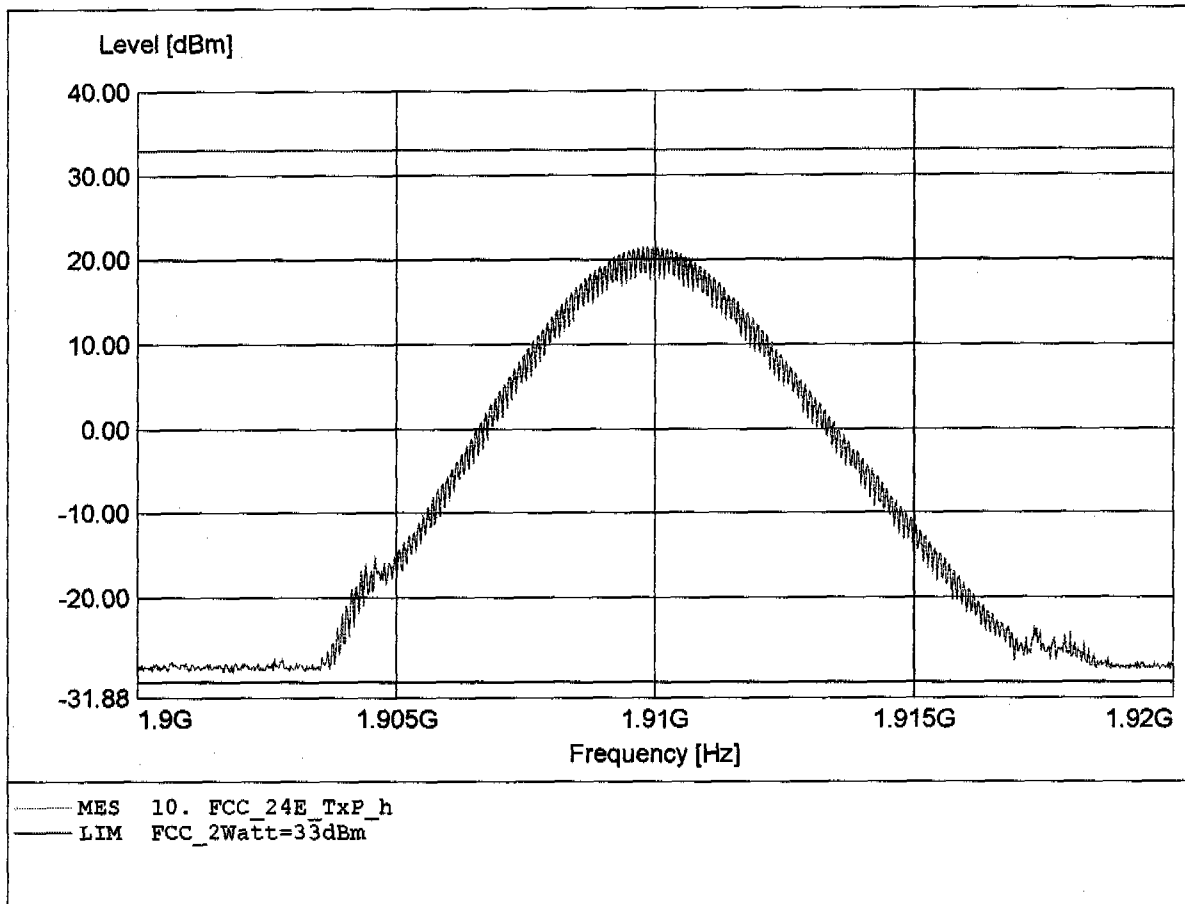


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 824.333MHz, Pmax: 28.08dBm, RBW: 3MHz

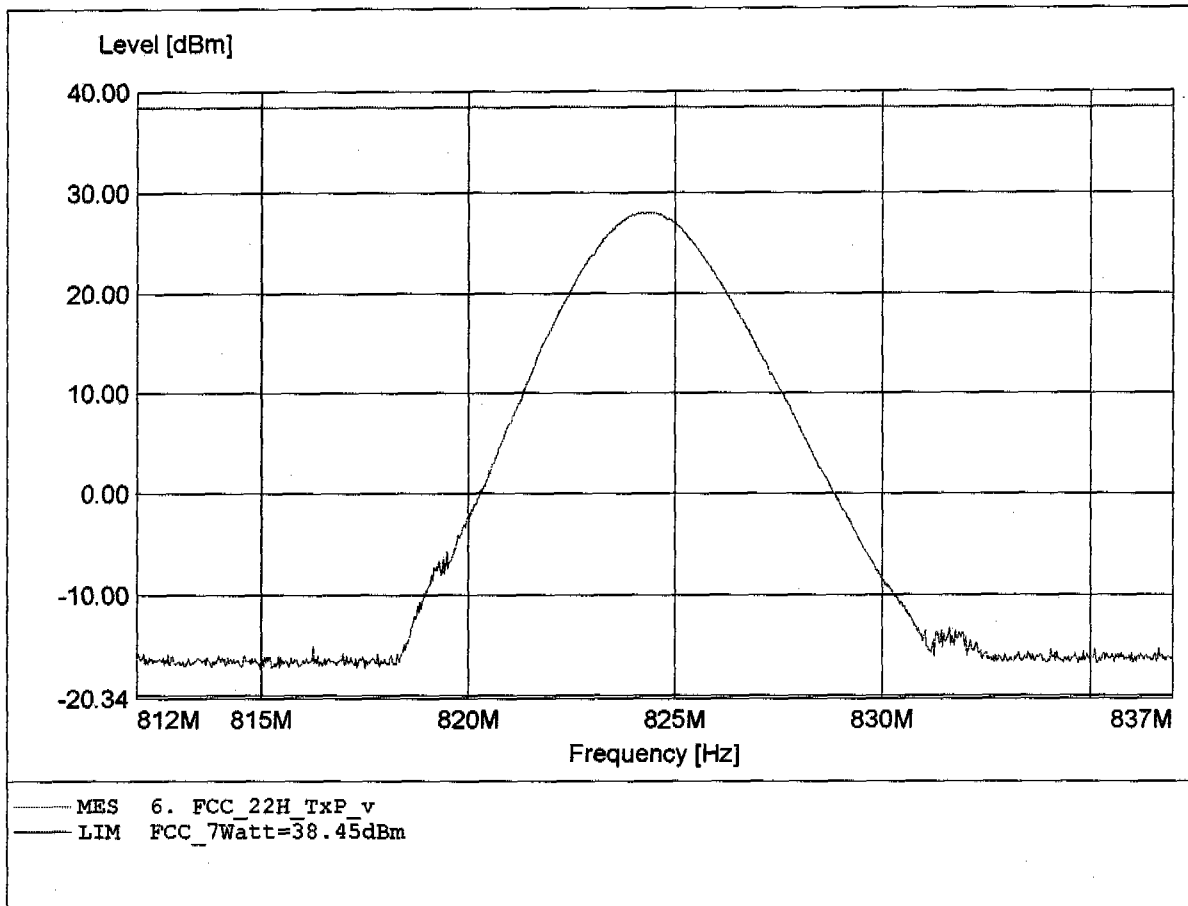

**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 824.333MHz, Pmax: 23.40dBm, RBW: 3MHz

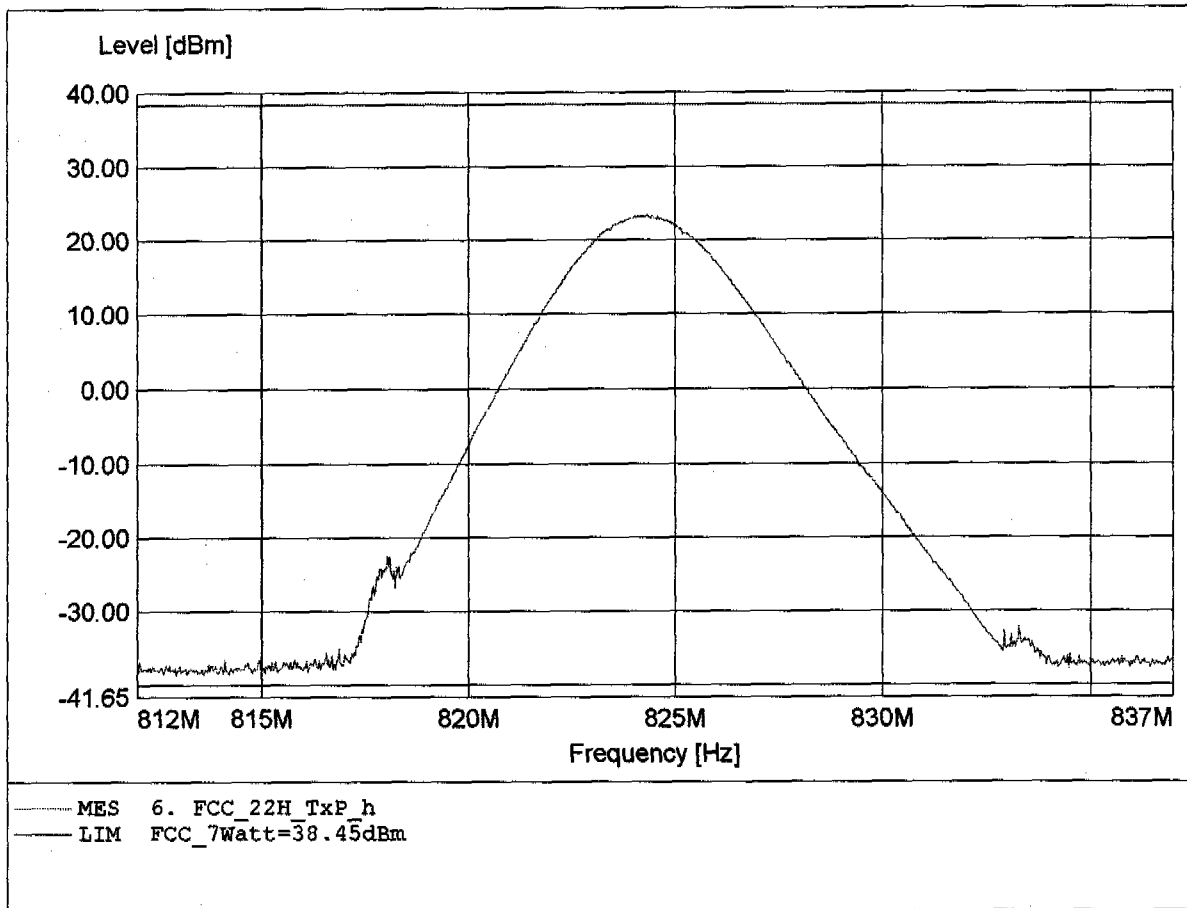




**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 836.427MHz, Pmax: 28.07dBm, RBW: 3MHz

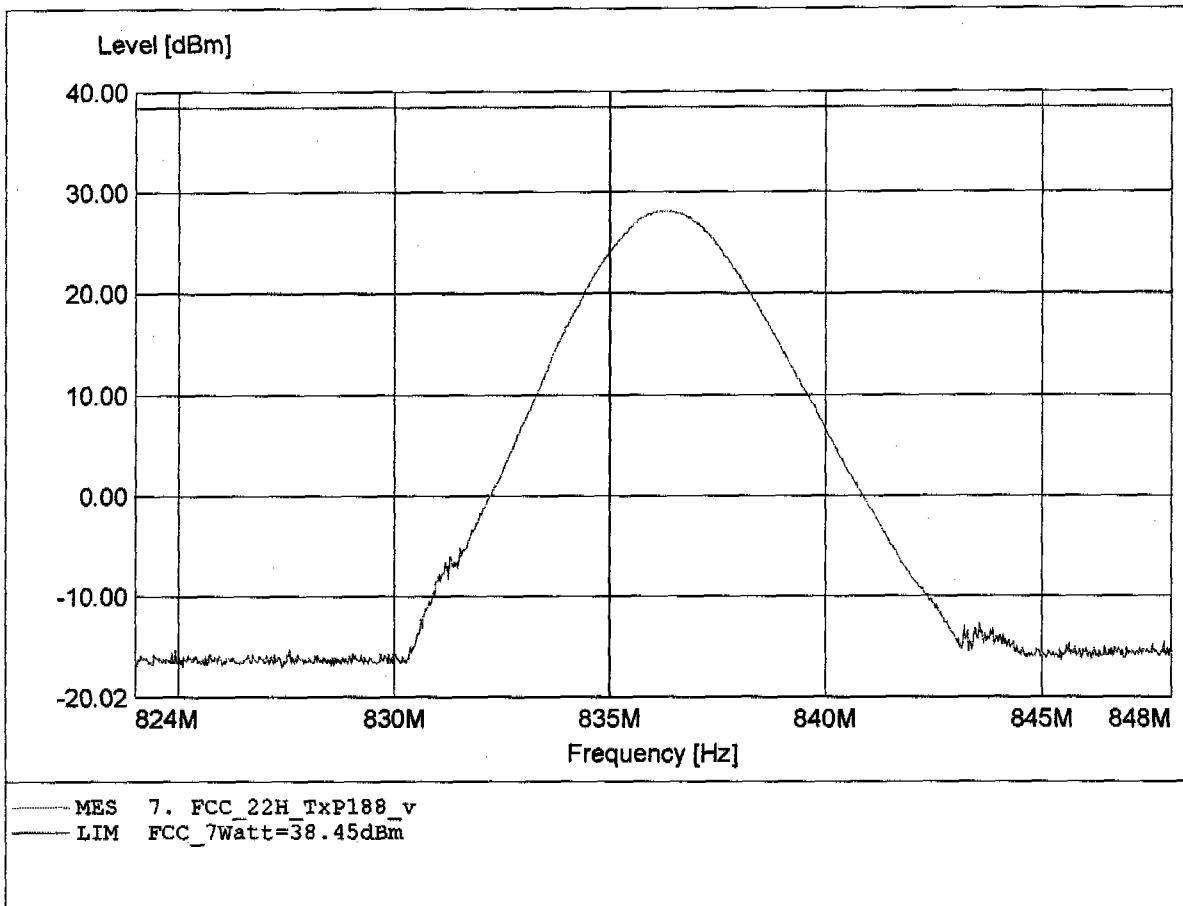


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 836.347MHz, Pmax: 23.57dBm, RBW: 3MHz

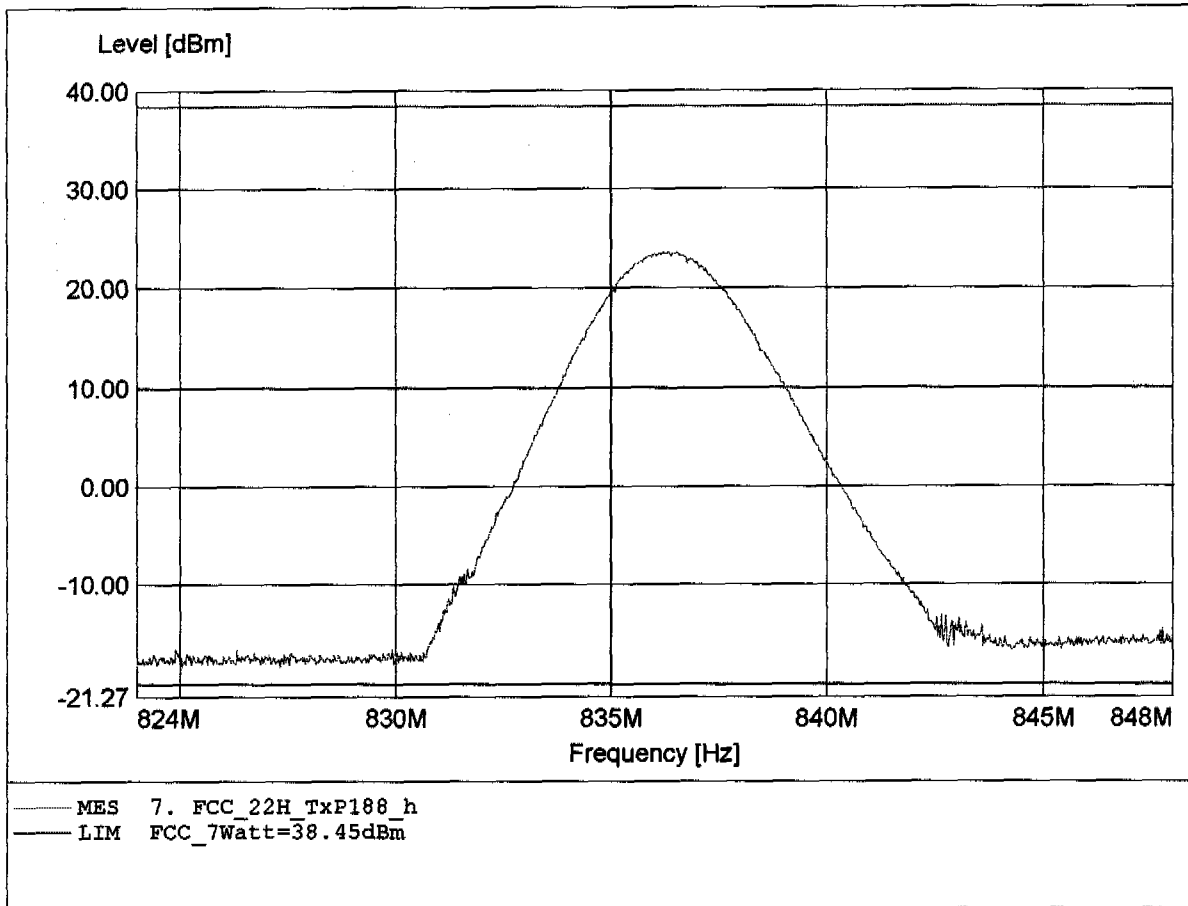


**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 848.813MHz, Pmax: 28.41dBm, RBW: 3MHz

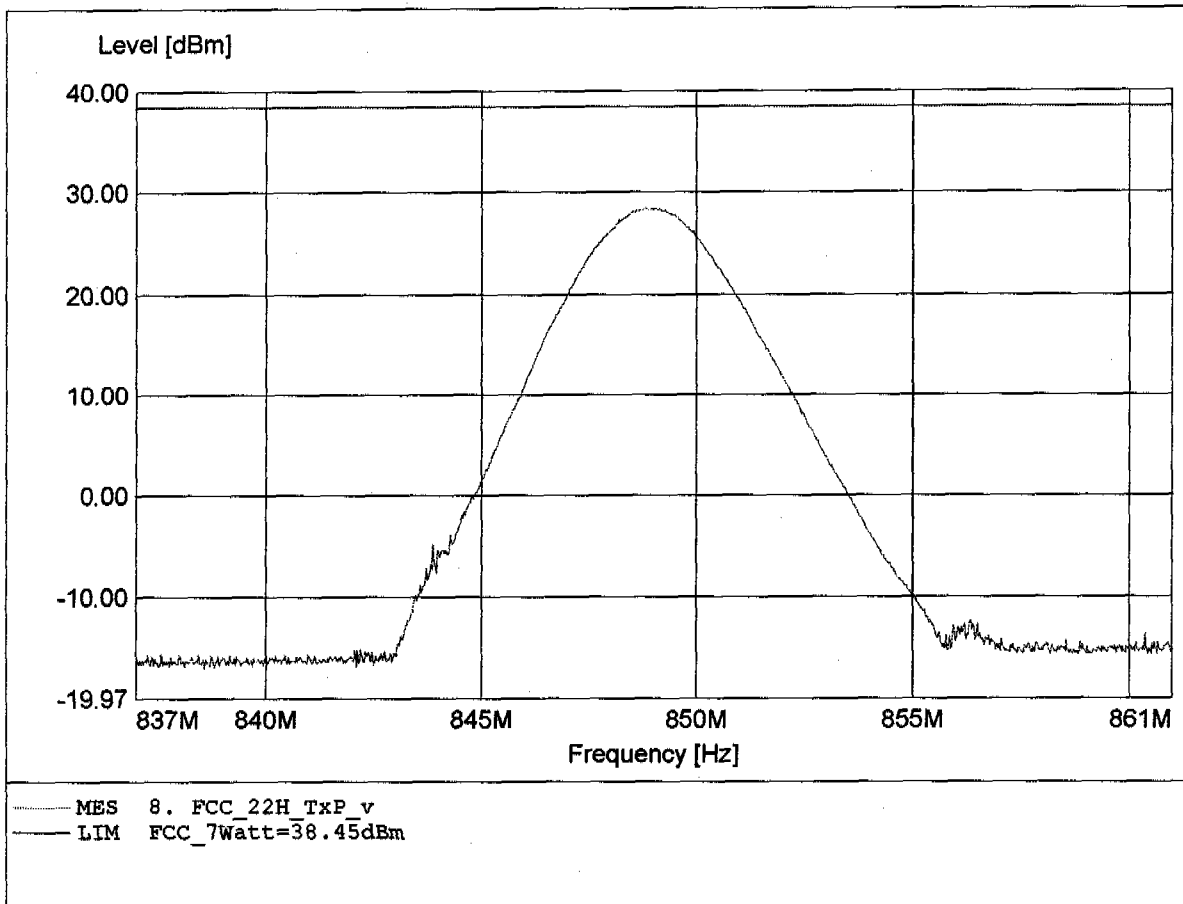

**Effective Radiated Power  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.913  
Comment 1: Dist.: 3m, Ant.: HL223  
Comment 2: Freq: 849.027MHz, Pmax: 24.71dBm, RBW: 3MHz

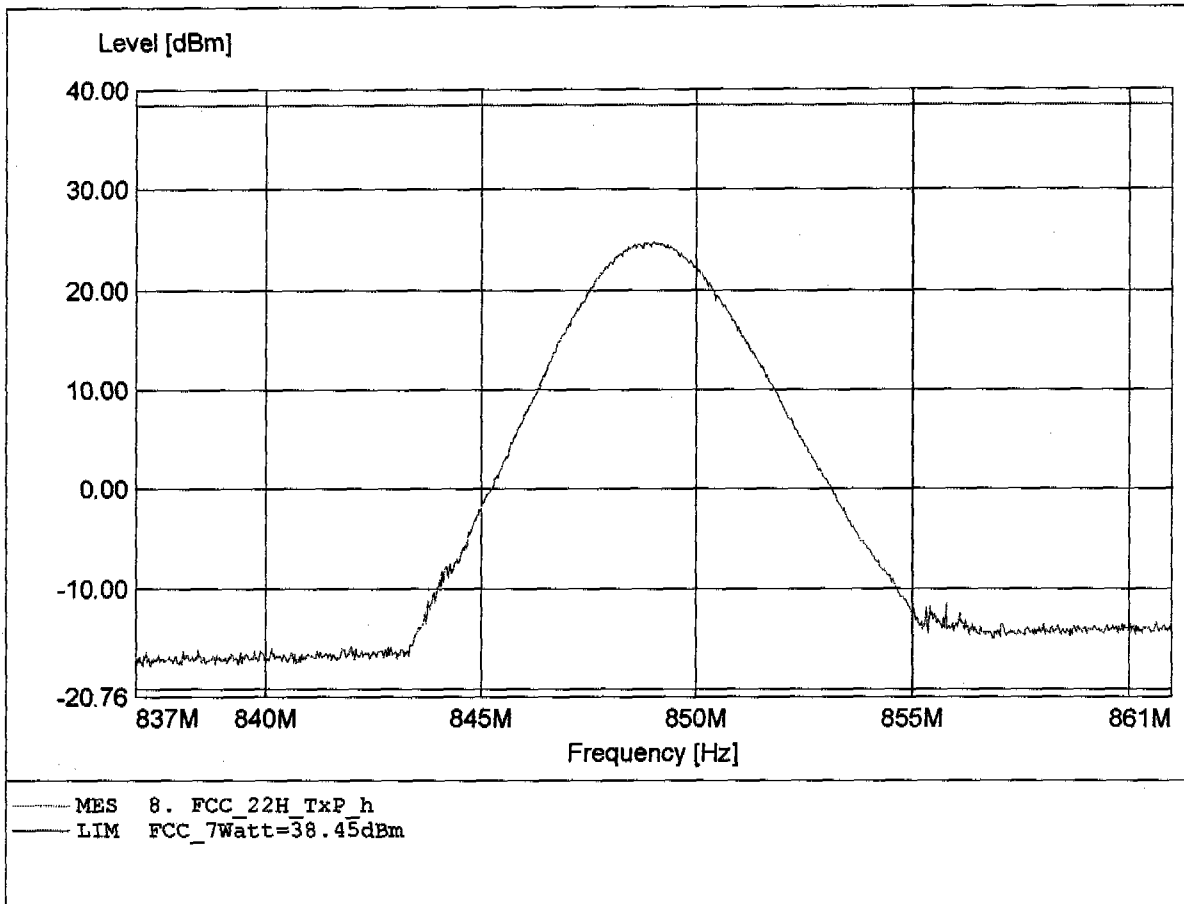



## Appendix D

### Modulation Requirements



## Appendix E

### Audio Filter Characteristics



## Appendix F

Emission Limitation




## Appendix G

Occupied Bandwidth






Marker 1 [T1]      RBW    3 kHz    RF Att    50 dB  
Ref Lvl            21.15 dBm    VBW    3 kHz  
36 dBm            1.85018697 GHz    SWT    280 ms    Unit        dBm

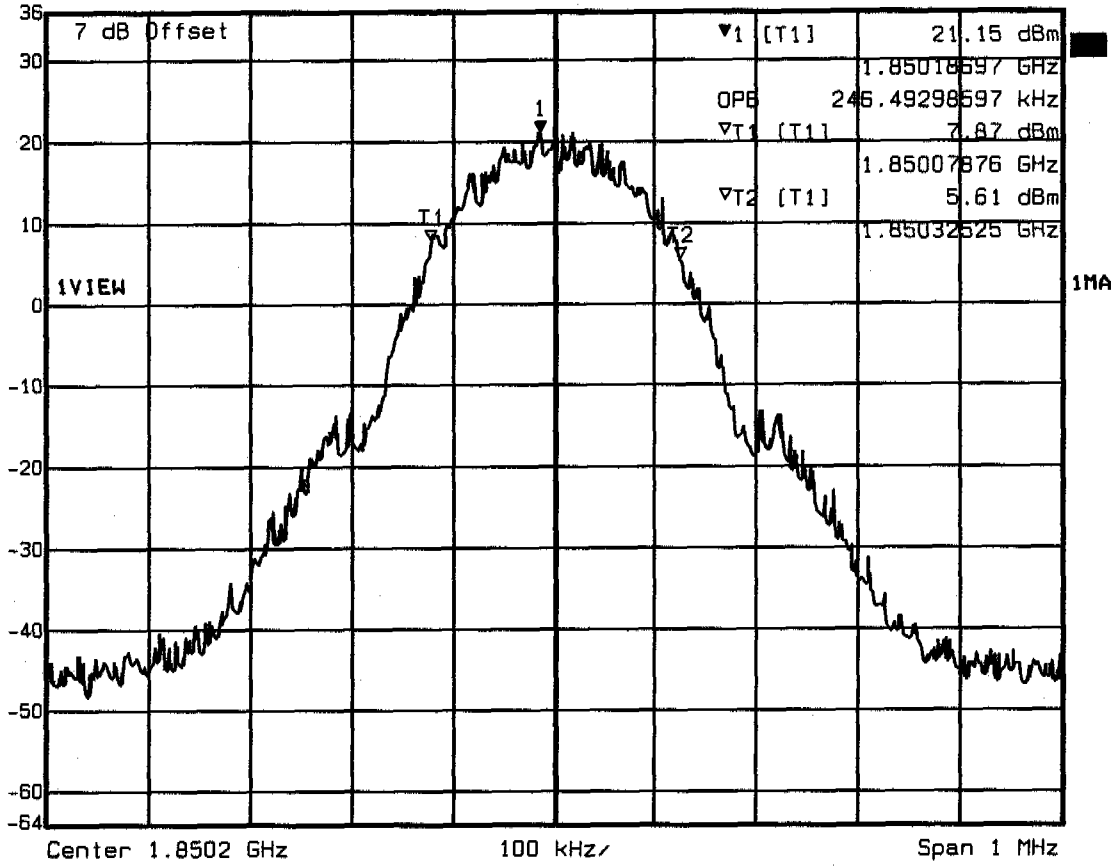

Title:    Occupied Bandwidth / Channel 512  
Comment A: Triple Band / GF260  
Date:    19.AUG.2004 08:59:41



Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 21.10 dBm VBW 3 kHz  
36 dBm 1.87998297 GHz SWT 280 ms Unit dBm

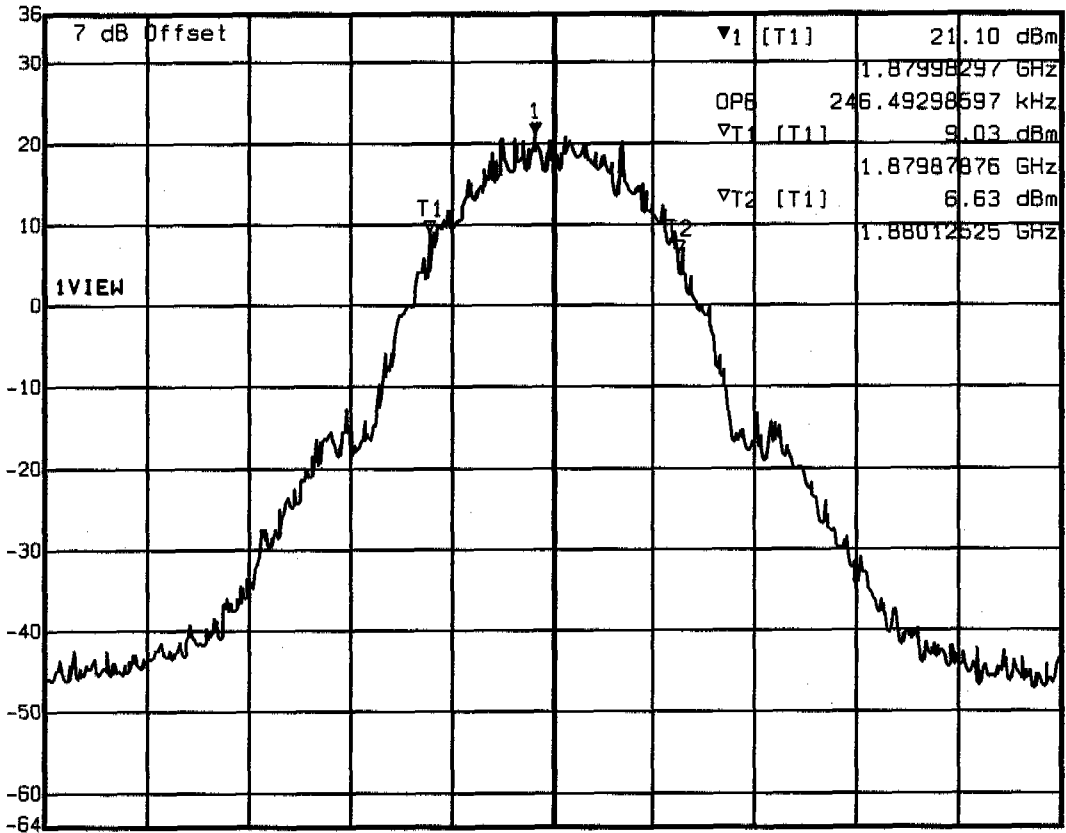


Center 1.88 GHz 100 kHz/ Span 1 MHz

Title: Occupied Bandwidth / Channel 661  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 09:01:52




Marker 1 [T1]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            20.32 dBm    VBW    3 kHz  
 36 dBm            1.90984709 GHz    SWT    280 ms    Unit            dBm

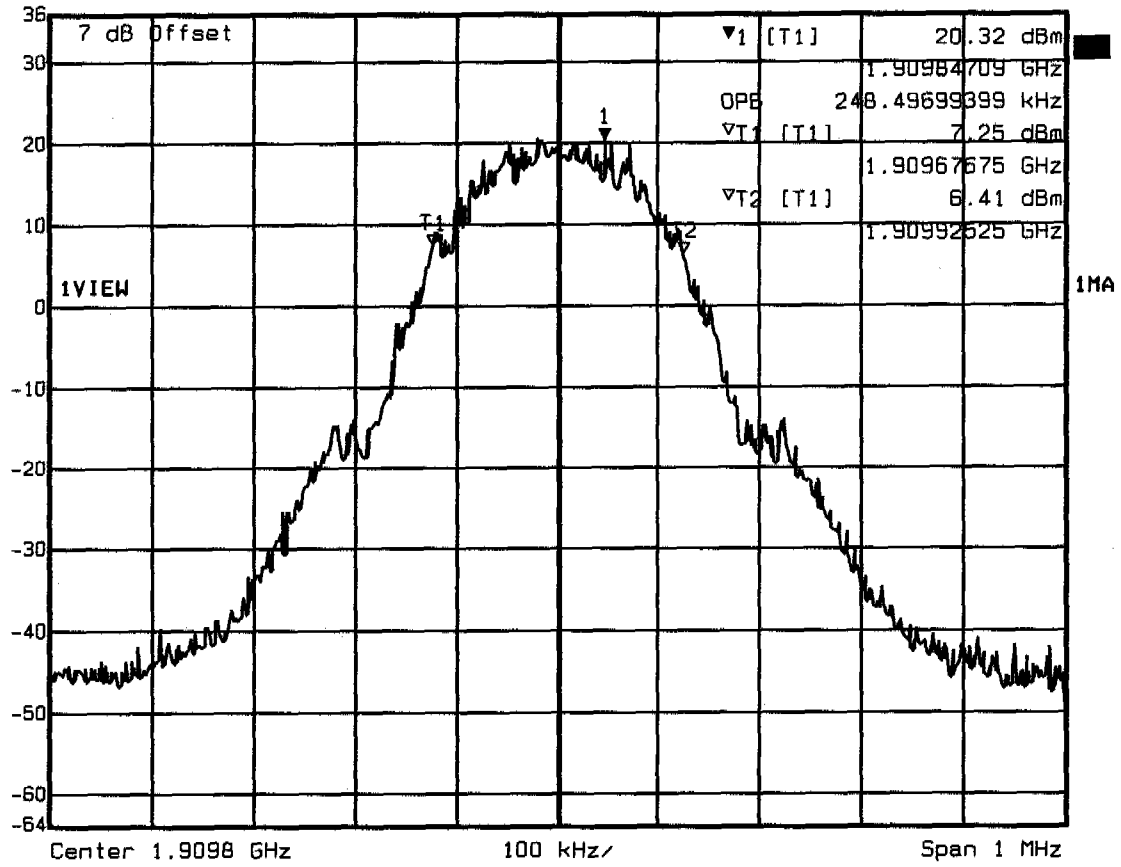

Title:    Occupied Bandwidth / Channel 810  
 Comment A: Triple Band / GF260  
 Date:    19.AUG.2004 09:03:35



Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB  
Ref Lvl ndB 26.00 dB VBW 3 kHz  
36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

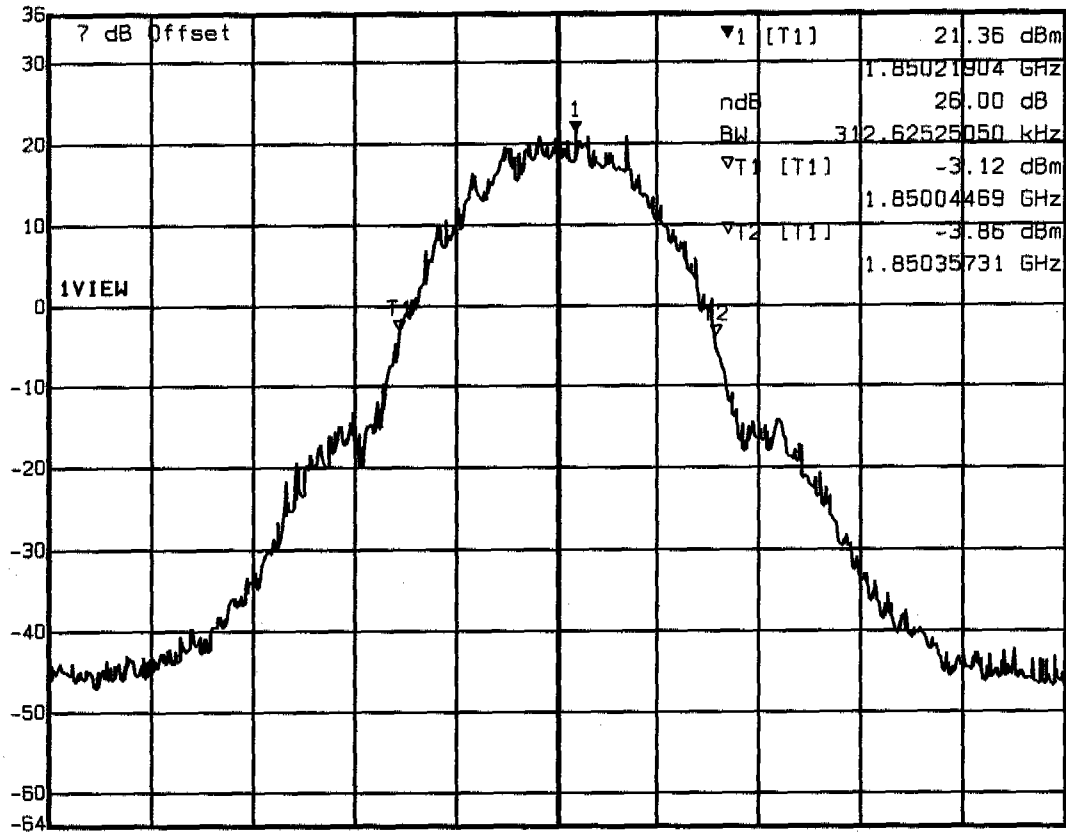


Center 1.8502 GHz 100 kHz/ Span 1 MHz

Title: Emission Bandwidth (-26 db) / Channel 512  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 09:07:21




Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            ndB        26.00 dB    VBW    3 kHz  
 36 dBm            BW    314.62925852 kHz    SWT    280 ms    Unit        dBm

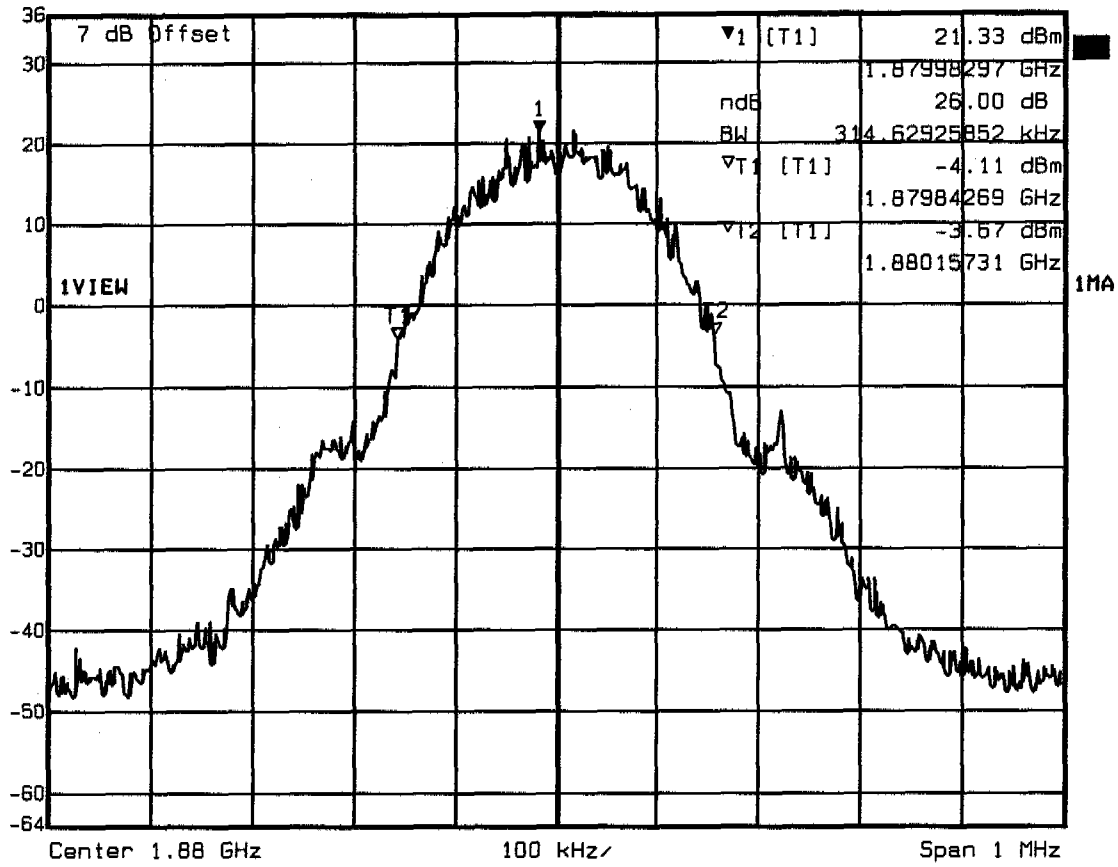

Title:      Emission Bandwidth (-26 db) / Channel 661  
 Comment A: Triple Band / GF260  
 Date:      19.AUG.2004 09:08:44




Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl    ndB        26.00 dB    VBW    3 kHz  
 36 dBm      BW   316.63326653 kHz    SWT    280 ms    Unit        dBm

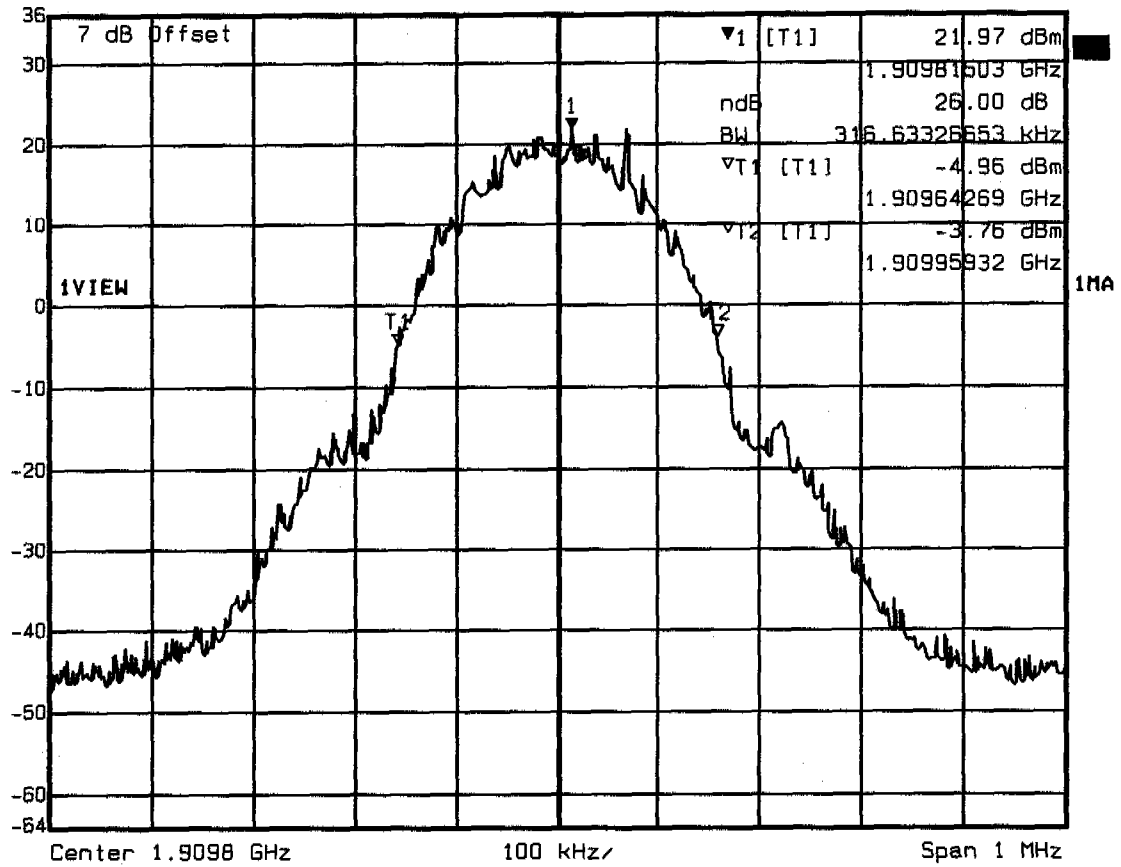

Title:    Emission Bandwidth (-26 db) / Channel 810  
 Comment A: Triple Band / GF260  
 Date:    19.AUG.2004 09:11:40




Marker 1 [T1]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            25.62 dBm    VBW    3 kHz  
 36 dBm            824.21703407 MHz    SWT    280 ms    Unit        dBm

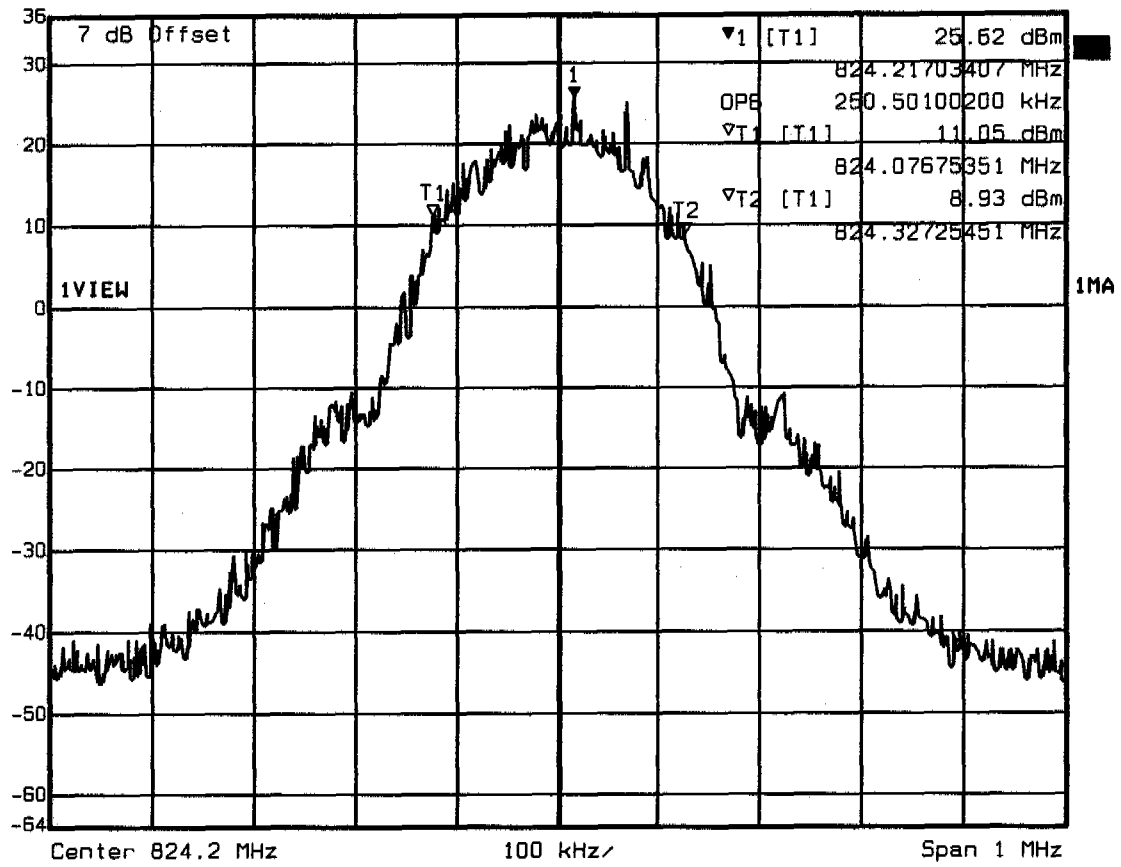

Title:    Occupied Bandwidth / Channel 128  
 Comment A: Triple Band / GF260  
 Date:    19.AUG.2004 09:37:50



Marker 1 [T1] RBW 3 kHz RF Att 50 dB  
Ref Lvl 25.24 dBm VBW 3 kHz  
36 dBm 836.22104208 MHz SWT 280 ms Unit dBm

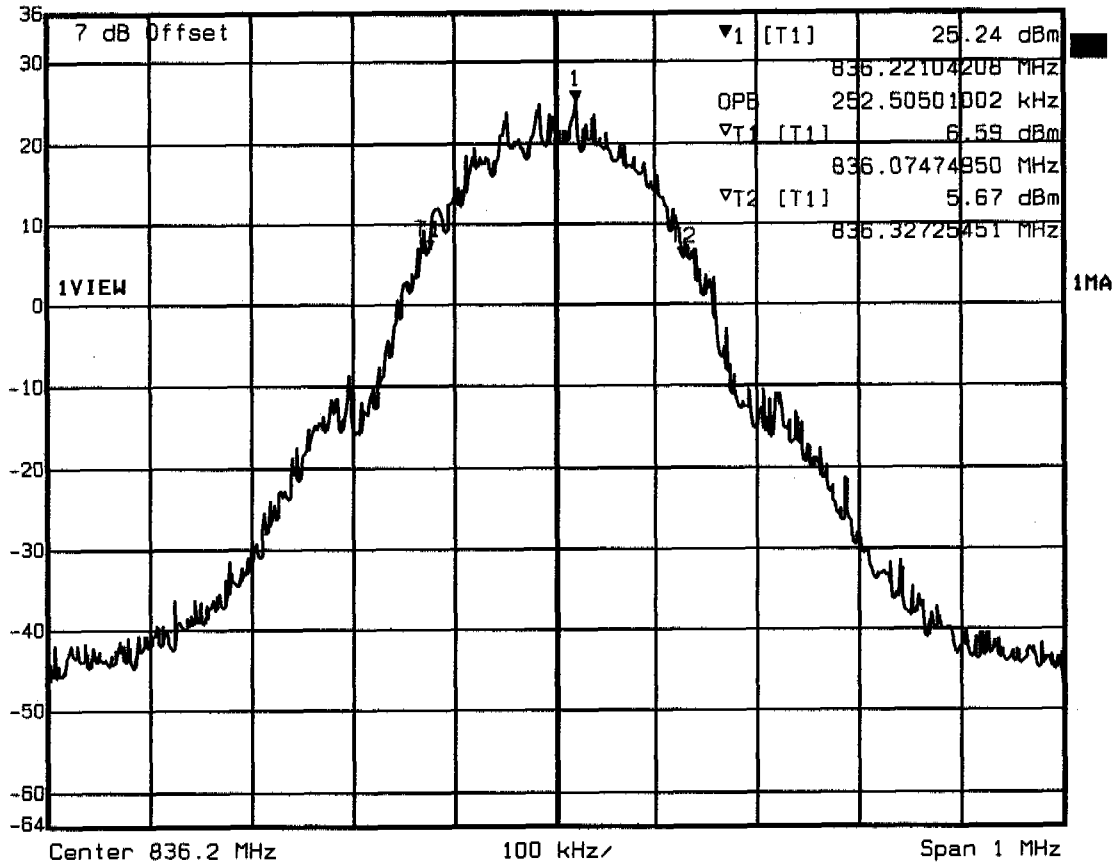


Title: Occupied Bandwidth / Channel 188  
Comment A: Triple Band / GF260  
Date: 19.AUG.2004 09:39:14






Marker 1 [T1]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            24.49 dBm    VBW    3 kHz  
 36 dBm            848.81703407 MHz    SWT    280 ms    Unit        dBm

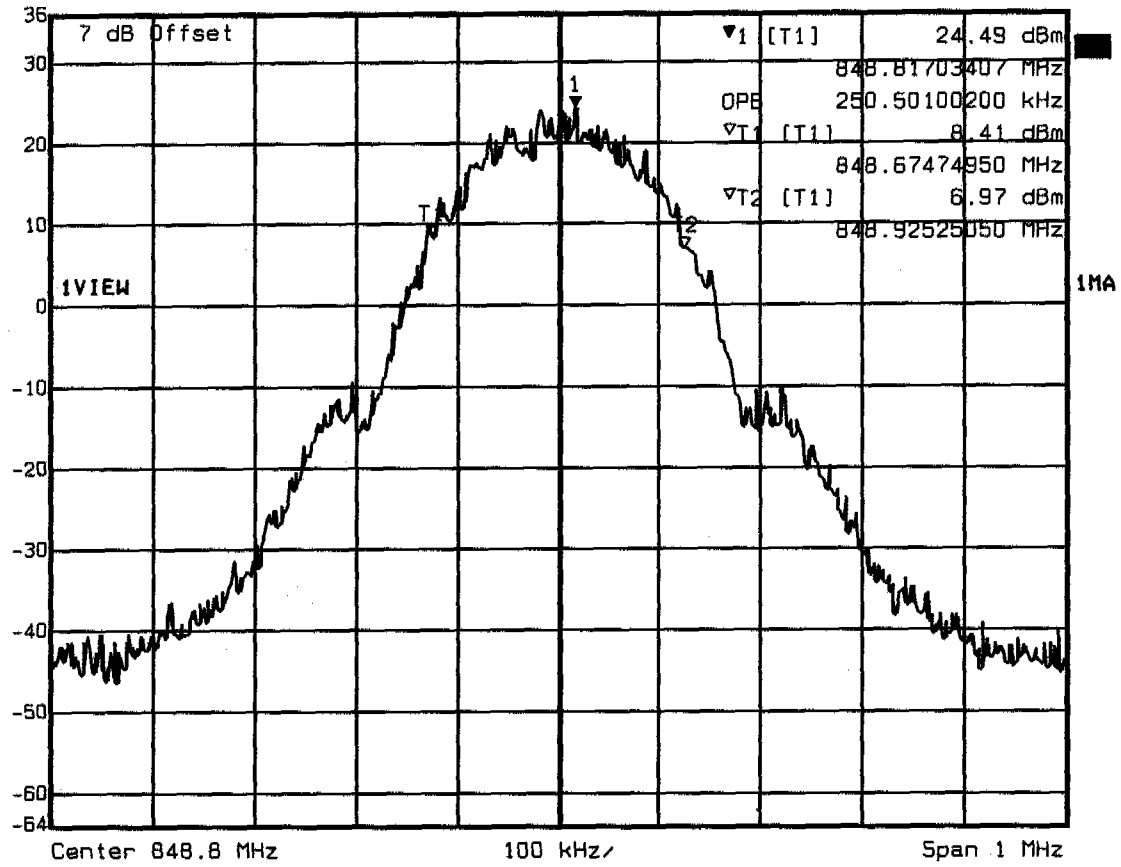

Title:      Occupied Bandwidth / Channel 251  
 Comment A: Triple Band / GF260  
 Date:      19.AUG.2004 09:40:34




Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            ndB        25.00 dB    VBW    3 kHz  
 36 dBm            BW    316.63326653 kHz    SWT    280 ms    Unit        dBm

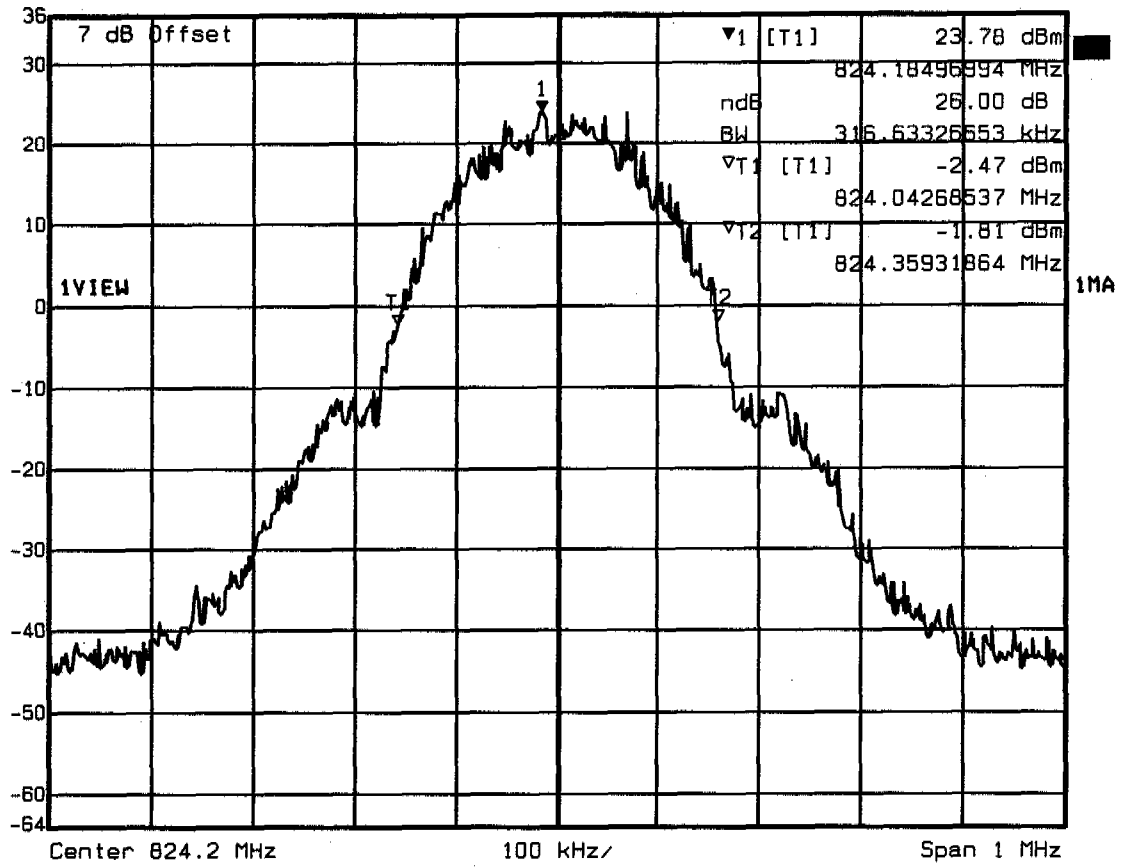

Title:      Emission Bandwidth (-26 db) / Channel 128  
 Comment A: Triple Band / GF260  
 Date:      19.AUG.2004 09:43:55




Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl            ndB        26.00 dB    VBW    3 kHz  
 36 dBm            BW    312.62525050 kHz    SWT    280 ms    Unit        dBm

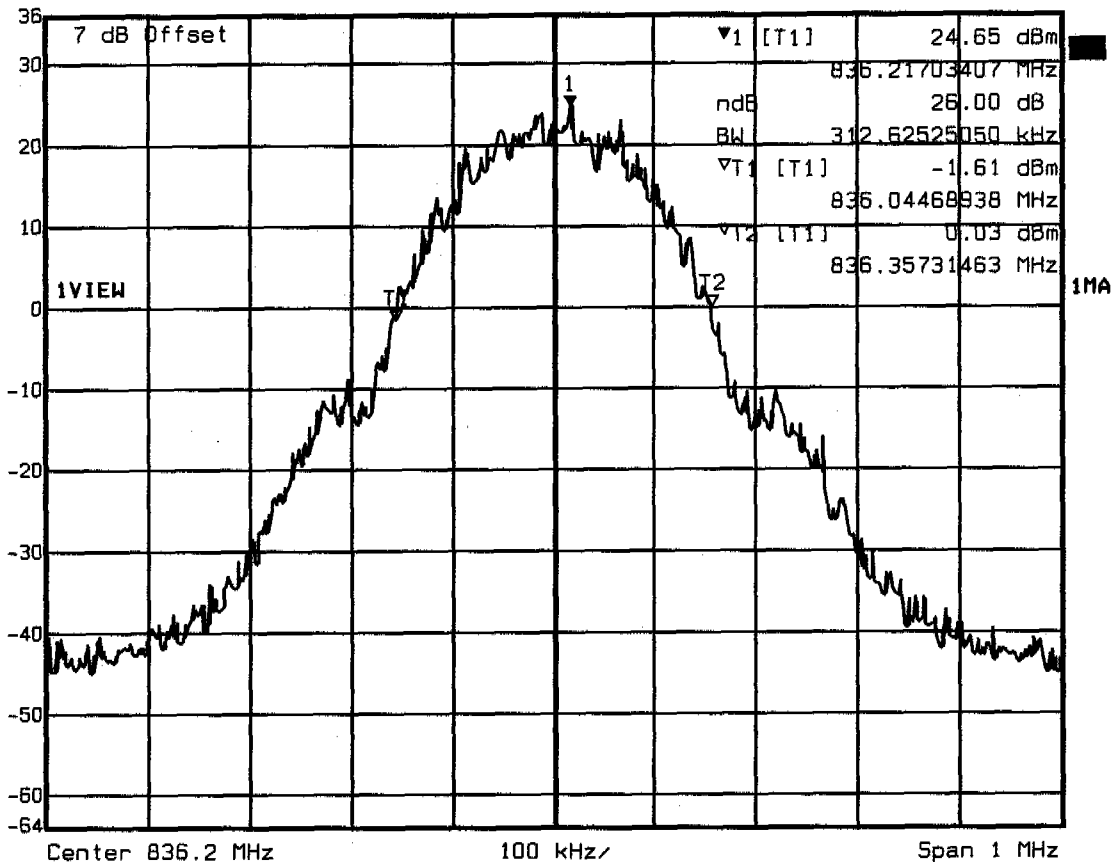

Title:      Emission Bandwidth (-26 db) / Channel 188  
 Comment A: Triple Band / GF260  
 Date:      19.AUG.2004 09:46:18



Marker 1 [T1 ndB]      RBW    3 kHz    RF Att    50 dB  
 Ref Lvl                ndB        26.00 dB    VBW    3 kHz  
 36 dBm                BW    314.62925852 kHz    SWT    280 ms    Unit        dBm

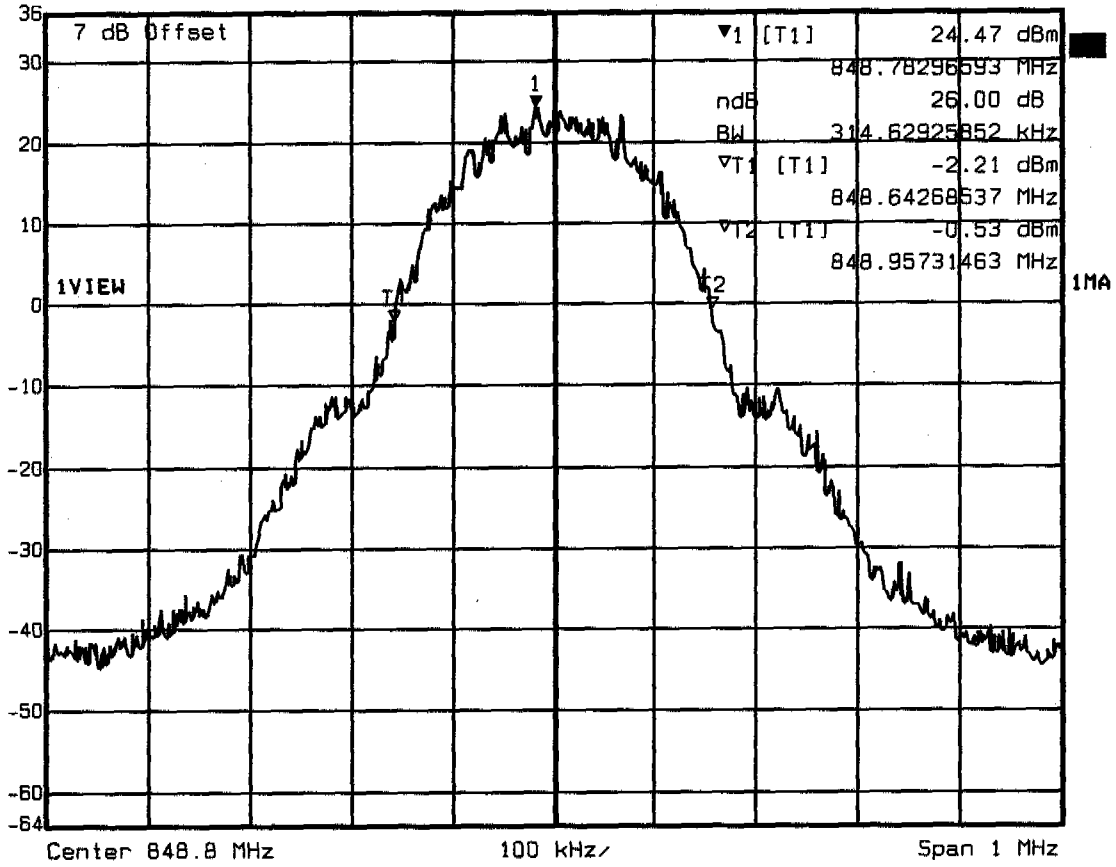

Title:      Emission Bandwidth (-26 db) / Channel 251  
 Comment A: Triple Band / GF260  
 Date:      19.AUG.2004 09:48:13



## Appendix H

Out of Band Emission at Antenna Terminals Mobile Emissions In Base Frequency Range




## Appendix I

Field Strength of Spurious Radiation


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 177.711MHz, Pmax: -53.05dBm, RBW: 1MHz

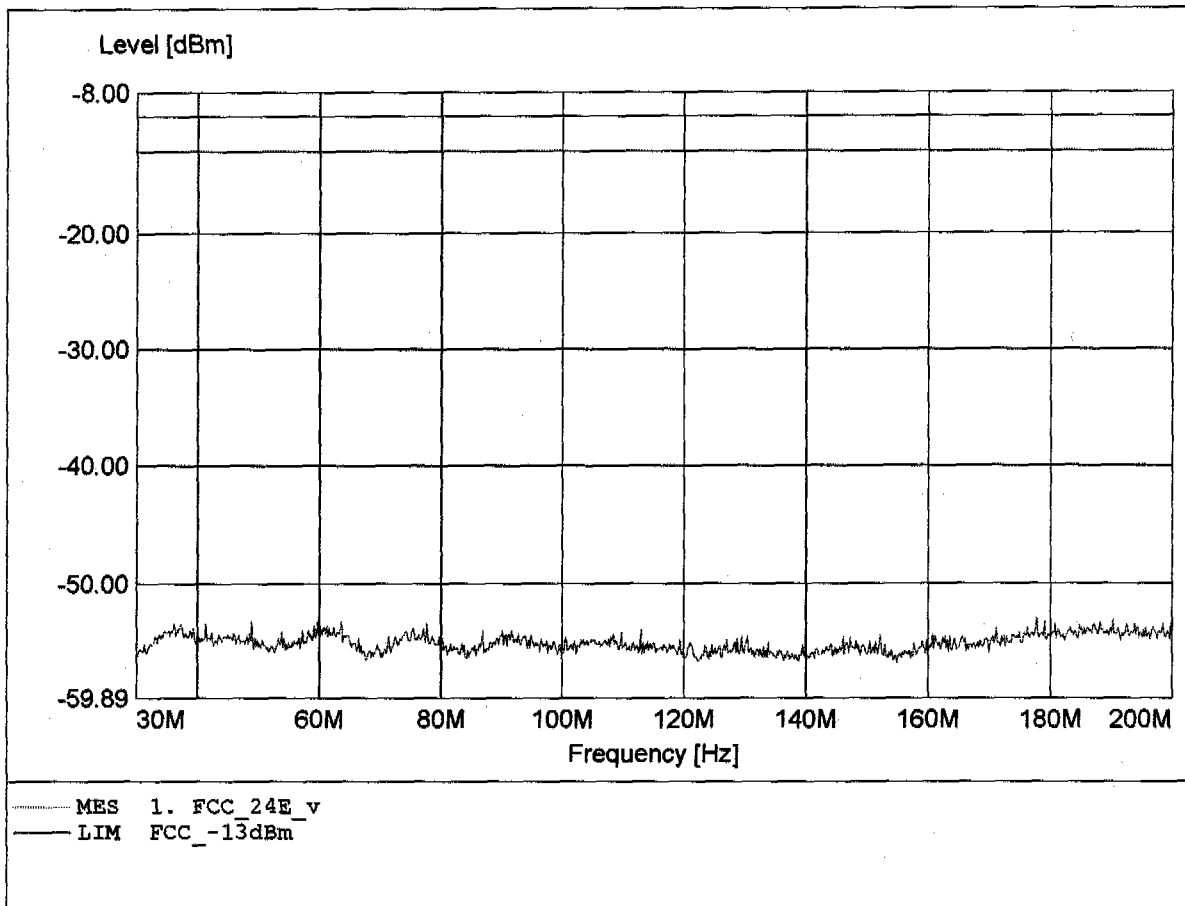

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 46.433MHz, Pmax: -52.36dBm, RBW: 1MHz

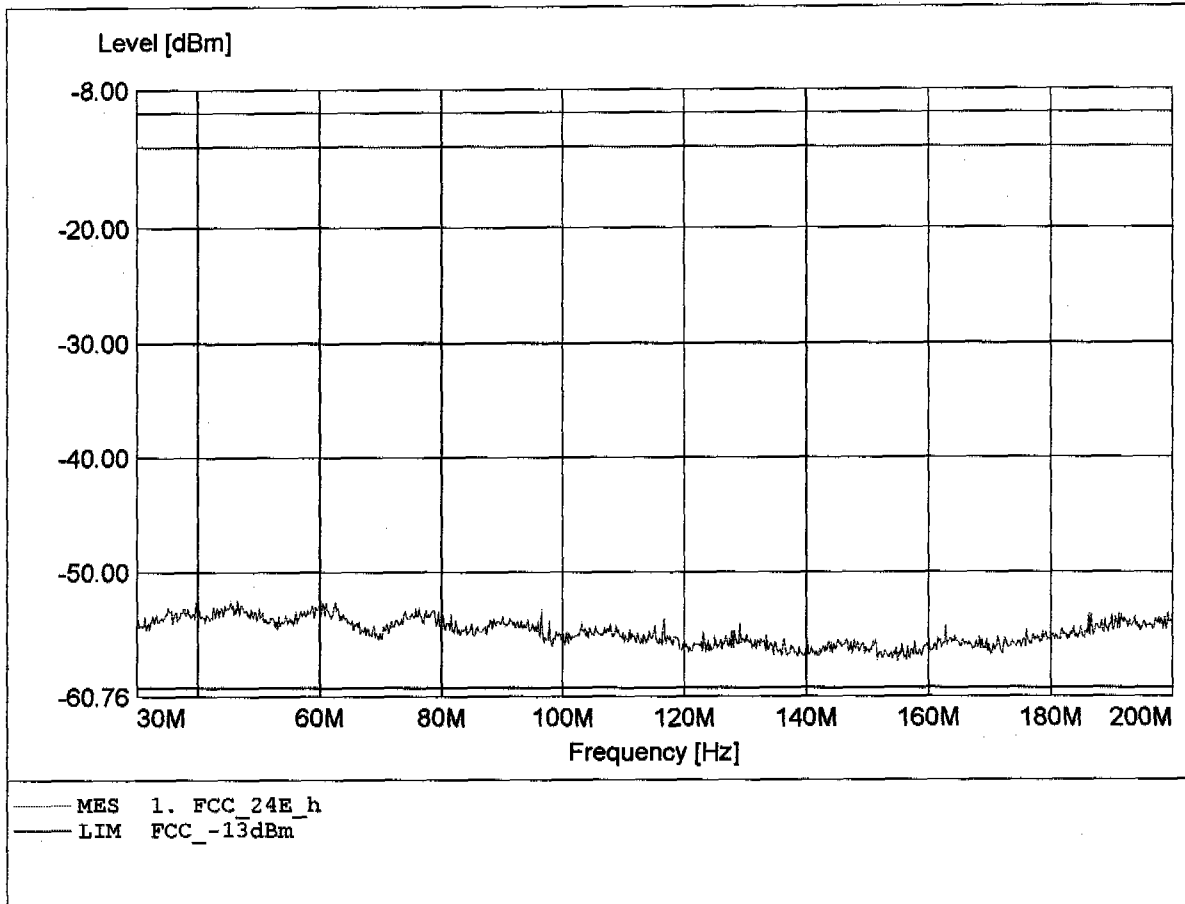




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 714.667MHz, Pmax: -40.37dBm, RBW: 1MHz

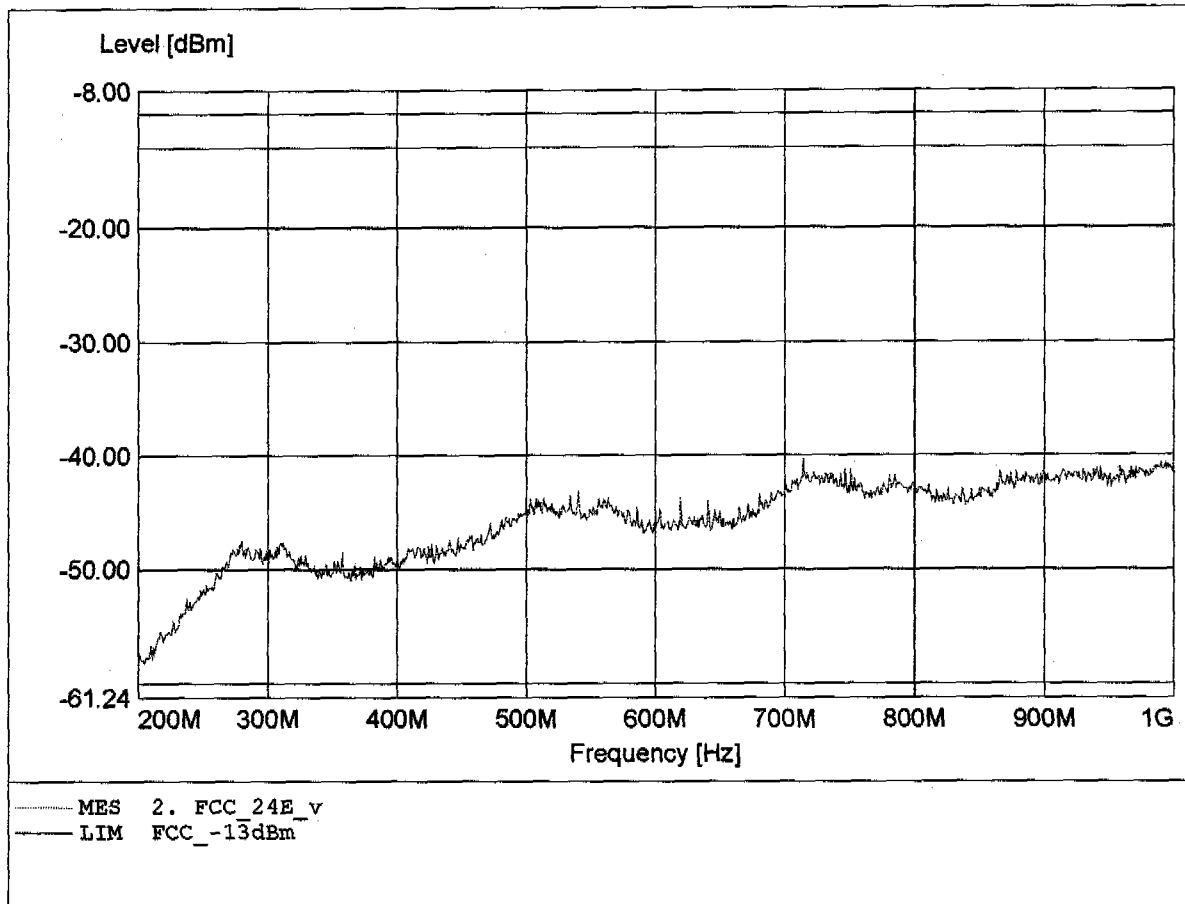


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 869.333MHz, Pmax: -39.02dBm, RBW: 1MHz

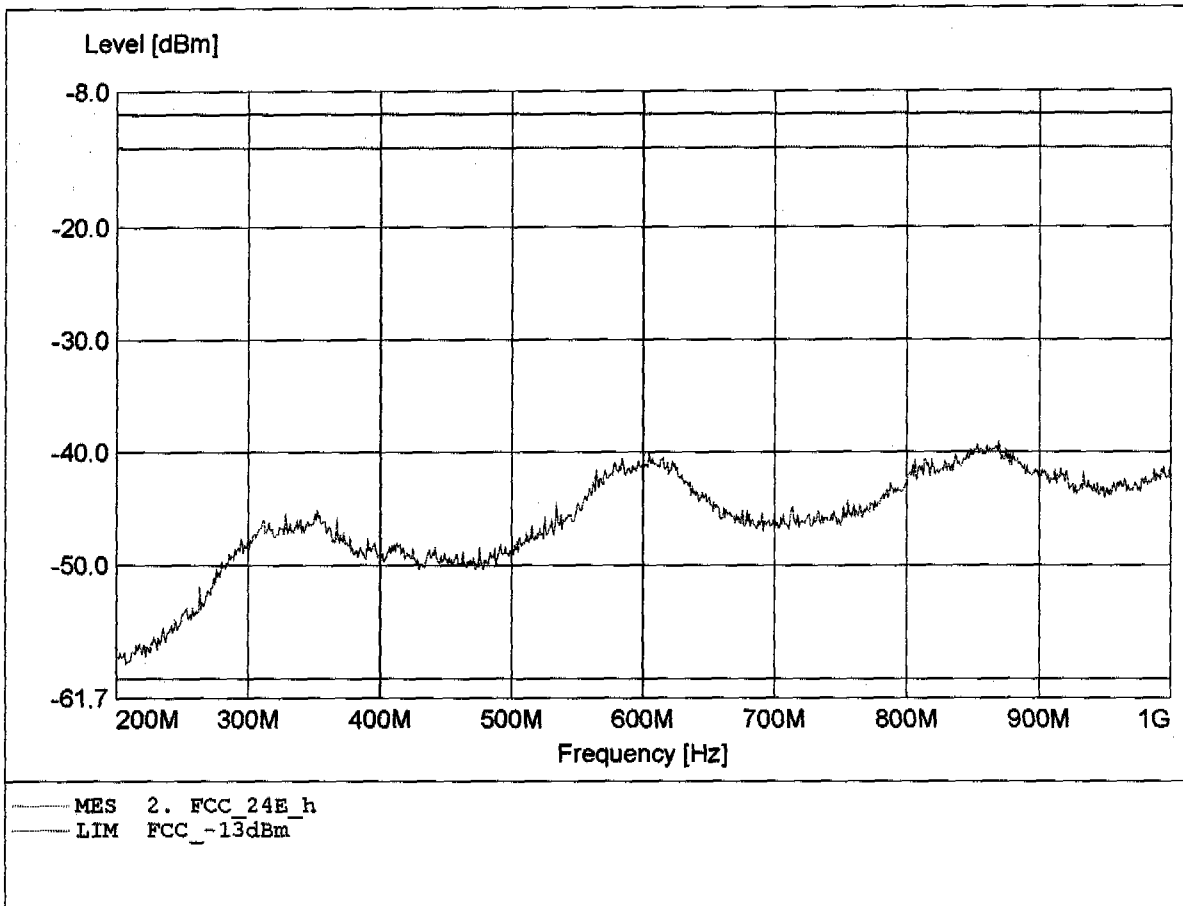


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.850GHz, Pmax: -18.72dBm, RBW: 1MHz/3kHz

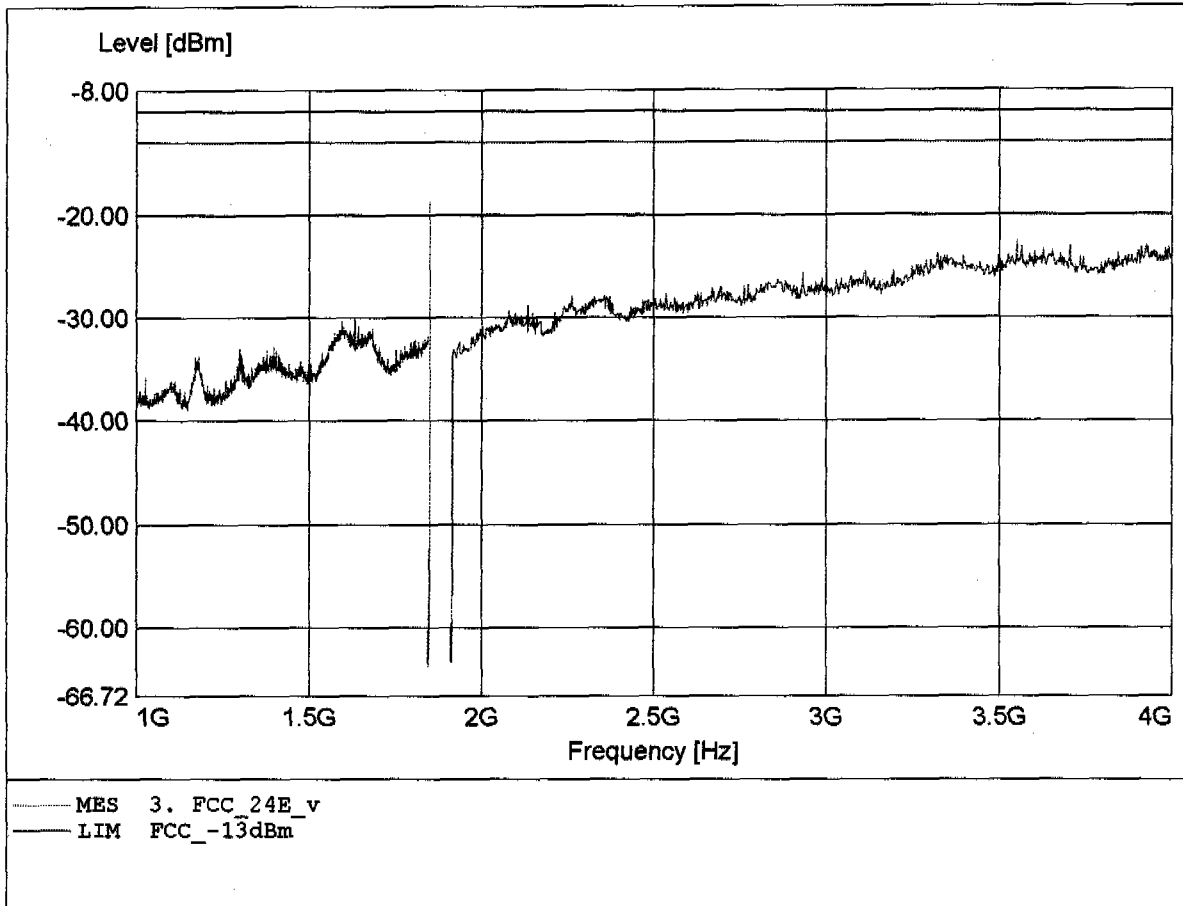


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.977GHz, Pmax: -22.57dBm, RBW: 1MHz/3kHz

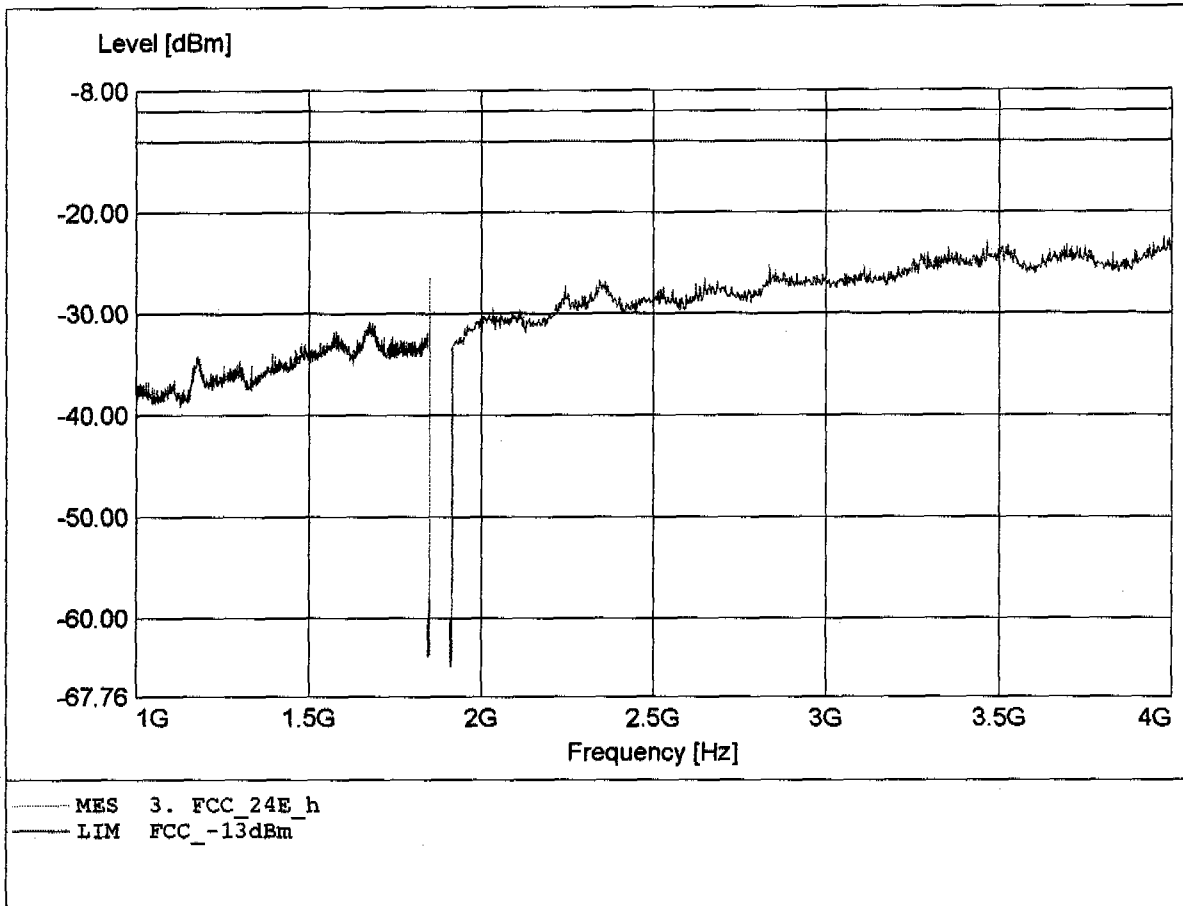


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.404GHz, Pmax: -31.55dBm, RBW: 1MHz

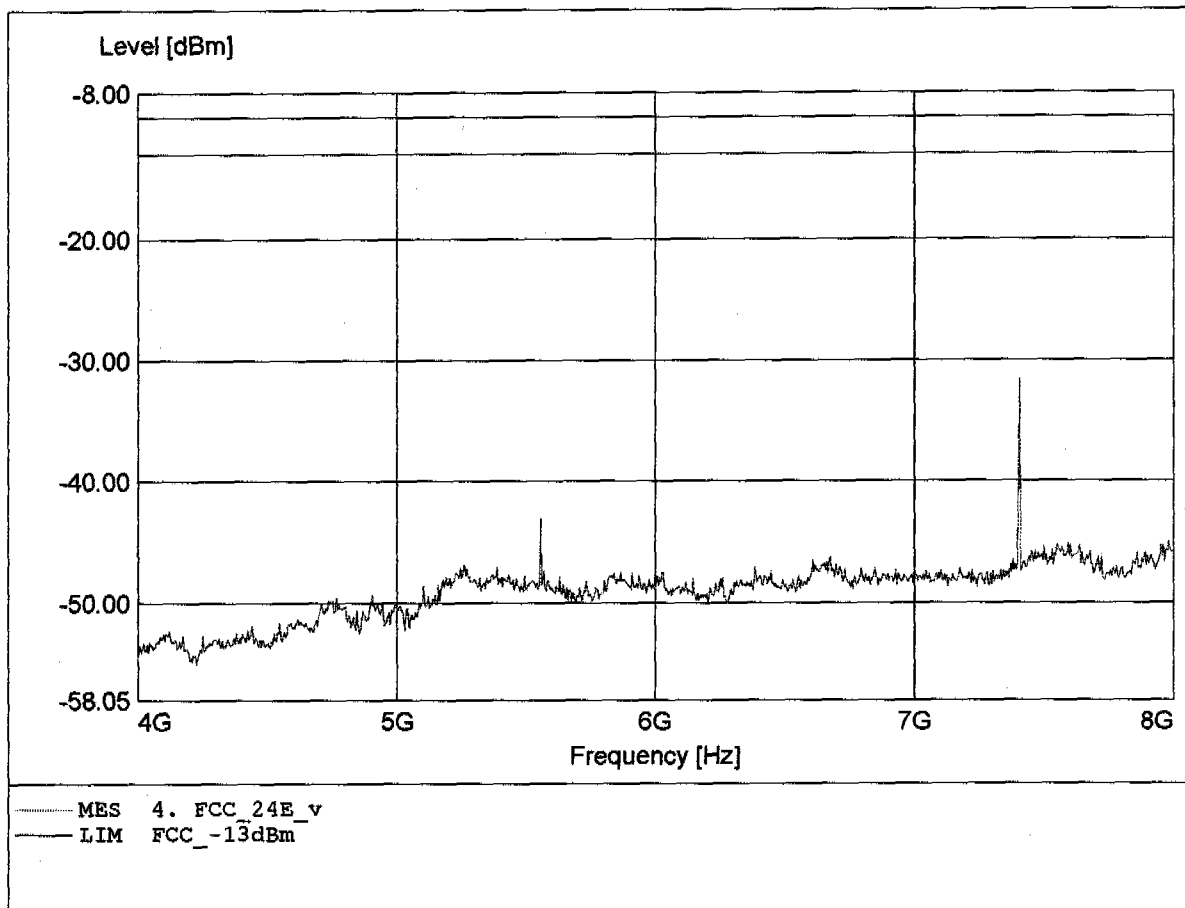


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.404GHz, Pmax: -31.50dBm, RBW: 1MHz

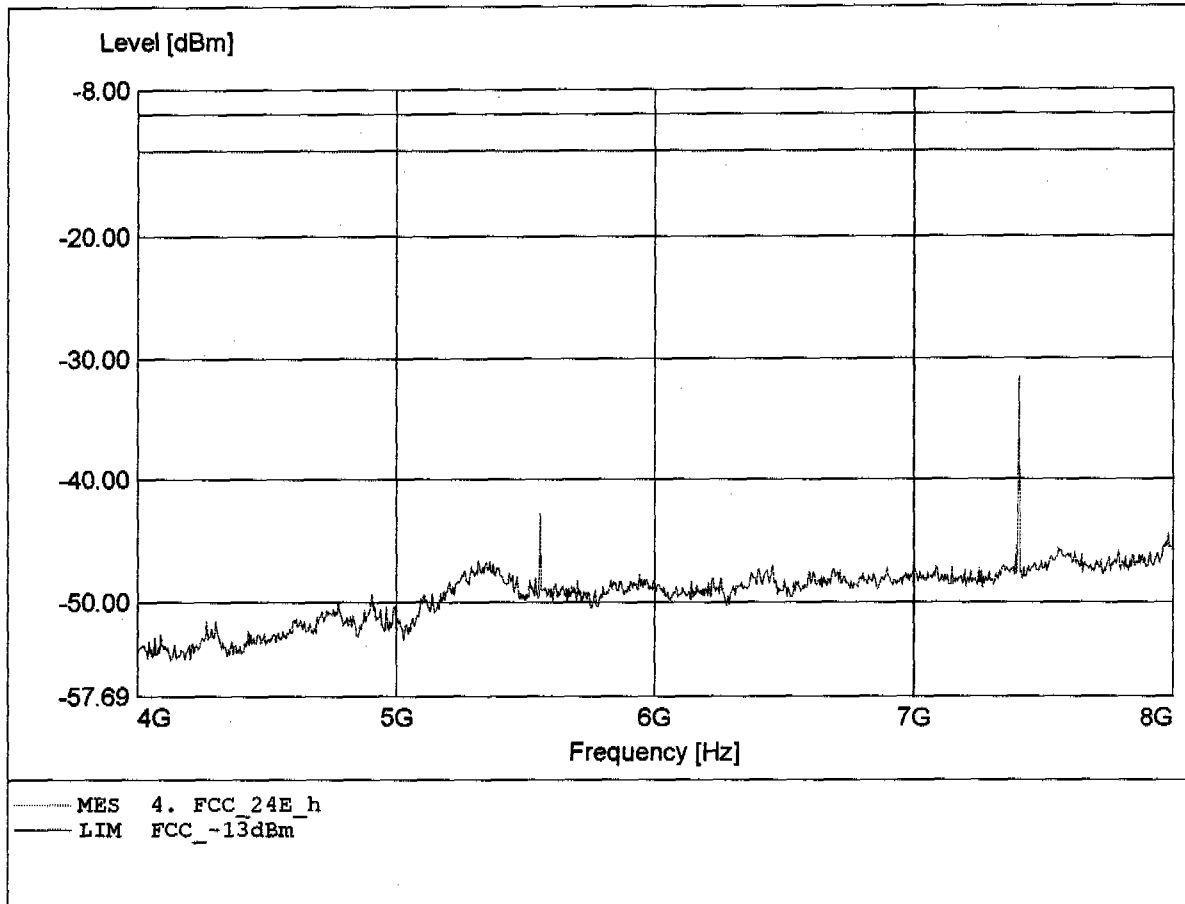


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.253GHz, Pmax: -35.22dBm, REW: 1MHz

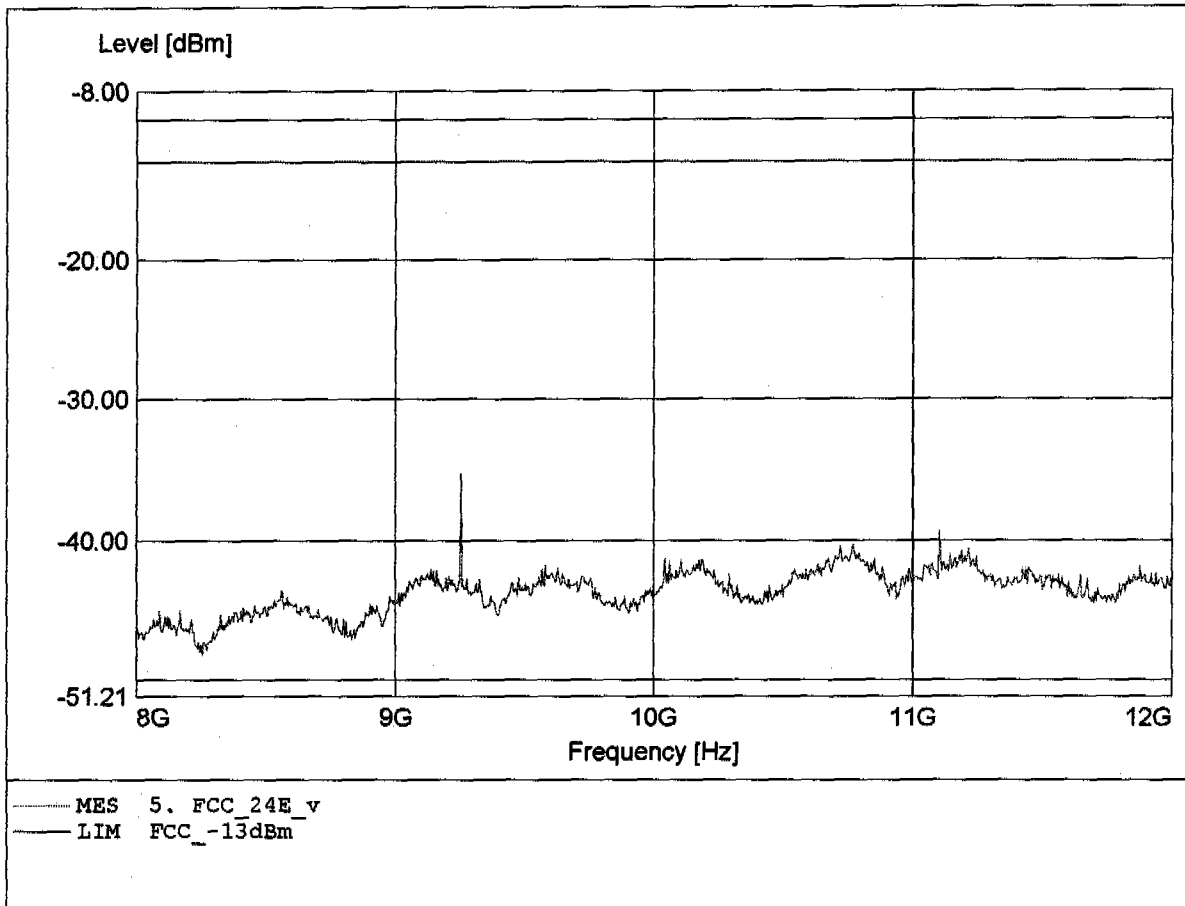

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.253GHz, Pmax: -33.02dBm, RBW: 1MHz

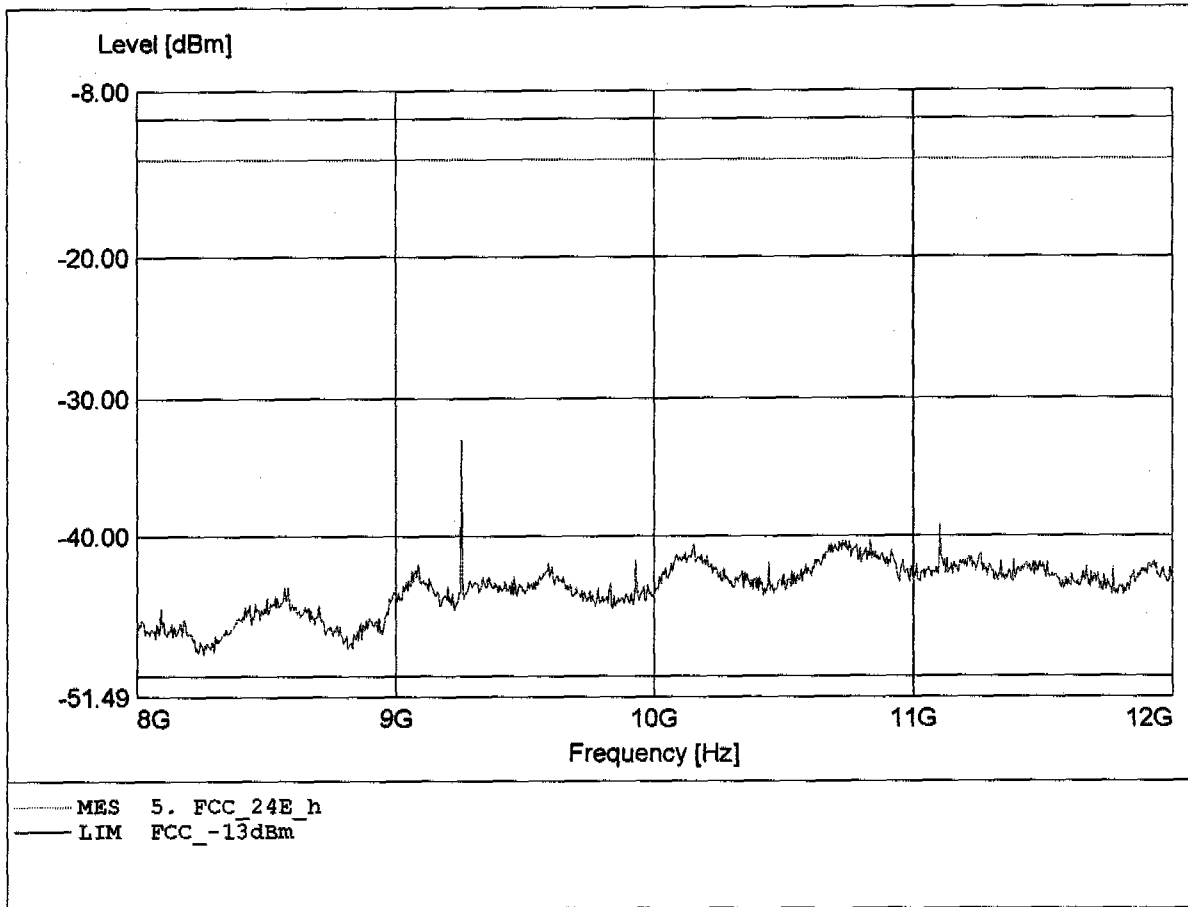




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.427GHz, Pmax: -31.40dBm, RBW: 1MHz

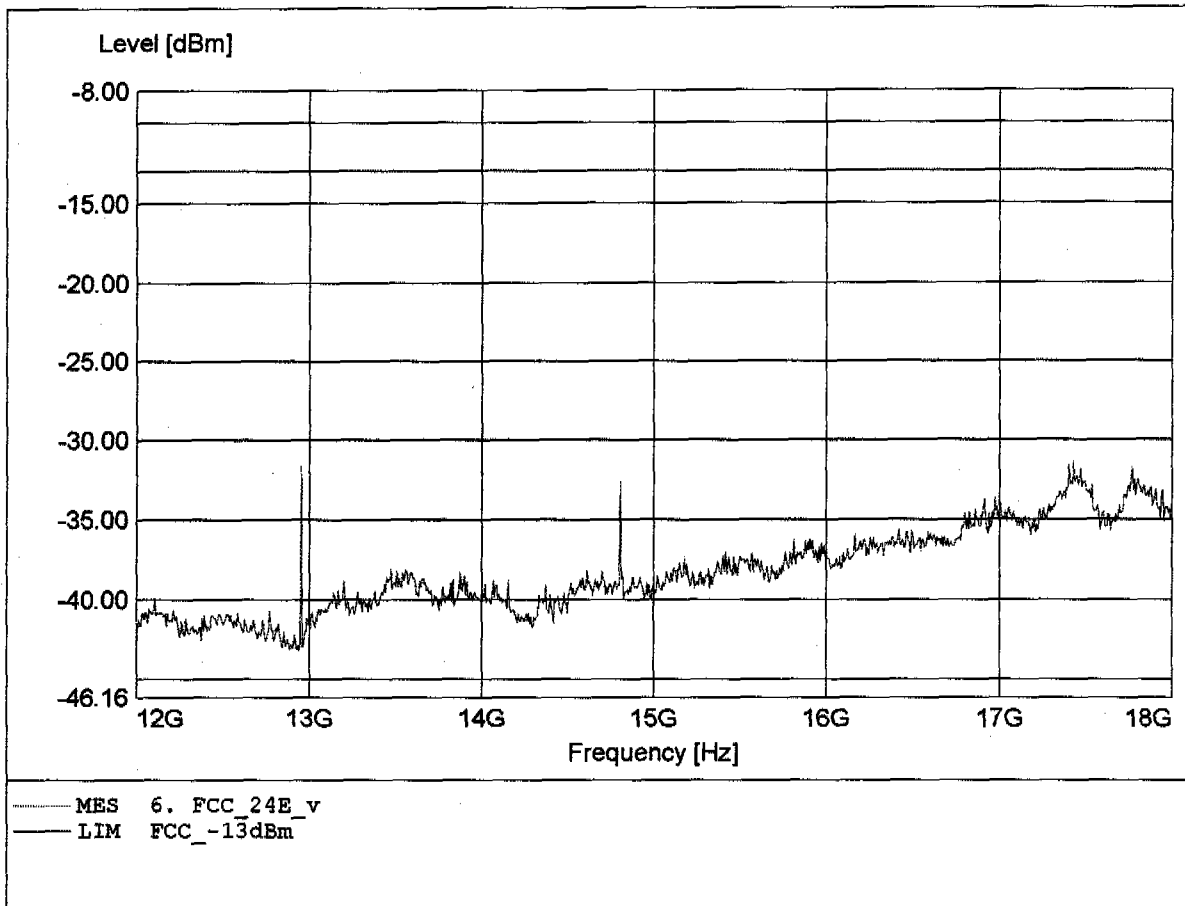


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 14.807GHz, Pmax: -26.07dBm, RBW: 1MHz

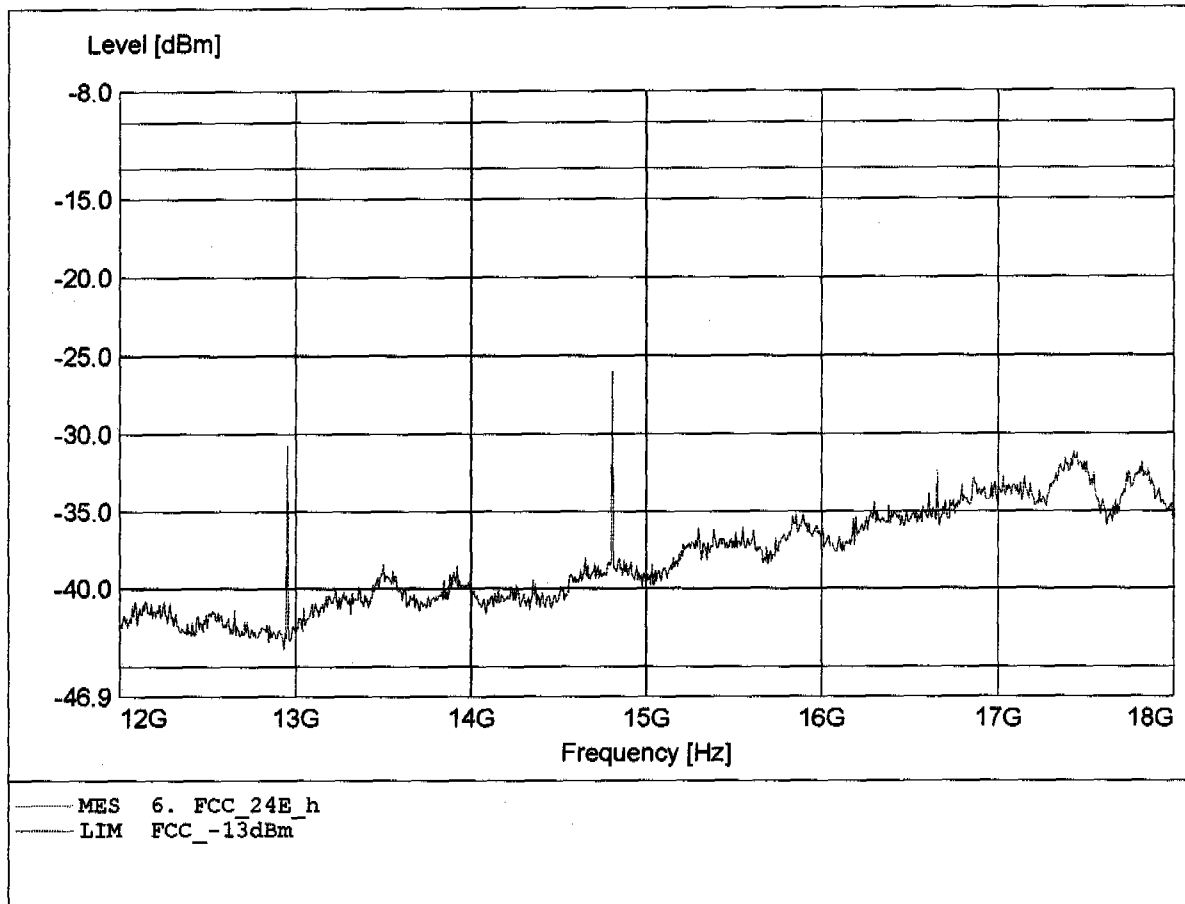


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.283GHz, Pmax: -25.36dBm, RBW: 1MHz

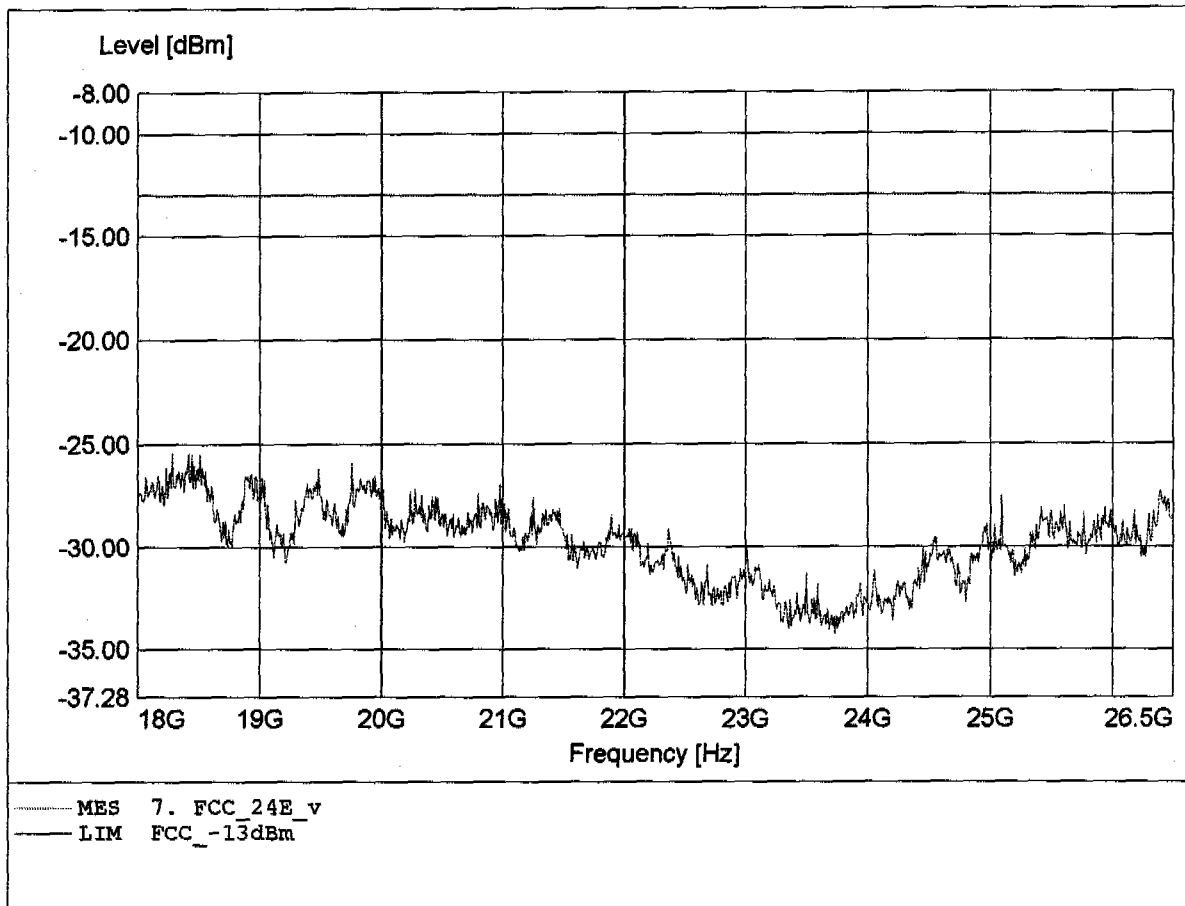


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 512  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 19.908GHz, Pmax: -25.17dBm, RBW: 1MHz

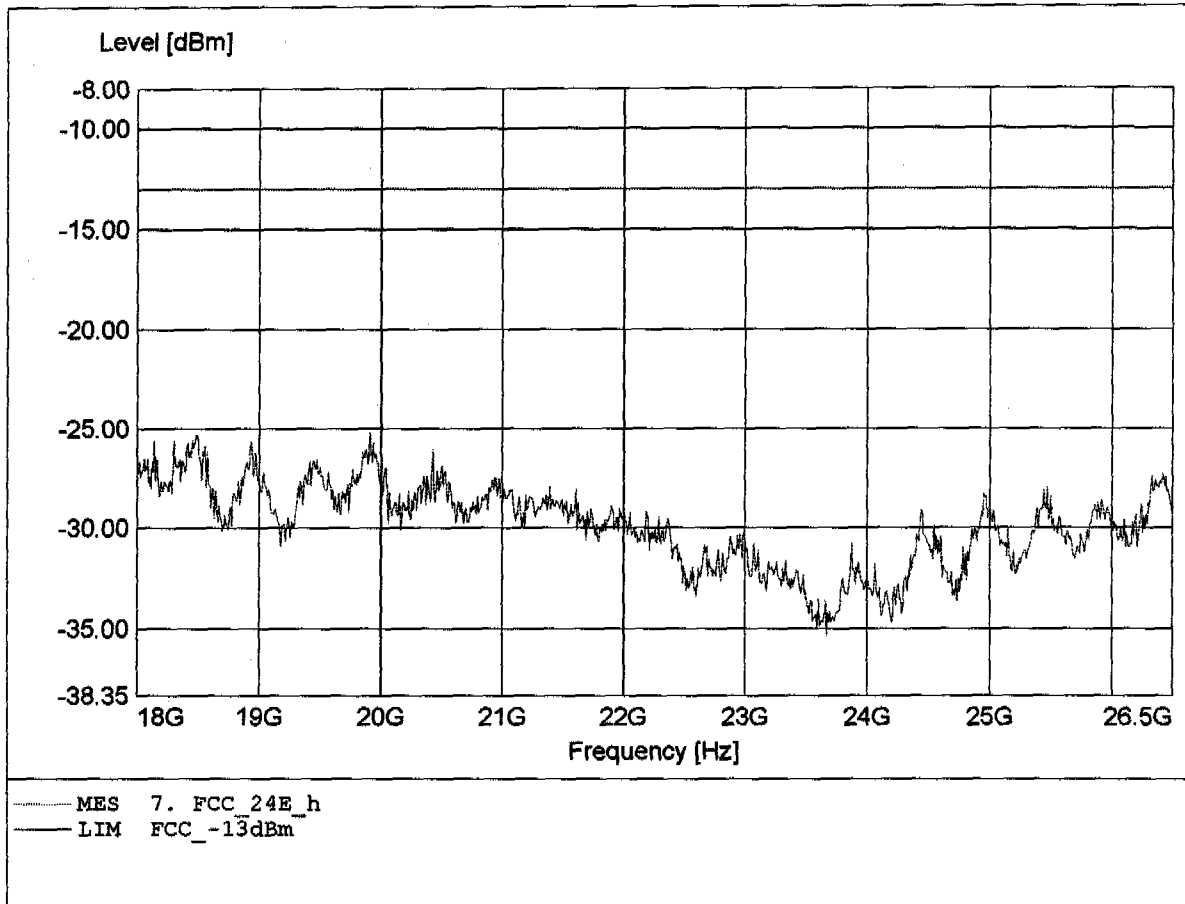


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 182.622MHz, Pmax: -53.04dBm, RBW: 1MHz

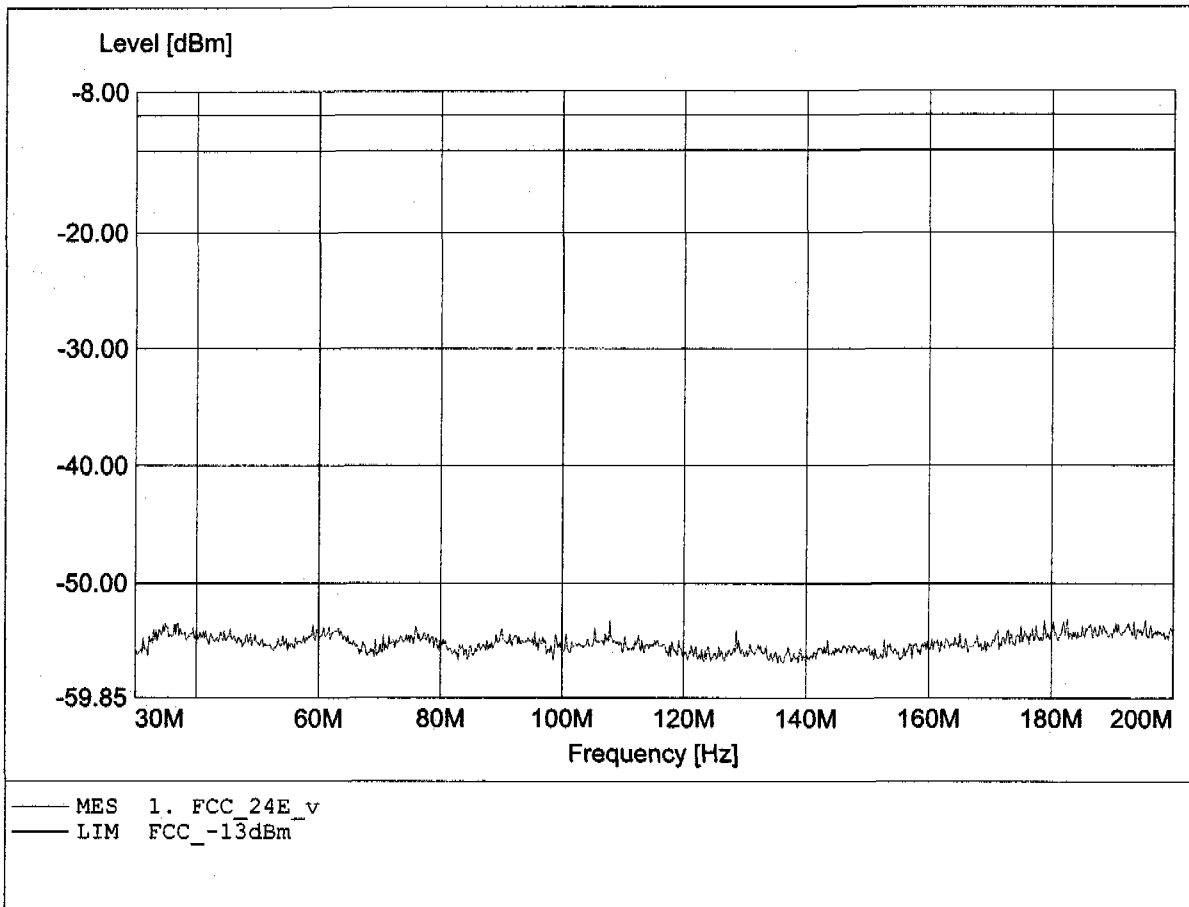


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 59.089MHz, Pmax: -52.10dBm, RBW: 1MHz

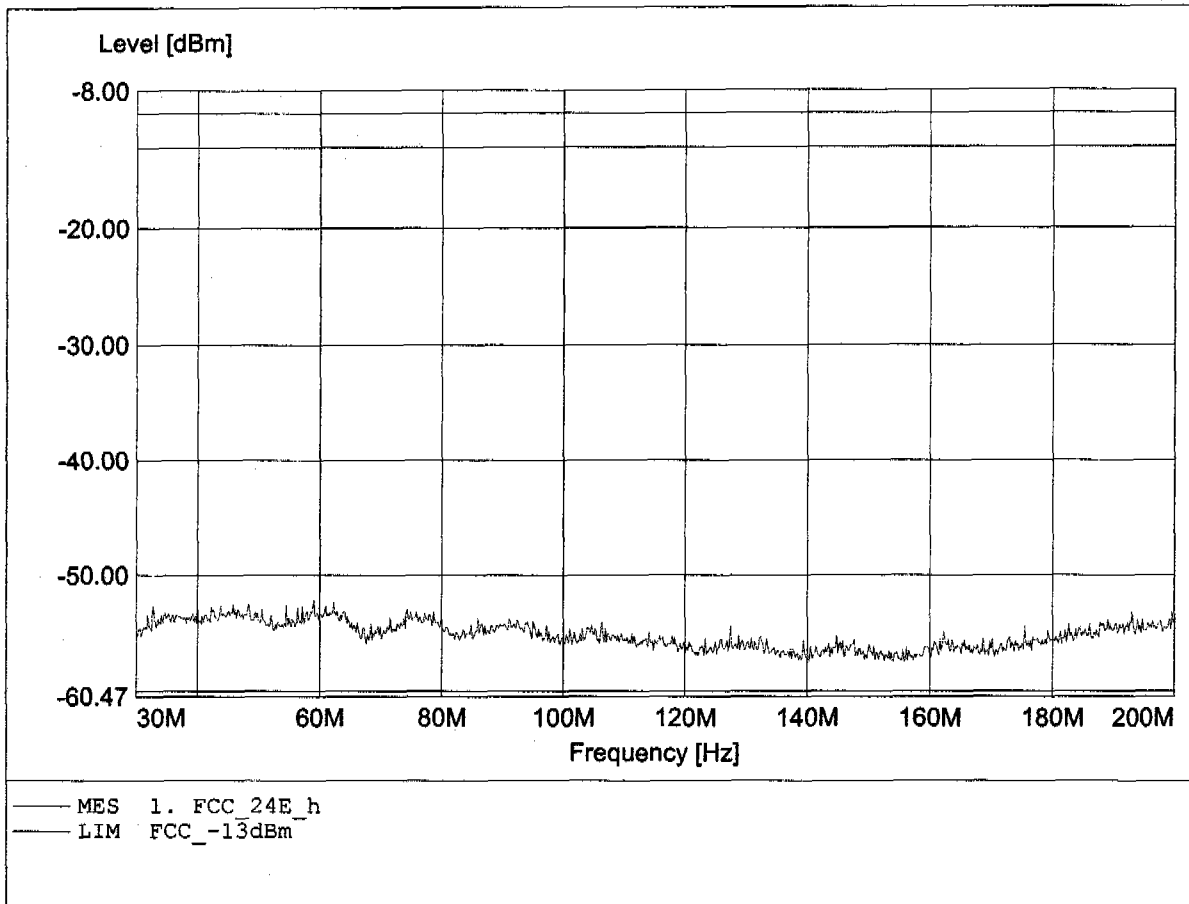


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 1000.000MHz, Pmax: -39.97dBm, RBW: 1MHz

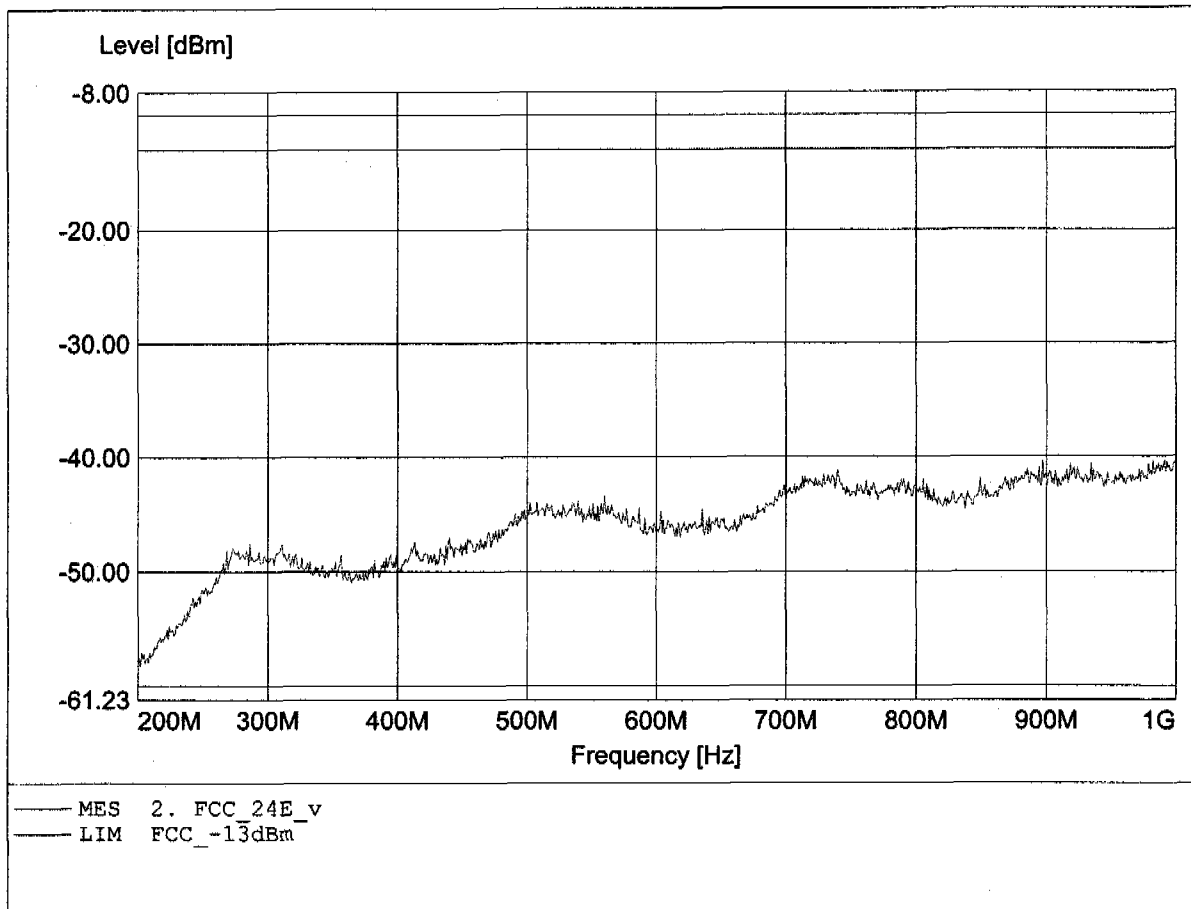

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 851.556MHz, Pmax: -38.65dBm, RBW: 1MHz

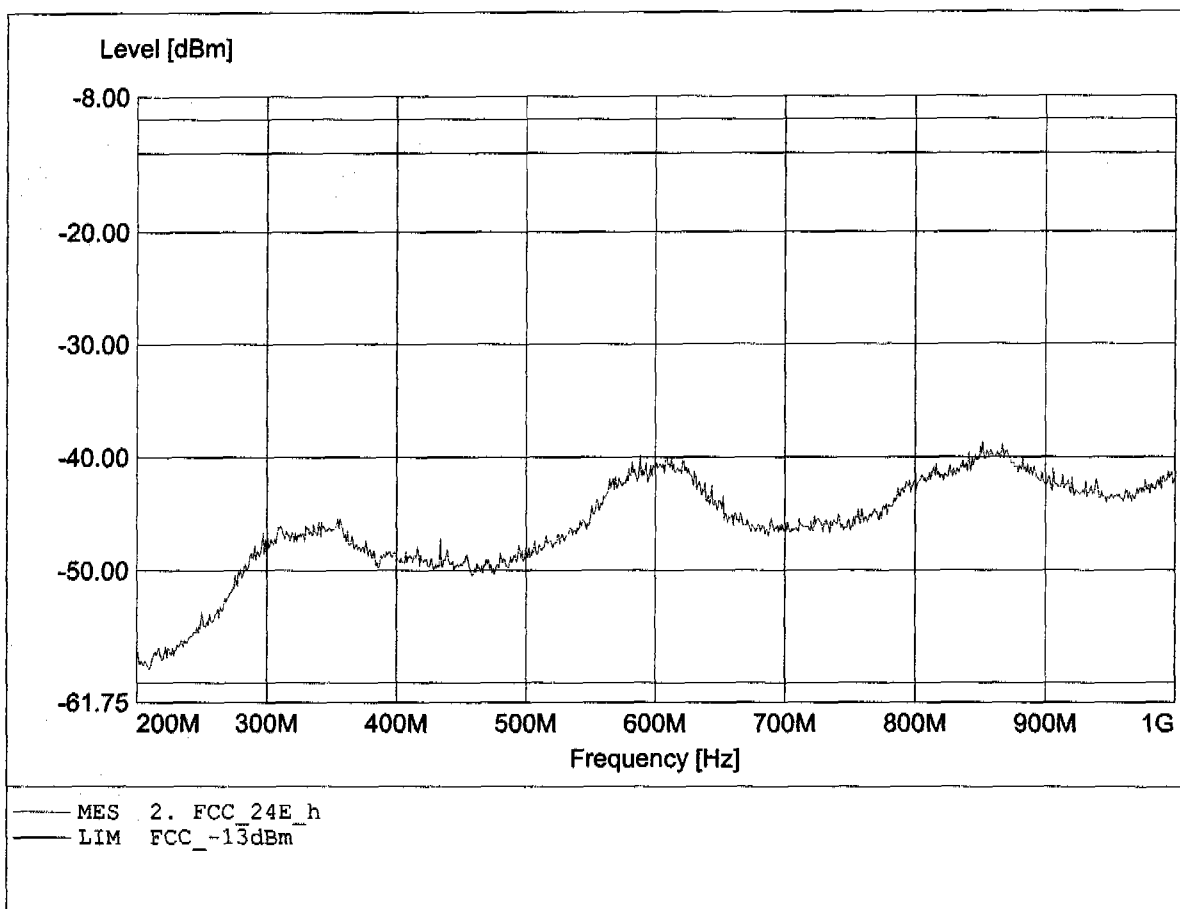




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.984GHz, Pmax: -22.47dBm, RBW: 1MHz/3kHz

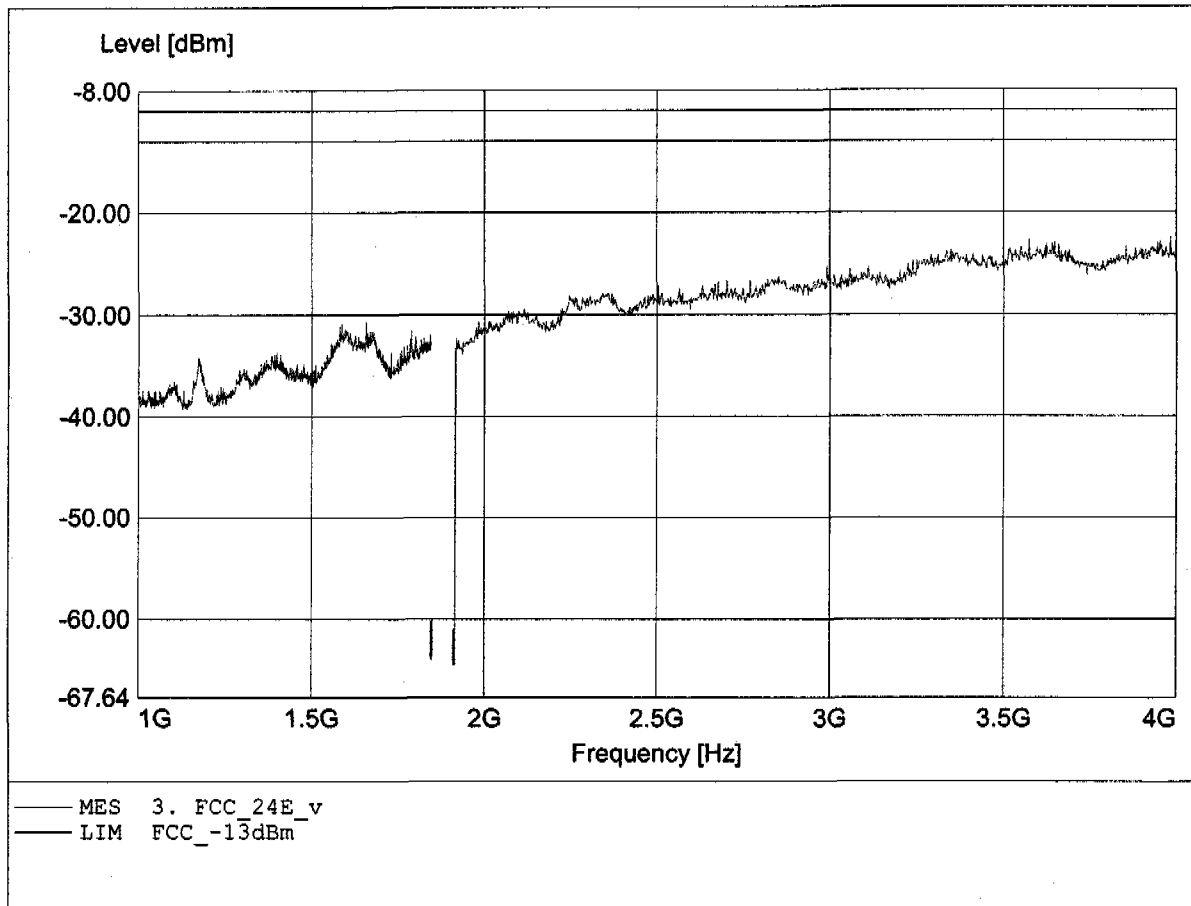


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.988GHz, Pmax: -22.96dBm, RBW: 1MHz/3kHz

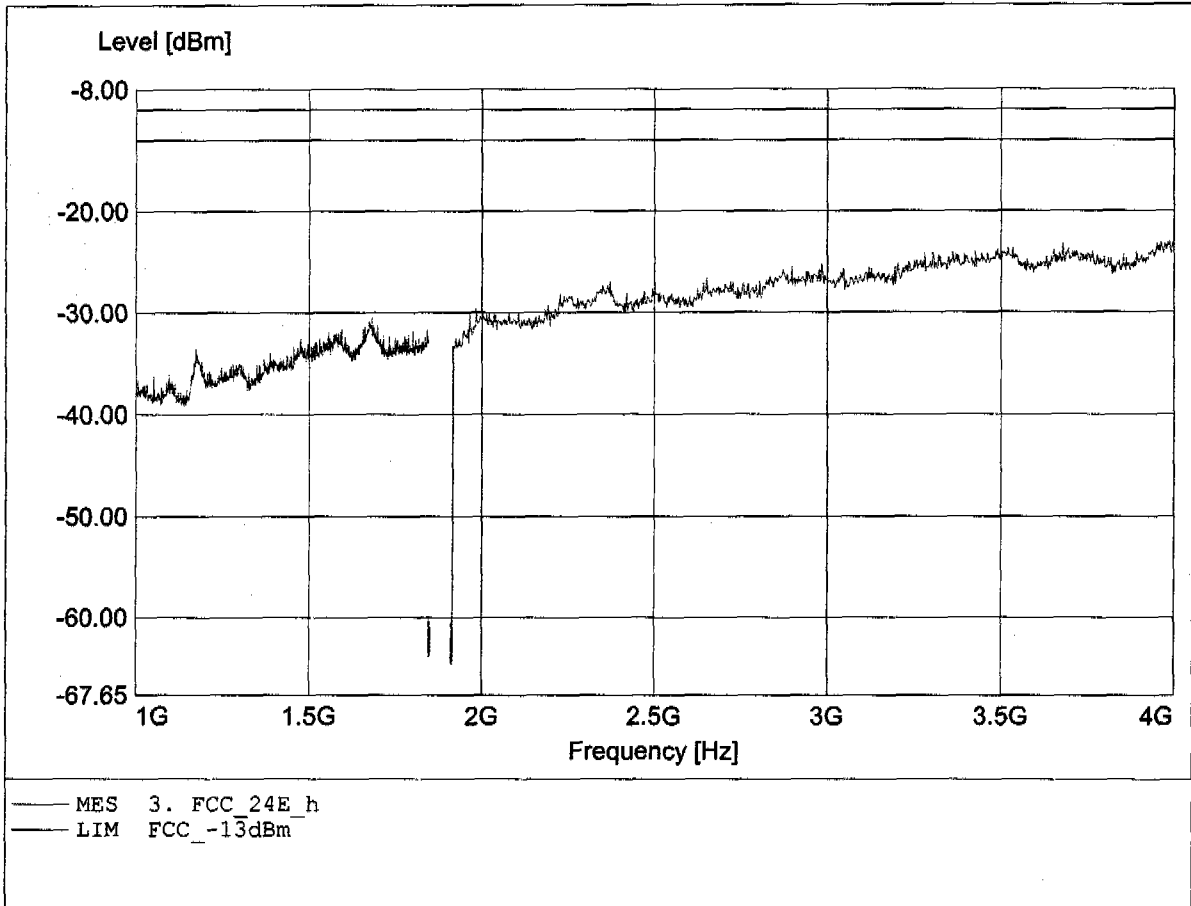


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.524GHz, Pmax: -32.86dBm, RBW: 1MHz

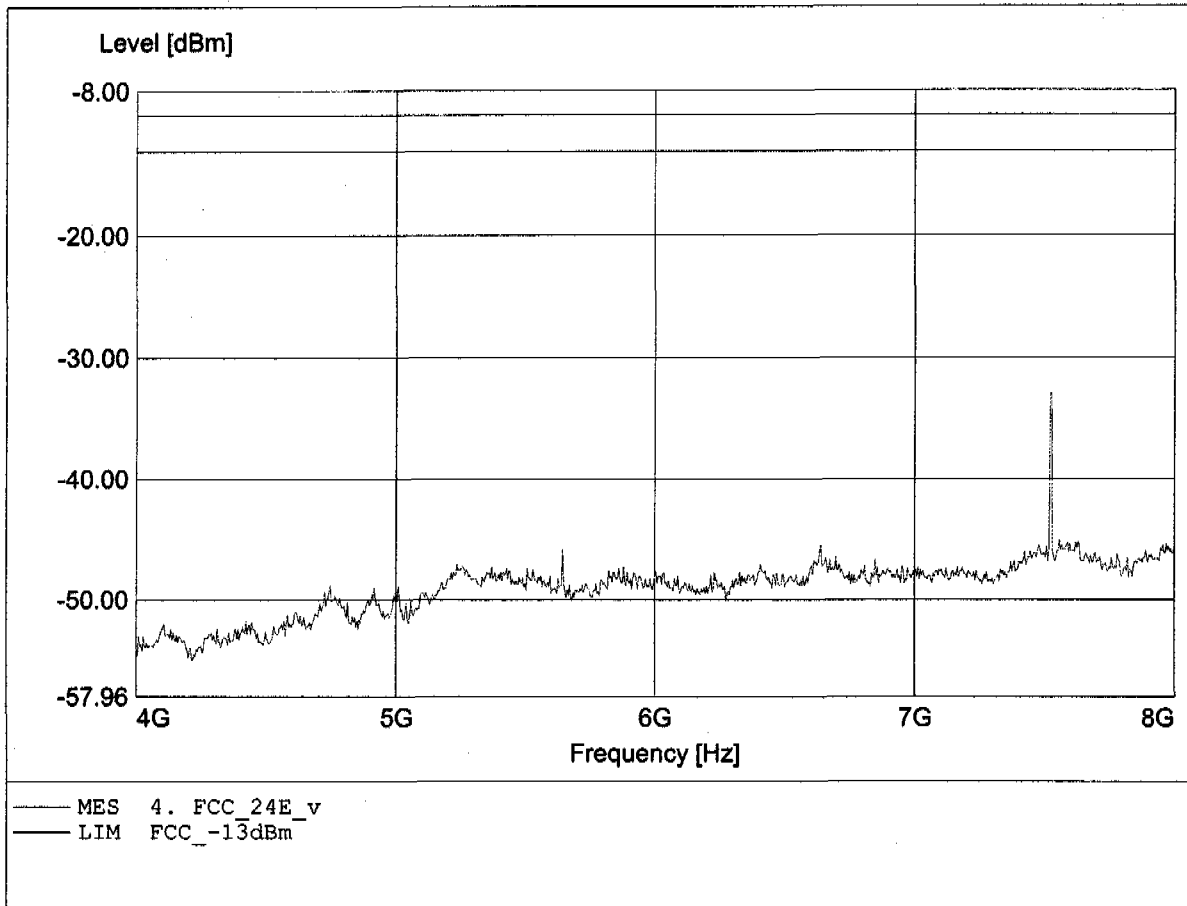


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.520GHz, Pmax: -28.98dBm, RBW: 1MHz

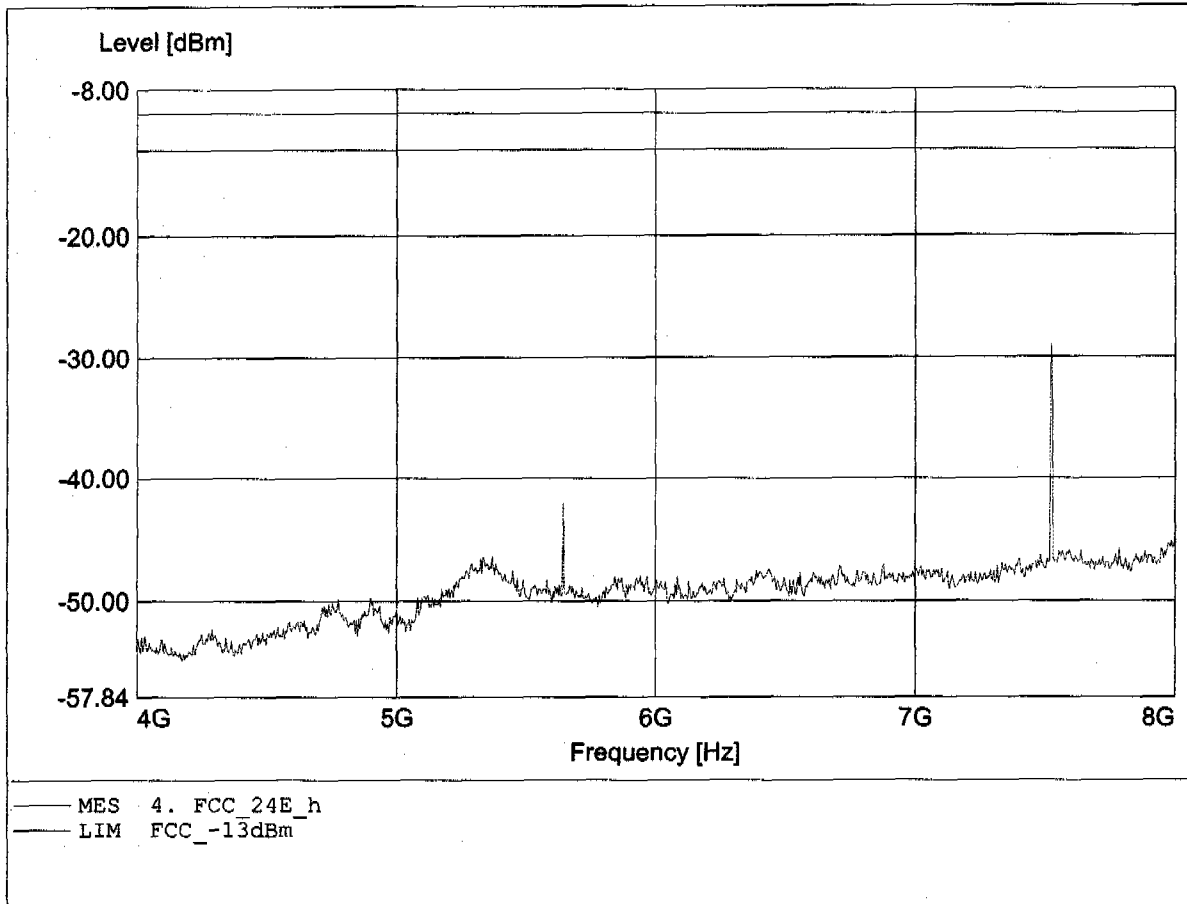


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.280GHz, Pmax: -33.67dBm, RBW: 1MHz

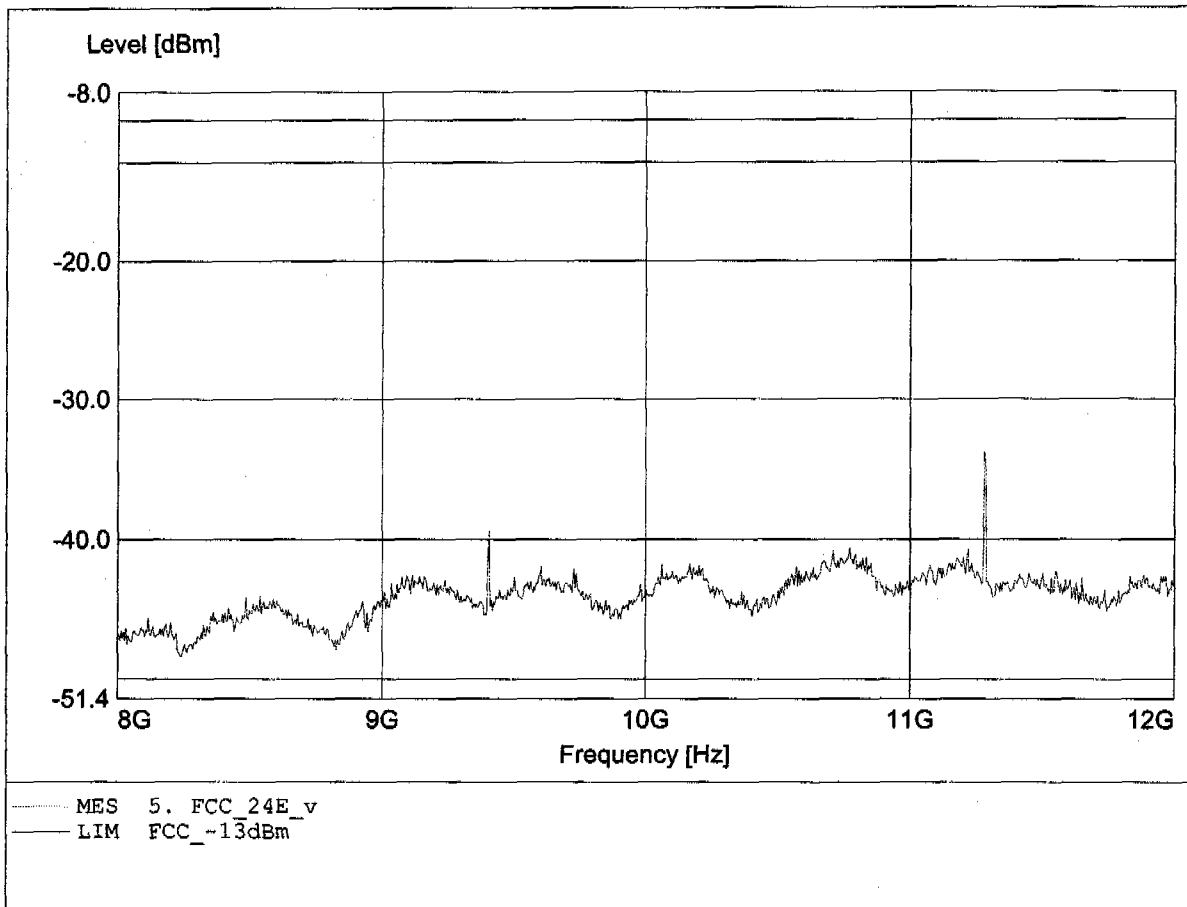


**Radiated Emissions Tx  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.280GHz, Pmax: -29.35dBm, RBW: 1MHz

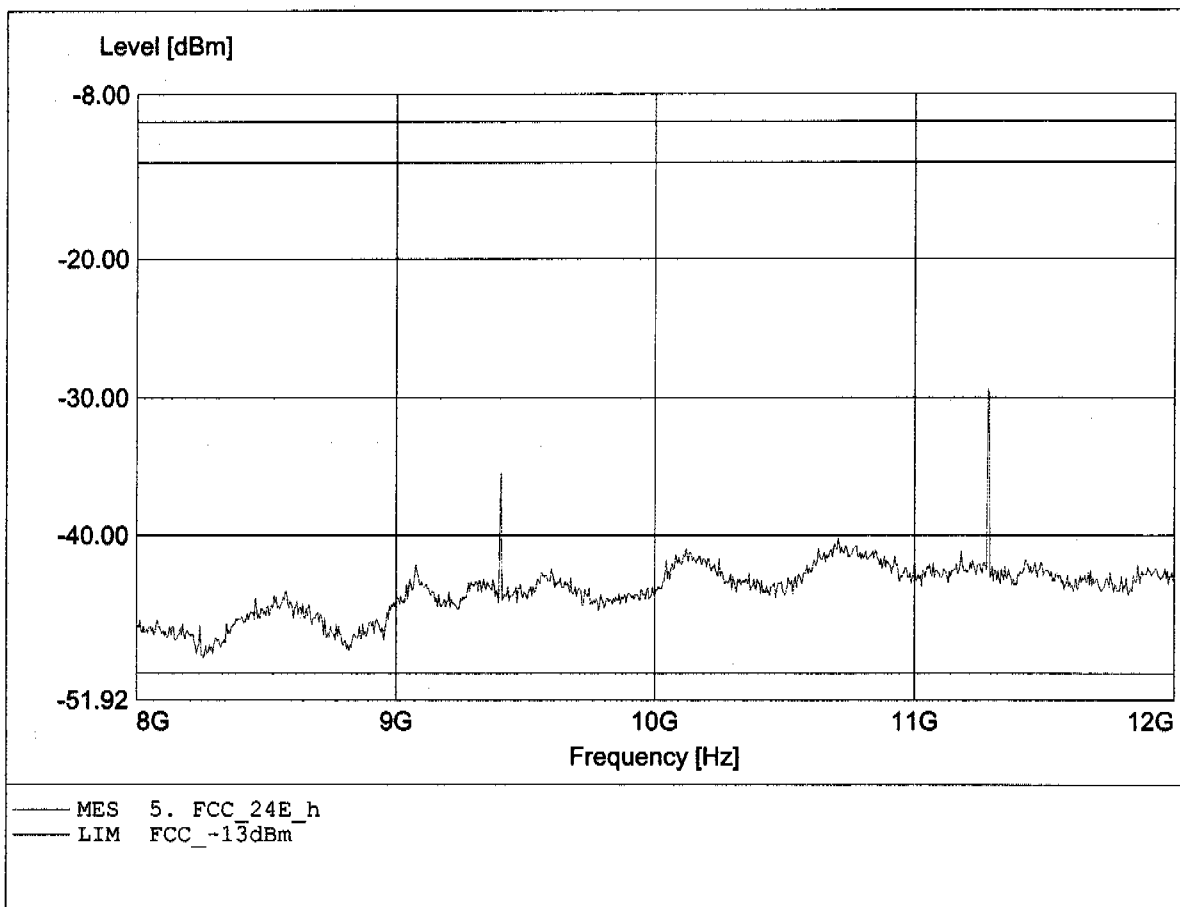


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 13.160GHz, Pmax: -28.42dBm, RBW: 1MHz

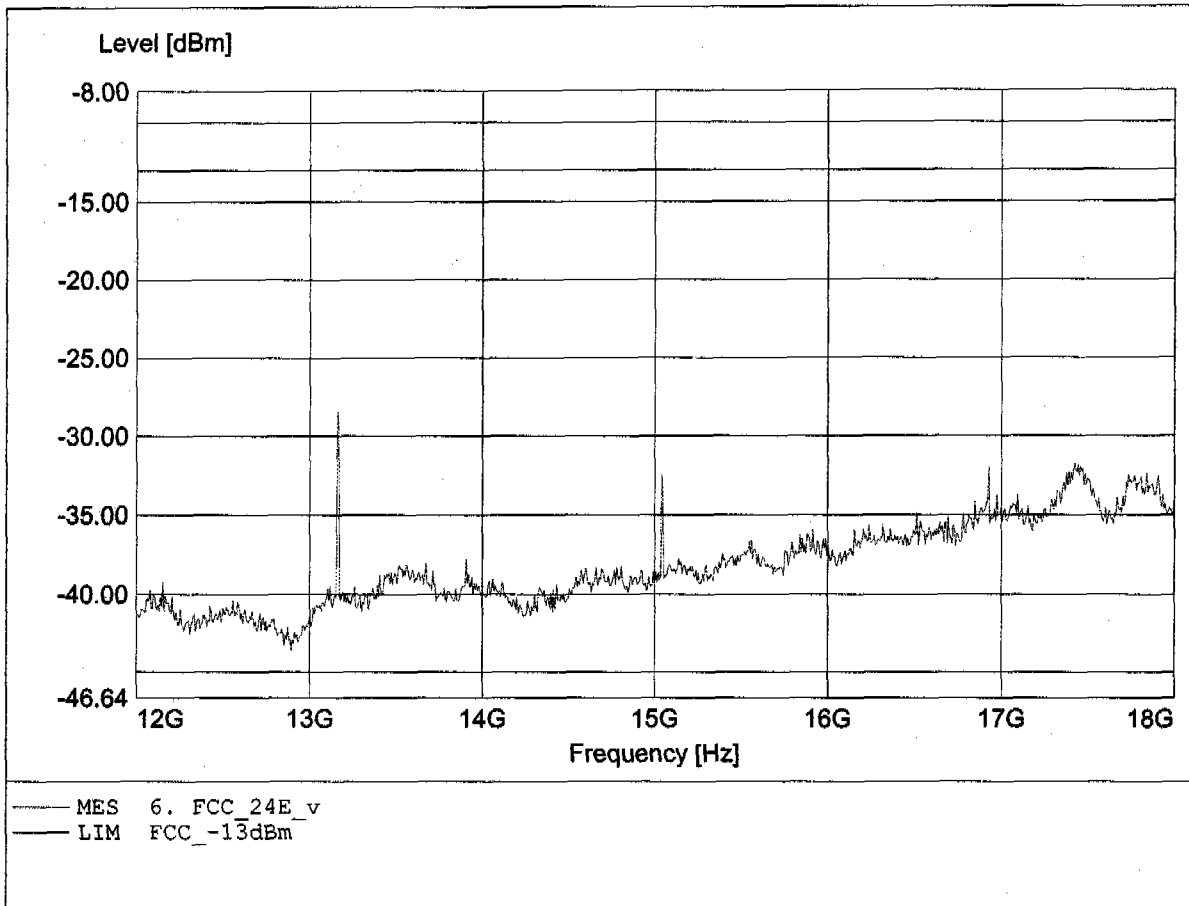

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 16.927GHz, Pmax: -27.23dBm, RBW: 1MHz

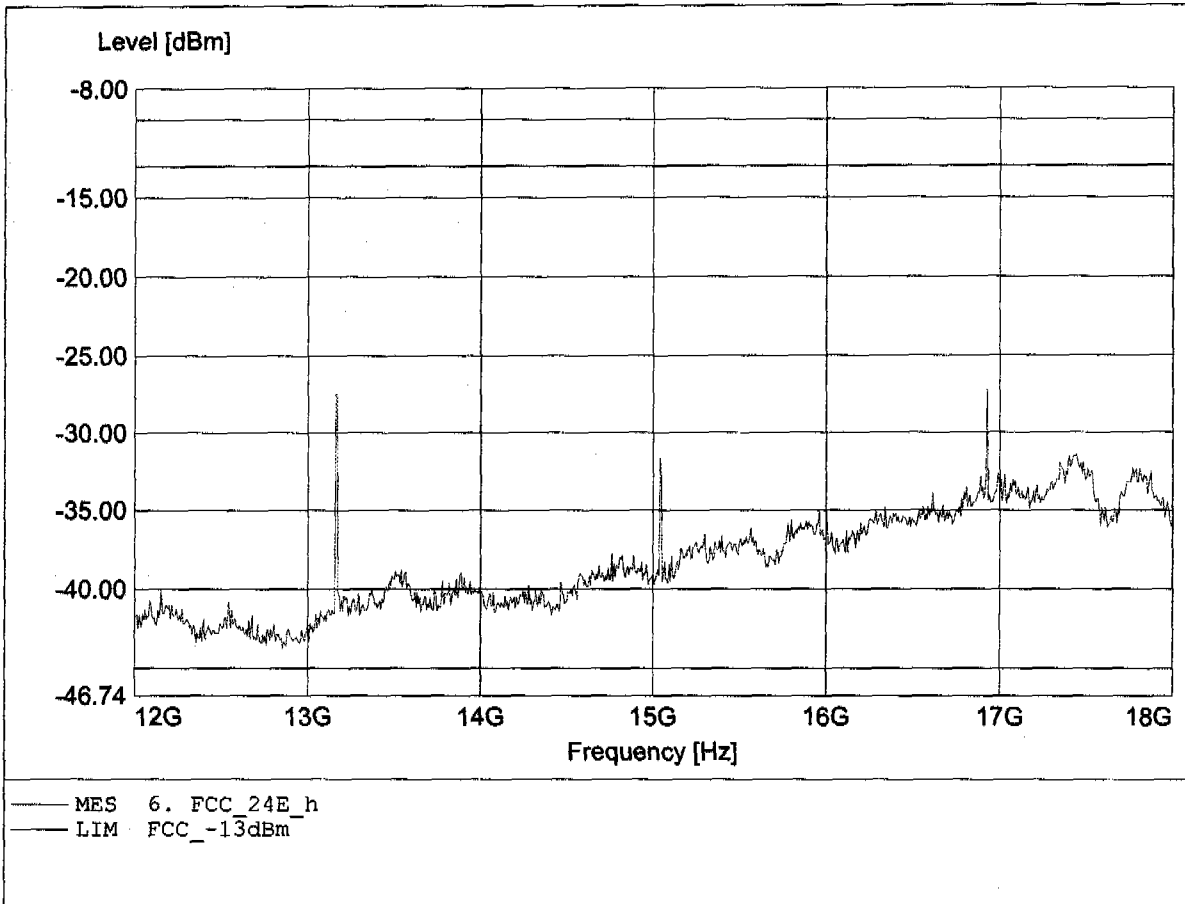




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.142GHz, Pmax: -25.30dBm, RBW: 1MHz

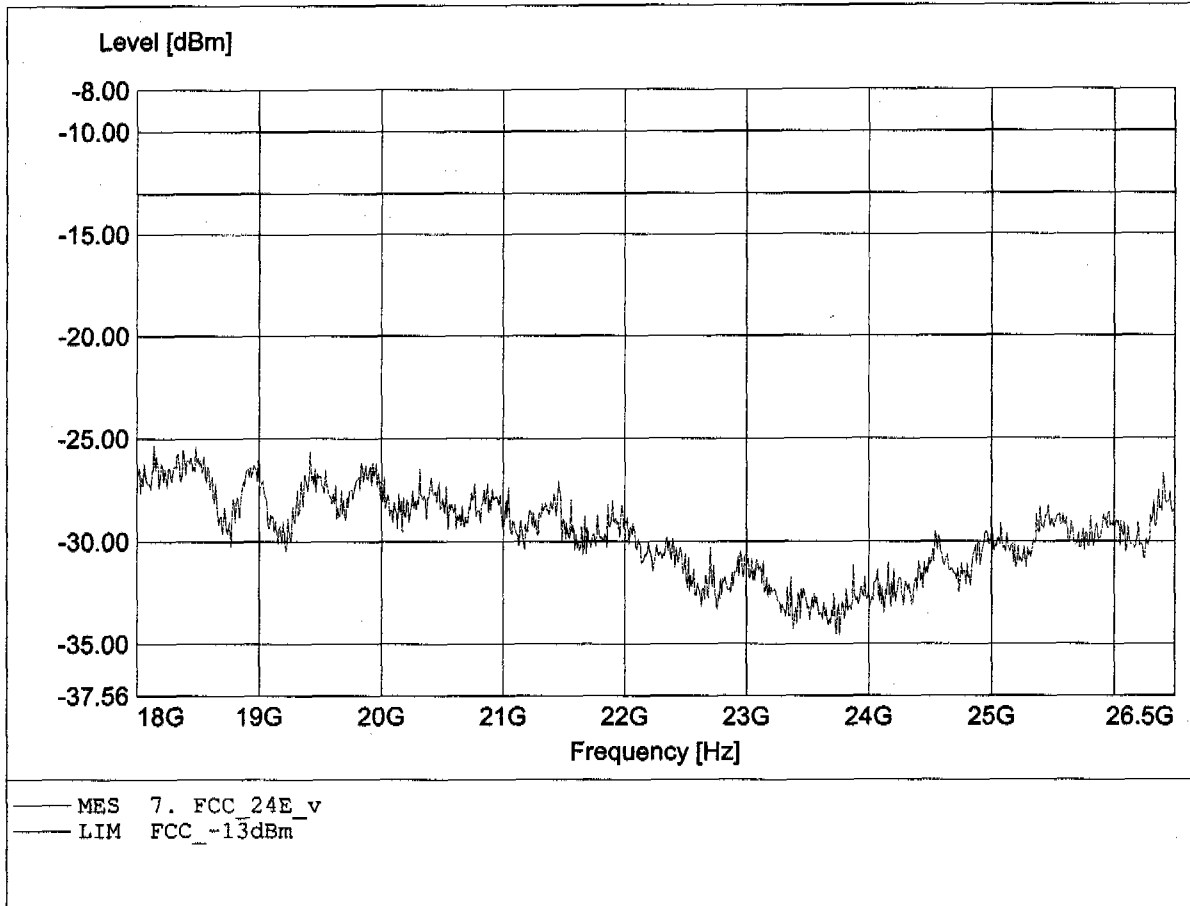


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 661  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.387GHz, Pmax: -25.22dBm, RBW: 1MHz

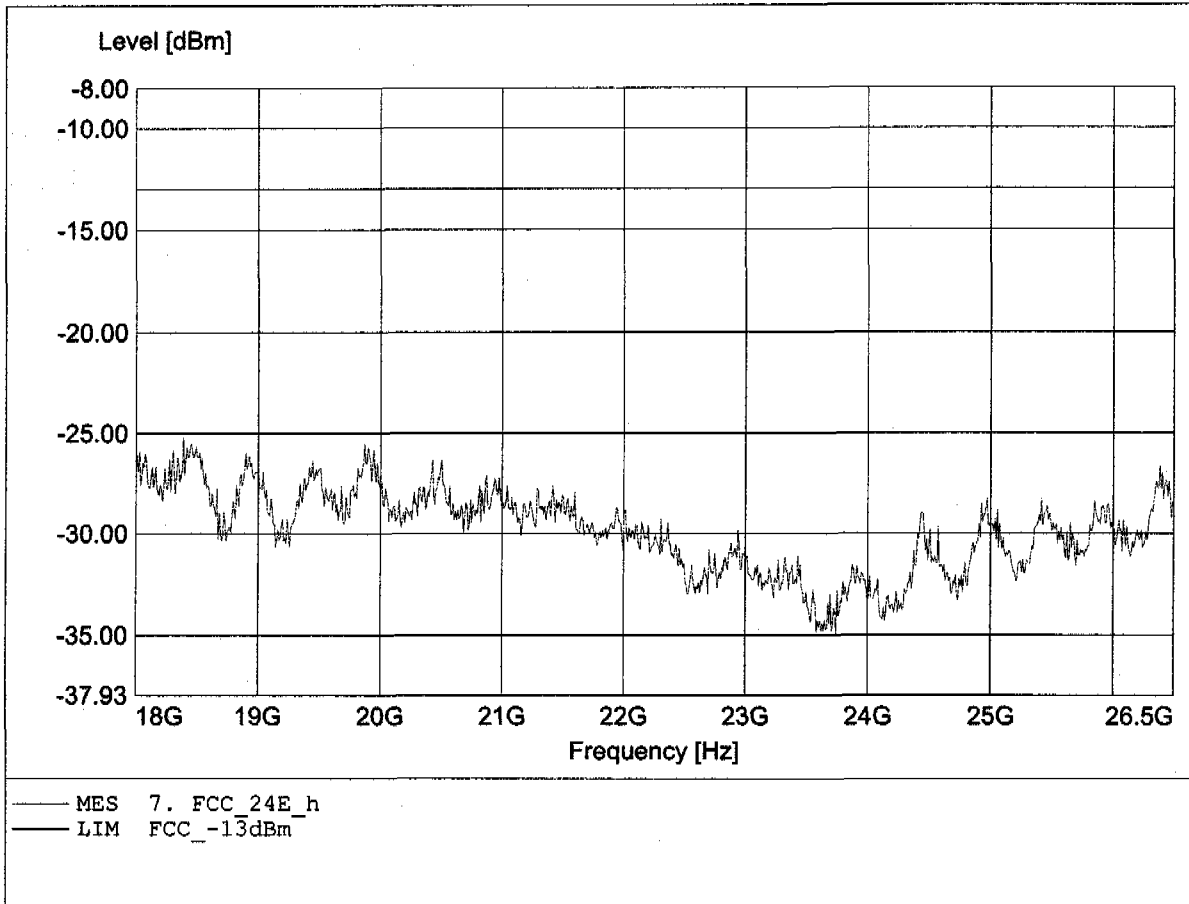


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 188.667MHz, Pmax: -52.29dBm, RBW: 1MHz

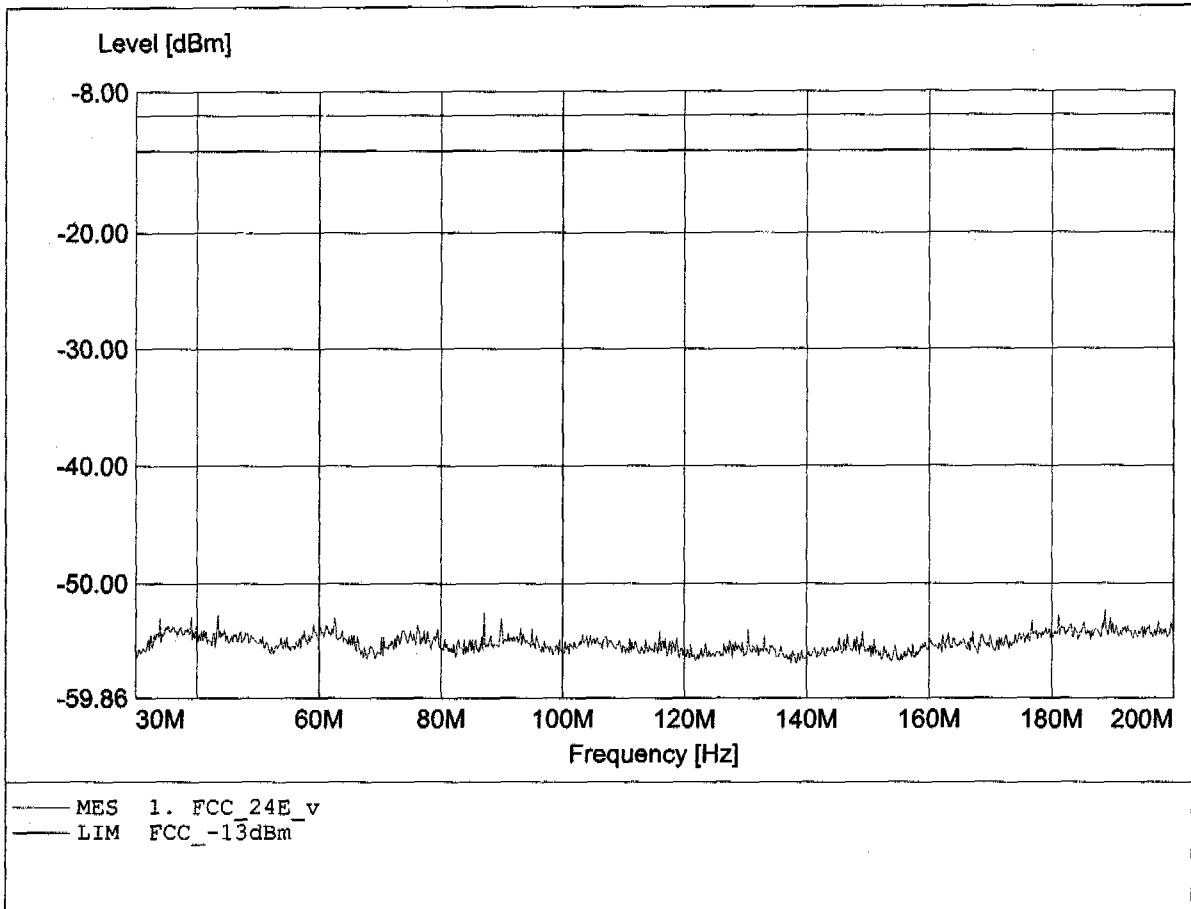


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 34.911MHz, Pmax: -52.43dBm, RBW: 1MHz

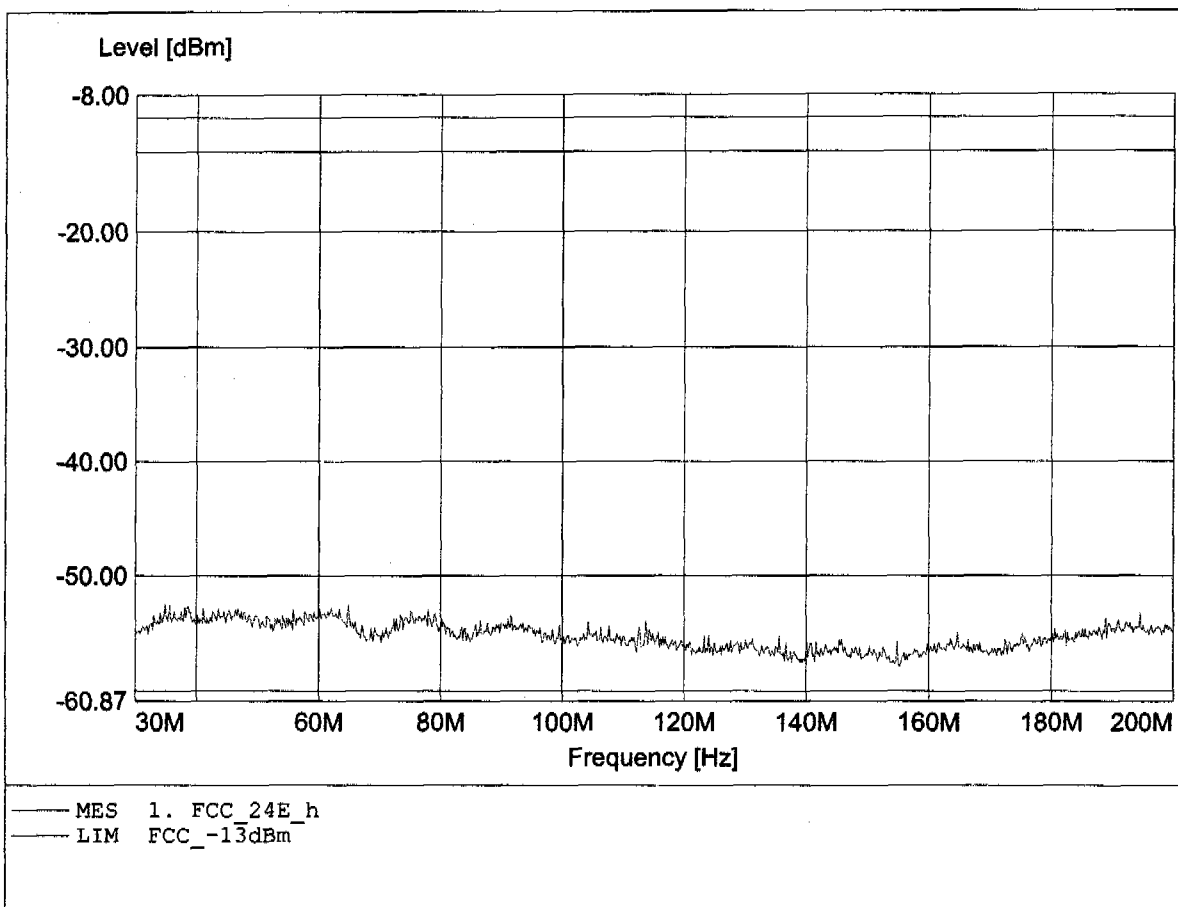


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 999.111MHz, Pmax: -40.12dBm, RBW: 1MHz

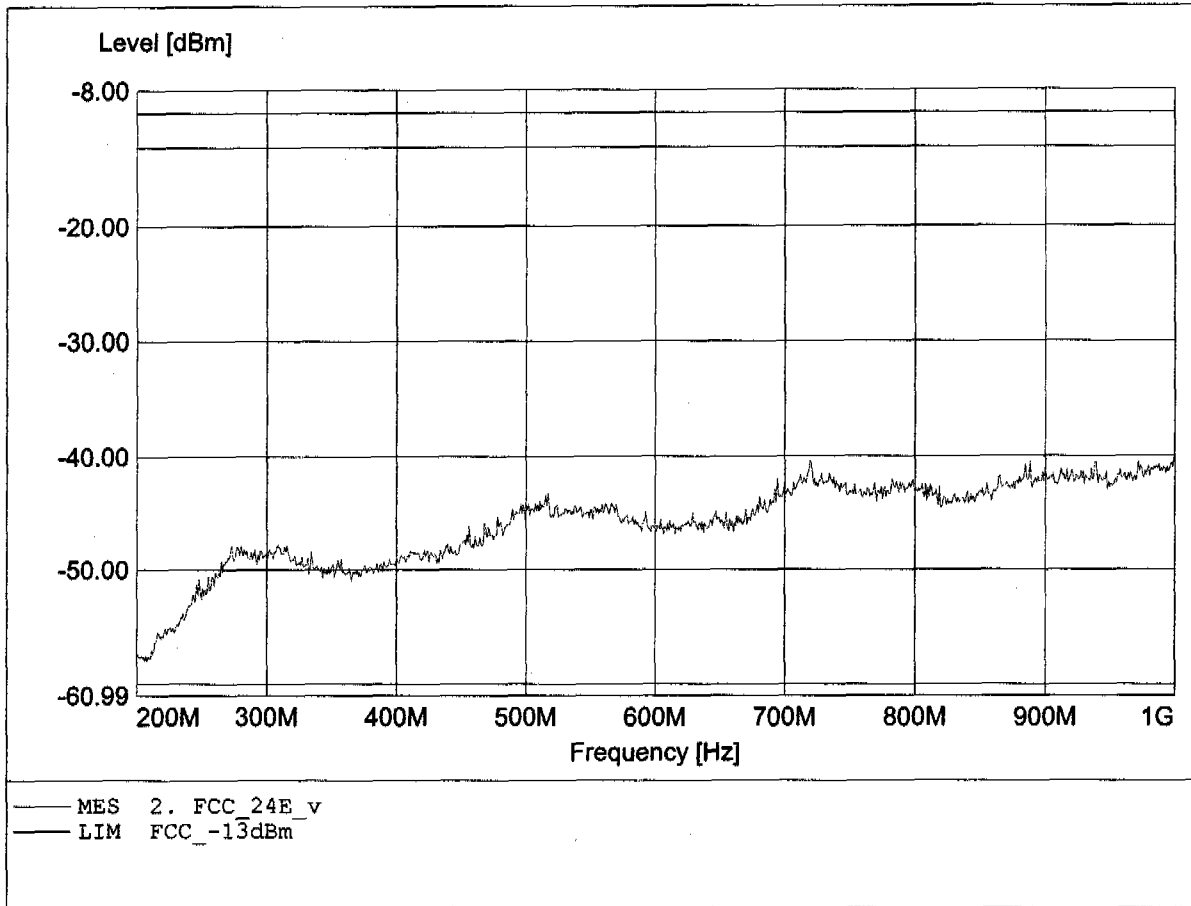


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL 223  
Comment 2: Freq: 854.222MHz, Pmax: -38.74dBm, RBW: 1MHz

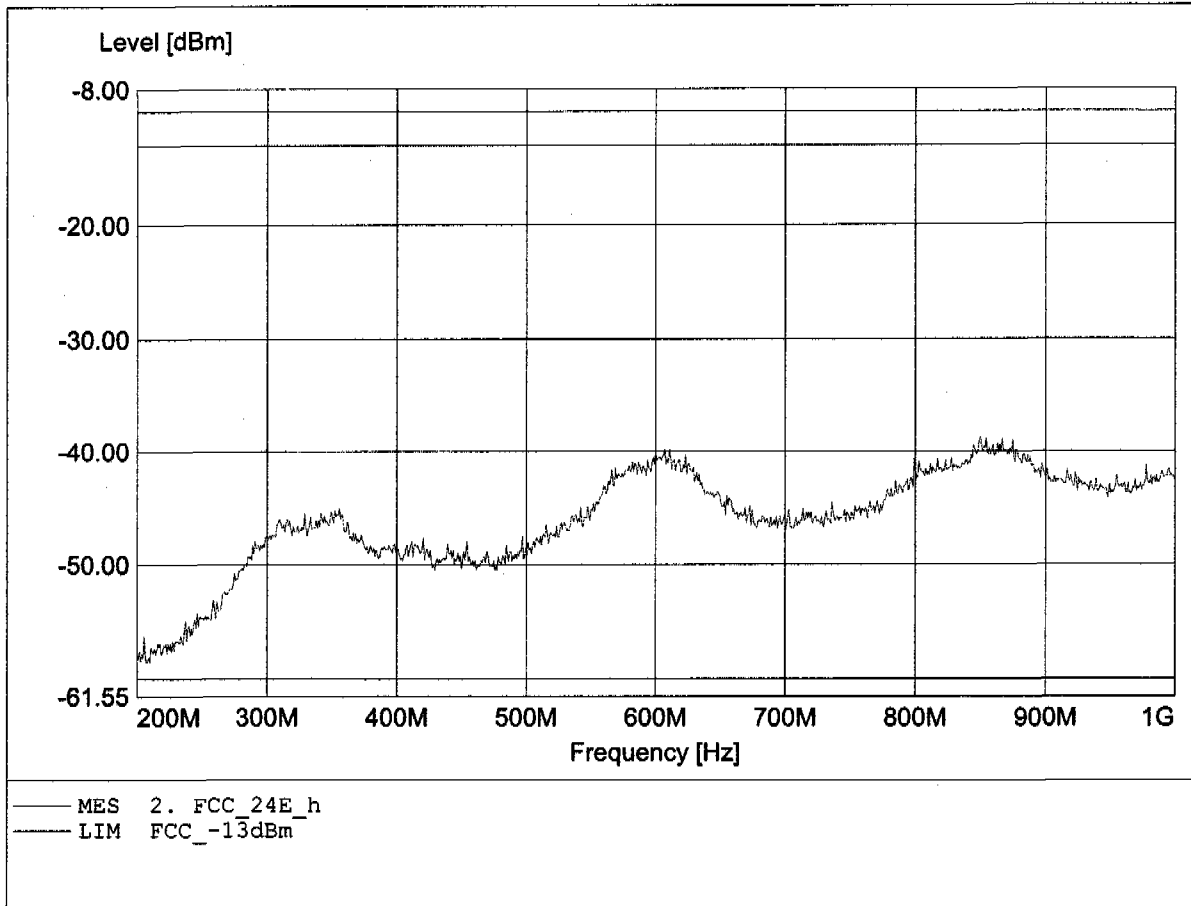


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.910GHz, Pmax: -21.32dBm, RBW: 1MHz/3kHz

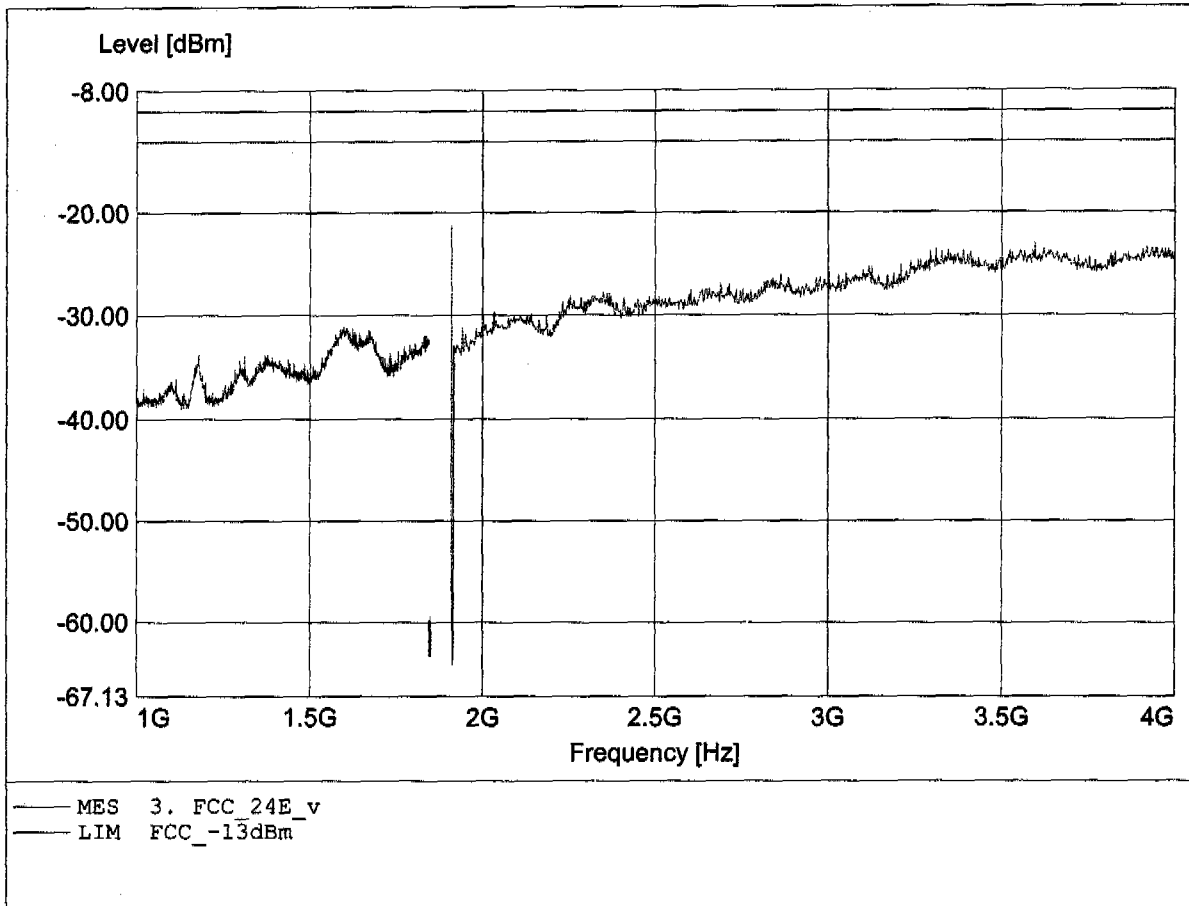

**Radiated Emissions Tx  
FCC RULES PART 24 SUBPART E**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.518GHz, Pmax: -22.18dBm, RBW: 1MHz/3kHz

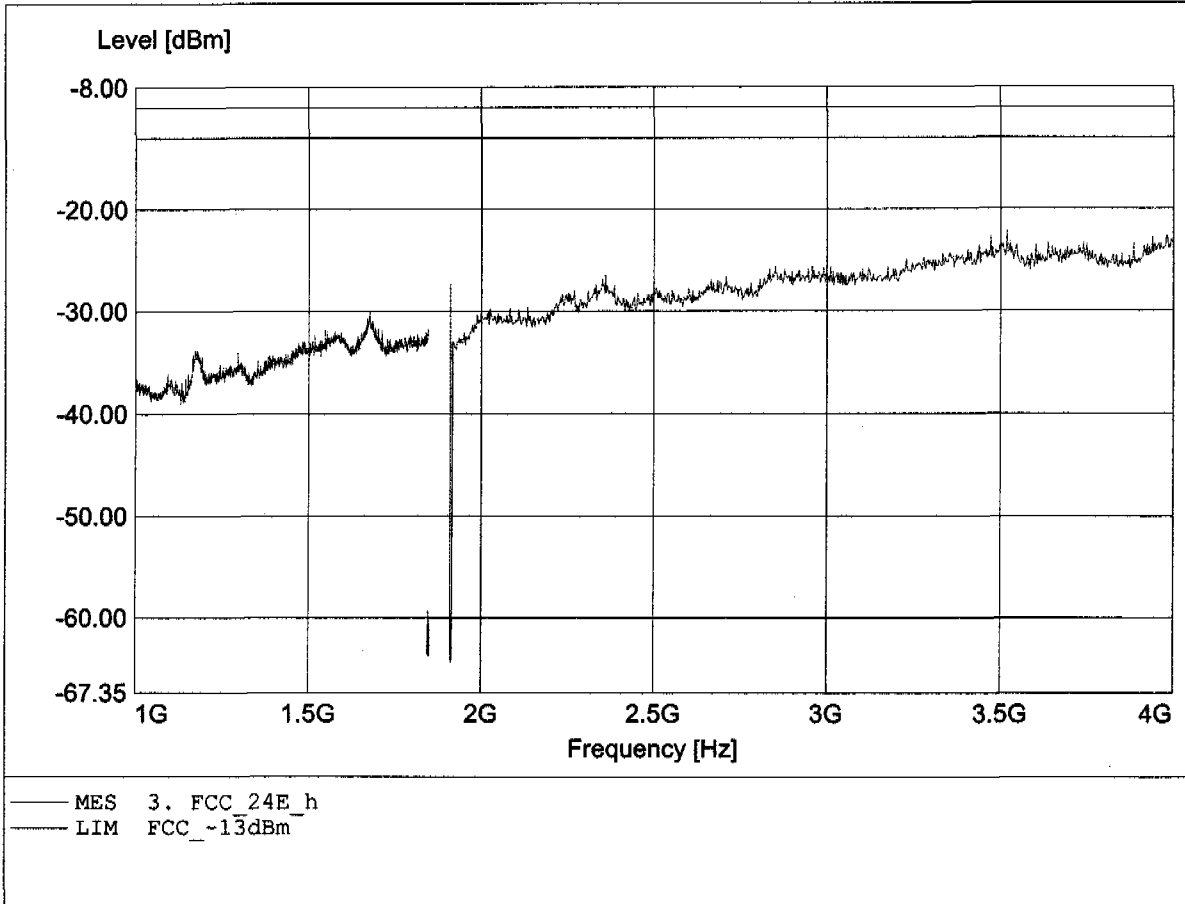




**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -28.88dBm, RBW: 1MHz

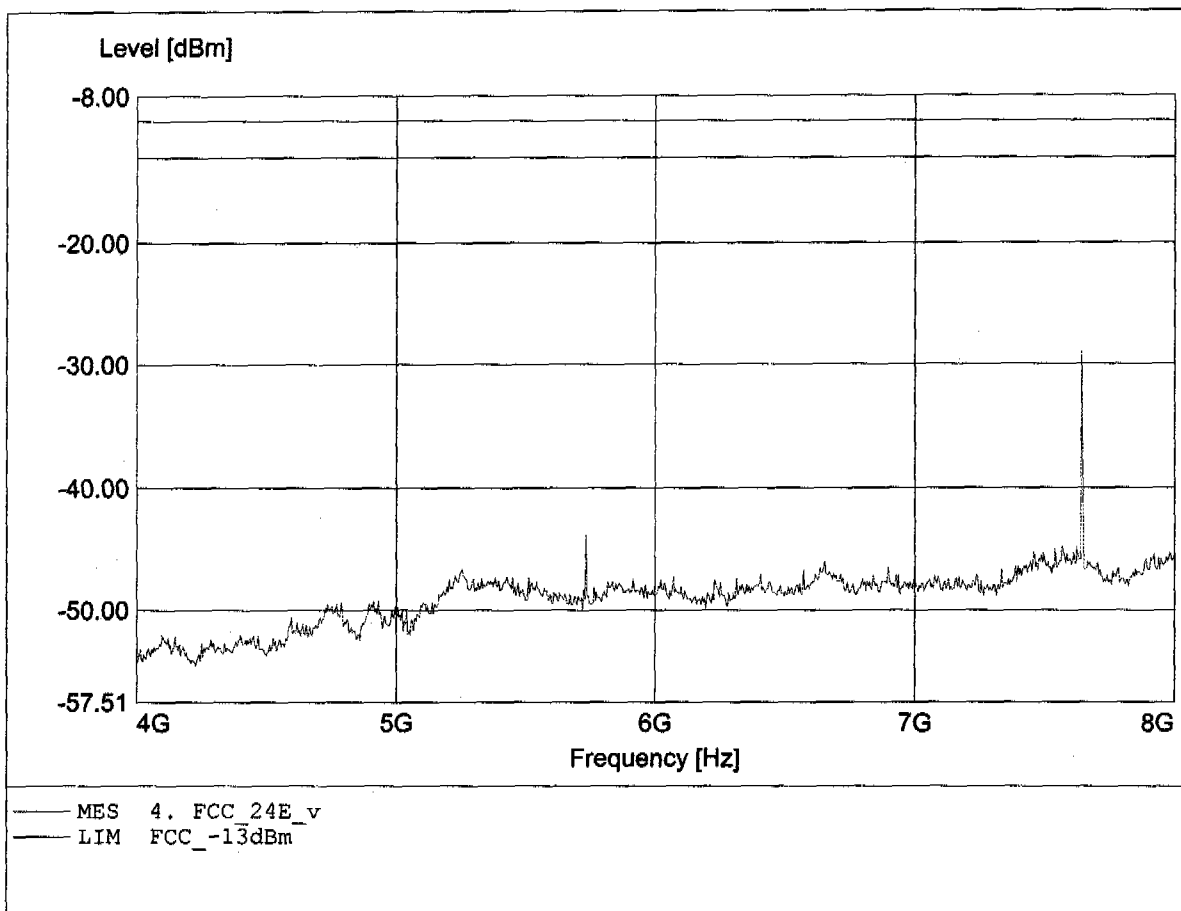


**Radiated Emissions Tx  
FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -27.67dBm, RBW: 1MHz

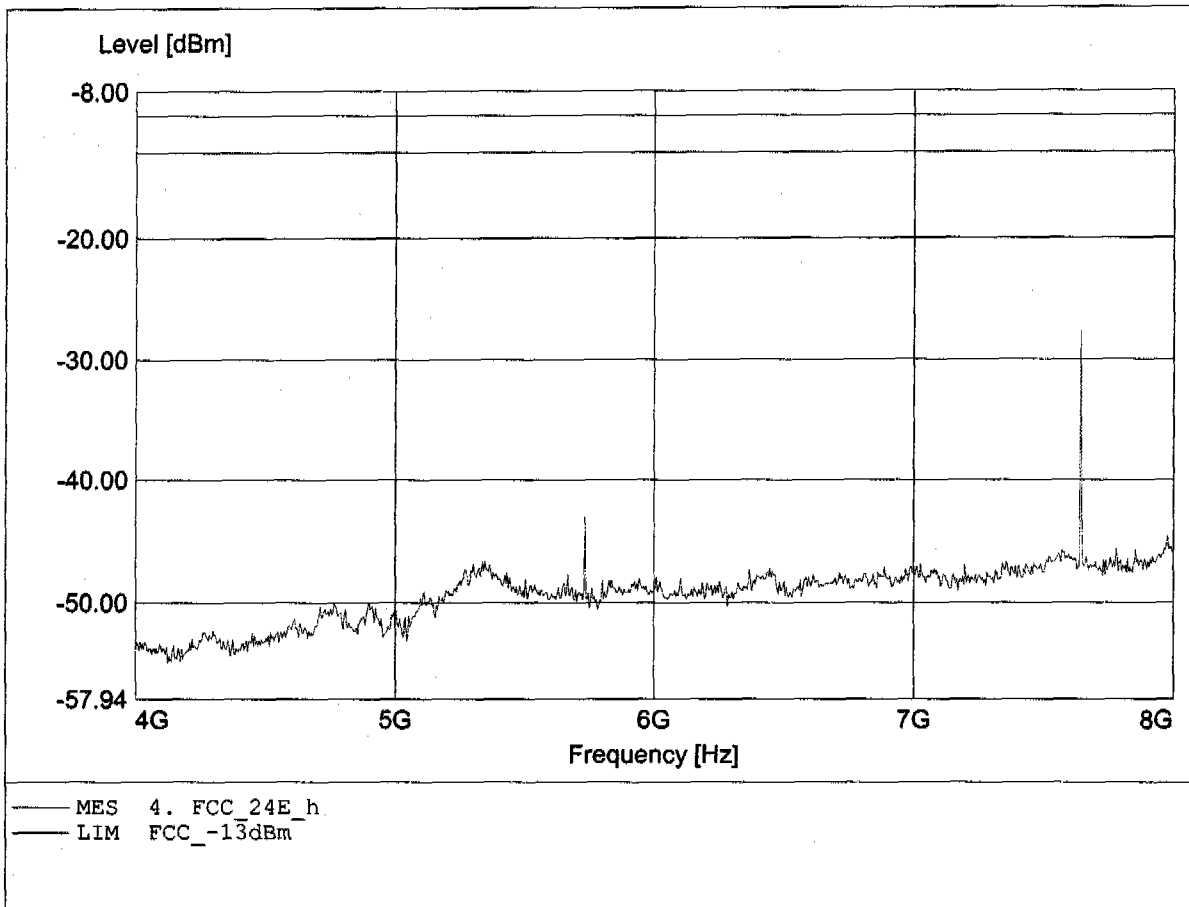


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.462GHz, Pmax: -27.81dBm, RBW: 1MHz

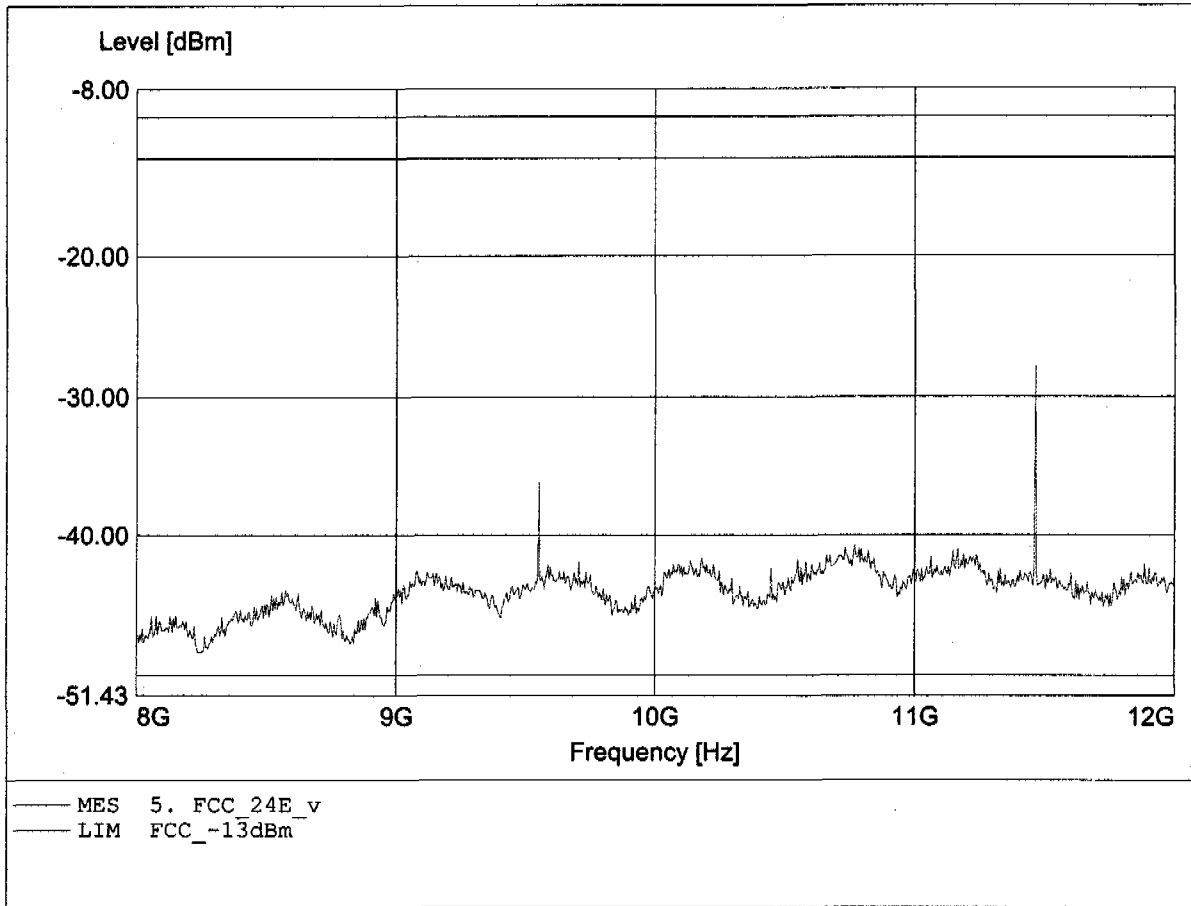


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 11.462GHz, Pmax: -25.30dBm, RBW: 1MHz

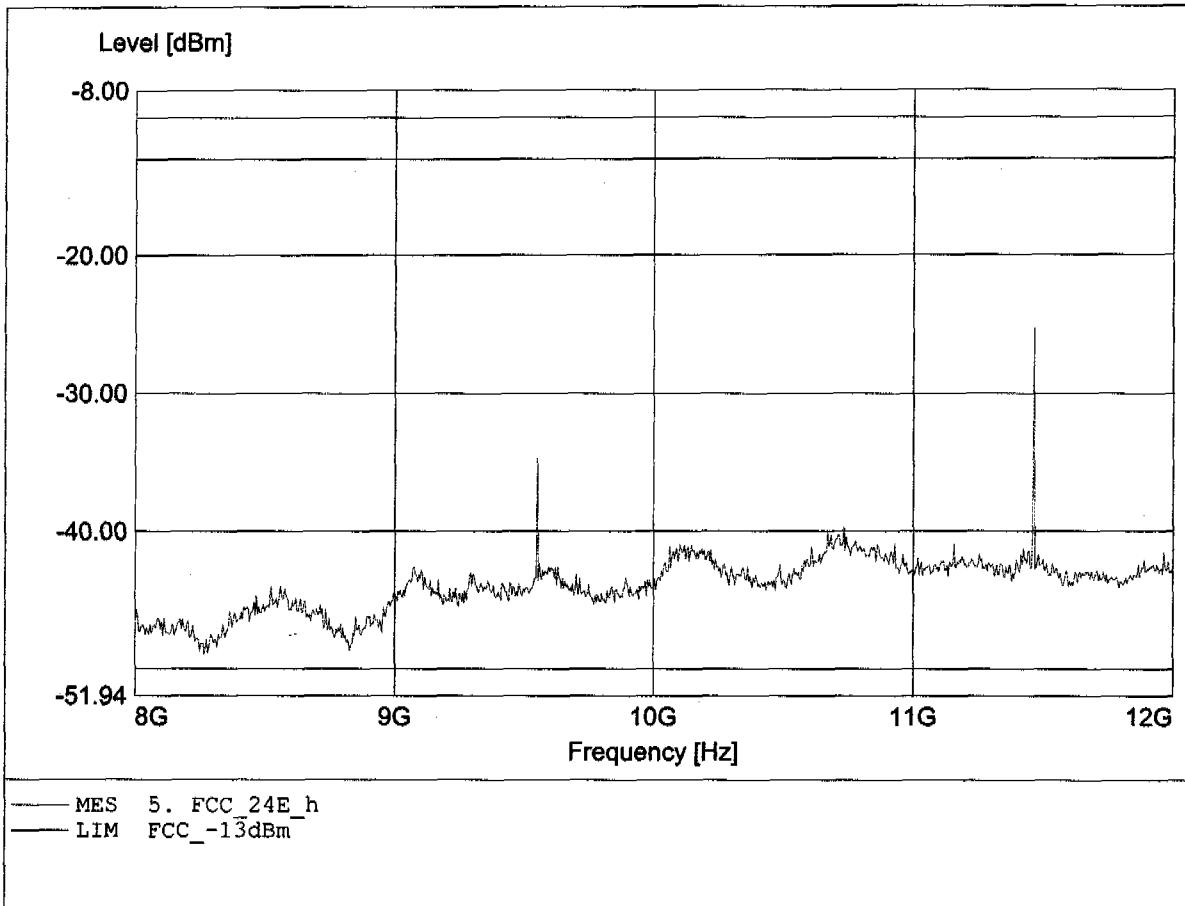


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 13.373GHz, Pmax: -27.35dBm, RBW: 1MHz

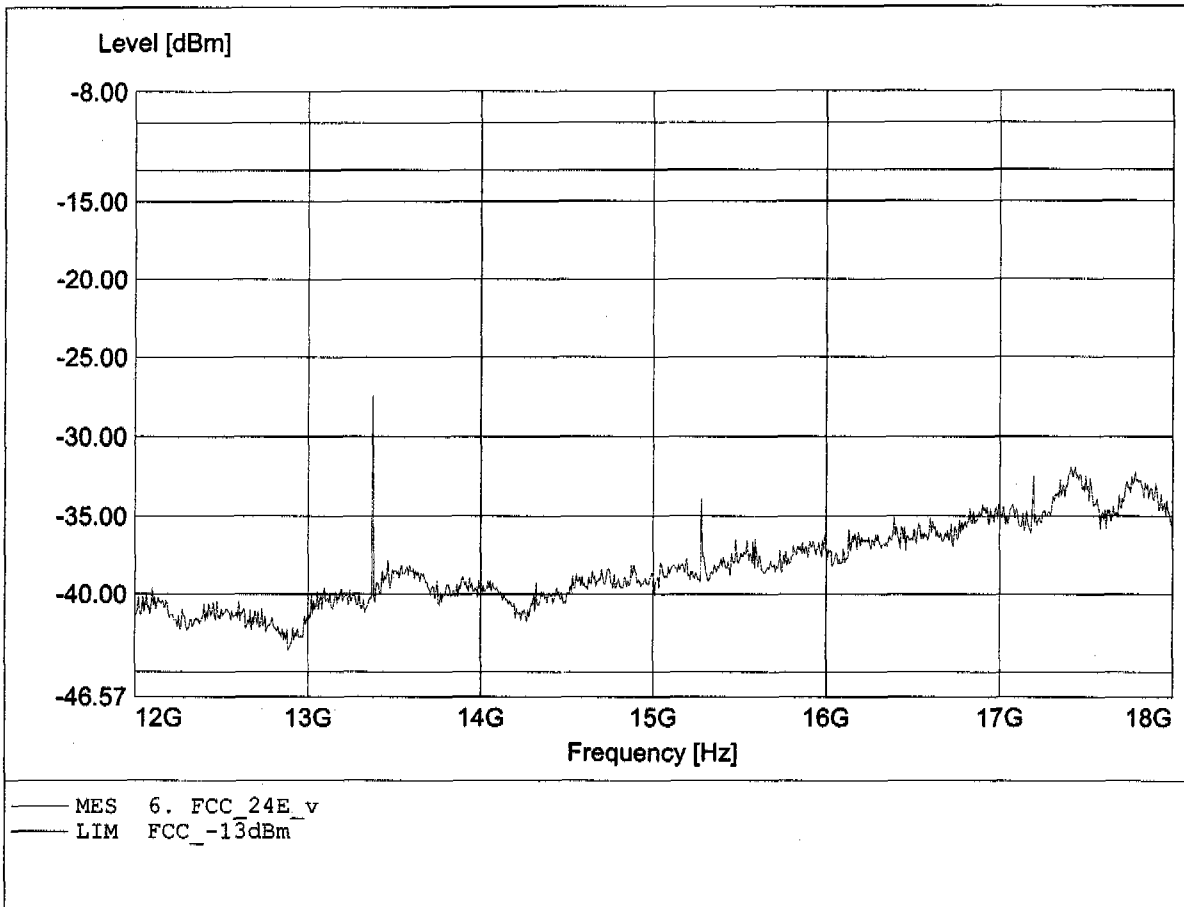


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 17.193GHz, Pmax: -26.85dBm, RBW: 1MHz

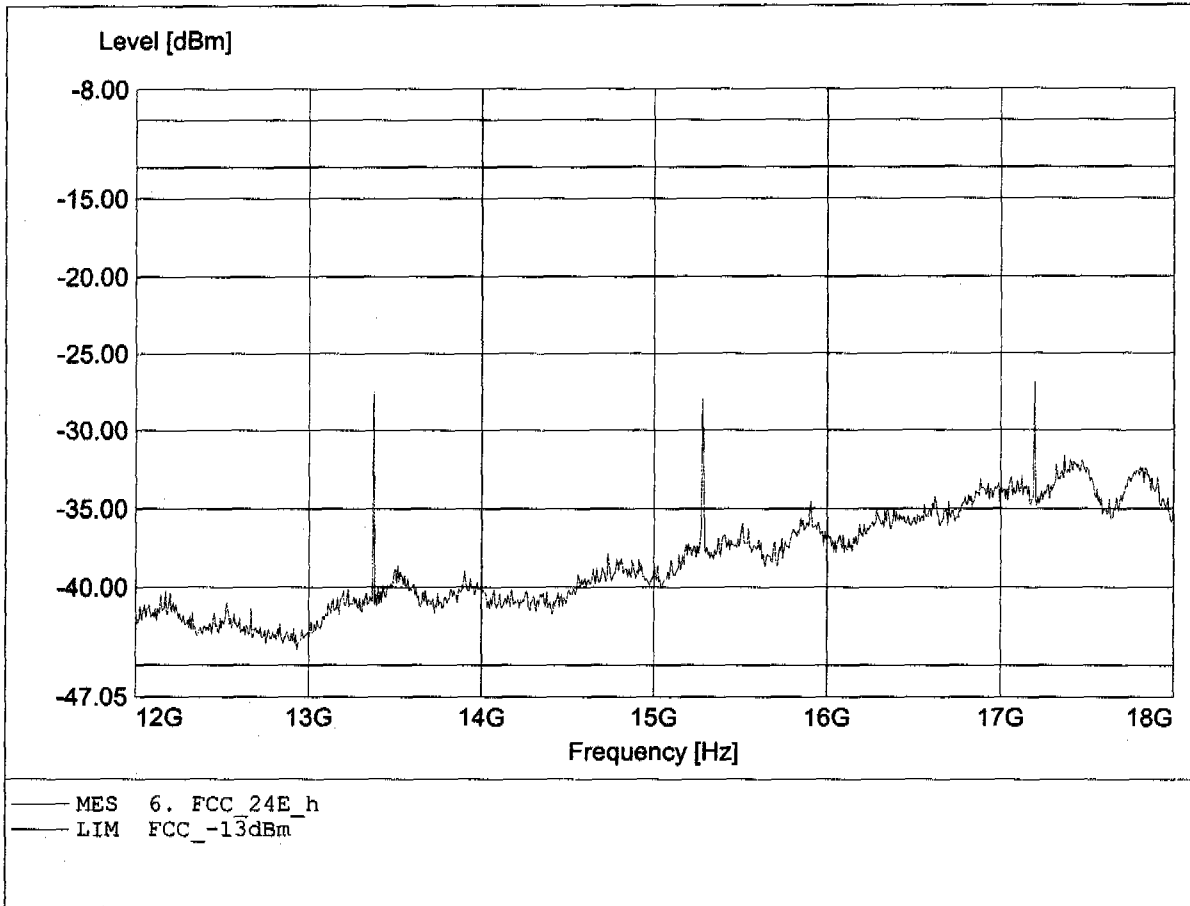


**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.340GHz, Pmax: -24.67dBm, RBW: 1MHz

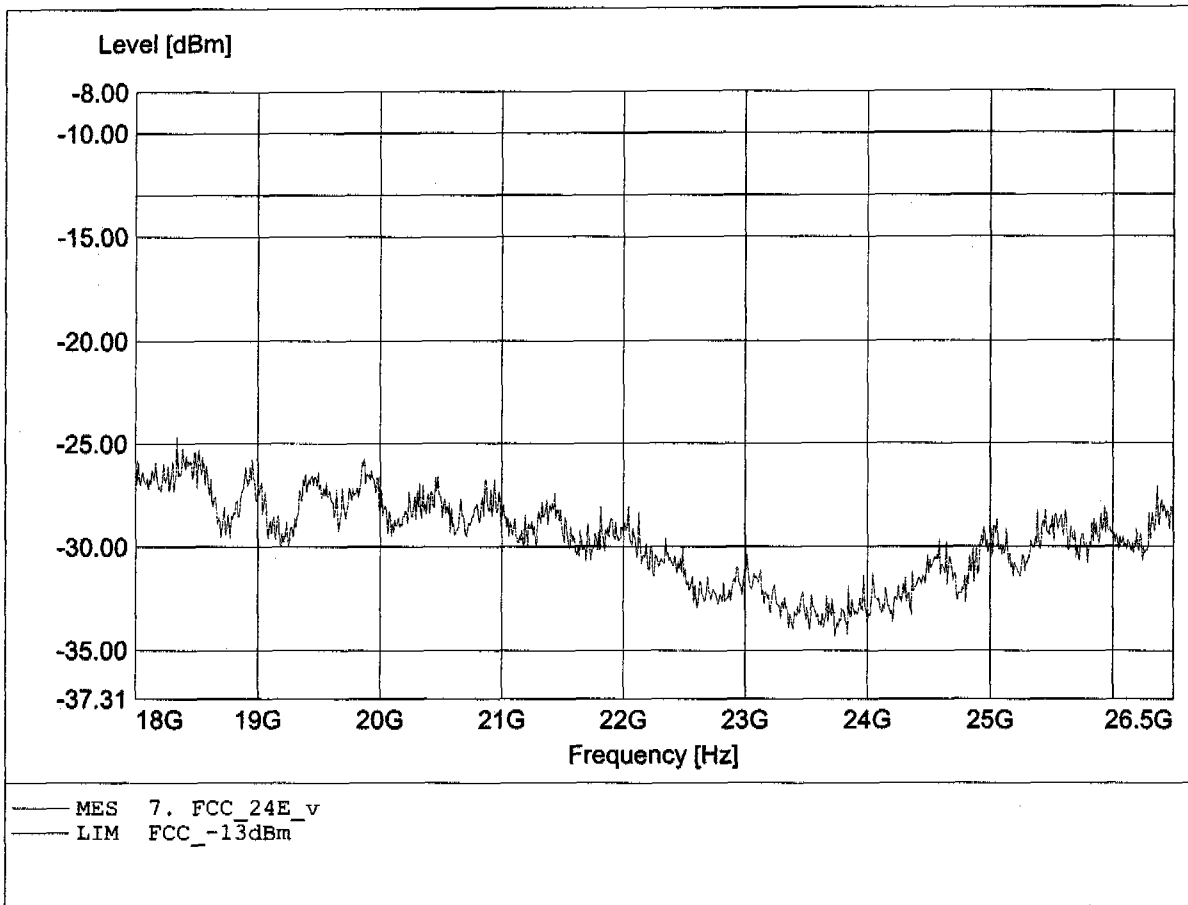

**Radiated Emissions Tx**  
**FCC RULES PART 24 SUBPART E**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 810  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §24.238  
Comment 1: Dist.: 3m, Ant.: HL025, amplif.  
Comment 2: Freq: 18.897GHz, Pmax: -24.49dBm, RBW: 1MHz

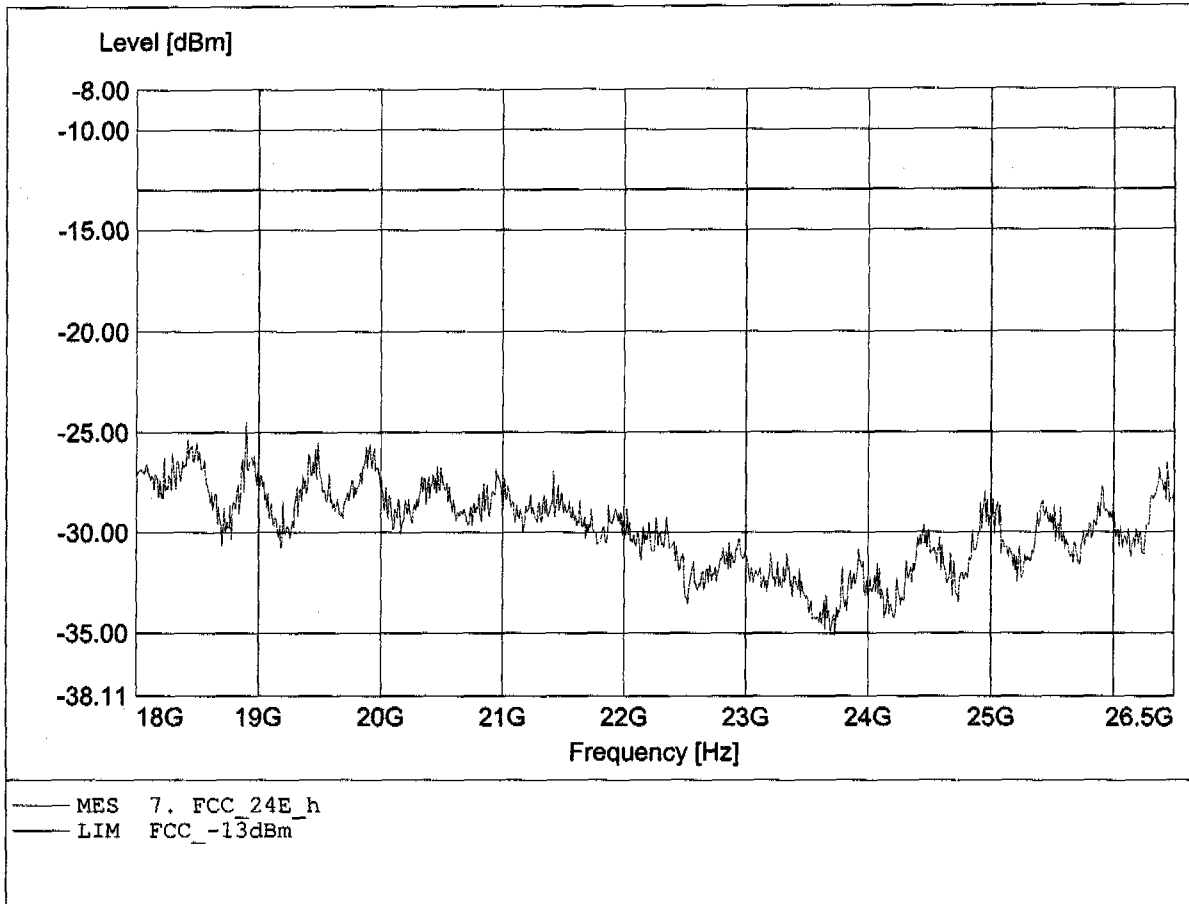




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 184.511MHz, Pmax: -53.75dBm, RBW: 1MHz

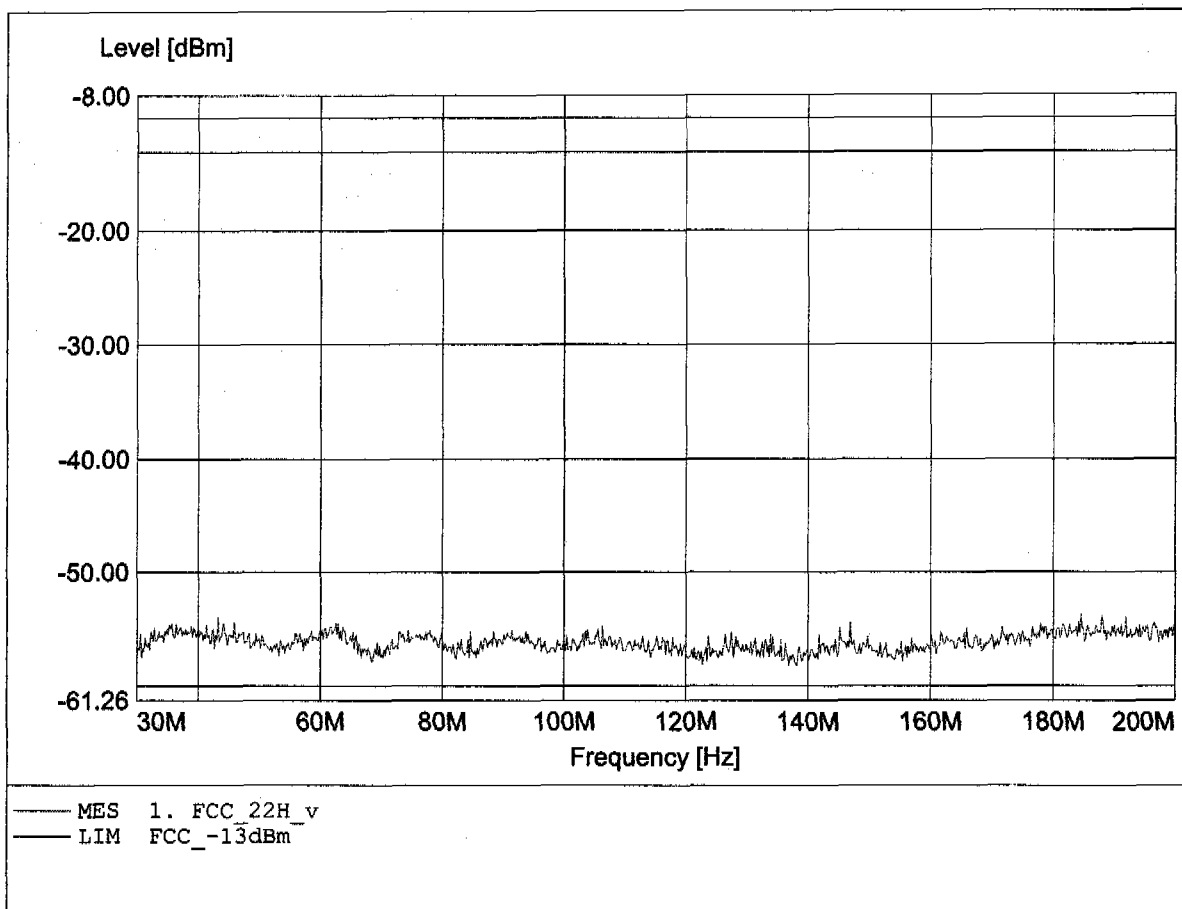


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 42.844MHz, Pmax: -52.36dBm, RBW: 1MHz

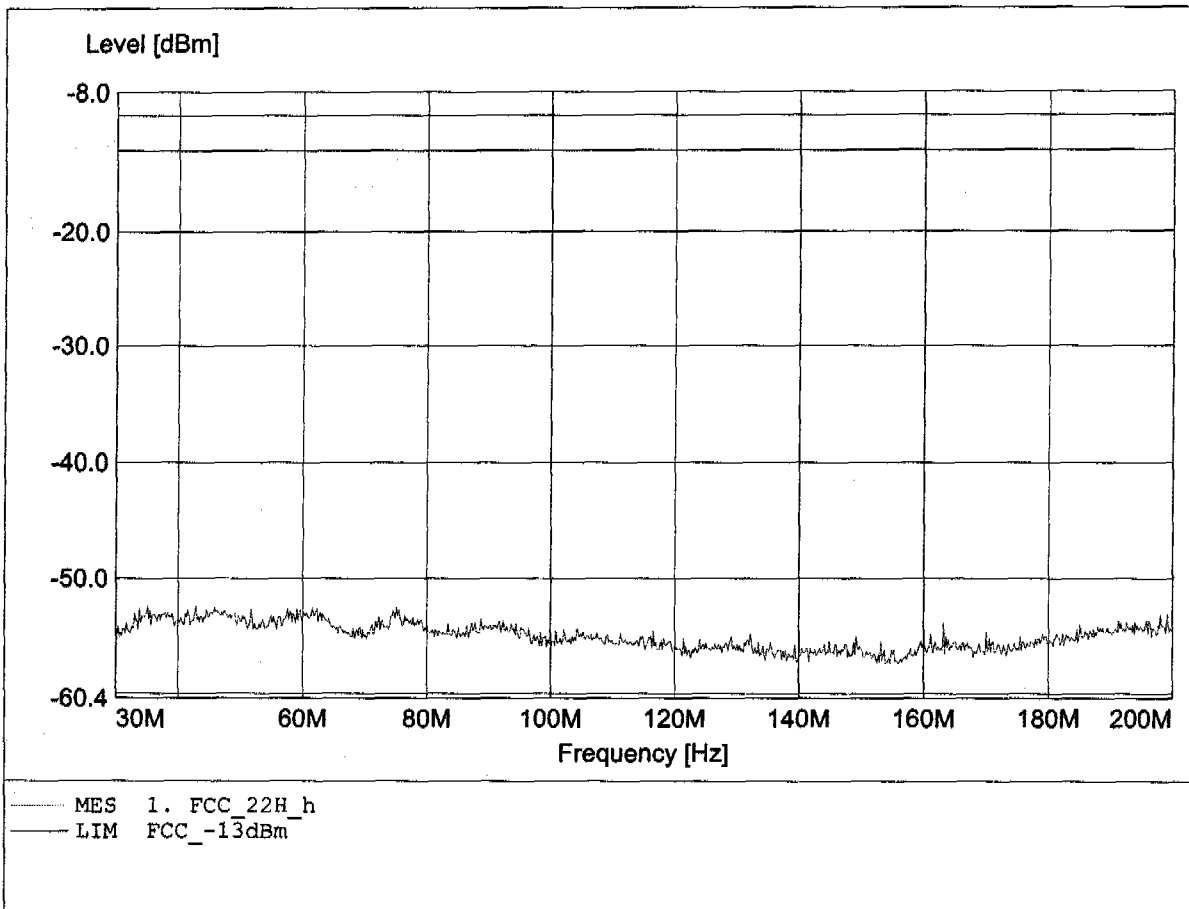


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 823.978MHz, Pmax: -22.88dBm, RBW: 1MHz

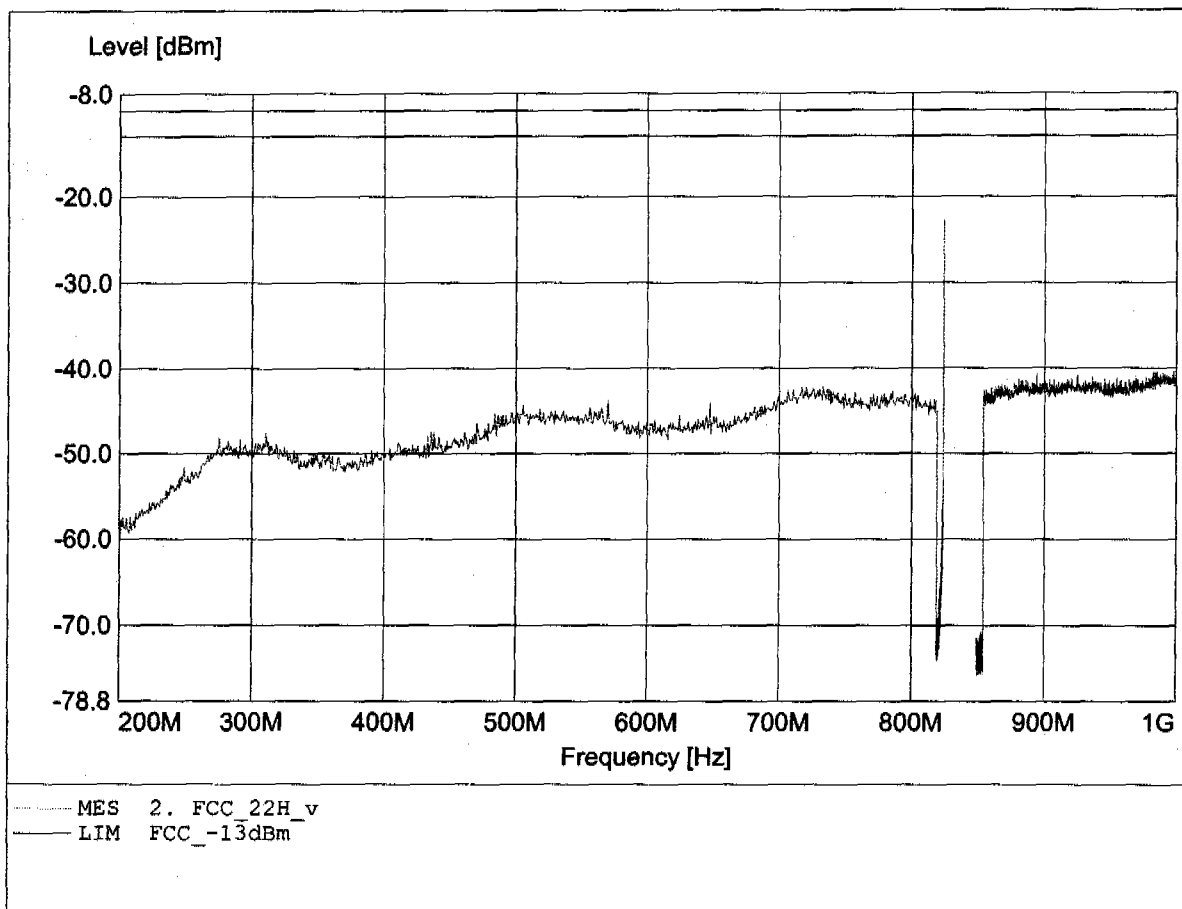


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 857.731MHz, Pmax: -38.22dBm, RBW: 1MHz

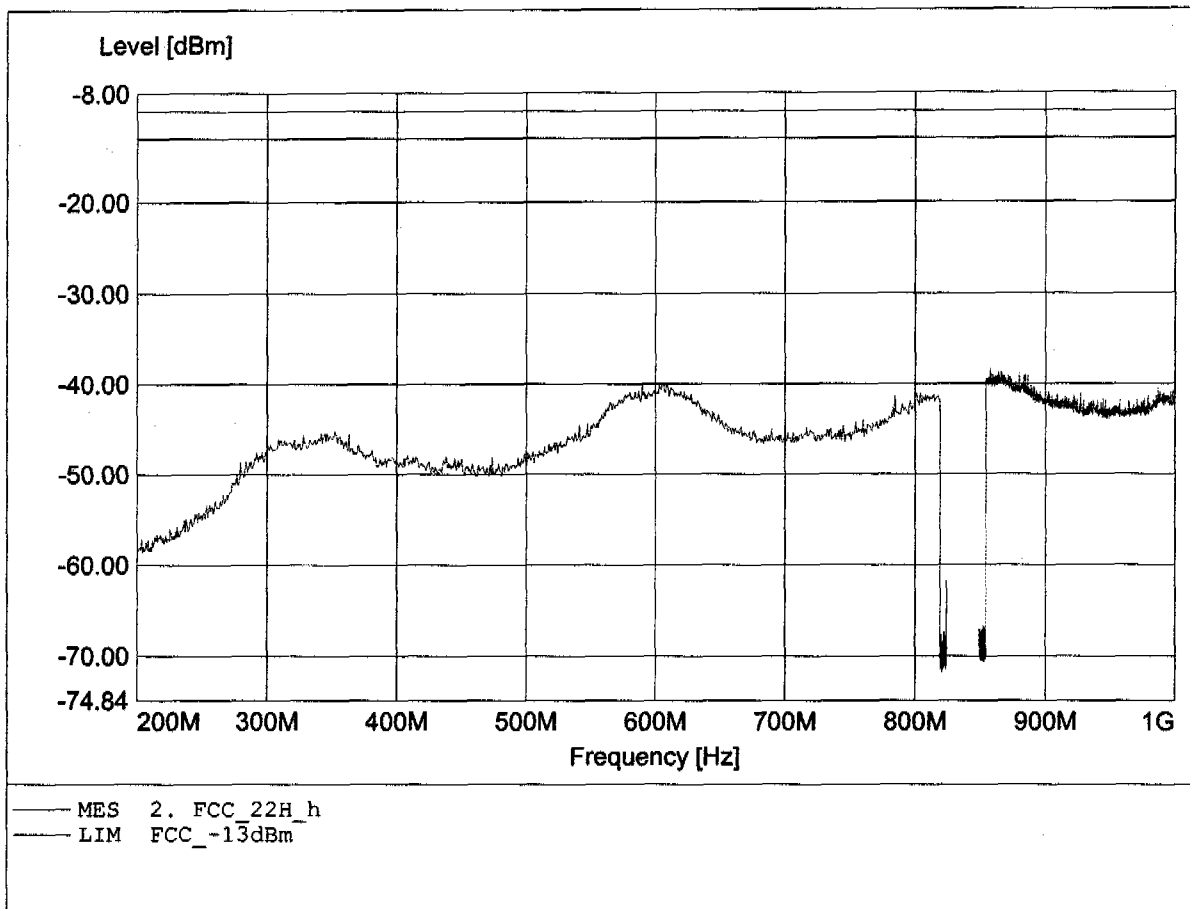


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.653GHz, Pmax: -17.02dBm, RBW: 1MHz

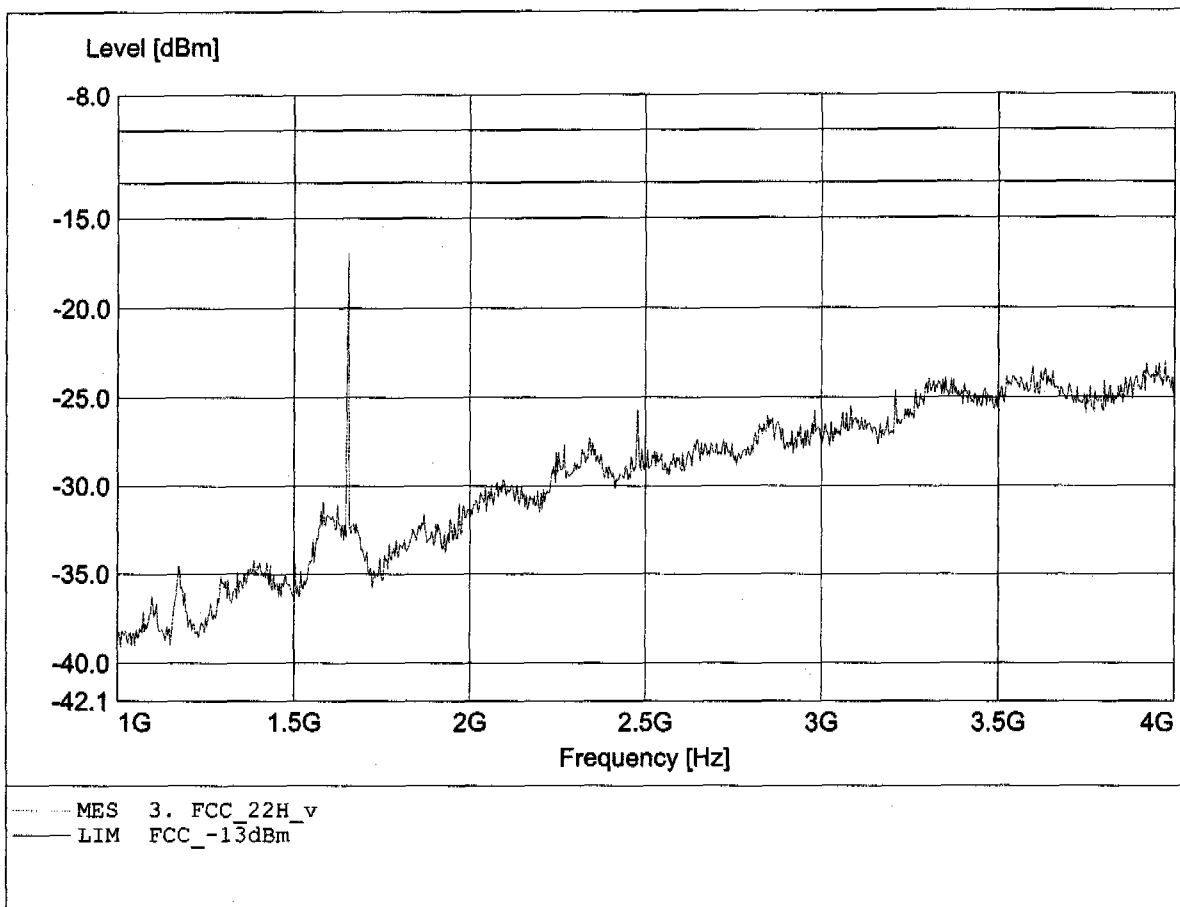


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.987GHz, Pmax: -22.69dBm, RBW: 1MHz

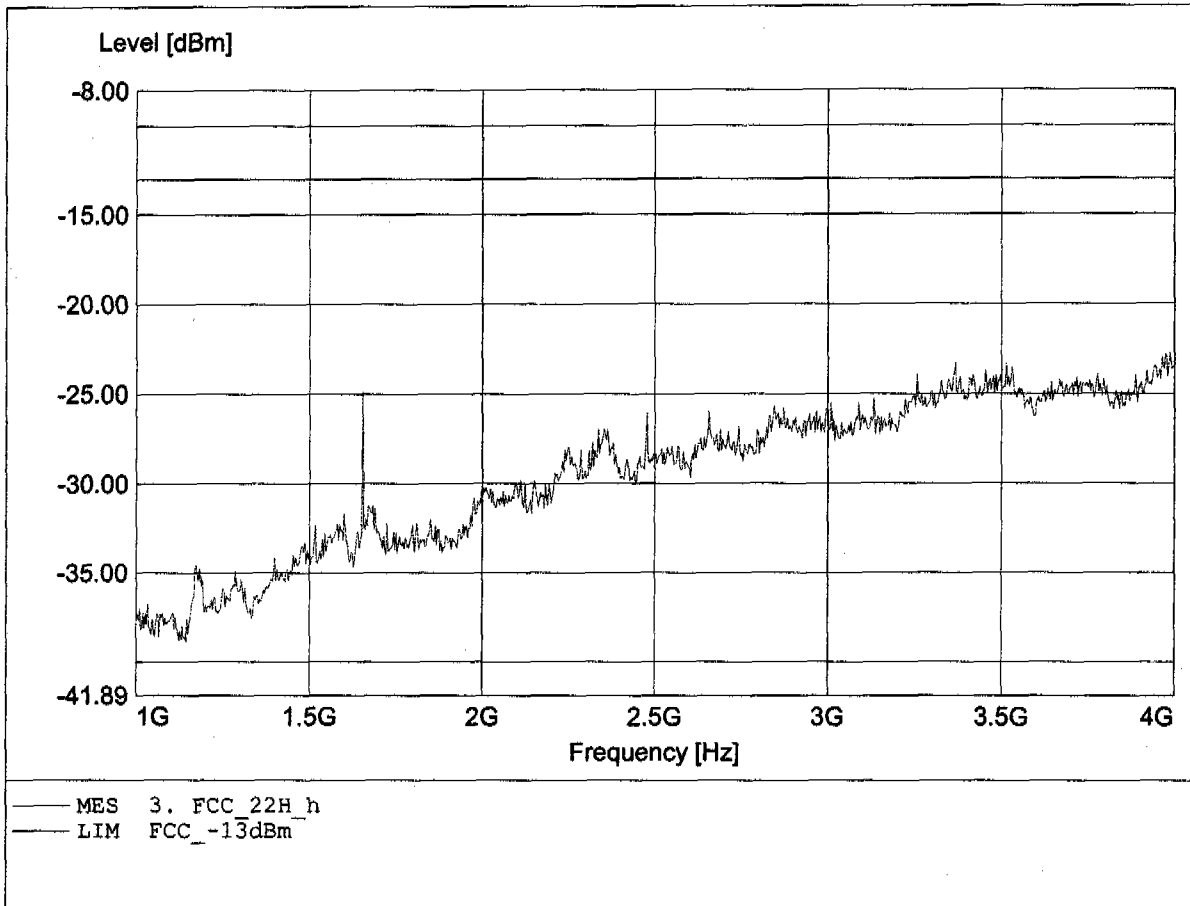


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.773GHz, Pmax: -38.50dBm, RBW: 1MHz

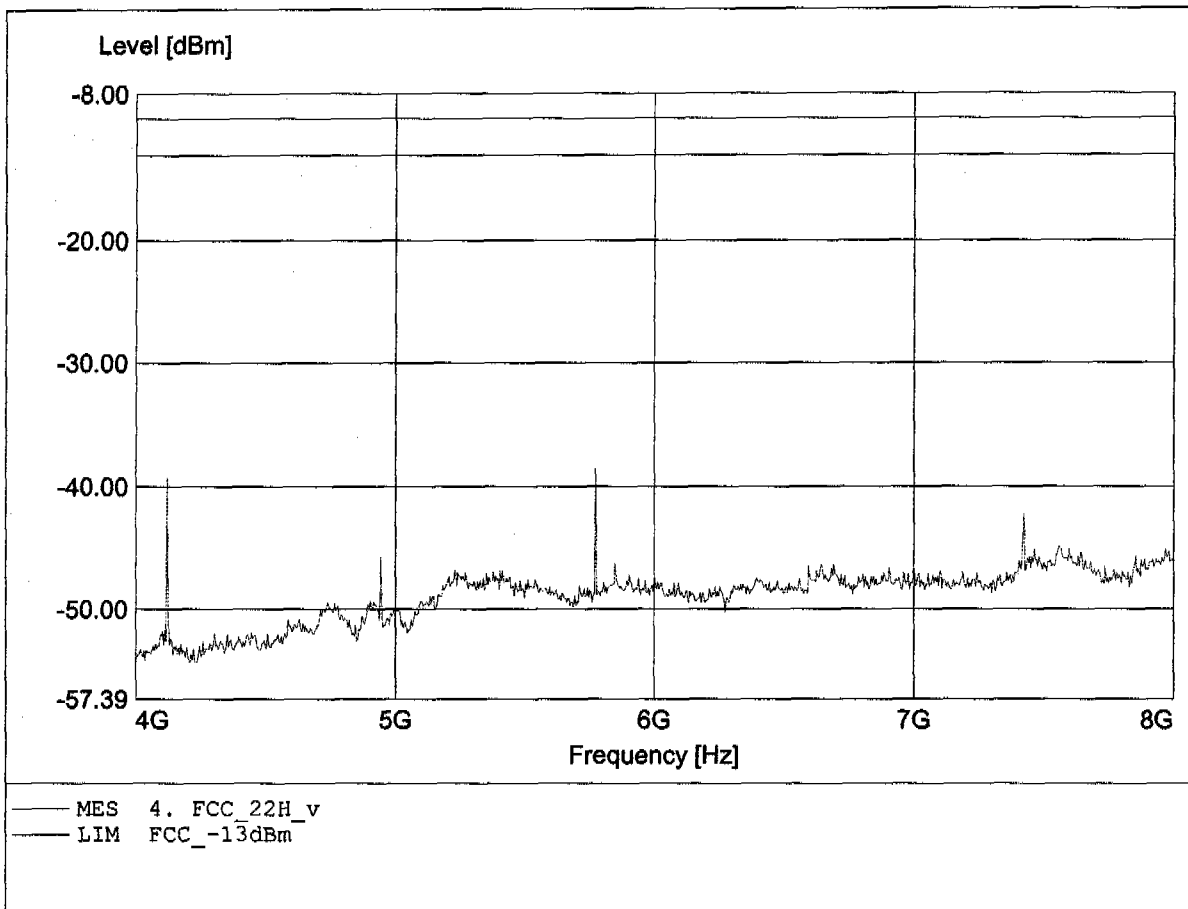

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.773GHz, Pmax: -40.02dBm, RBW: 1MHz

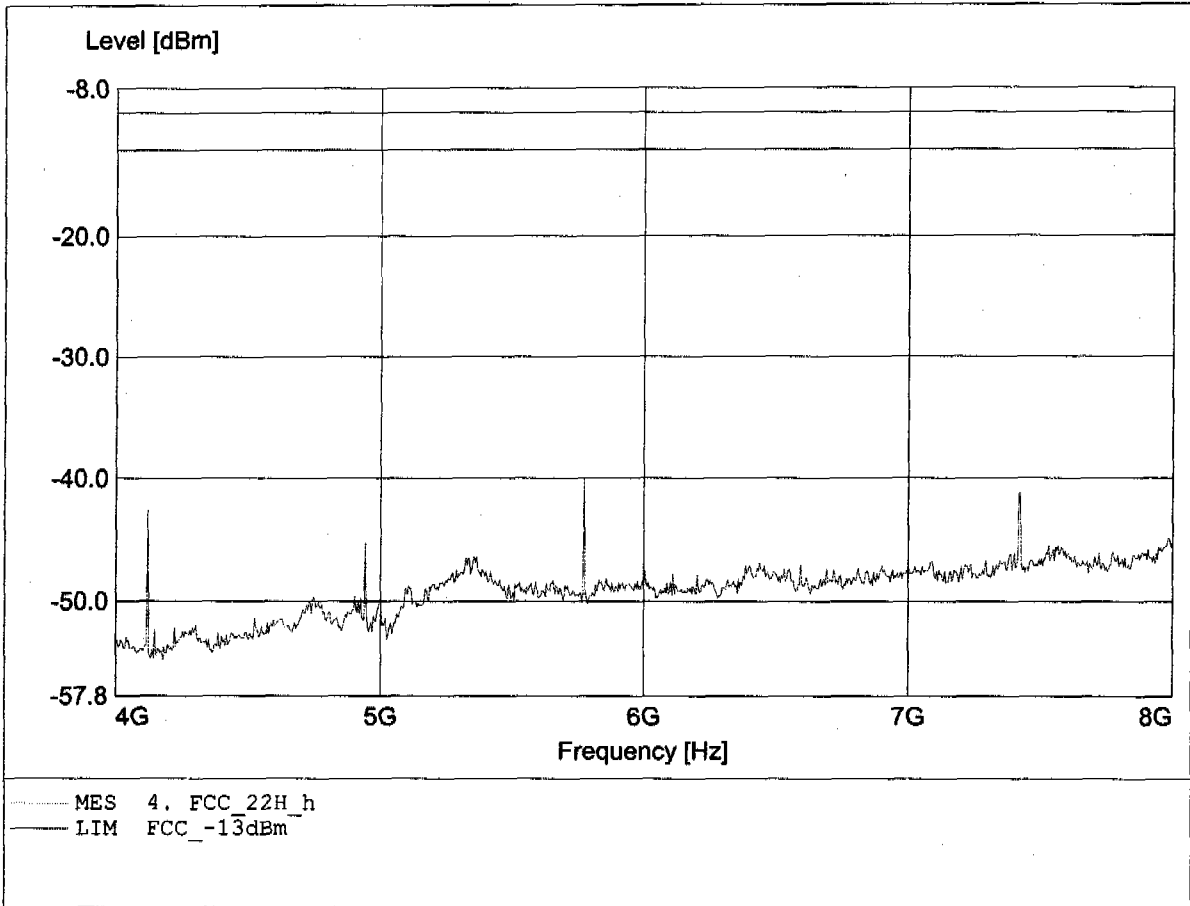




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.071GHz, Pmax: -31.91dBm, RBW: 1MHz

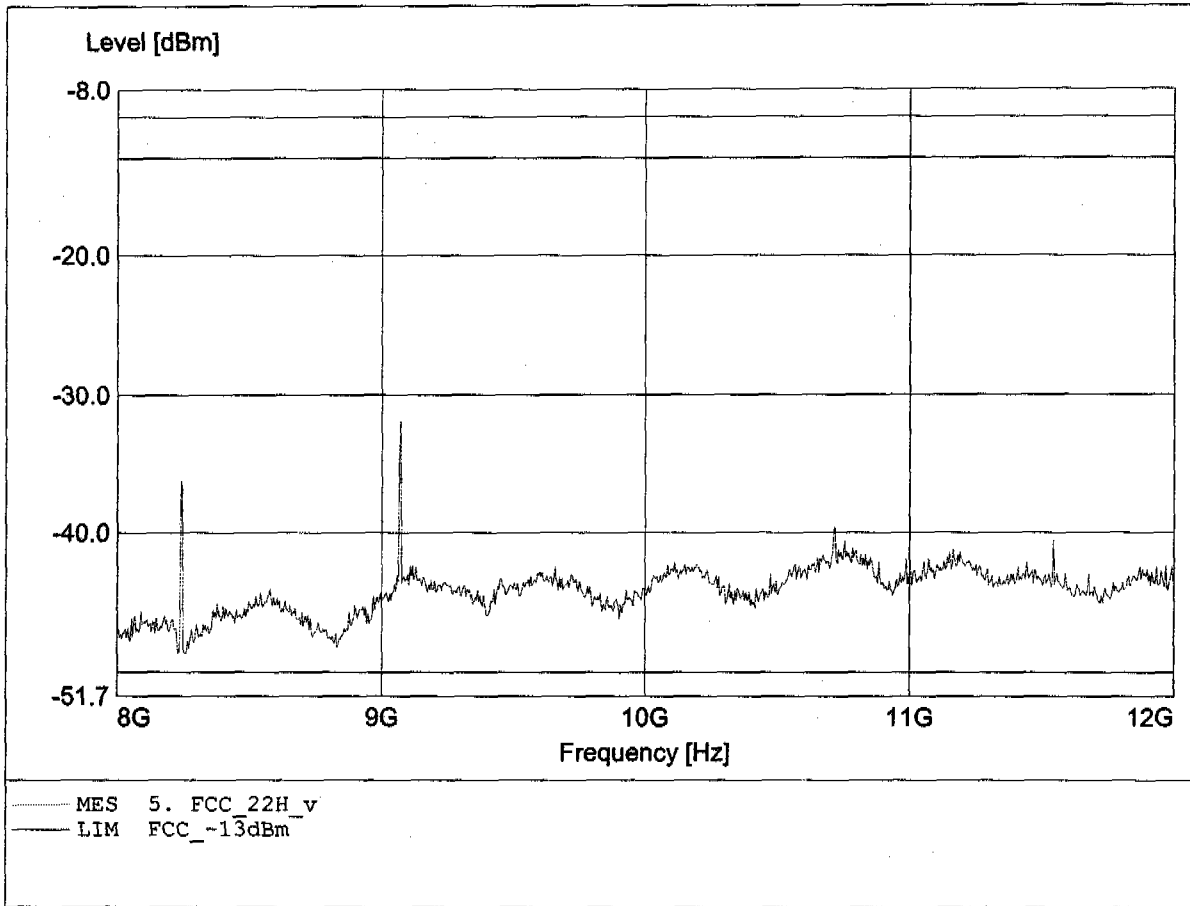


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 128  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.067GHz, Pmax: -31.99dBm, RBW: 1MHz

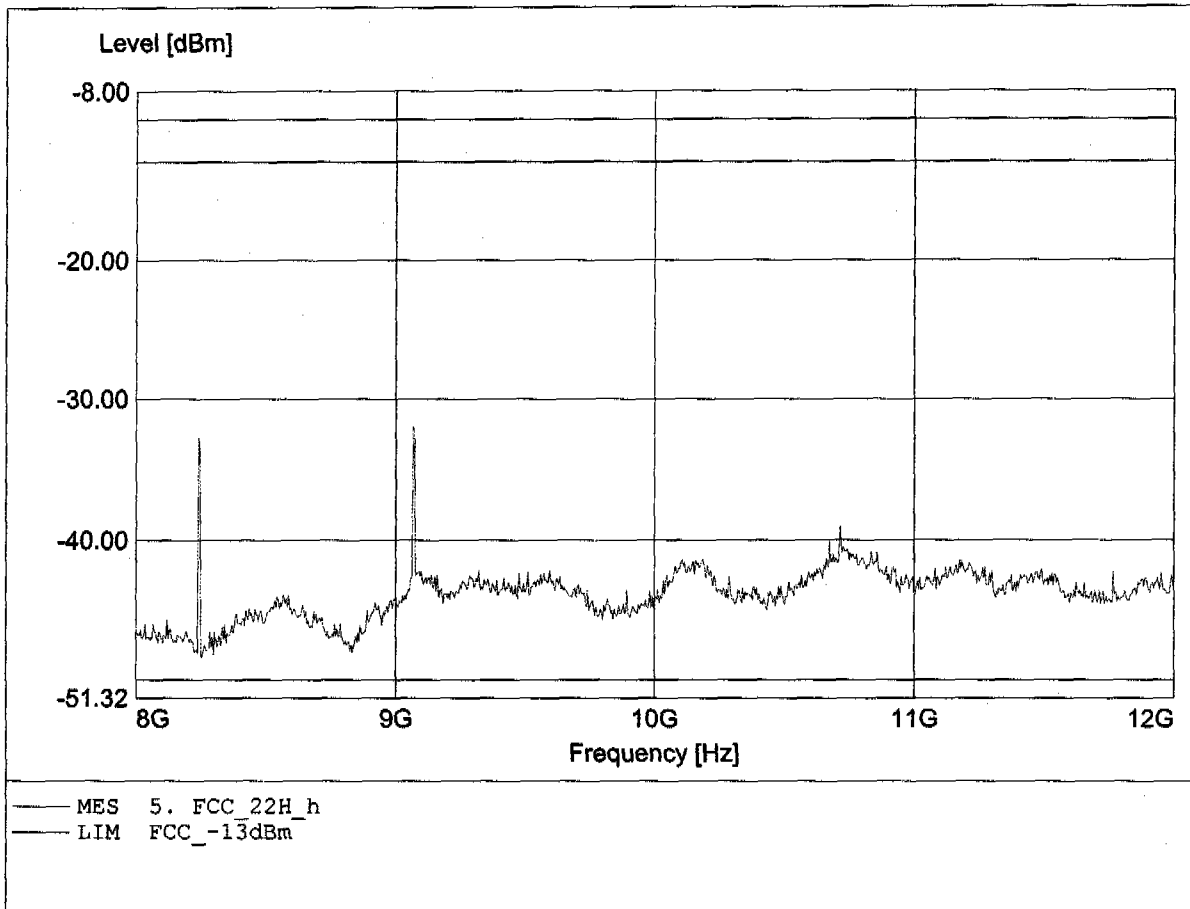


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 182.056MHz, Pmax: -52.97dBm, RBW: 1MHz

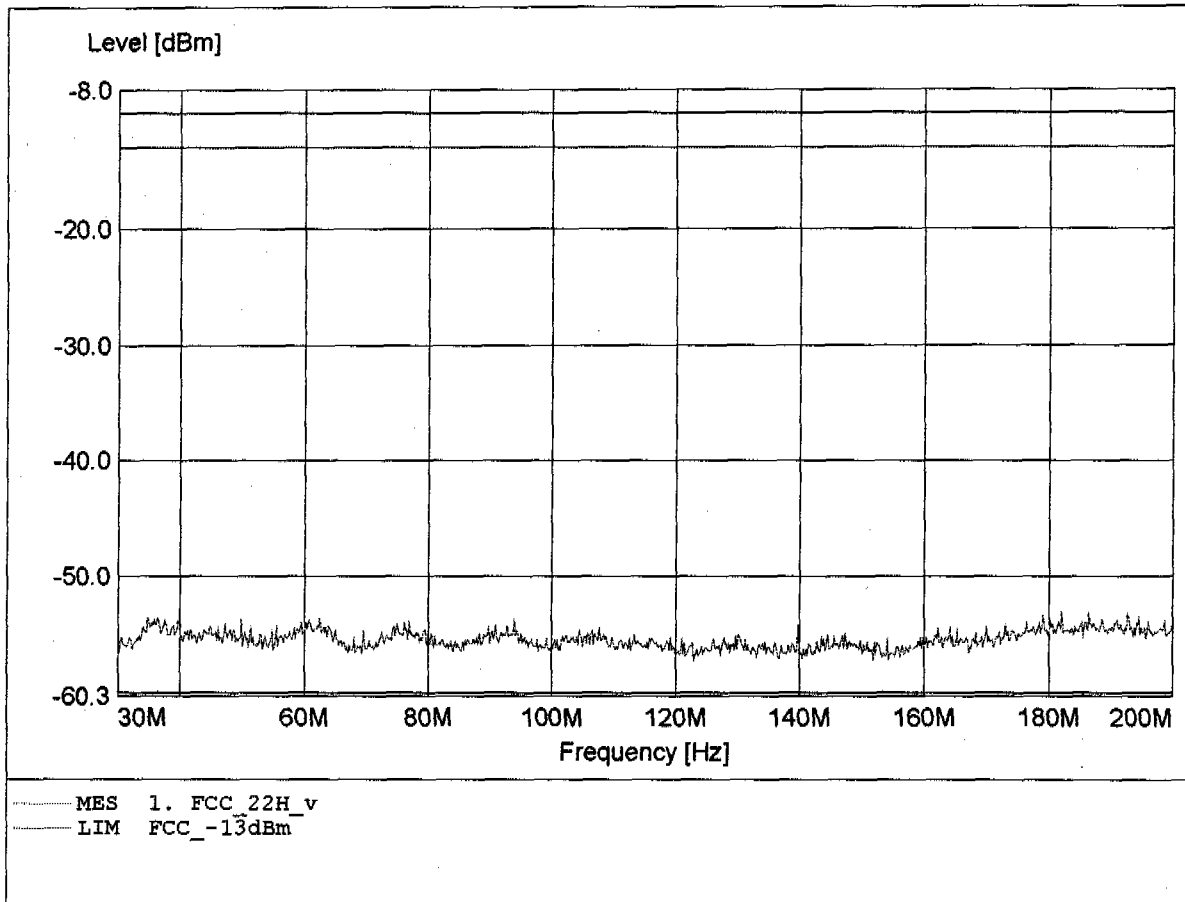


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 36.800MHz, Pmax: -52.29dBm, RBW: 1MHz

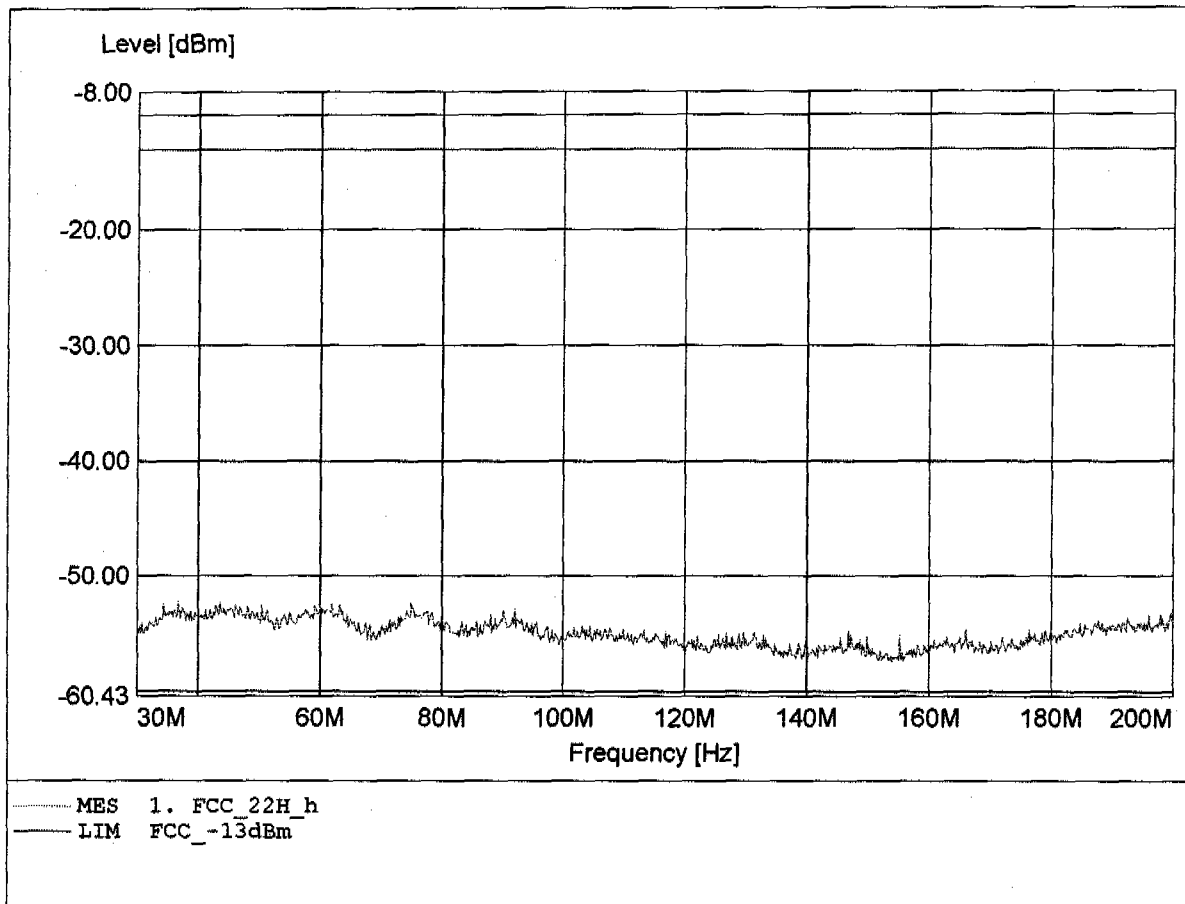


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 993.673MHz, Pmax: -39.40dBm, REW: 1MHz

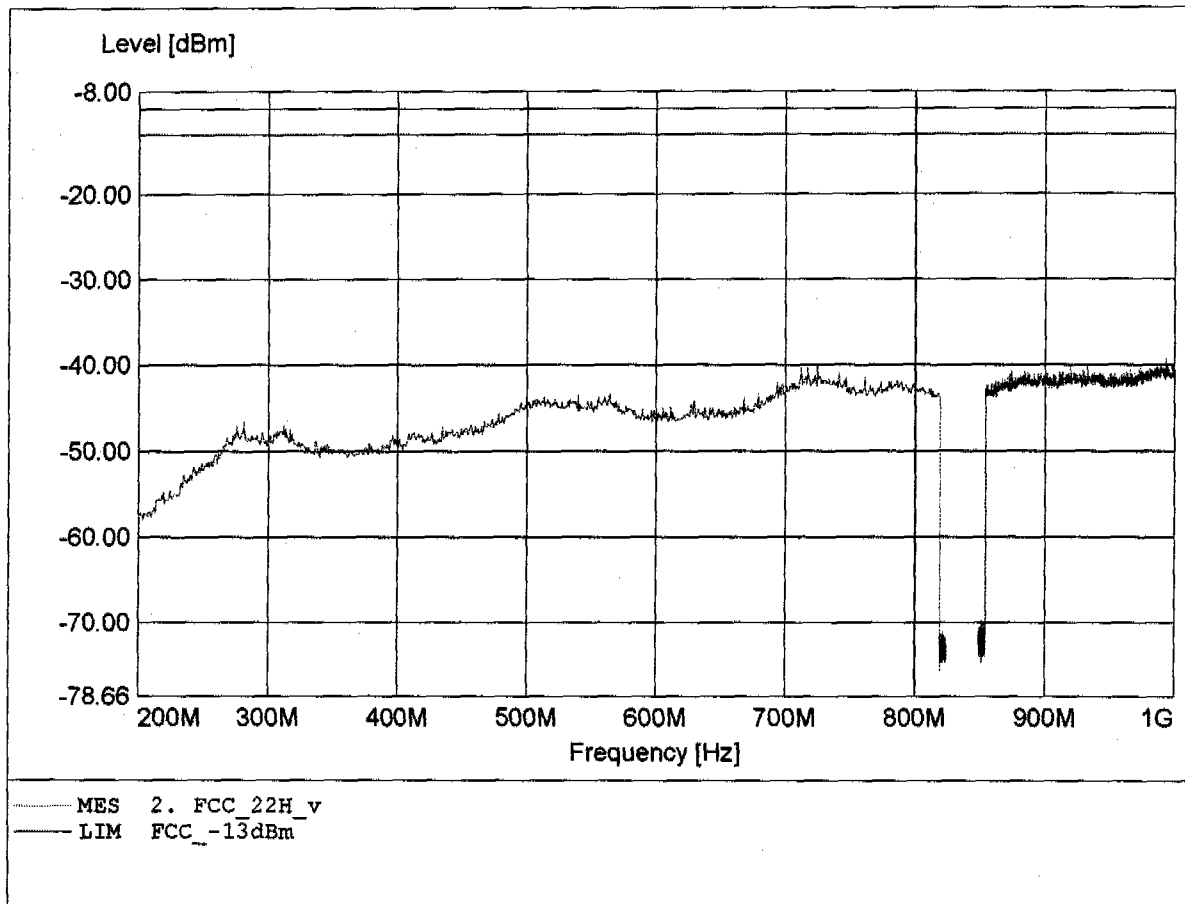


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 856.271MHz, Pmax: -37.60dBm, RBW: 1MHz

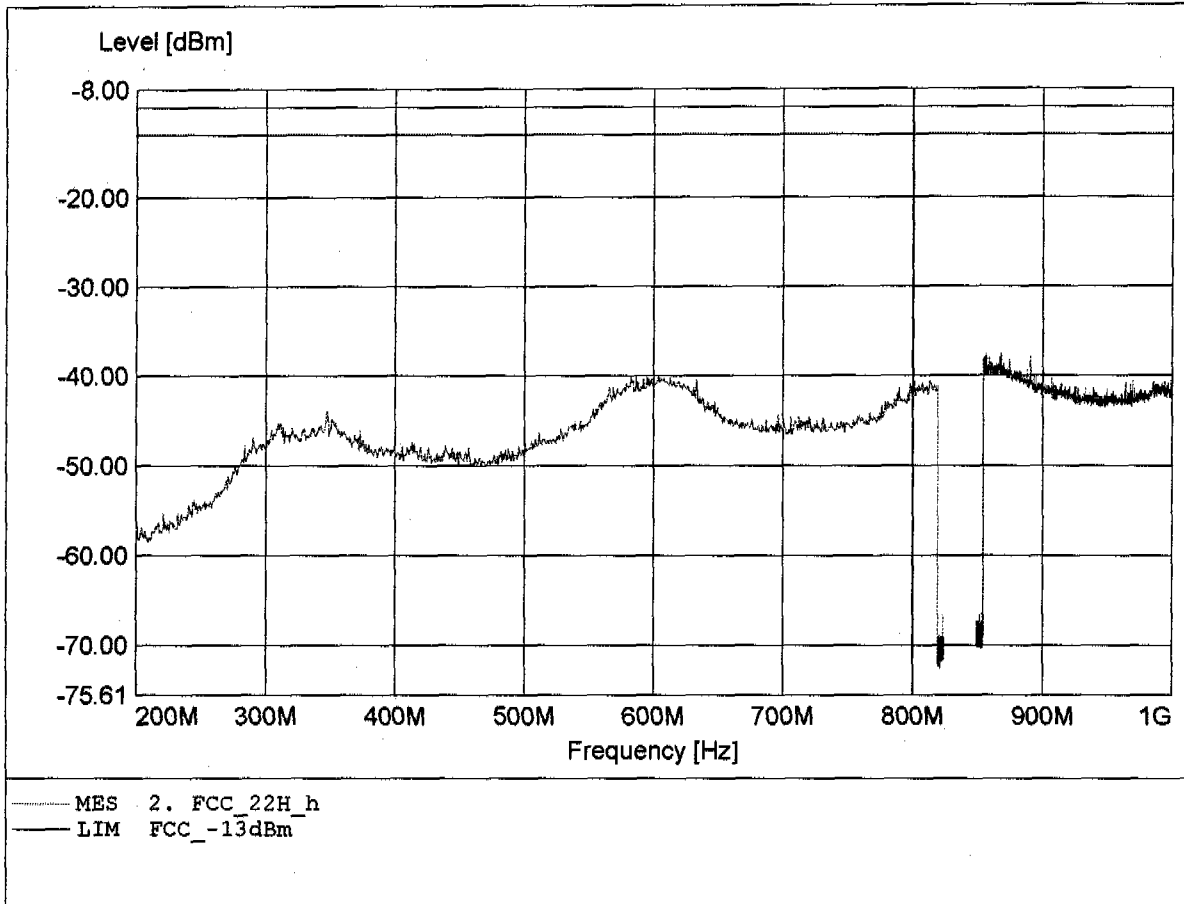


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.677GHz, Pmax: -13.57dBm, RBW: 1MHz

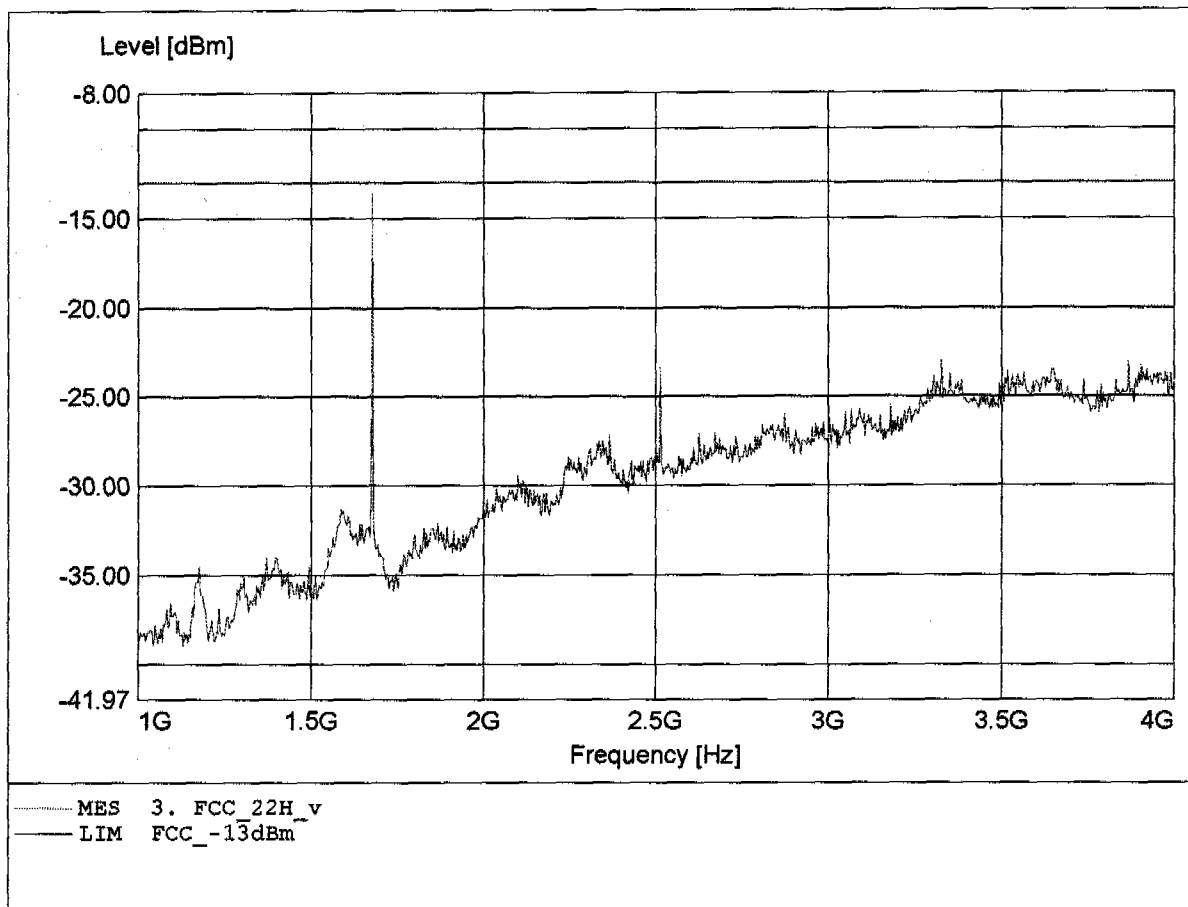

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.677GHz, Pmax: -19.67dBm, RBW: 1MHz

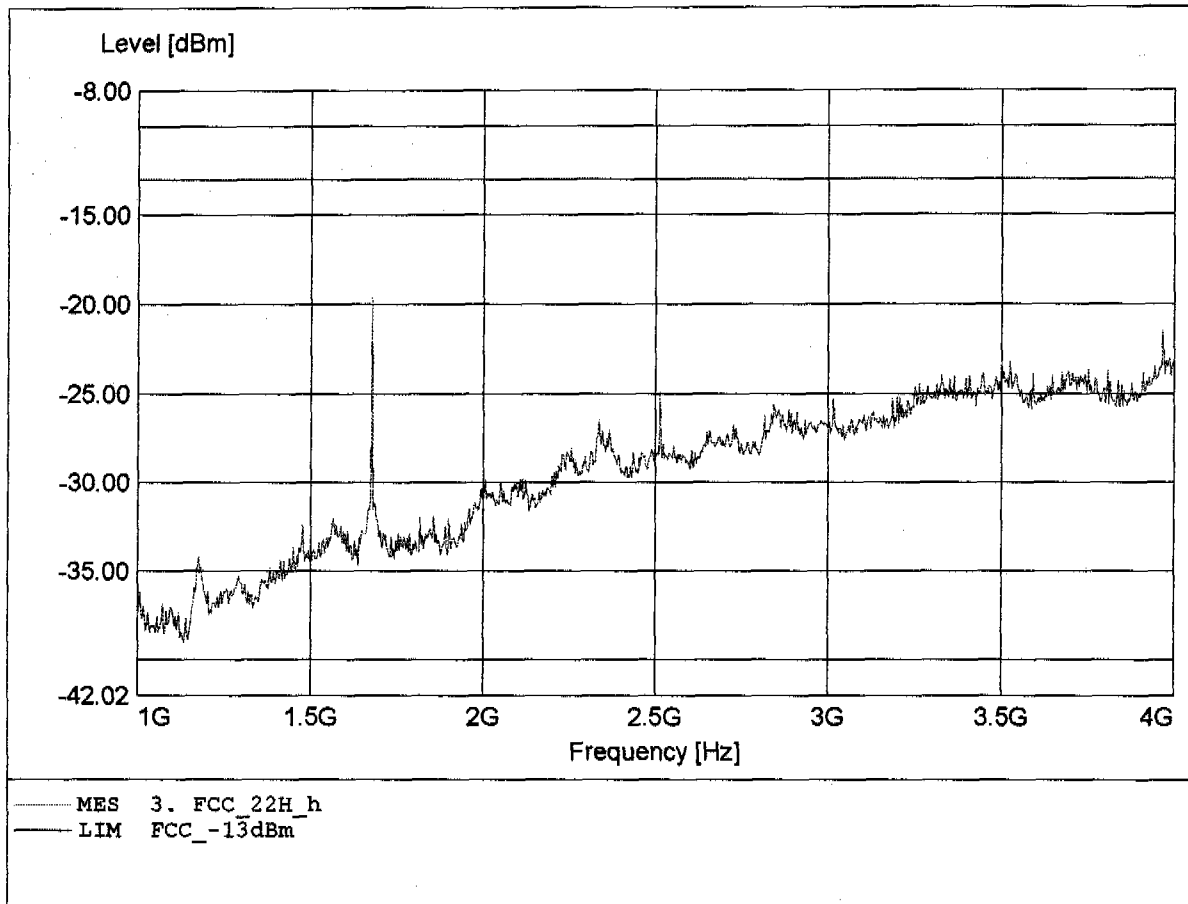




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 5.858GHz, Pmax: -37.35dBm, RBW: 1MHz

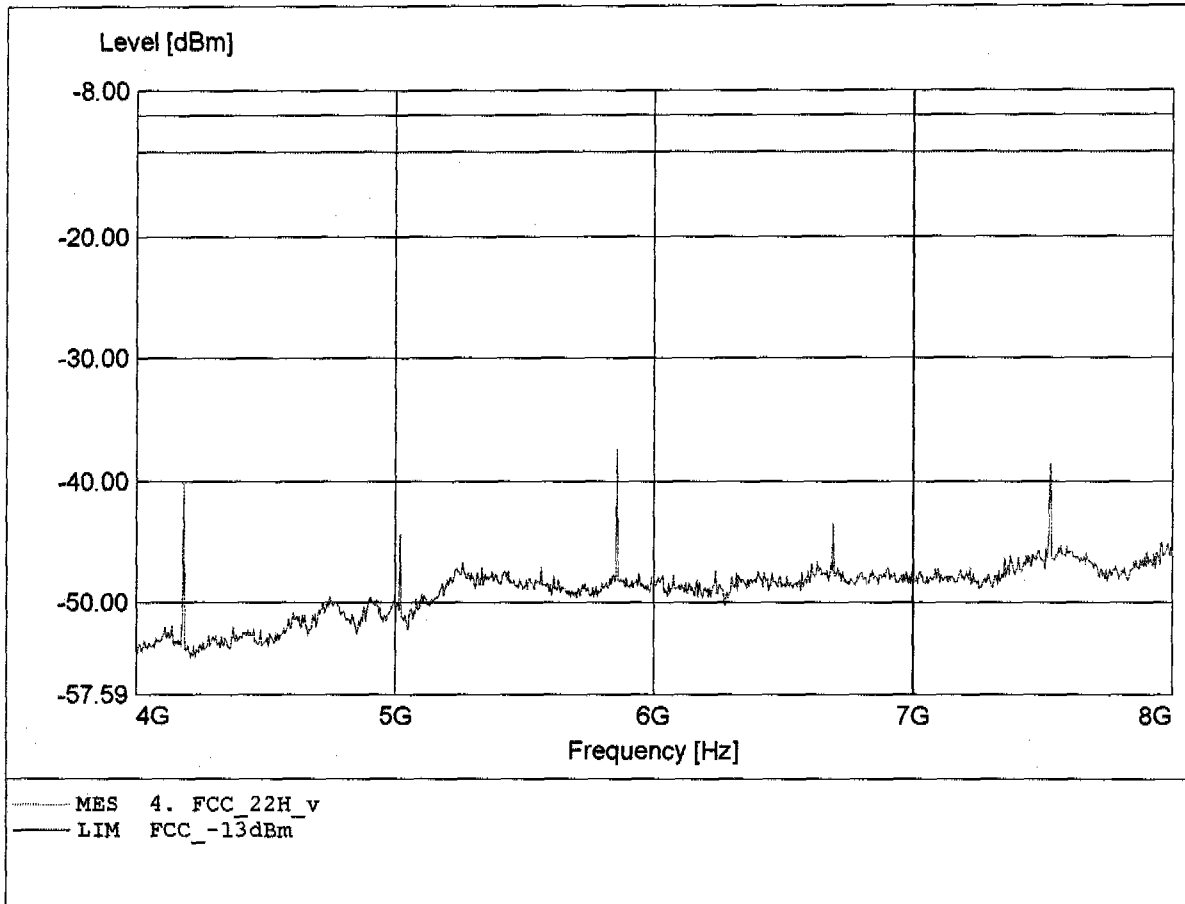


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.529GHz, Pmax: -36.01dBm, RBW: 1MHz

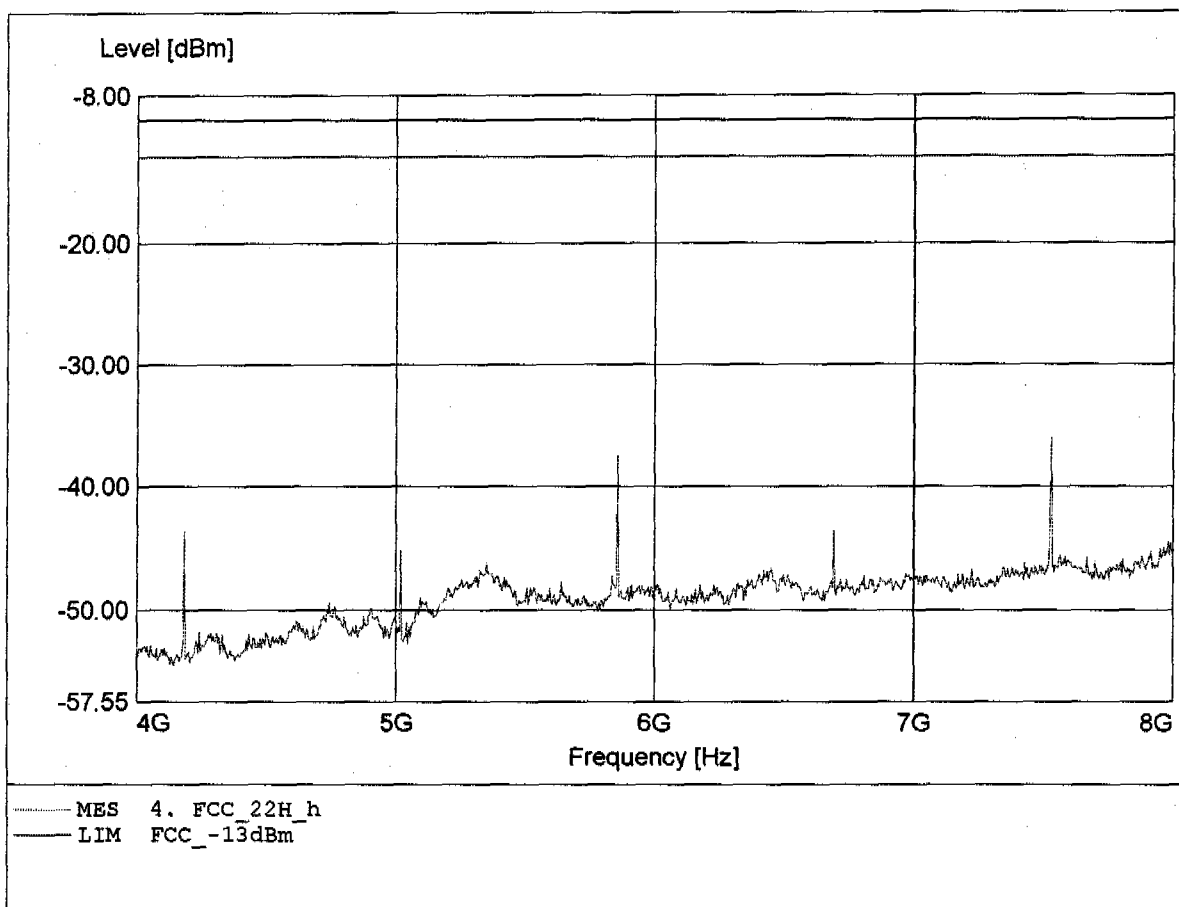


**Radiated Emissions Tx  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.200GHz, Pmax: -38.75dBm, RBW: 1MHz

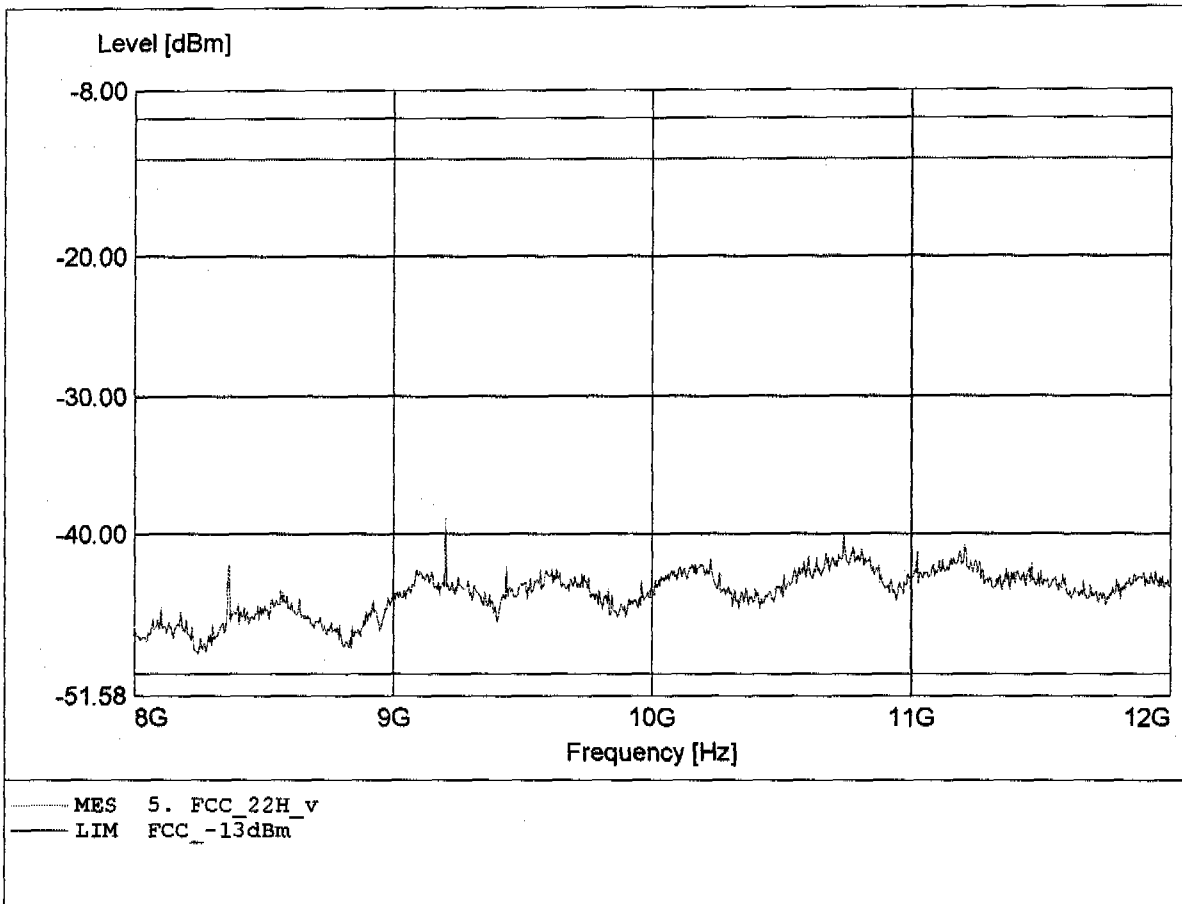


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 188  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 10.676GHz, Pmax: -40.30dBm, RBW: 1MHz

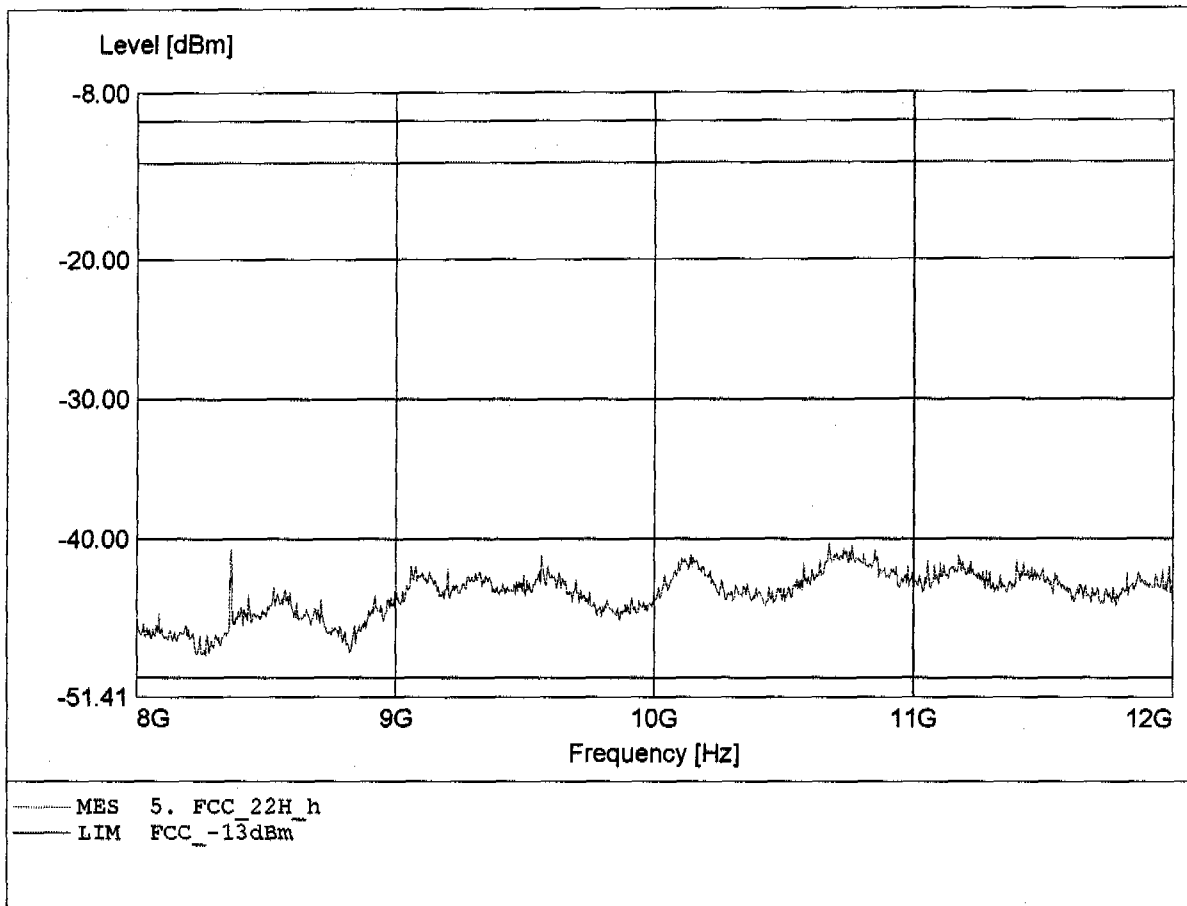


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 39.633MHz, Pmax: -52.74dBm, RBW: 1MHz

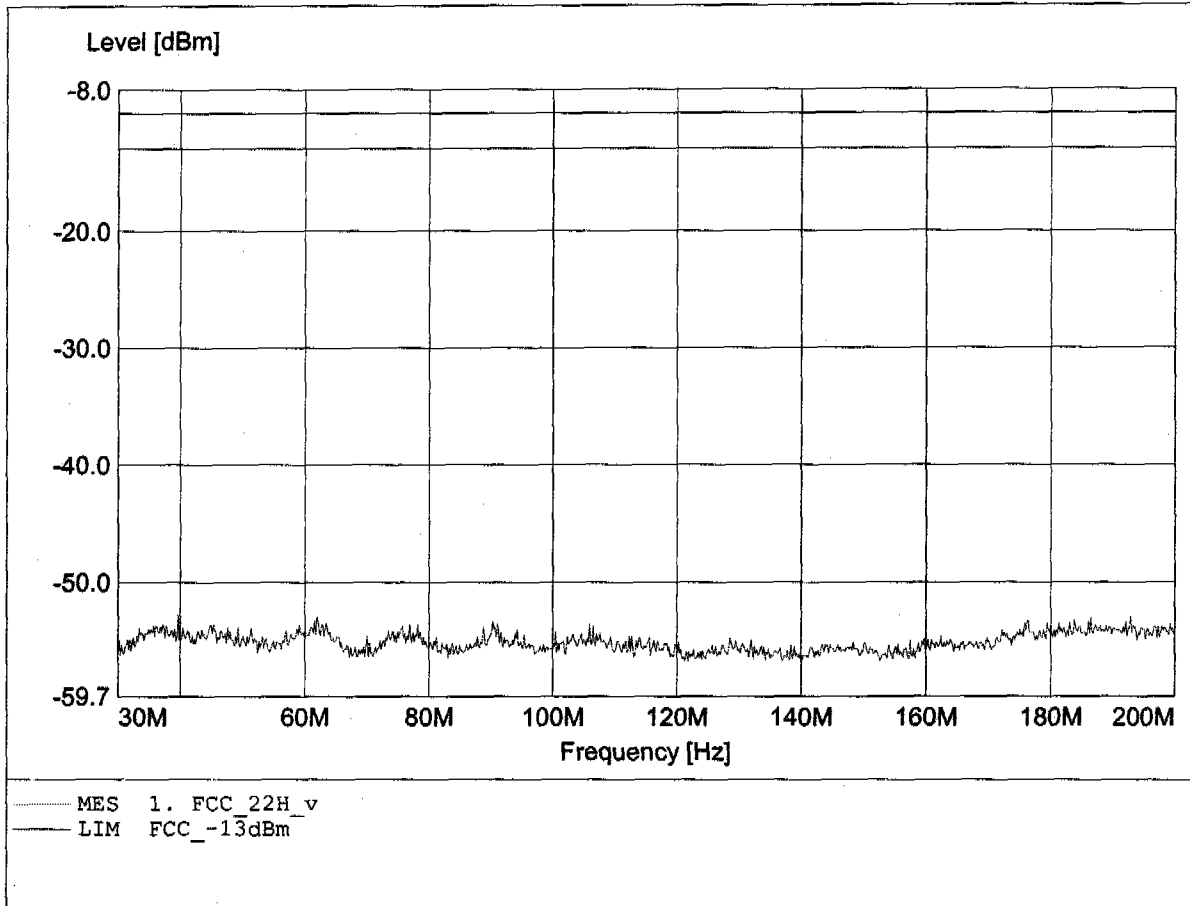


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Fleischer  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HK 116  
Comment 2: Freq: 61.733MHz, Pmax: -52.04dBm, RBW: 1MHz

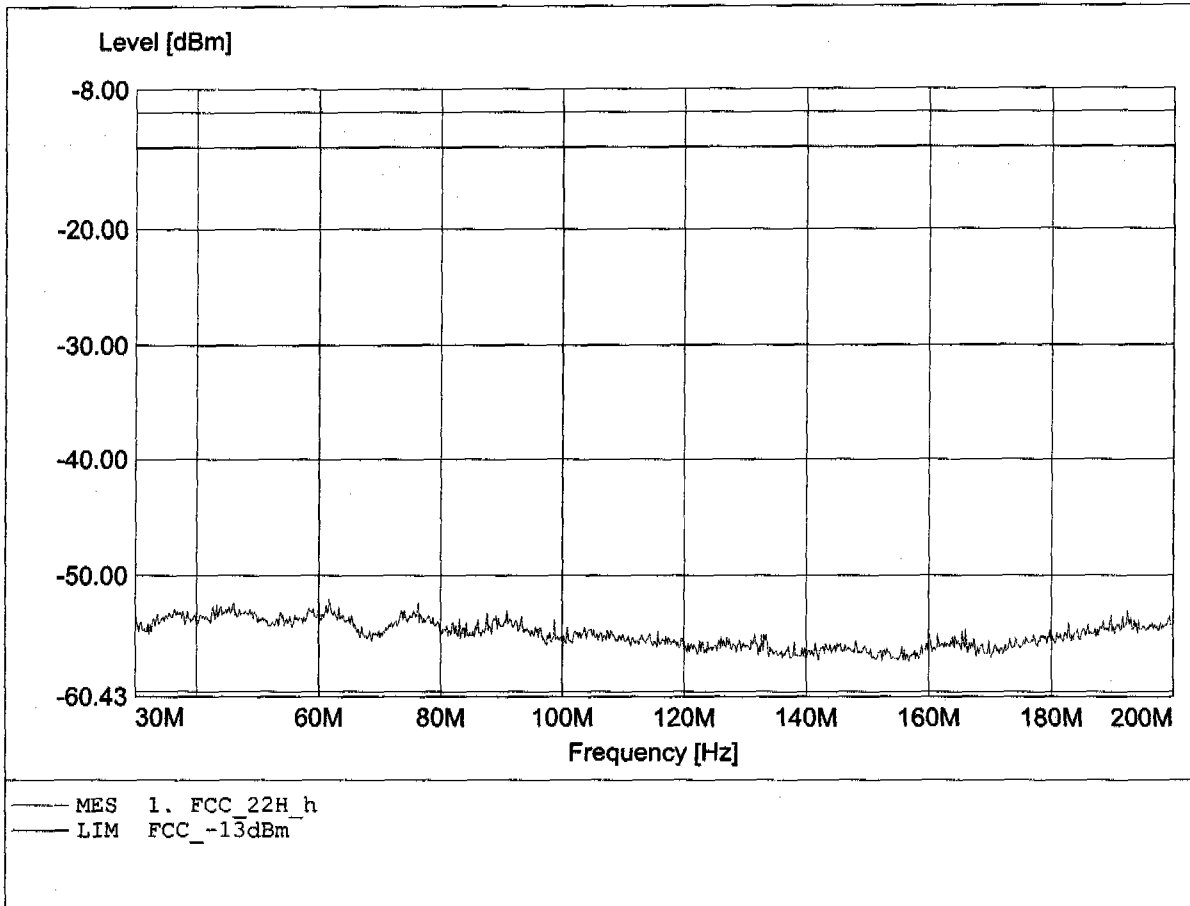


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 854.000MHz, Pmax: -36.02dBm, RBW: 1MHz

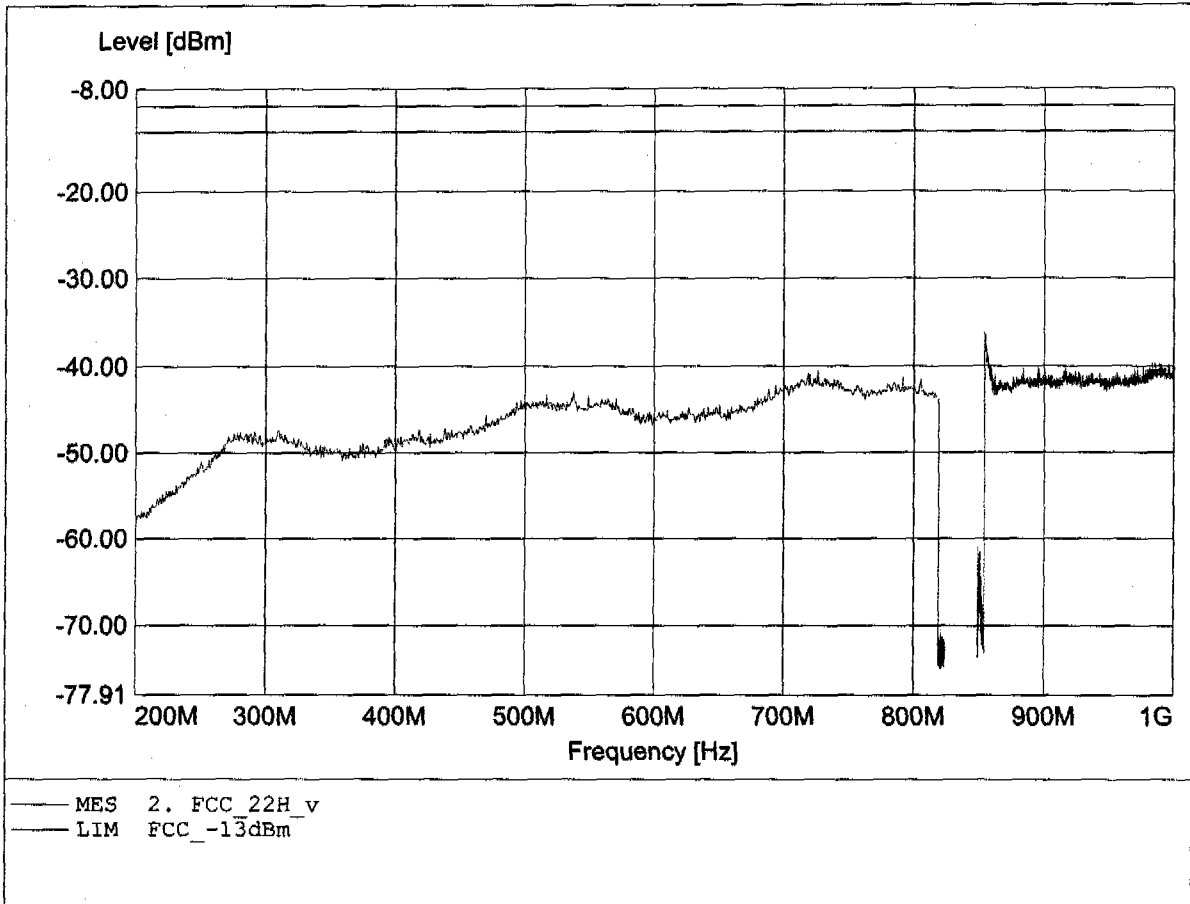

**Radiated Emissions Tx  
FCC RULES PART 22 SUBPART H**


Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL 223+notch  
Comment 2: Freq: 867.789MHz, Pmax: -38.36dBm, RBW: 1MHz

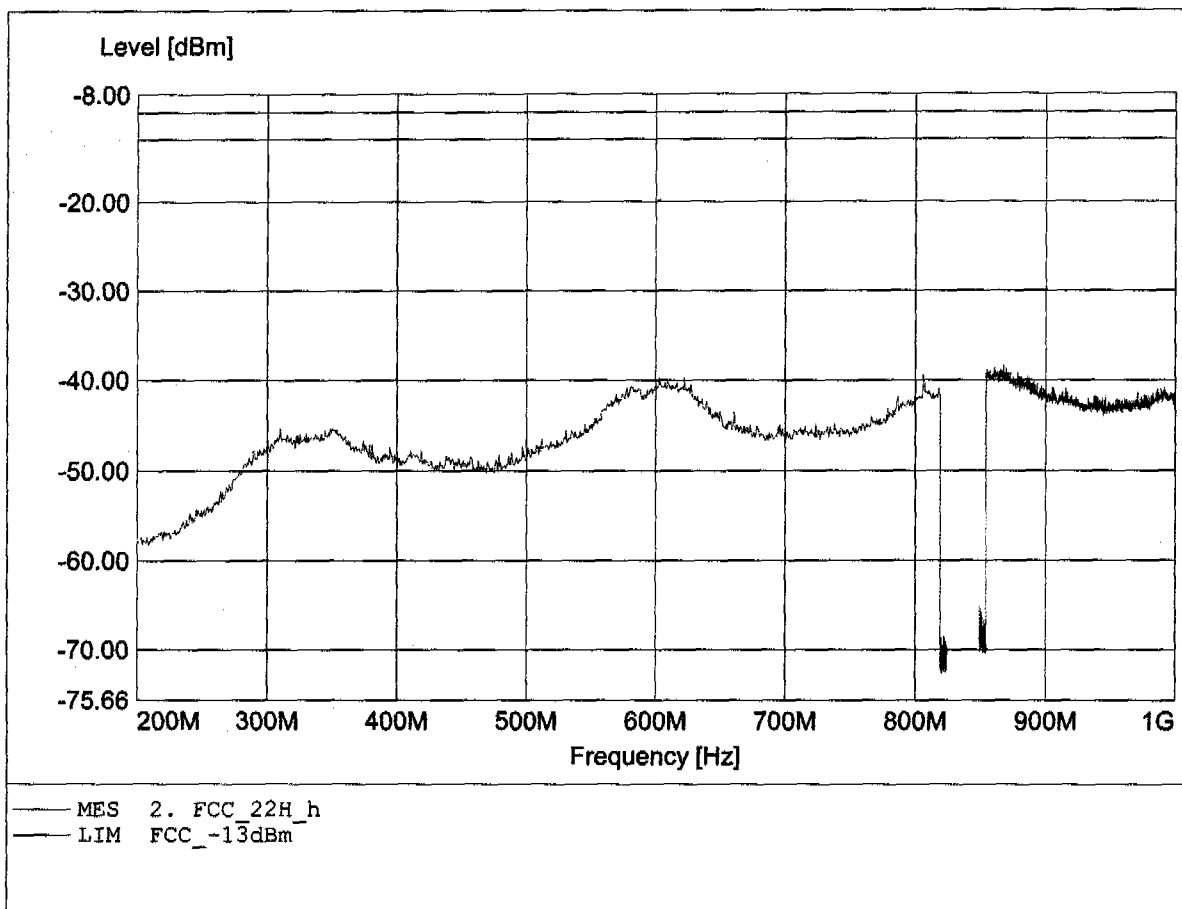




**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to S22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 1.700GHz, Pmax: -18.90dBm, RBW: 1MHz

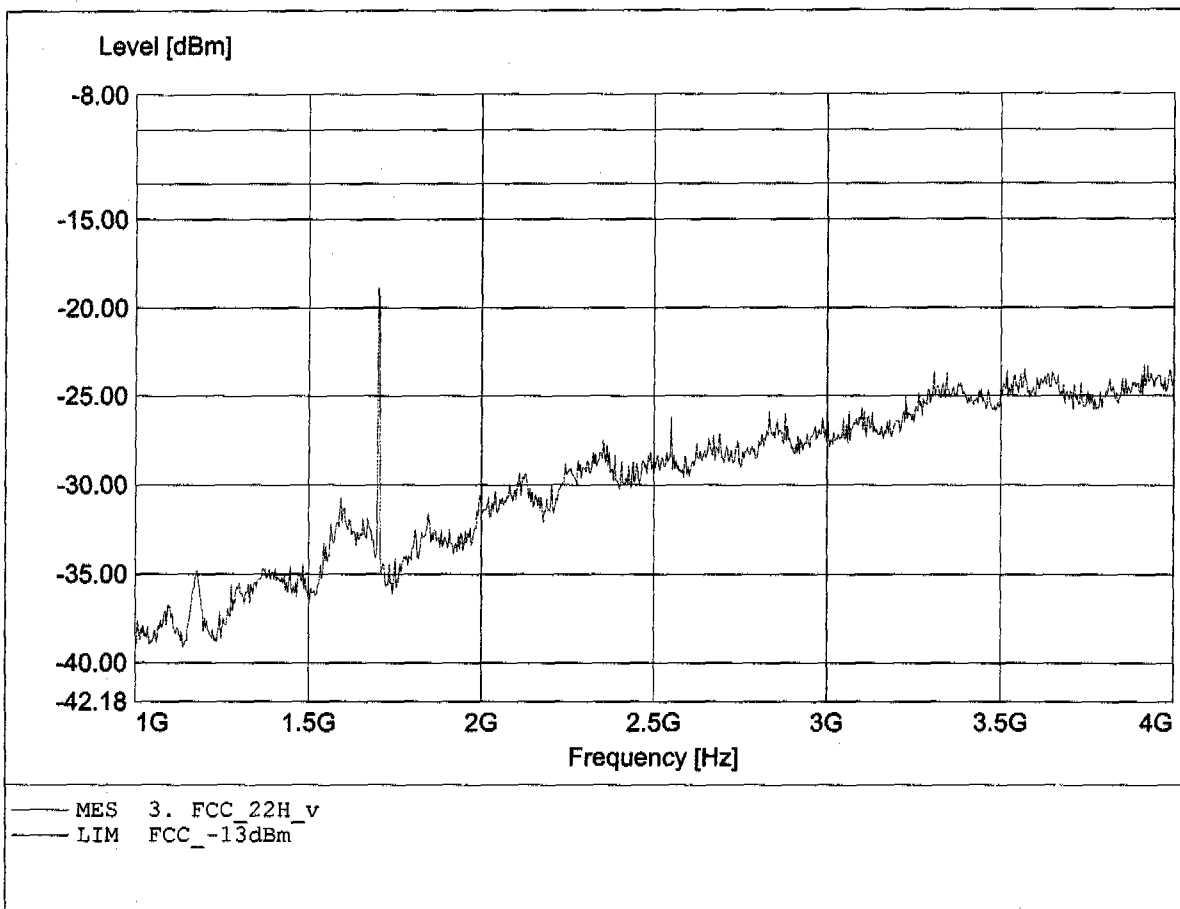


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025  
Comment 2: Freq: 3.923GHz, Pmax: -22.76dBm, RBW: 1MHz

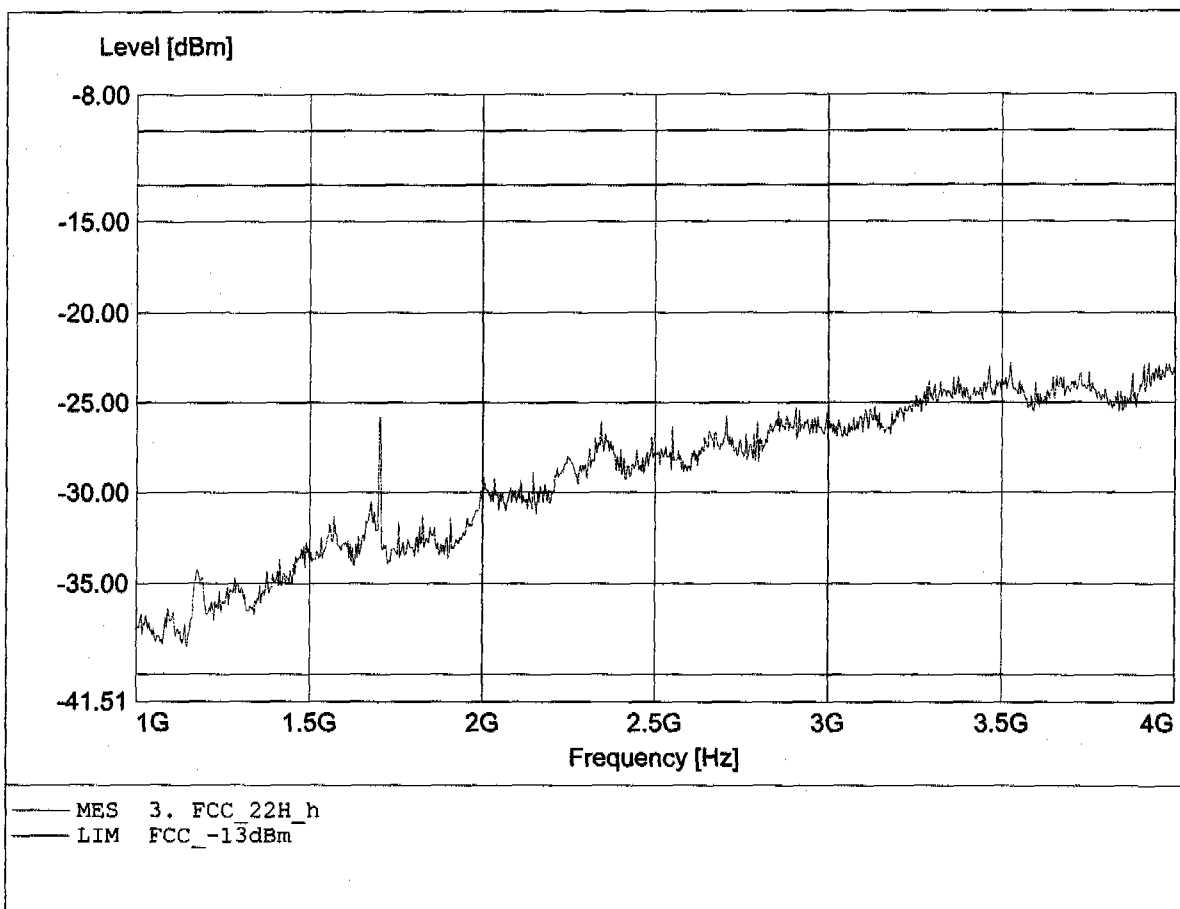


**Radiated Emissions Tx  
FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -31.57dBm, RBW: 1MHz

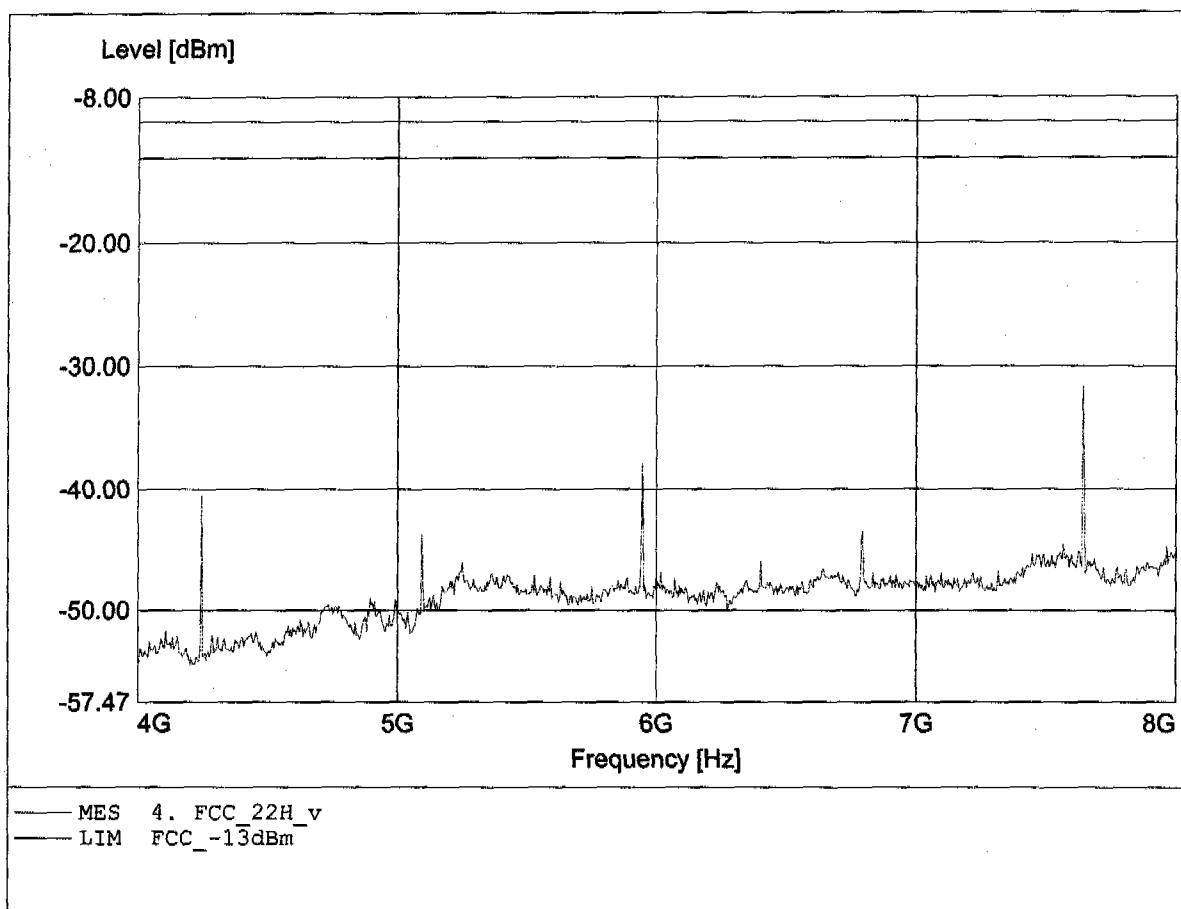


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 7.640GHz, Pmax: -31.91dBm, RBW: 1MHz

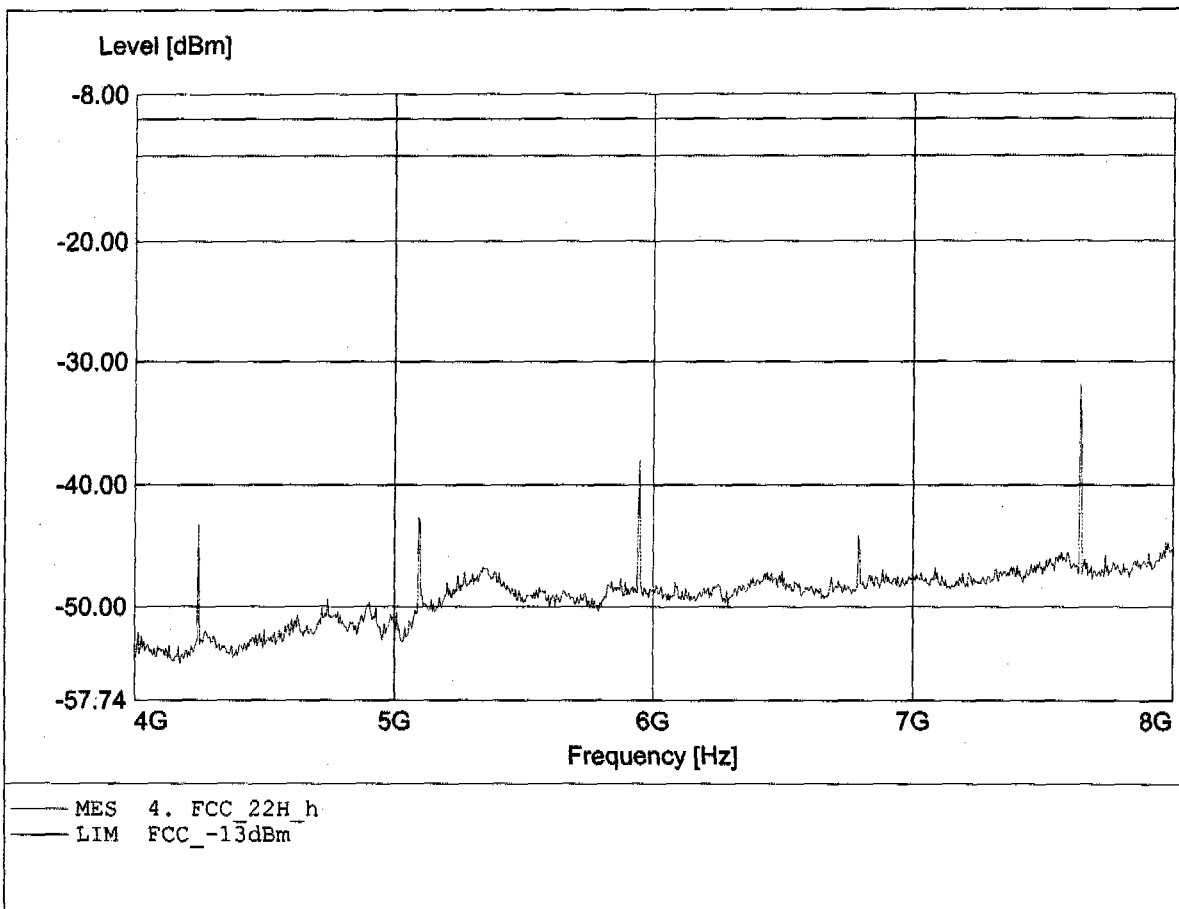


**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.338GHz, Pmax: -34.94dBm, RBW: 1MHz

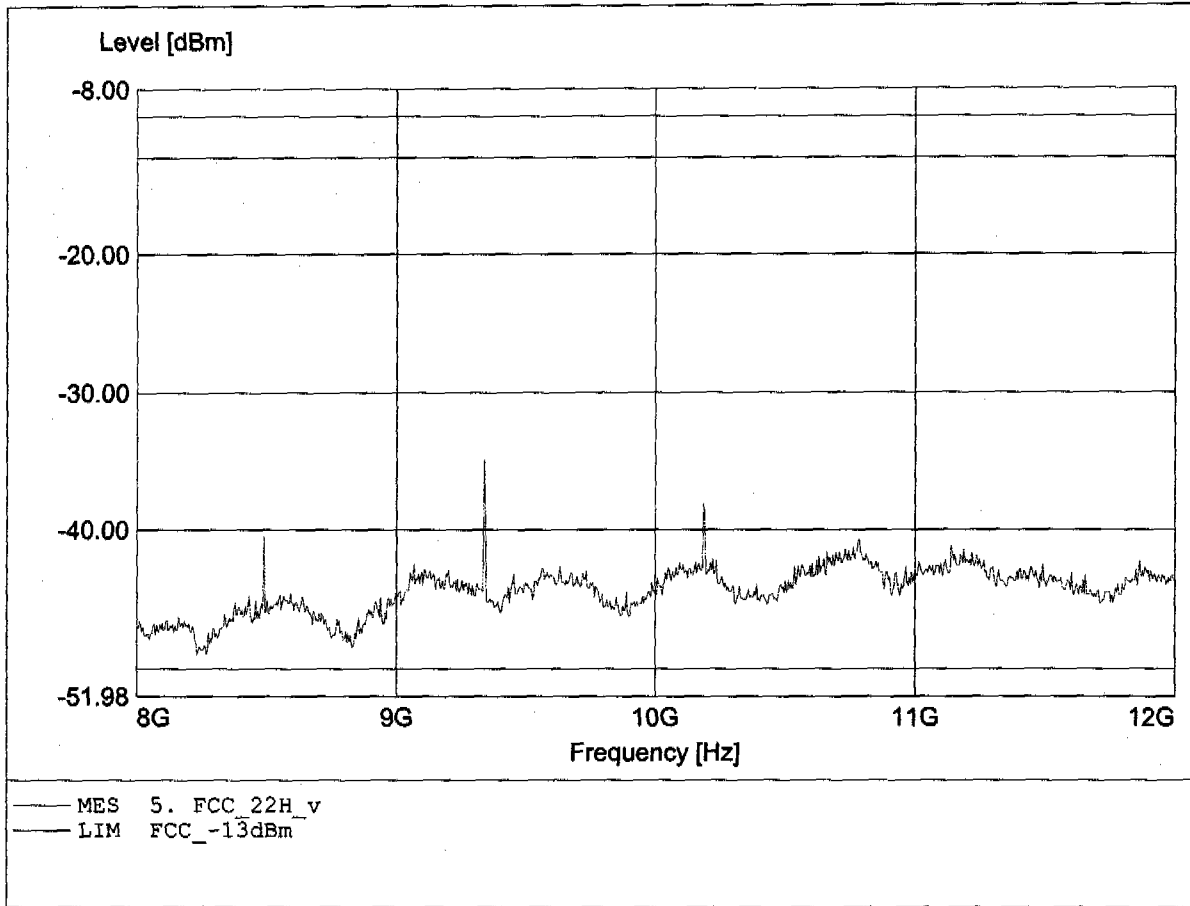

**Radiated Emissions Tx**  
**FCC RULES PART 22 SUBPART H**

Applicant: Pantech Co., Ltd.  
EUT : Triple Band GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)  
Model / Channel: GF260 / Channel: 251  
Temperature/ Voltage: Temp.: 23°C, Unom.: 4,20 VDC  
Test Site / Operator: ETS / Mr. Handrik  
Test Specification: according to §22.917  
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.  
Comment 2: Freq: 9.338GHz, Pmax: -34.59dBm, RBW: 1MHz

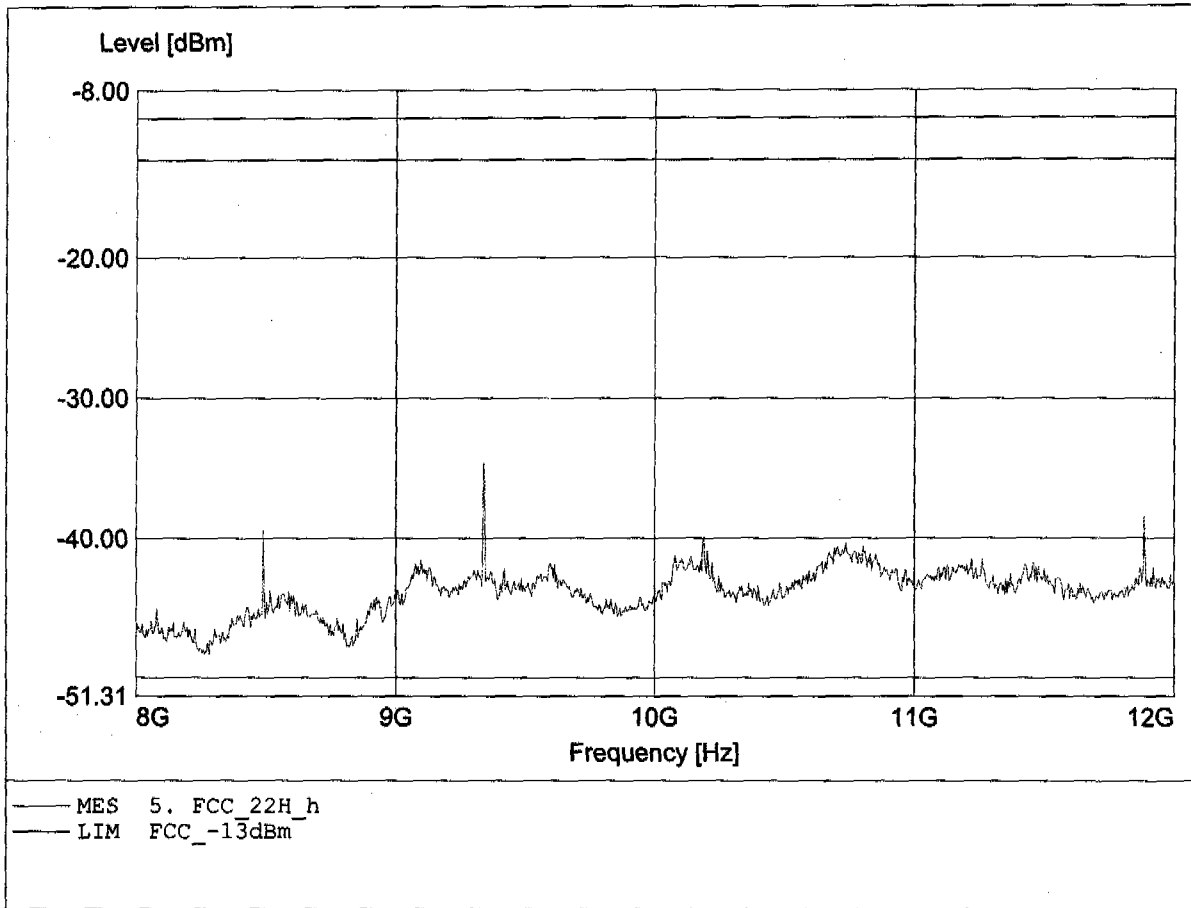




## Appendix J

Line Conducted Emissions

**EMI voltage test in the ac-mains according to FCC part 15**


EUT: TRIPLE BAND GSM 850 / DCS 1800 / PCS 1900 ( WITH WAP & GPRS )  
 Manufacturer: PANTECH CO., LTD.  
 Operating Condition: Unom: 120 V ( AC / DC - ADAPTOR ), Tnom: 23°C  
 Test Site: ETS  
 Operator: Mr. Marquardt  
 Test Specification: V-Network: ESH2-Z5 (L1)  
 Comment: model: GF 260 mode: LINK AND CHARGING  
 ADAPTOR: TA3521-CN

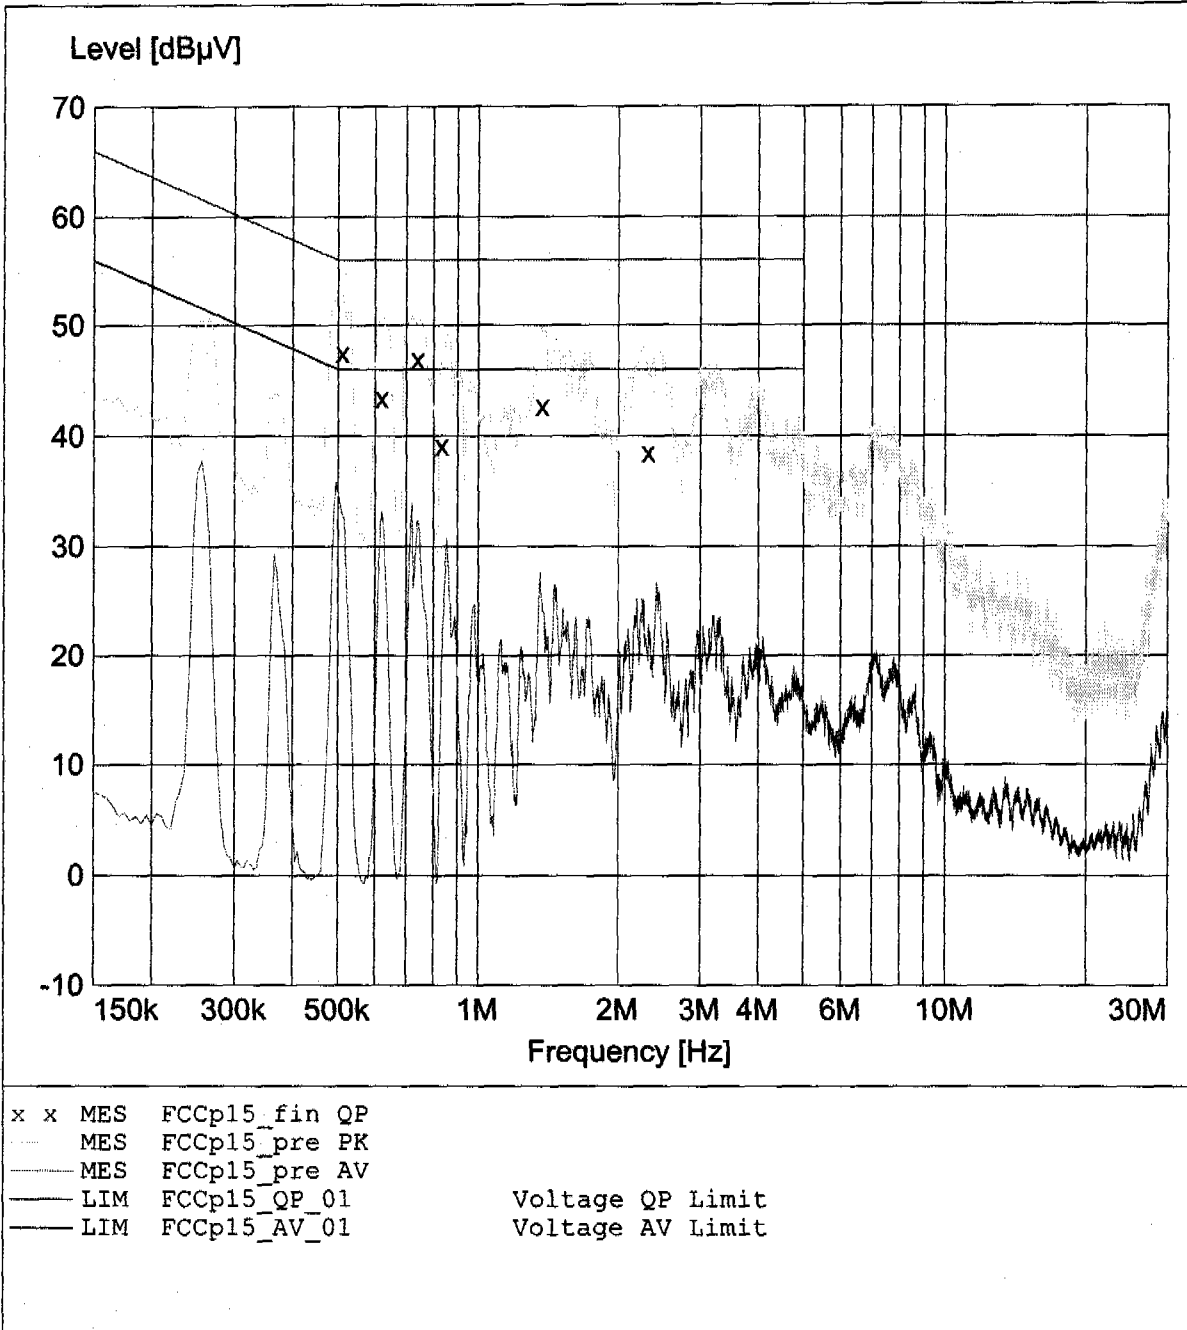



**EMI voltage test in the ac-mains according to FCC part 15**

EUT: TRIPLE BAND GSM 850 / DCS 1800 / PCS 1900 ( WITH WAP & GPRS )  
 Manufacturer: PANTECH CO., LTD.  
 Operating Condition: Unom: 120 V ( AC / DC - ADAPTOR ), Tnom: 23°C  
 Test Site: ETS  
 Operator: Mr. Marquardt  
 Test Specification: V-Network: ESH2-Z5 (N)  
 Comment: model: GF 260 mode: LINK AND CHARGING  
 ADAPTOR: TA3521-CN

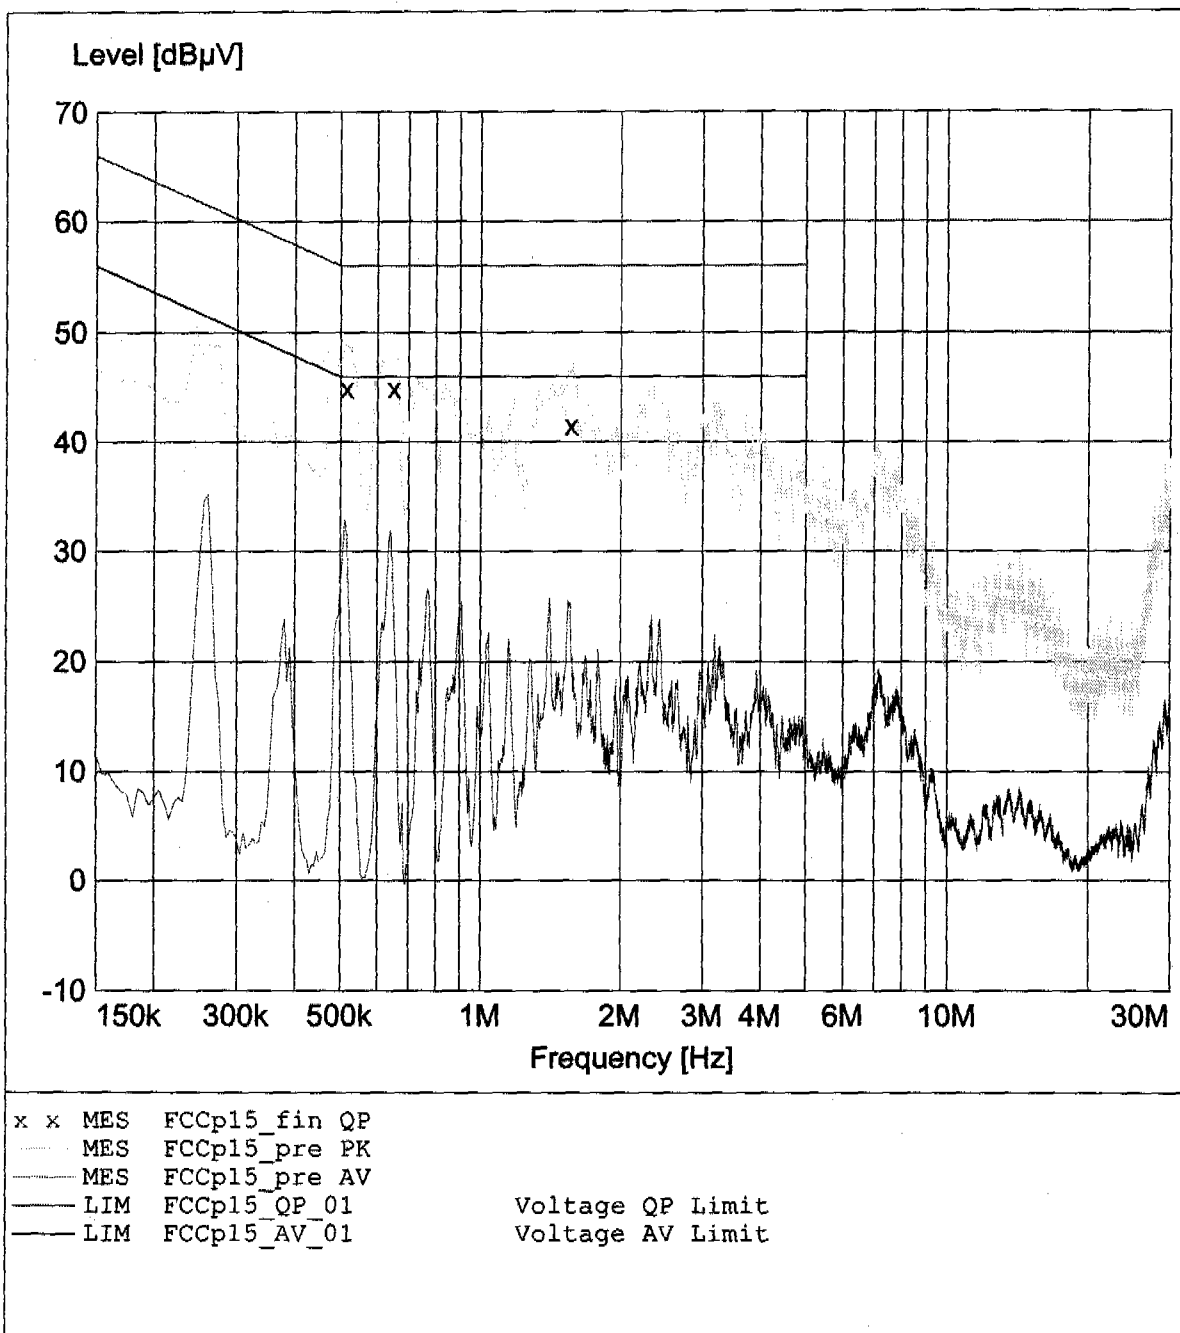

## Appendix K

### Frequency Stability vs. Temperature

No diagrams  
Refer to point 13.2

## Appendix L

### Frequency Stability vs. Voltage

No diagrams  
Refer to point 14.2