




Appendix I

Spurious Radiation

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.691MHz, Pmax: -61.32dBm, RBW: 1MHz

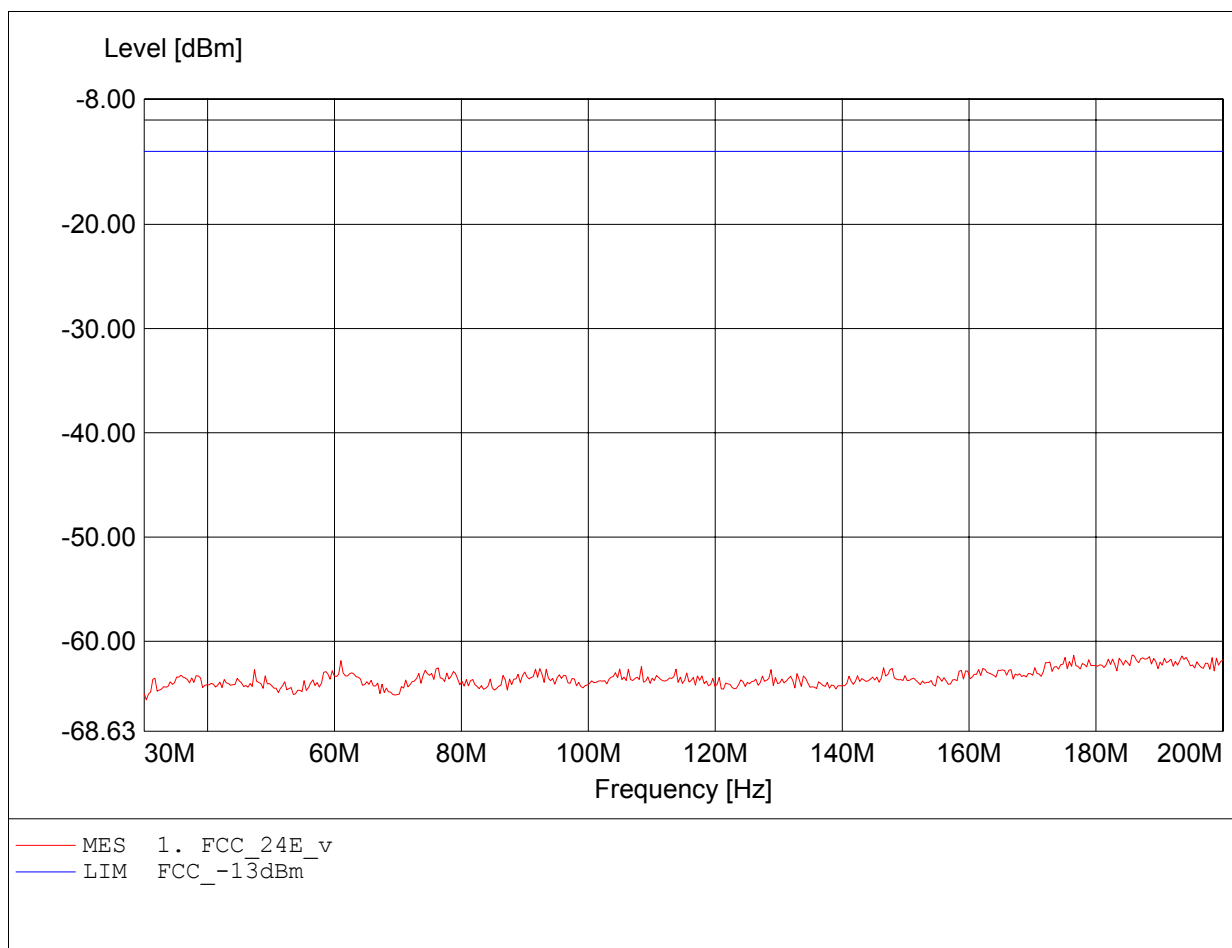

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 63.727MHz, Pmax: -61.73dBm, RBW: 1MHz

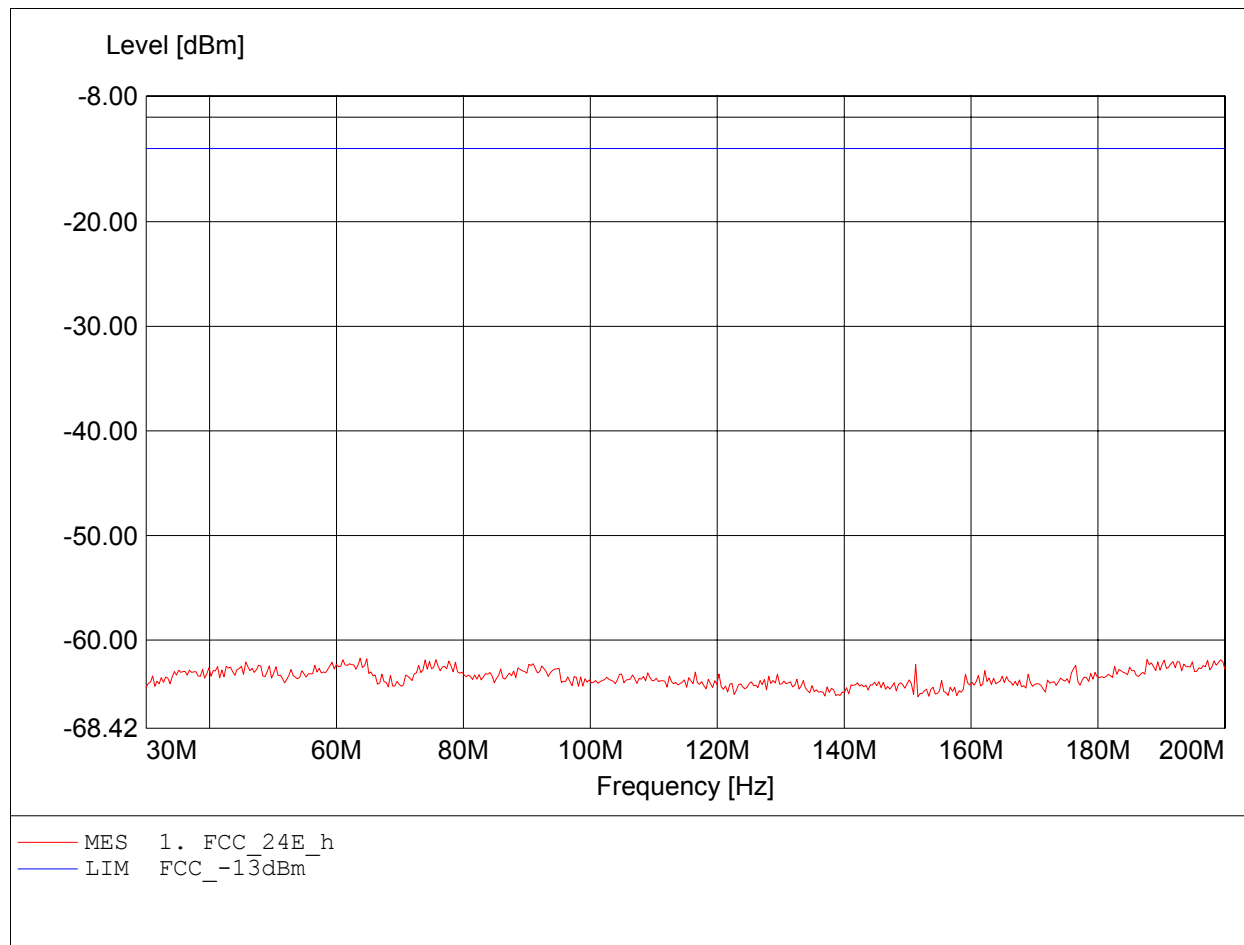

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 998.397MHz, Pmax: -48.14dBm, RBW: 1MHz

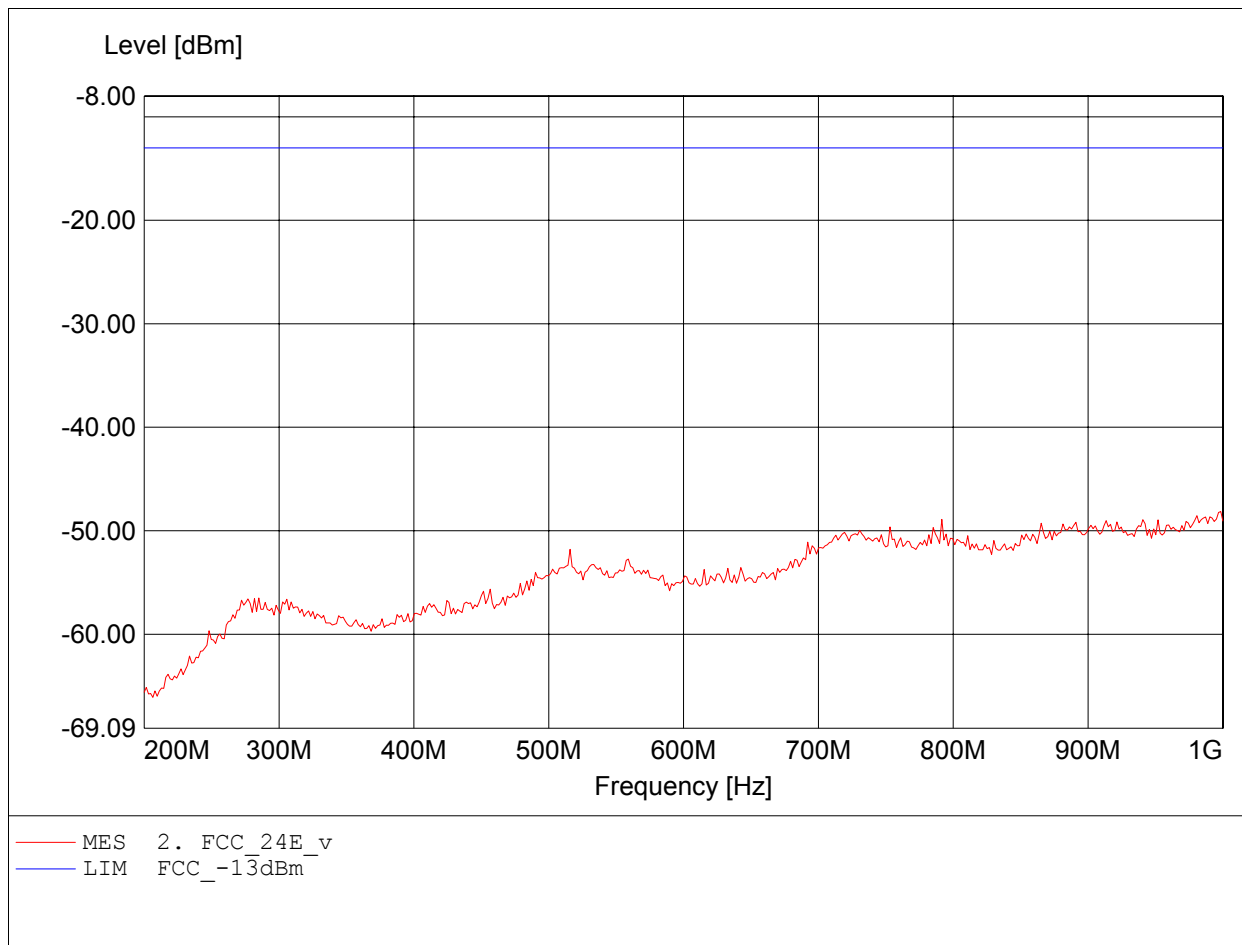

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 854.108MHz, Pmax: -47.00dBm, RBW: 1MHz

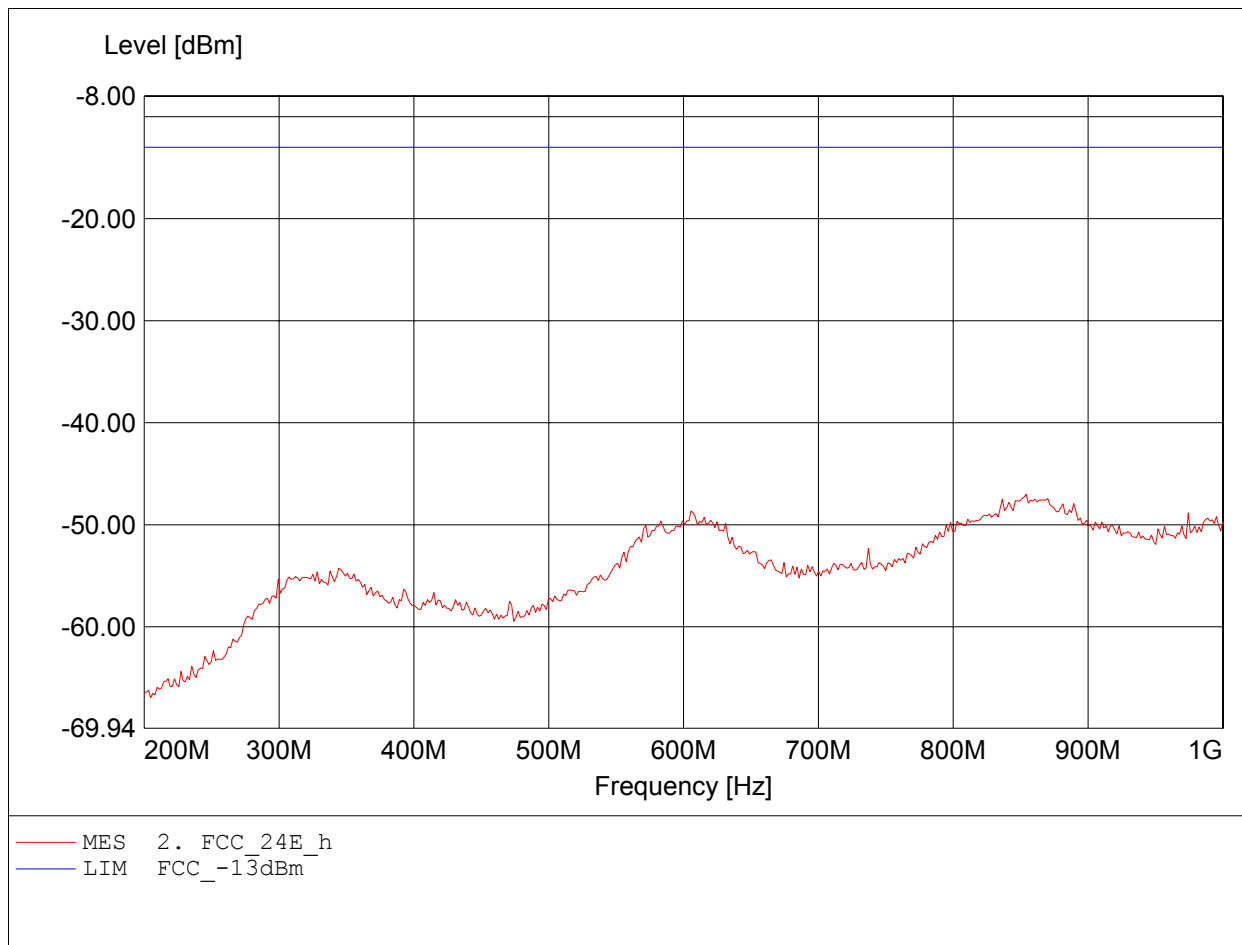

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -21.93dBm, RBW: 1MHz/3kHz

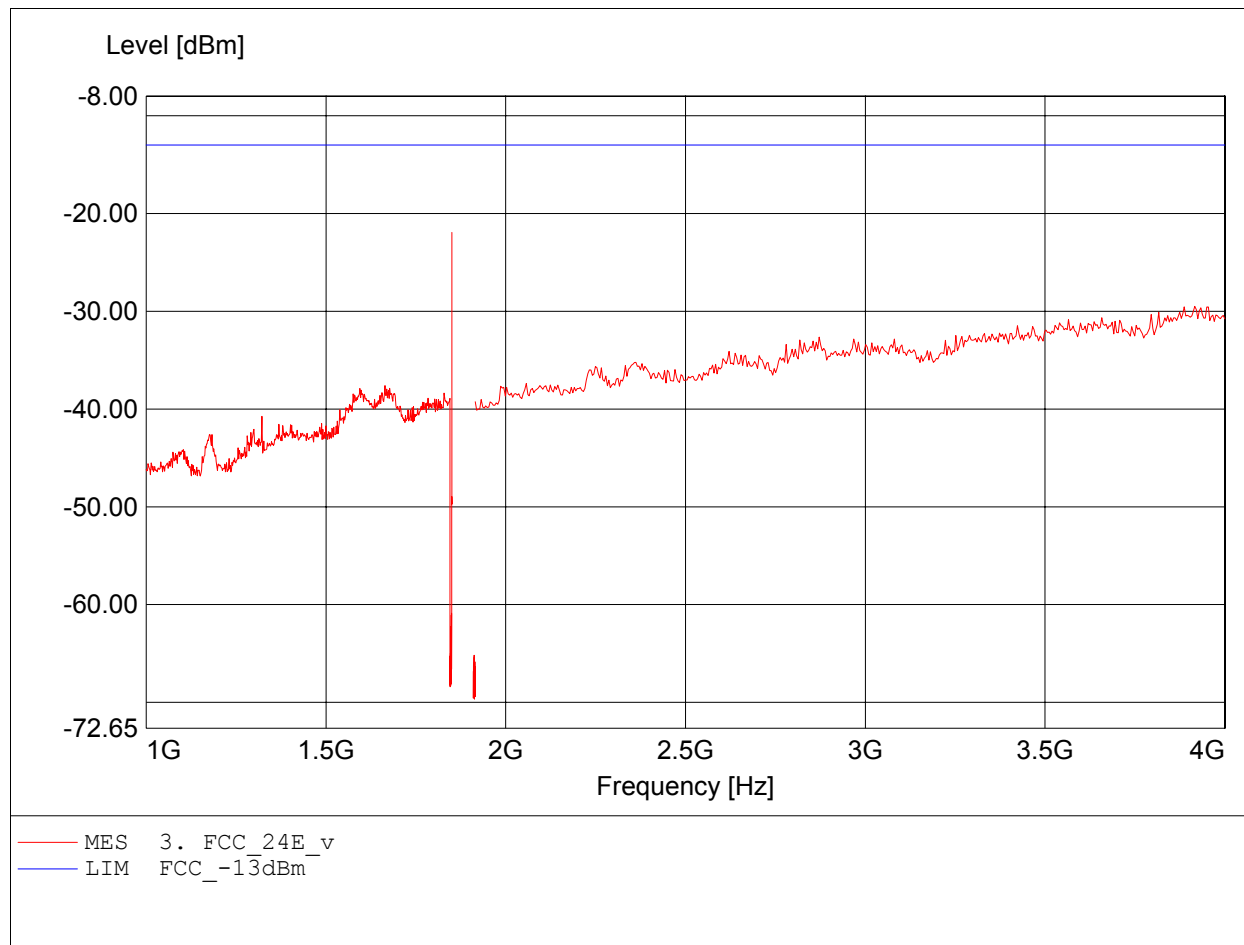

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.850GHz, Pmax: -22.60dBm, RBW: 1MHz/3kHz

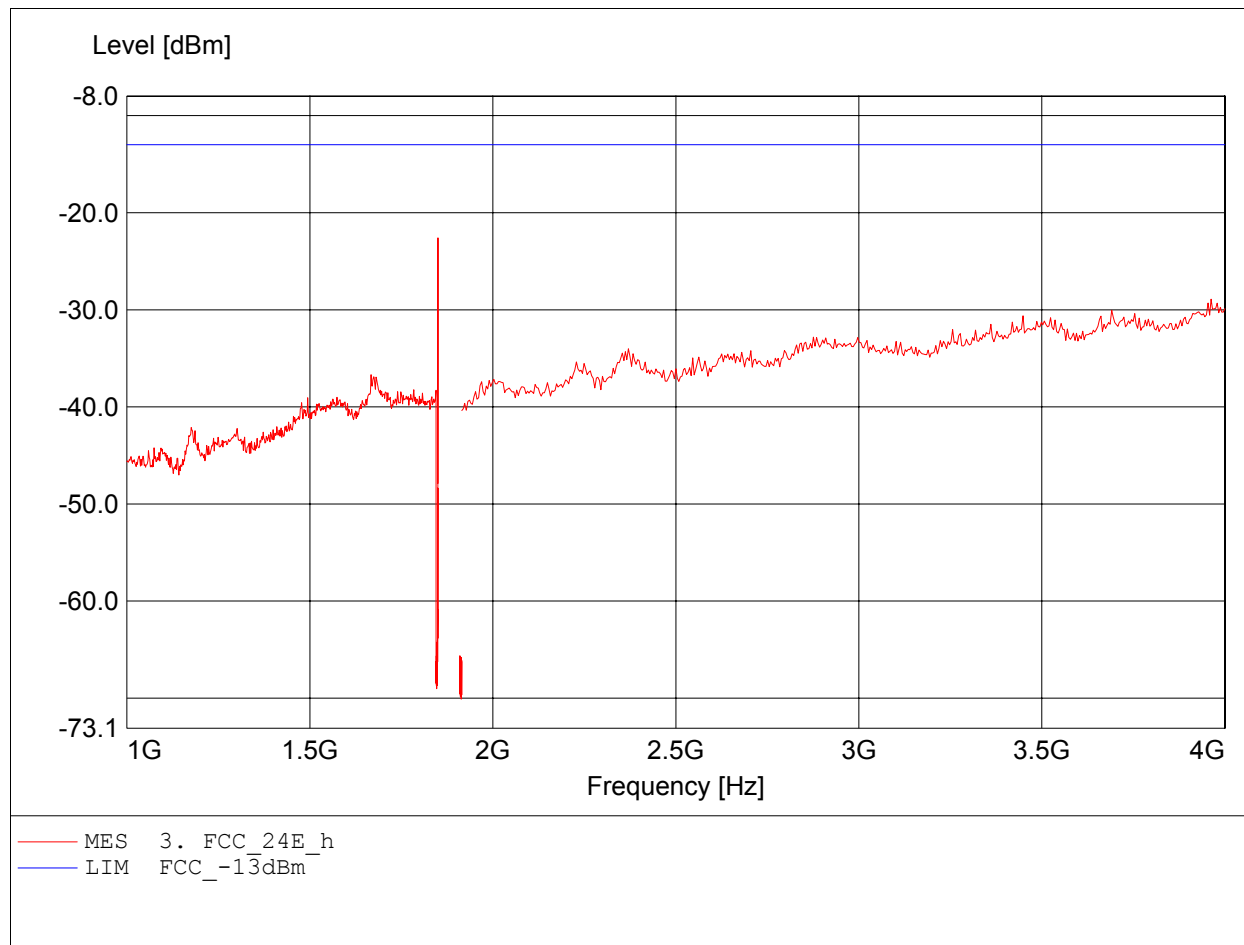

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.575GHz, Pmax: -42.79dBm, RBW: 1MHz

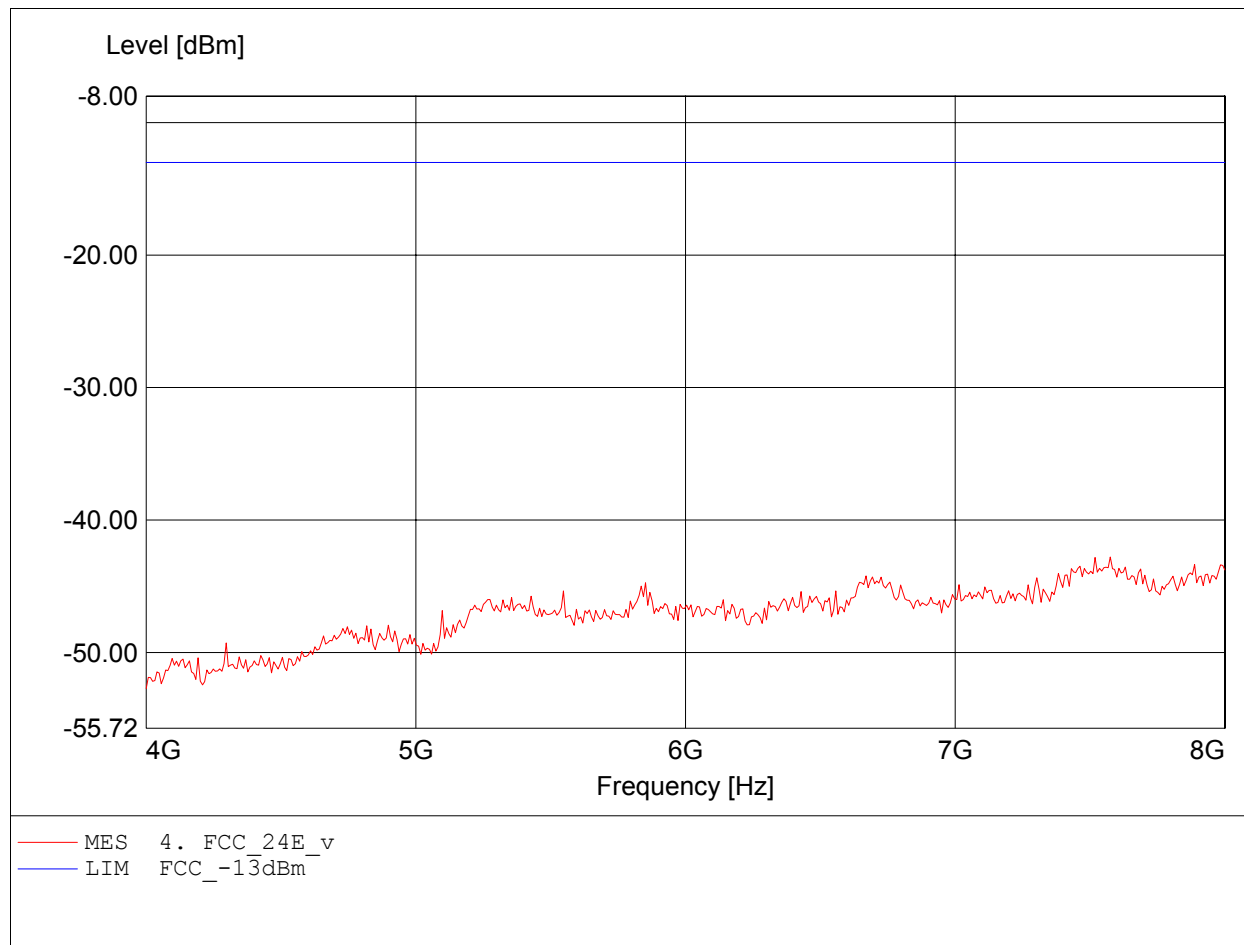

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.547GHz, Pmax: -39.82dBm, RBW: 1MHz

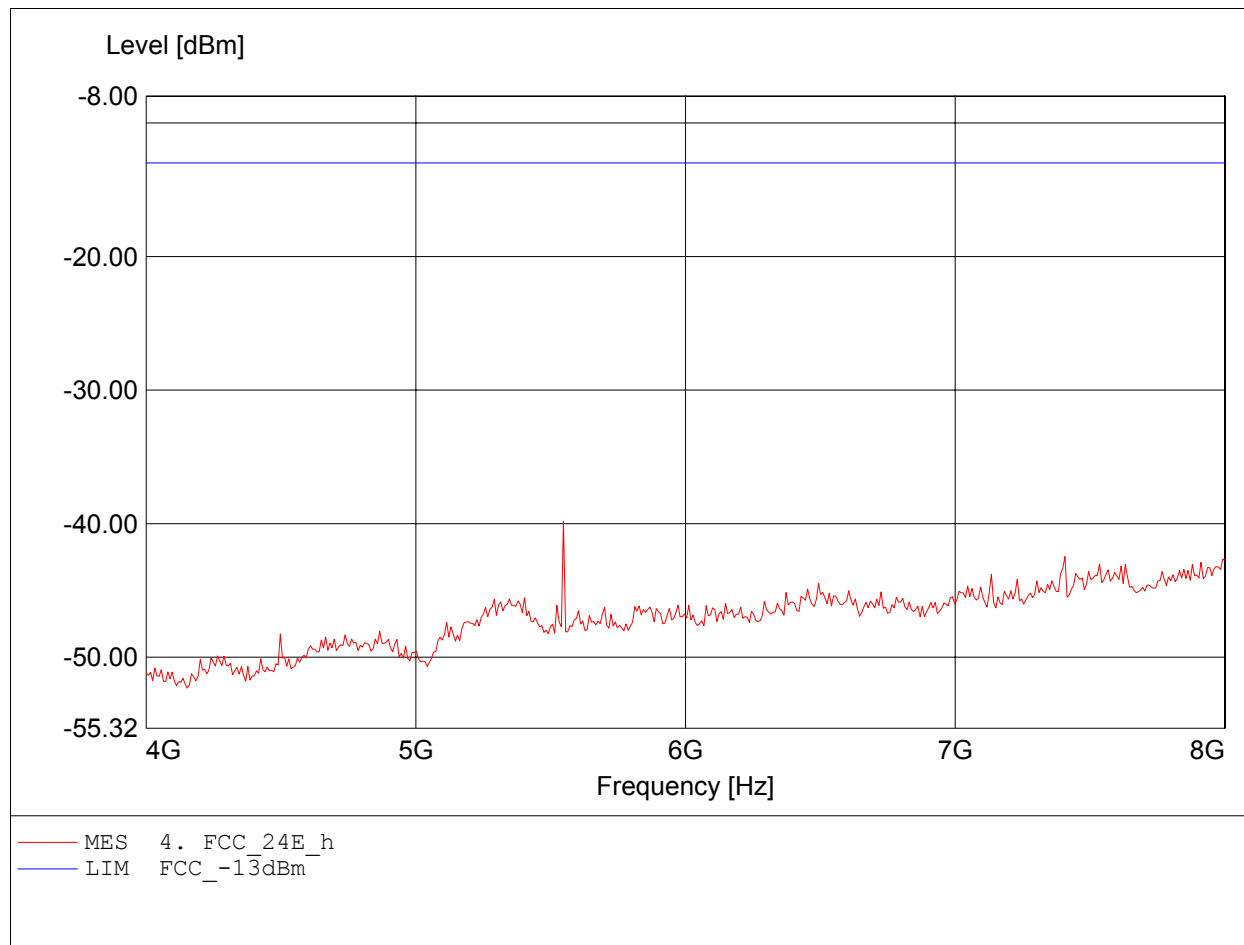

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.822GHz, Pmax: -37.89dBm, RBW: 1MHz

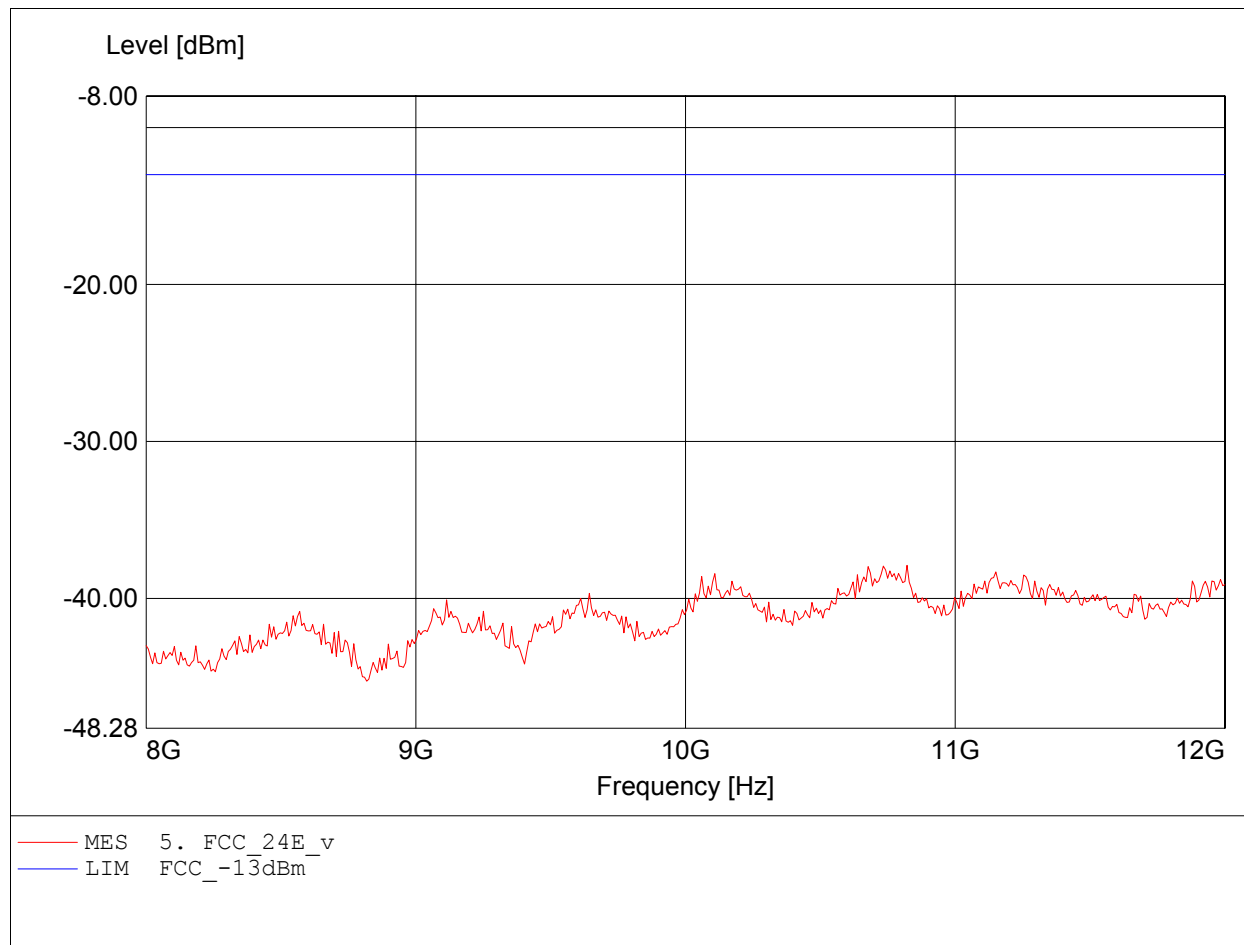

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.733GHz, Pmax: -36.80dBm, RBW: 1MHz

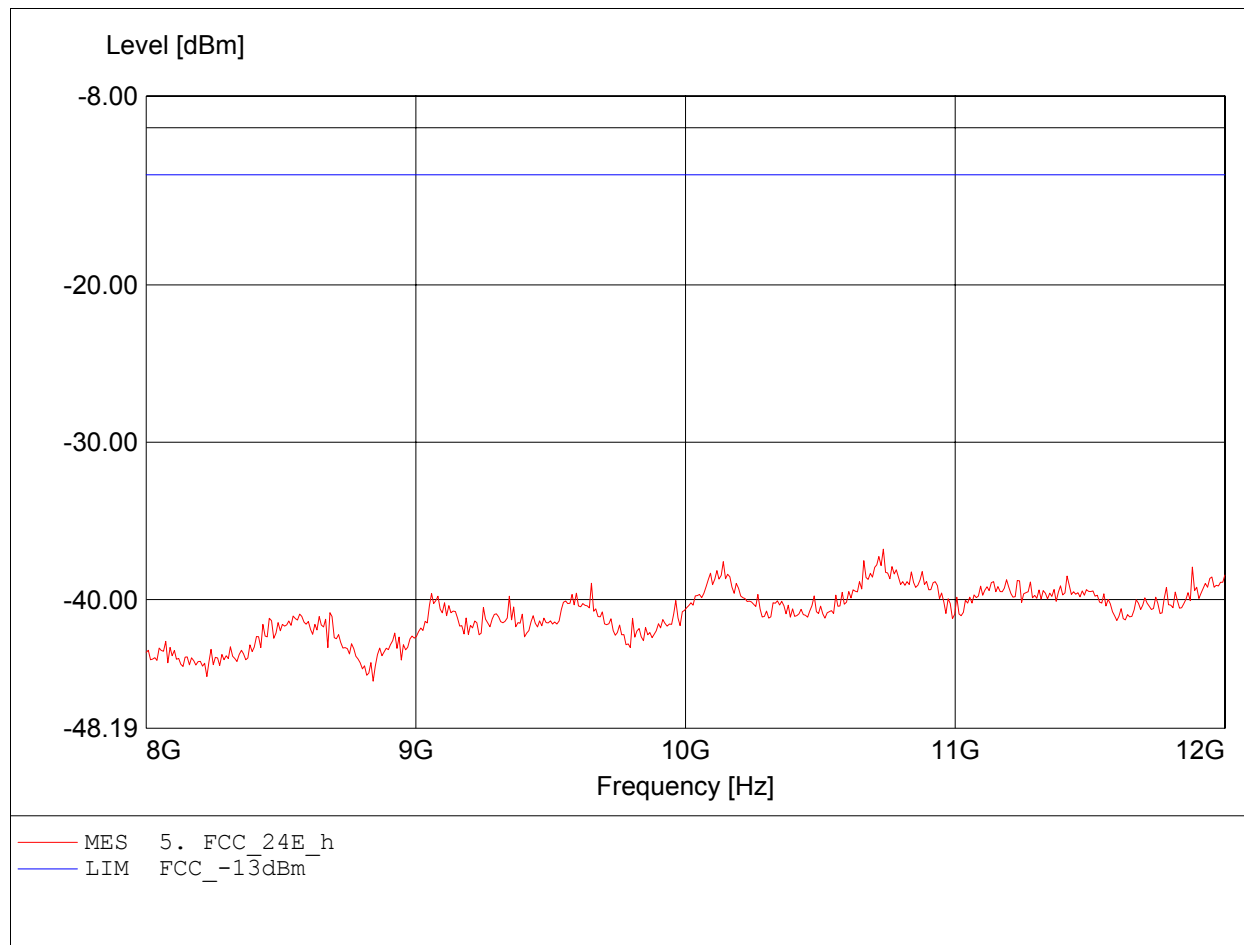

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.880GHz, Pmax: -28.57dBm, RBW: 1MHz

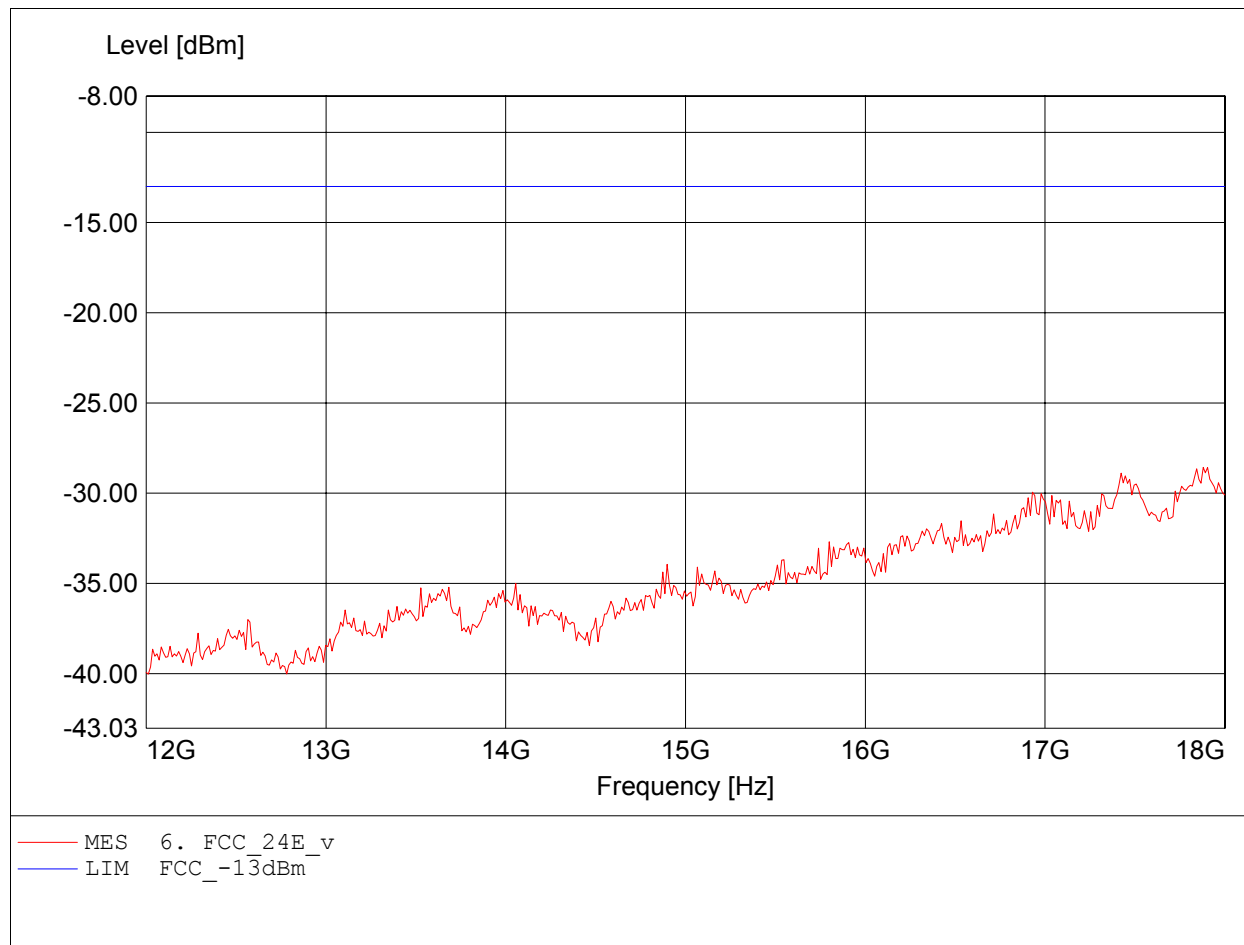

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.435GHz, Pmax: -28.46dBm, RBW: 1MHz

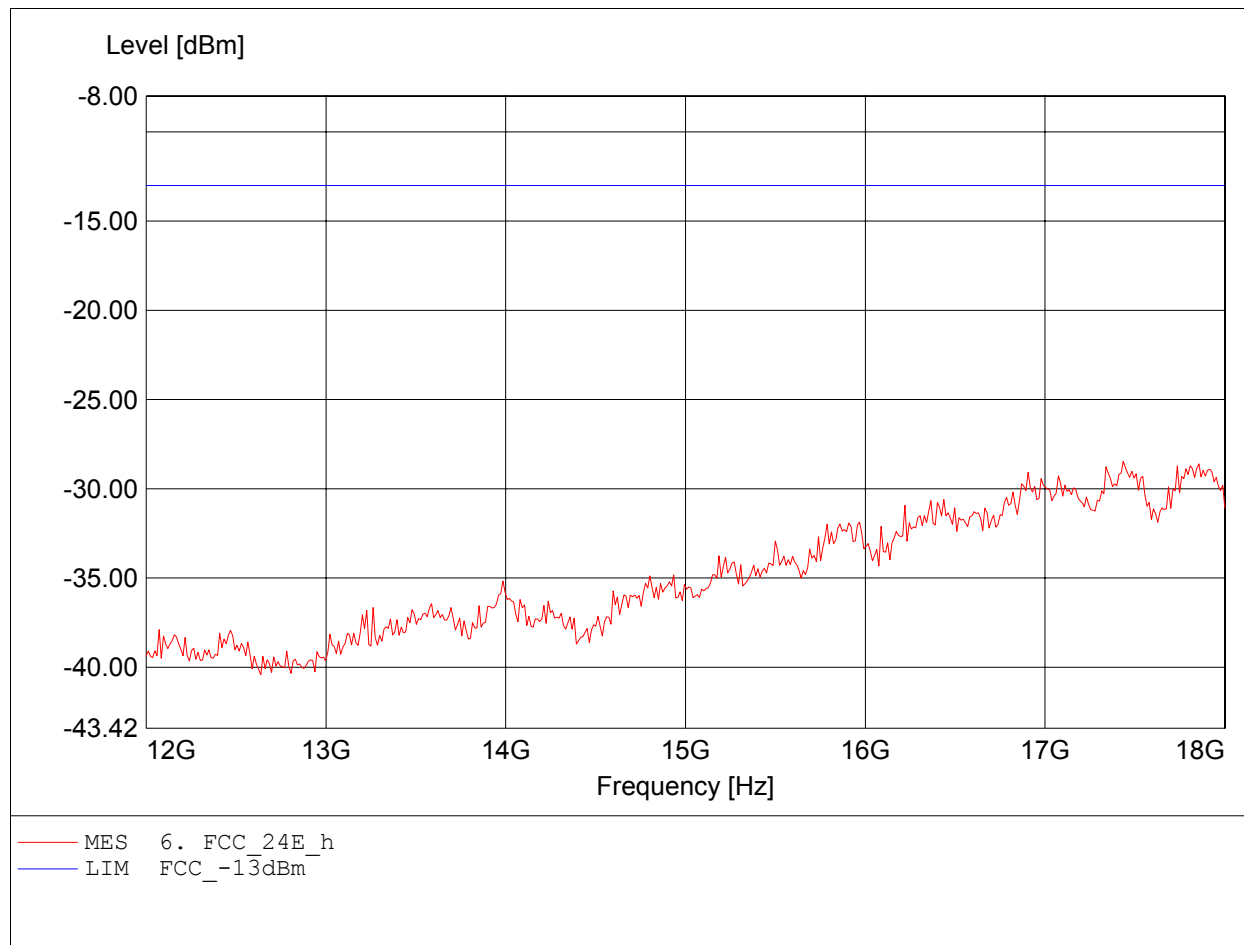

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.426GHz, Pmax: -32.78dBm, RBW: 1MHz

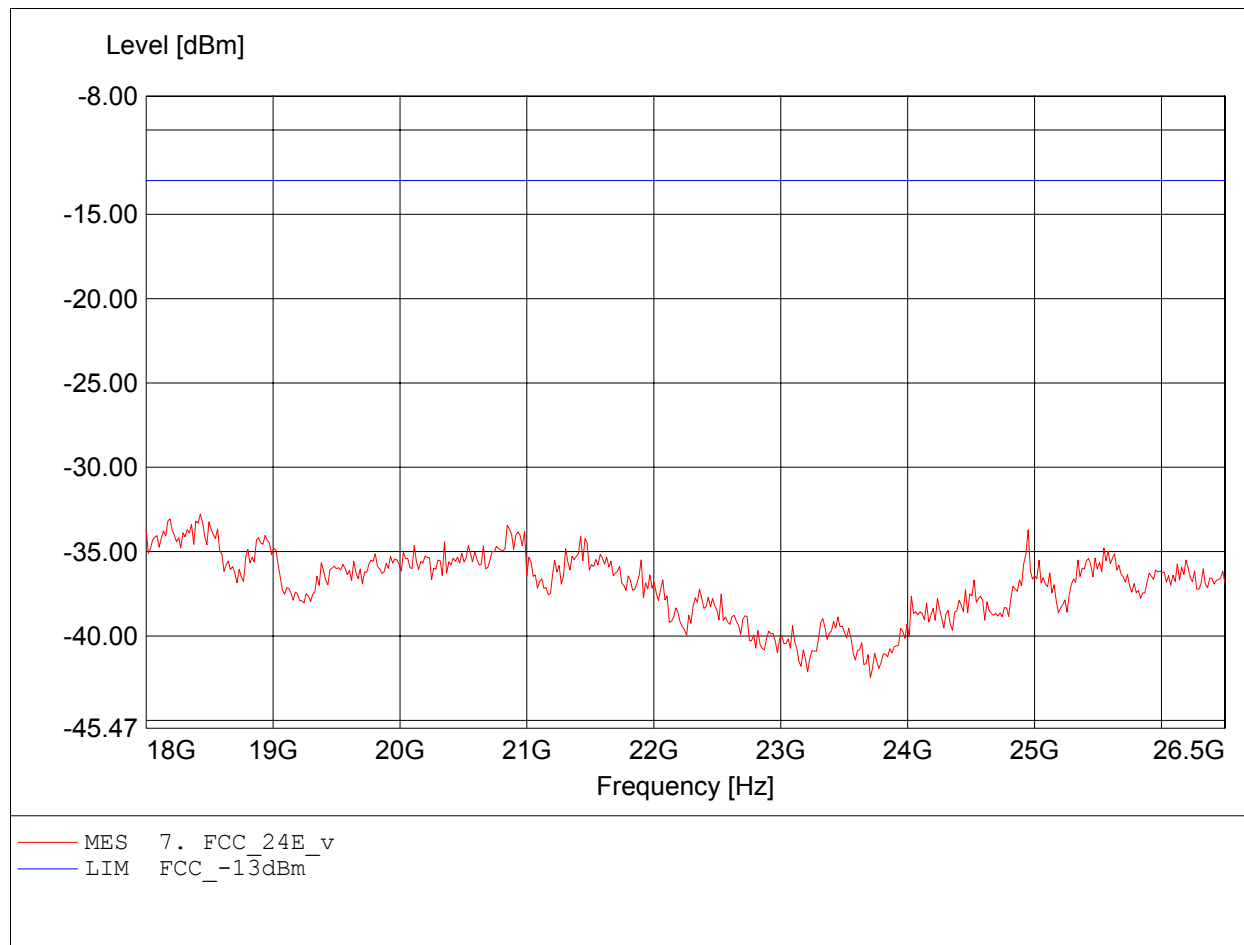

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 512
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.494GHz, Pmax: -33.07dBm, RBW: 1MHz

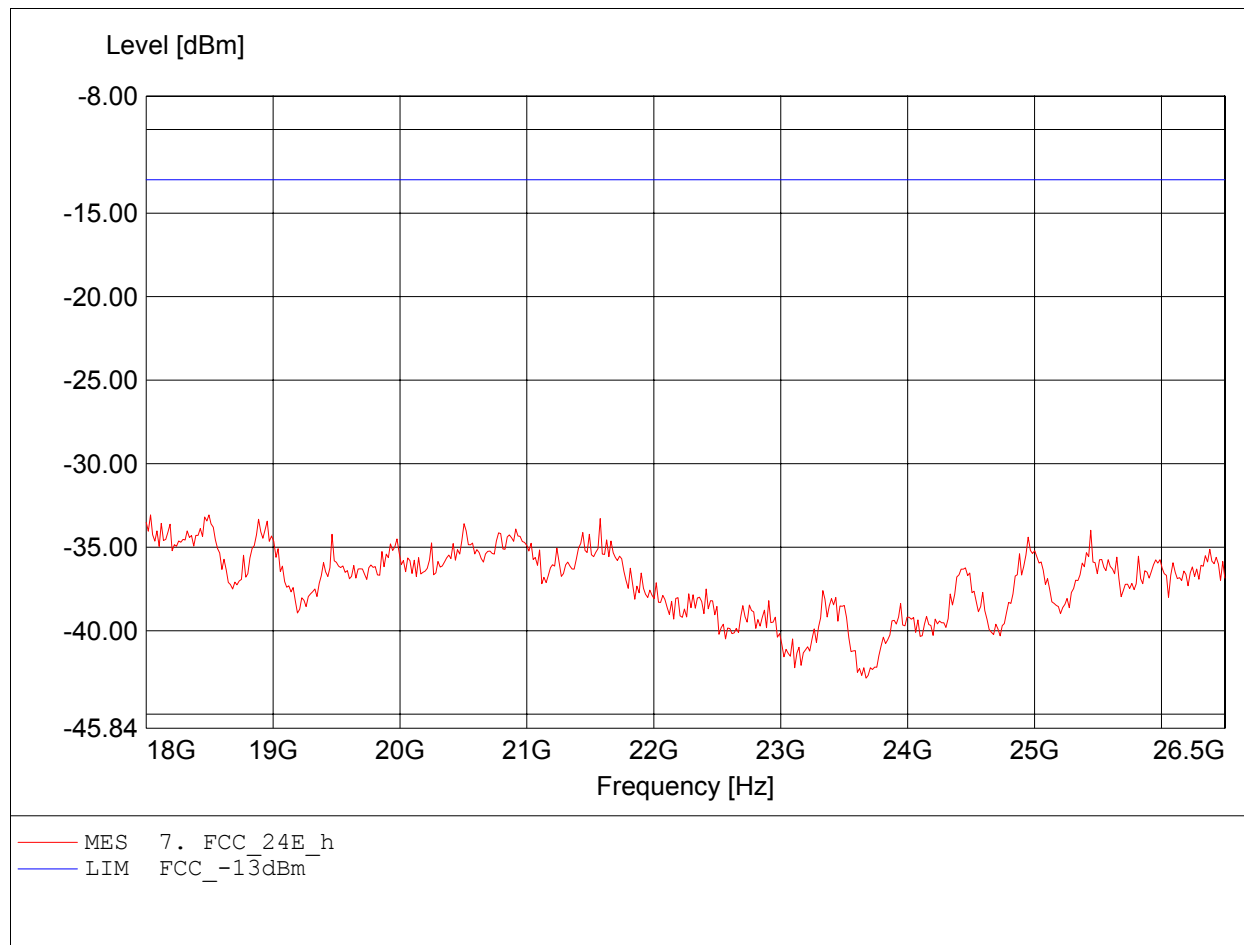

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 187.395MHz, Pmax: -61.27dBm, RBW: 1MHz

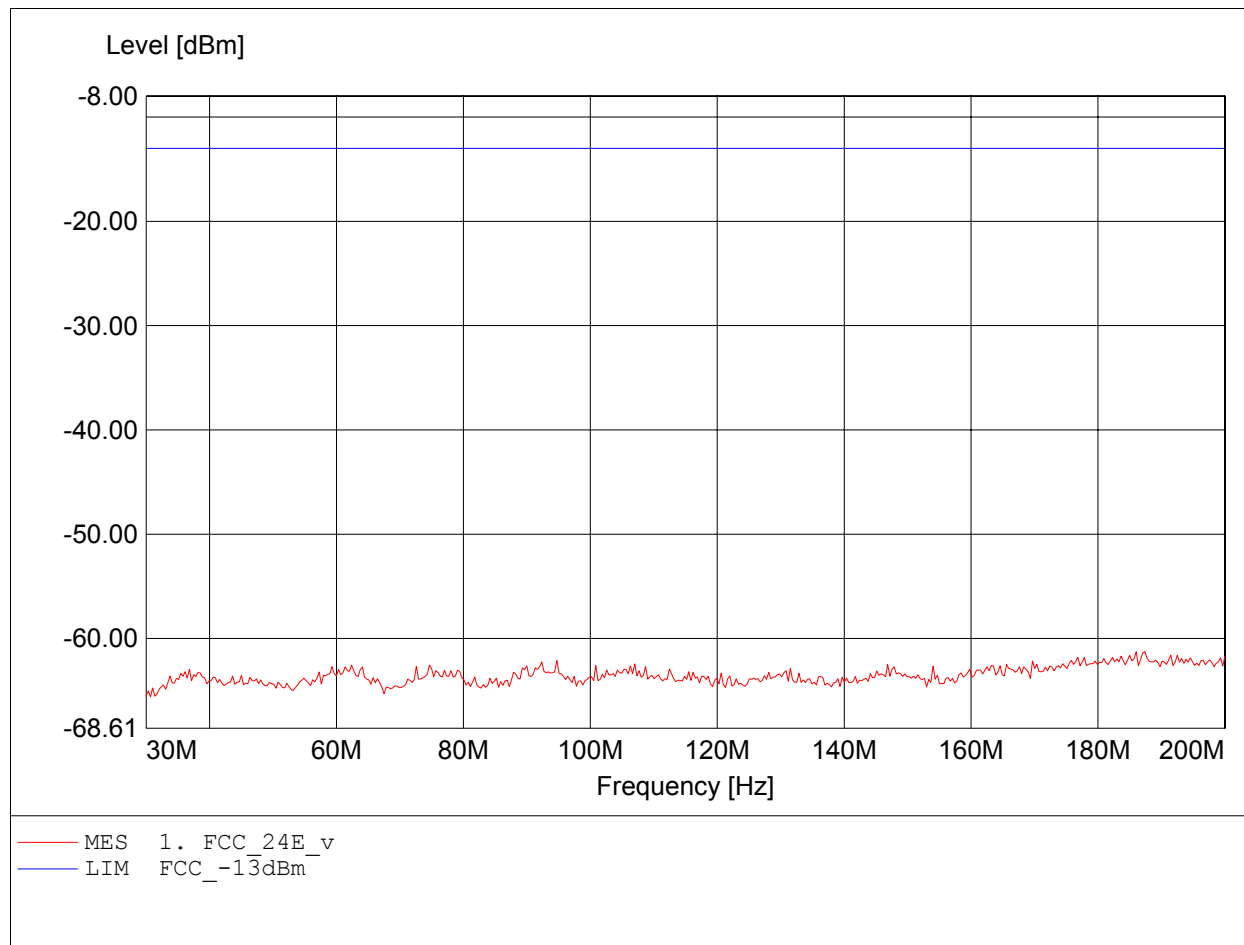

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.868MHz, Pmax: -61.19dBm, RBW: 1MHz

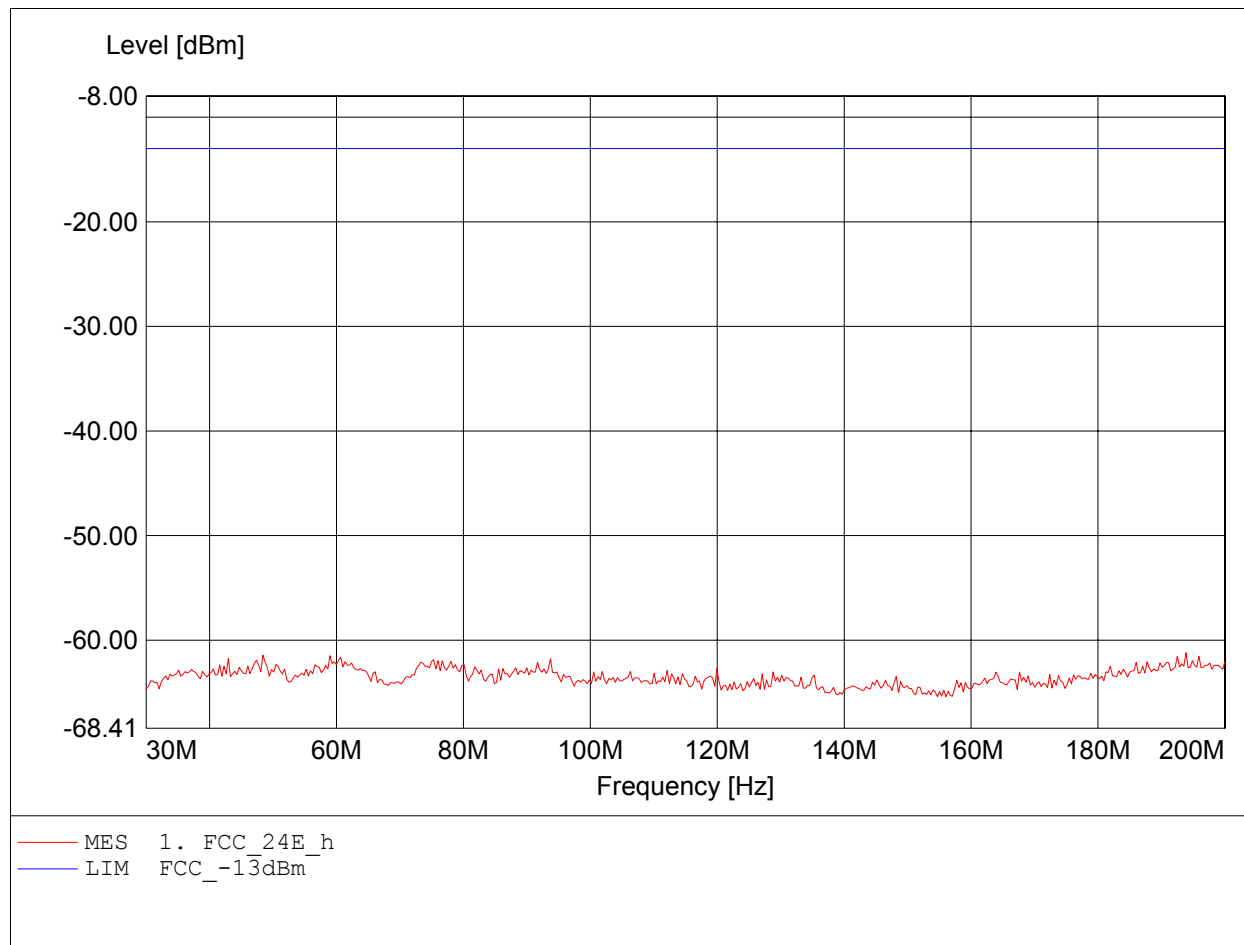

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 985.571MHz, Pmax: -47.93dBm, RBW: 1MHz

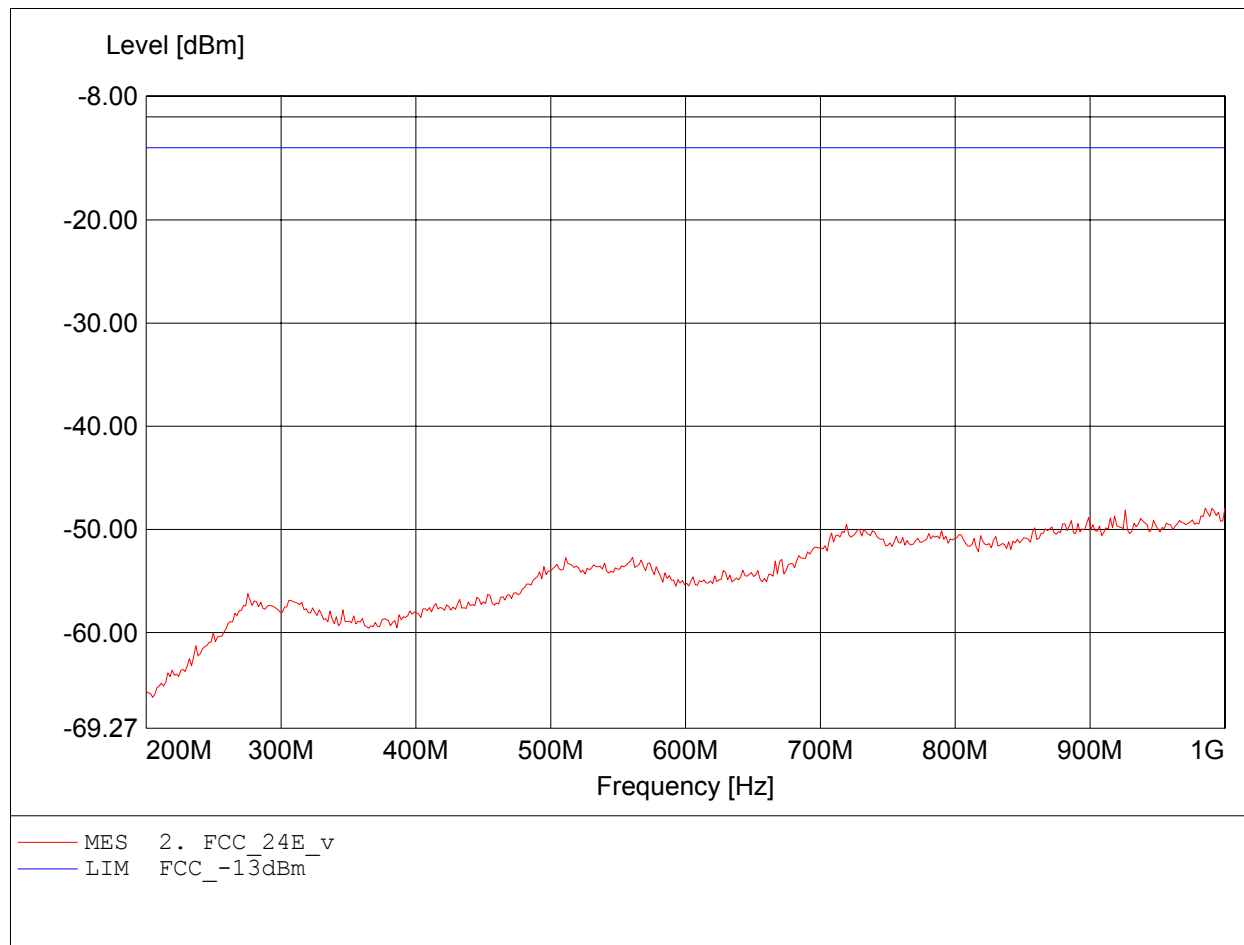

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 857.315MHz, Pmax: -46.04dBm, RBW: 1MHz

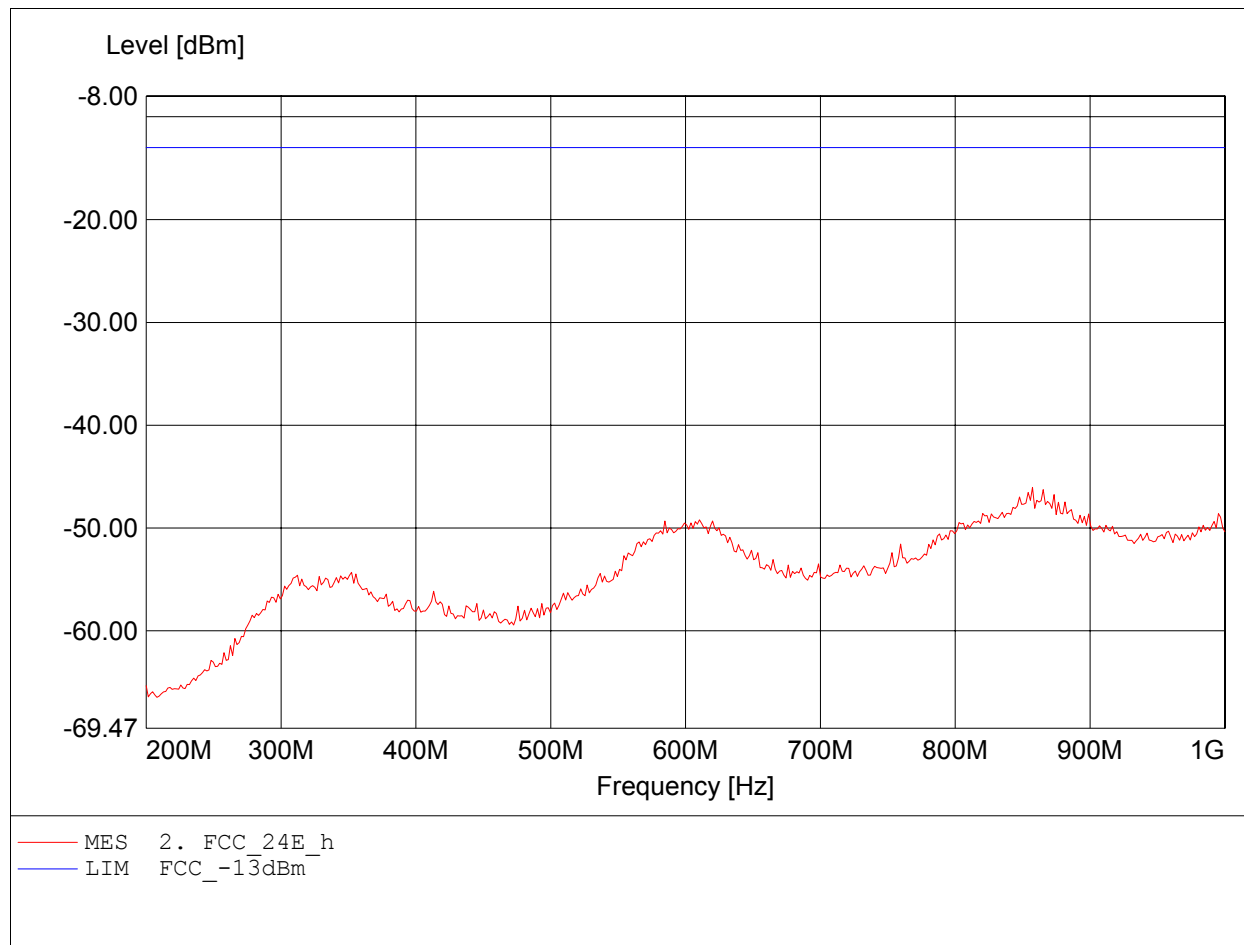

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.950GHz, Pmax: -28.86dBm, RBW: 1MHz/3kHz

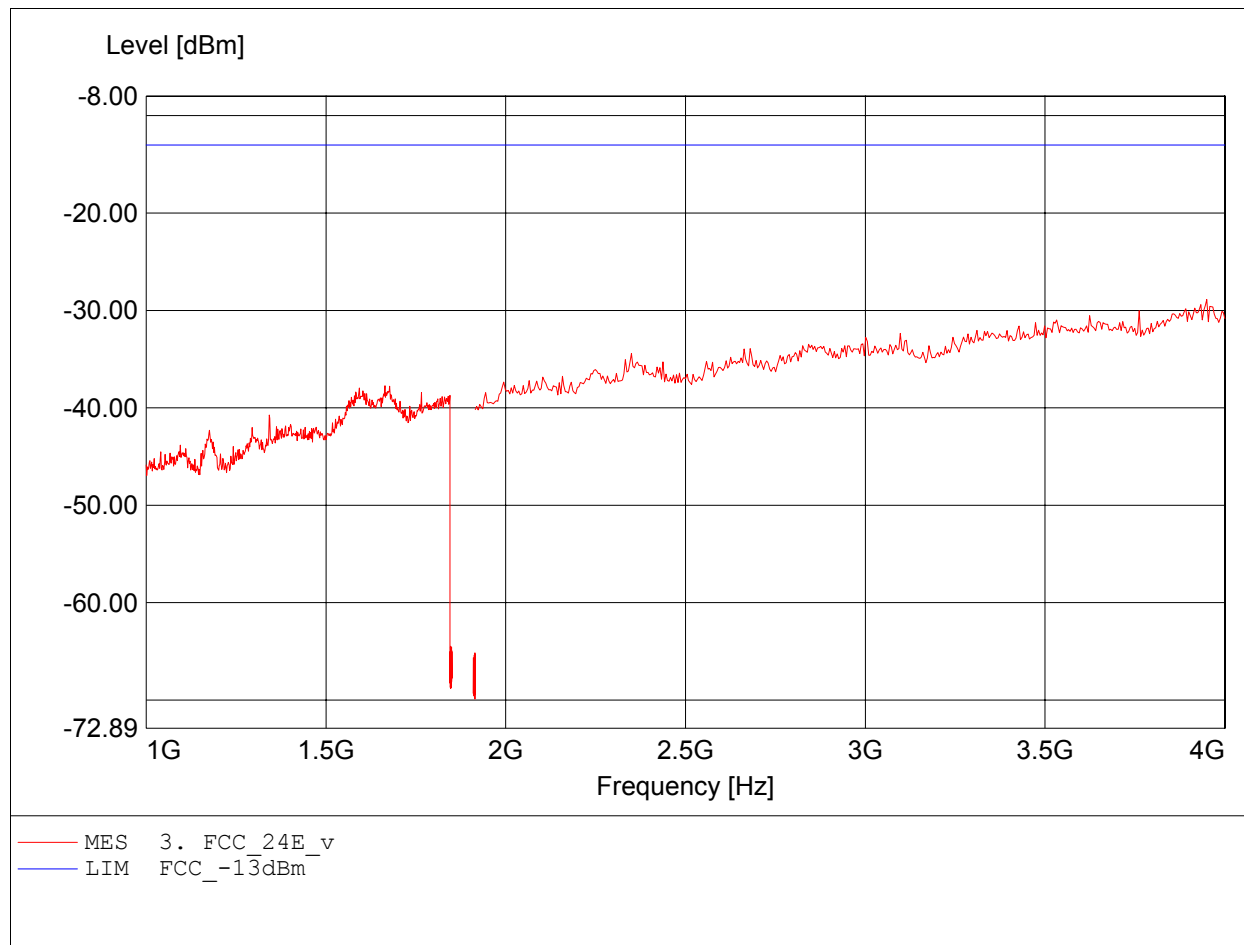

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.762GHz, Pmax: -28.37dBm, RBW: 1MHz/3kHz

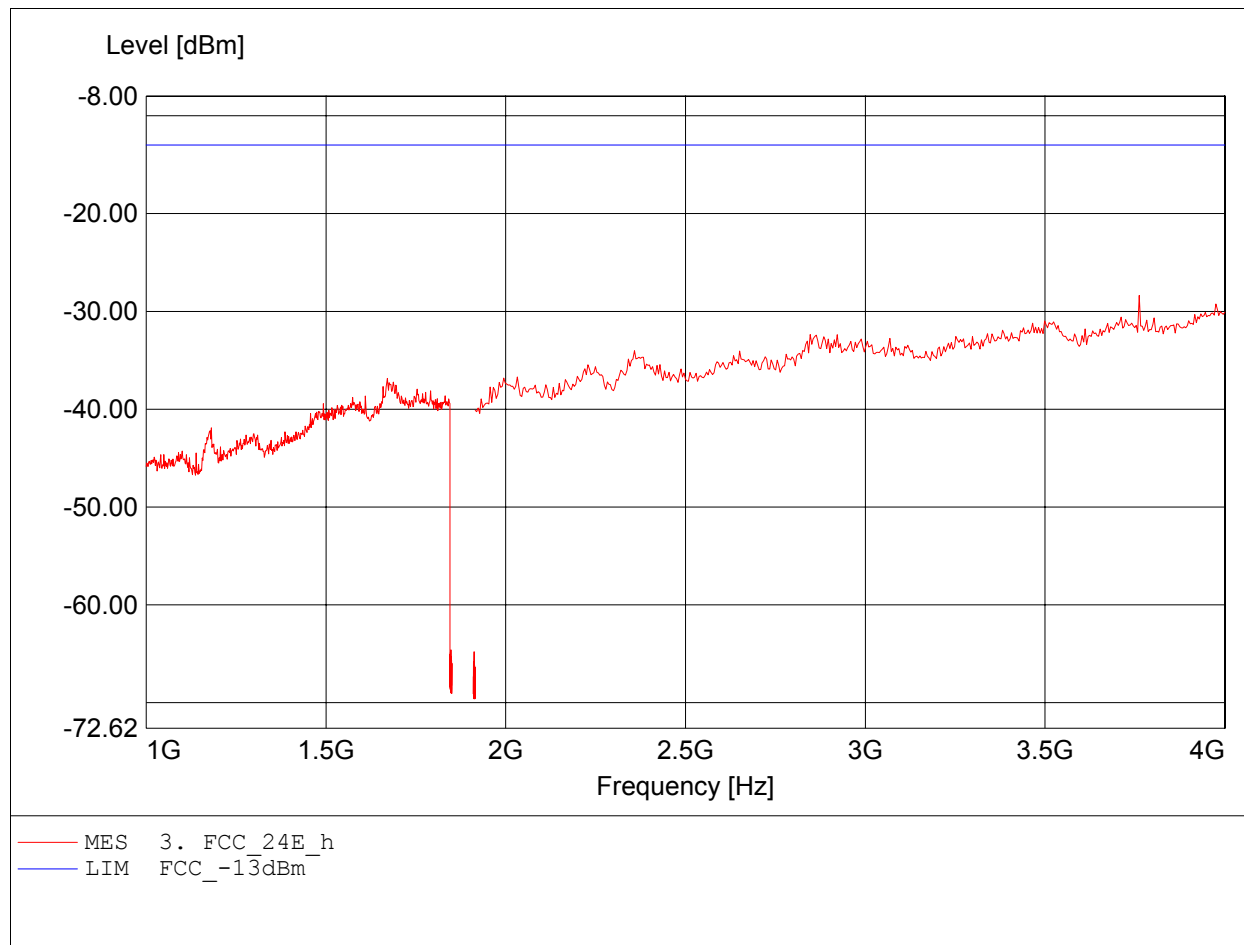

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.527GHz, Pmax: -36.14dBm, RBW: 1MHz

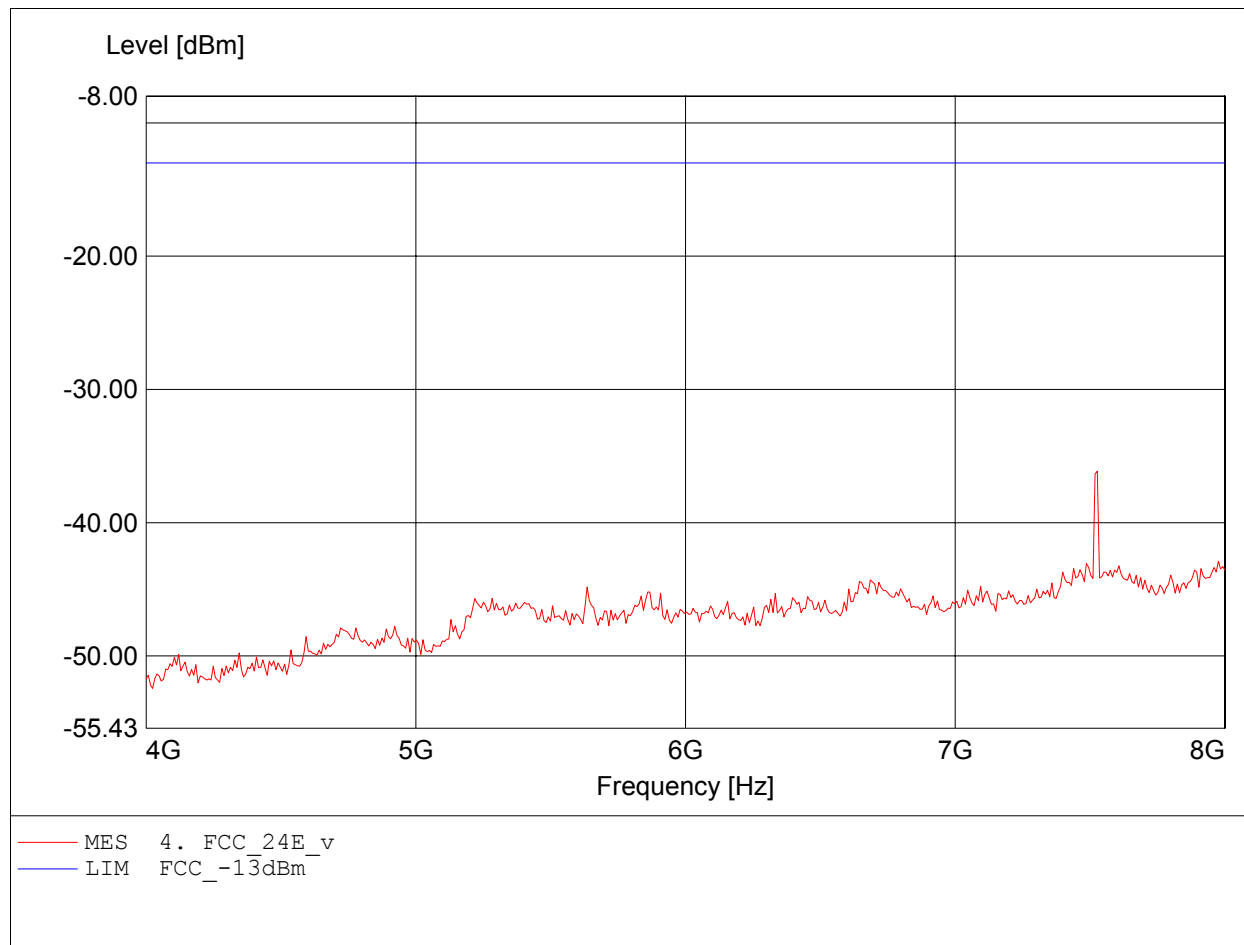

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.519GHz, Pmax: -37.93dBm, RBW: 1MHz

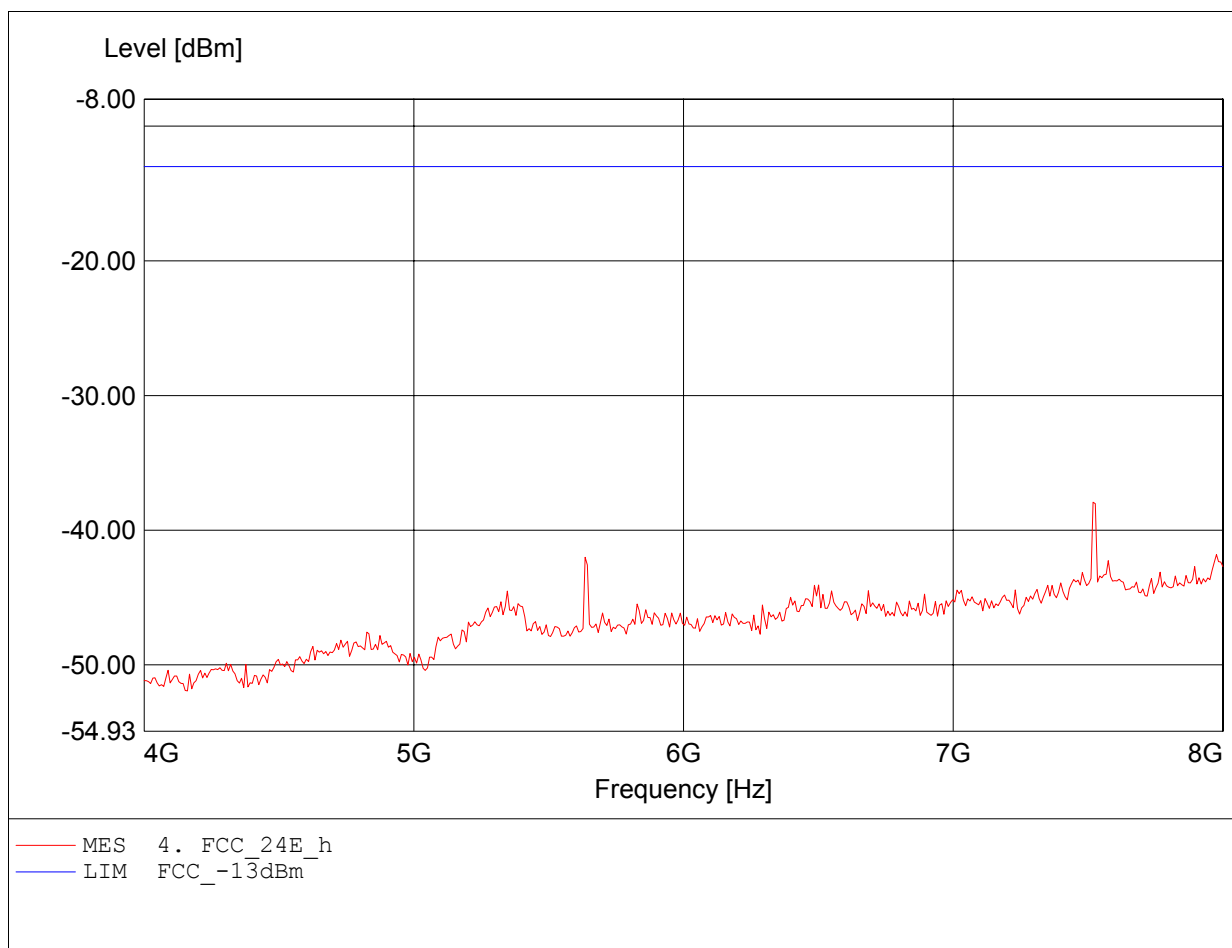

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.733GHz, Pmax: -37.99dBm, RBW: 1MHz

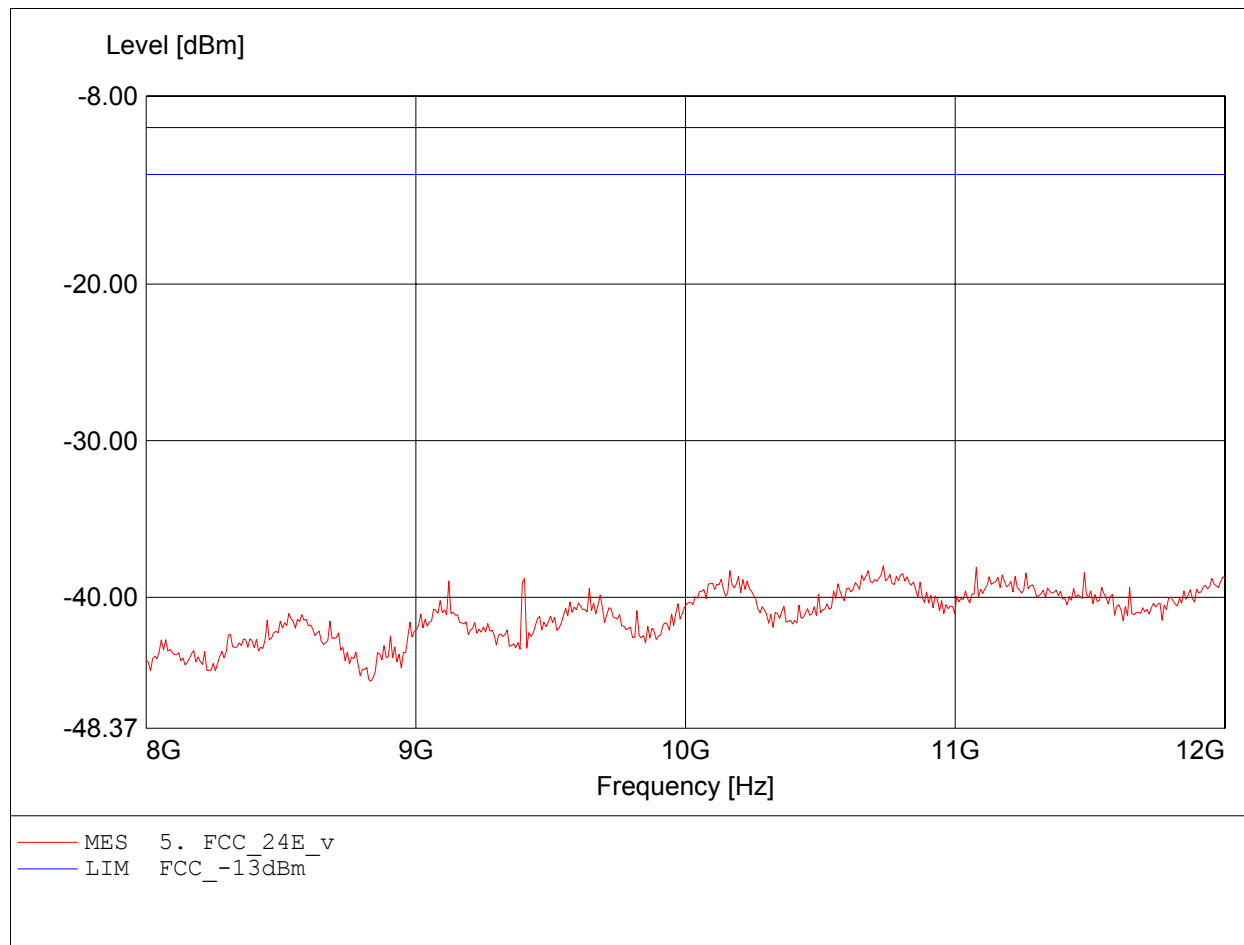

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.725GHz, Pmax: -36.43dBm, RBW: 1MHz

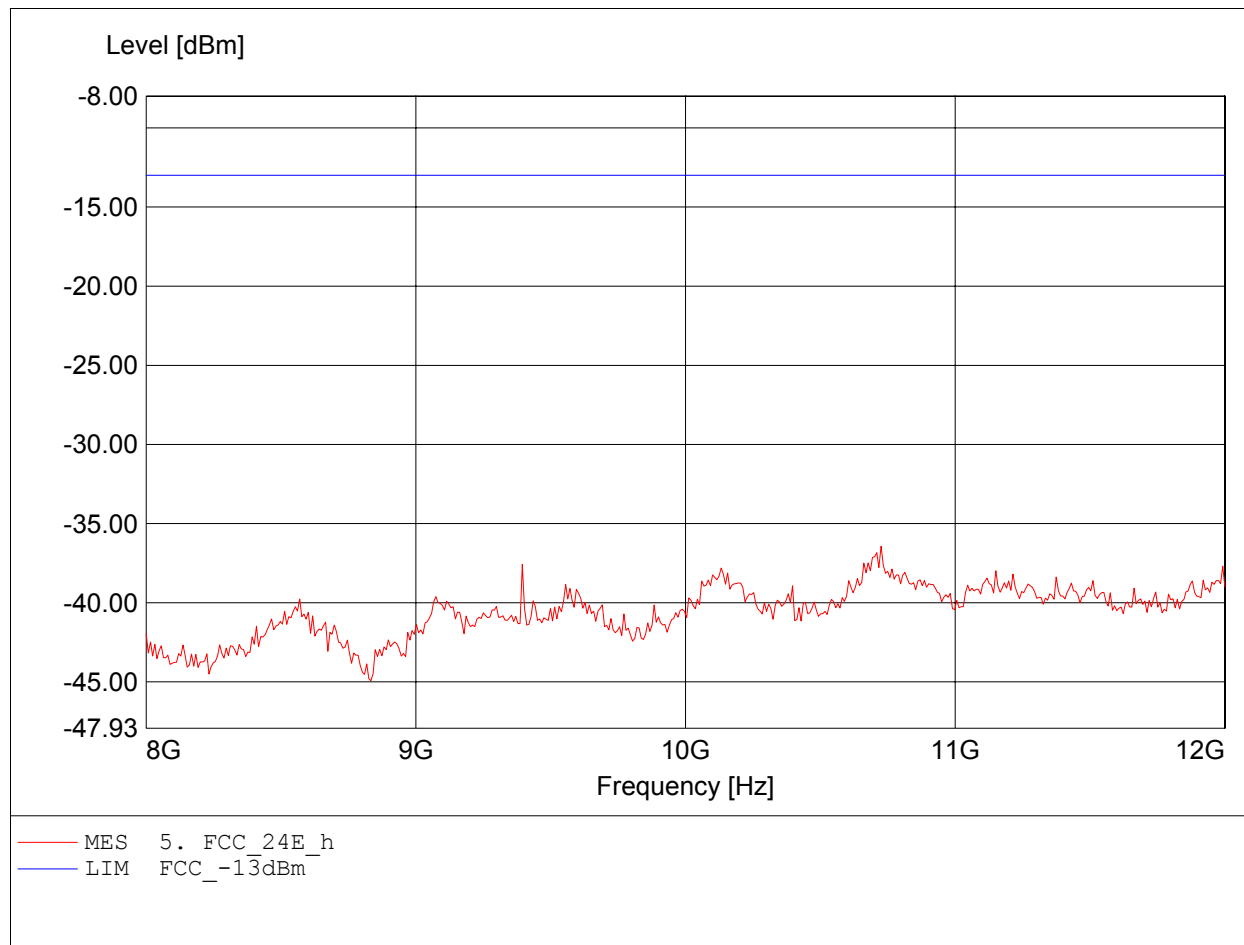

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.435GHz, Pmax: -27.70dBm, RBW: 1MHz

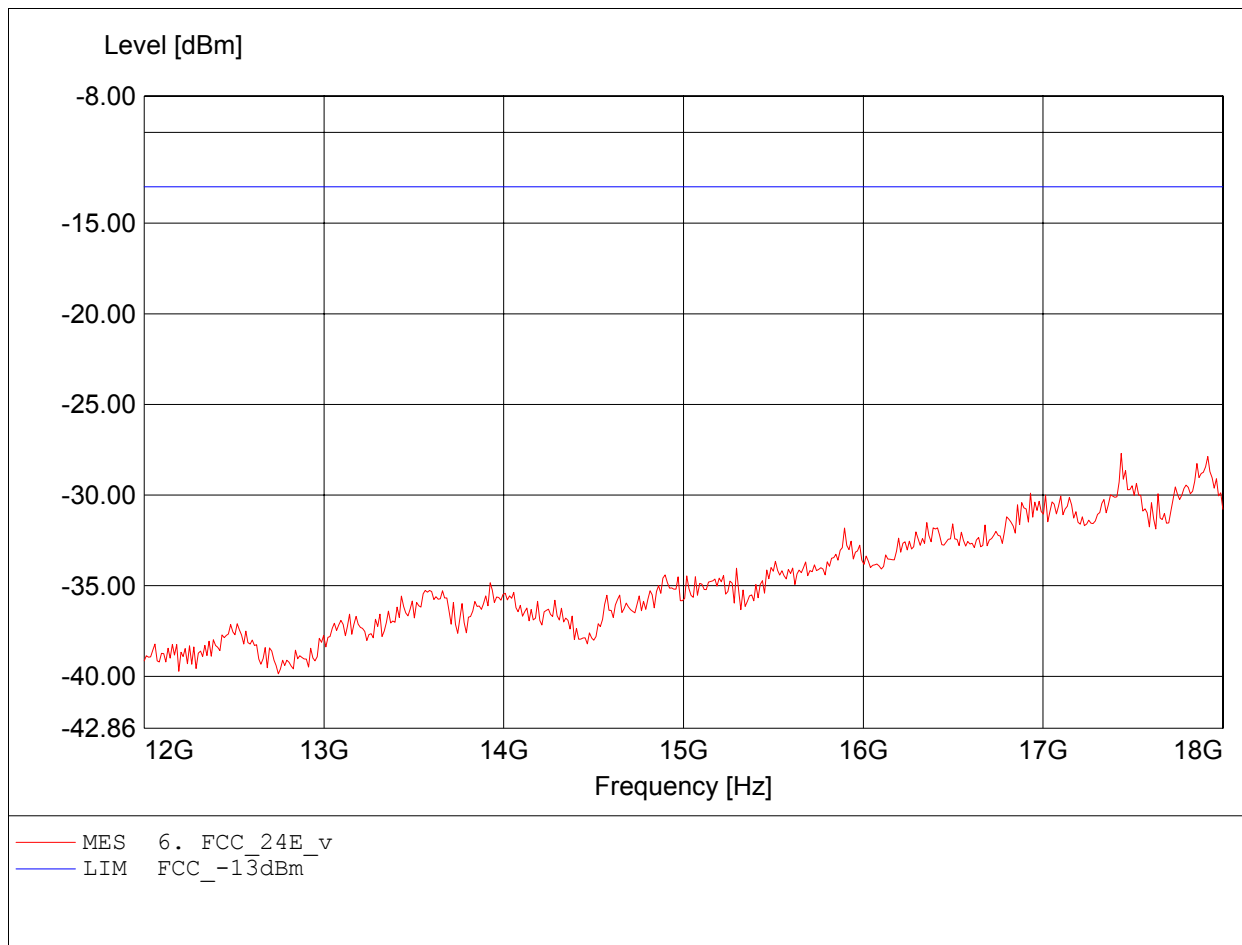

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.856GHz, Pmax: -27.95dBm, RBW: 1MHz

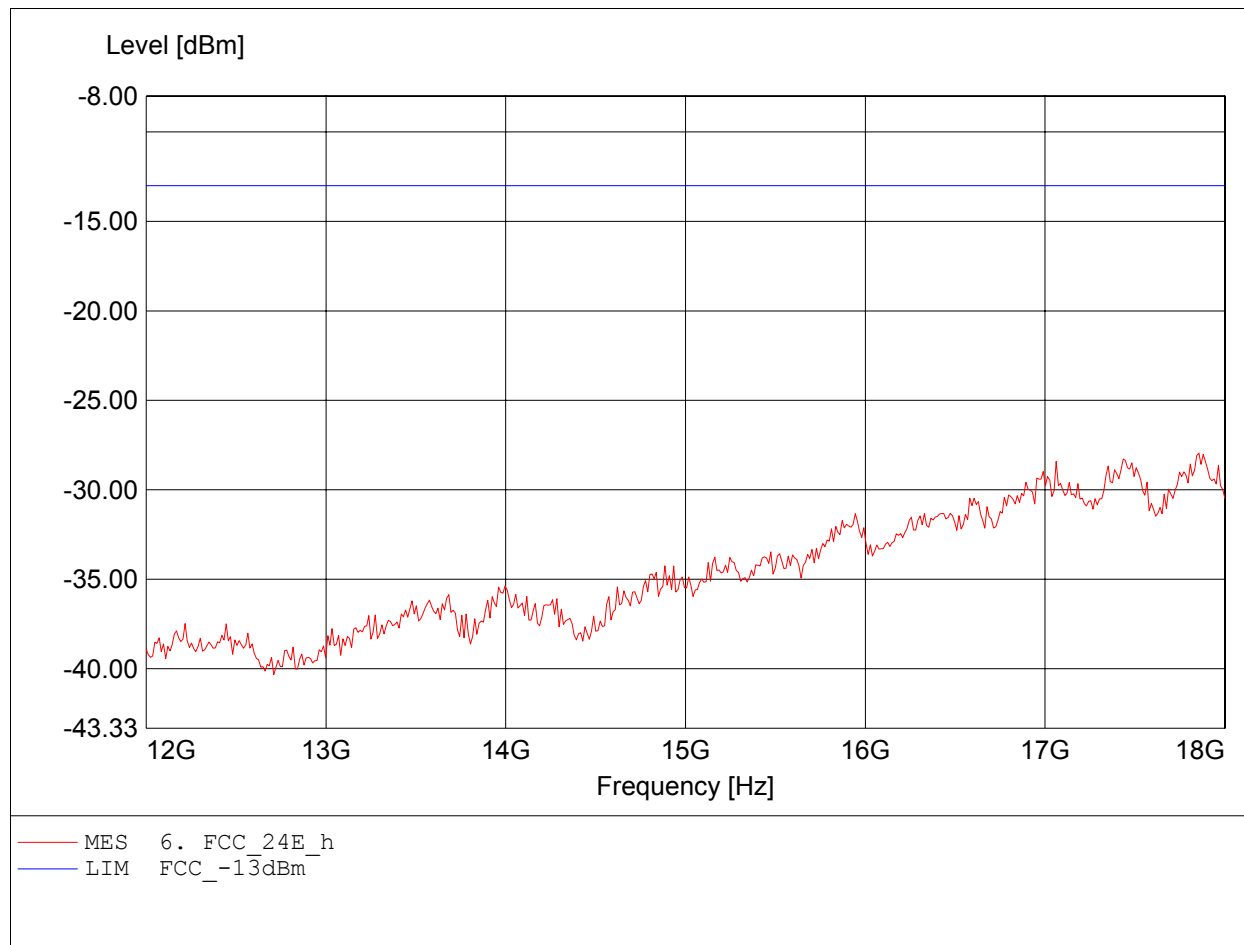

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.879GHz, Pmax: -32.76dBm, RBW: 1MHz

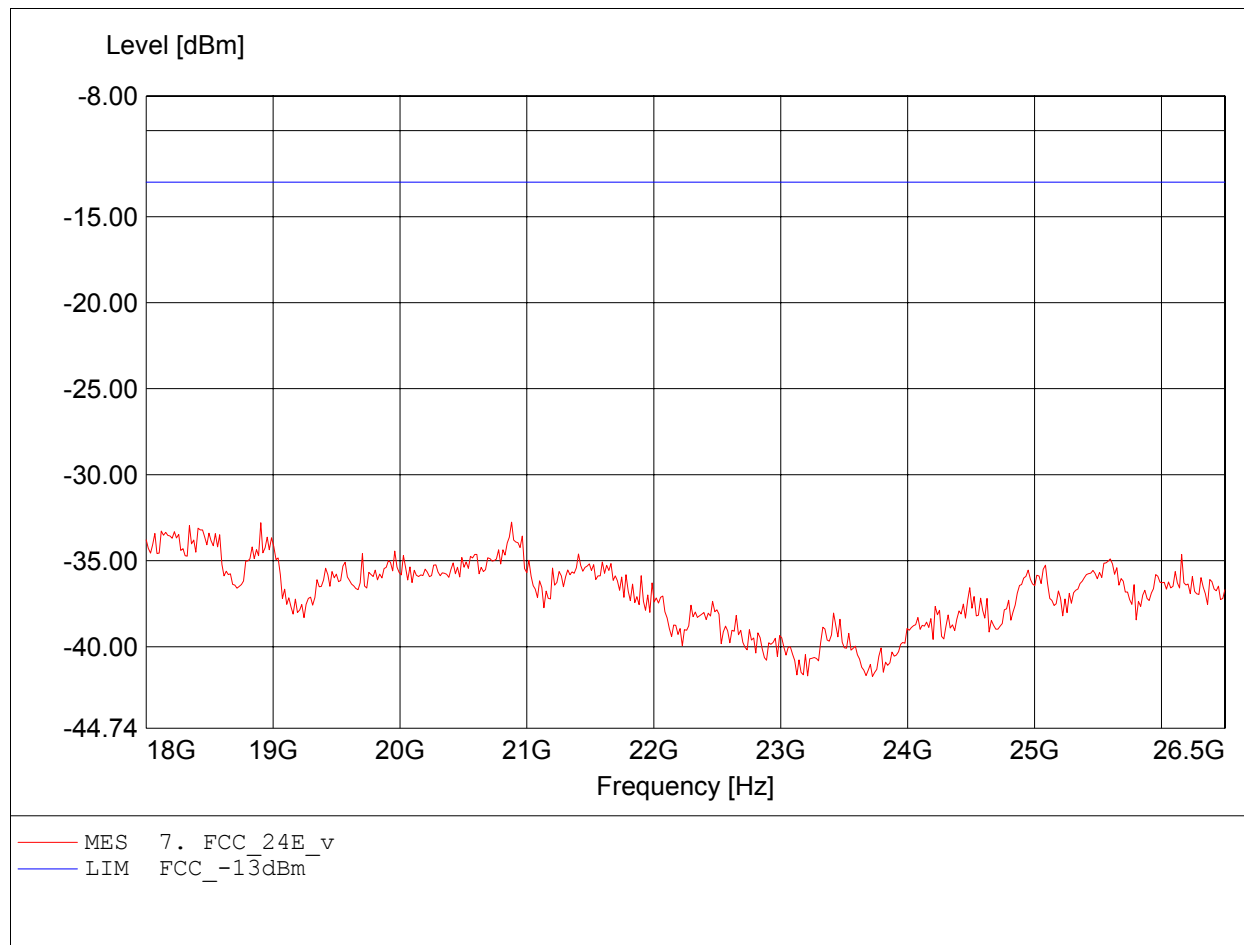

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.460GHz, Pmax: -32.49dBm, RBW: 1MHz

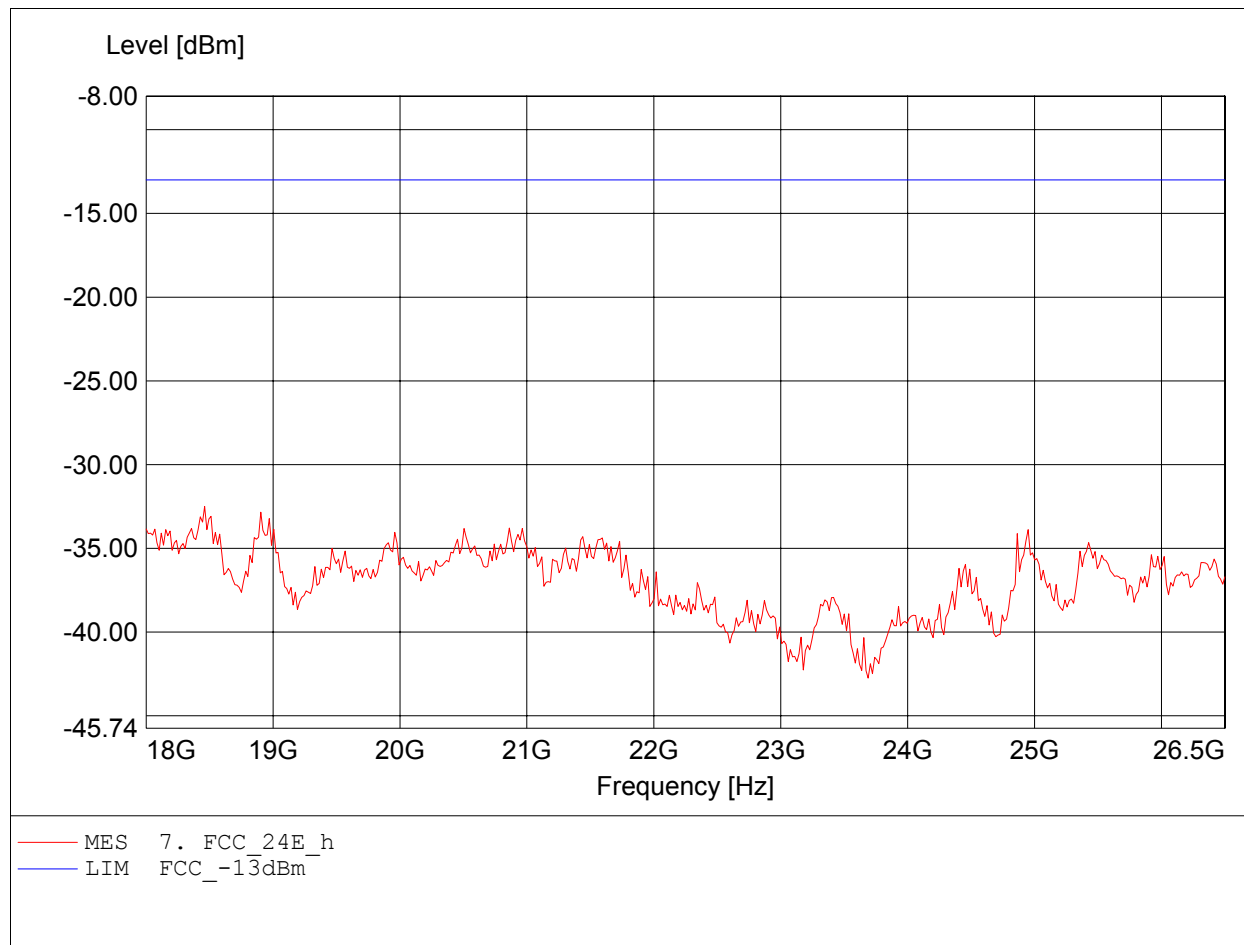

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.076MHz, Pmax: -60.84dBm, RBW: 1MHz

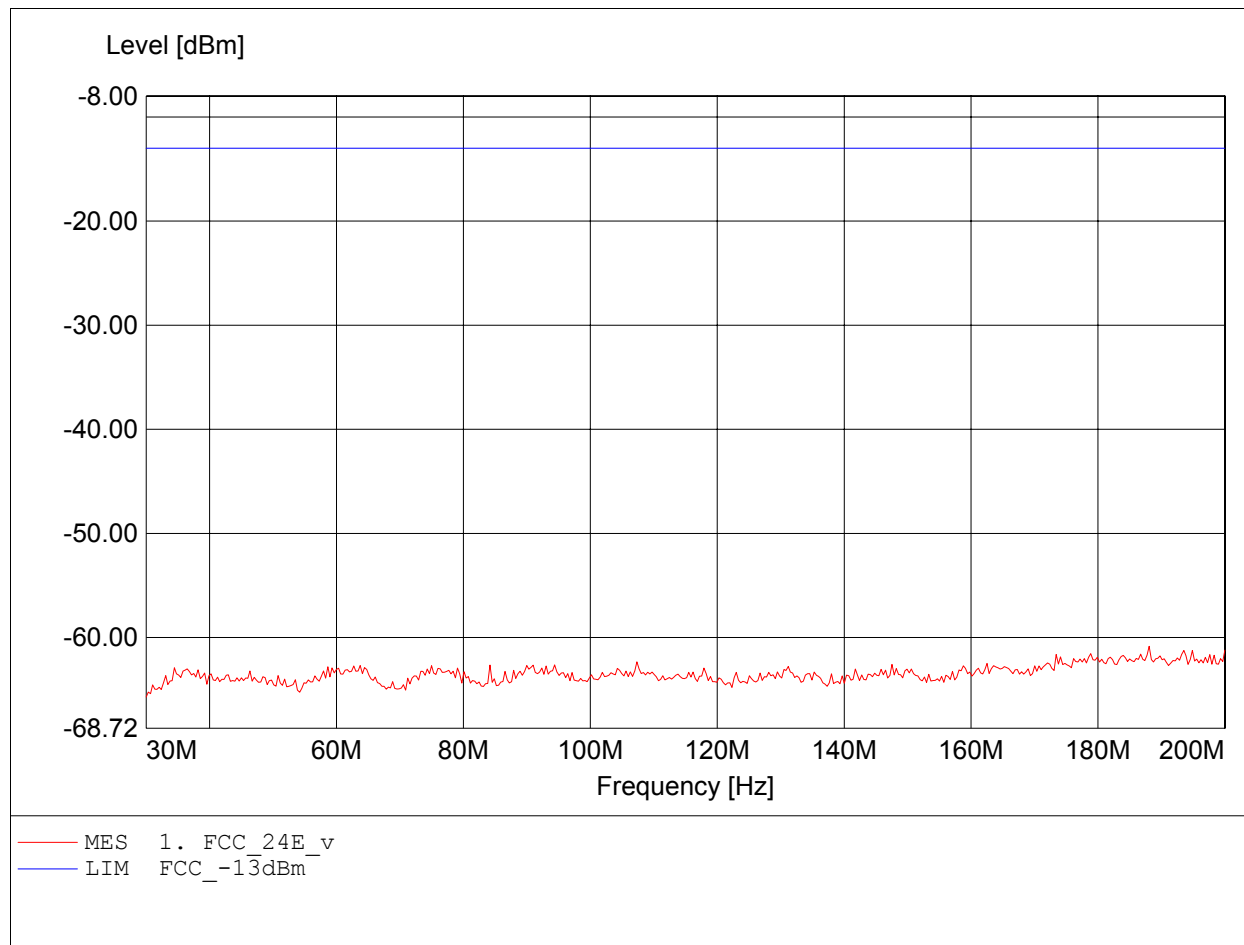

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 74.970MHz, Pmax: -61.64dBm, RBW: 1MHz

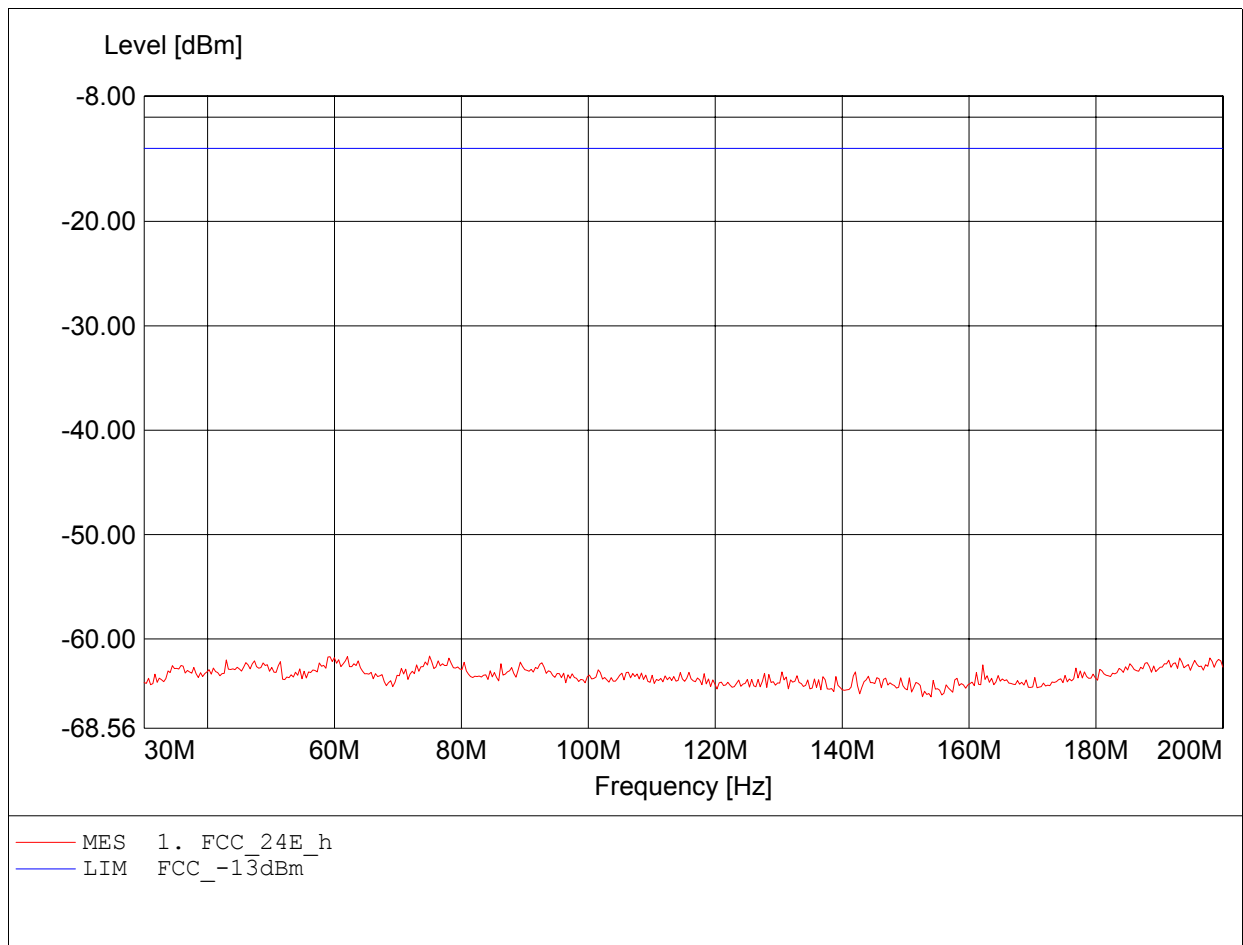

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 998.397MHz, Pmax: -47.65dBm, RBW: 1MHz

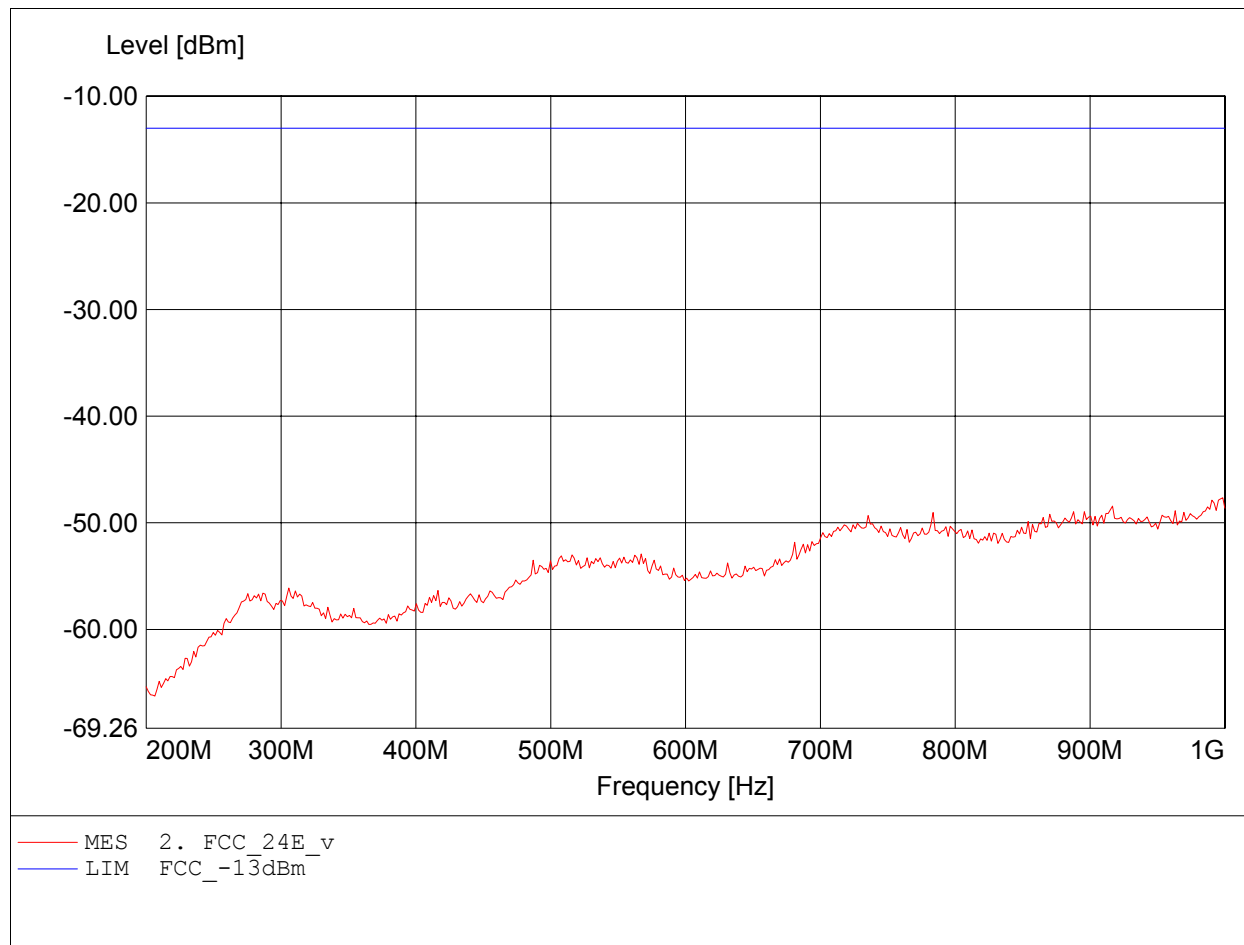

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 860.521MHz, Pmax: -46.79dBm, RBW: 1MHz

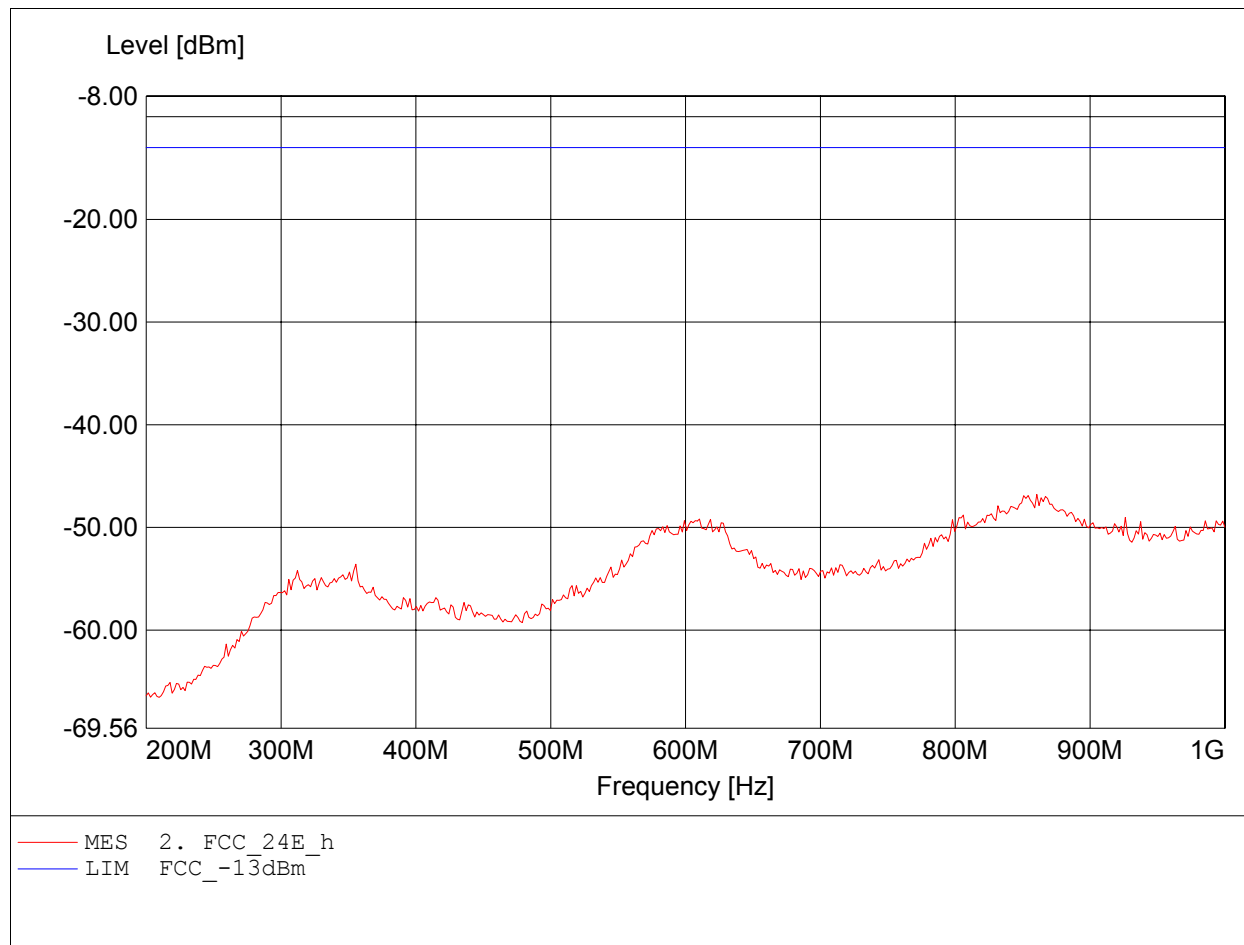

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -20.87dBm, RBW: 1MHz/3kHz

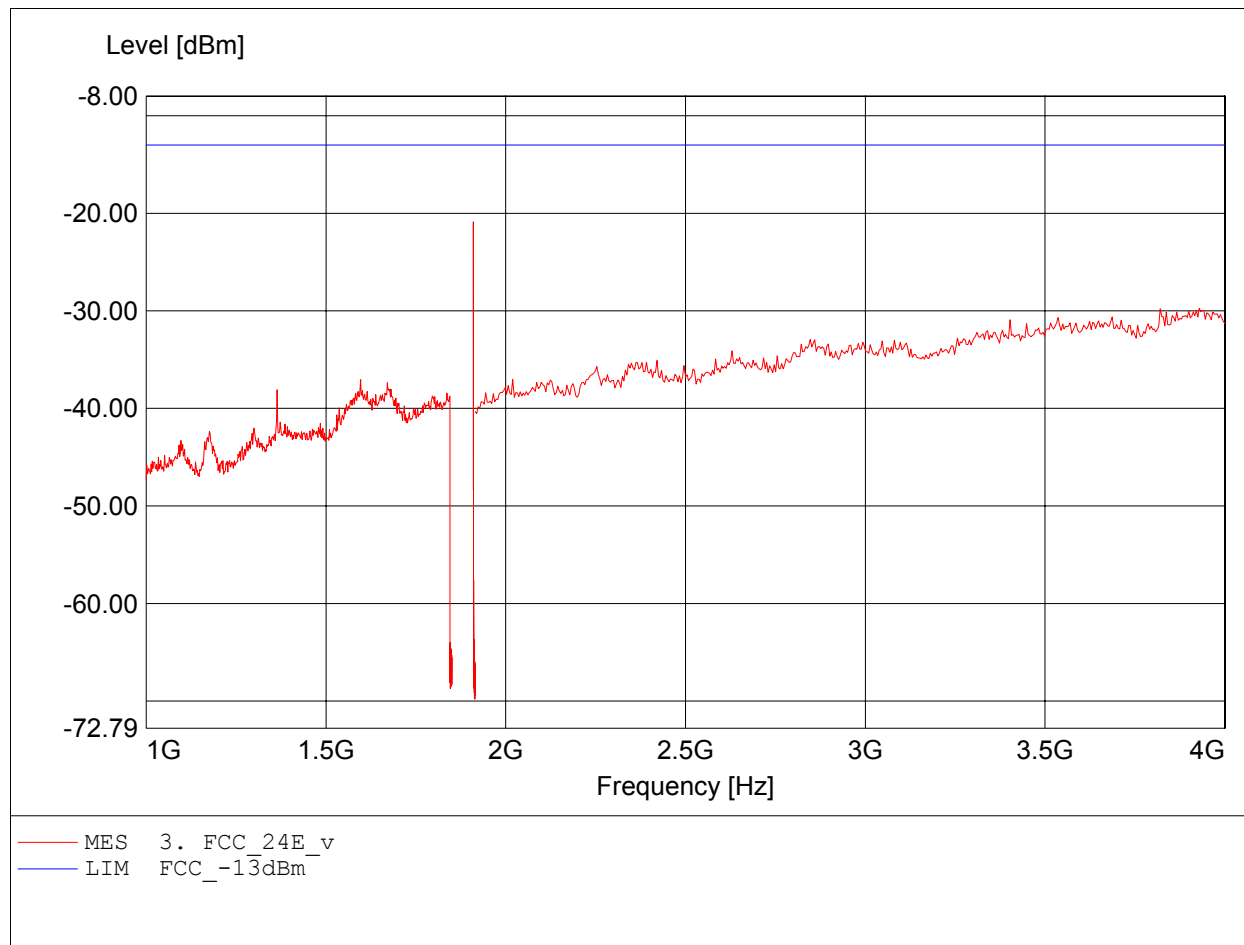

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 1.910GHz, Pmax: -23.08dBm, RBW: 1MHz/3kHz

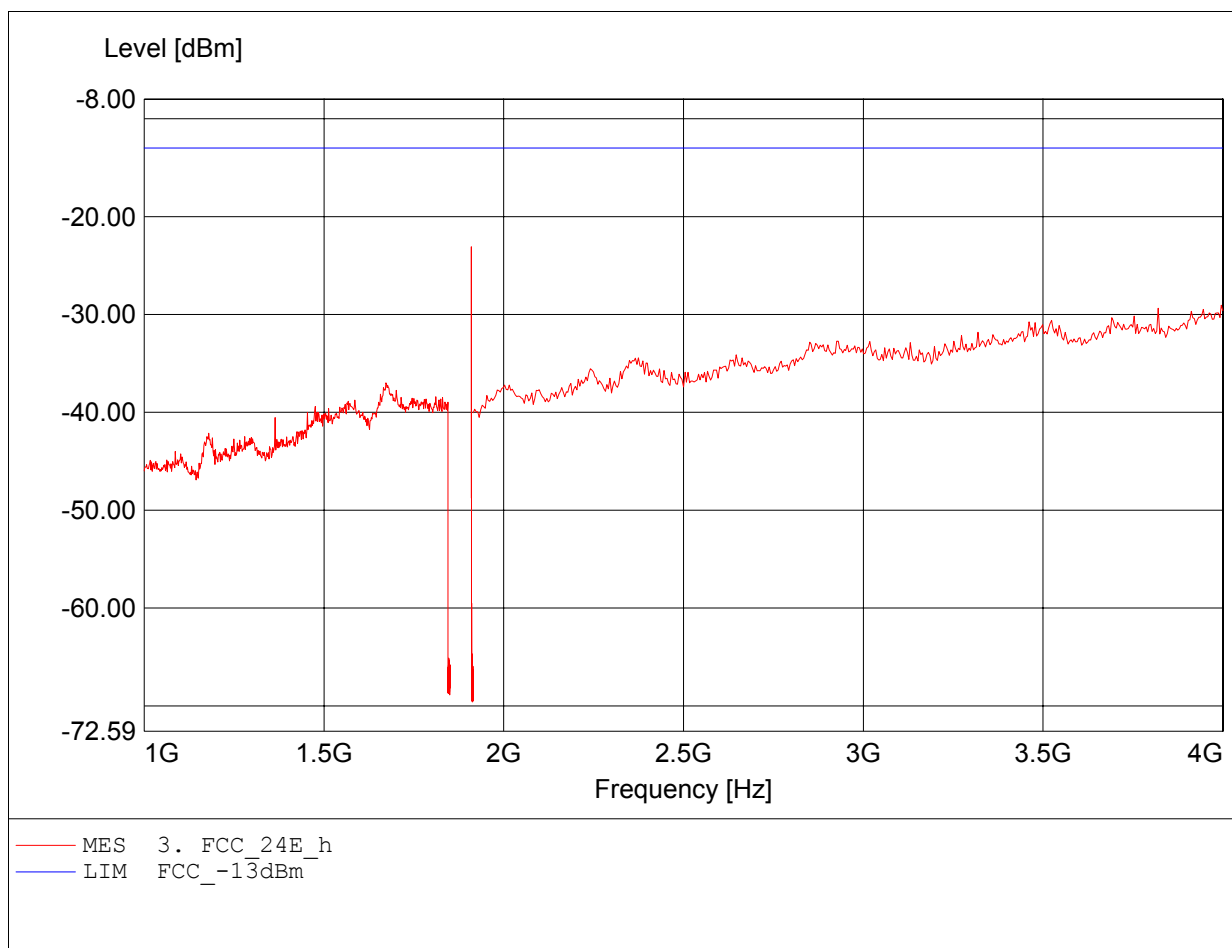

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -38.80dBm, RBW: 1MHz

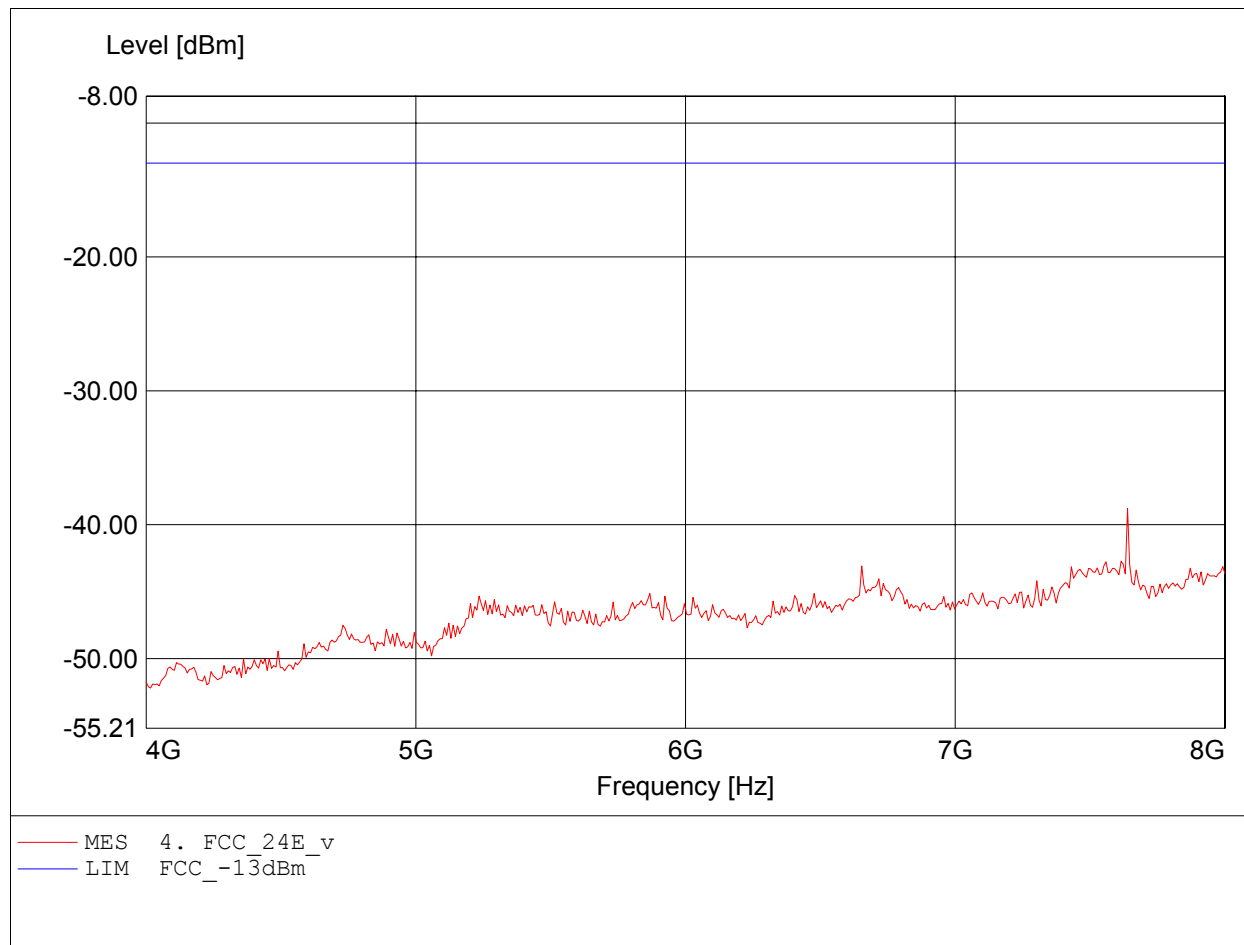

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.639GHz, Pmax: -35.62dBm, RBW: 1MHz

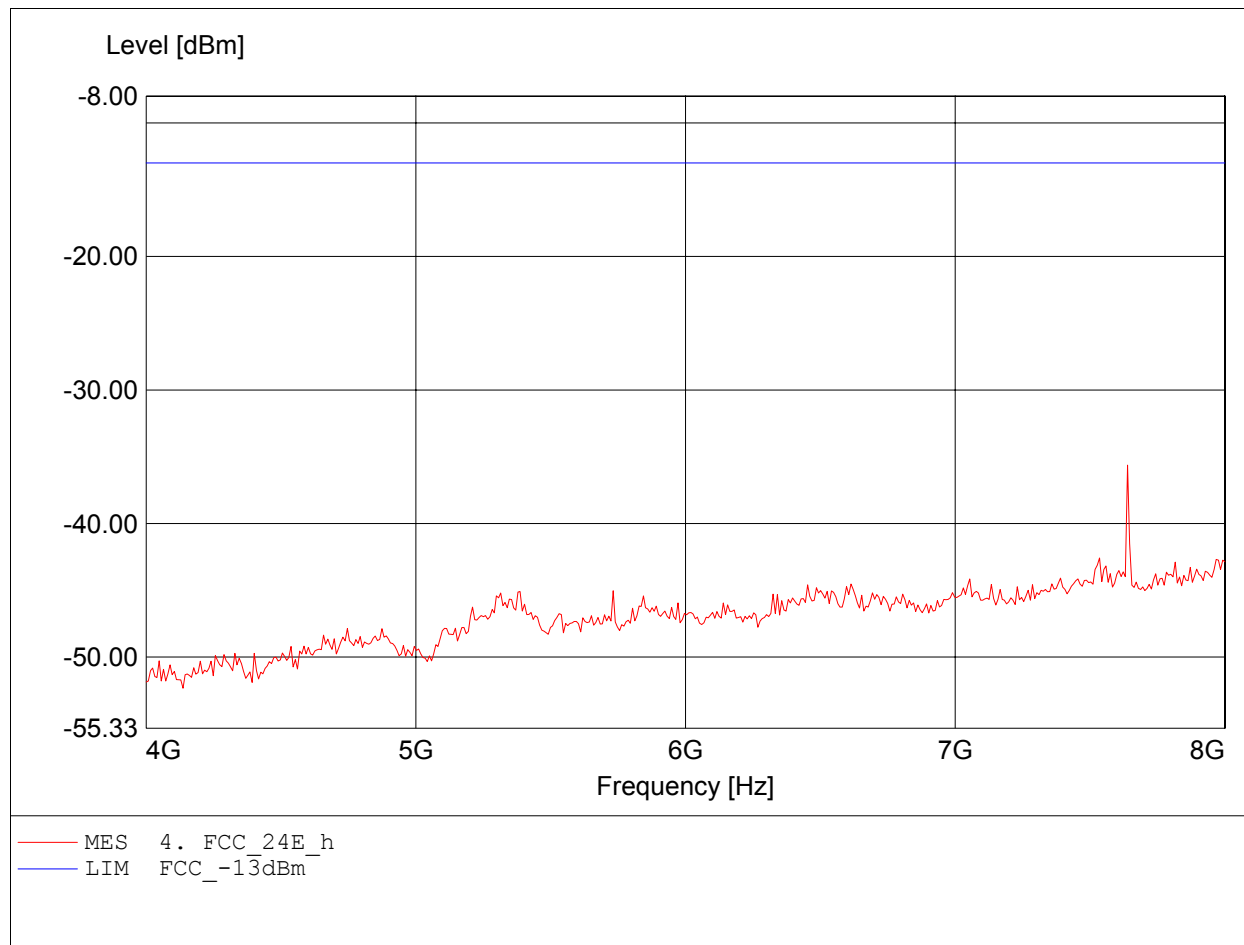

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.774GHz, Pmax: -37.60dBm, RBW: 1MHz

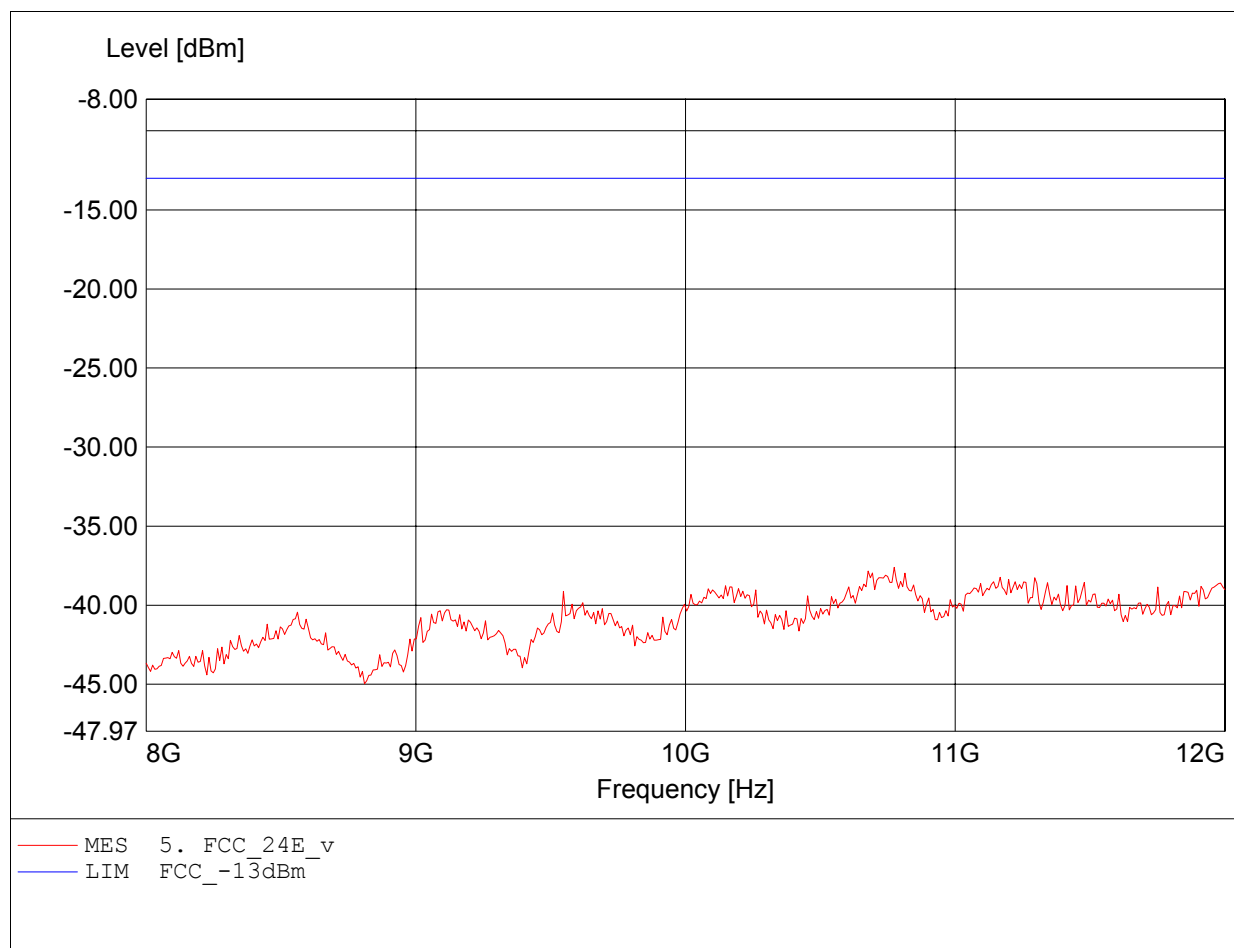

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.669GHz, Pmax: -37.35dBm, RBW: 1MHz

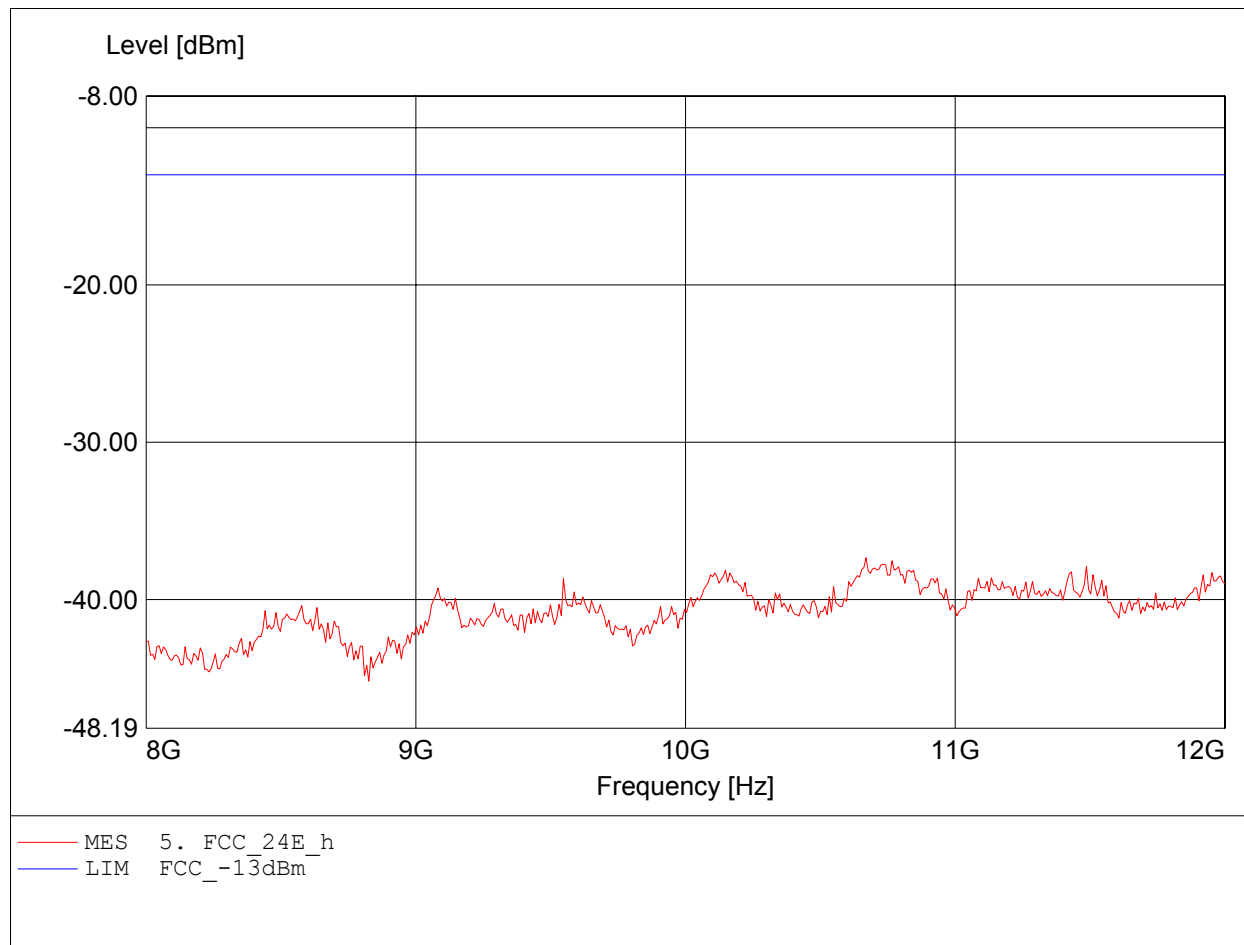

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.856GHz, Pmax: -28.03dBm, RBW: 1MHz

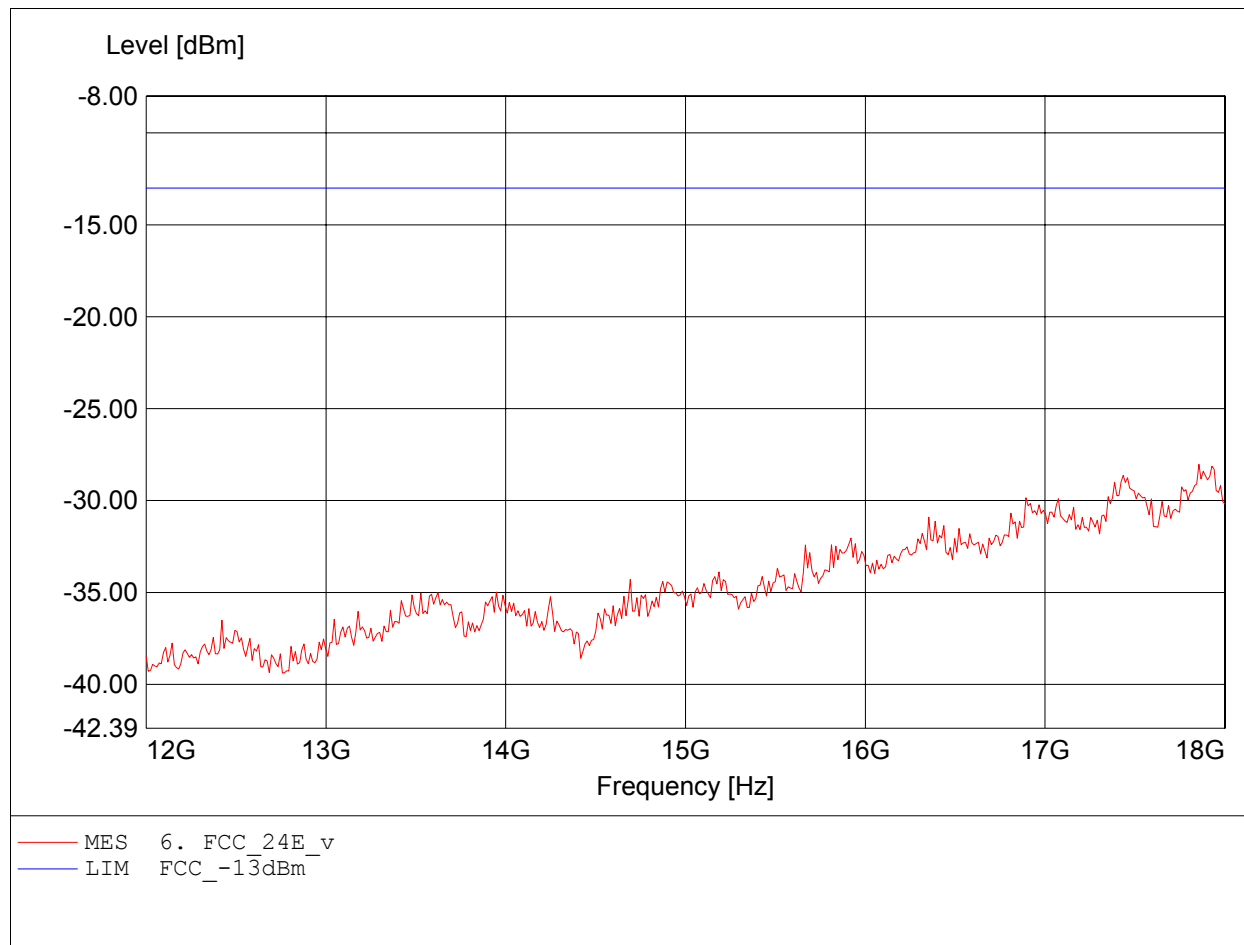

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E


Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.435GHz, Pmax: -27.70dBm, RBW: 1MHz

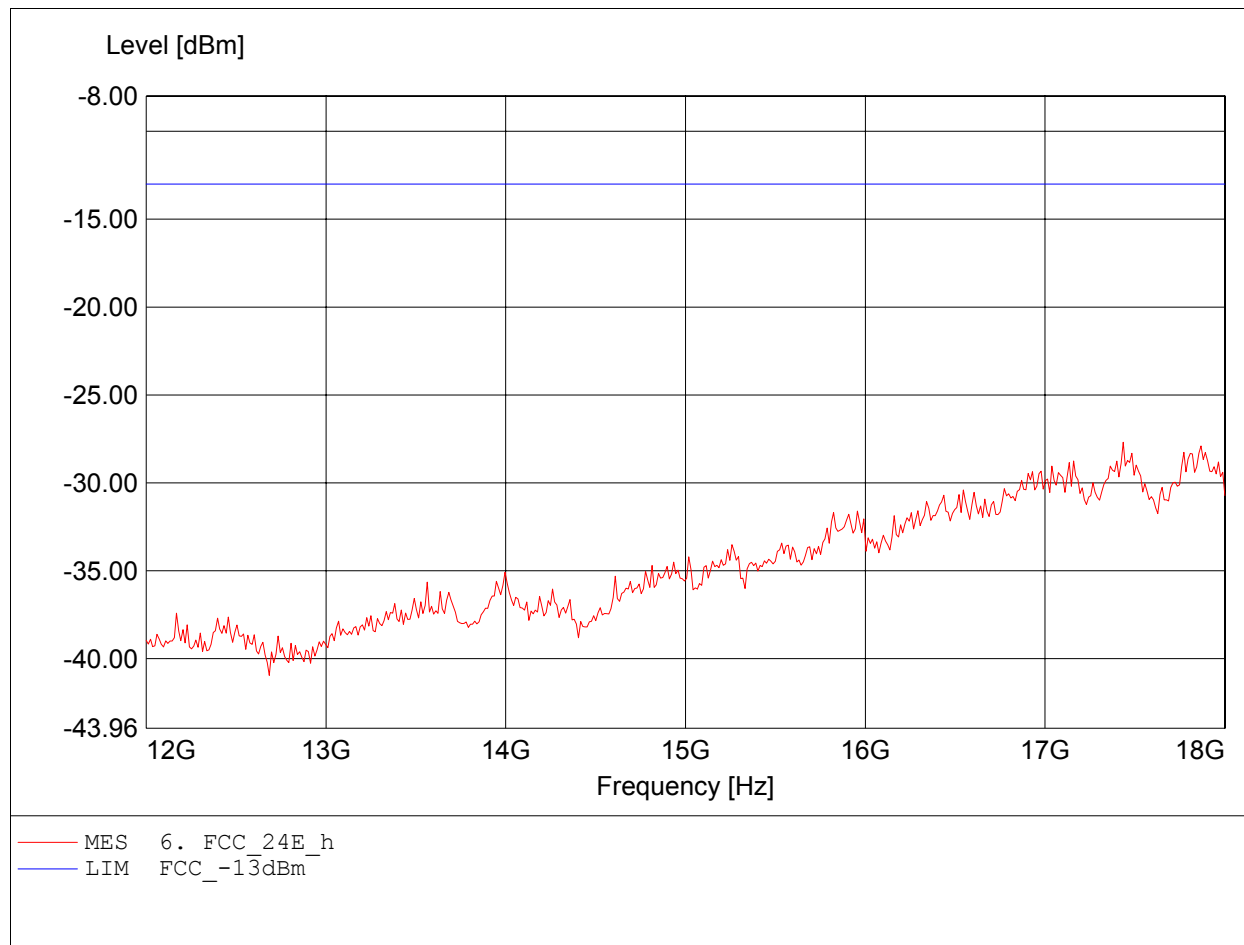

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 810
Test Site / Operator: ETS / Mr. Walter
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 20.862GHz, Pmax: -32.27dBm, RBW: 1MHz

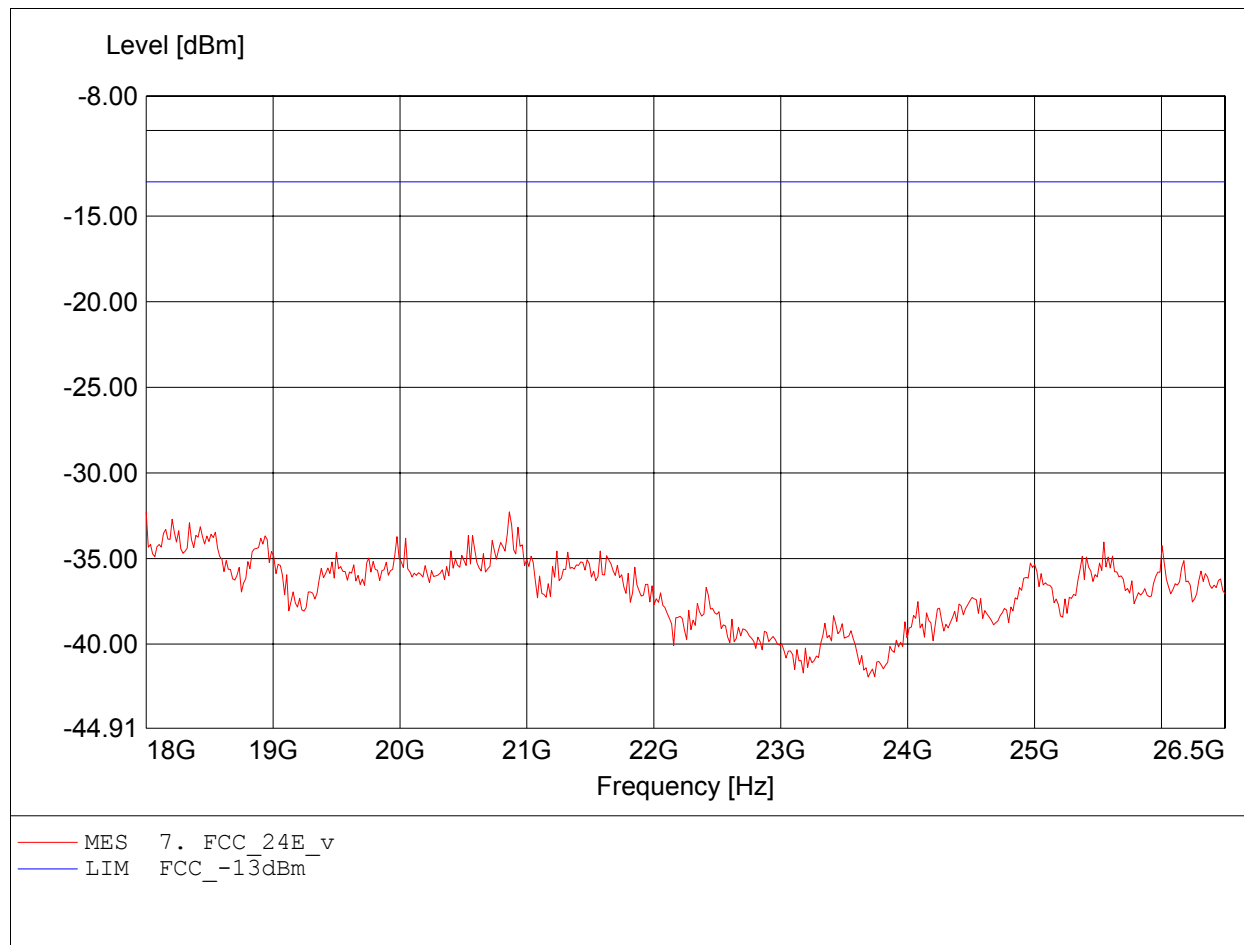

Radiated Emissions Tx

FCC RULES PART 24 SUBPART E

Approval Holder: Pantech Co. Ltd.
EUT: Dual Band GSM 850/ PCS 1900 (with WAP & GPRS)
Model / Channel: PG-1910 / 661
Test Site / Operator: ETS / Mr. Heide
Temperature/ Voltage: 23°C / Unom.: 4.20 V DC
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.426GHz, Pmax: -32.46dBm, RBW: 1MHz

