


Appendix B

RF Power Output




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 28.05 dBm VBW 3 MHz
36 dBm 1.84998958 GHz SWT 5 ms Unit dBm

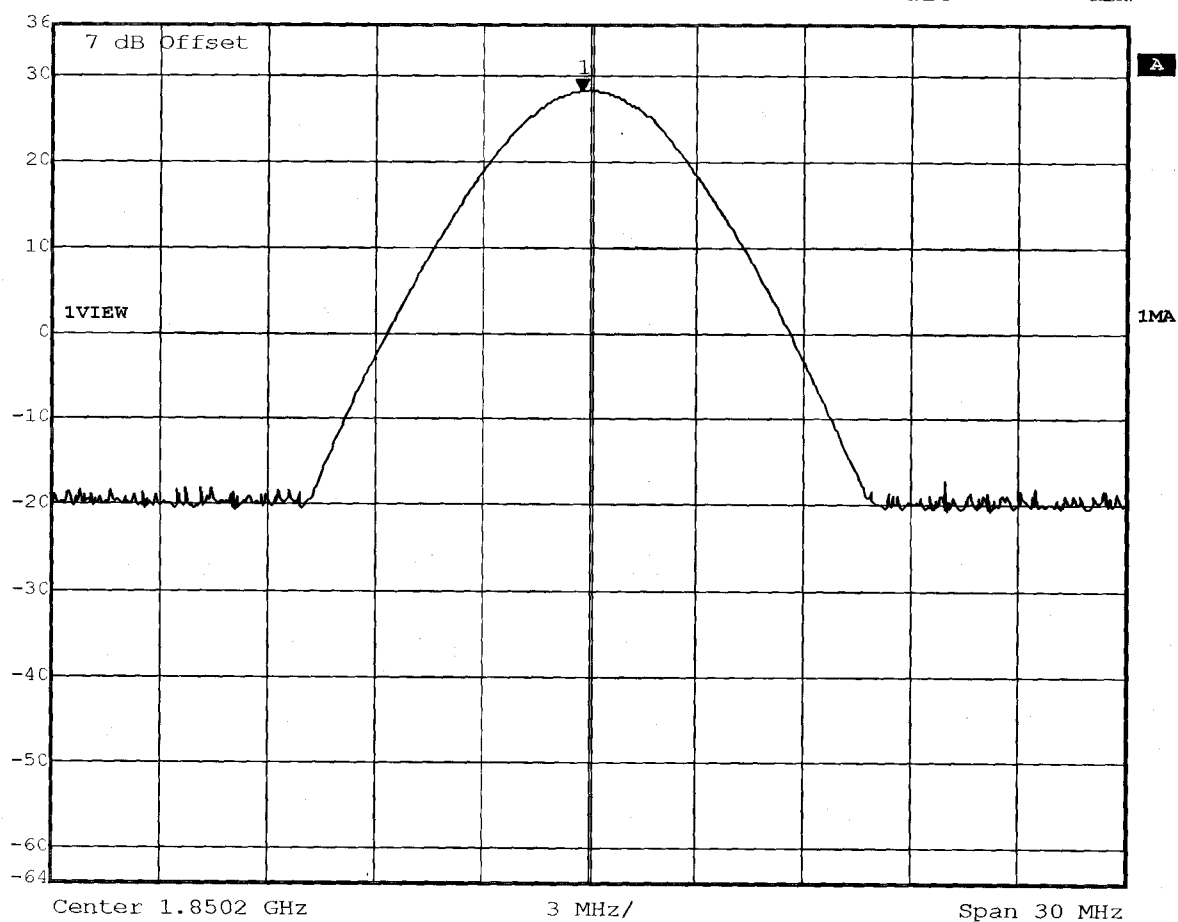

Title: Output power conducted / Channel: 512
Comment A: Pantech PG-C300
Date: 29.NOV.2005 09:52:56




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 27.83 dBm VBW 3 MHz
36 dBm 1.87984970 GHz SWT 5 ms Unit dBm

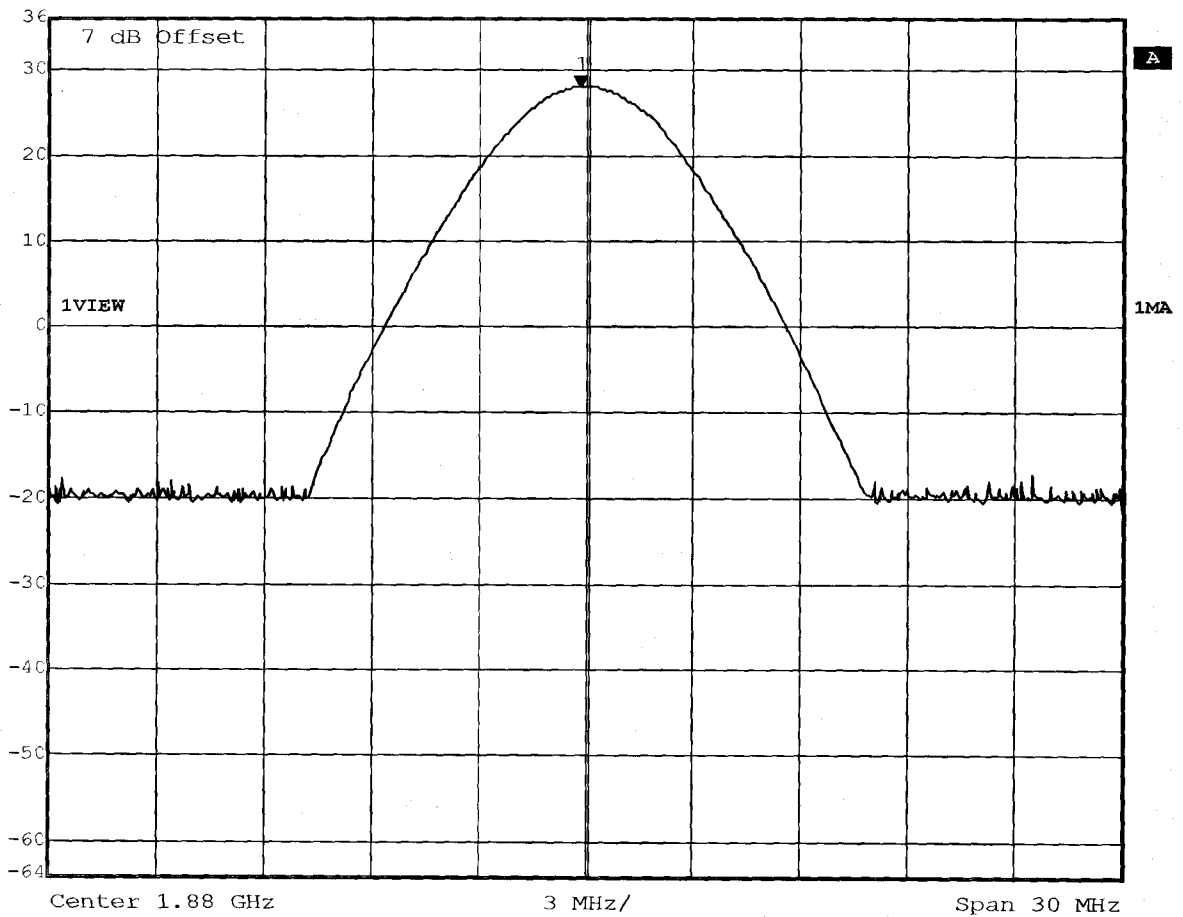

Title: Output power conducted / Channel: 661
Comment A: Pantech PG-C300
Date: 29.NOV.2005 09:56:36




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 26.80 dBm VBW 3 MHz
36 dBm 1.90958958 GHz SWT 5 ms Unit dBm

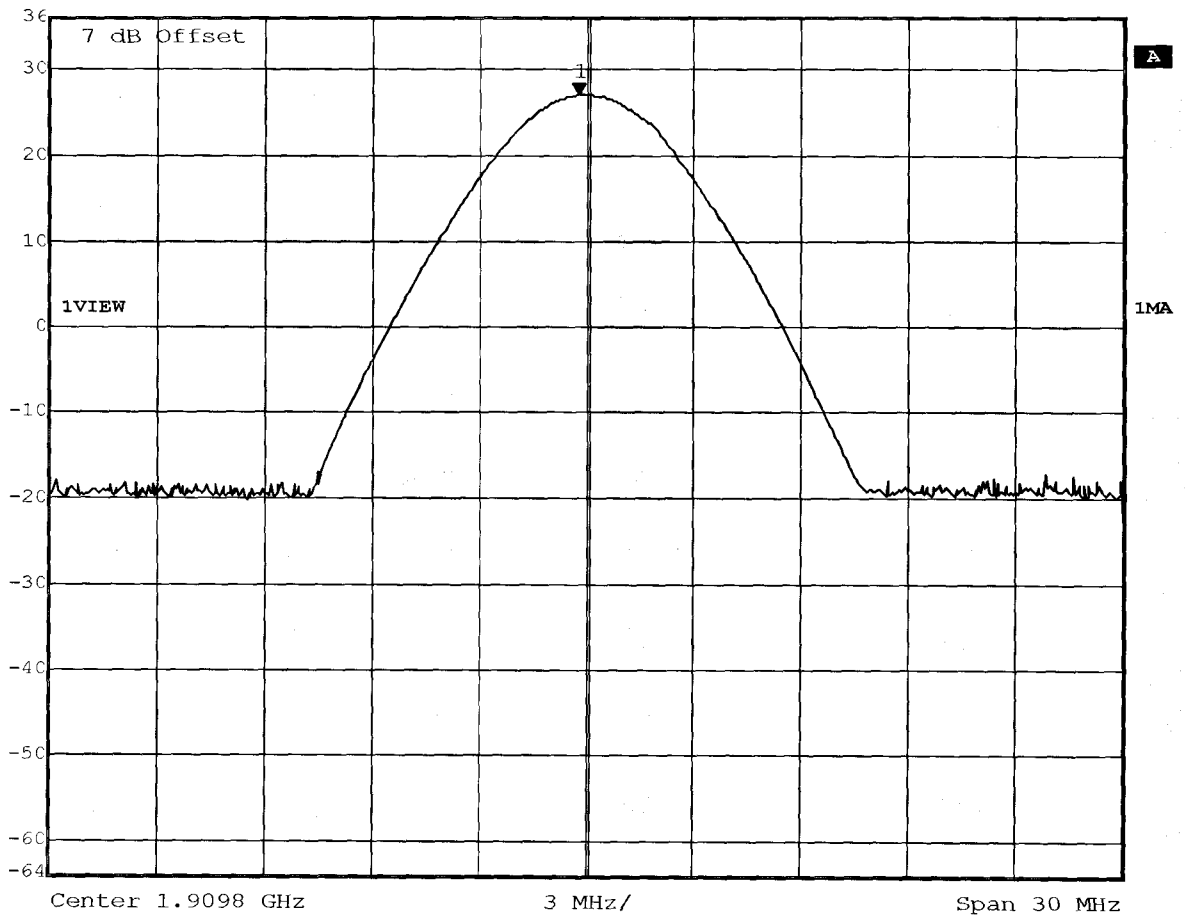

Title: Output power conducted / Channel: 810
Comment A: Pantech PG-C300
Date: 29.NOV.2005 10:08:02




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 32.47 dBm VBW 3 MHz
36 dBm 823.98957916 MHz SWT 5 ms Unit dBm

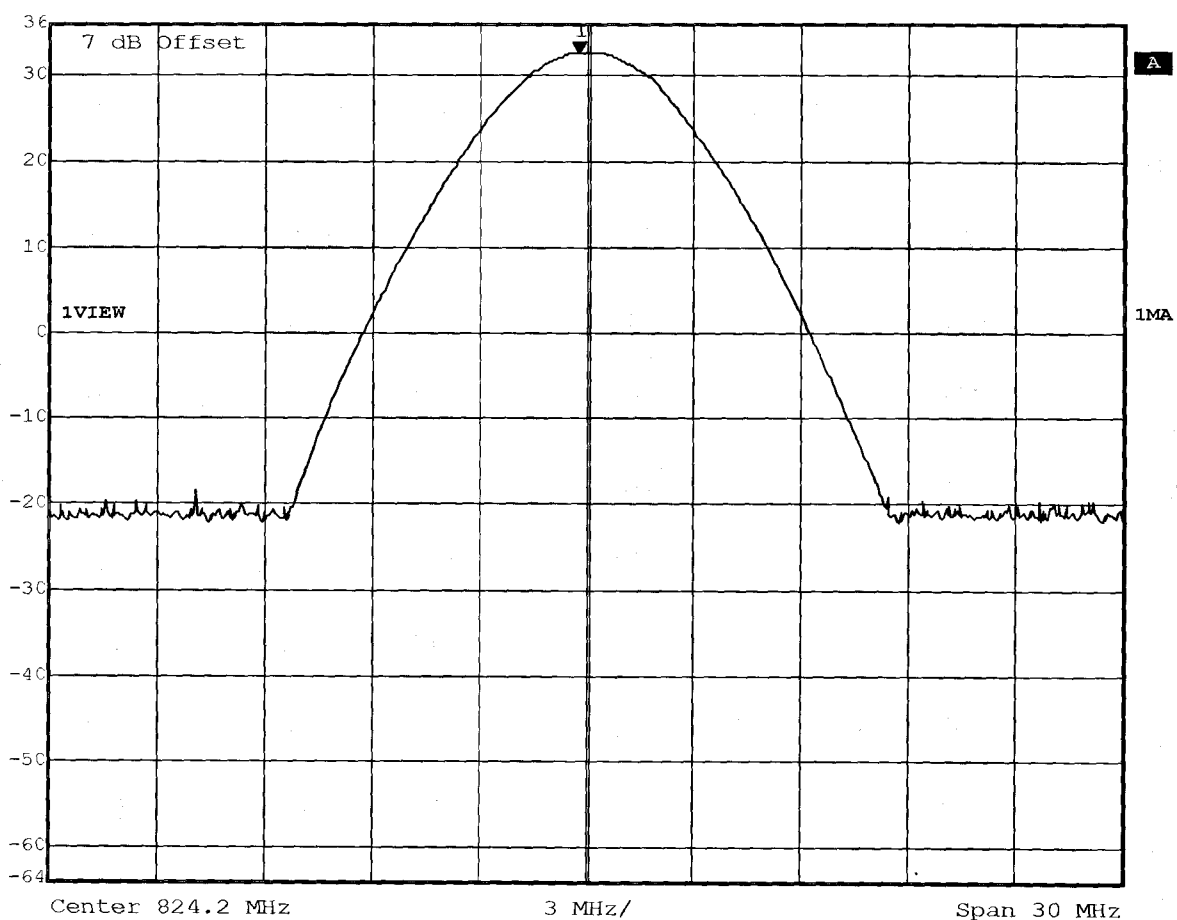

Title: Output power conducted / Channel: 128
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:18:35




Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 32.17 dBm VBW 3 MHz
36 dBm 836.10981964 MHz SWT 5 ms Unit dBm

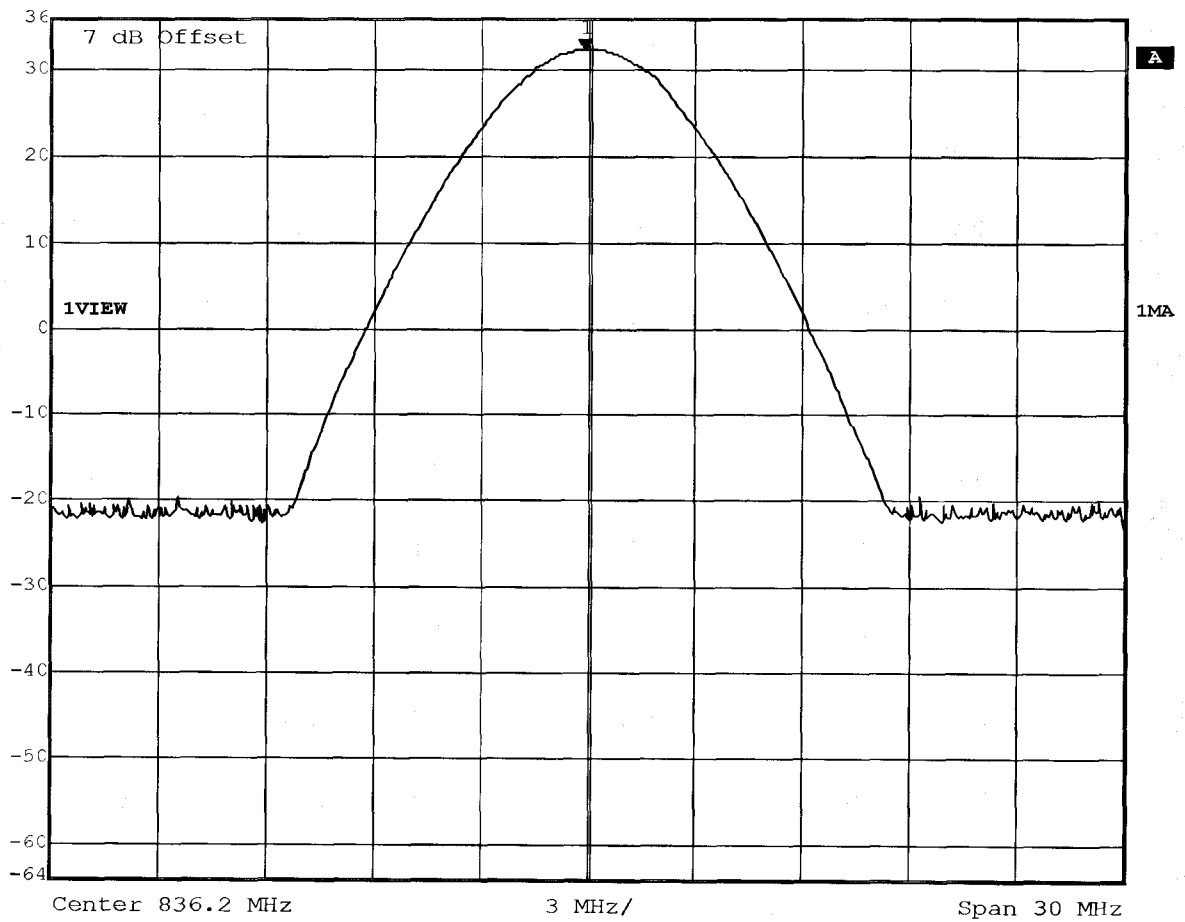

Title: Output power conducted / Channel: 188
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:19:28



Marker 1 [T1] RBW 3 MHz RF Att 50 dB
Ref Lvl 31.85 dBm VBW 3 MHz
36 dBm 848.70981964 MHz SWT 5 ms Unit dBm

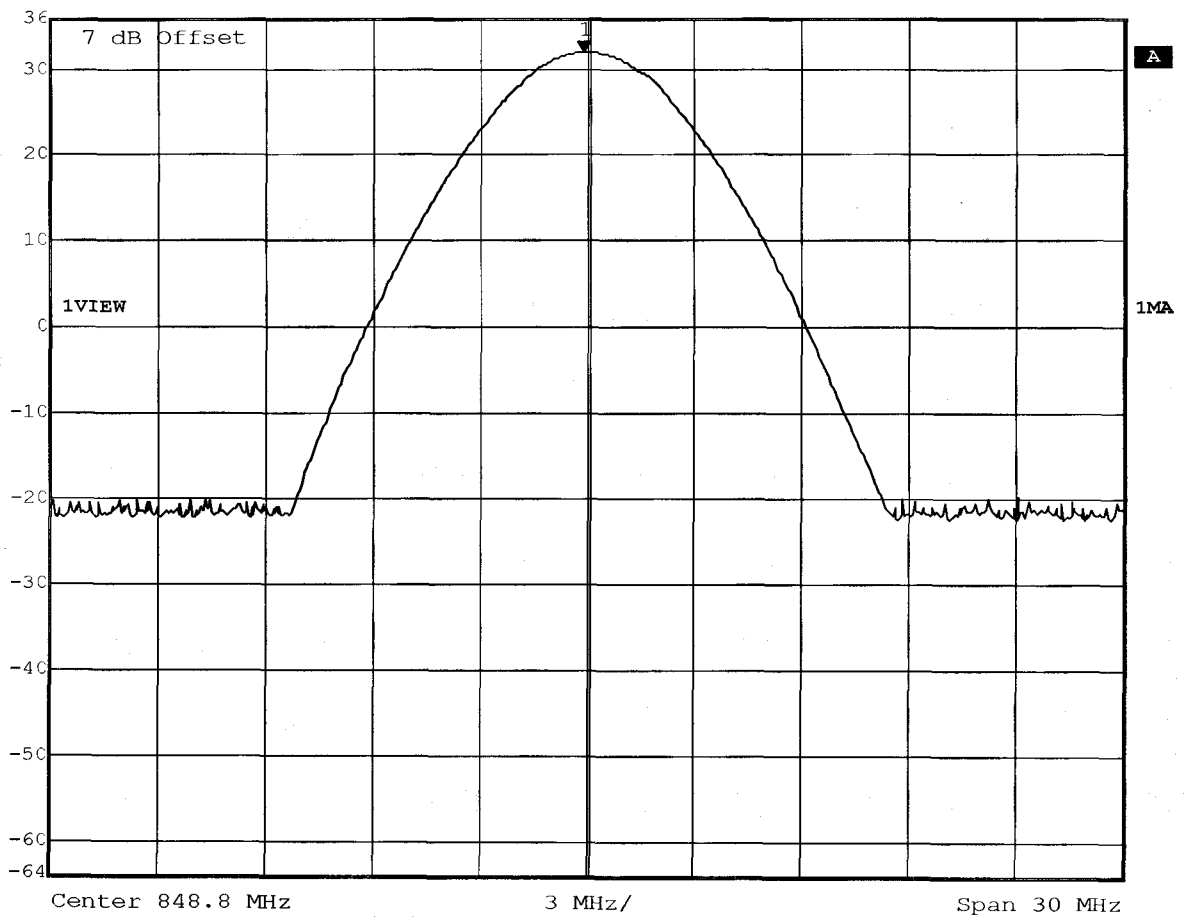


Title: Output power conducted / Channel: 251
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:34:01

Appendix C

ERP, EIRP


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 25.32dBm, RBW: 3MHz

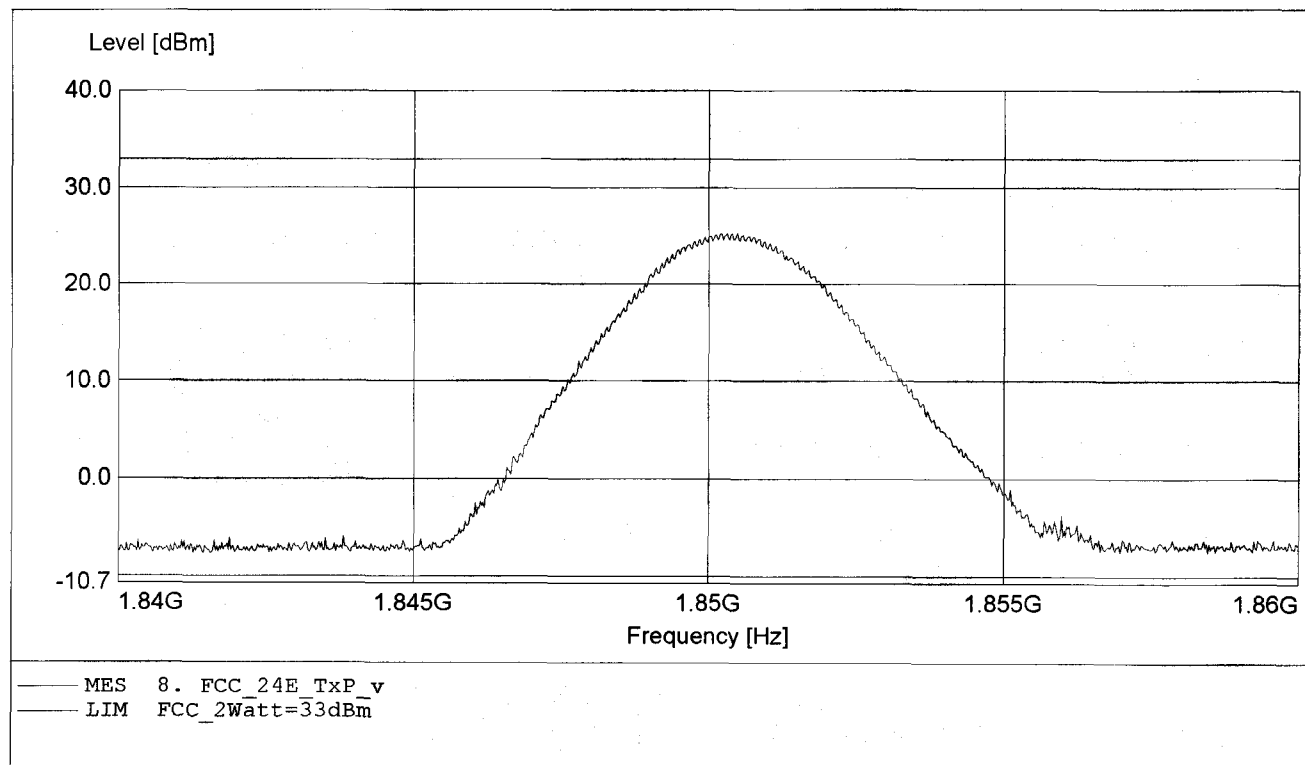


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025, PCL 0
Comment 2: Freq: 1.850GHz, Pmax: 25.63dBm, RBW: 3MHz

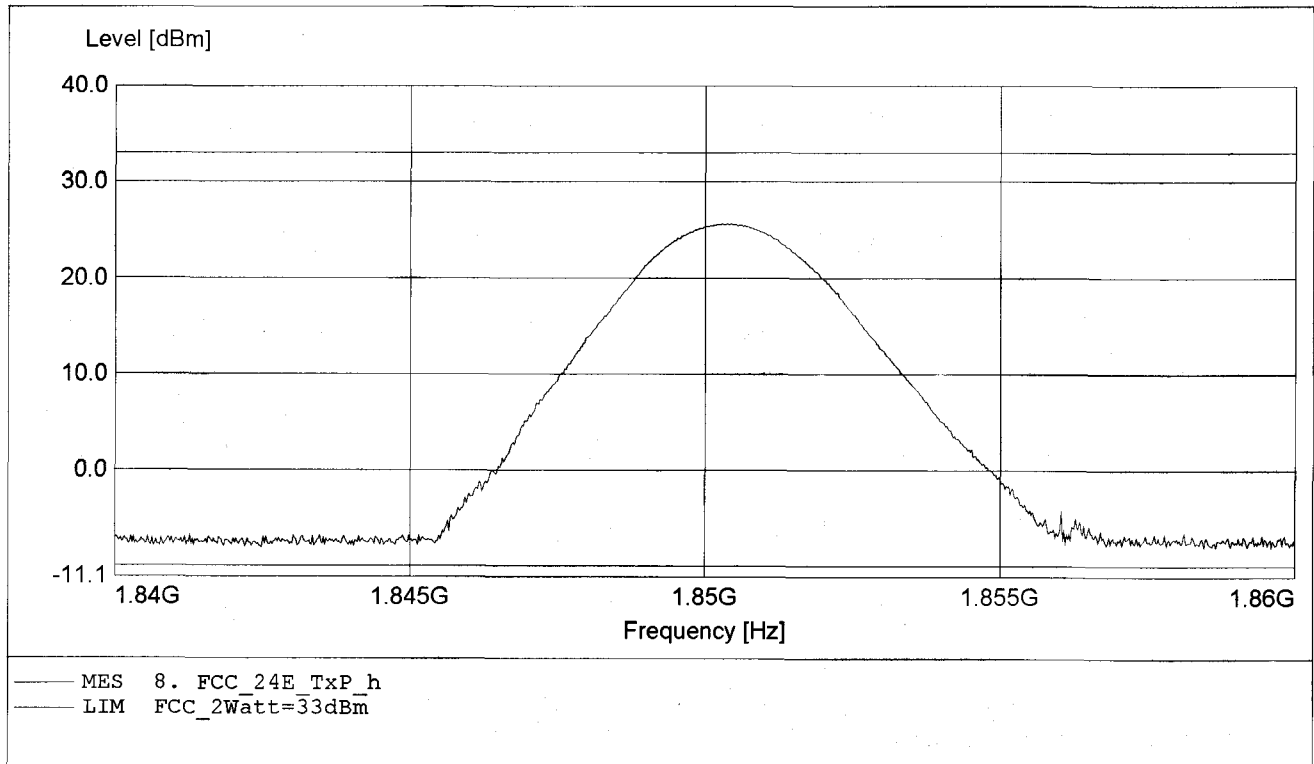


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 24.67dBm, RBW: 3MHz

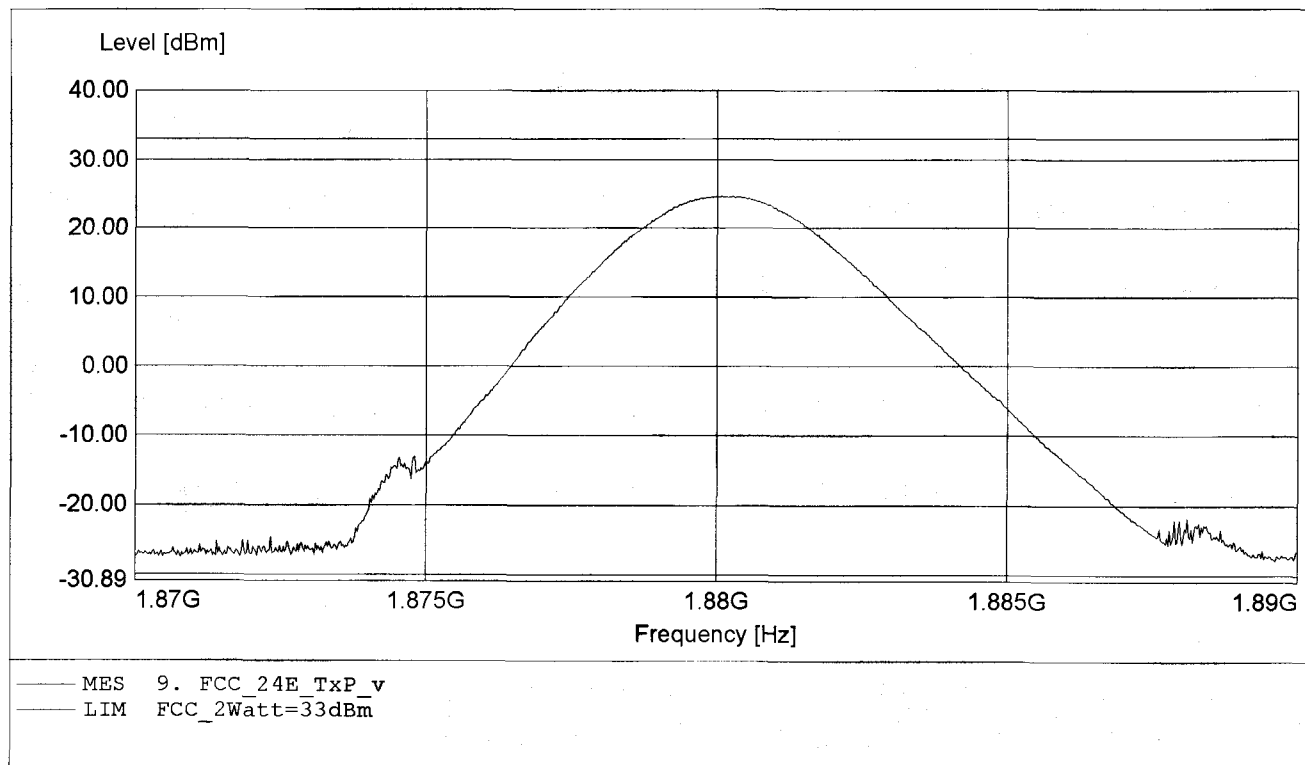


Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.880GHz, Pmax: 24.93dBm, RBW: 3MHz

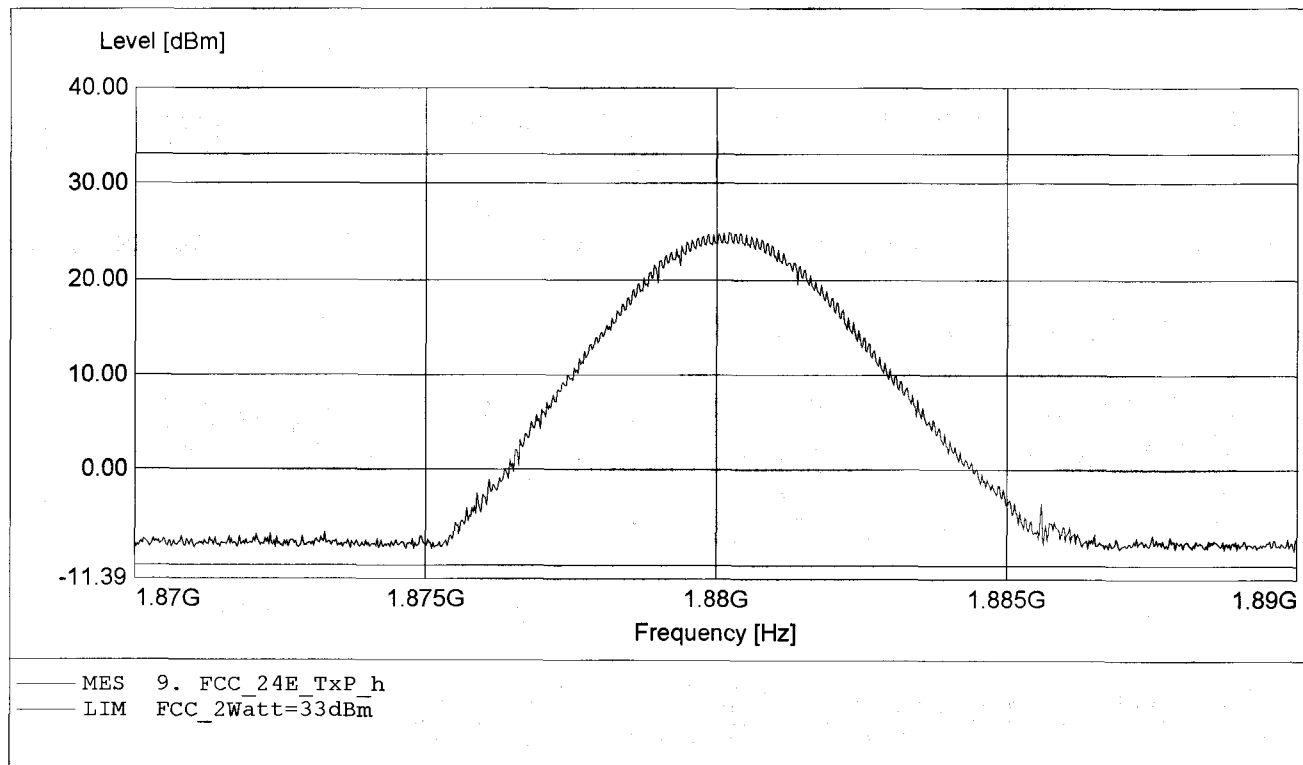


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HL025,PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 23.54dBm, RBW: 3MHz

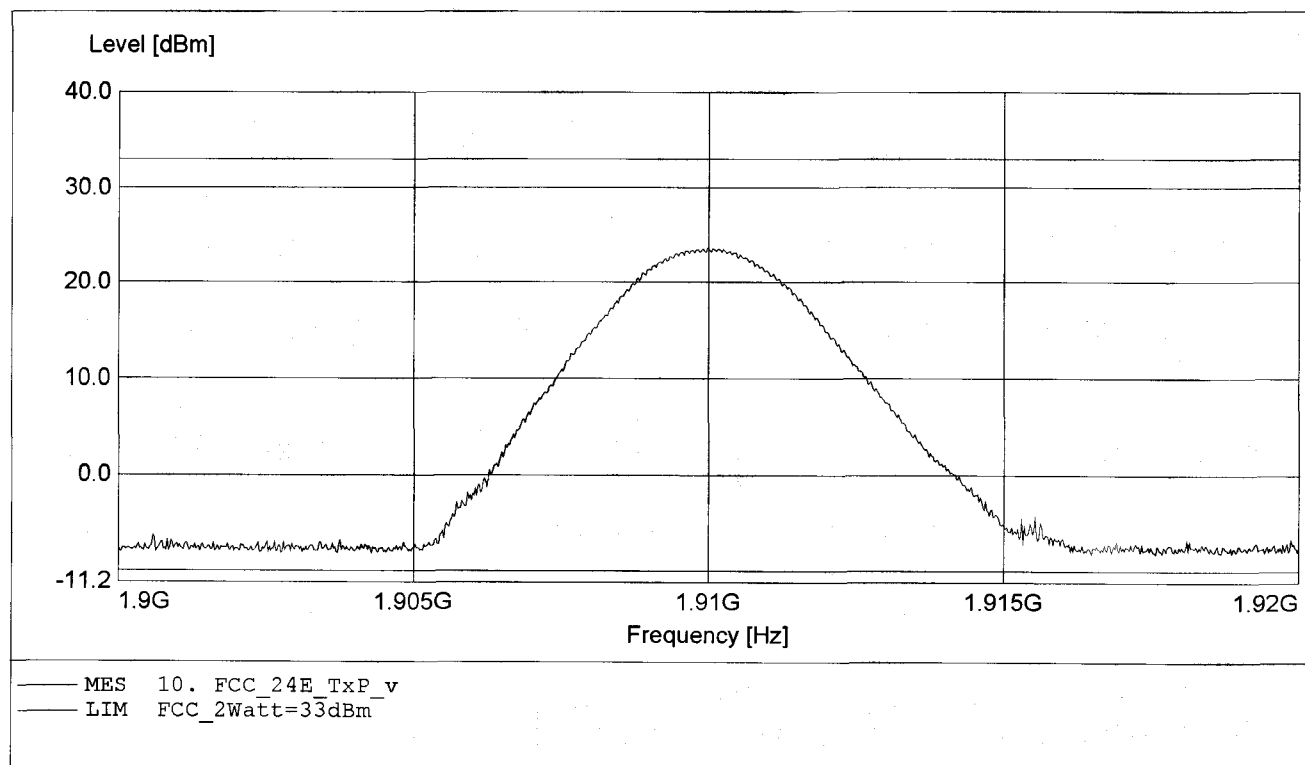


**Equivalent Isotropically Radiated Power
FCC RULES PART 24 SUBPART E**

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.232
Comment 1: Dist.: 3m, Ant.: HLO25, PCL 0
Comment 2: Freq: 1.910GHz, Pmax: 23.29dBm, RBW: 3MHz

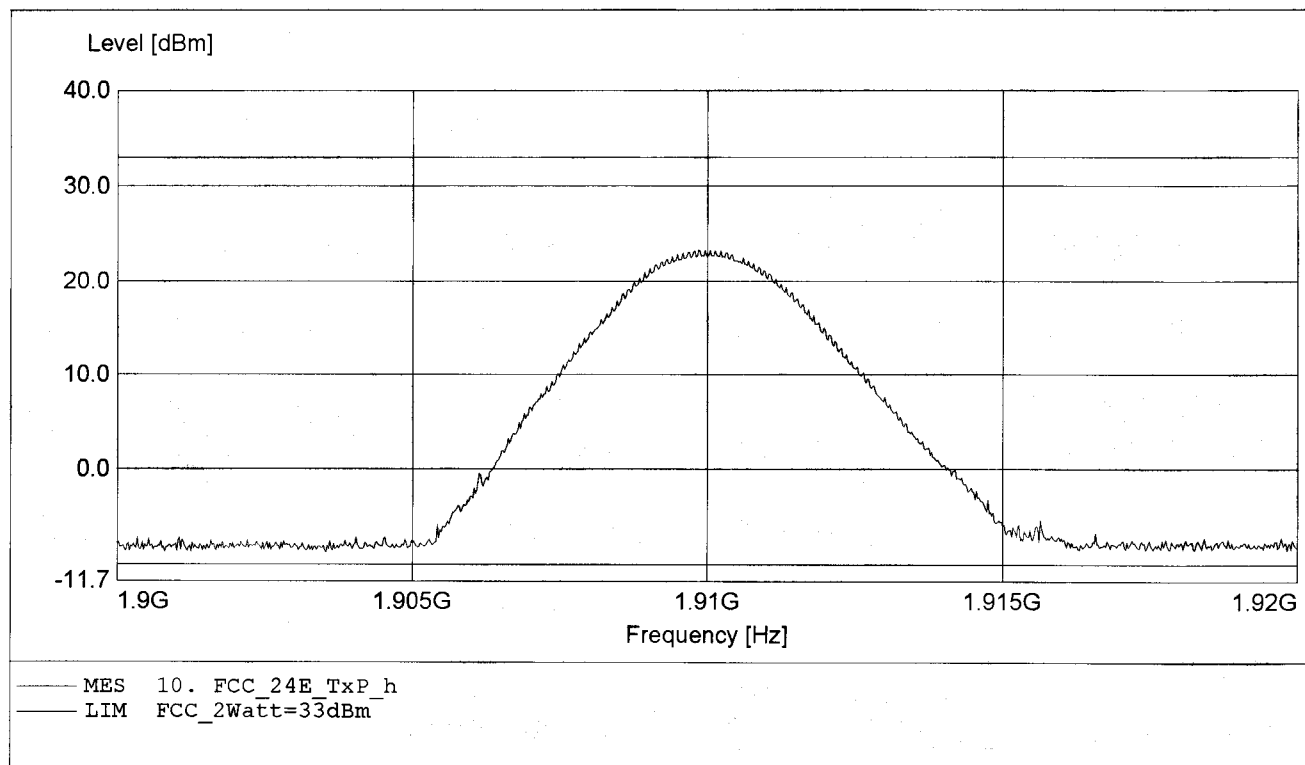


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 128
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Schostek
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.306MHz, Pmax: 28.58dBm, RBW: 3MHz

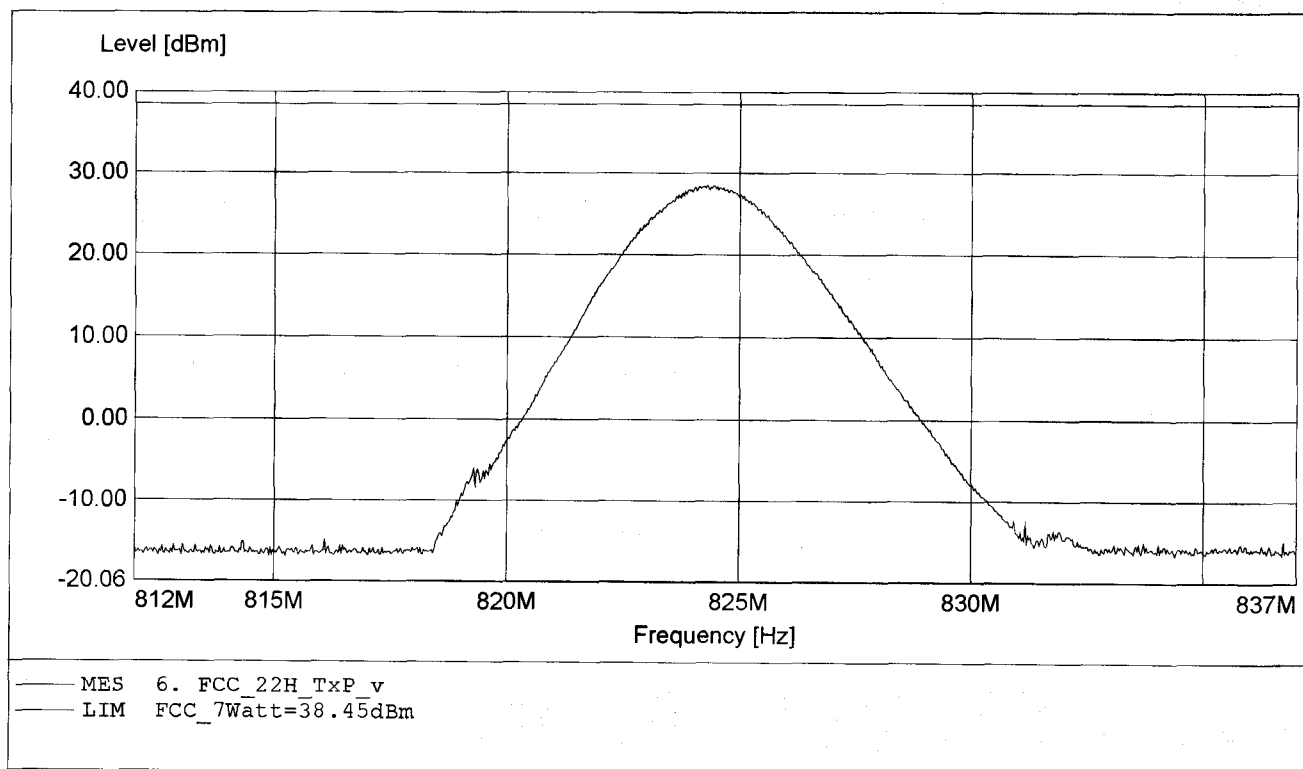


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 128
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Schostek
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 824.389MHz, Pmax: 24.51dBm, RBW: 3MHz

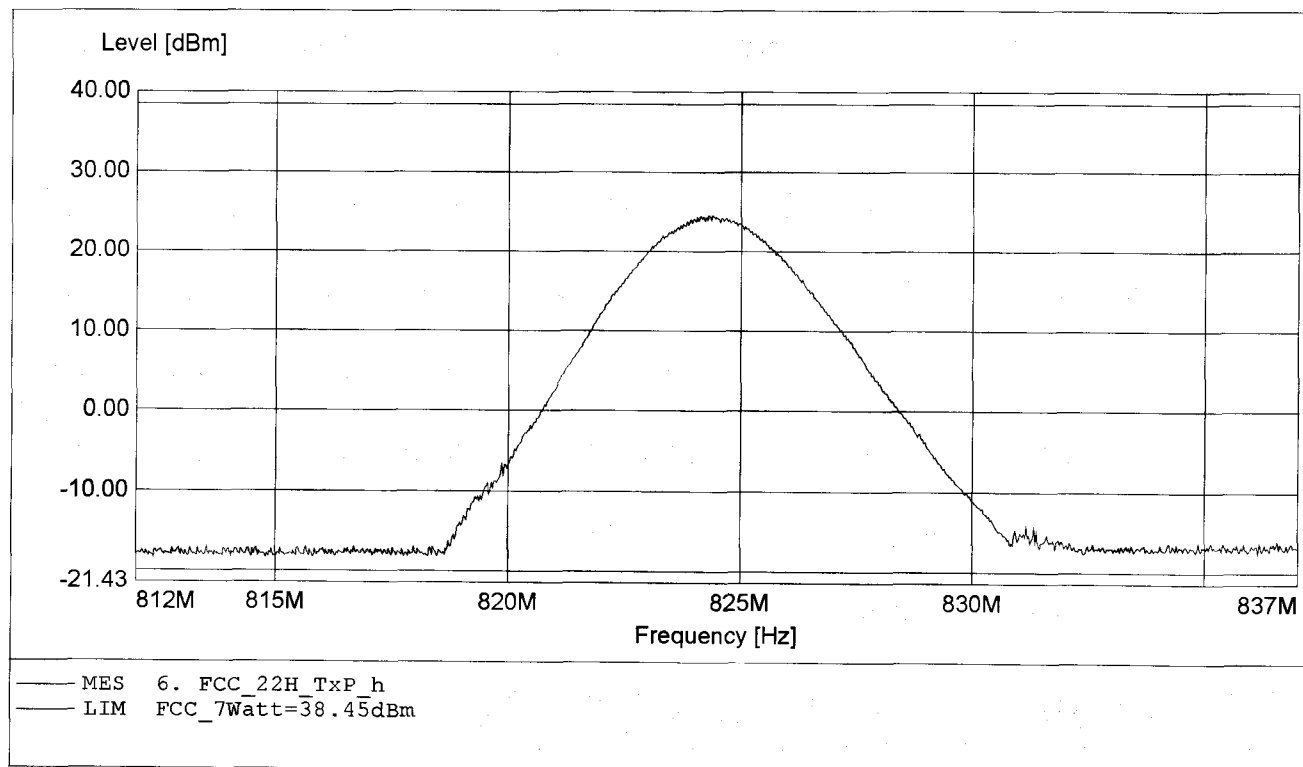


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 188
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Schostek
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.427MHz, Pmax: 29.19dBm, RBW: 3MHz

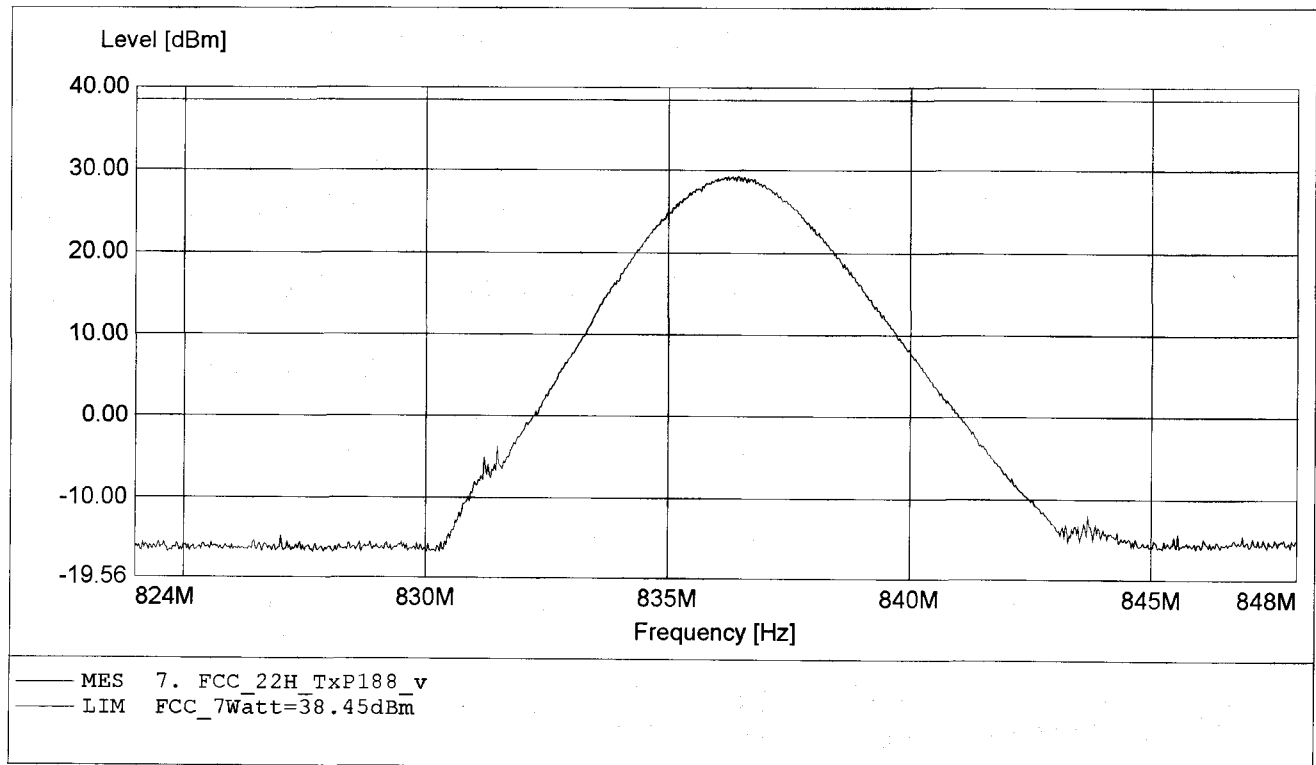


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 188
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Schostek
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 836.373MHz, Pmax: 24.81dBm, RBW: 3MHz

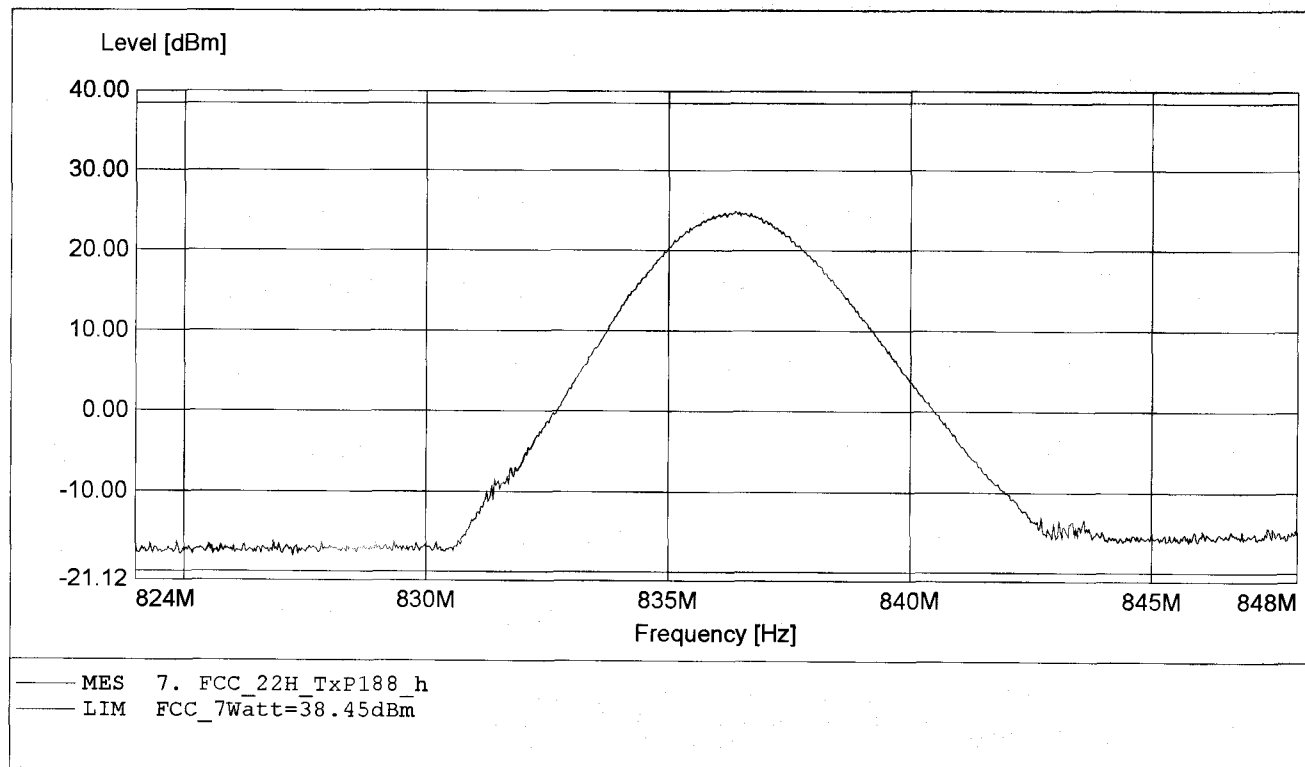


Effective Radiated Power
FCC RULES PART 22 SUBPART H

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 251
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Schostek
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.973MHz, Pmax: 30.25dBm, RBW: 3MHz

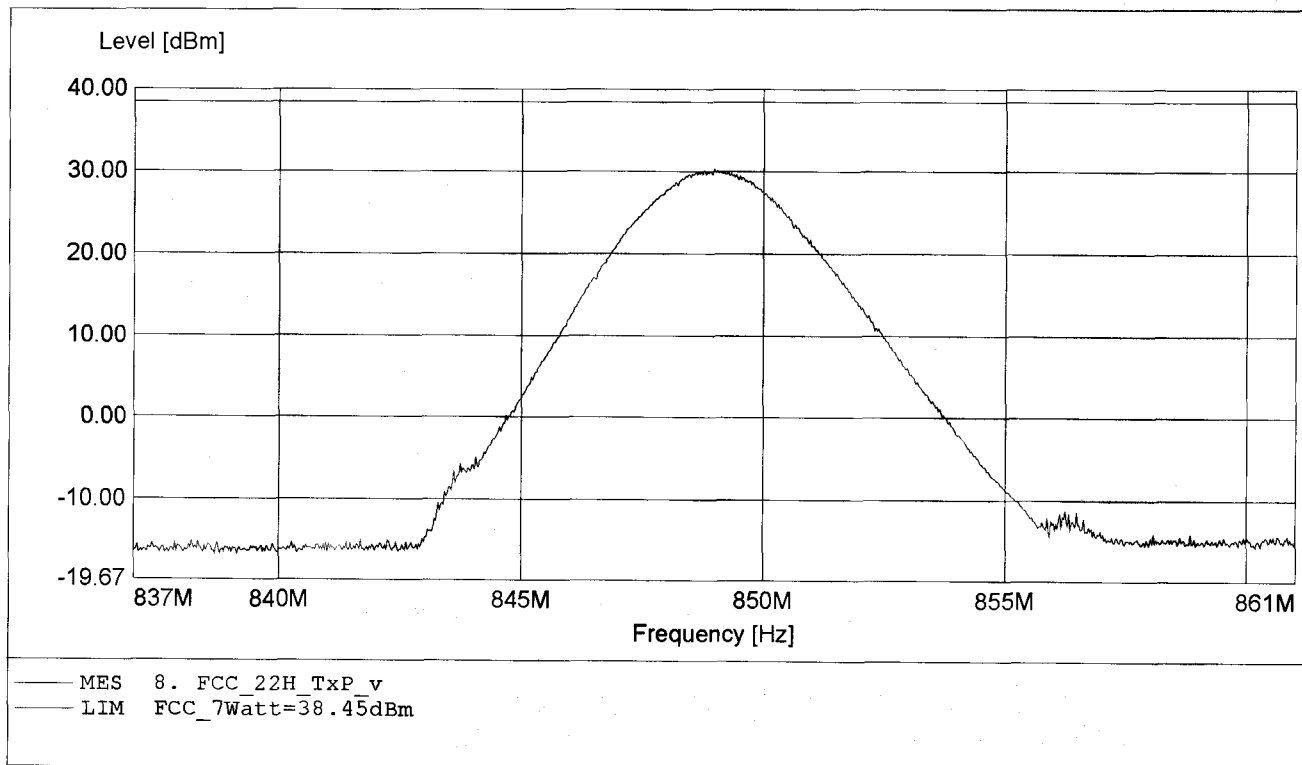

**Effective Radiated Power
FCC RULES PART 22 SUBPART H**

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 251
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Schostek
Test Specification: according to §22.913
Comment 1: Dist.: 3m, Ant.: HL223
Comment 2: Freq: 848.920MHz, Pmax: 27.21dBm, RBW: 3MHz

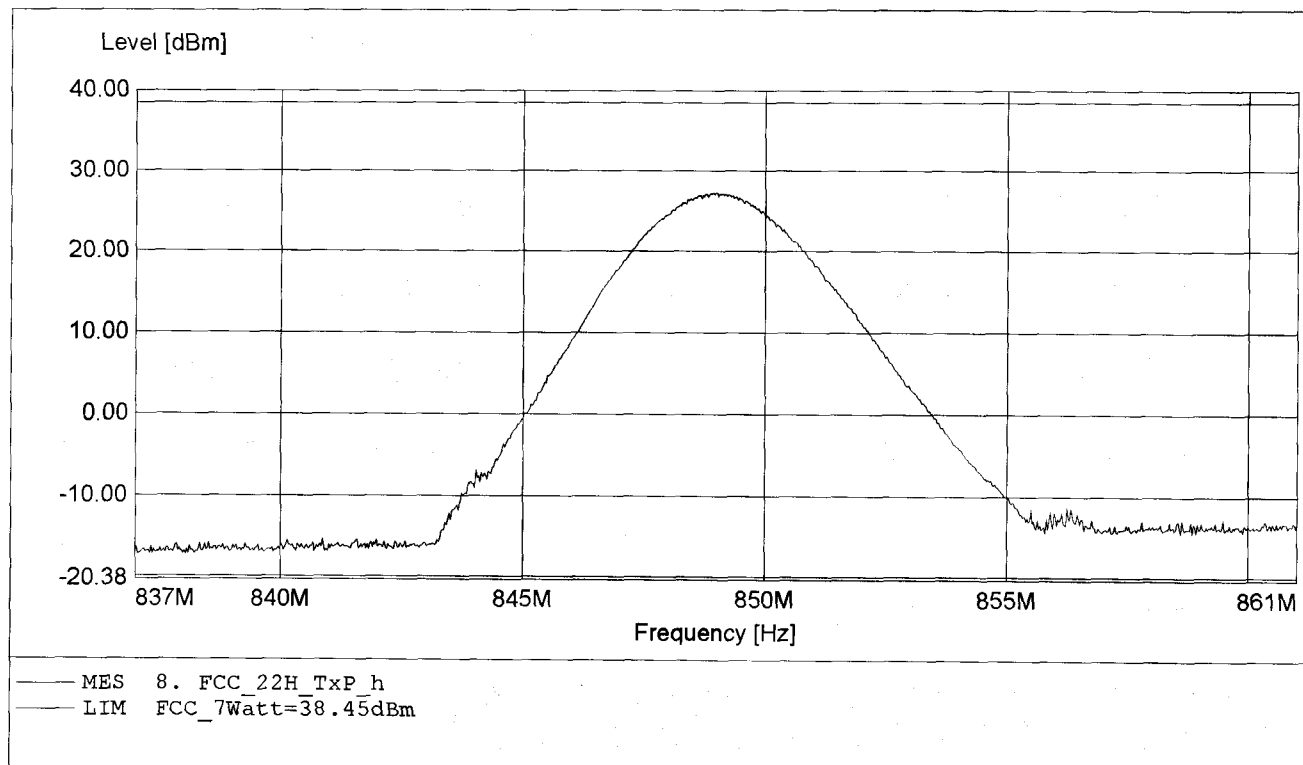

Appendix D

Modulation Requirements

Appendix E

Audio Filter Characteristics

Appendix F


Emission Limitation

Appendix G

Occupied Bandwidth




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 21.02 dBm VBW 3 kHz
36 dBm 1.85018497 GHz SWT 280 ms Unit dBm

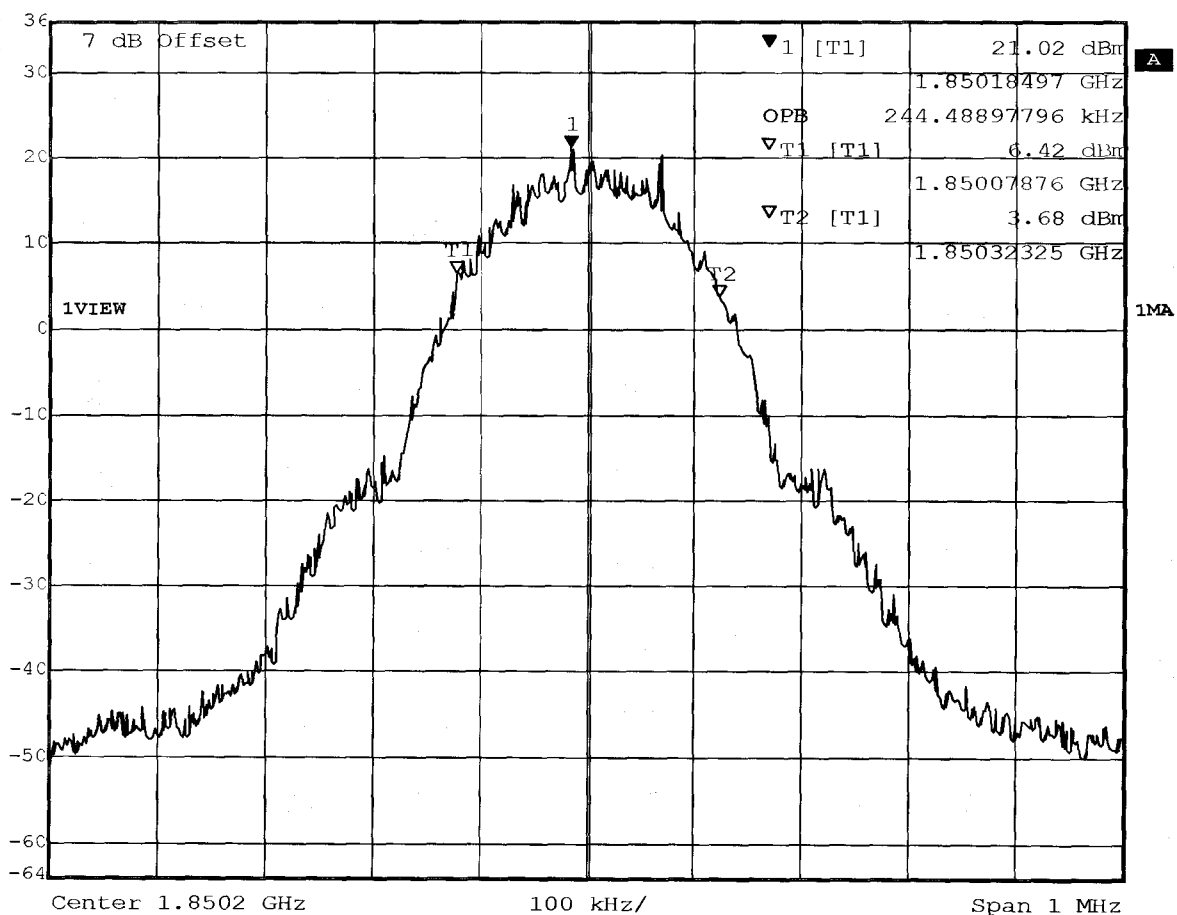

Title: Occupied Bandwidth \ Channel: 512
Comment A: Pantech PG-C300
Date: 29.NOV.2005 09:50:14




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 19.89 dBm VBW 3 kHz
36 dBm 1.87998697 GHz SWT 280 ms Unit dBm

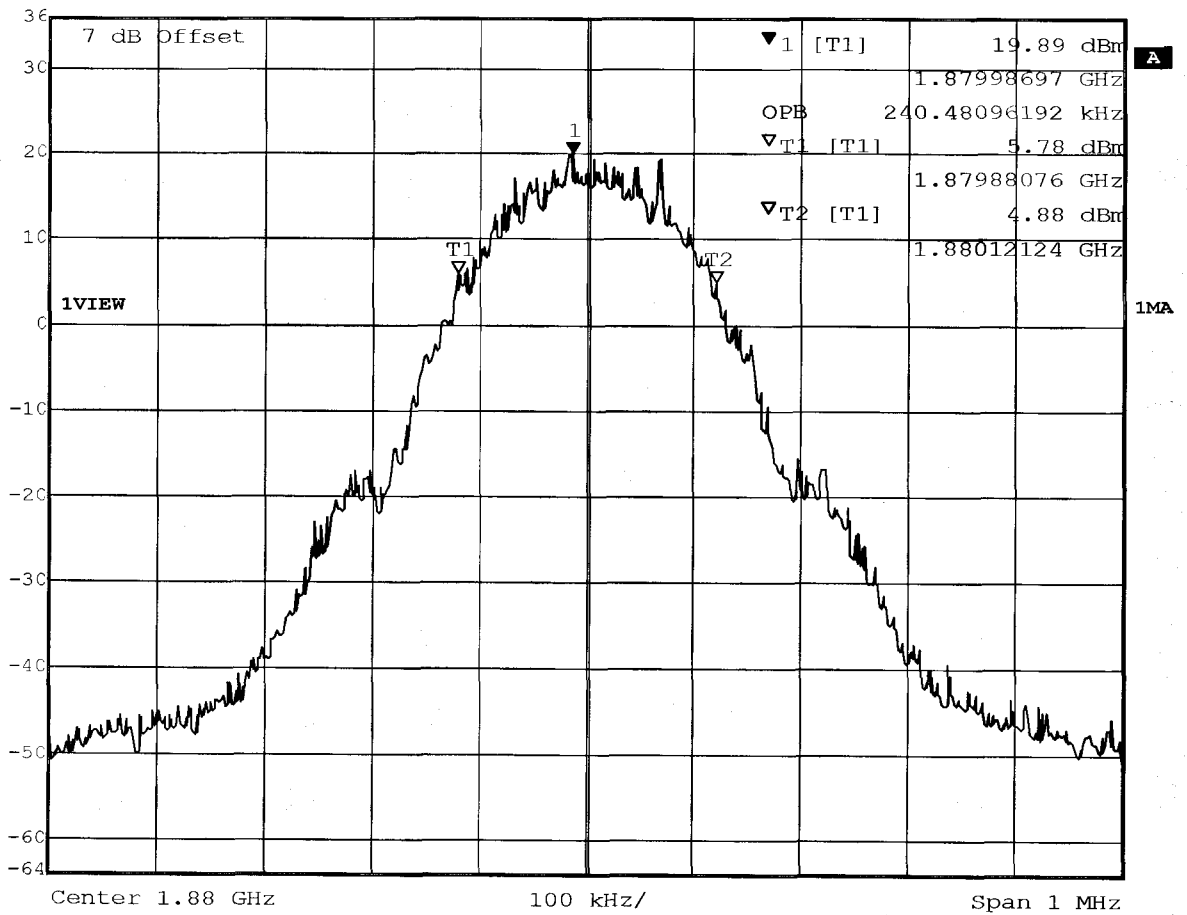

Title: Occupied Bandwidth / Channel: 661
Comment A: Pantech PG-C300
Date: 29.NOV.2005 09:57:57




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 19.59 dBm VBW 3 kHz
36 dBm 1.90978497 GHz SWT 280 ms Unit dBm

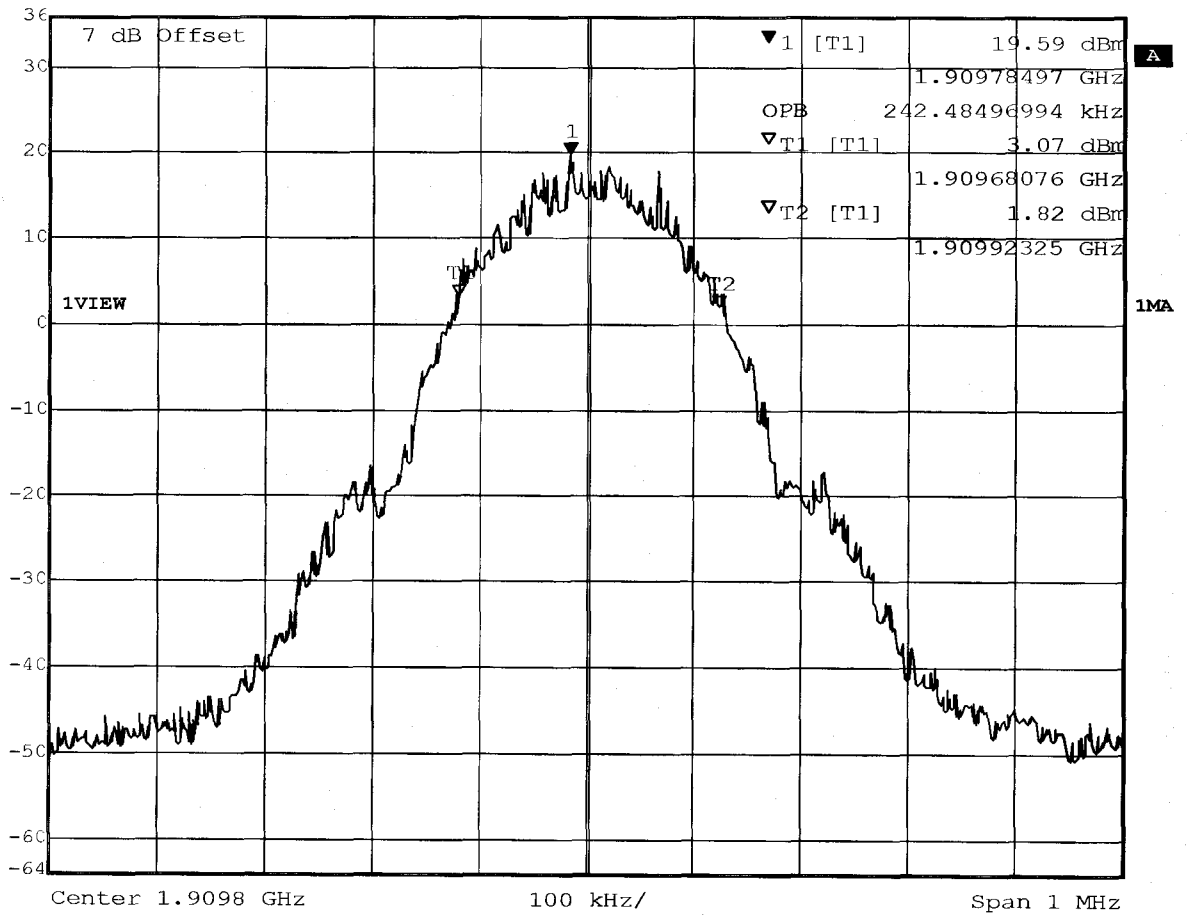

Title: Occupied Bandwidth / Channel: 810
Comment A: Pantech PG-C300
Date: 29.NOV.2005 10:06:14




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 24.66 dBm VBW 3 kHz
36 dBm 824.18496994 MHz SWT 280 ms Unit dBm

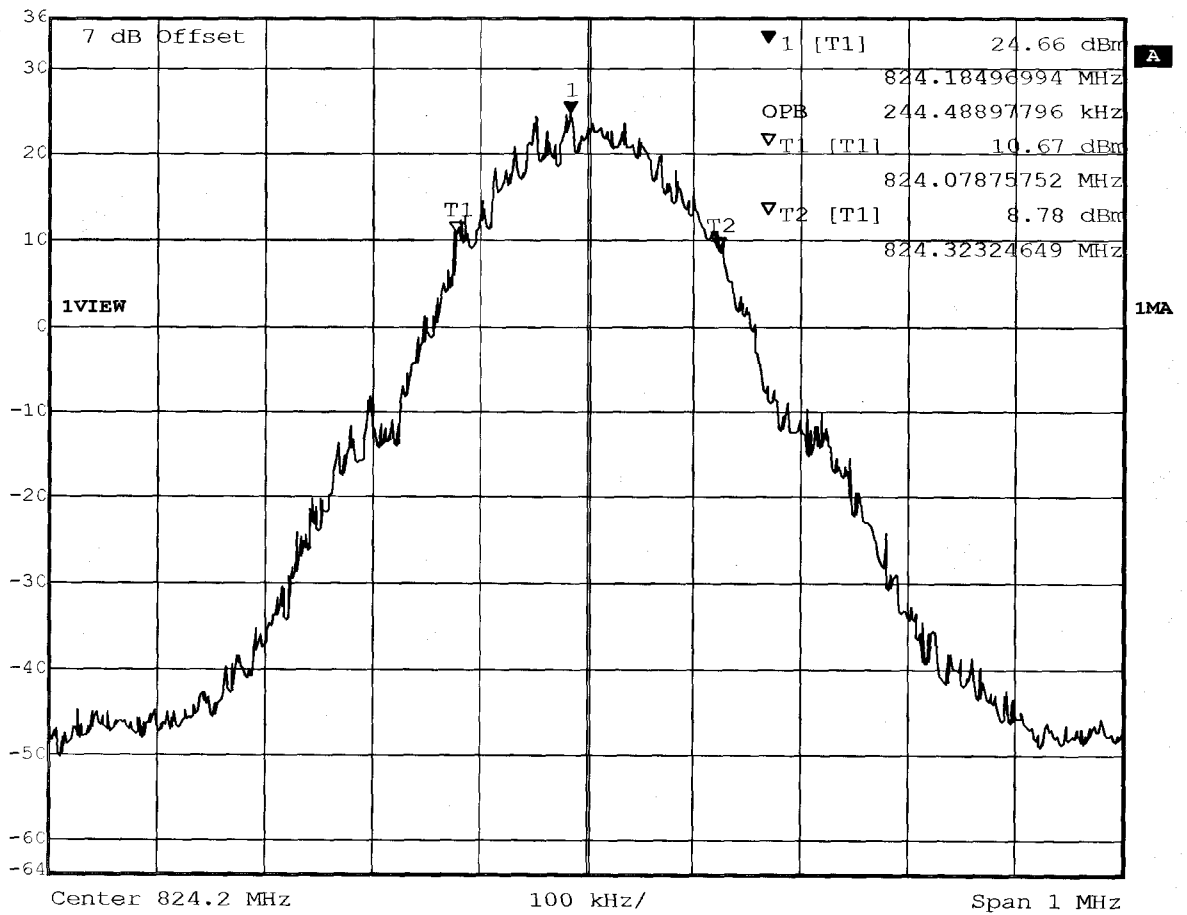

Title: Occupied Bandwidth / Channel: 128
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:17:14




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 24.00 dBm VBW 3 kHz
36 dBm 836.18897796 MHz SWT 280 ms Unit dBm

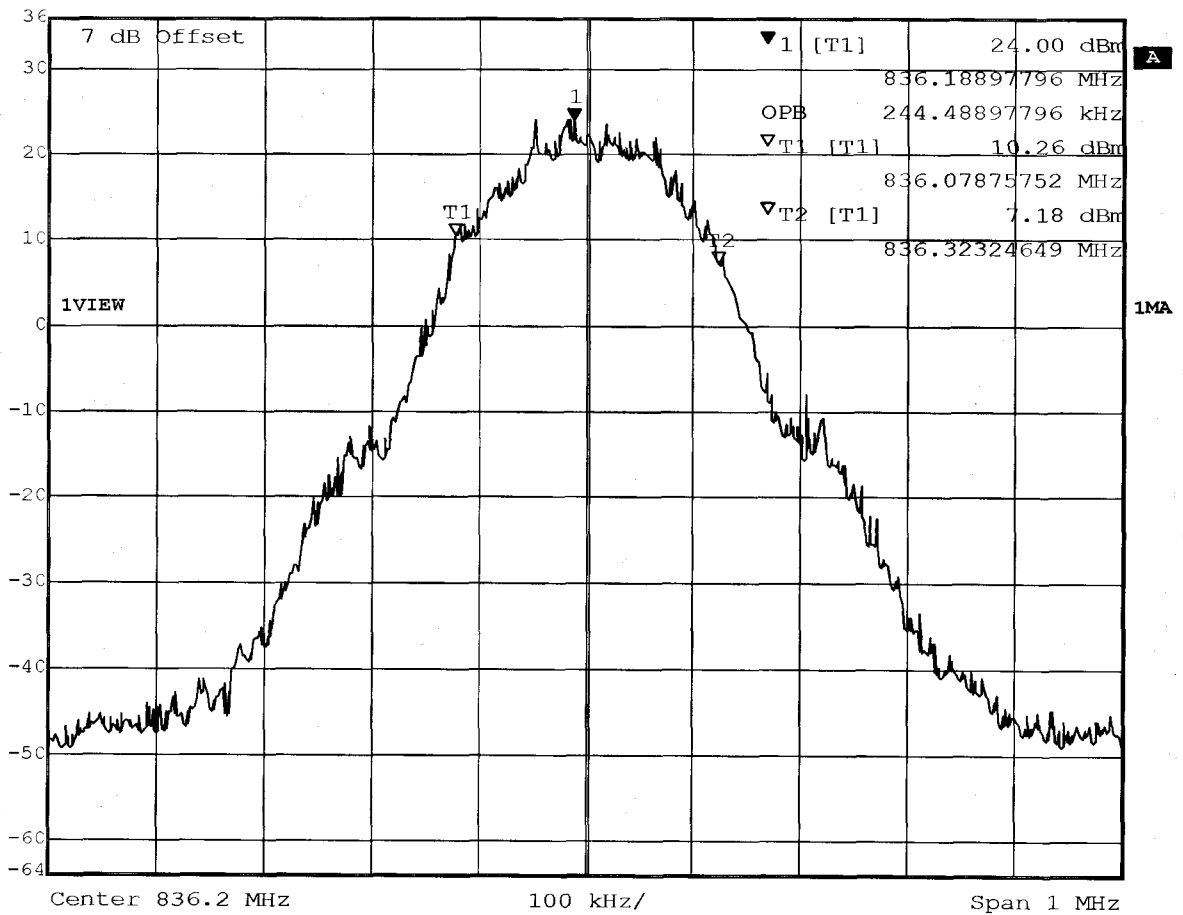

Title: Occupied Bandwidth / Channel: 188
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:21:06




Marker 1 [T1] RBW 3 kHz RF Att 50 dB
Ref Lvl 24.11 dBm VBW 3 kHz
36 dBm 848.78496994 MHz SWT 280 ms Unit dBm

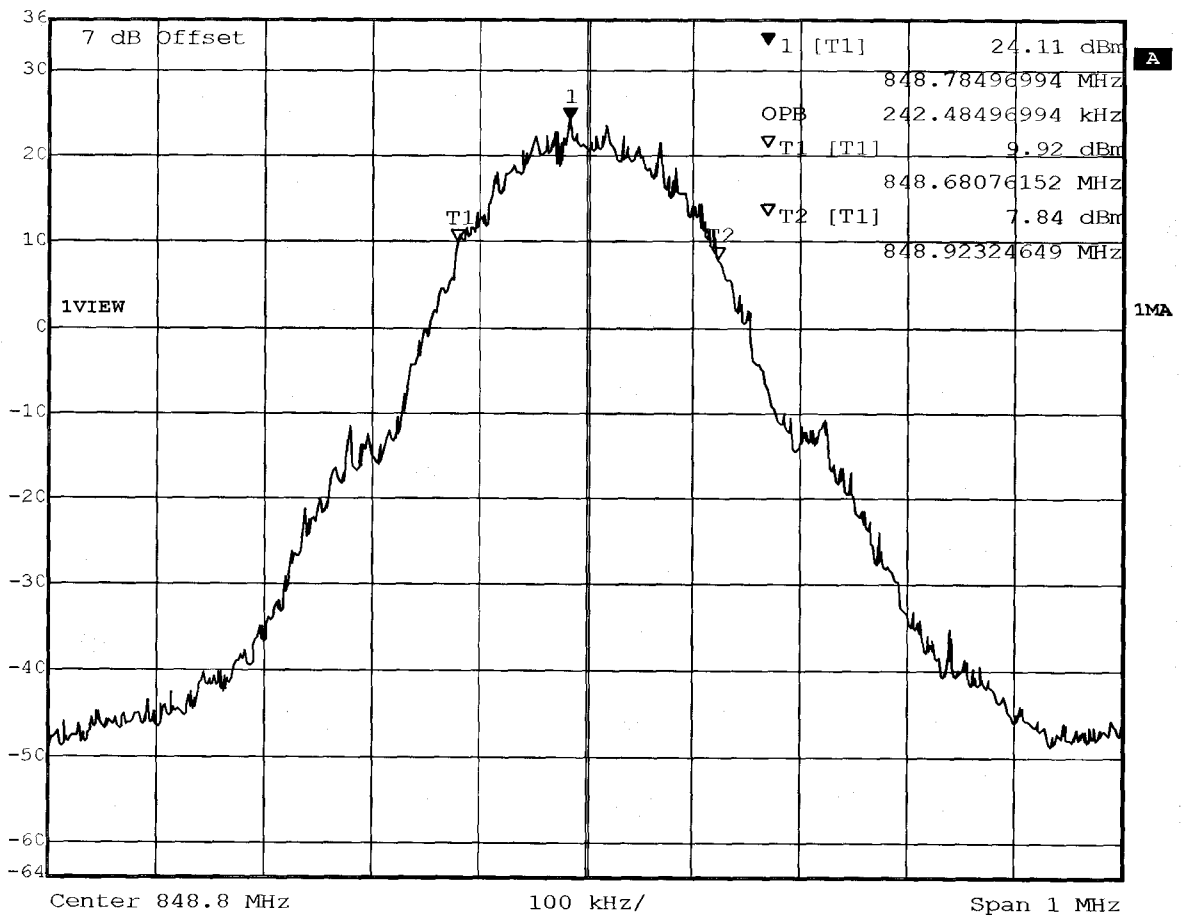

Title: Occupied Bandwidth / Channel: 251
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:32:47




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

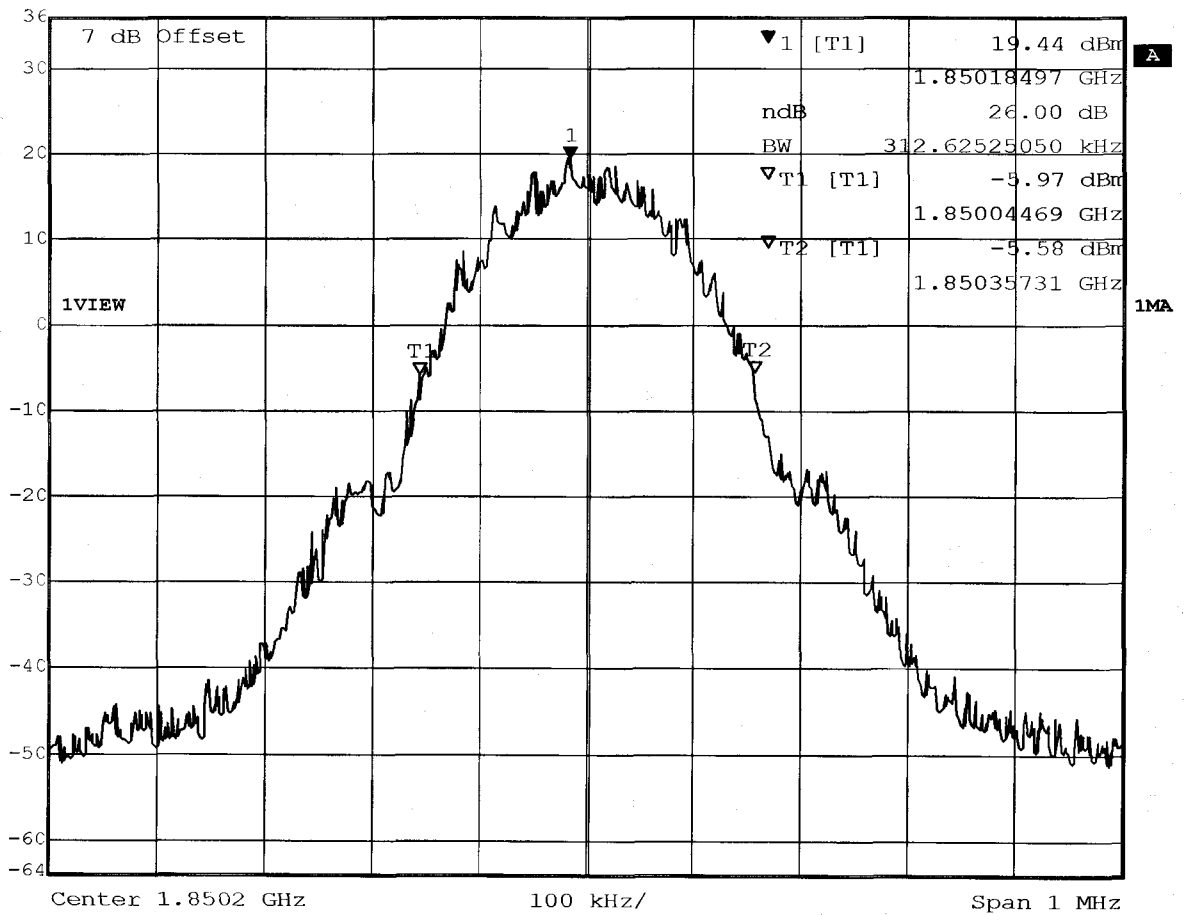

Title: Emission Bandwidth (-26 dB) / Channel: 512
Comment A: Pantech PG-C300
Date: 29.NOV.2005 09:44:34




Ref Lvl 36 dBm Marker 1 [T1 ndB] 26.00 dB RBW 3 kHz RF Att 50 dB
BW 312.62525050 kHz VBW 3 kHz Unit dBm

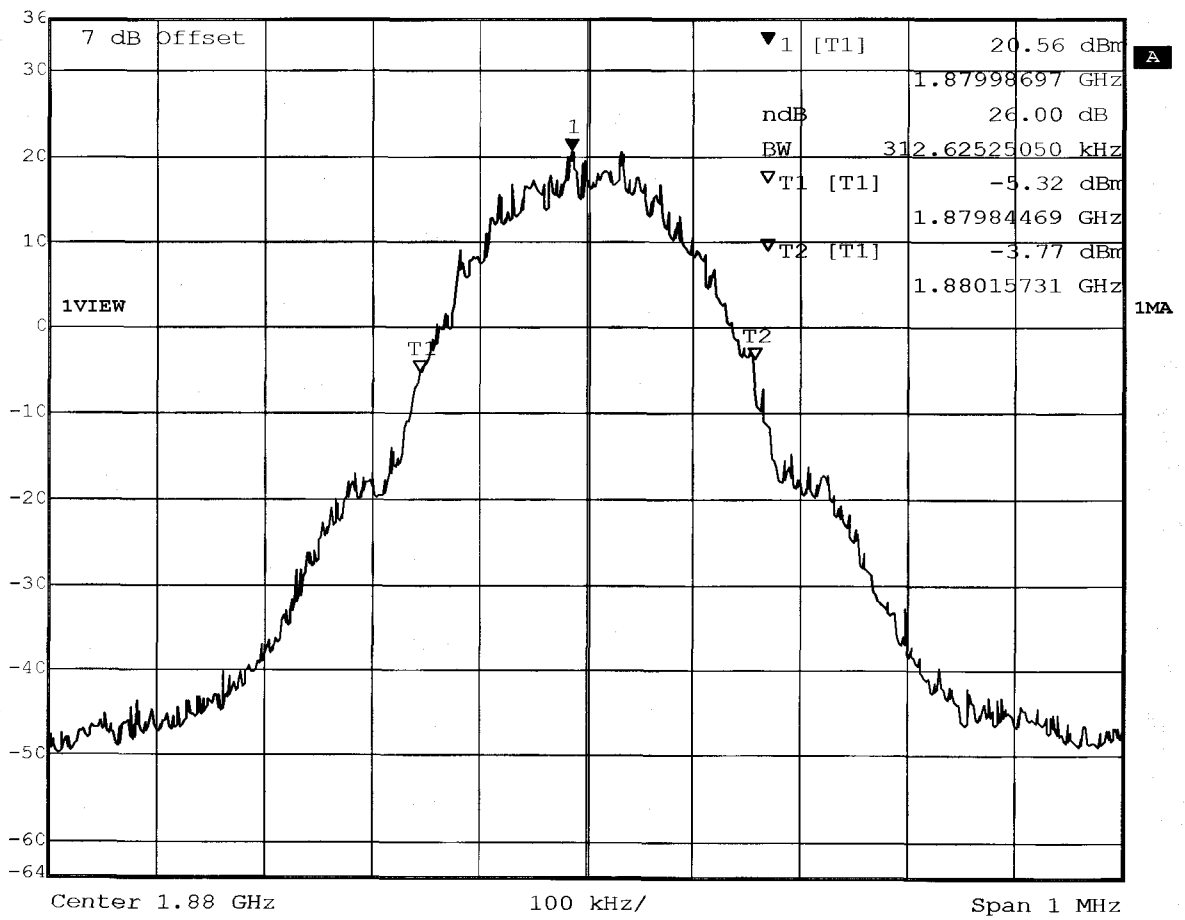

Title: Emission Bandwidth (-26 dB) / Channel: 661
Comment A: Pantech PG-C300
Date: 29.NOV.2005 09:59:45




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

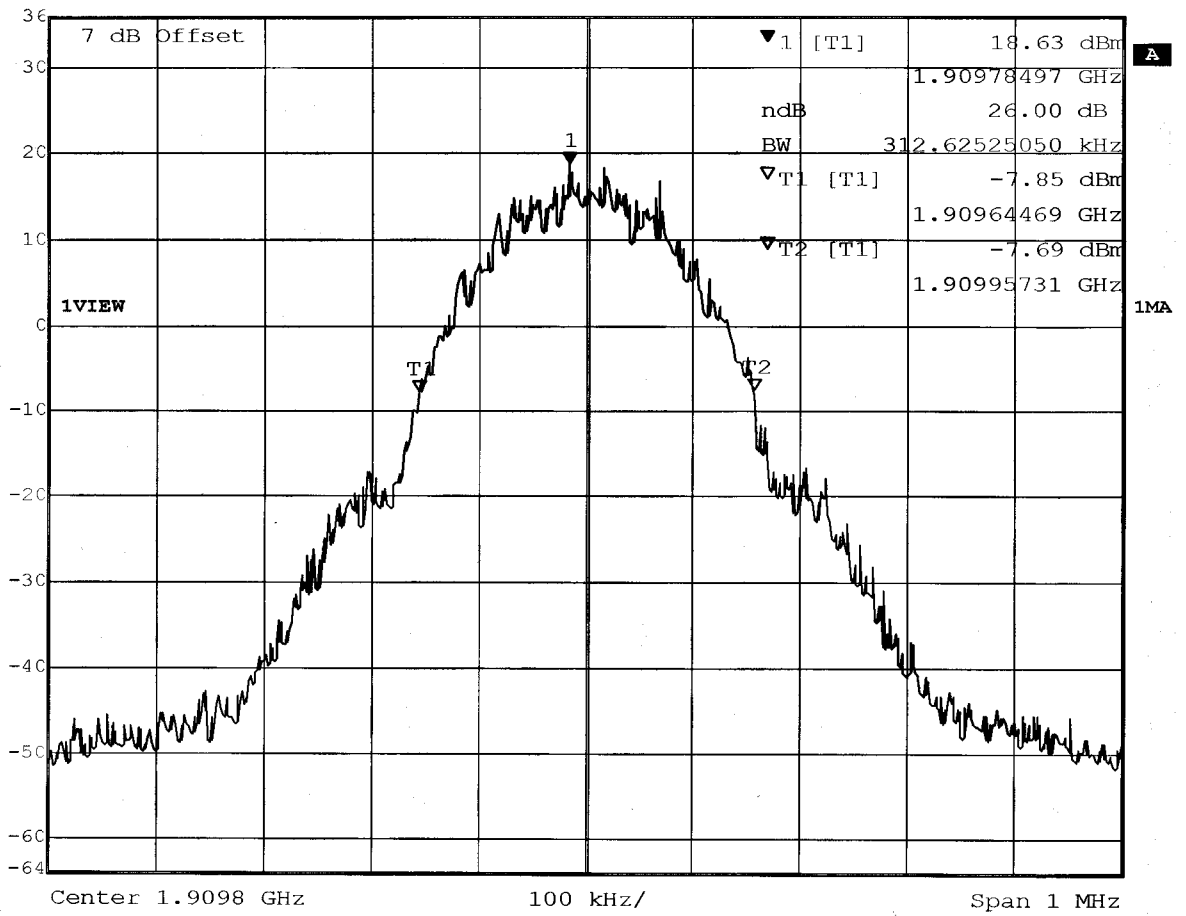

Title: Emission Bandwidth (-26 dB) / Channel: 810
Comment A: Pantech PG-C300
Date: 29.NOV.2005 10:03:03




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
ndB 26.00 dB VBW 3 kHz
Ref Lvl 36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

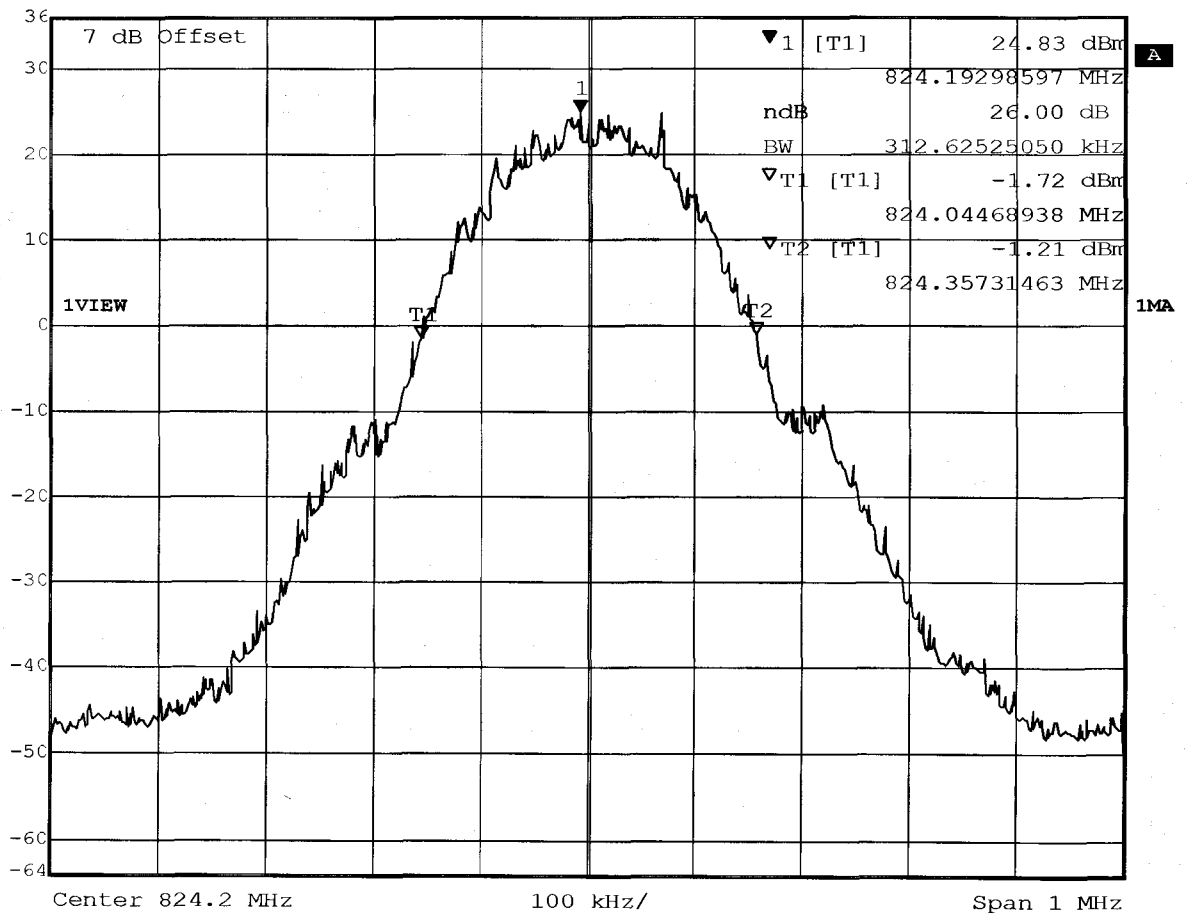

Title: Emission Bandwidth (-26 dB) / Channel: 128
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:13:21




Marker 1 [T1 ndB] RBW 3 kHz RF Att 50 dB
Ref Lvl ndB 26.00 dB VBW 3 kHz
36 dBm BW 312.62525050 kHz SWT 280 ms Unit dBm

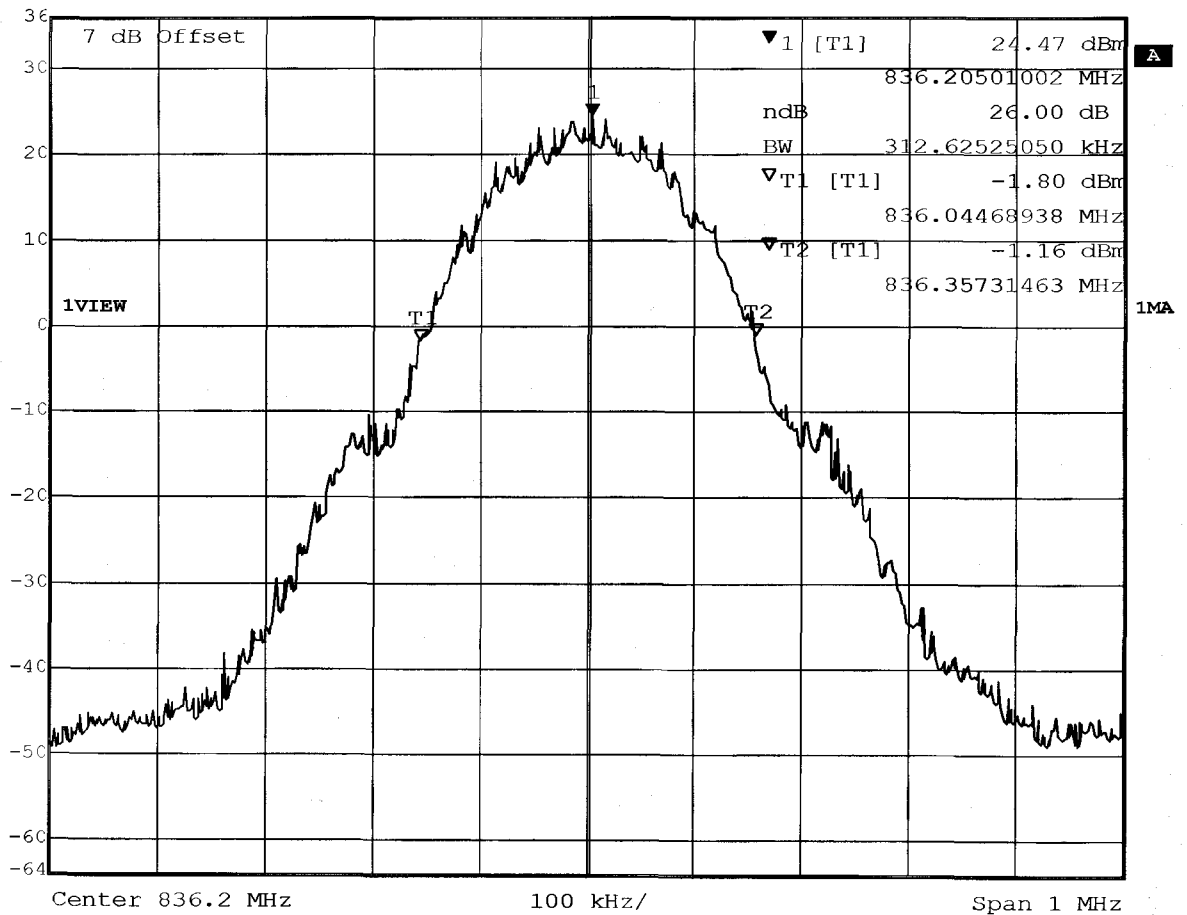

Title: Emission Bandwidth (-26 dB) / Channel: 188
Comment A: Pantech PG-C300
Date: 30.NOV.2005 07:22:48



Ref Lvl 36 dBm Marker 1 [T1 ndB] 26.00 dB RBW 3 kHz RF Att 50 dB
BW 312.62525050 kHz VBW 3 kHz Unit dBm

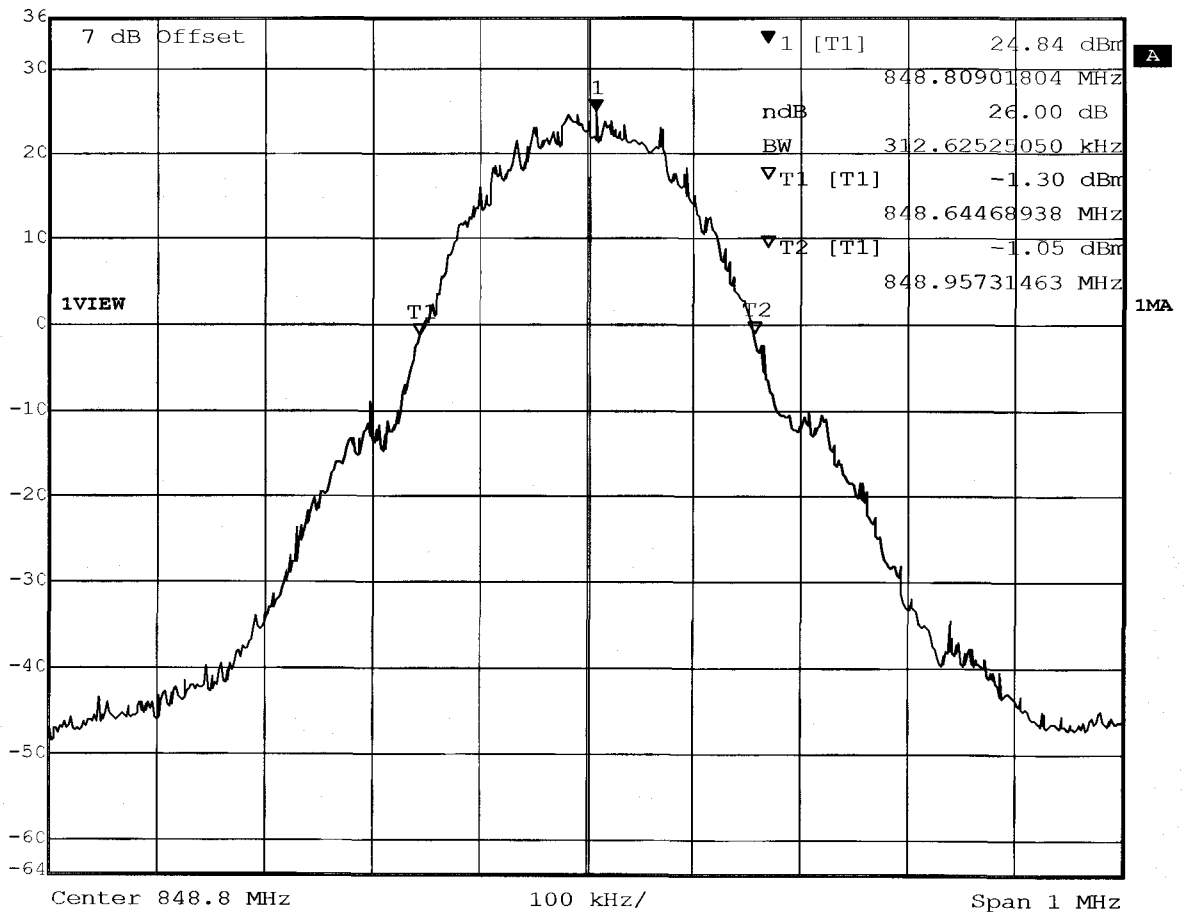

Title: Emission Bandwidth (-26 dB) / Channel: 251

Comment A: Pantech PG-C300

Date: 30.NOV.2005 07:28:05

Appendix H


Out of Band Emission at Antenna Terminals Mobile Emissions In Base
Frequency Range

Appendix I

Spurious Radiation


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.433MHz, Pmax: -53.04dBm, RBW: 1MHz

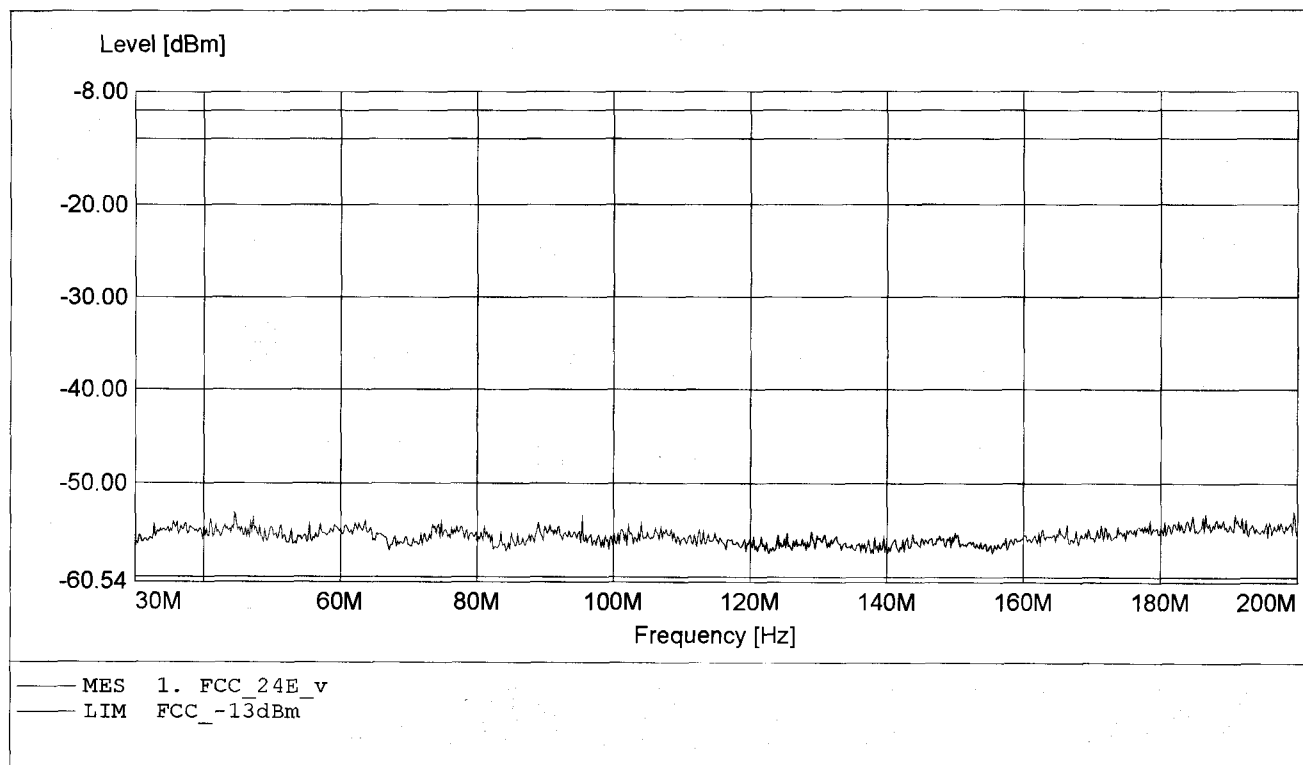


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 61.167MHz, Pmax: -52.10dBm, RBW: 1MHz

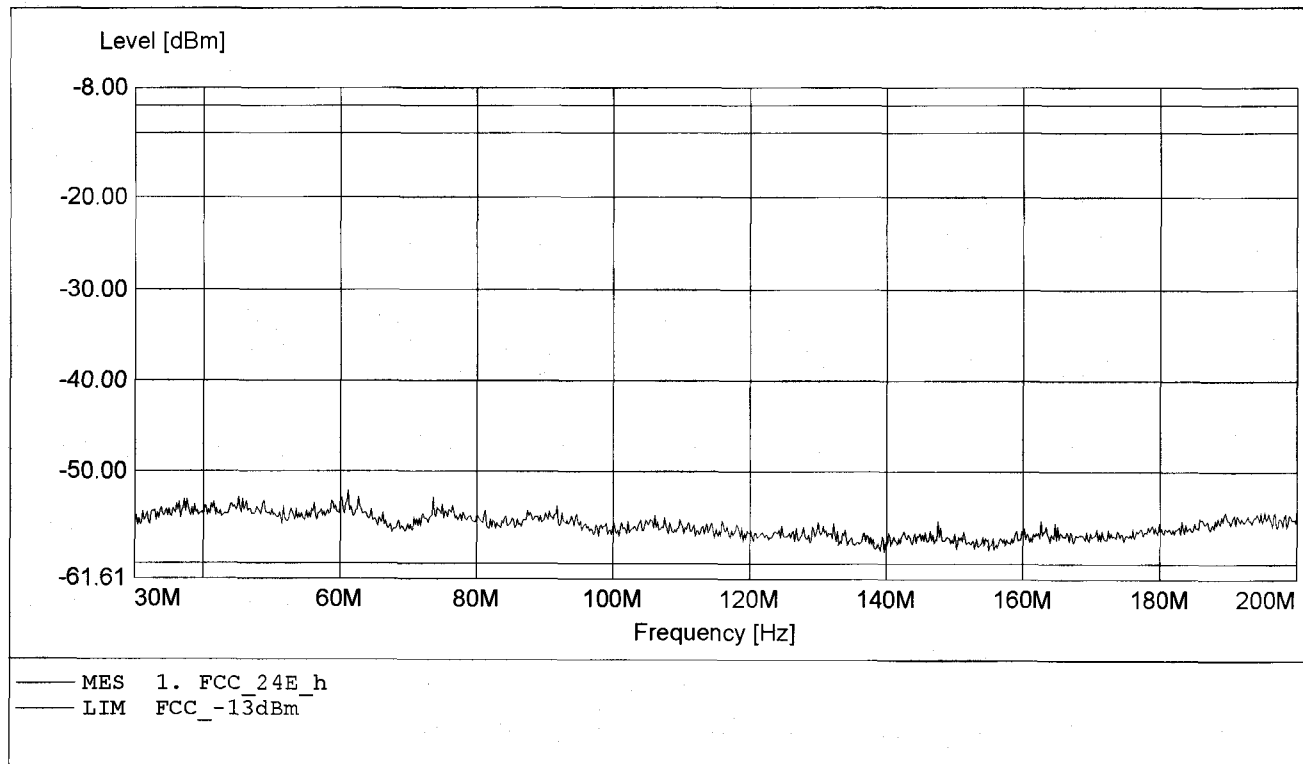


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 995.556MHz, Pmax: -40.29dBm, RBW: 1MHz

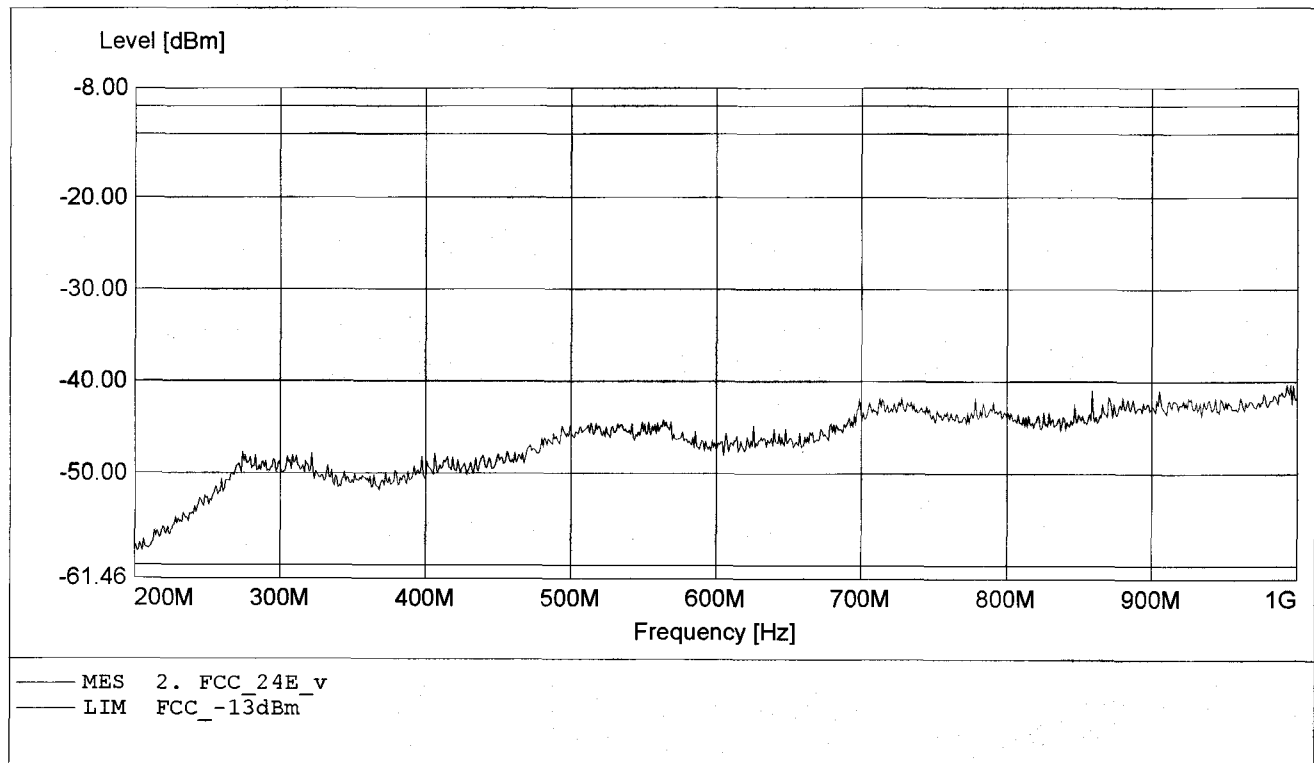


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 864.000MHz, Pmax: -38.93dBm, RBW: 1MHz

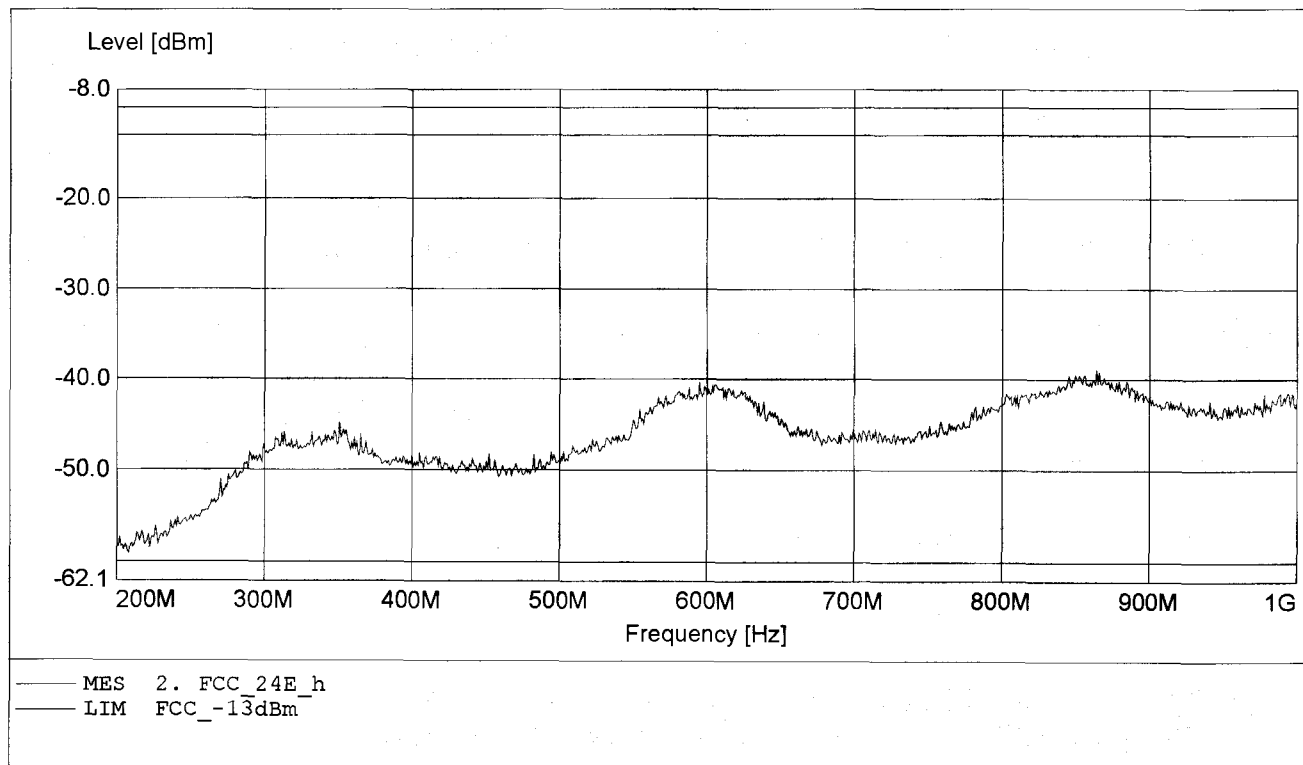


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.910GHz, Pmax: -23.16dBm, RBW: 1MHz/3kHz

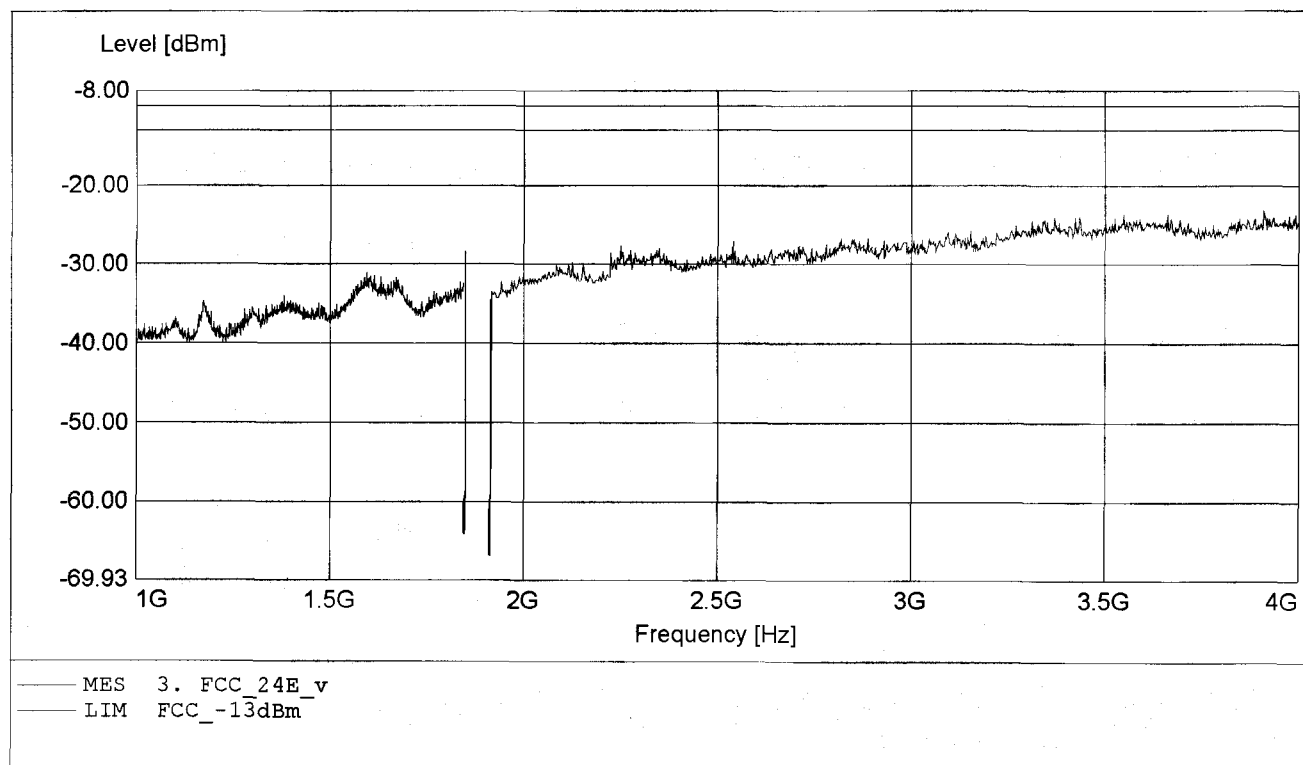


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HLO25
Comment 2: Freq: 3.977GHz, Pmax: -22.17dBm, RBW: 1MHz/3kHz

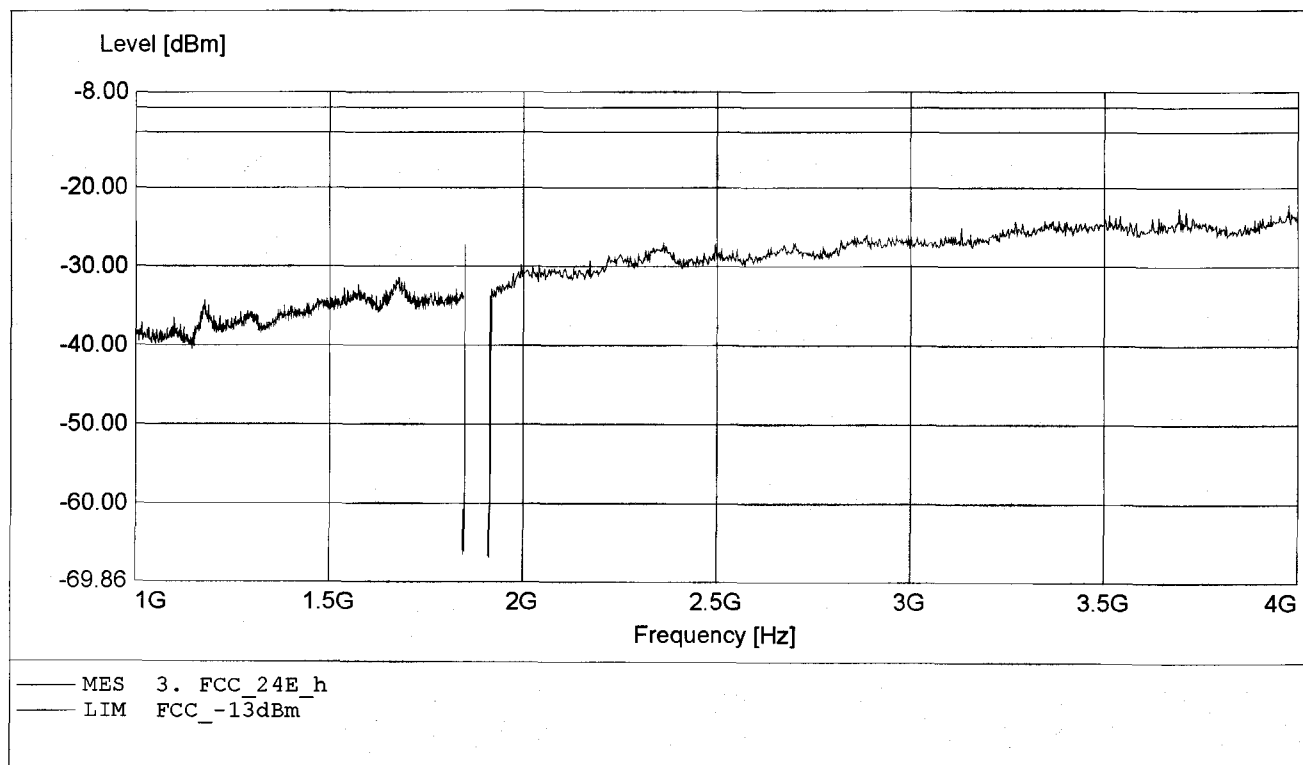


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HLO25, ampl.+HP.
Comment 2: Freq: 5.556GHz, Pmax: -43.94dBm, RBW: 1MHz

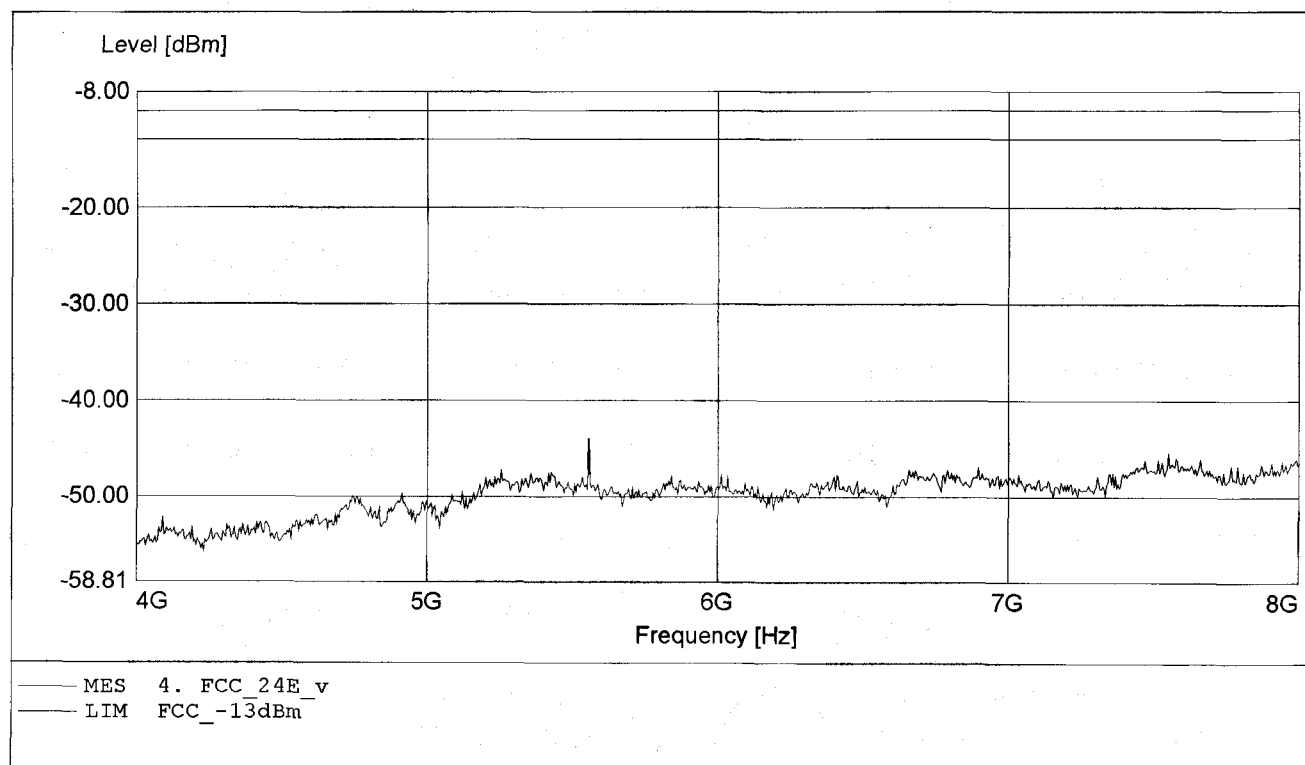


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.556GHz, Pmax: -42.86dBm, RBW: 1MHz

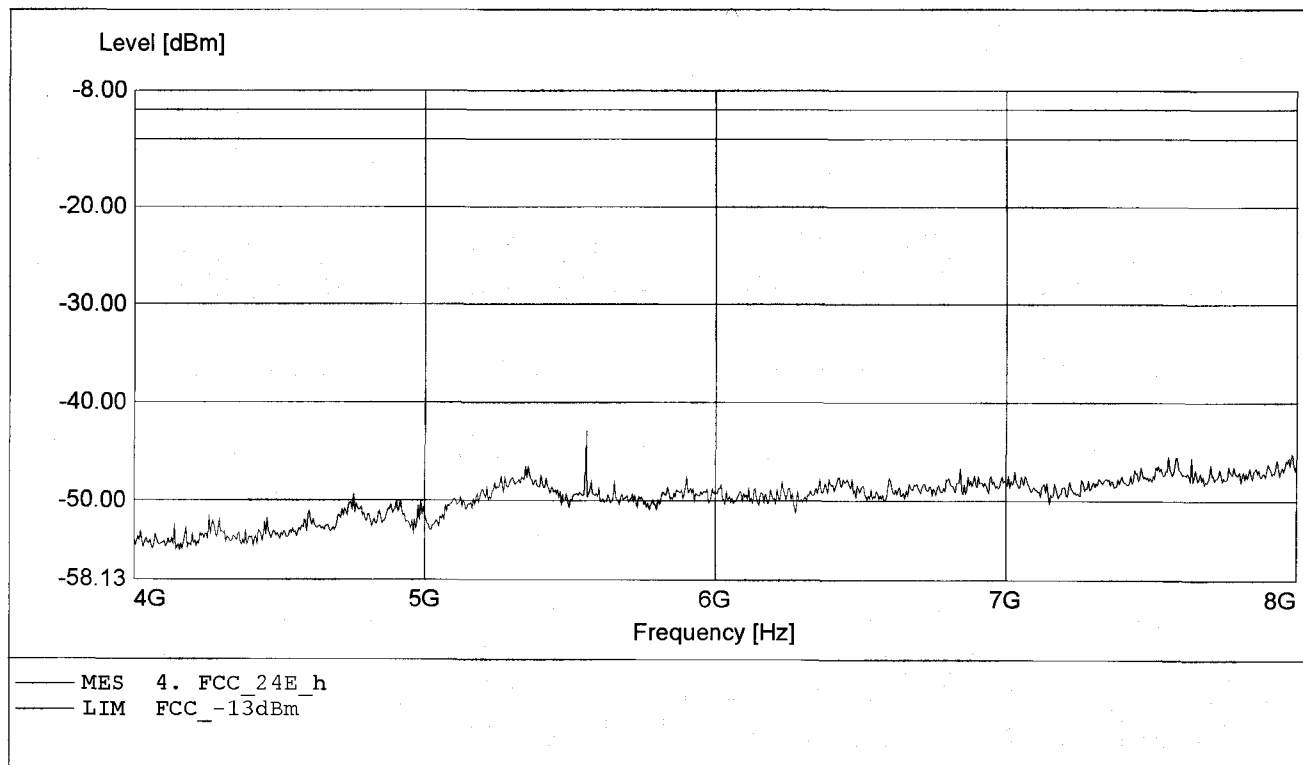


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.764GHz, Pmax: -40.76dBm, RBW: 1MHz

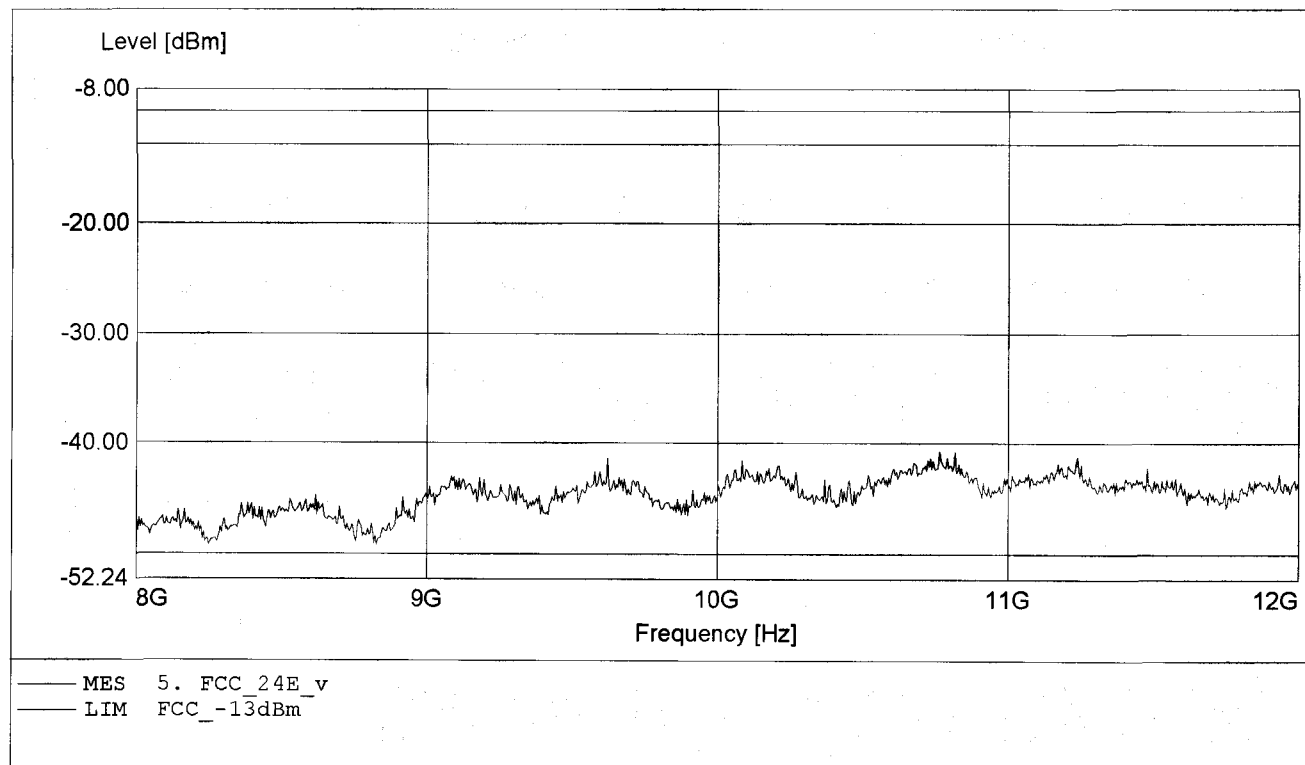


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.791GHz, Pmax: -39.88dBm, RBW: 1MHz

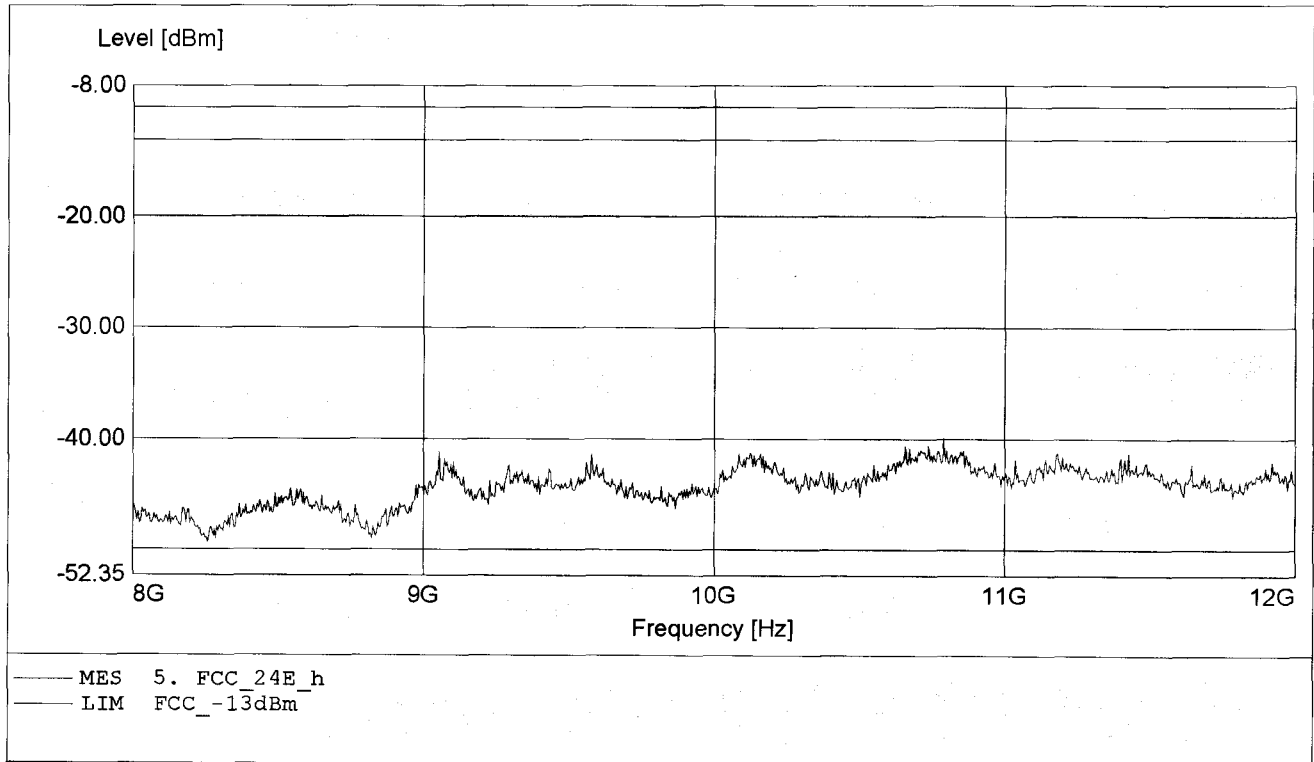


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.767GHz, Pmax: -32.82dBm, RBW: 1MHz

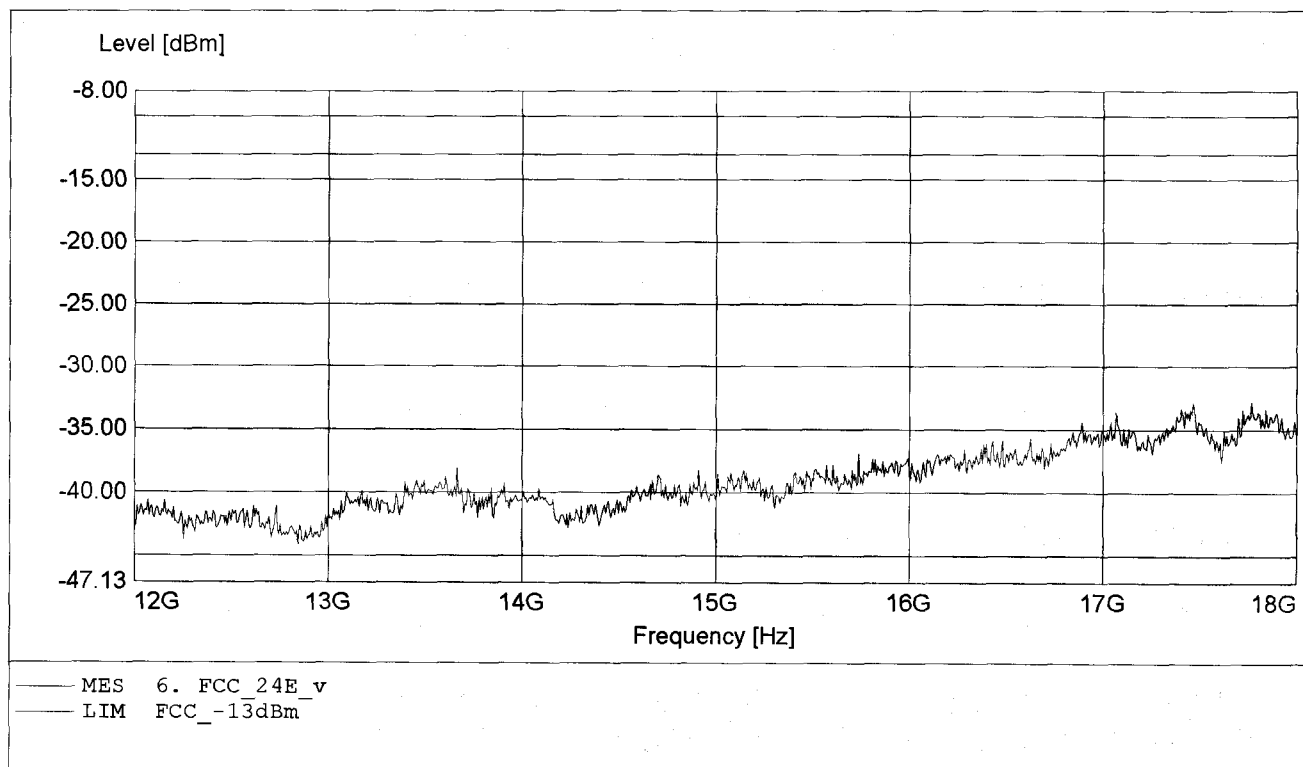


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HLO25, ampl.+HP.
Comment 2: Freq: 17.767GHz, Pmax: -31.98dBm, RBW: 1MHz

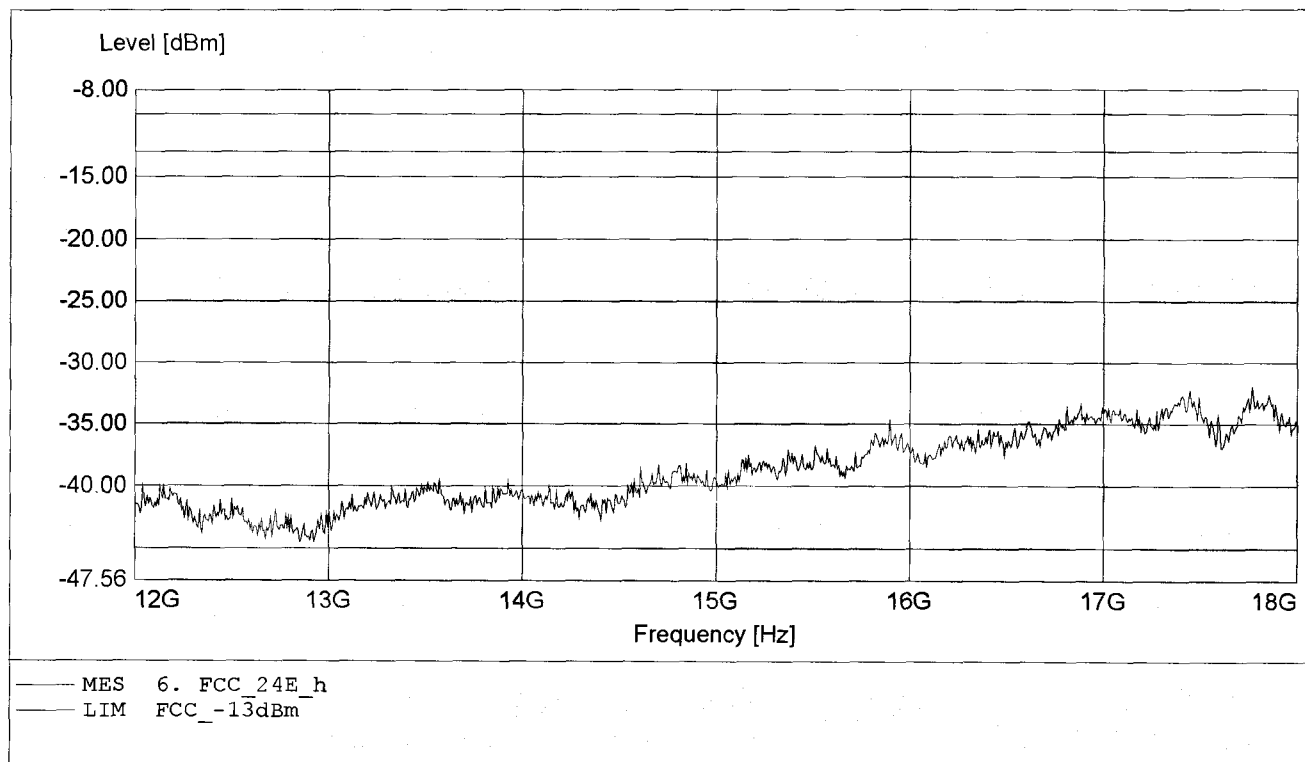


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.538GHz, Pmax: -23.61dBm, RBW: 1MHz

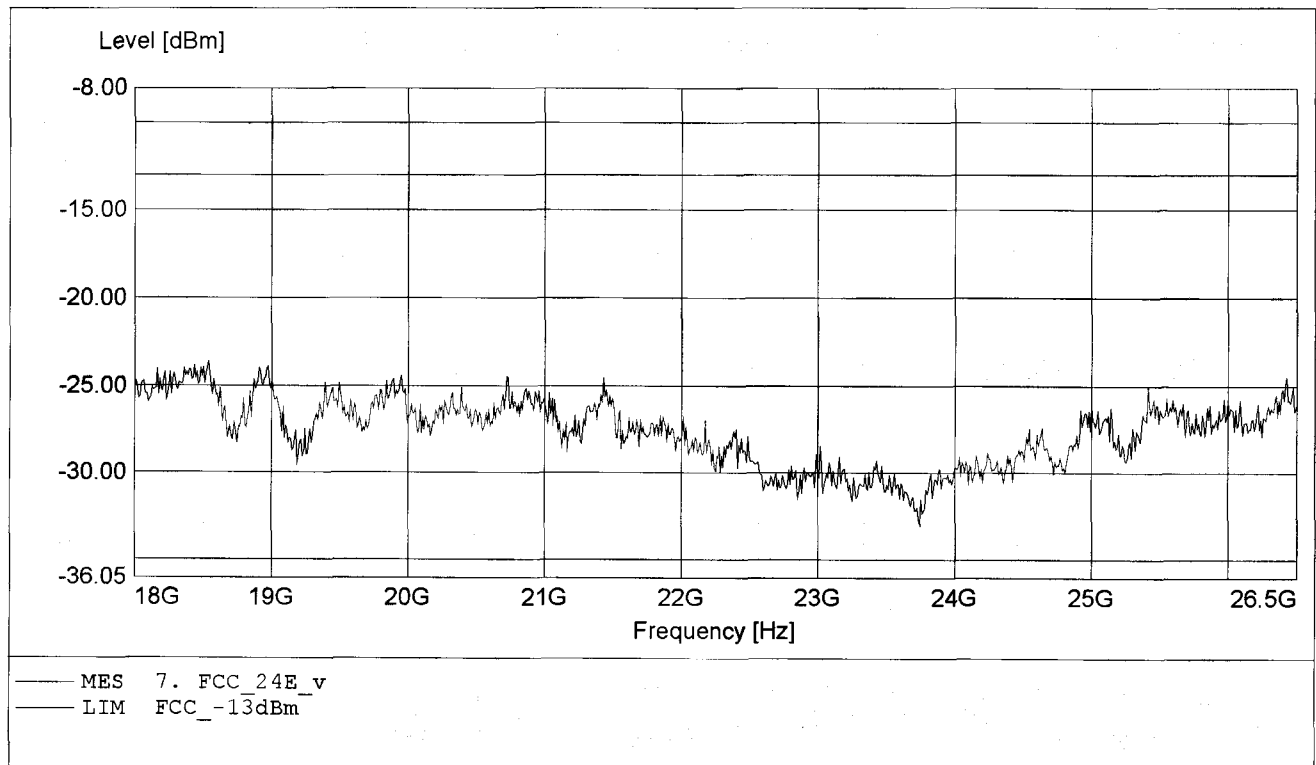


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 512
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.444GHz, Pmax: -22.46dBm, RBW: 1MHz

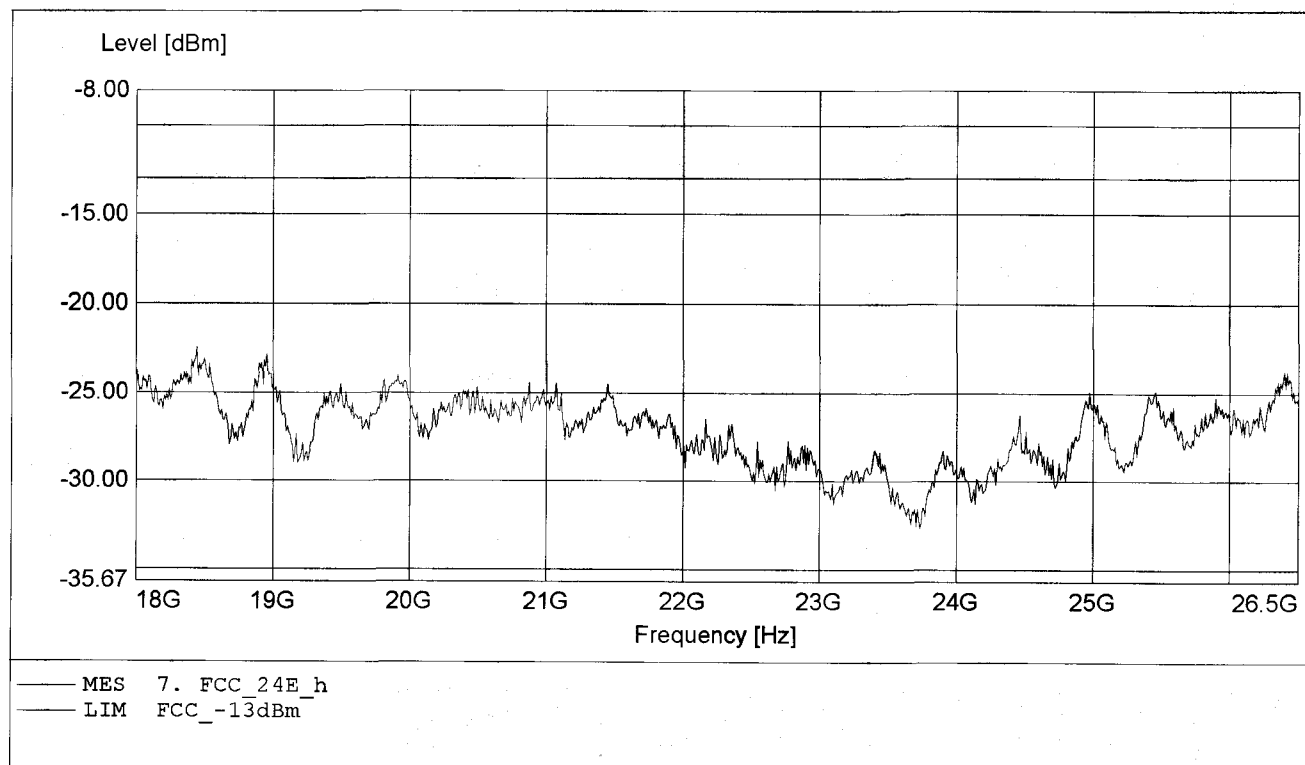


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.789MHz, Pmax: -53.22dBm, RBW: 1MHz

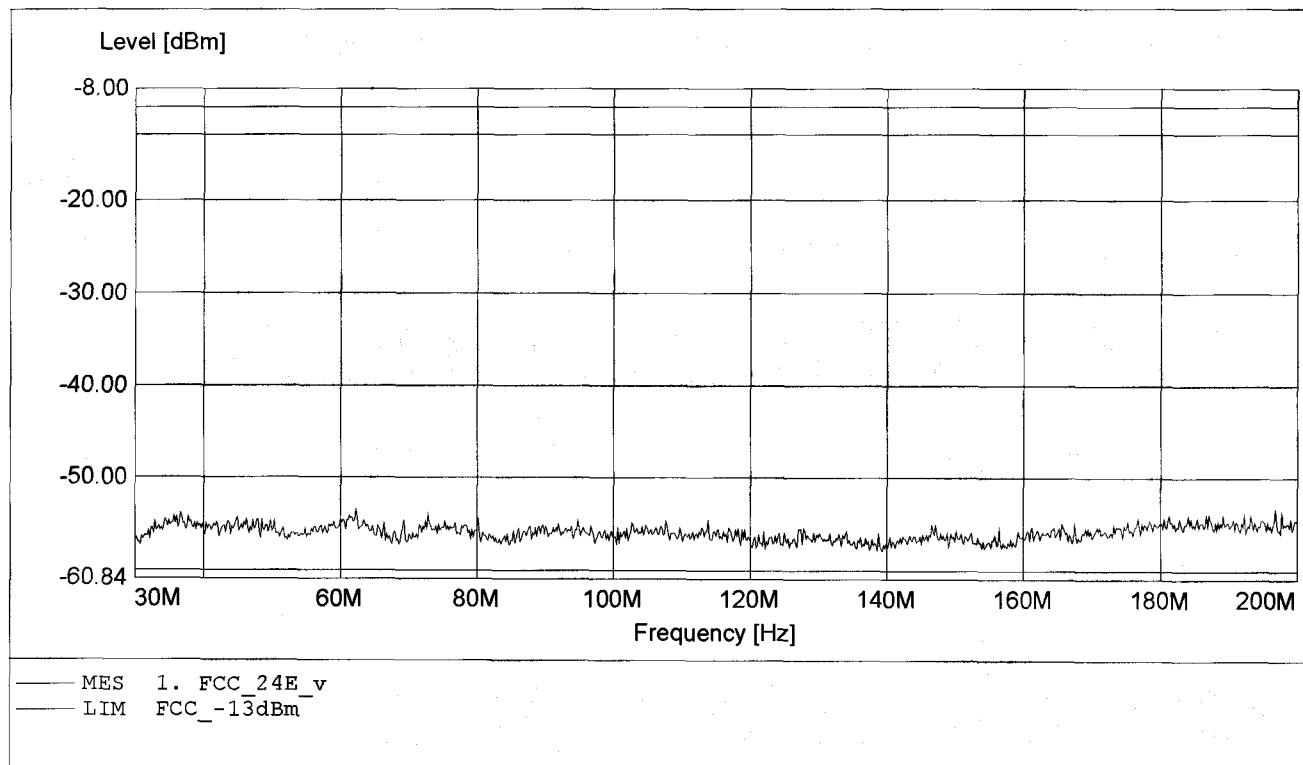


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 40.578MHz, Pmax: -52.73dBm, RBW: 1MHz

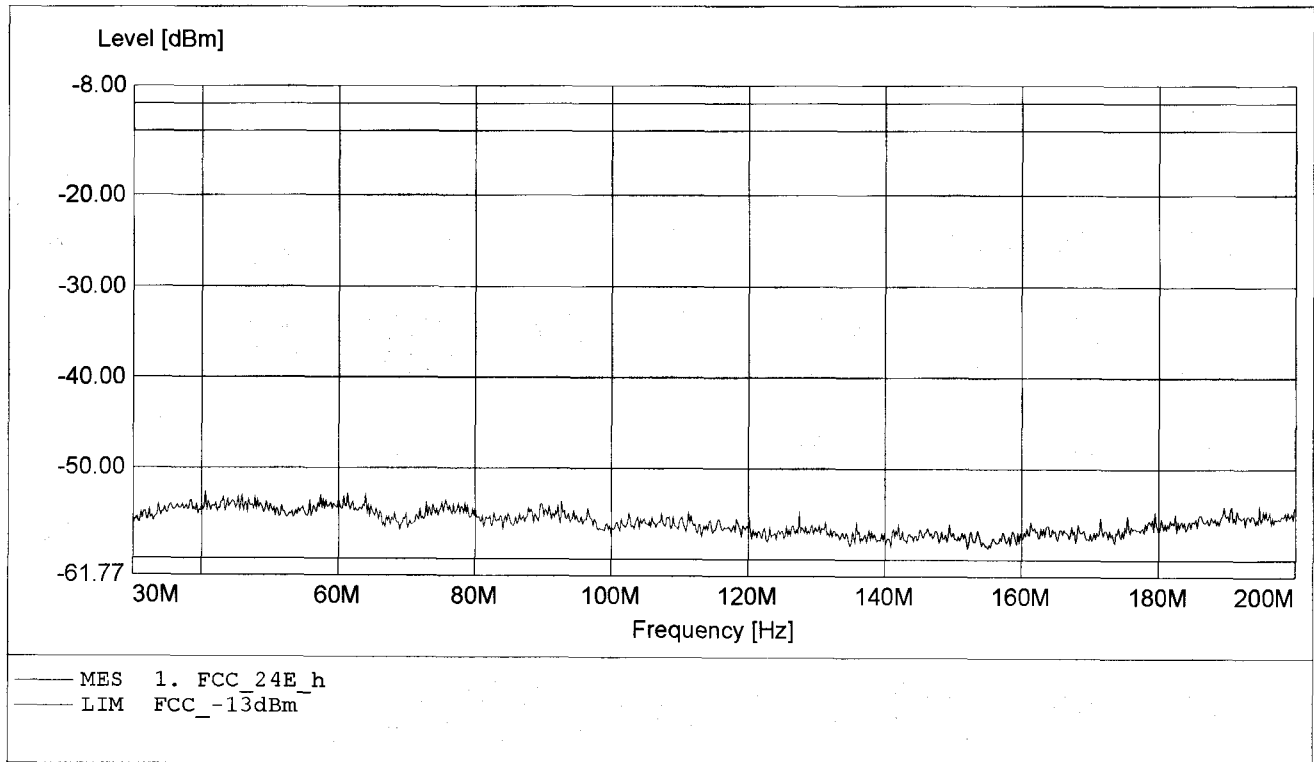


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 989.333MHz, Pmax: -40.26dBm, RBW: 1MHz

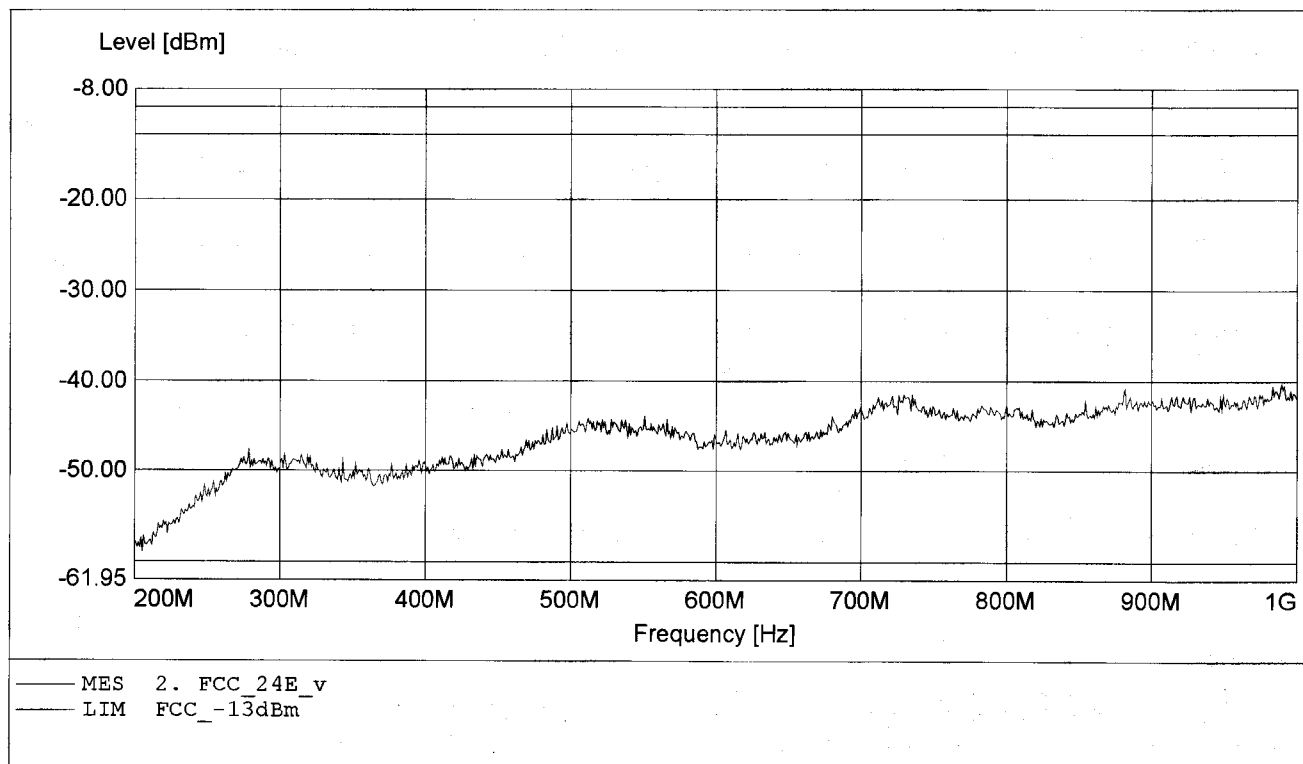


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 862.222MHz, Pmax: -39.36dBm, RBW: 1MHz

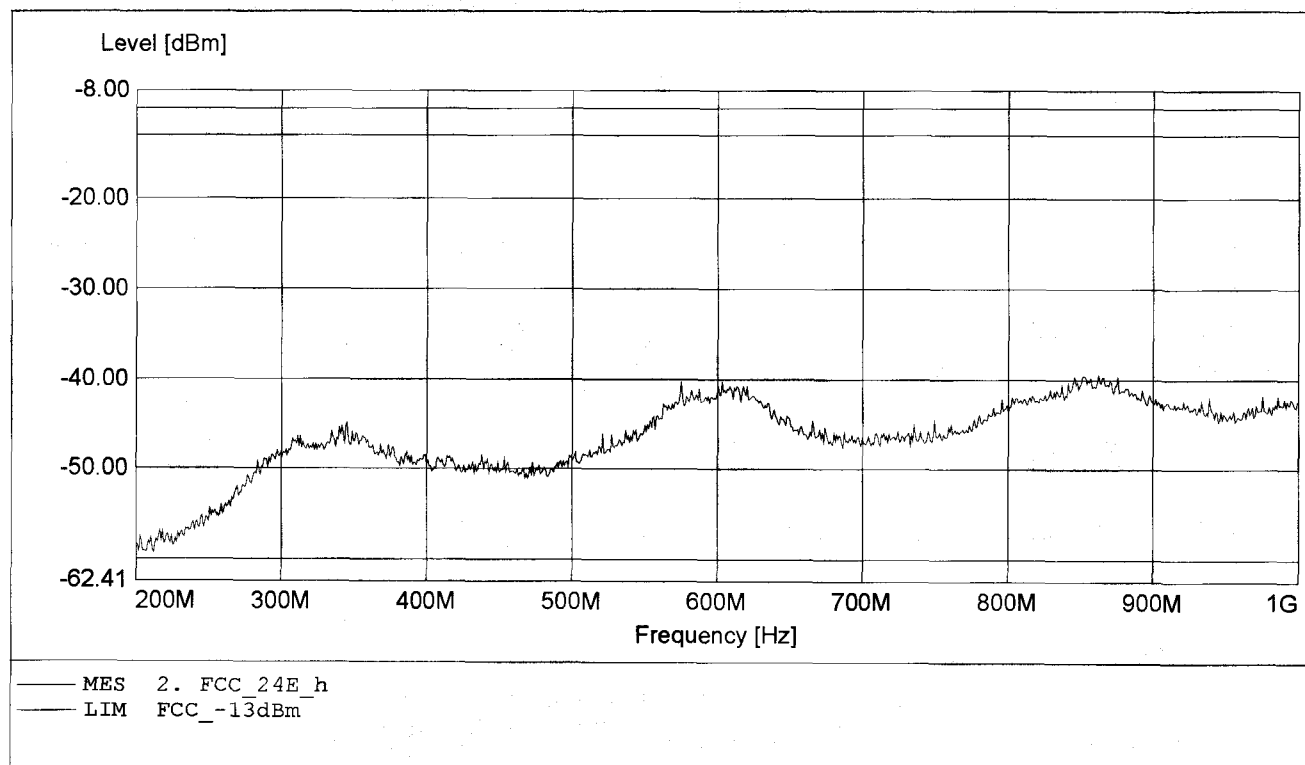


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.527GHz, Pmax: -23.26dBm, RBW: 1MHz/3kHz

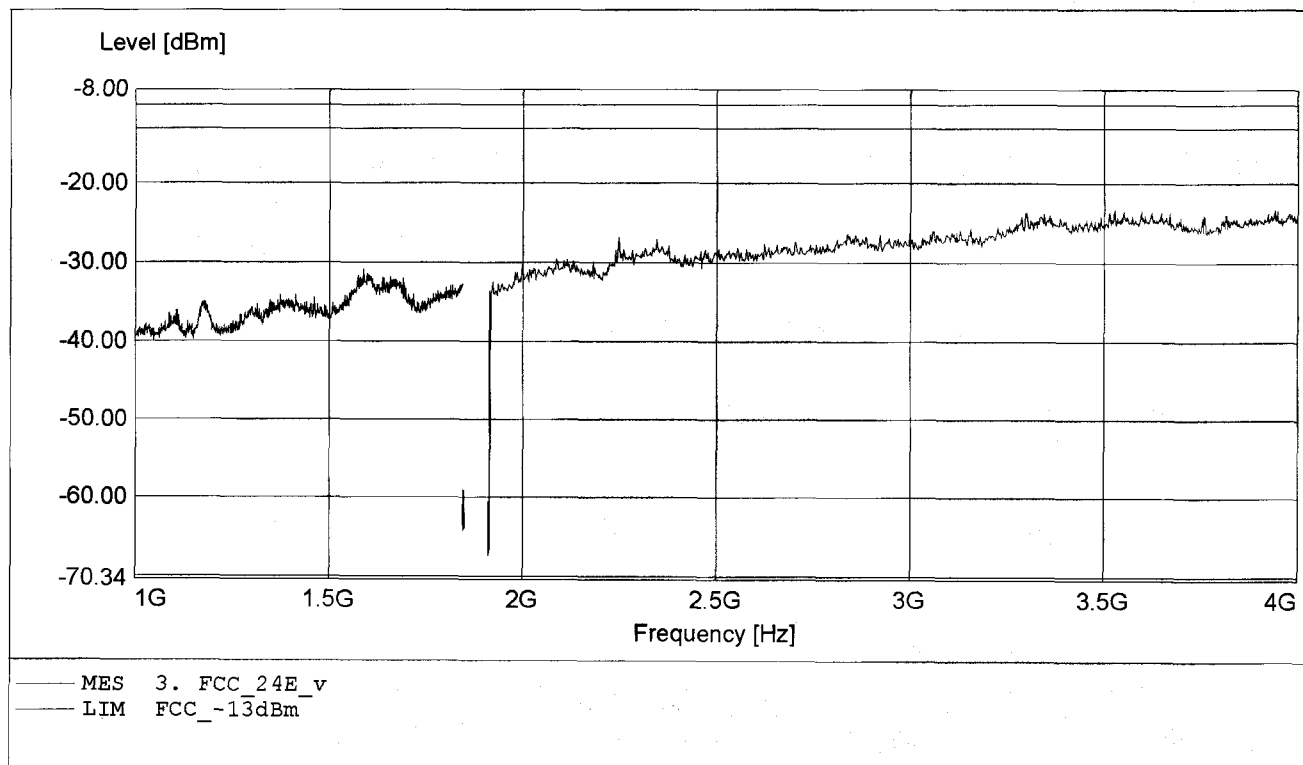


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.972GHz, Pmax: -23.01dBm, RBW: 1MHz/3kHz

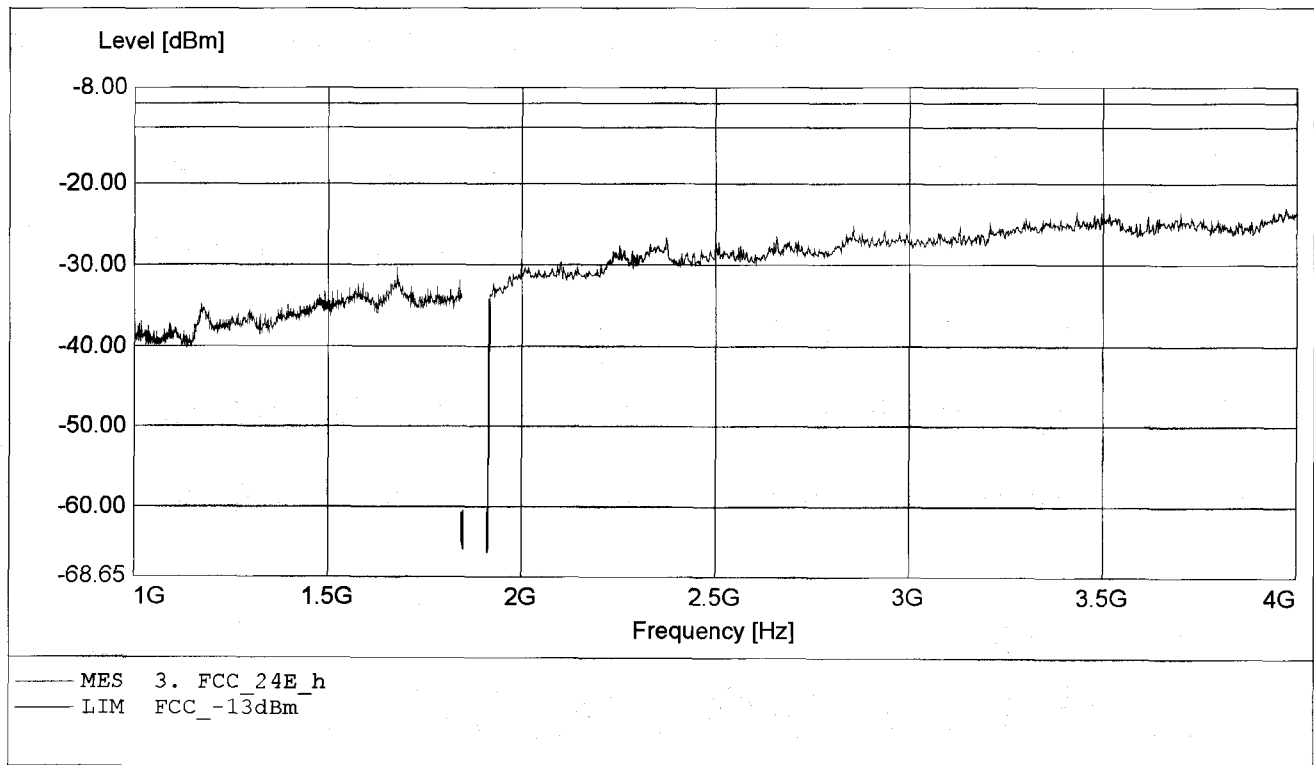


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 8.000GHz, Pmax: -44.01dBm, RBW: 1MHz

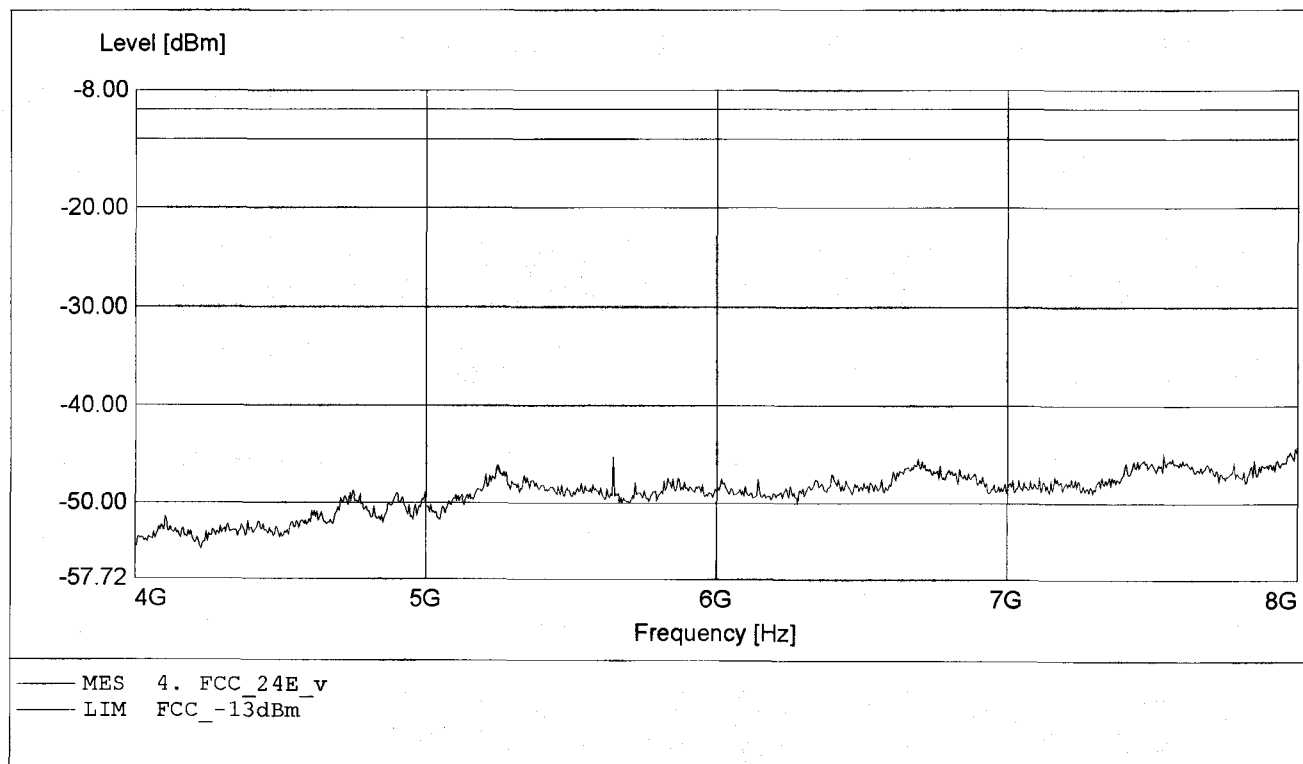


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.644GHz, Pmax: -42.36dBm, RBW: 1MHz

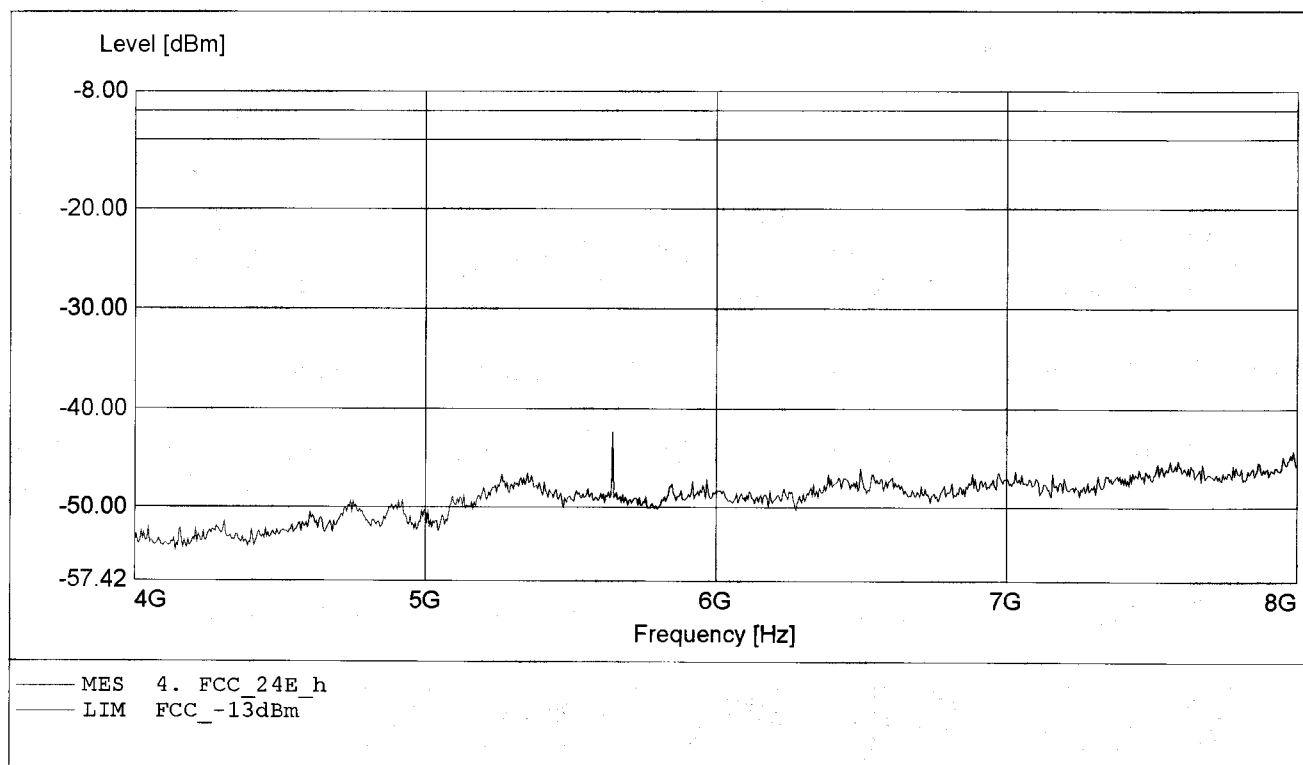


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.747GHz, Pmax: -40.29dBm, RBW: 1MHz

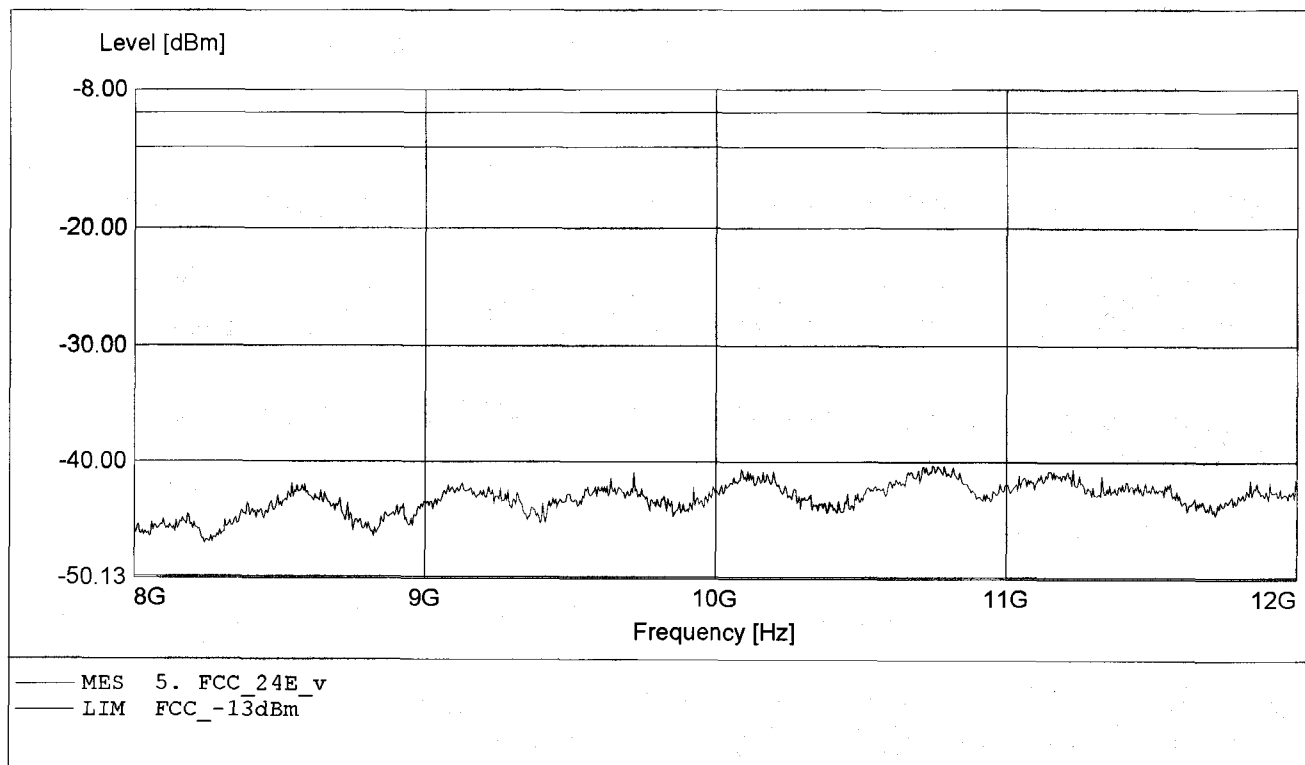


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.787GHz, Pmax: -39.25dBm, RBW: 1MHz

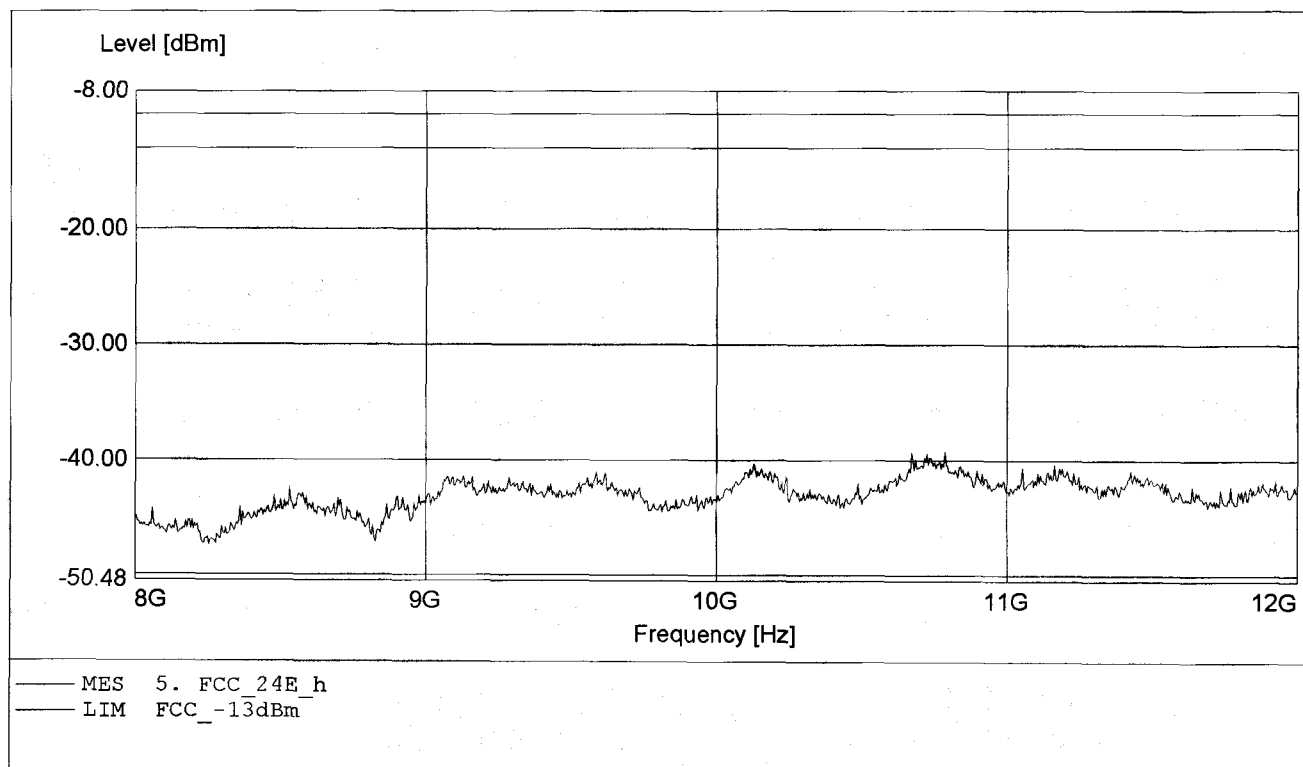


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.433GHz, Pmax: -32.11dBm, RBW: 1MHz

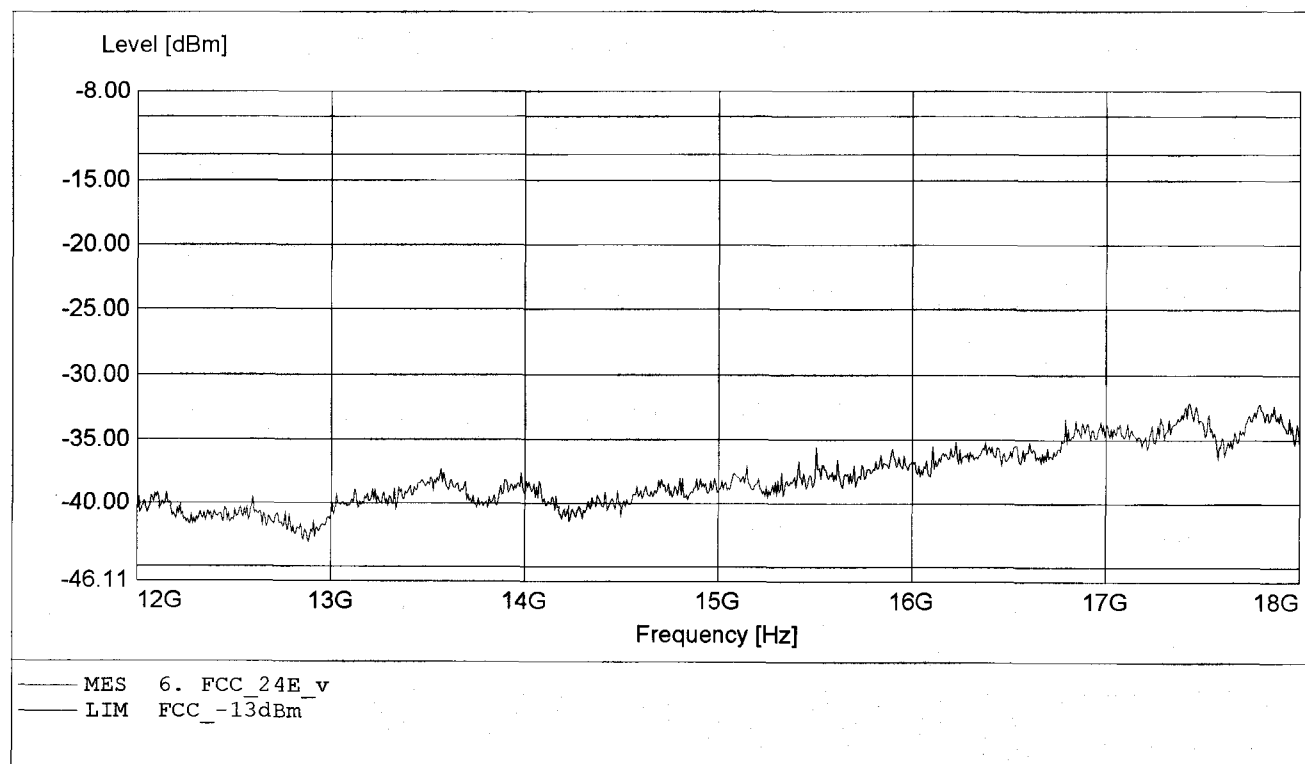


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.427GHz, Pmax: -31.82dBm, RBW: 1MHz

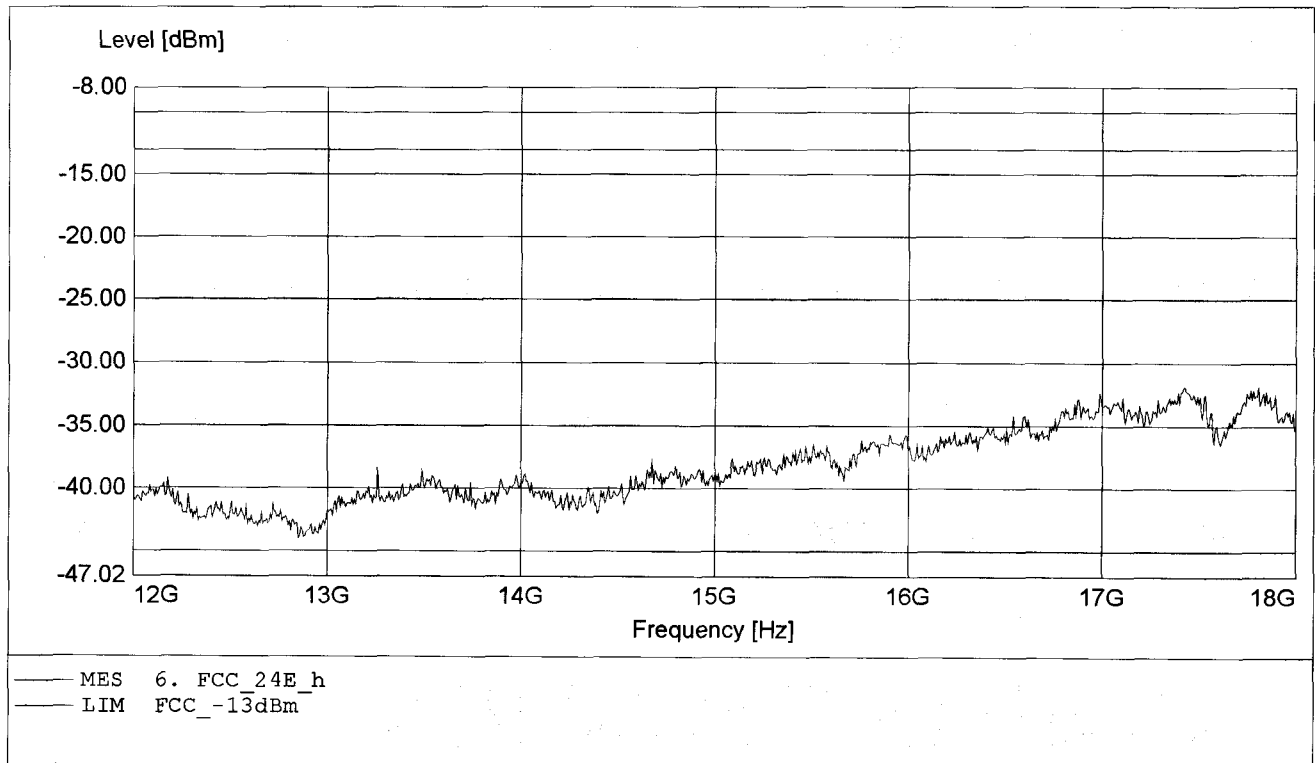


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.538GHz, Pmax: -22.44dBm, RBW: 1MHz

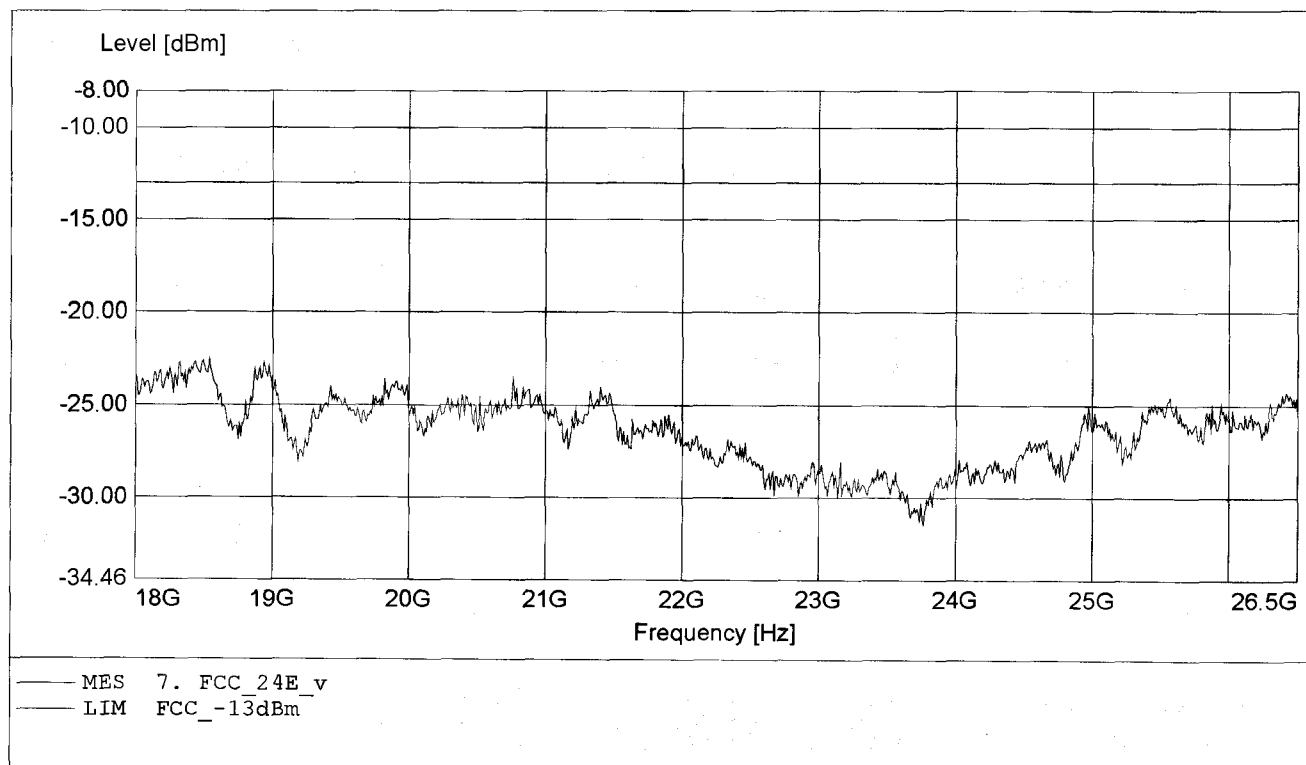


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 661
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.954GHz, Pmax: -22.56dBm, RBW: 1MHz

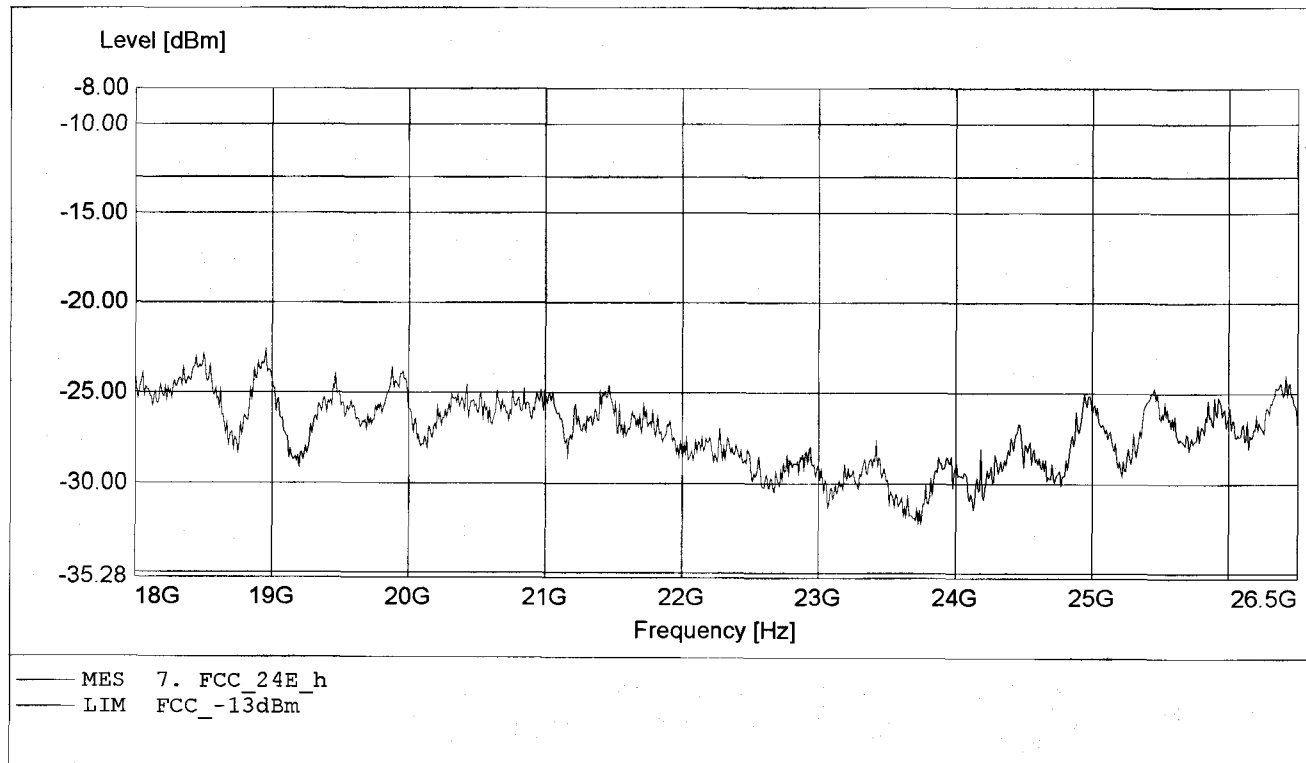


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 58.144MHz, Pmax: -52.43dBm, RBW: 1MHz

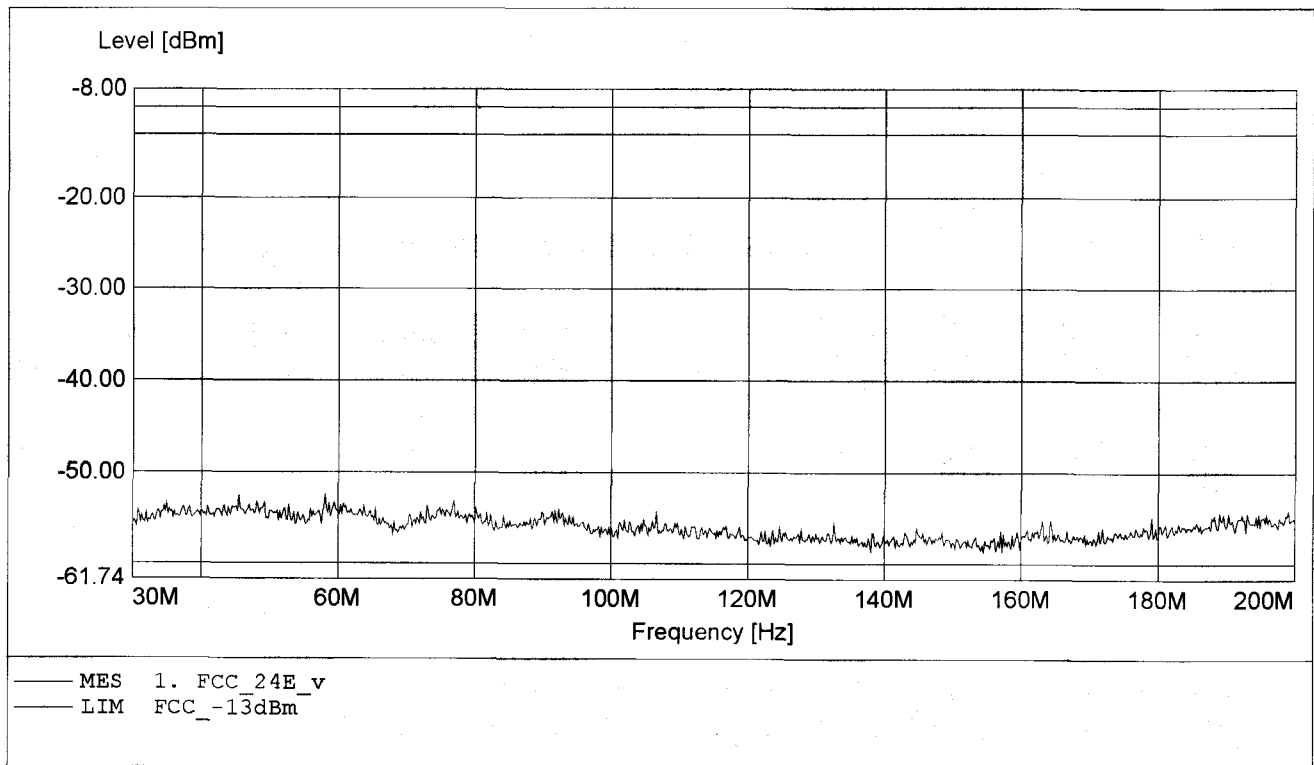


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 40.578MHz, Pmax: -52.88dBm, RBW: 1MHz

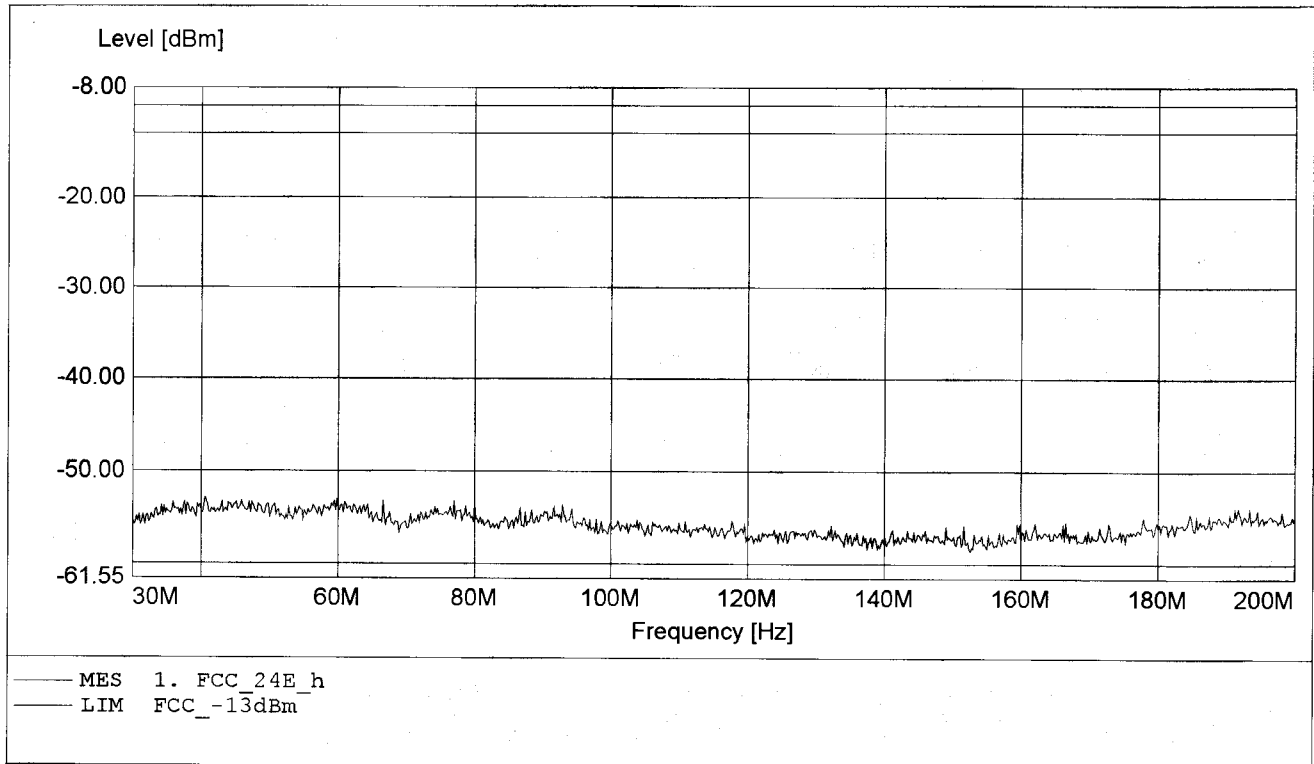


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 864.000MHz, Pmax: -38.80dBm, RBW: 1MHz

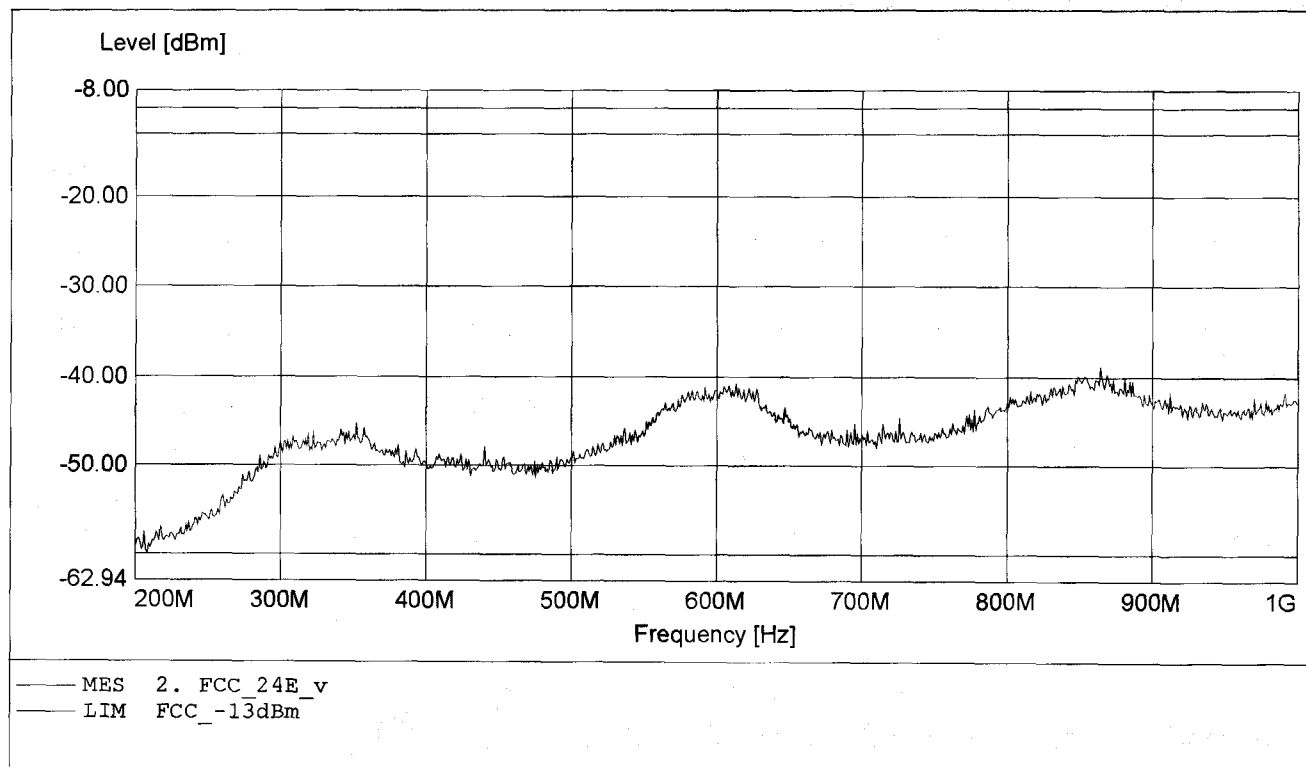


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL 223
Comment 2: Freq: 862.222MHz, Pmax: -39.46dBm, RBW: 1MHz

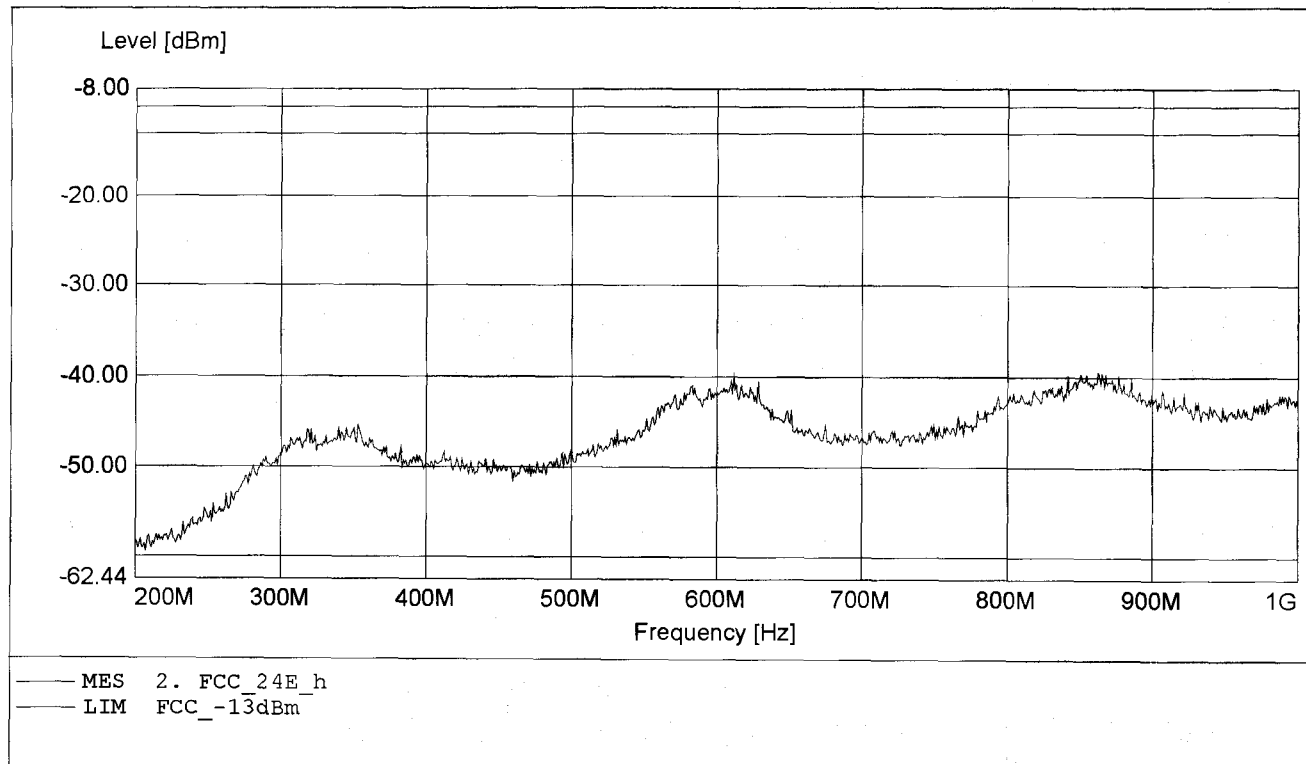


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.558GHz, Pmax: -23.42dBm, RBW: 1MHz/3kHz

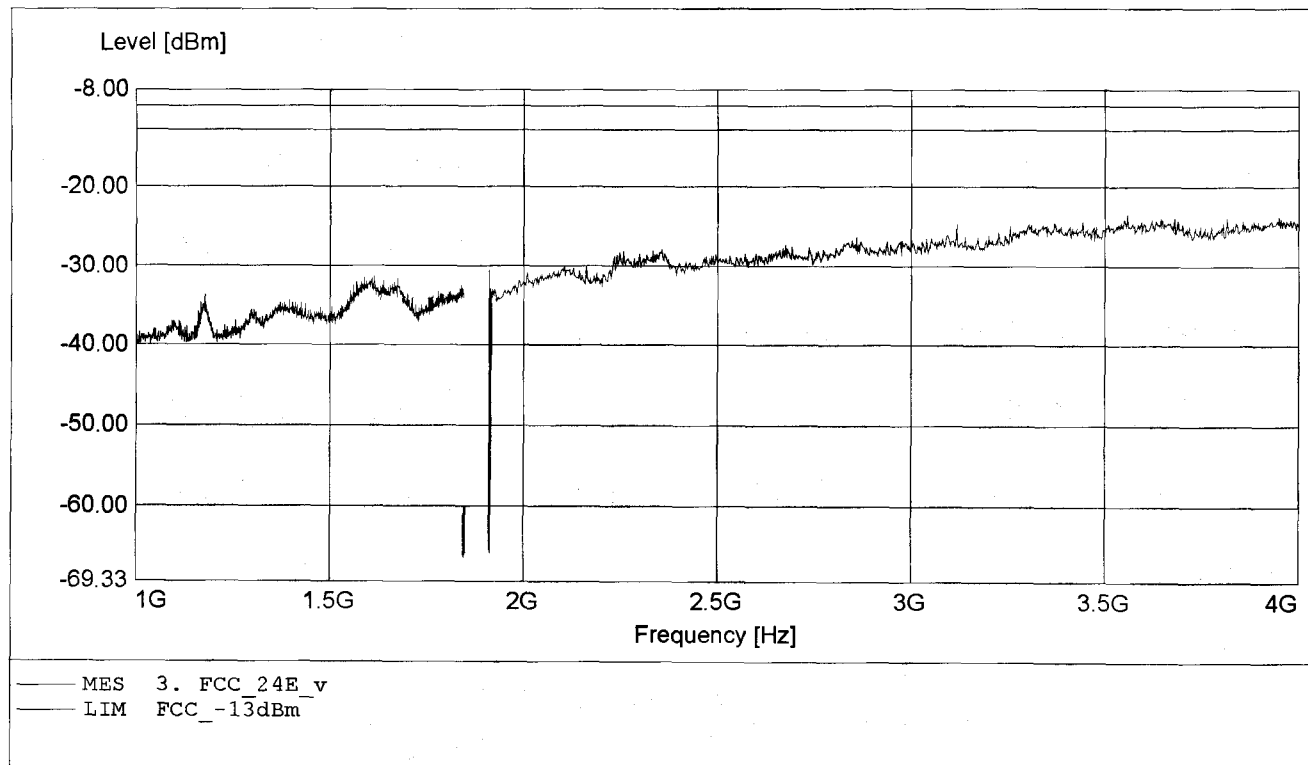


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 3.738GHz, Pmax: -22.87dBm, RBW: 1MHz/3kHz

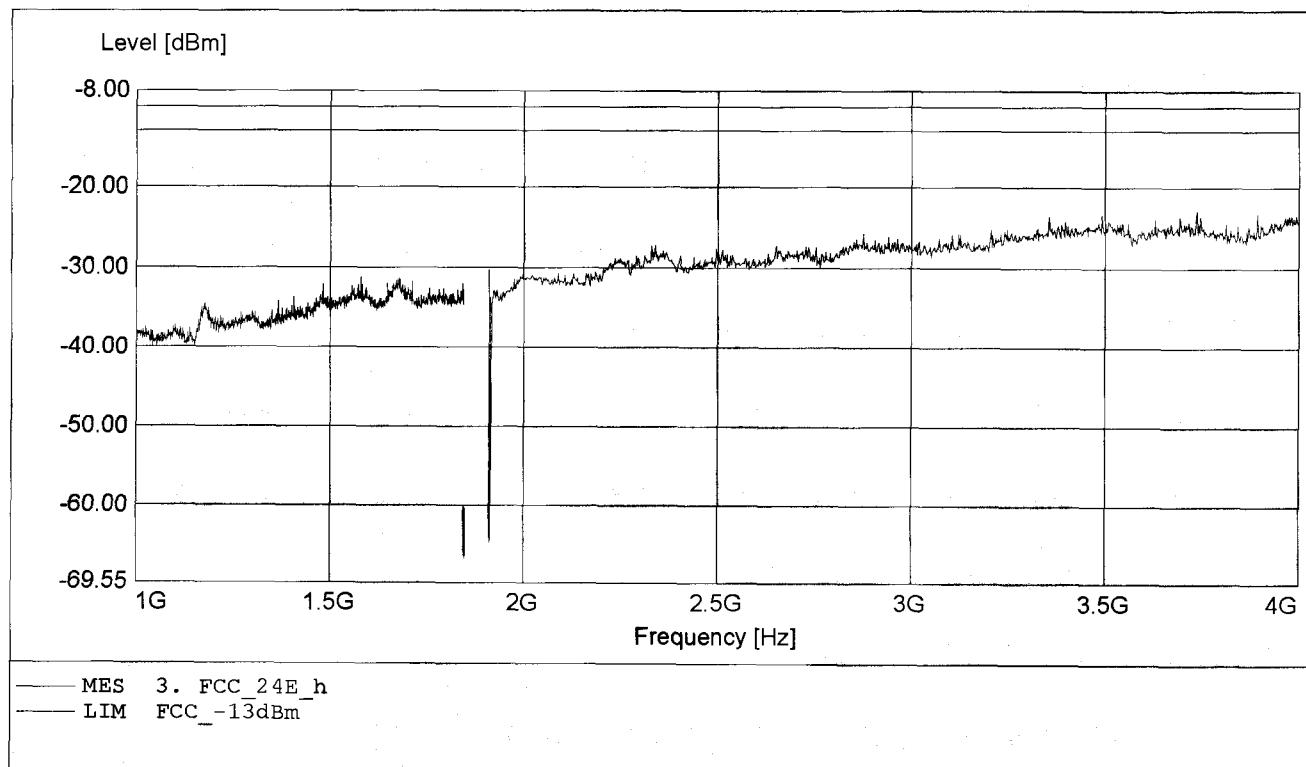


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.733GHz, Pmax: -43.86dBm, RBW: 1MHz

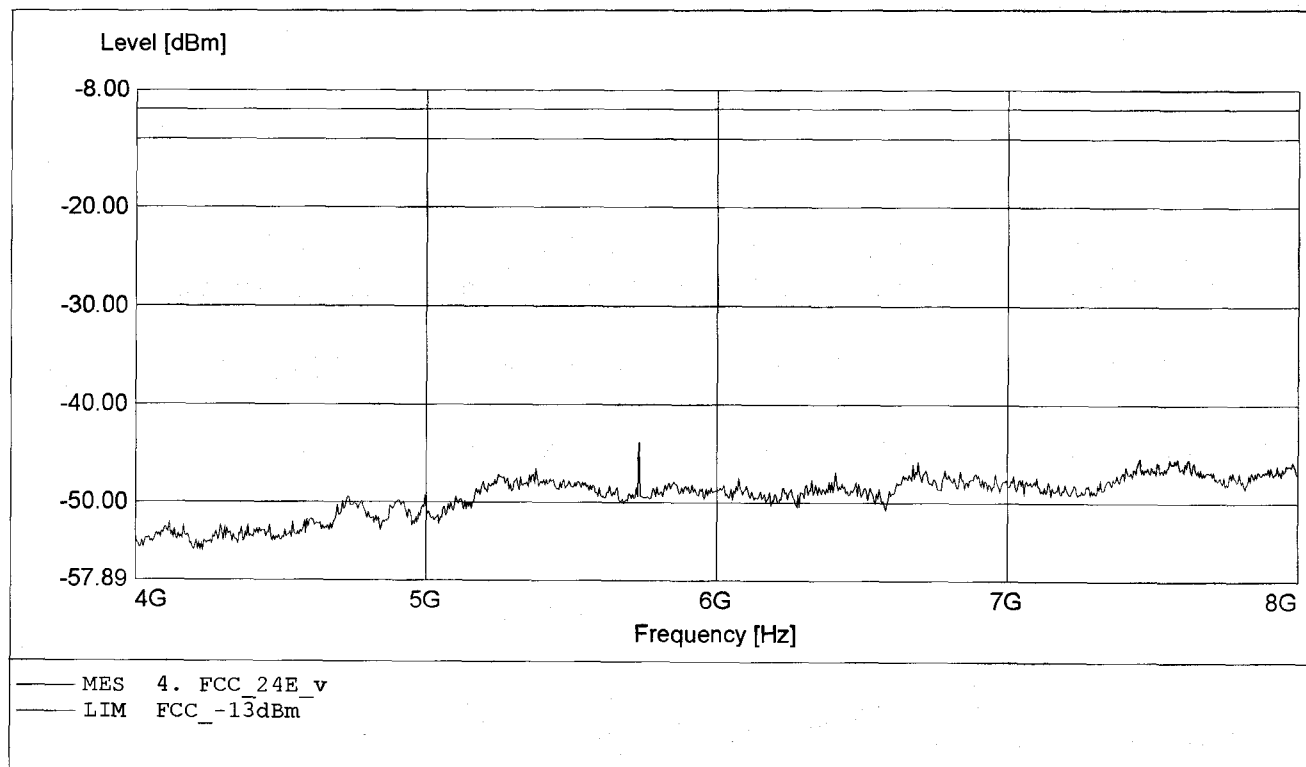


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to S24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 5.729GHz, Pmax: -42.46dBm, RBW: 1MHz

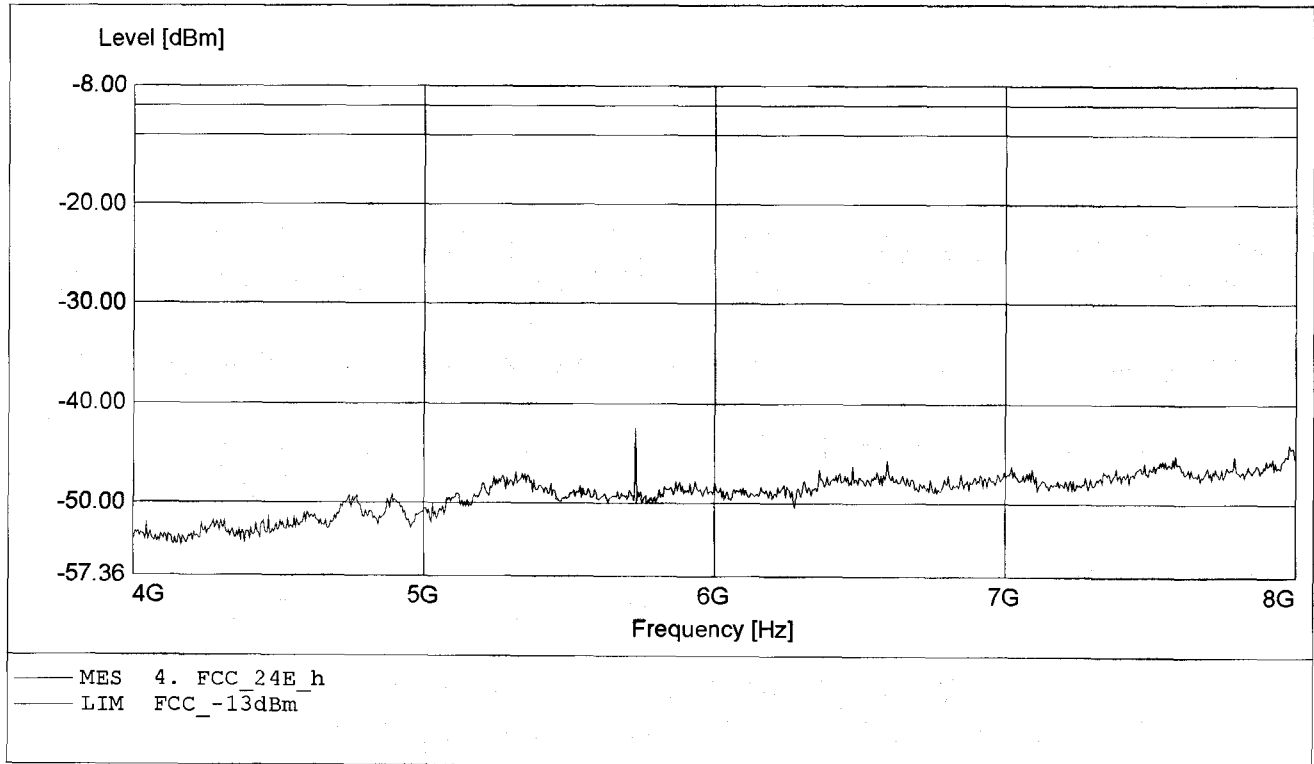


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.747GHz, Pmax: -40.80dBm, RBW: 1MHz

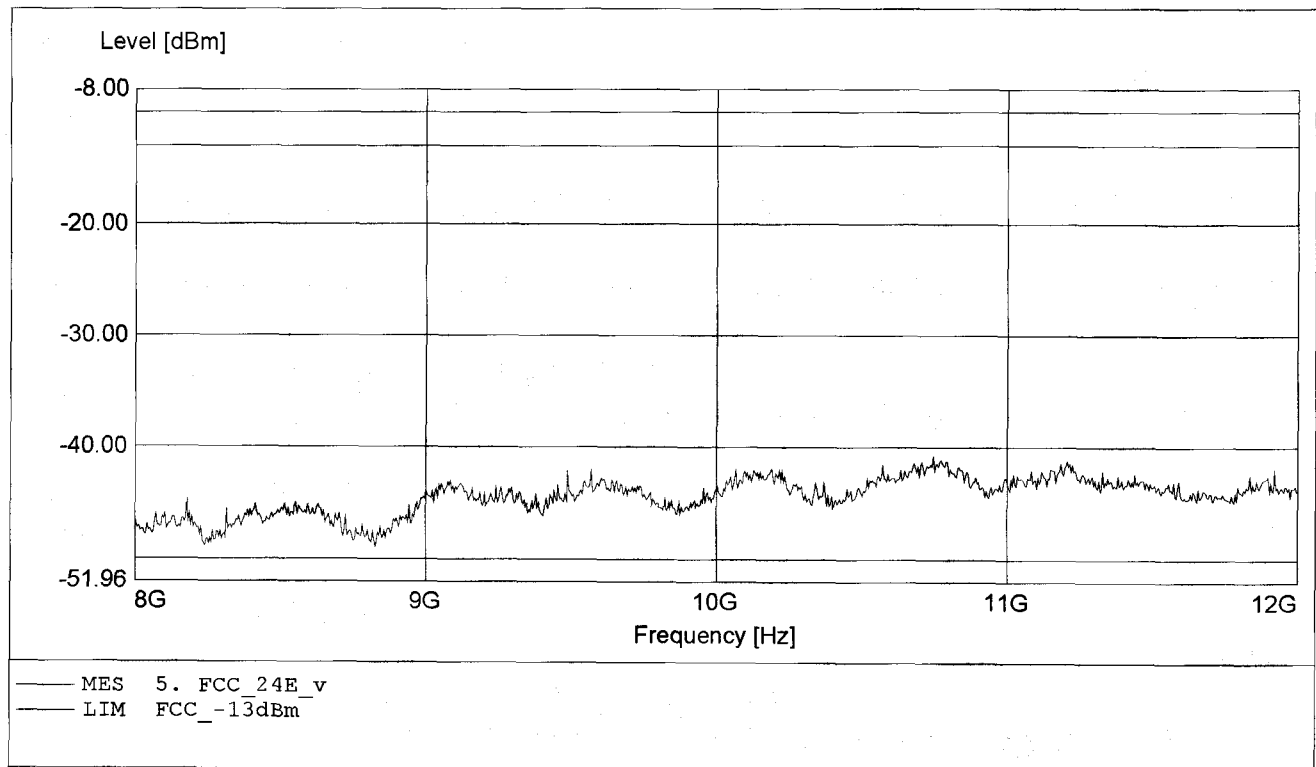


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 10.689GHz, Pmax: -39.60dBm, RBW: 1MHz

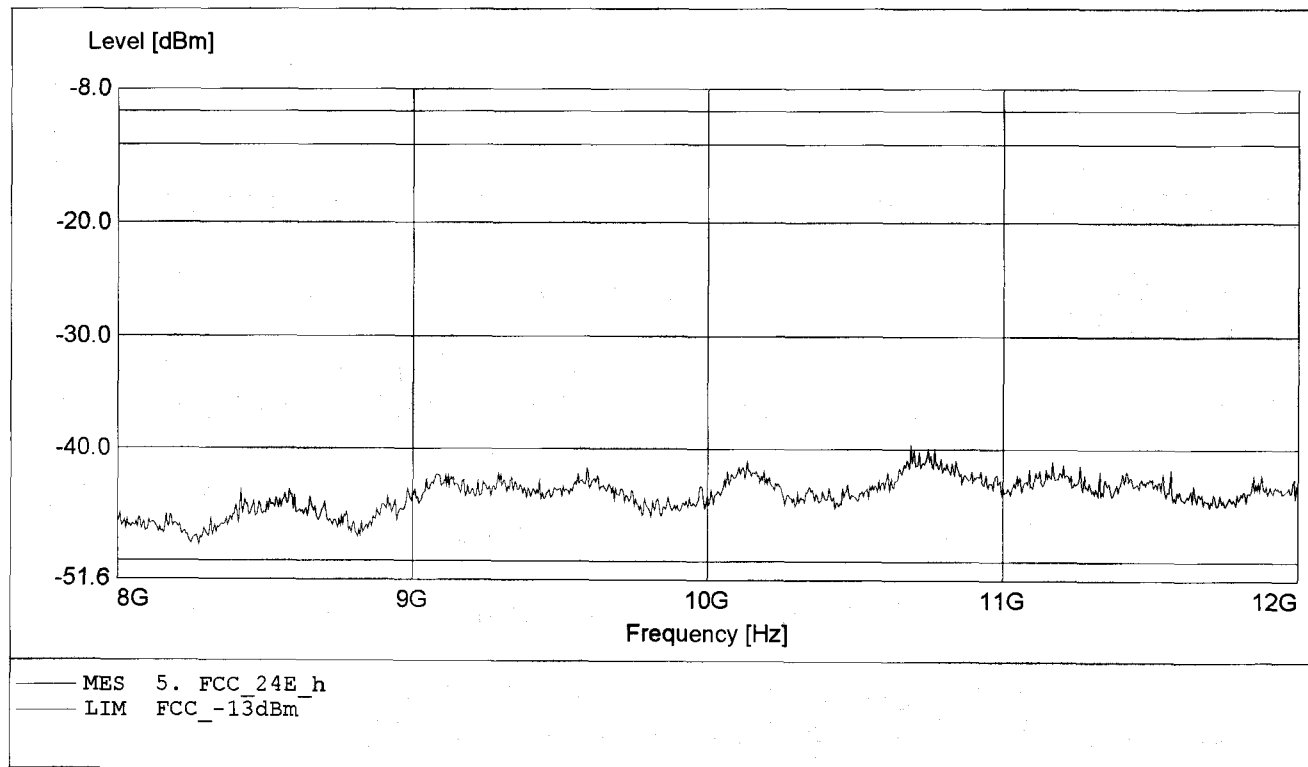


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.447GHz, Pmax: -32.23dBm, RBW: 1MHz

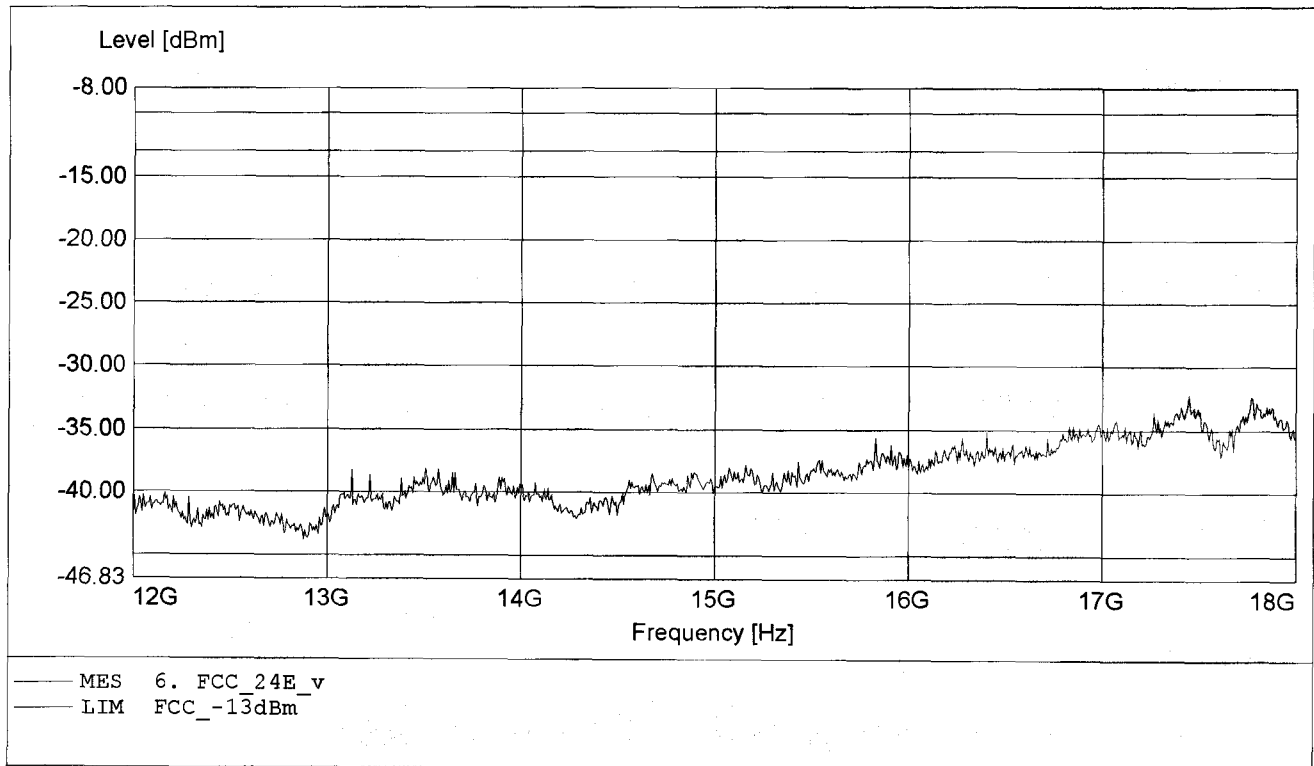


Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.400GHz, Pmax: -31.65dBm, RBW: 1MHz

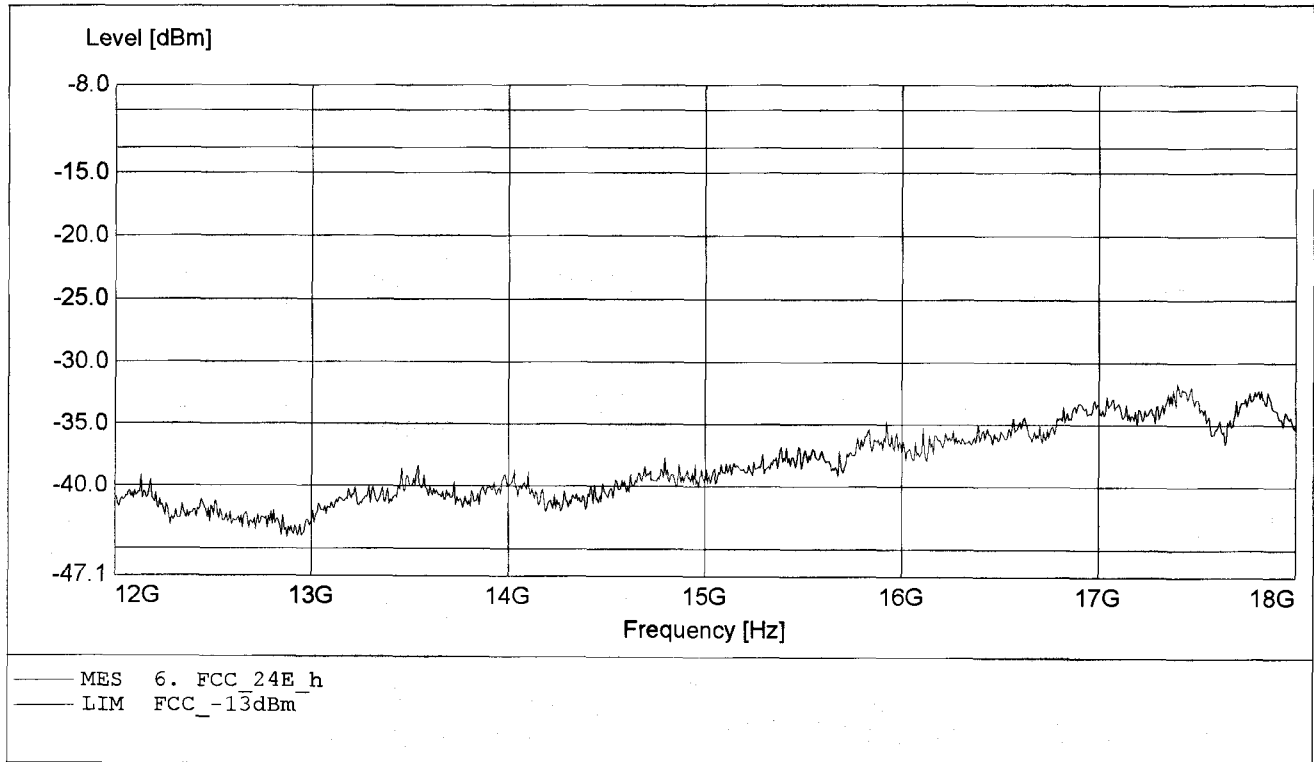

Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 18.501GHz, Pmax: -23.24dBm, RBW: 1MHz

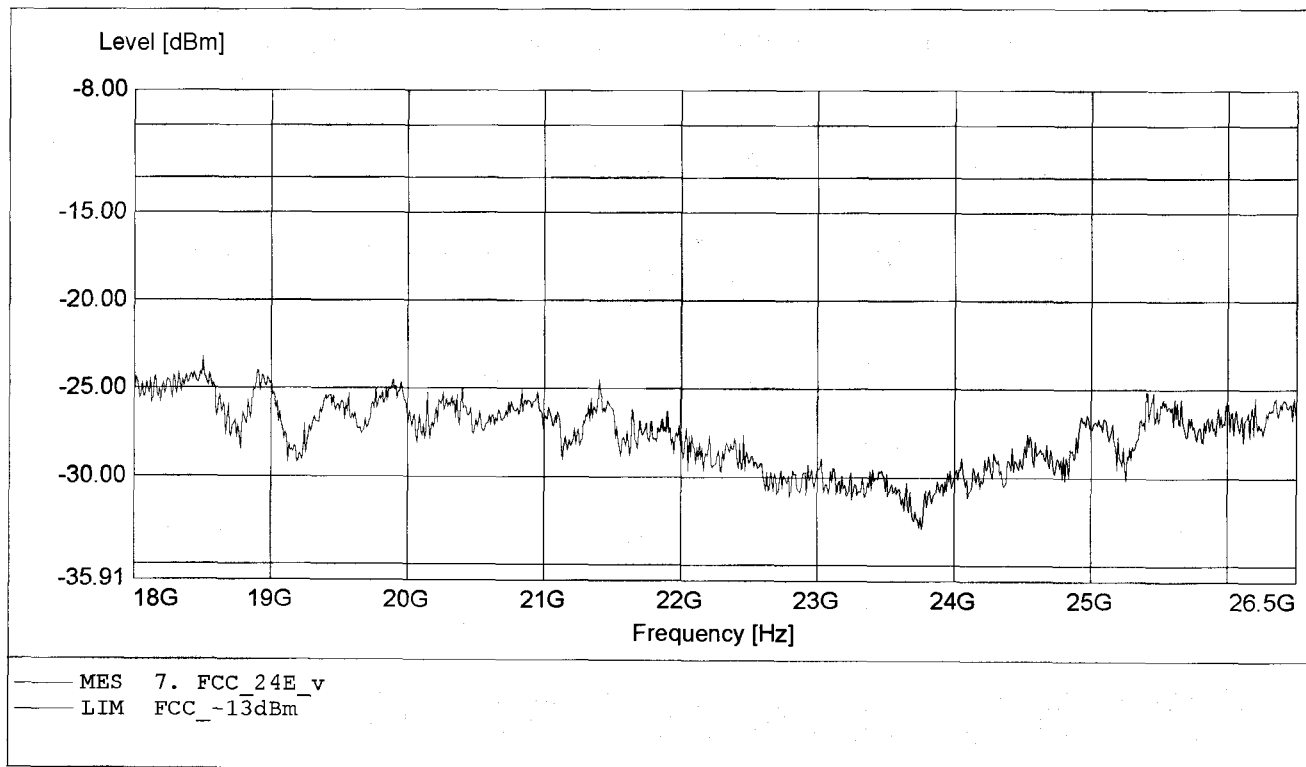

Radiated Emissions Tx
FCC RULES PART 24 SUBPART E

Company: Pantech
EUT : Triple Band
Model / Channel: PG-C300 / Channel: 810
Temperature/ Voltage: Temp.: 23°C / Unom.: 4.20 V DC
Test Site / Operator: ETS / Mr. Pfeufer
Test Specification: according to §24.238
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.377GHz, Pmax: -22.98dBm, RBW: 1MHz

