

Appendix B

RF power output conducted

Appendix C

RF power output radiated (EIRP)

Appendix D

20 dB bandwidth

Appendix E

Time of occupancy (dwell time)

Appendix F

Number of hopping frequencies

Appendix G

Carrier frequency separation

Appendix H


Spurious emission conducted

Appendix I

Spurious emission radiated


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL025
Comment 2: Freq: 2.441GHz, Emax: 103.19dBµV/m, RBW: 100kHz

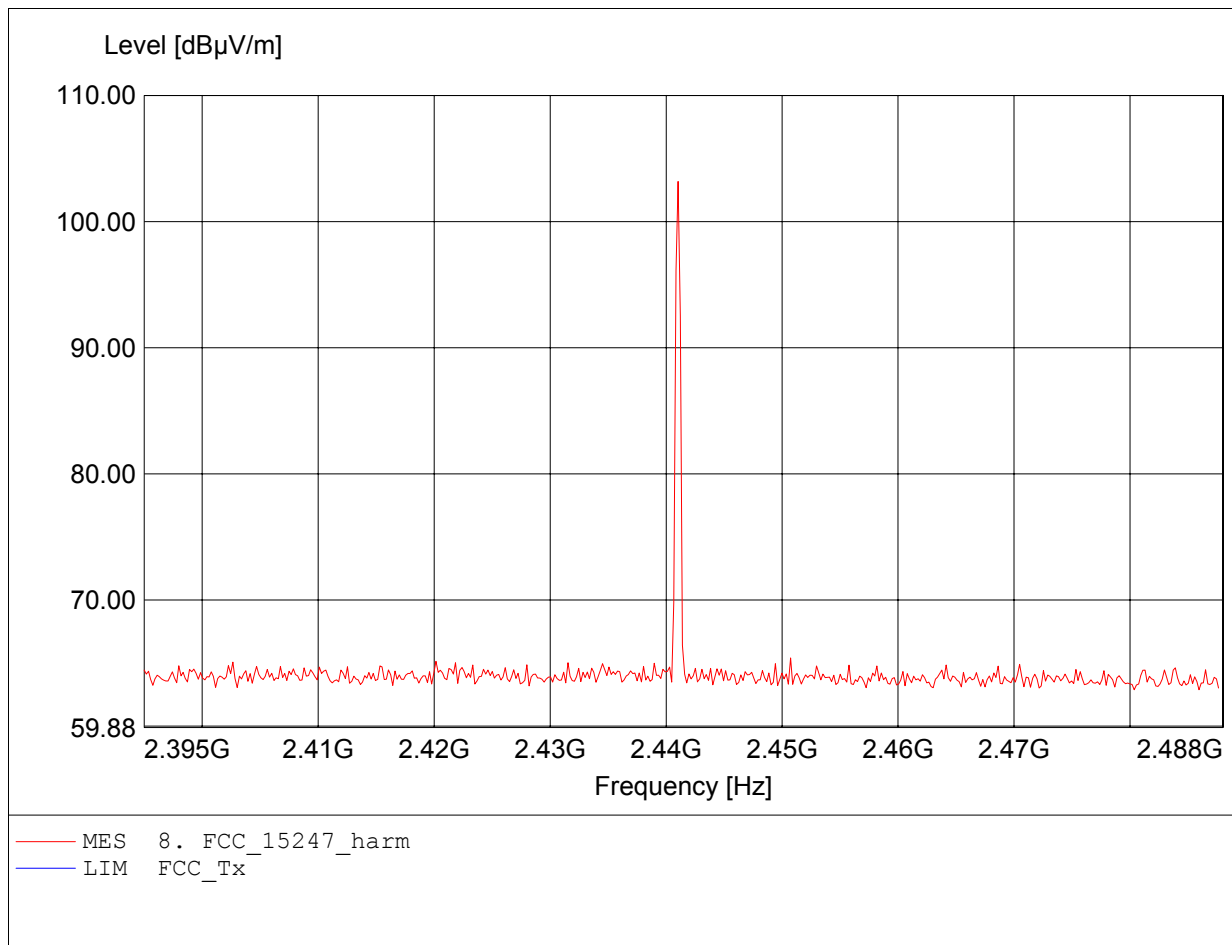


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 191.483MHz, Emax: 32.18dBµV/m, RBW: 100kHz

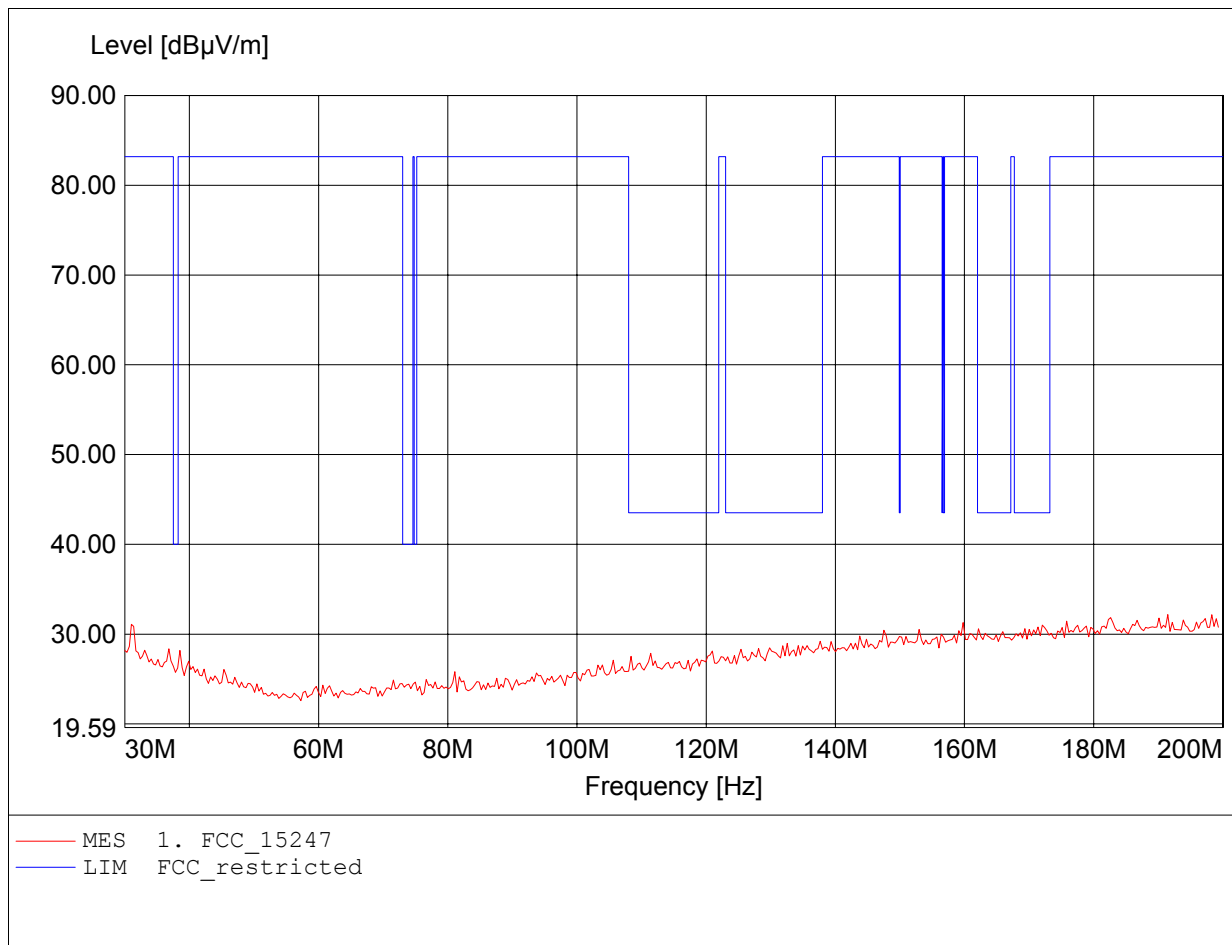


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 32.32dBµV/m, RBW: 100kHz

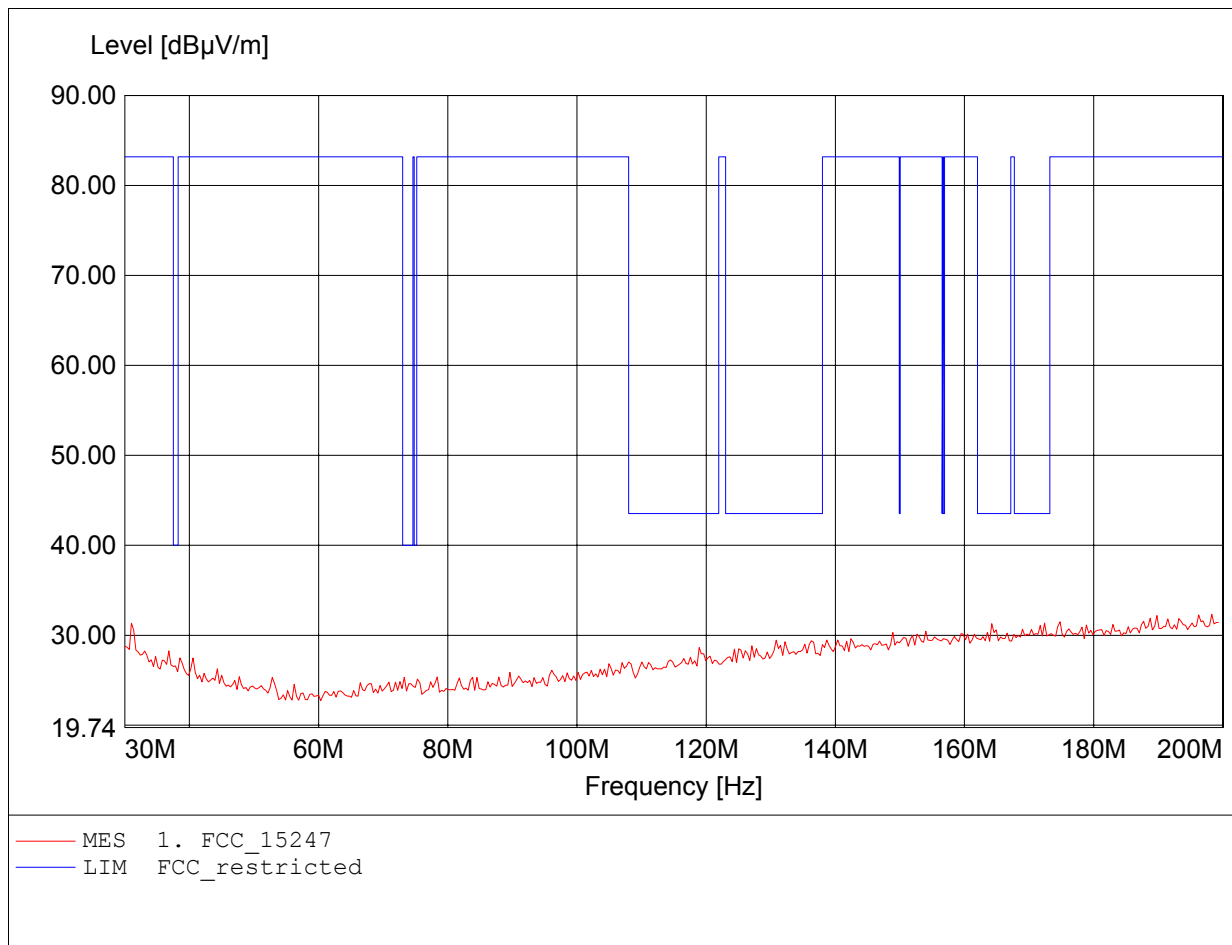


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 874.950MHz, Emax: 23.19dBµV/m, RBW: 100kHz

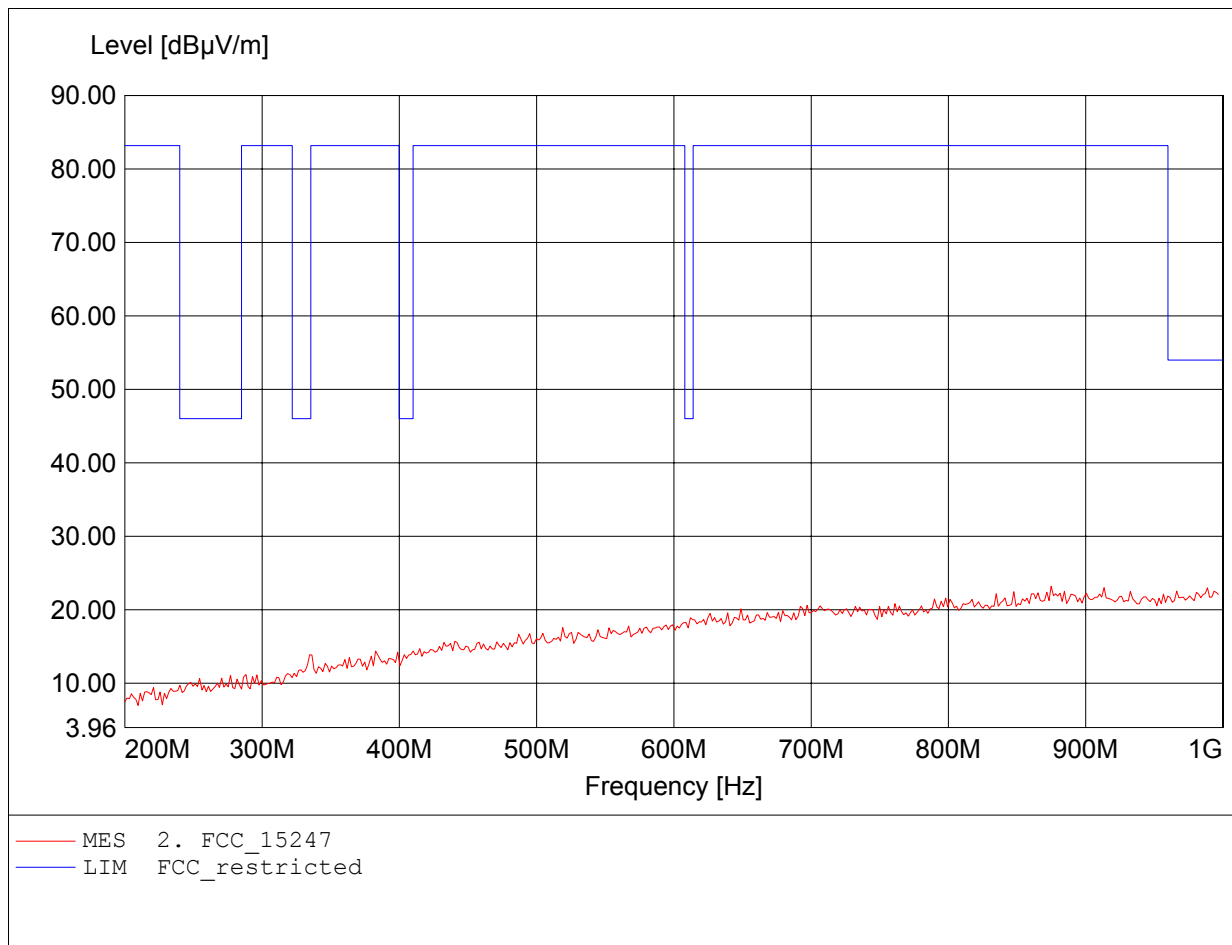


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 990.381MHz, Emax: 23.06dBµV/m, RBW: 100kHz

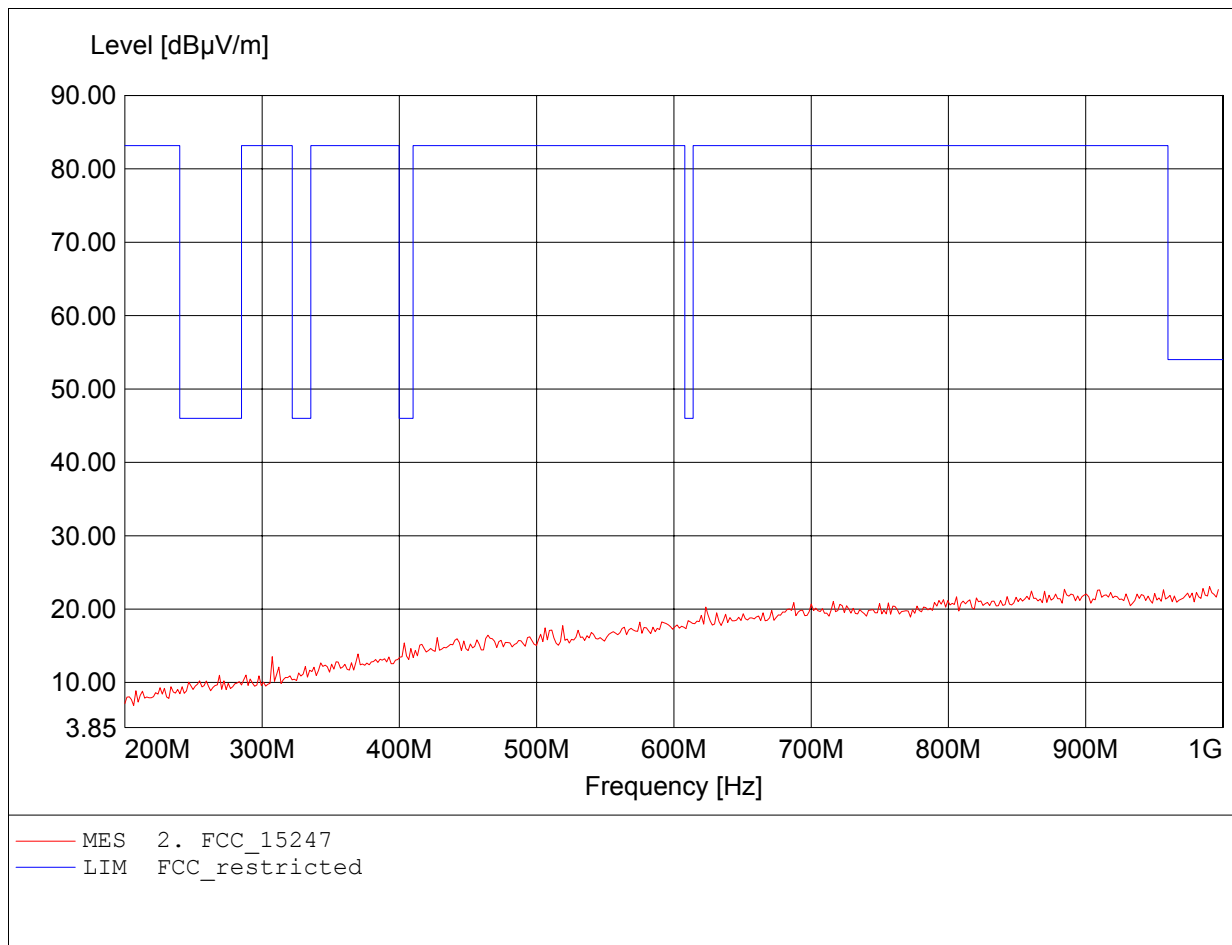


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.903GHz, Emax: 50.03dBµV/m, RBW: 1MHz

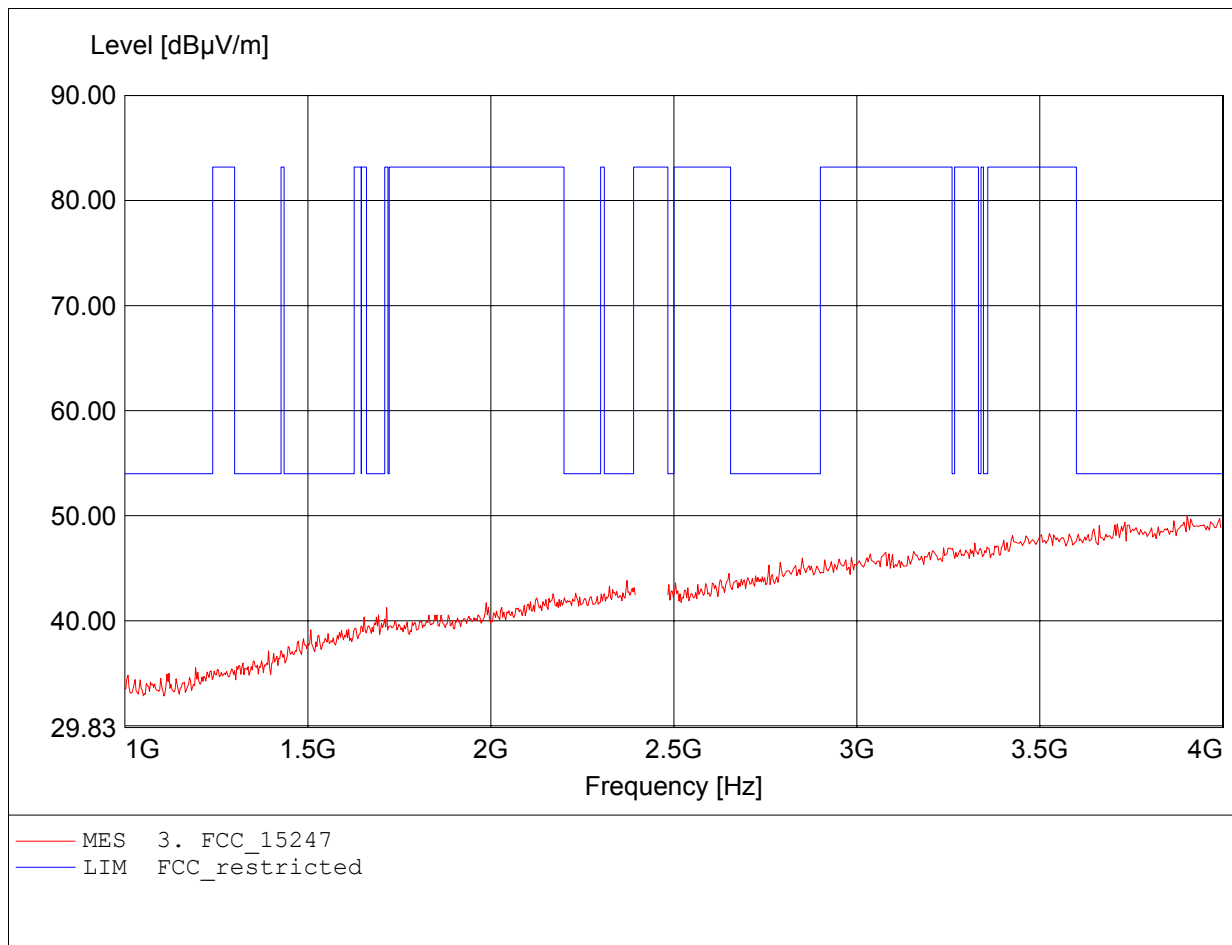


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.936GHz, Emax: 49.93dBµV/m, RBW: 1MHz

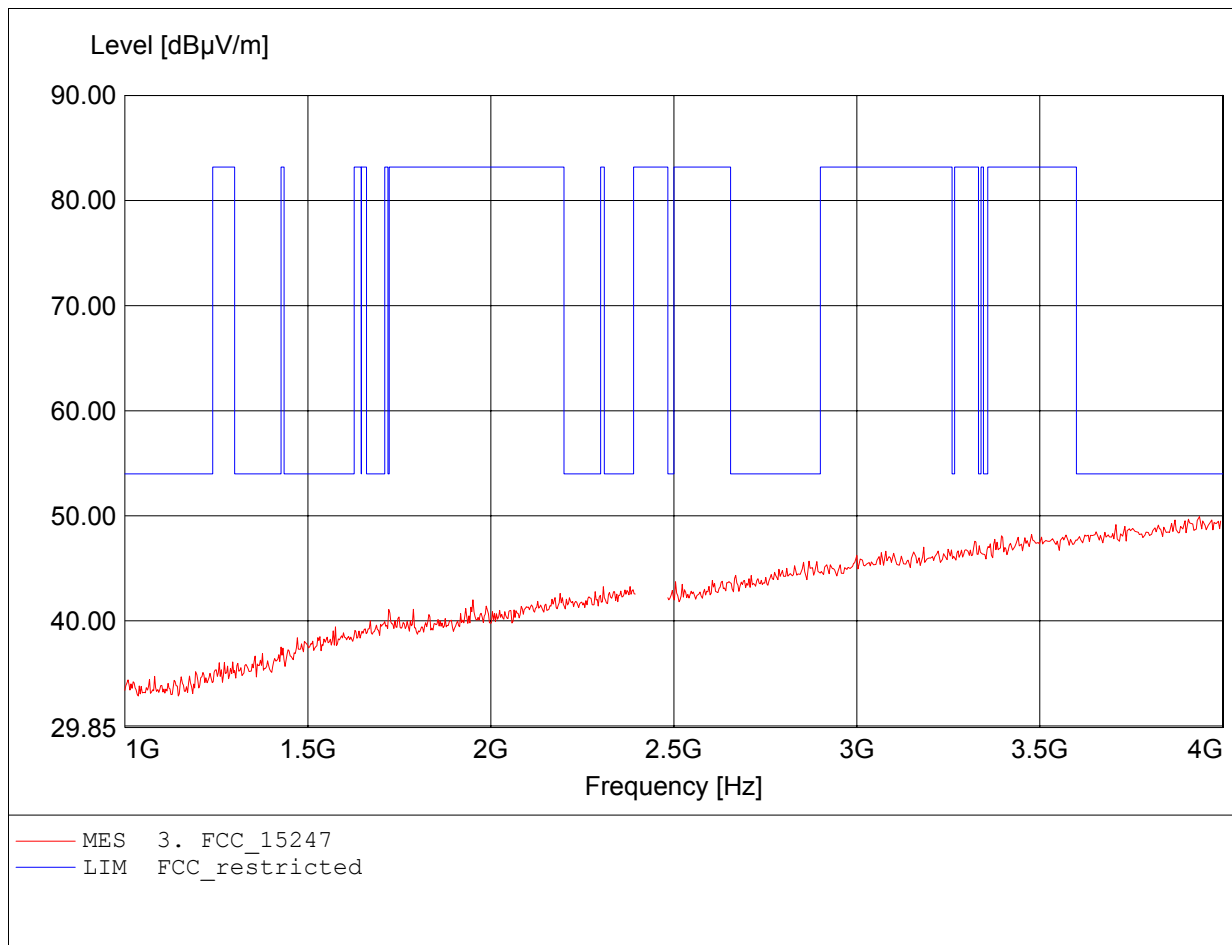


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 51.29dBμV/m, RBW: 1MHz

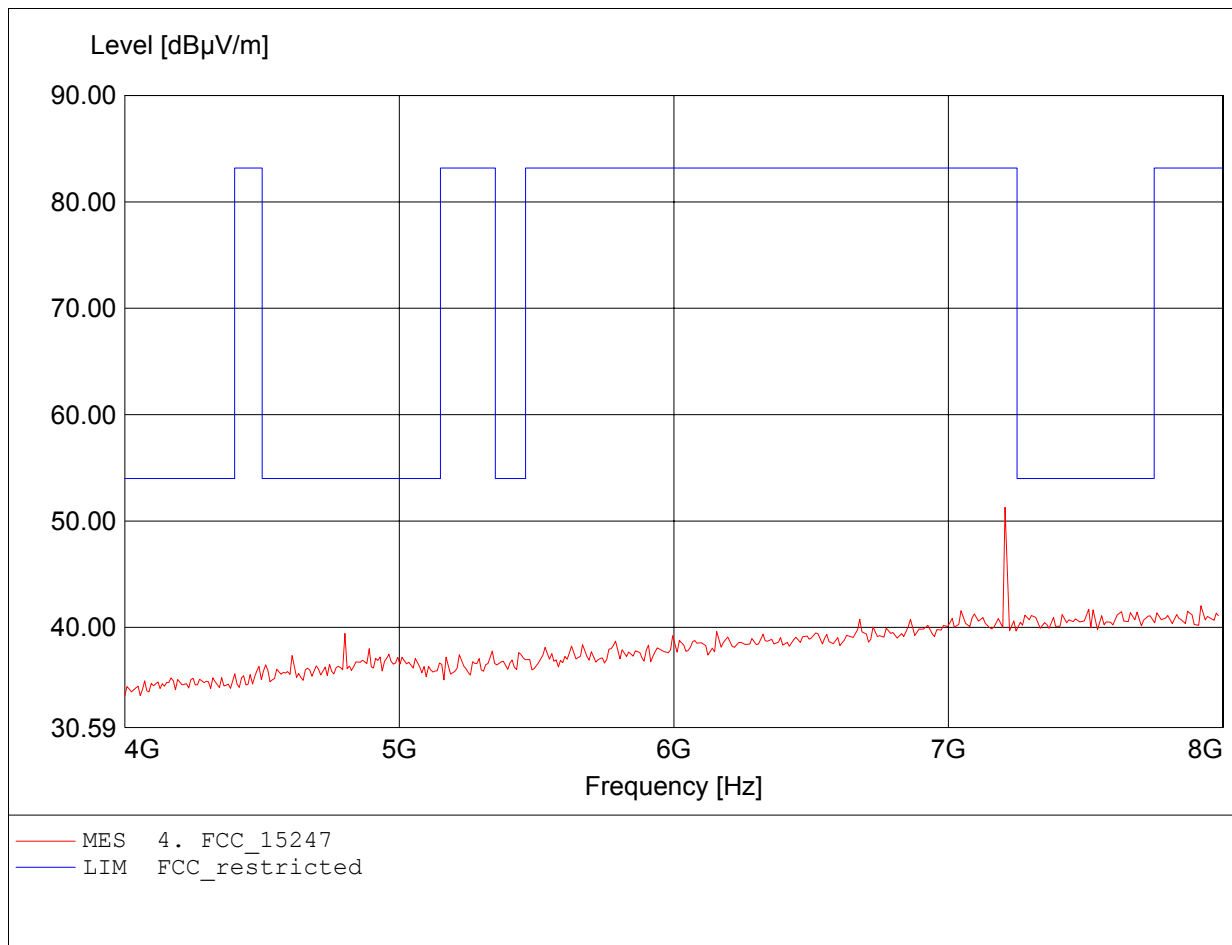


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 51.88dBμV/m, RBW: 1MHz

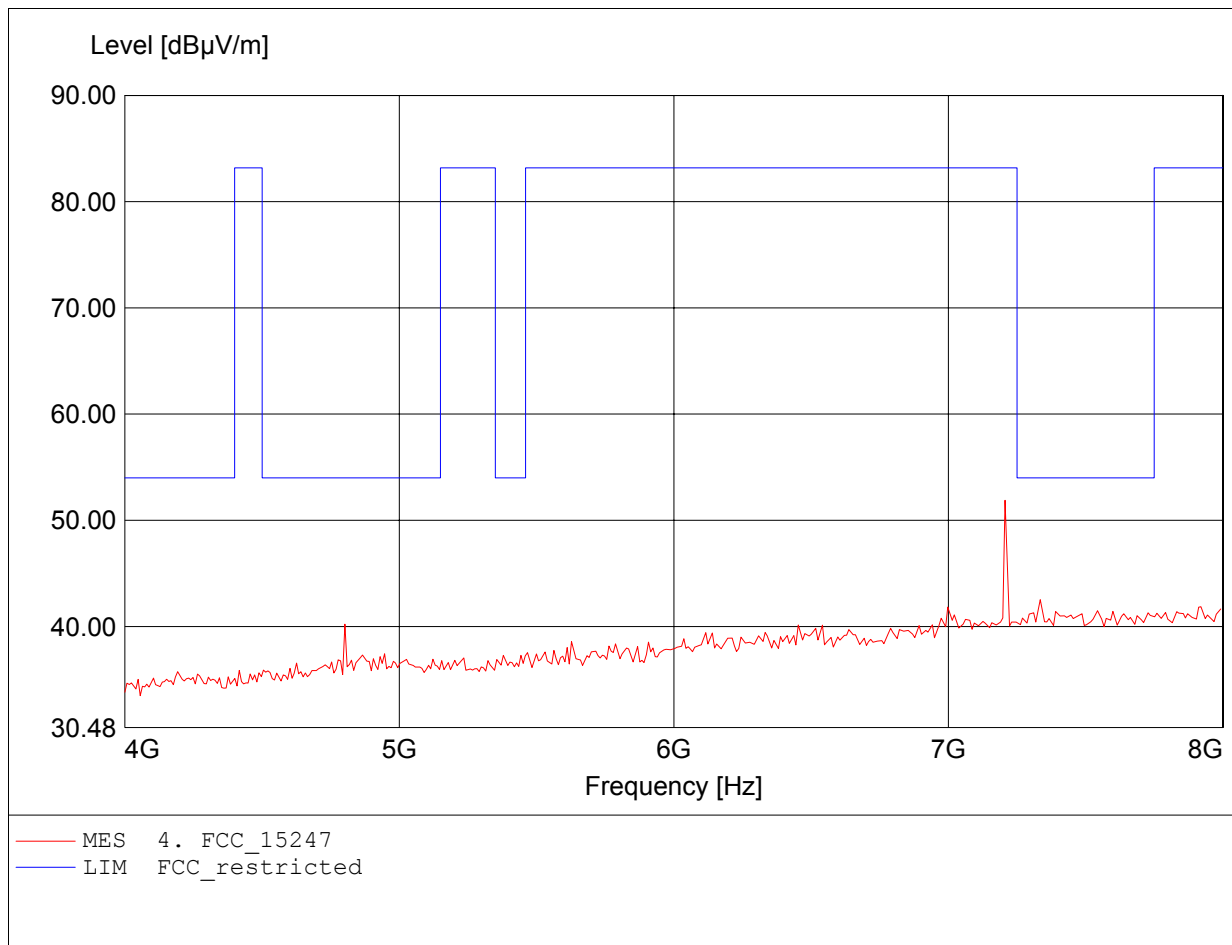


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.611GHz, Emax: 47.18dBµV/m, RBW: 1MHz

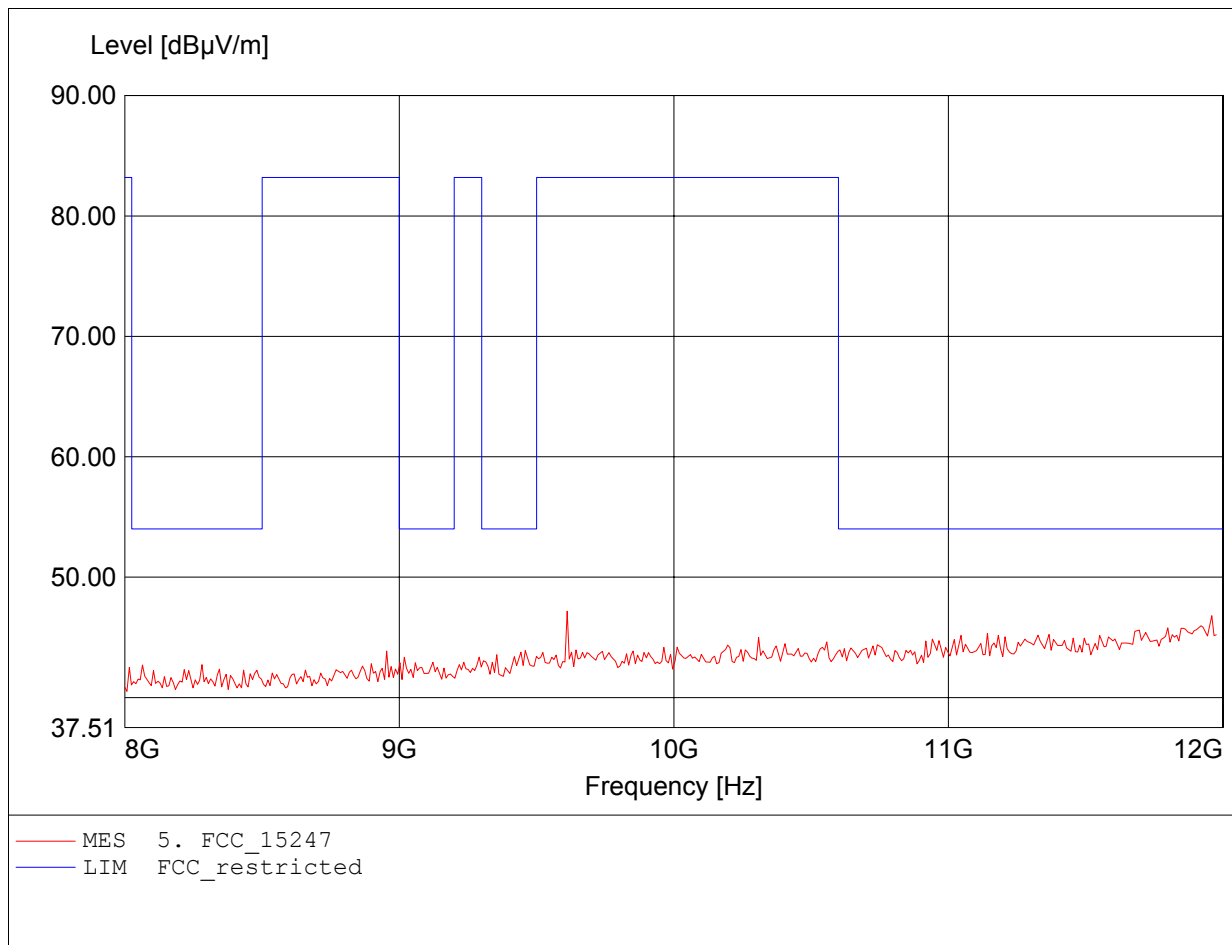


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.611GHz, Emax: 47.89dBμV/m, RBW: 1MHz

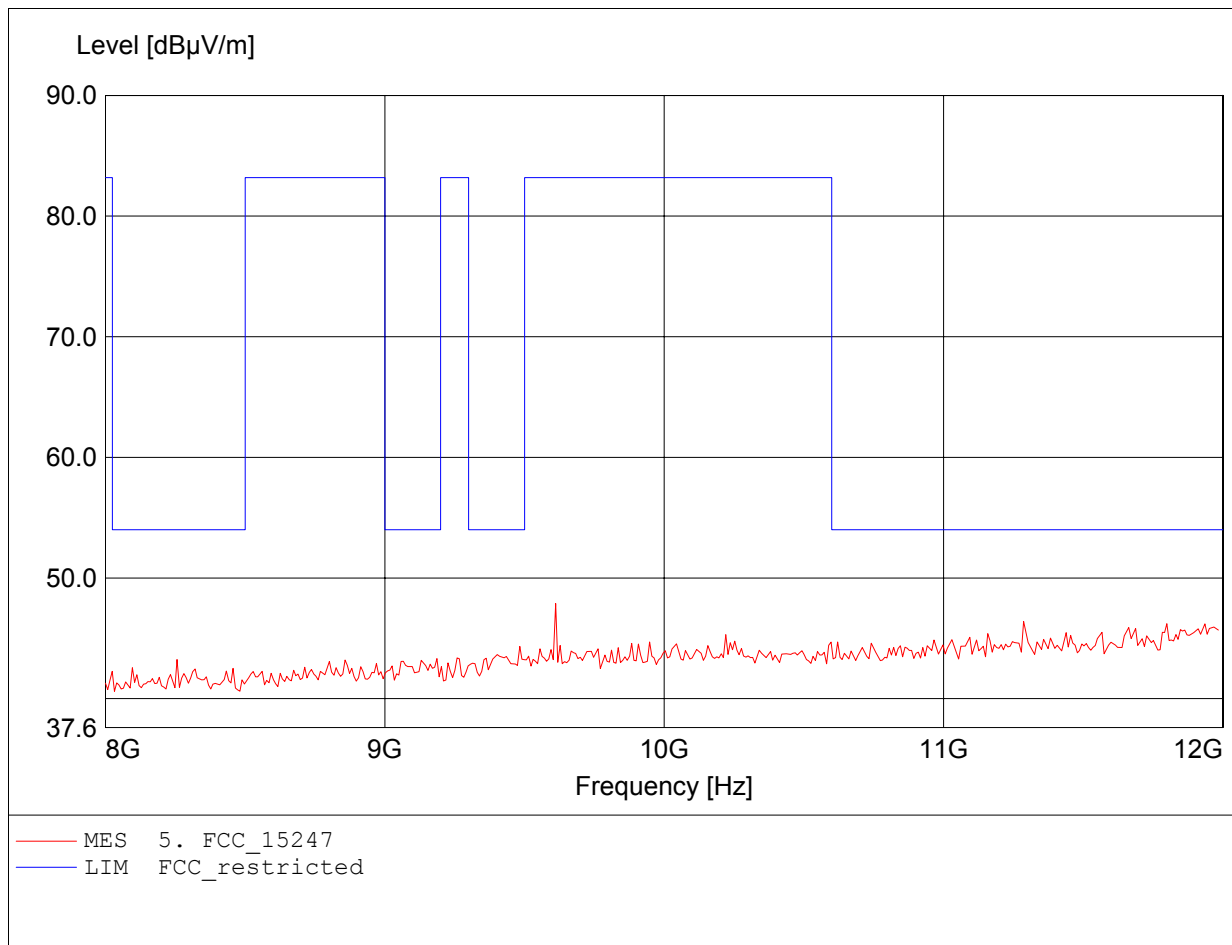


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.790GHz, Emax: 50.31dBµV/m, RBW: 1MHz

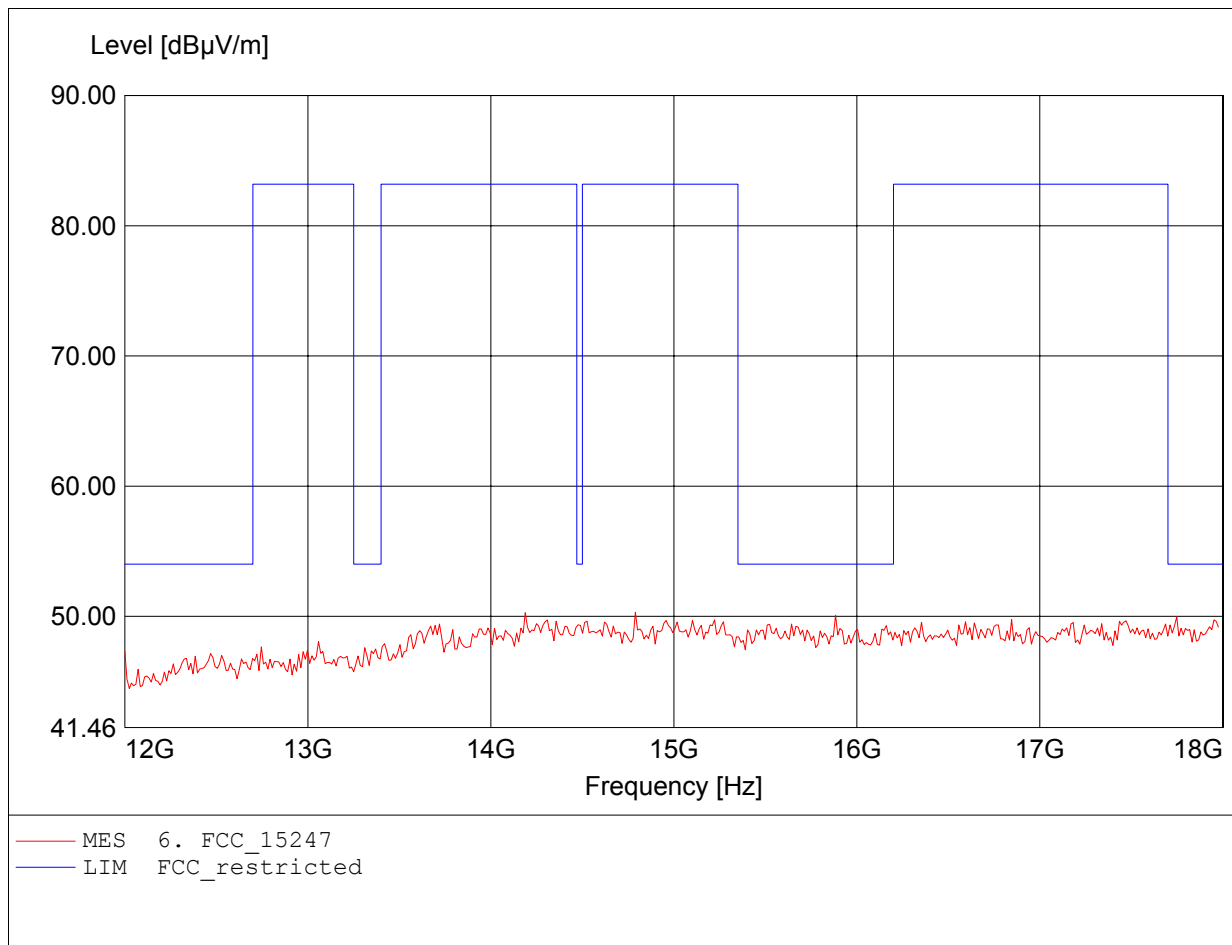


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.307GHz, Emax: 50.77dBµV/m, RBW: 1MHz

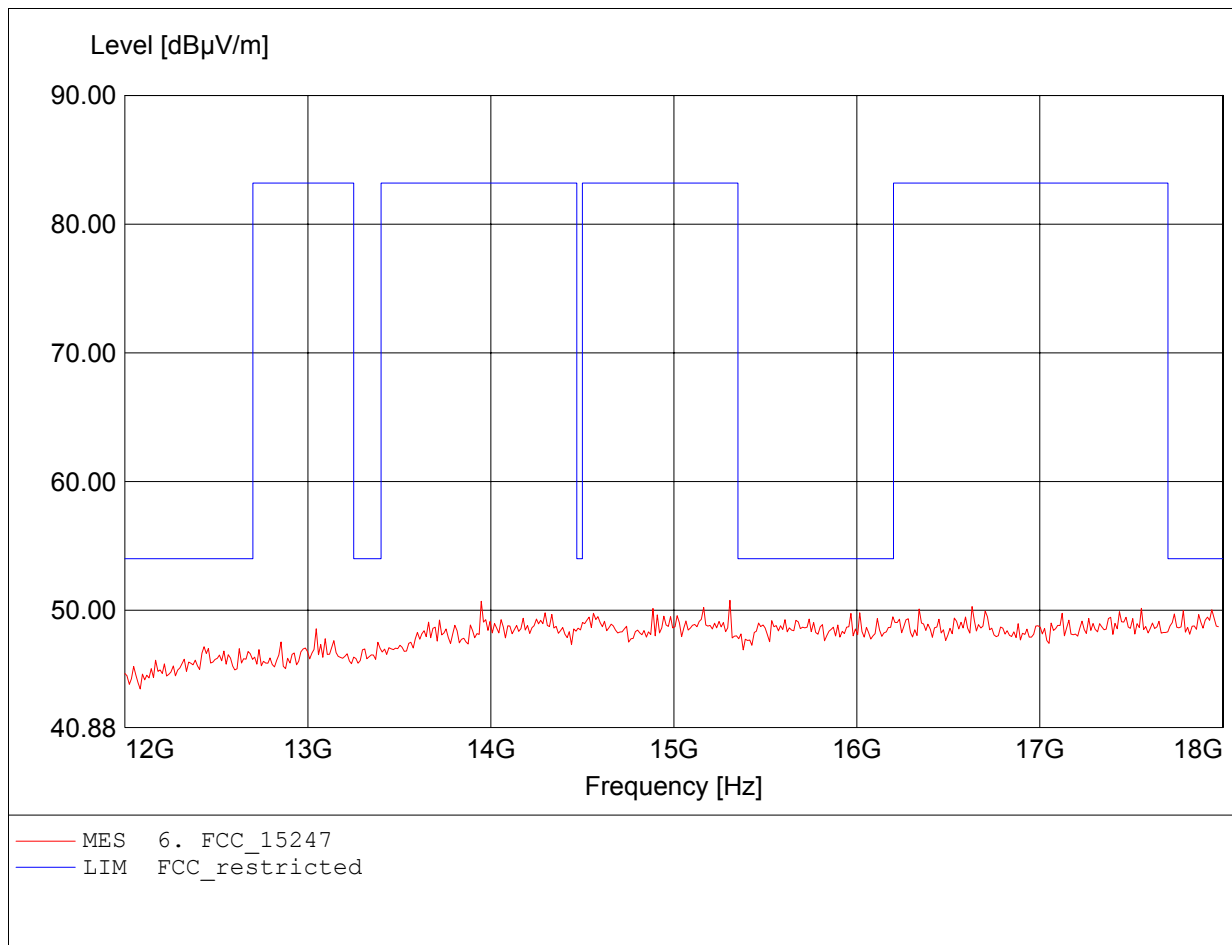


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.159GHz, Emax: 49.46dBµV/m, RBW: 1MHz

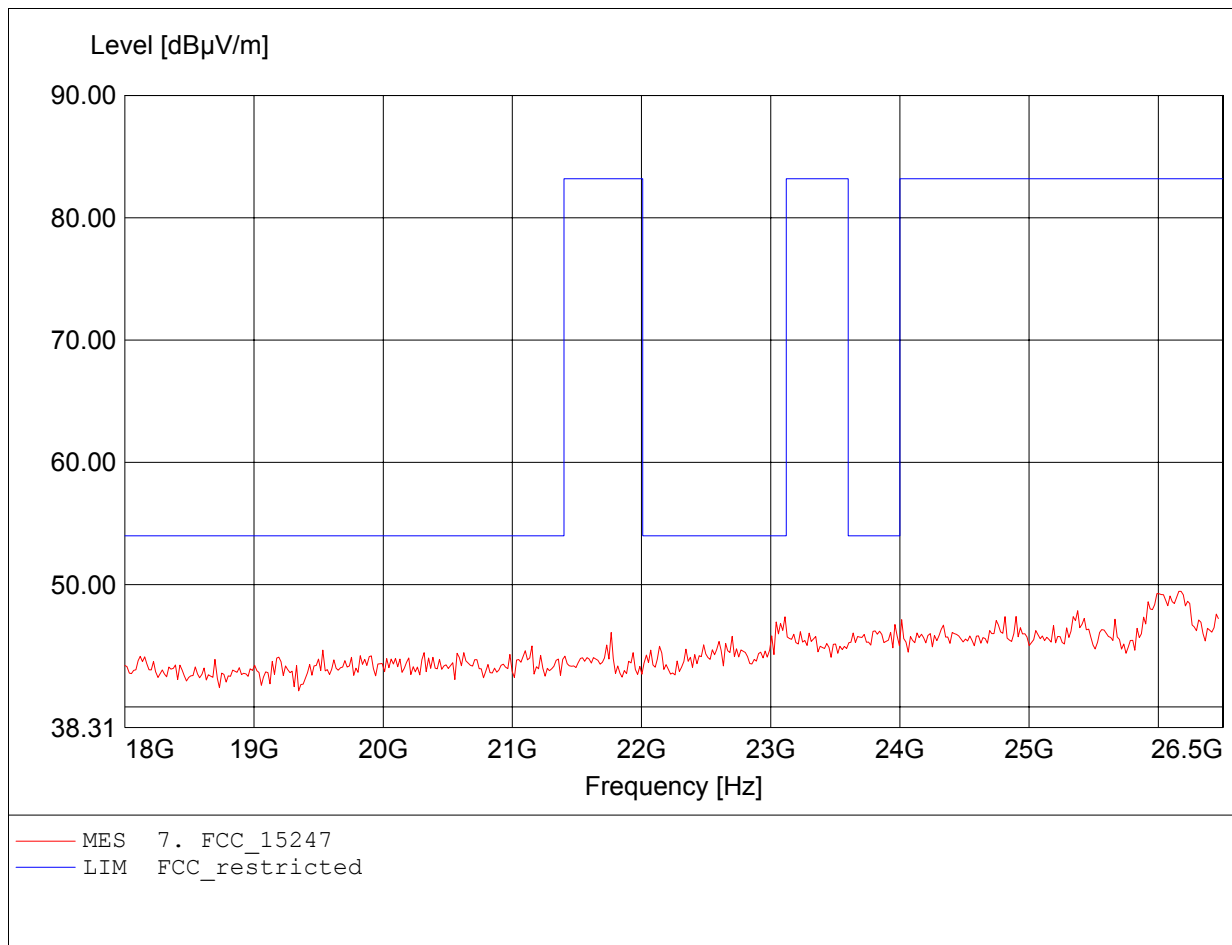


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2402
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.989GHz, Emax: 49.81dBµV/m, RBW: 1MHz

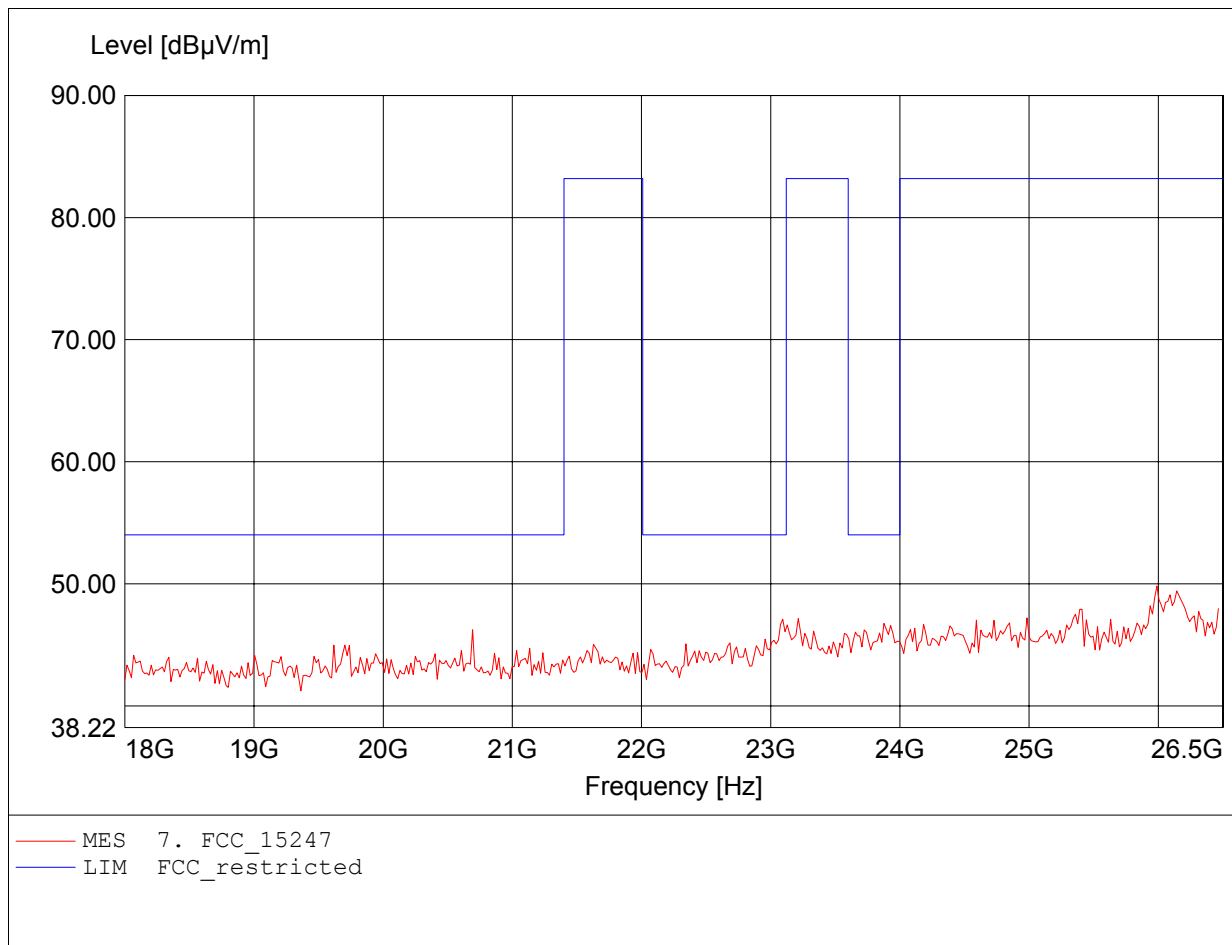


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 188.076MHz, Emax: 31.70dBµV/m, RBW: 100kHz

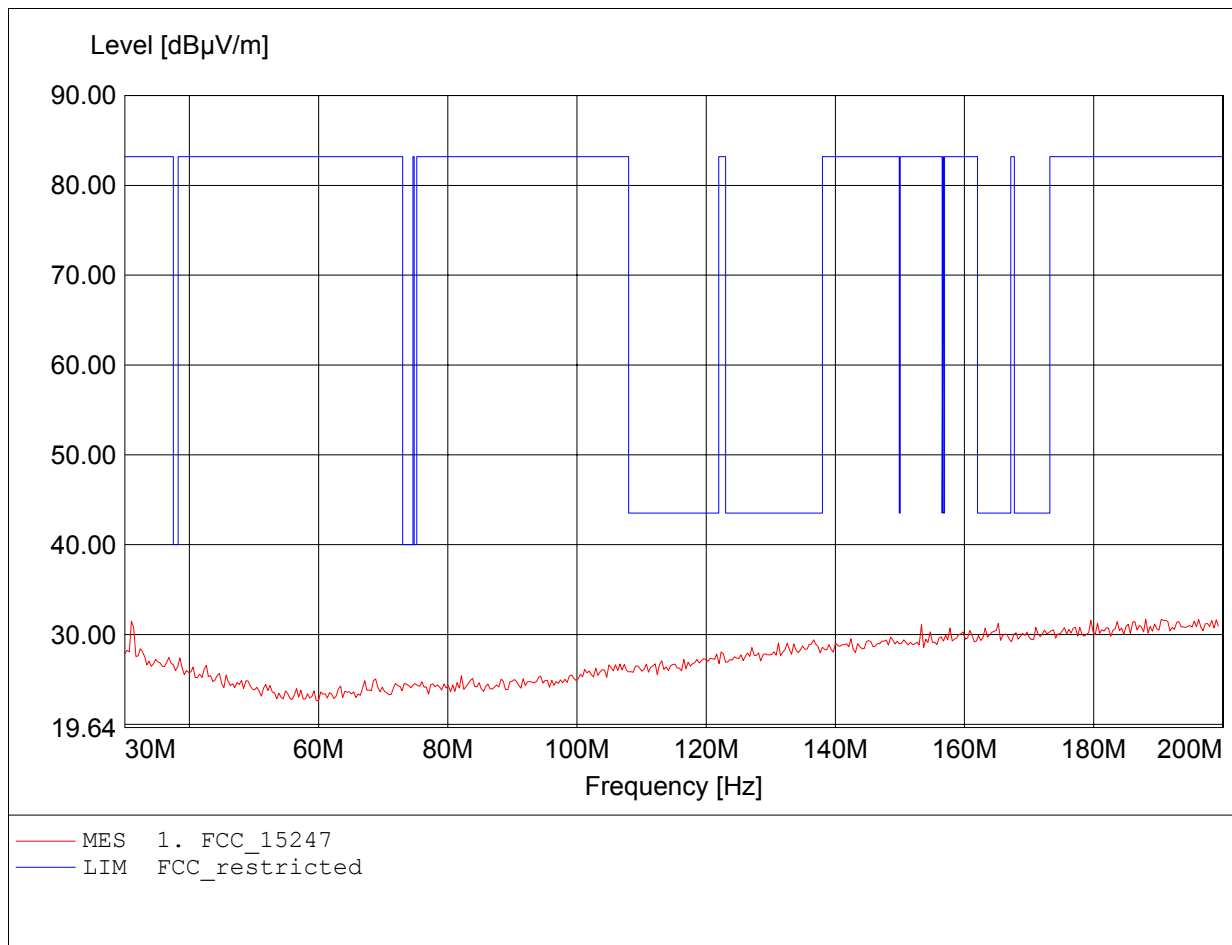


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 32.18dBµV/m, RBW: 100kHz

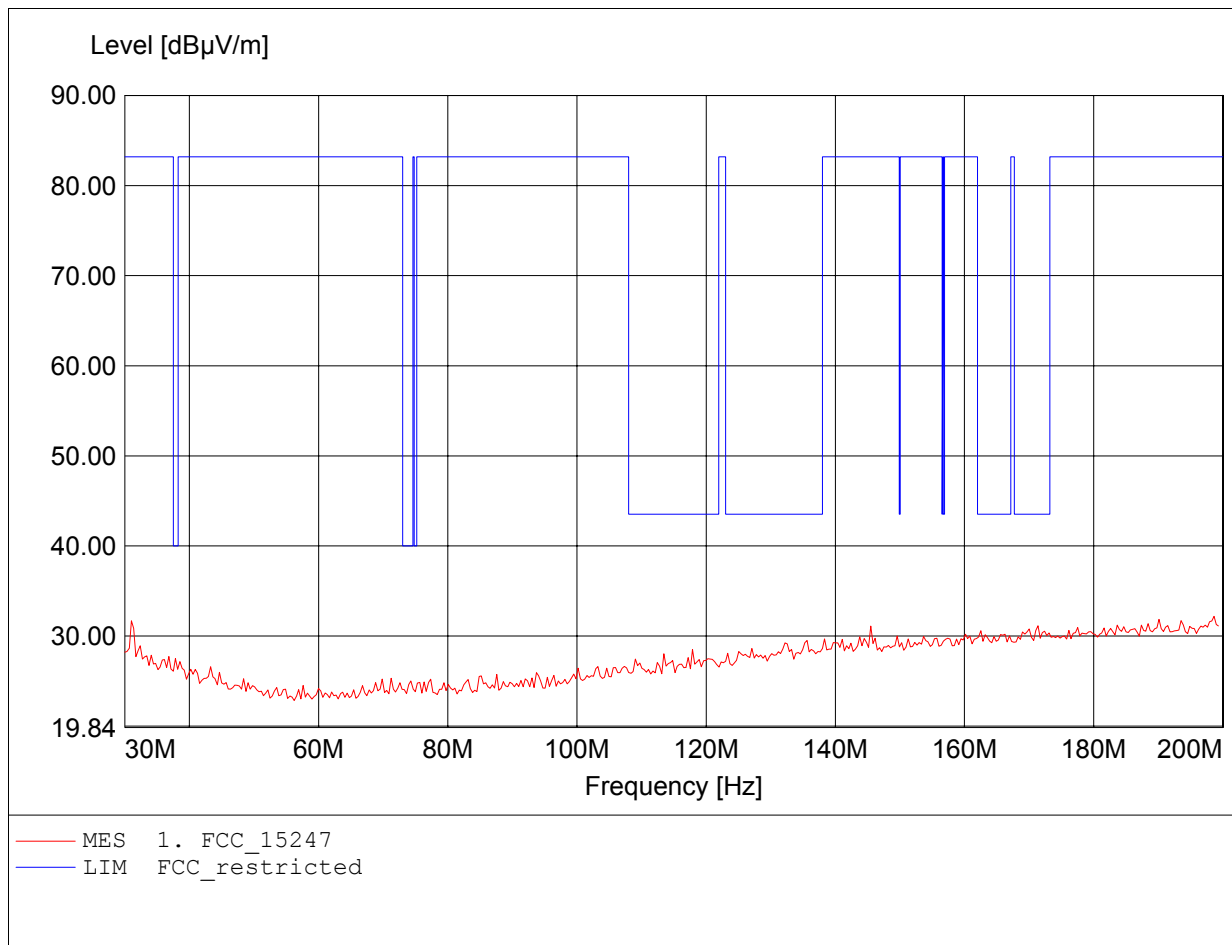


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 982.365MHz, Emax: 23.21dBµV/m, RBW: 100kHz

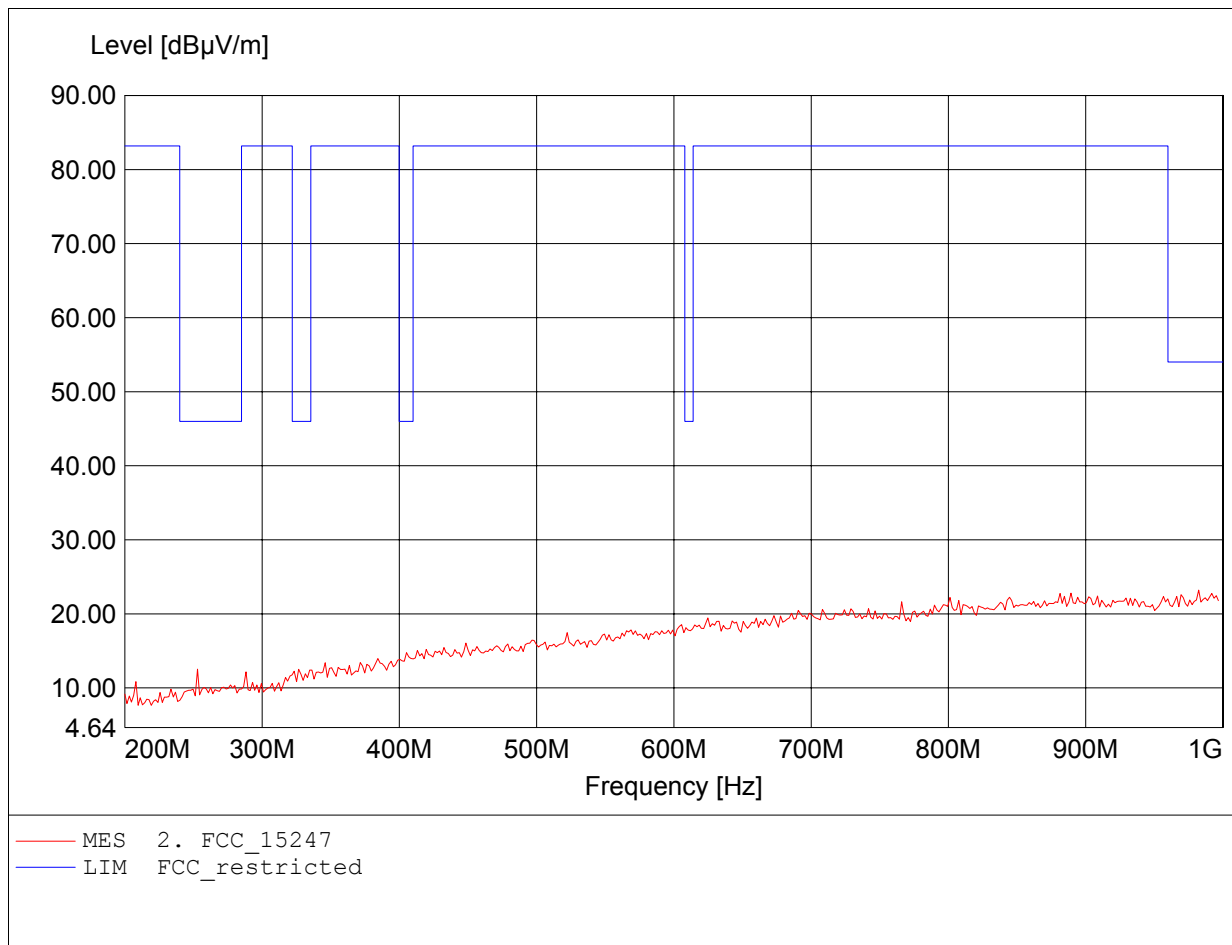


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 982.365MHz, Emax: 23.08dBµV/m, RBW: 100kHz

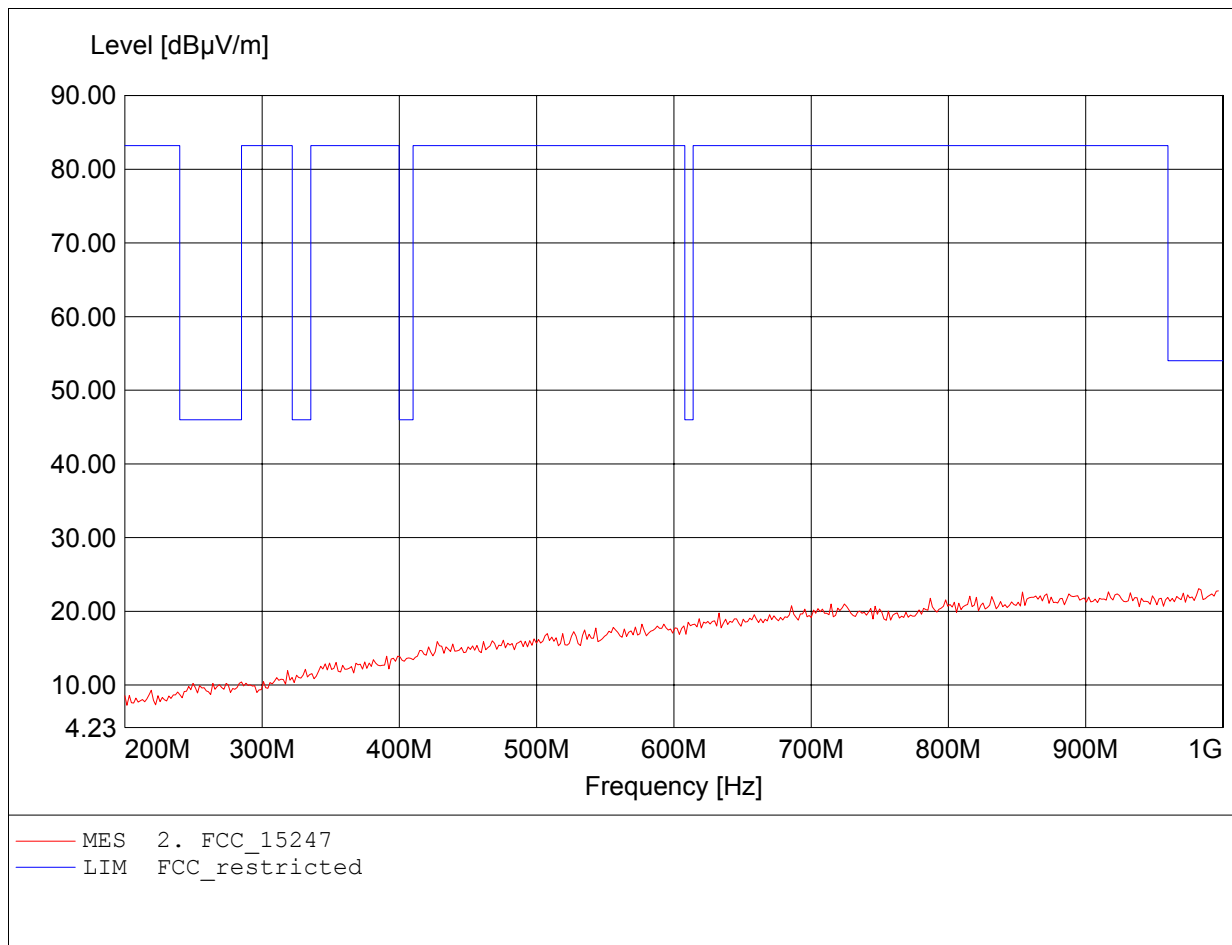


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.967GHz, Emax: 49.79dBµV/m, RBW: 1MHz

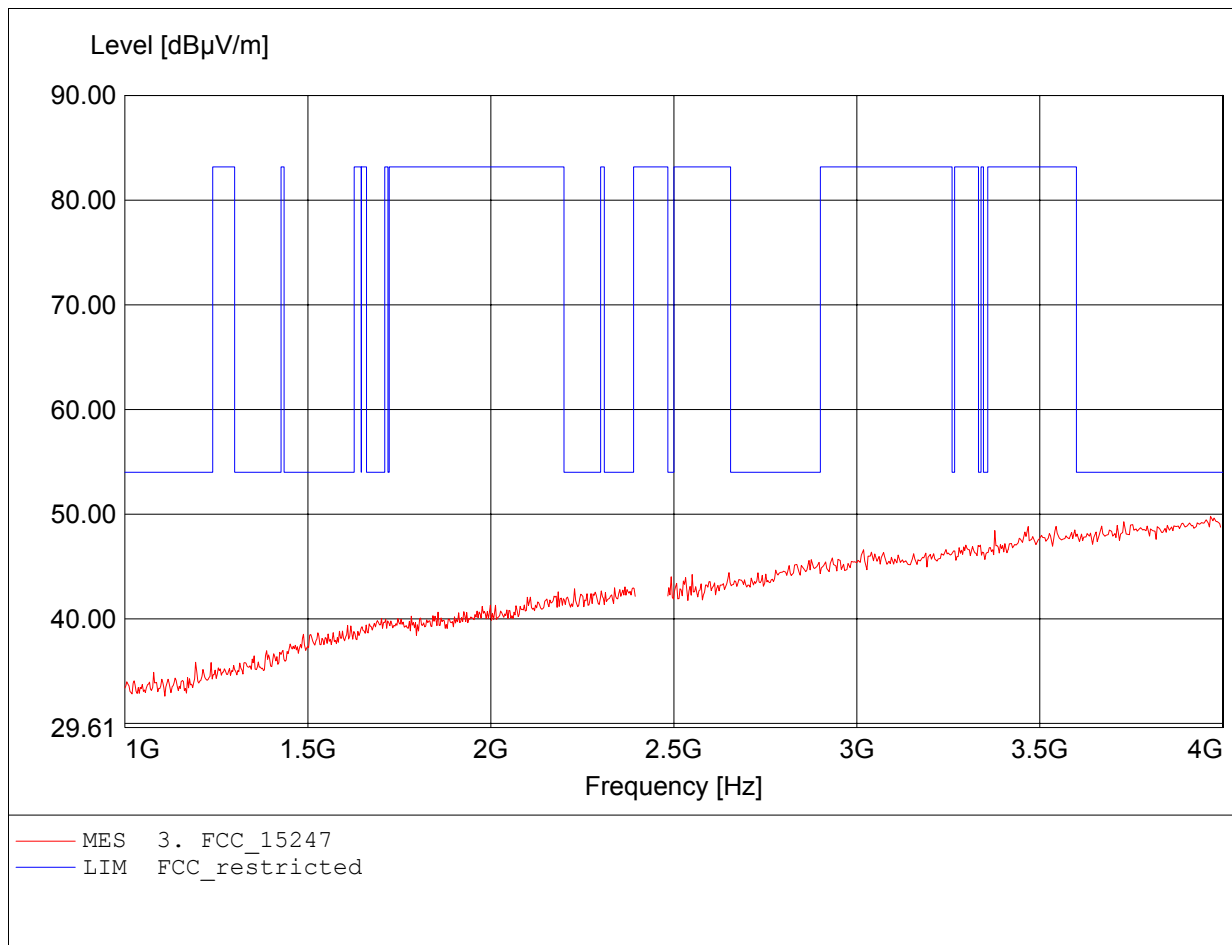


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.970GHz, Emax: 50.24dBµV/m, RBW: 1MHz

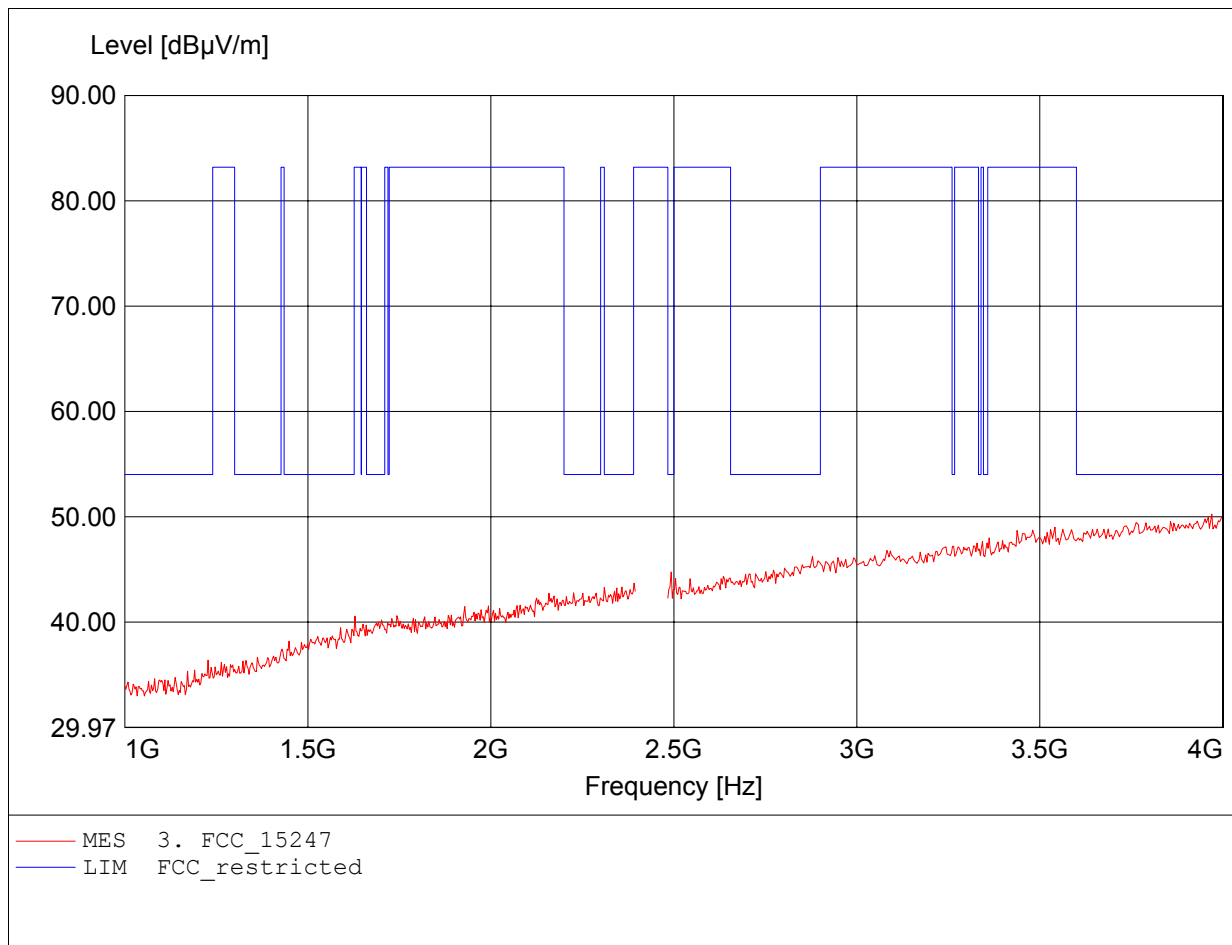


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 52.31dBµV/m, RBW: 1MHz

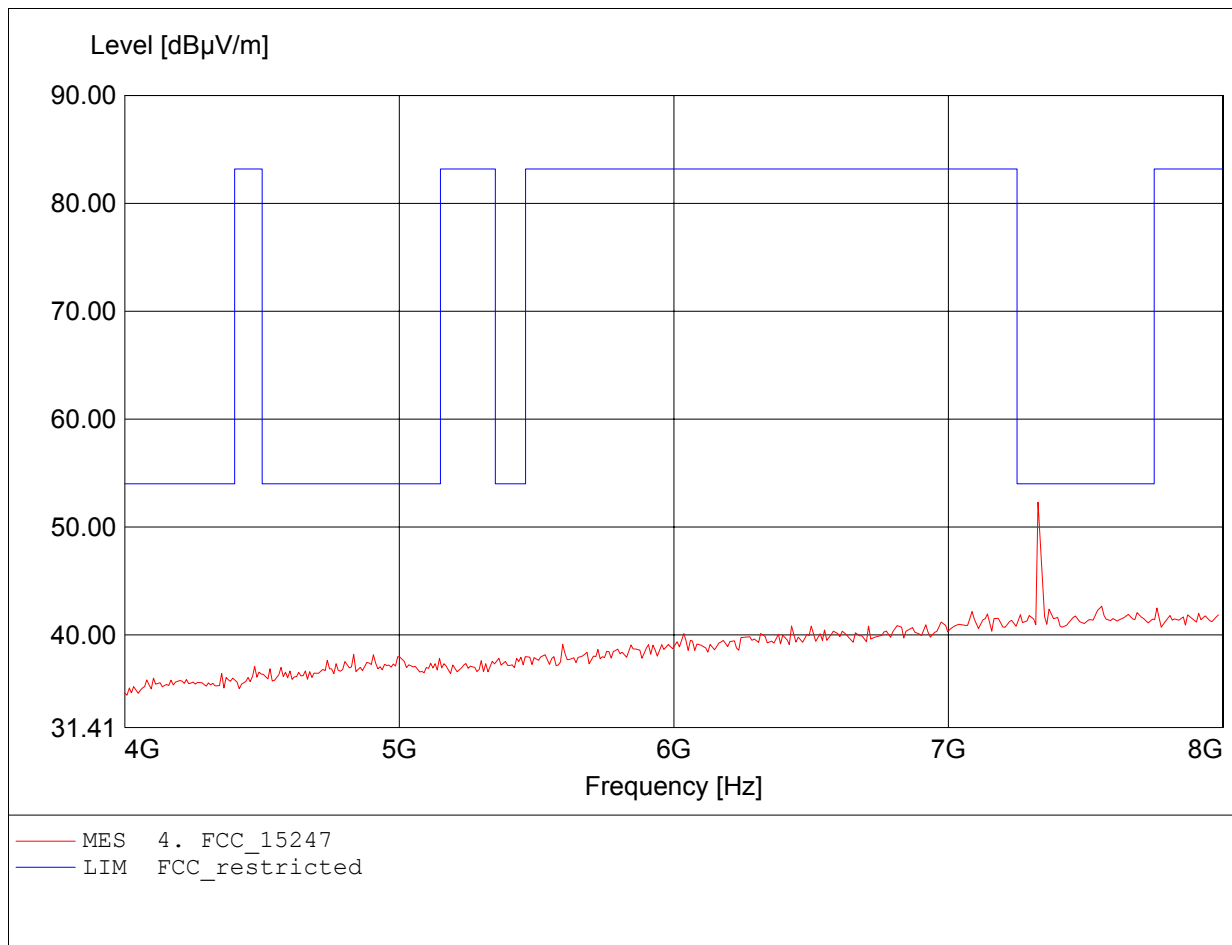


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 52.42dBμV/m, RBW: 1MHz

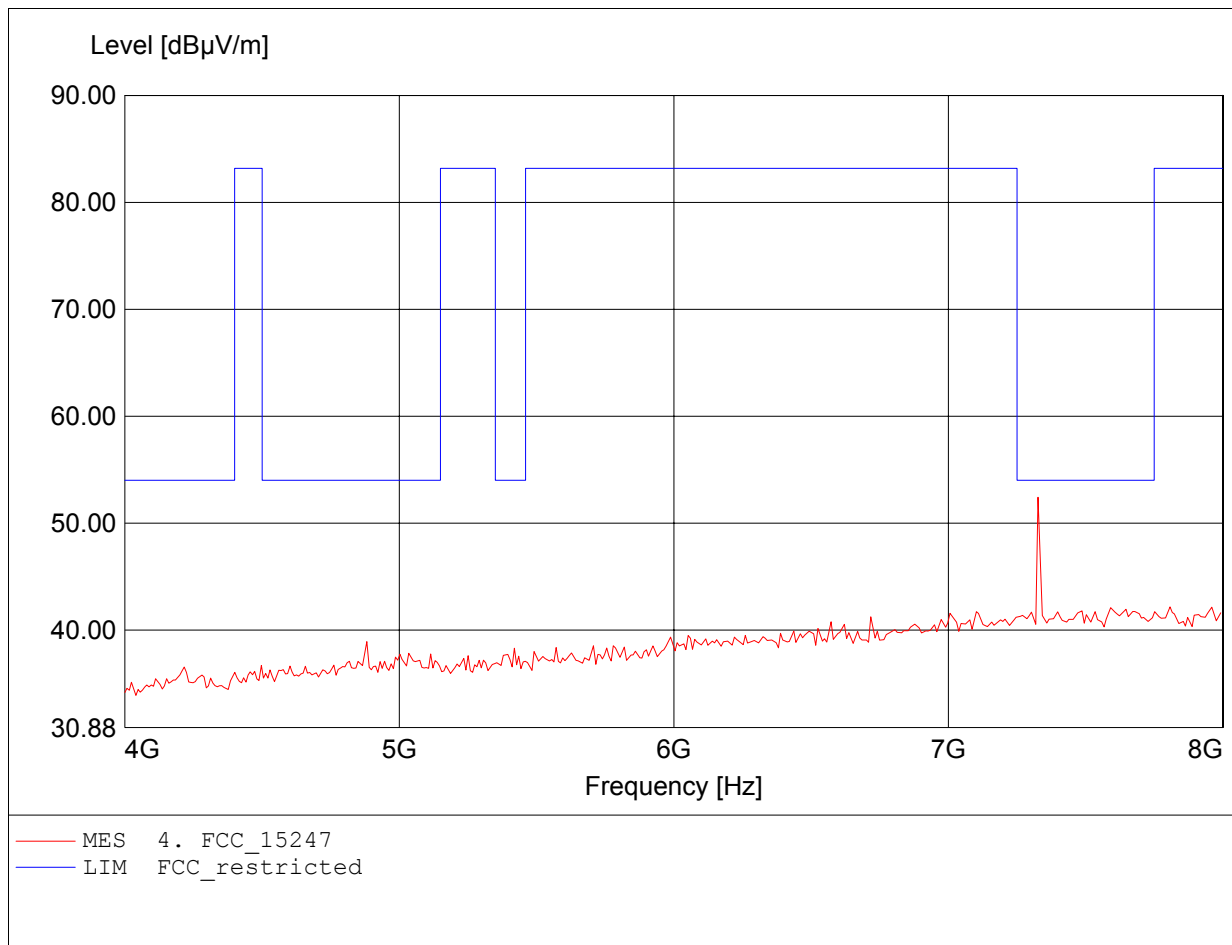


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 47.69dBµV/m, RBW: 1MHz

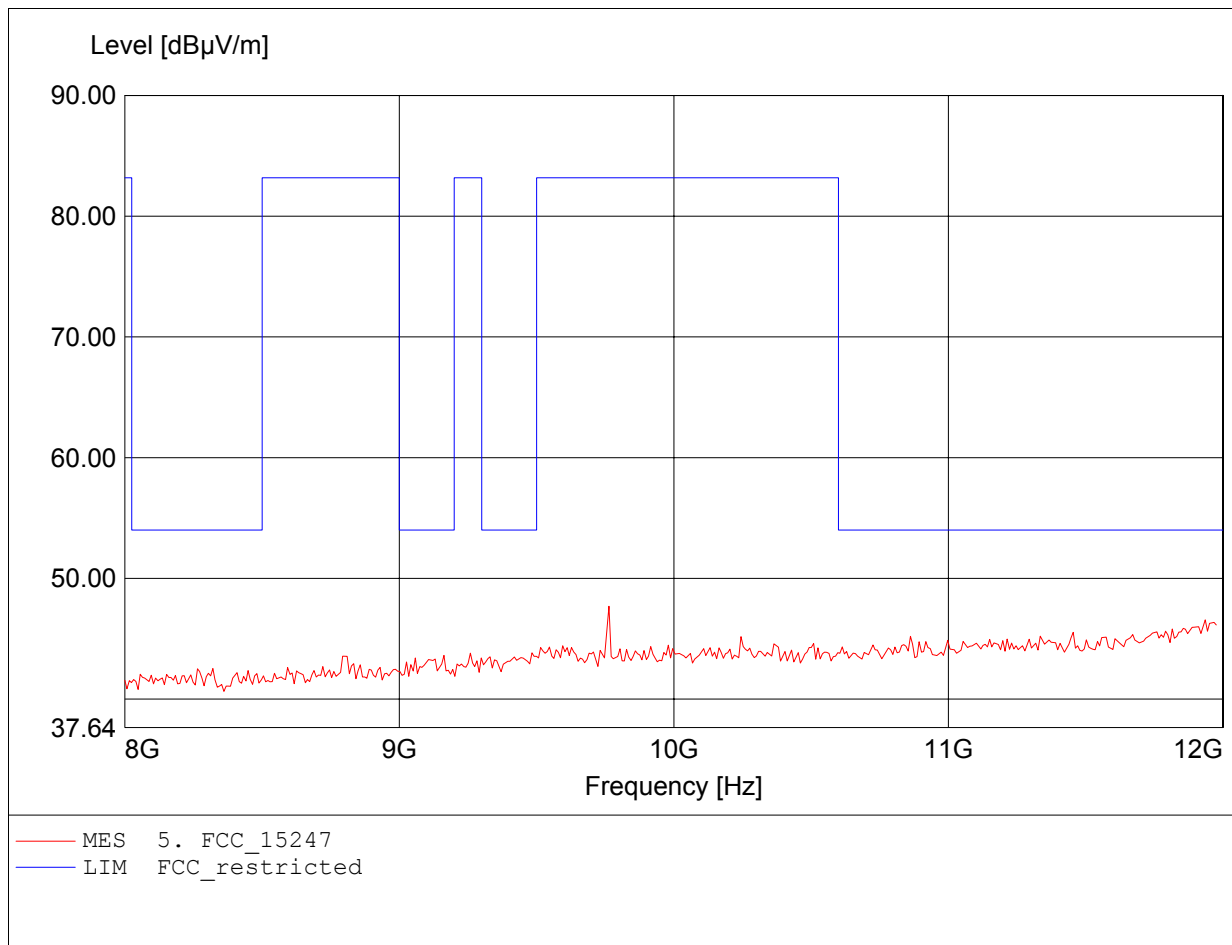


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 11.679GHz, Emax: 47.20dBµV/m, RBW: 1MHz

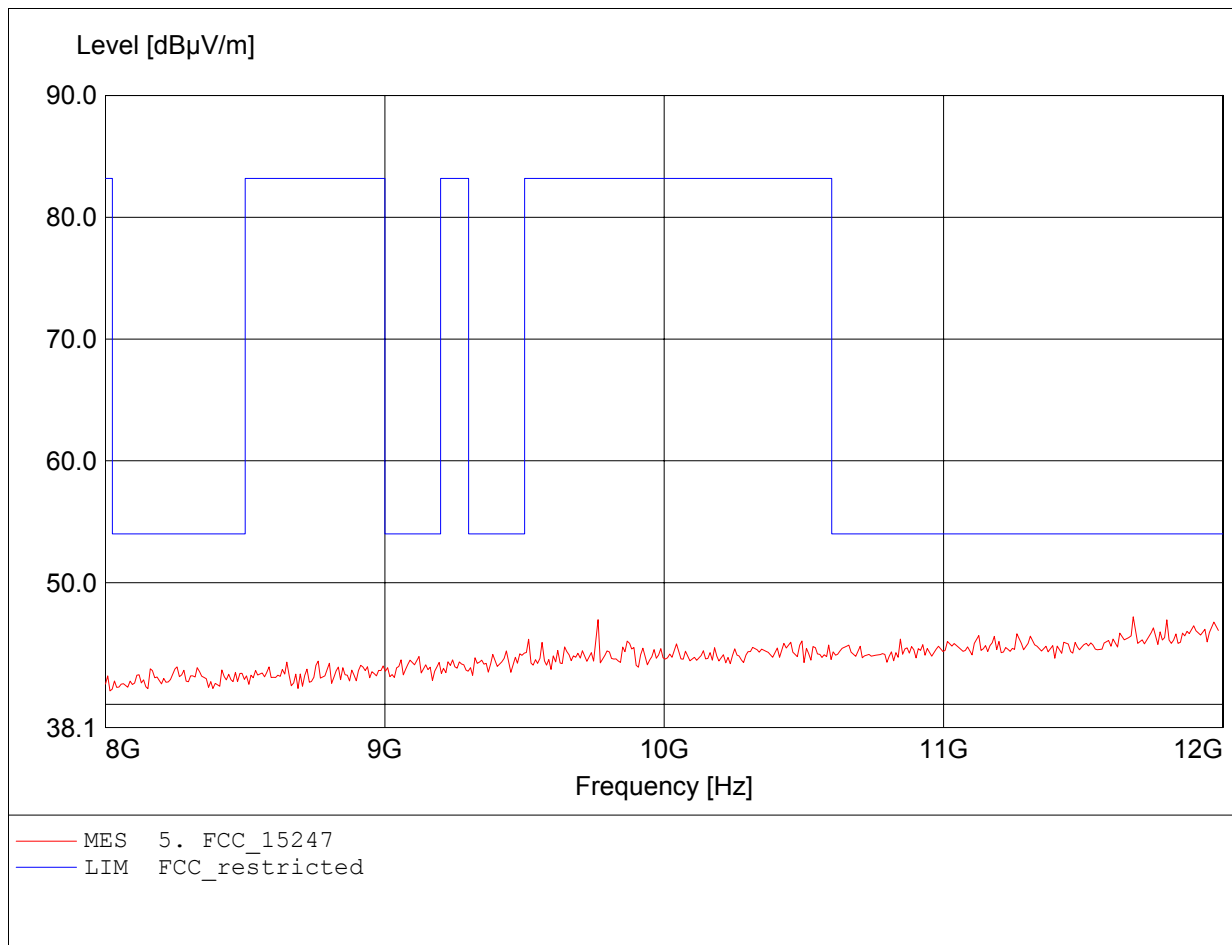


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.186GHz, Emax: 50.63dBµV/m, RBW: 1MHz

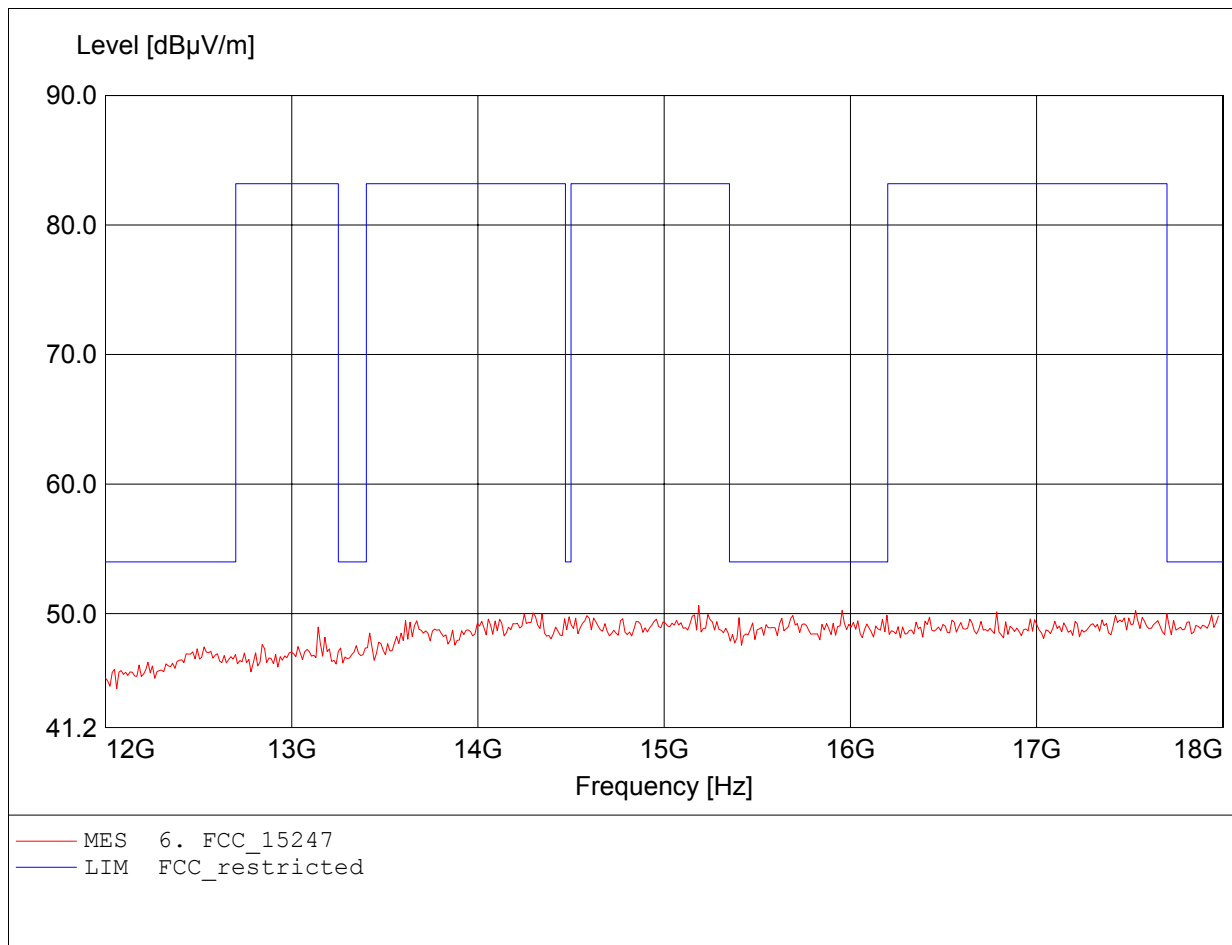


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 14.273GHz, Emax: 50.80dBµV/m, RBW: 1MHz

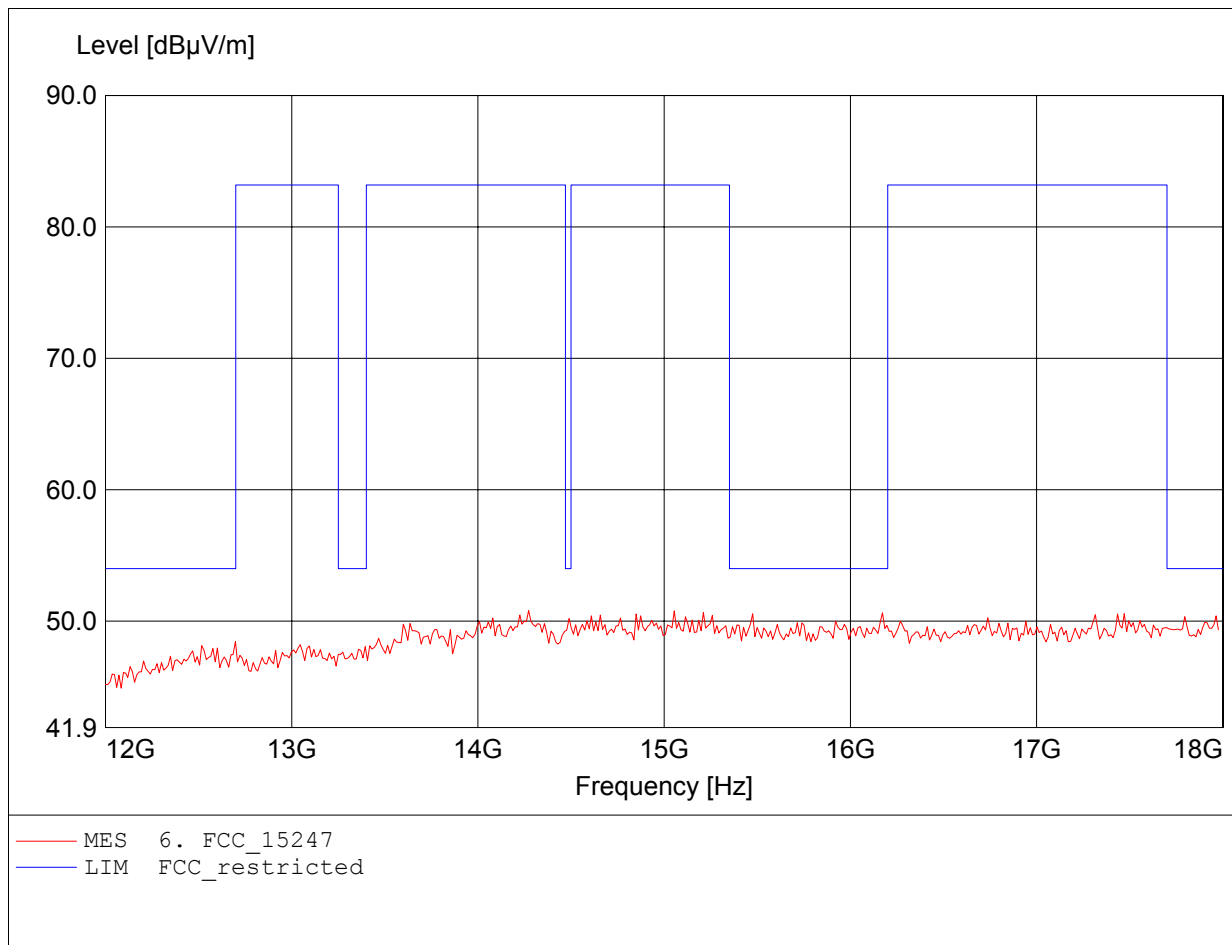


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.125GHz, Emax: 50.78dBµV/m, RBW: 1MHz

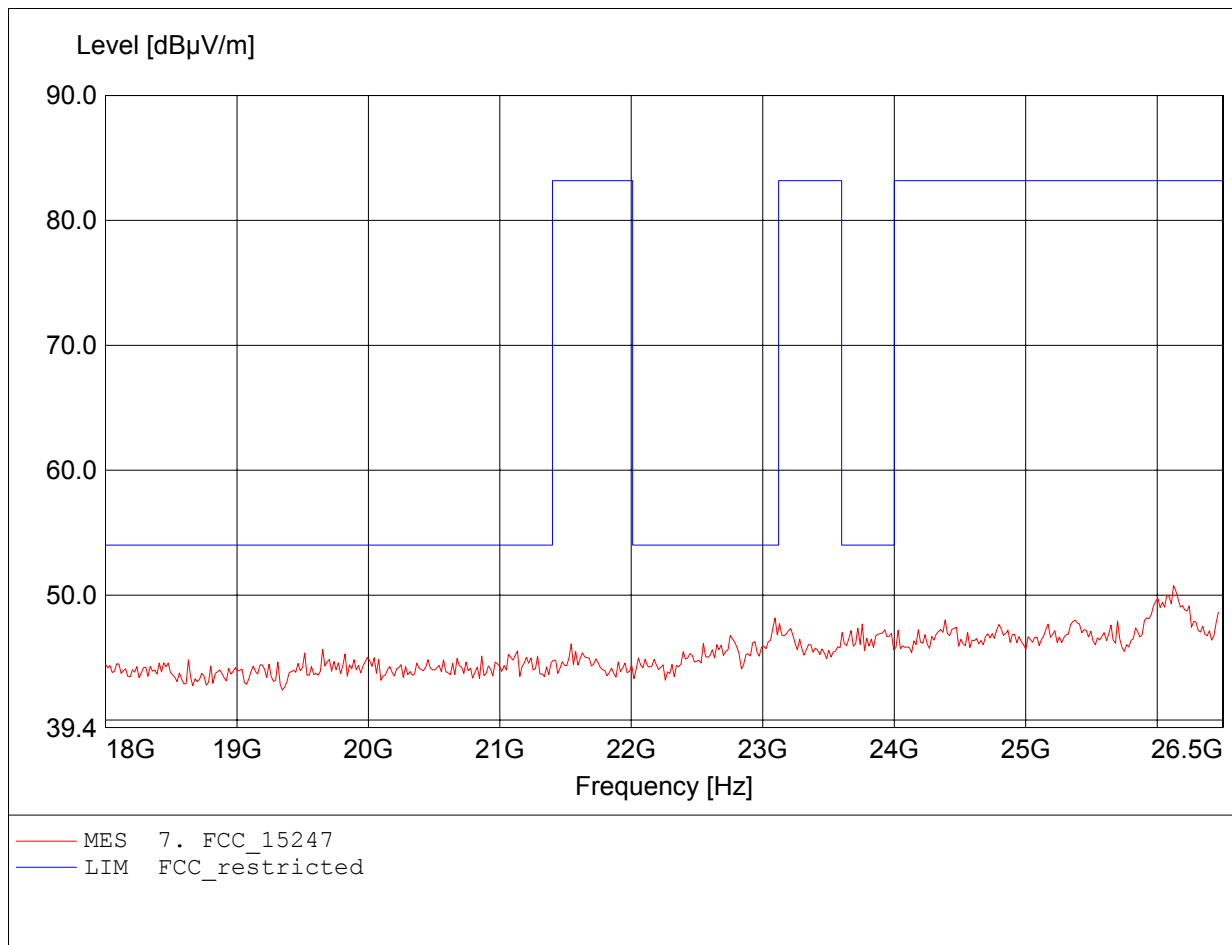


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2441
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.040GHz, Emax: 50.08dBµV/m, RBW: 1MHz

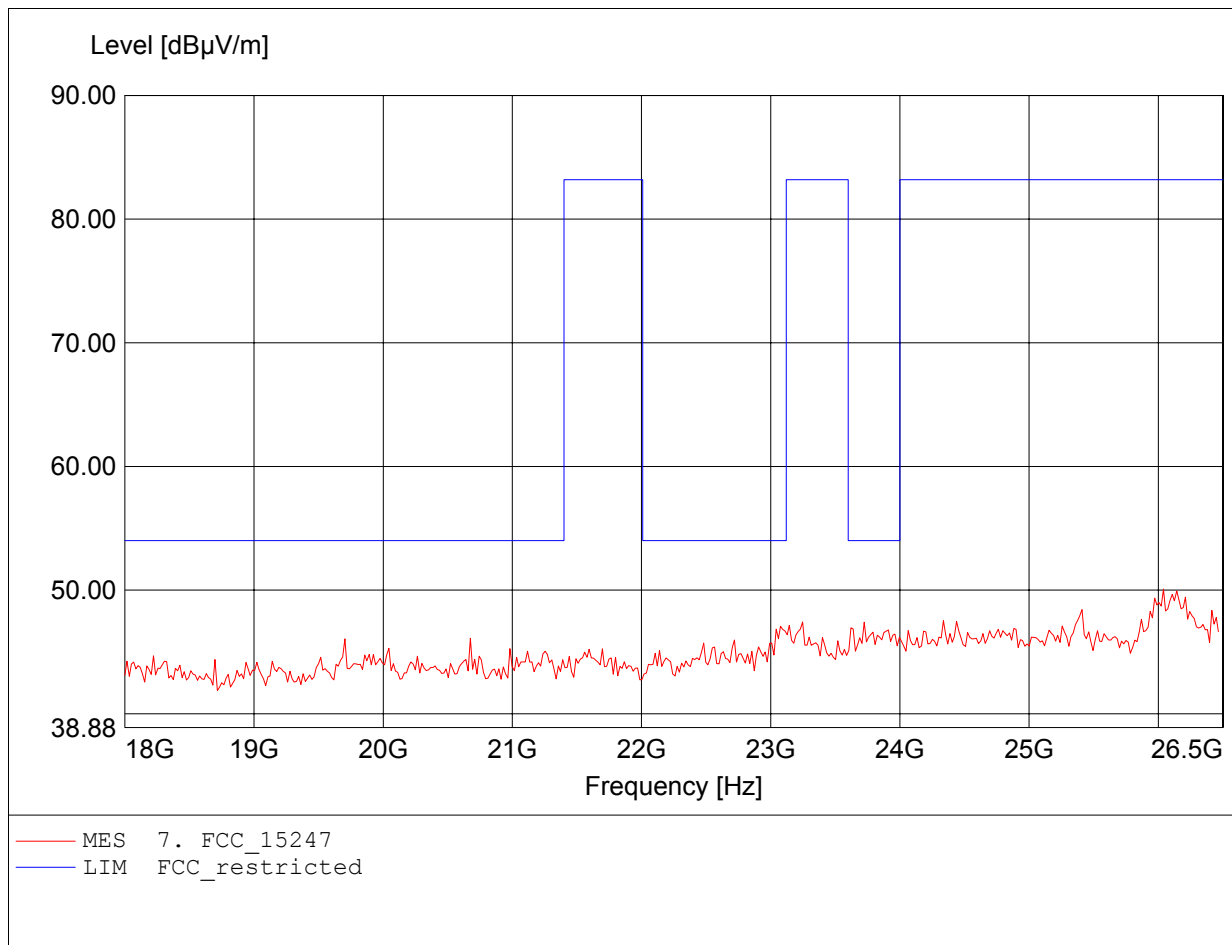


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Emax: 32.41dBµV/m, RBW: 100kHz

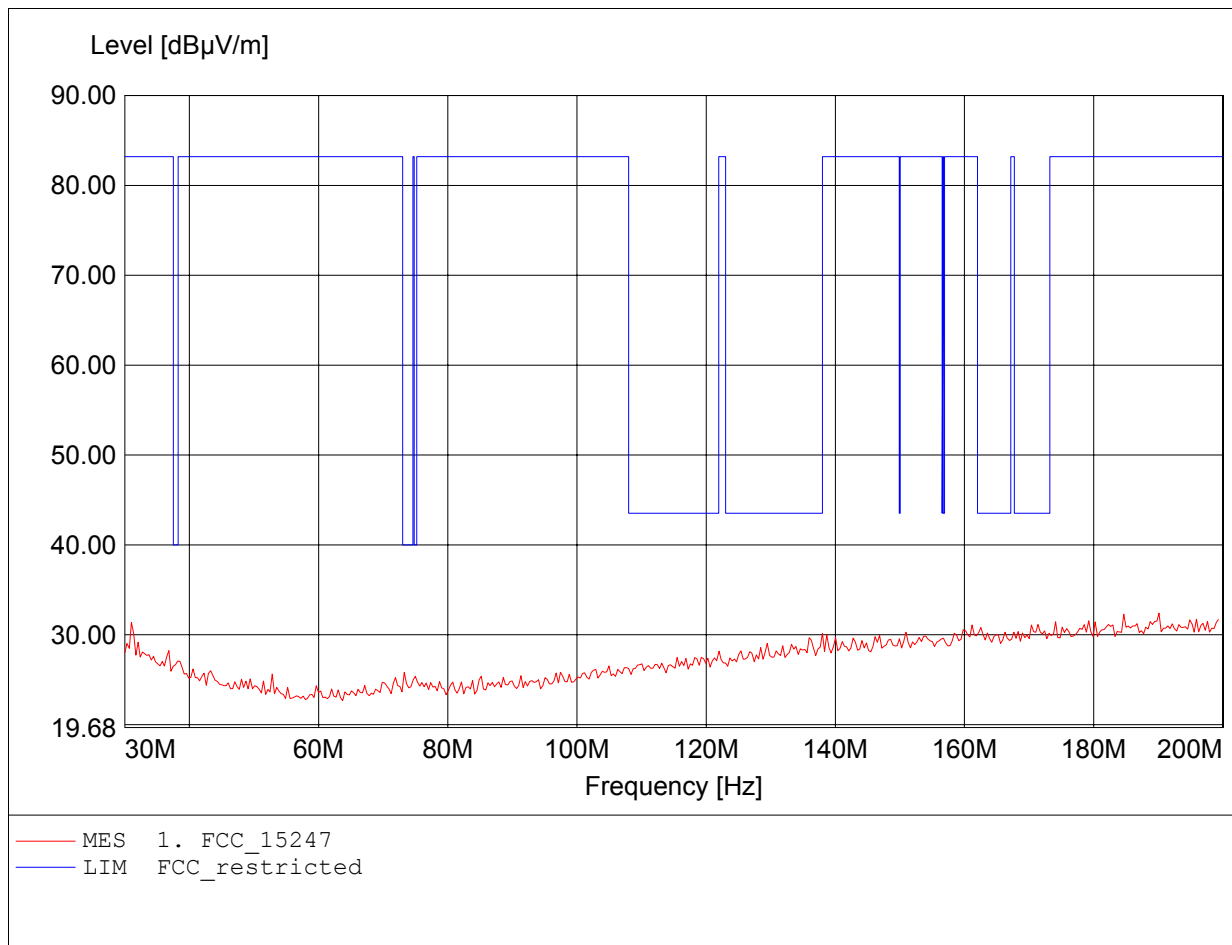


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 32.46dBµV/m, RBW: 100kHz

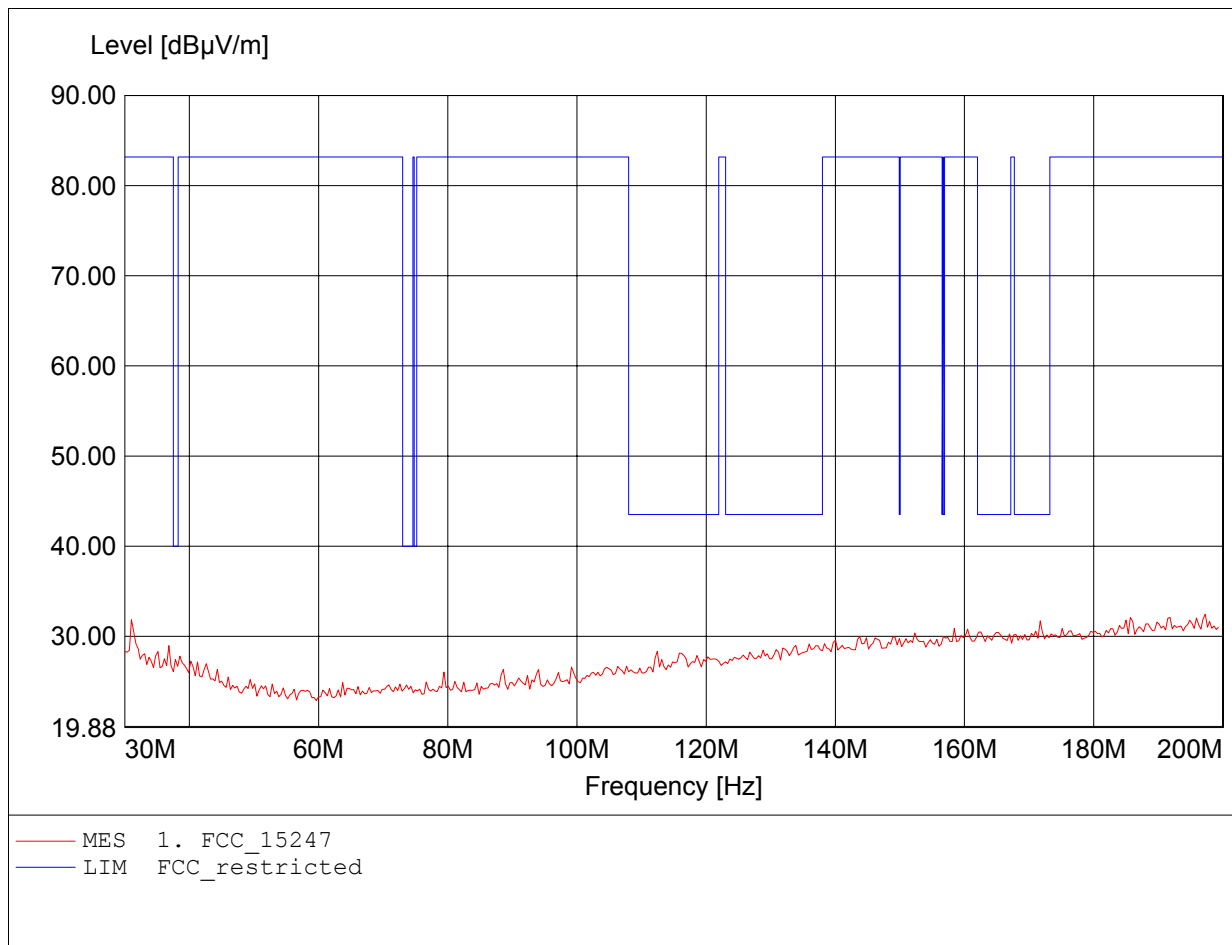


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 23.22dBµV/m, RBW: 100kHz

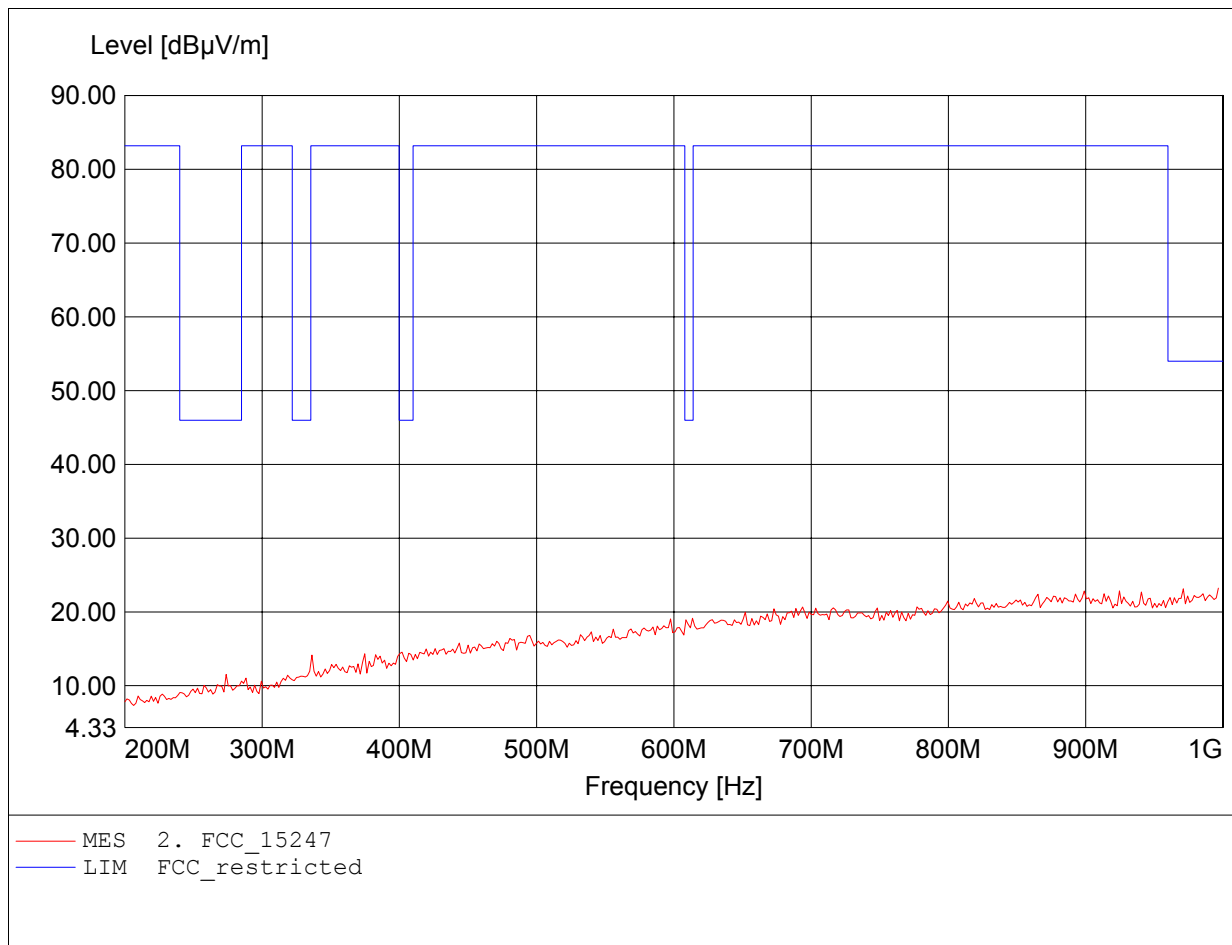


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 23.55dBµV/m, RBW: 100kHz

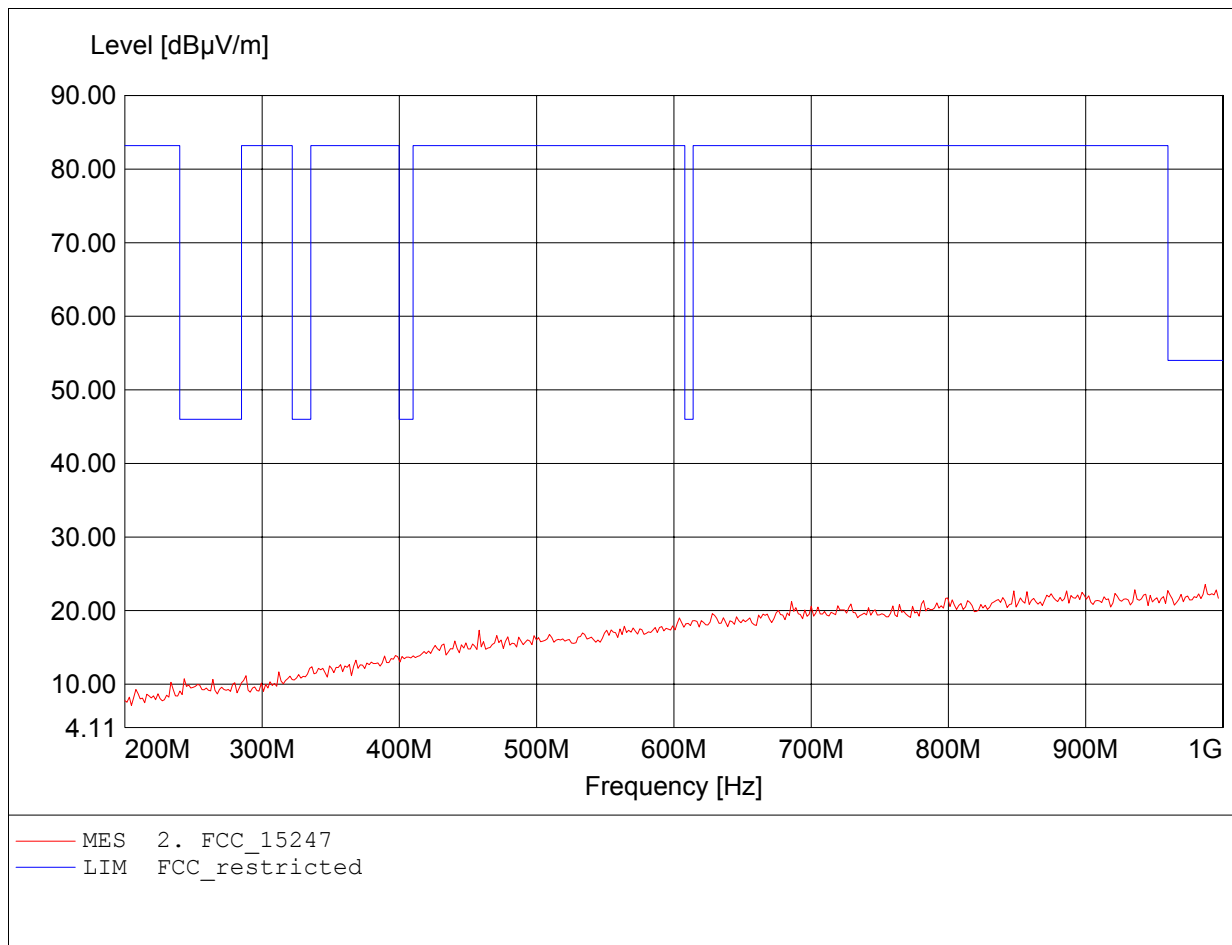


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 3.903GHz, Emax: 50.46dBμV/m, RBW: 1MHz

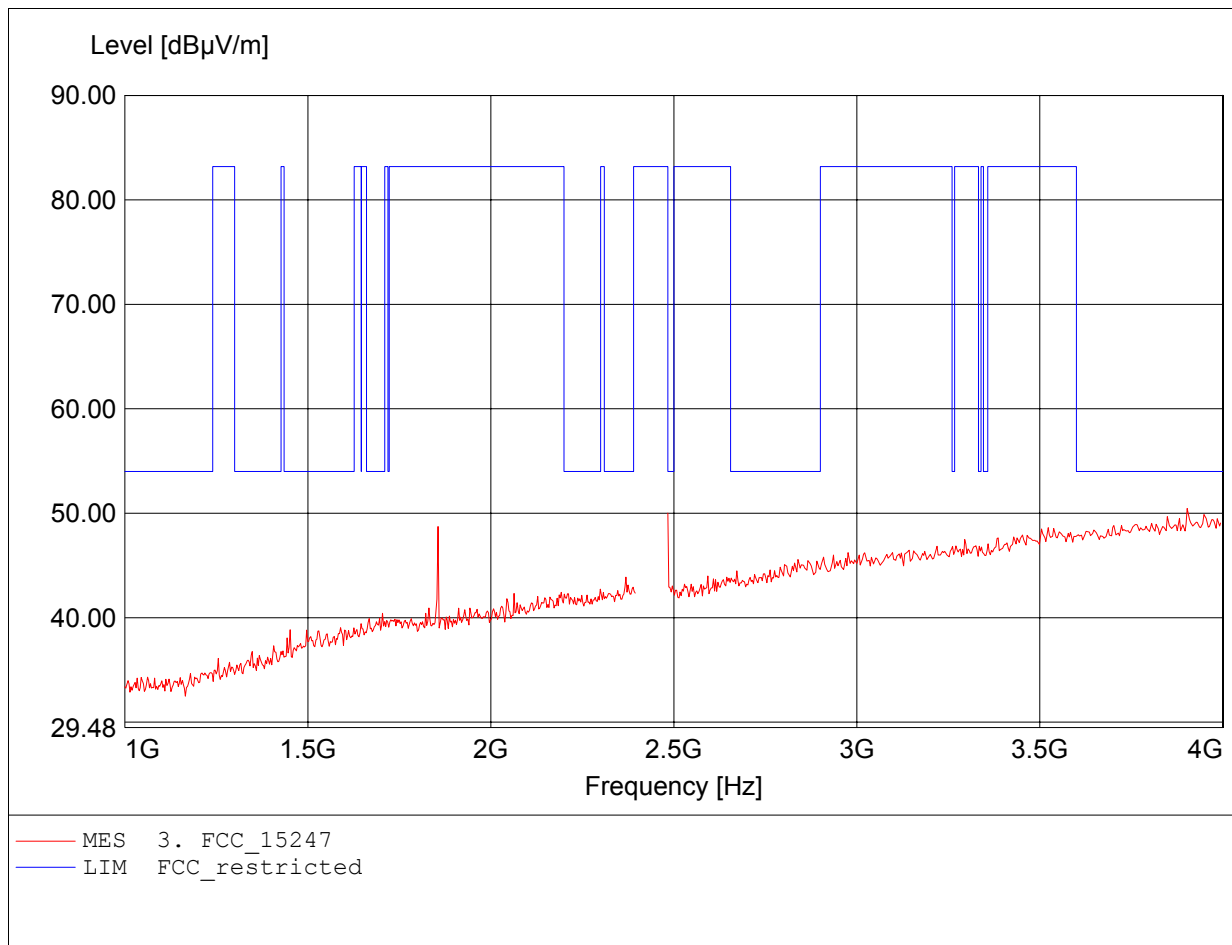


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 2.484GHz, Emax: 52.89dBµV/m, RBW: 1MHz

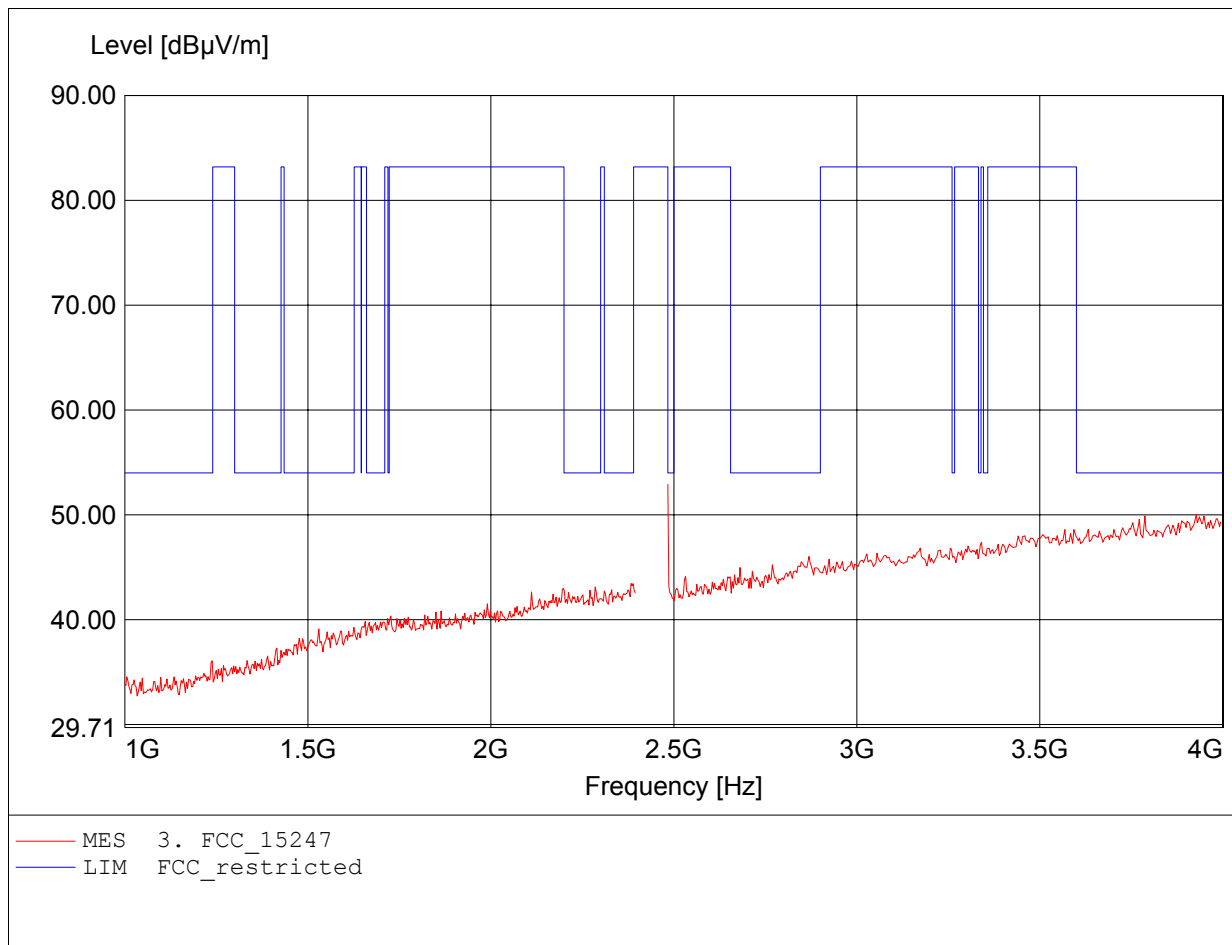


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 48.95dBµV/m, RBW: 1MHz

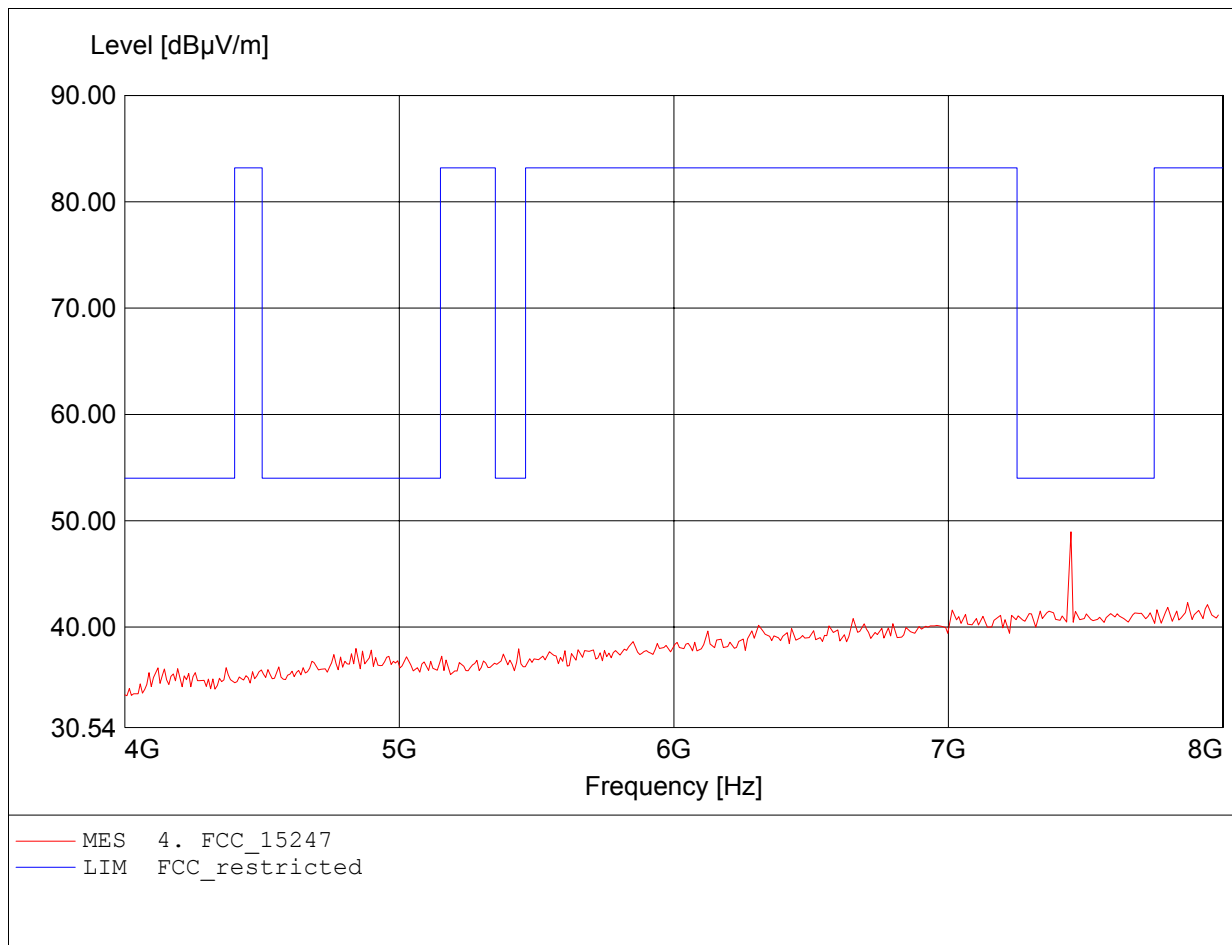


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 49.53dBµV/m, RBW: 1MHz

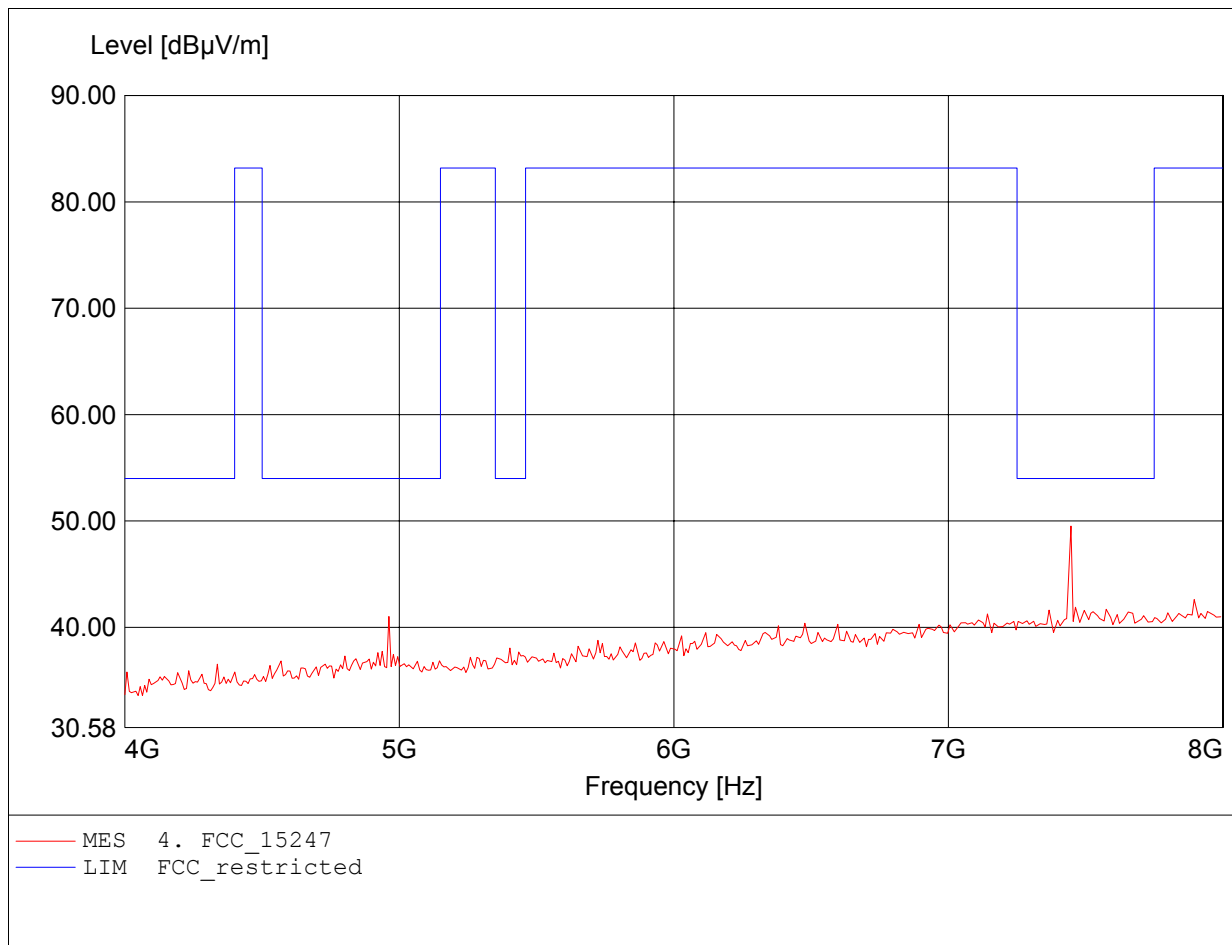


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 51.13dBμV/m, RBW: 1MHz

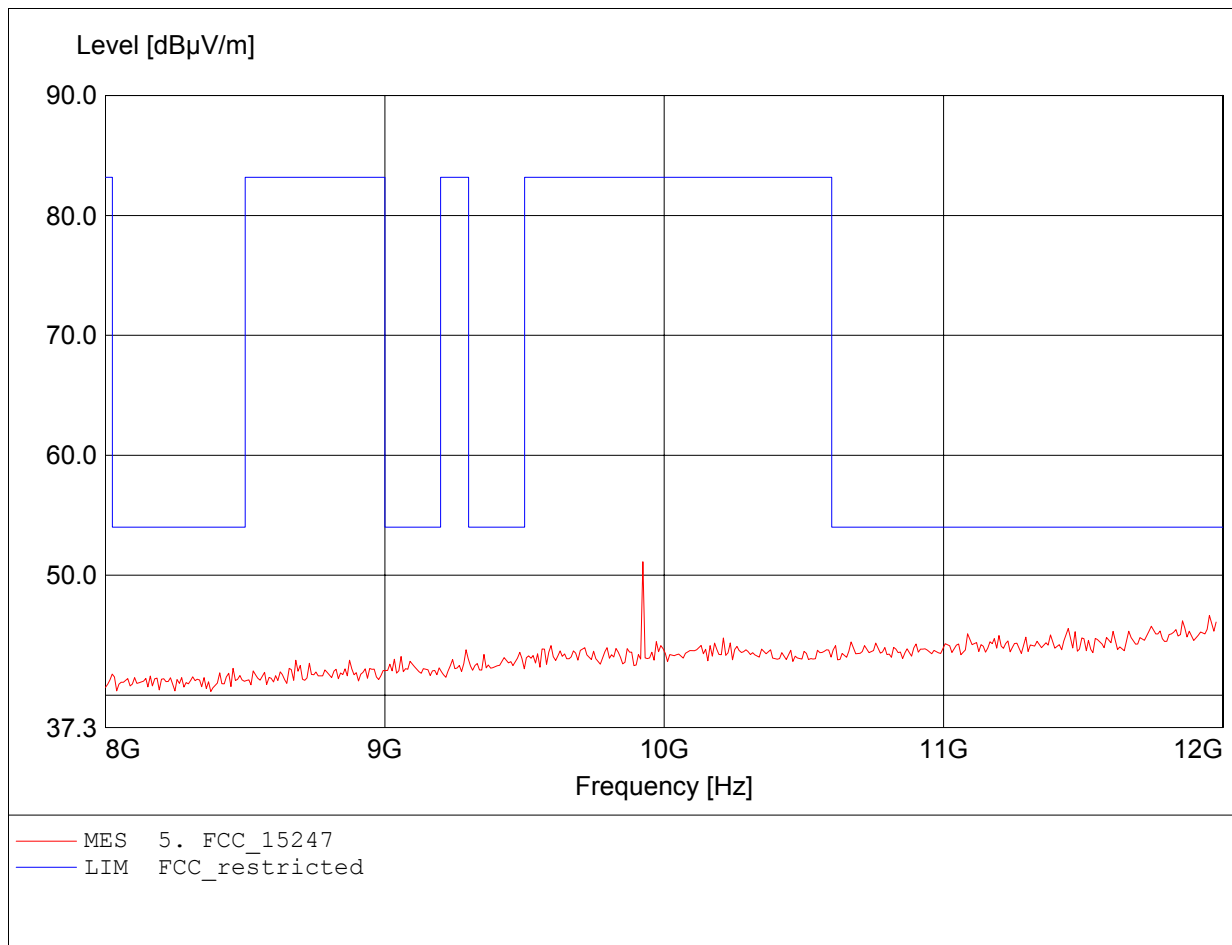


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 50.60dBµV/m, RBW: 1MHz

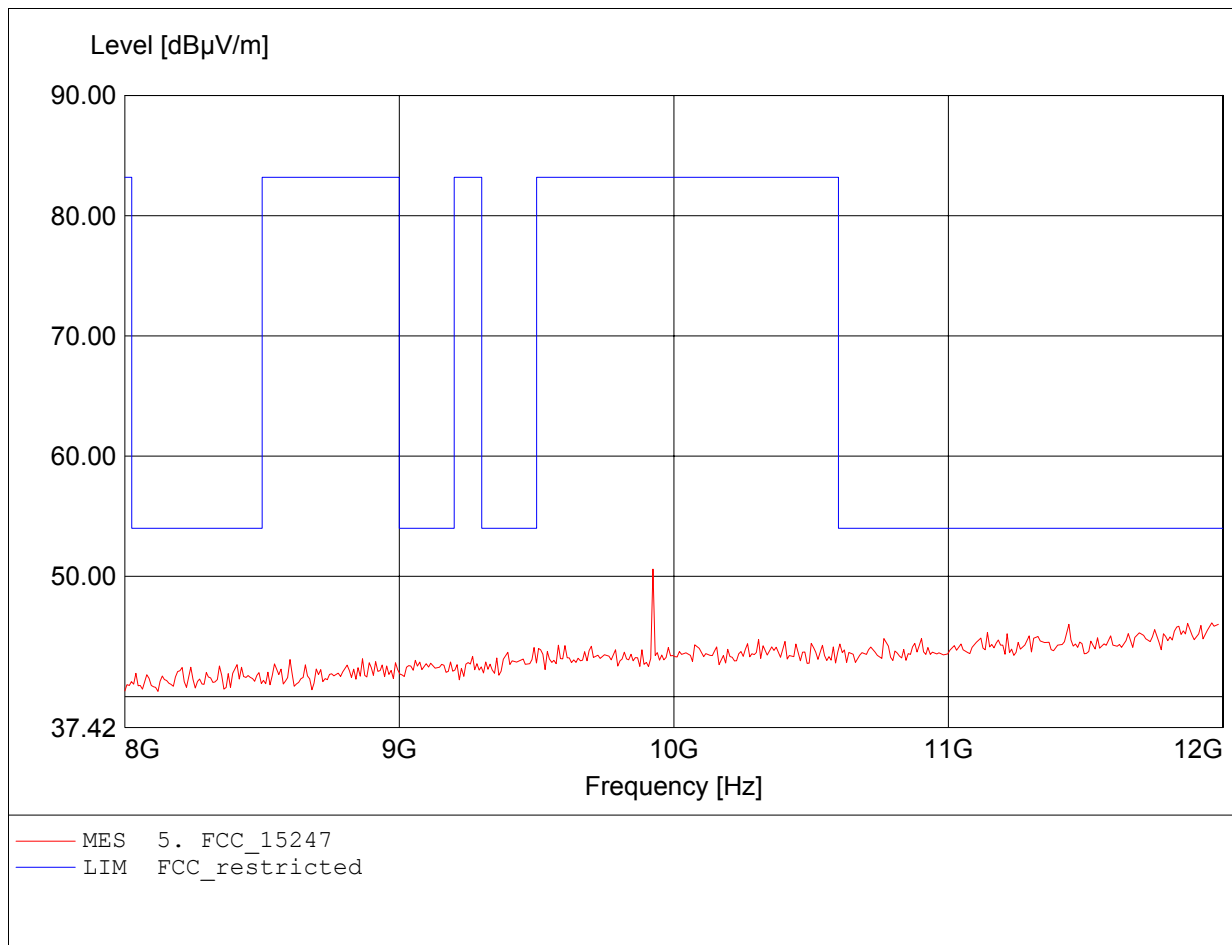


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 17.519GHz, Emax: 50.79dBµV/m, RBW: 1MHz

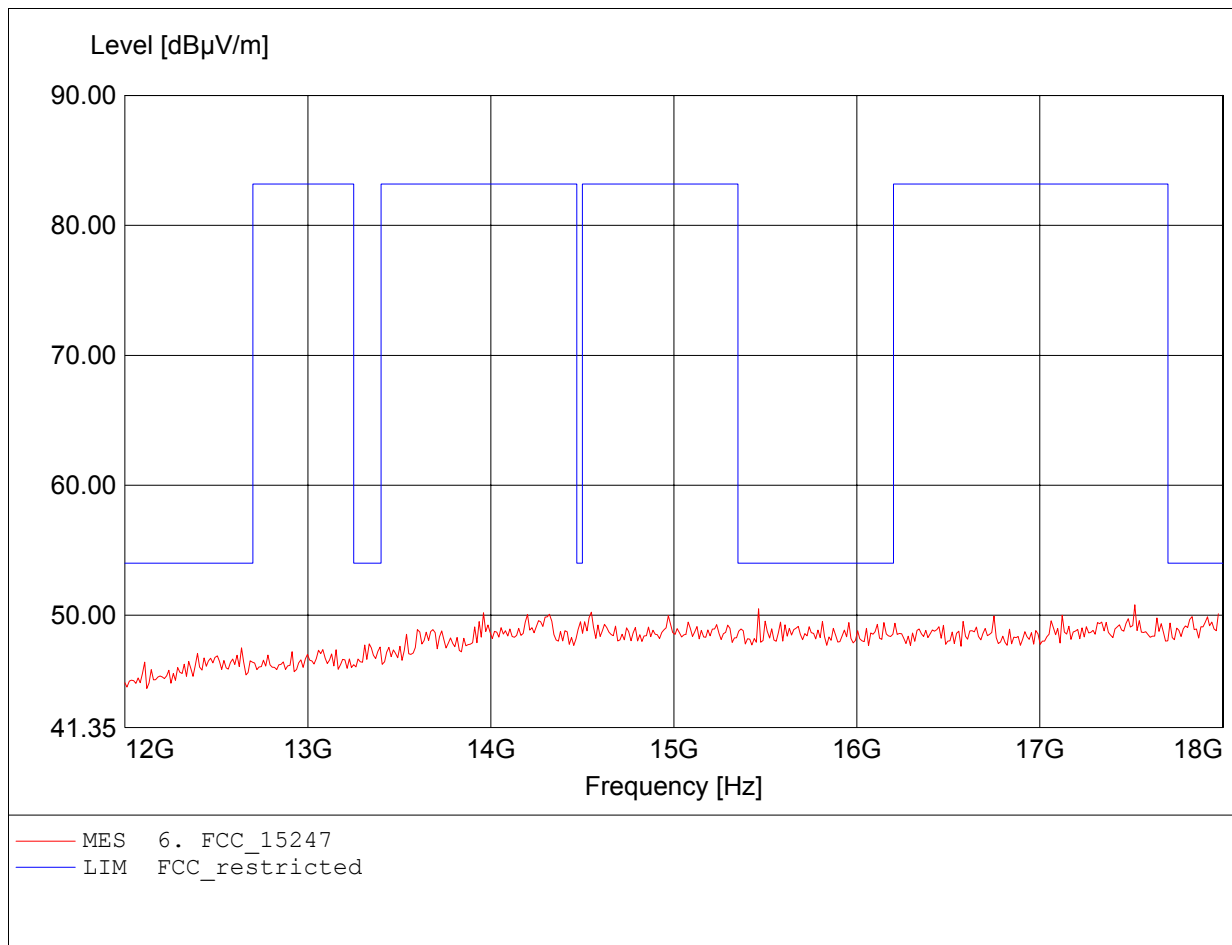


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, ampl.+HP.
Comment 2: Freq: 15.222GHz, Emax: 50.80dBµV/m, RBW: 1MHz

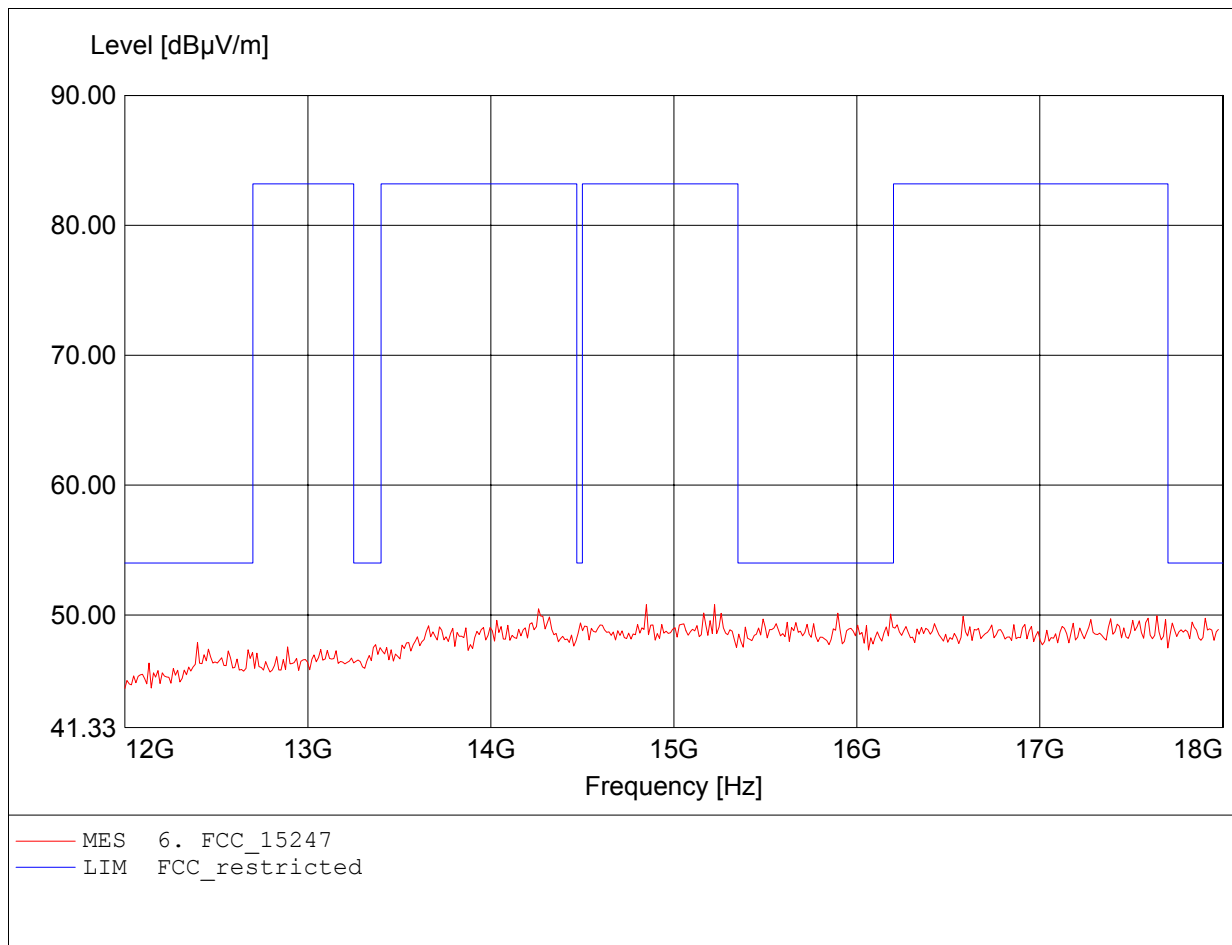


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 25.955GHz, Emax: 50.09dBµV/m, RBW: 1MHz

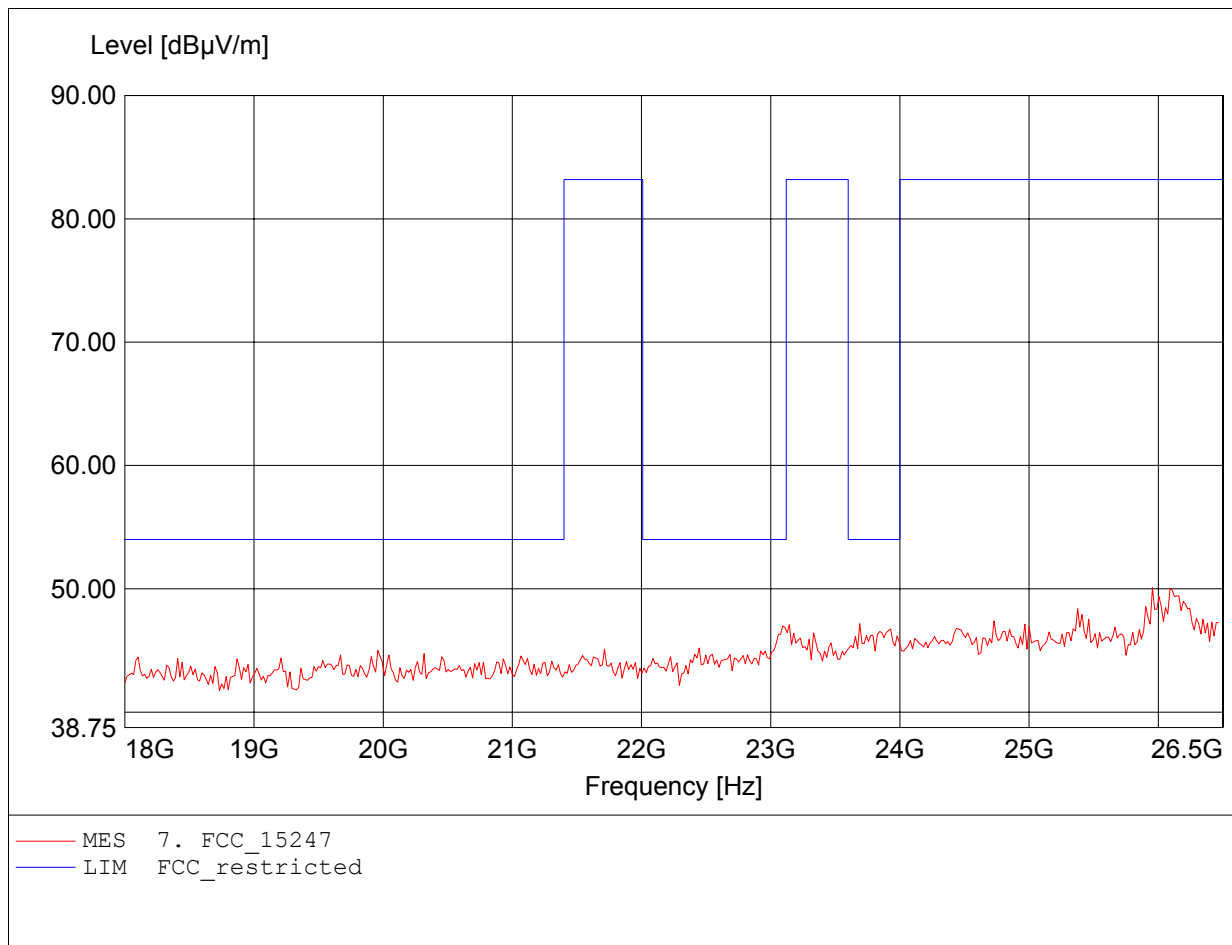

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

Approval Holder: Pantech Co., Ltd.
EUT: Triple band phone GSM 850/DCS 1800/PCS 1900 (with WAP & GPRS)
Model / Channel: PG-C3B / 2480
Test Site / Operator: ETS / Mr. Meng
Operating Conditions: 23°C / Unom.: 4.20 VDC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.176GHz, Emax: 49.88dBµV/m, RBW: 1MHz

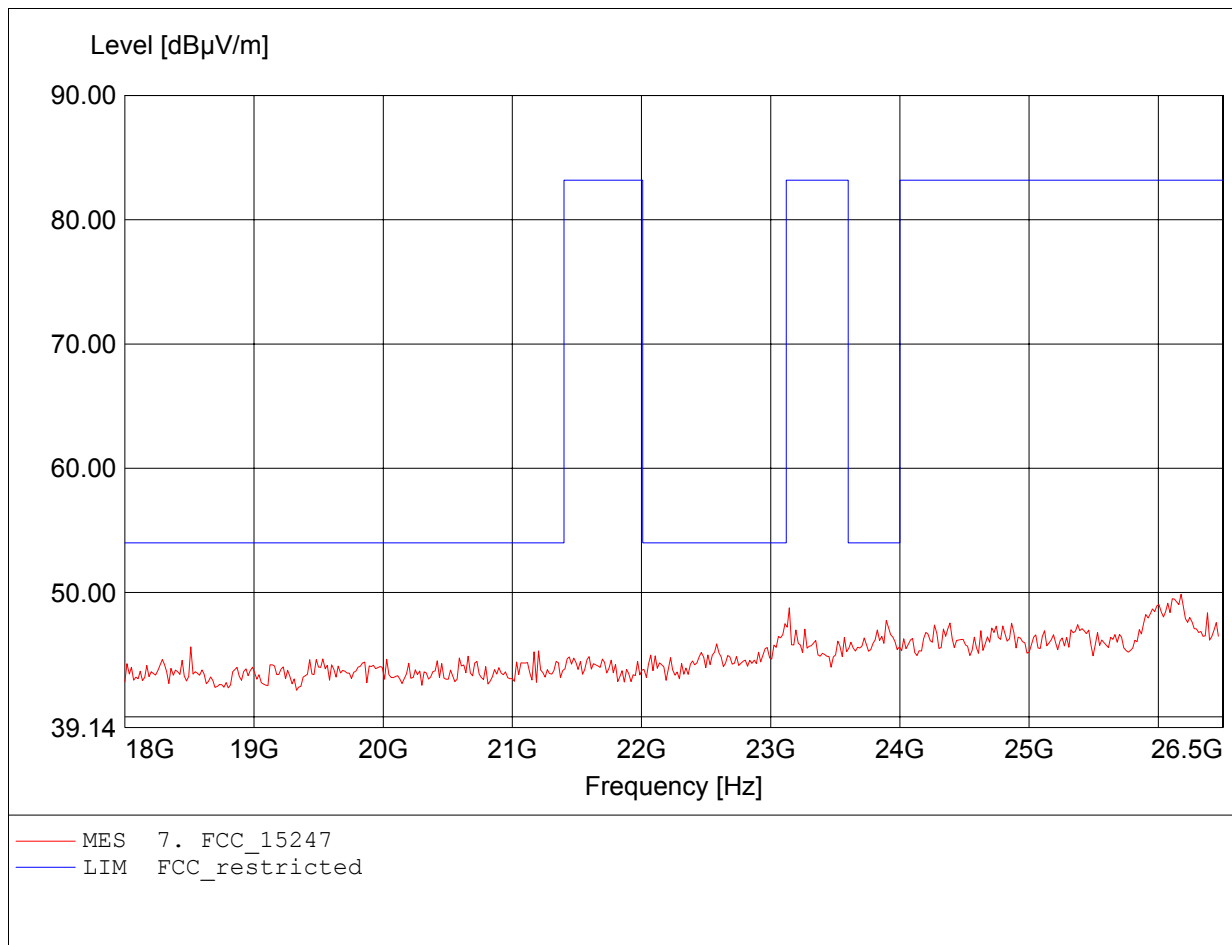

Appendix J

Band-edge compliance

Appendix K

AC power line conducted emissions

Appendix L

Receiver radiated emissions