

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011

Appendix D

Contour Plots

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

CDMA835 (1013CH) Slide down

Test Laboratory: HCT

File Name: [down 001_1013ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -17.4 dB A/m

Location: -7, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 23.7 dB

ABM1 comp = 6.30 dB A/m

BWC Factor = 0.15103 dB

Location: -7, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.30 dB A/m

BWC Factor = 0.15103 dB

Location: -7, 2.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -22.5 dB A/m

Location: -0.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 28.5 dB

ABM1 comp = 6.01 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.01 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.6 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 0.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 2.00 dB

BWC Factor = 10.8 dB

Location: 1.2, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -17.2 dB A/m

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 29.9 dB

ABM1 comp = 12.7 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.7 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.15103 dB

Location: 0, 0, 363.7 mm

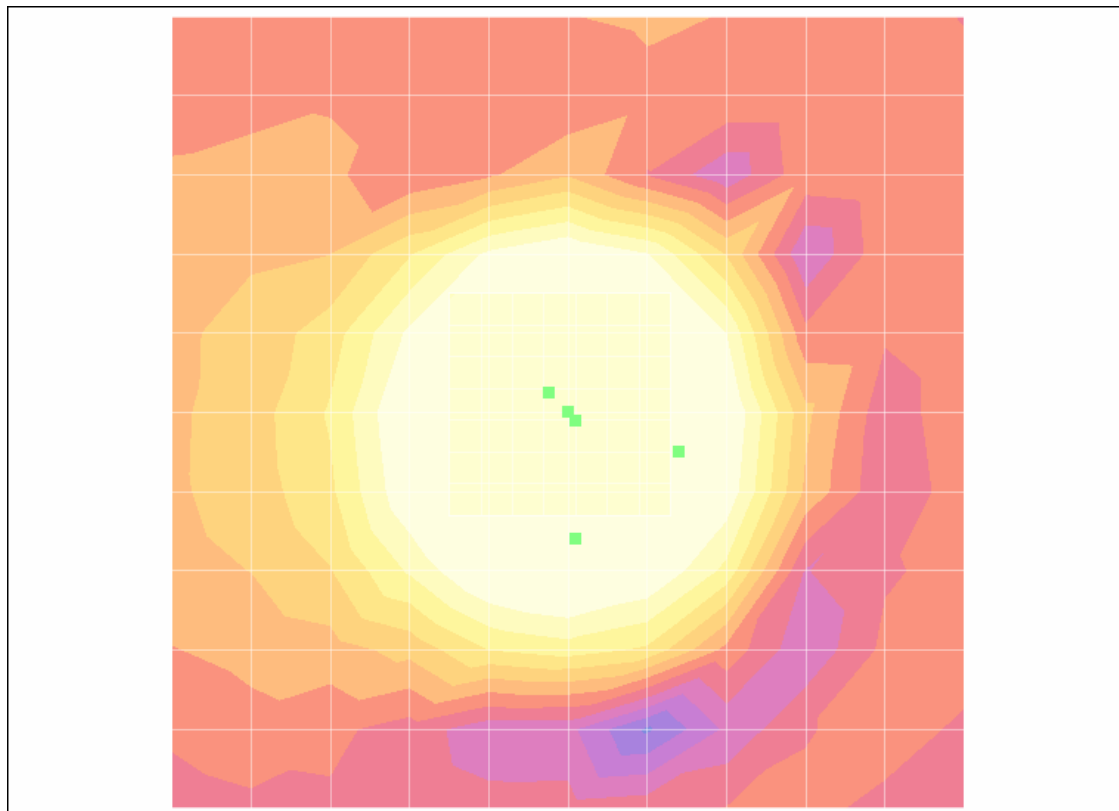

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011

CDMA835 (384CH) Slide down

Test Laboratory: HCT
File Name: [down 002_384ch.da4](#)

DUT: TXT8040; Type: Slide down
Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³
Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -15.9 dB A/m

Location: -5, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 22.2 dB

ABM1 comp = 6.29 dB A/m

BWC Factor = 0.152993 dB

Location: -5, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.29 dB A/m

BWC Factor = 0.152993 dB

Location: -5, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -21.9 dB A/m

Location: -0.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 27.9 dB

ABM1 comp = 6.00 dB A/m

BWC Factor = 0.152993 dB

Location: -0.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.00 dB A/m

BWC Factor = 0.152993 dB

Location: -0.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.6 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Cursor:

Diff = 1.82 dB
BWC Factor = 10.8 dB
Location: 1.2, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -16.9 dB A/m
Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 29.3 dB
ABM1 comp = 12.4 dB A/m
BWC Factor = 0.152993 dB
Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 12.4 dB A/m
BWC Factor = 0.152993 dB
Location: -0.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.9 dB A/m
BWC Factor = 0.151969 dB
Location: 0, 0, 363.7 mm

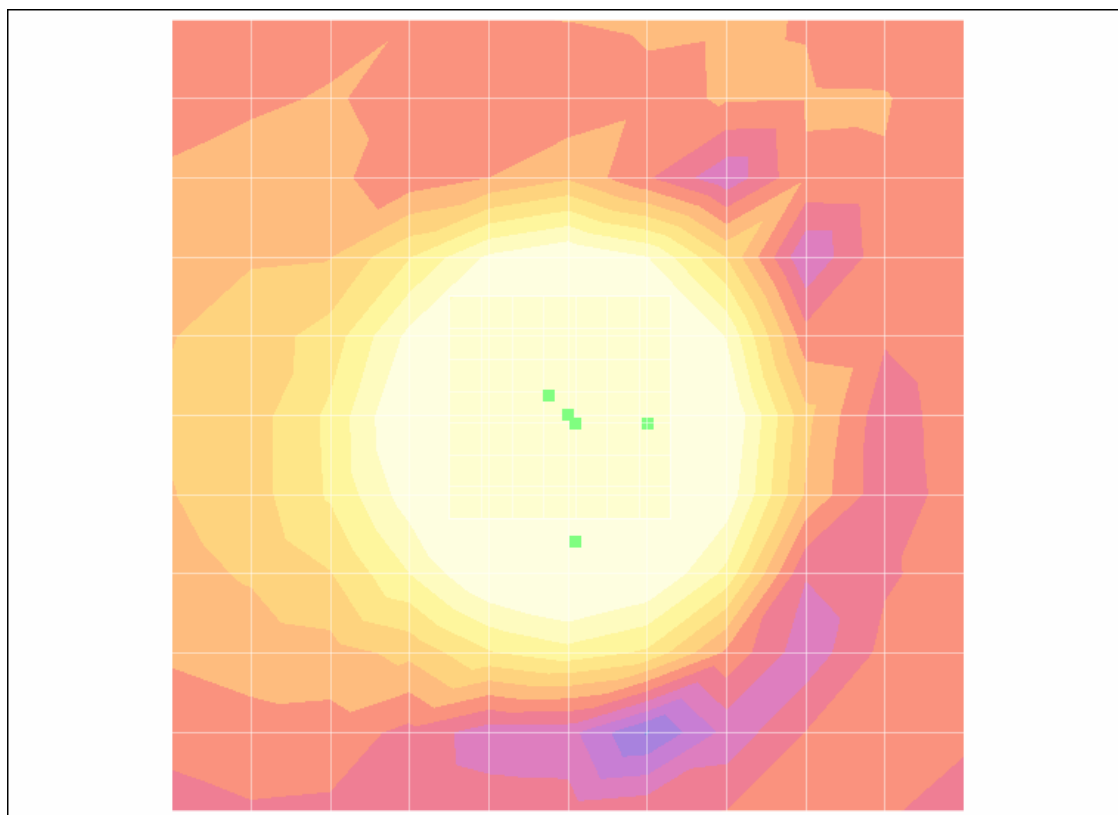

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011

CDMA800 (777CH) Slide down

Test Laboratory: HCT

File Name: [down 003_777ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -17.3 dB A/m

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 23.9 dB

ABM1 comp = 6.57 dB A/m

BWC Factor = 0.151969 dB

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.57 dB A/m

BWC Factor = 0.151969 dB

Location: -7, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -20.8 dB A/m

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 26.6 dB

ABM1 comp = 5.85 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.85 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.7 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Cursor:

Diff = 0.965 dB

BWC Factor = 10.8 dB

Location: 1.2, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -16.1 dB A/m

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 28.6 dB

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.9 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

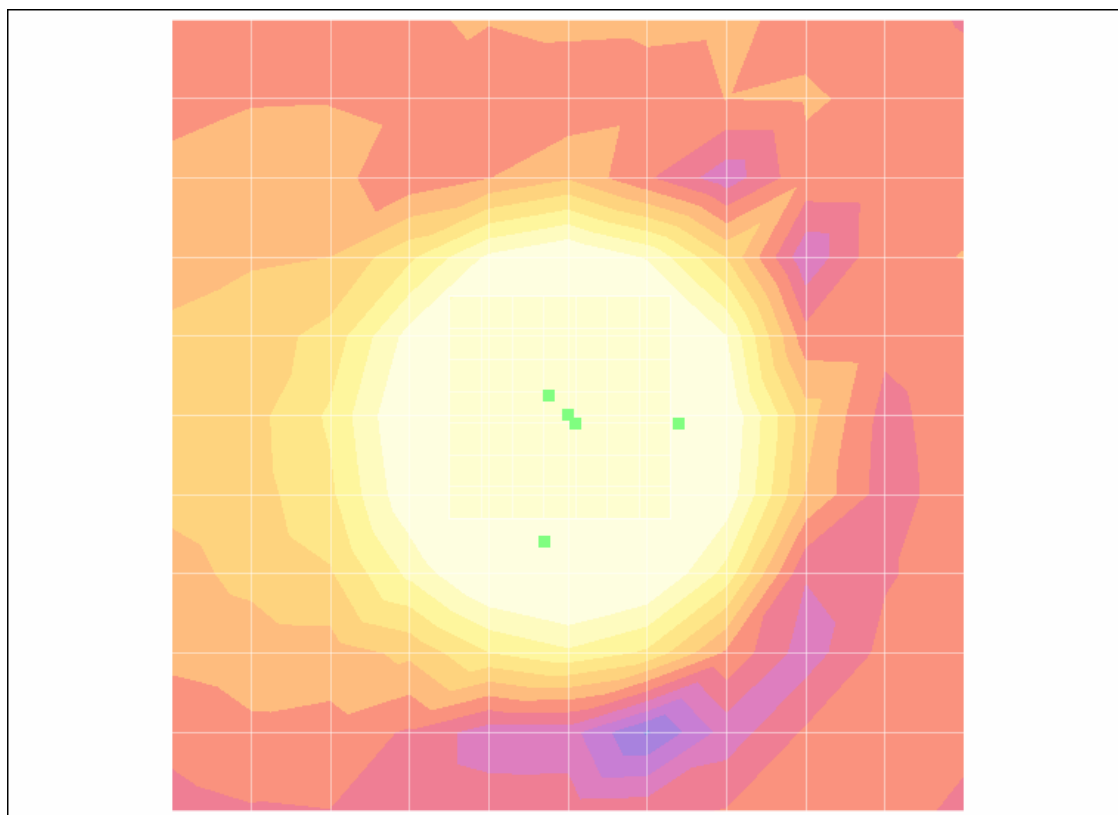

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011

PCS1900 (25CH) Slide down

Test Laboratory: HCT

File Name: [down 004_25ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 1900MHz FCC; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -17.2 dB A/m

Location: -7, -1.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 22.2 dB

ABM1 comp = 5.05 dB A/m

BWC Factor = 0.151969 dB

Location: -7, -1.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.05 dB A/m

BWC Factor = 0.151969 dB

Location: -7, -1.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -22.9 dB A/m

Location: -2.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 27.4 dB

ABM1 comp = 4.48 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.48 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Cursor:

Diff = 1.88 dB
BWC Factor = 10.8 dB
Location: 3.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -15.6 dB A/m
Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 26.7 dB
ABM1 comp = 11.1 dB A/m
BWC Factor = 0.151969 dB
Location: 1.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 11.1 dB A/m
BWC Factor = 0.151969 dB
Location: 1.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 11.6 dB A/m
BWC Factor = 0.151969 dB
Location: 0, 0, 363.7 mm

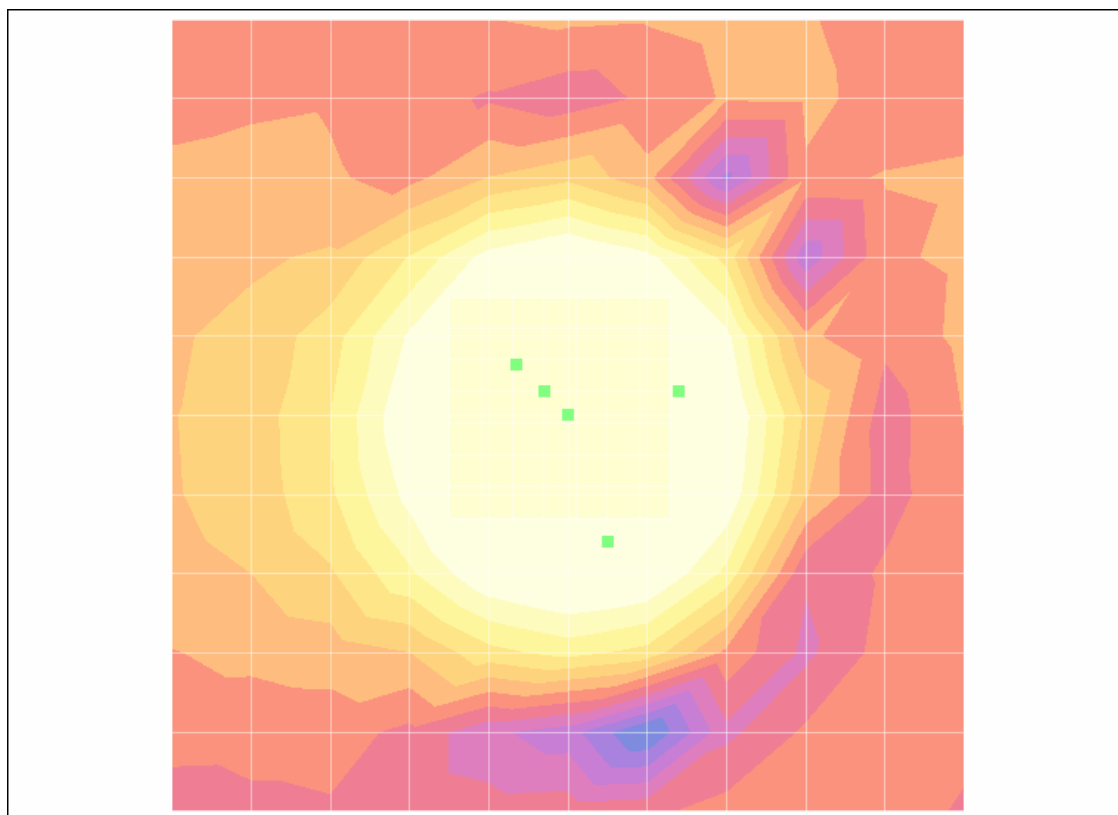

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011

PCS1900 (600CH) Slide down

Test Laboratory: HCT

File Name: [down 005_600ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -18.1 dB A/m

Location: -8, -1.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 23.5 dB

ABM1 comp = 5.37 dB A/m

BWC Factor = 0.151969 dB

Location: -8, -1.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.37 dB A/m

BWC Factor = 0.151969 dB

Location: -8, -1.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -25.3 dB A/m

Location: 1.5, -8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 30.1 dB

ABM1 comp = 4.87 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, -8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.87 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, -8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Cursor:

Diff = 1.77 dB
BWC Factor = 10.8 dB
Location: 1.2, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -17.2 dB A/m
Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 29.8 dB
ABM1 comp = 12.5 dB A/m
BWC Factor = 0.151969 dB
Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:


ABM1 comp = 12.5 dB A/m
BWC Factor = 0.151969 dB
Location: -0.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.4 dB A/m
BWC Factor = 0.151969 dB
Location: 0, 0, 363.7 mm

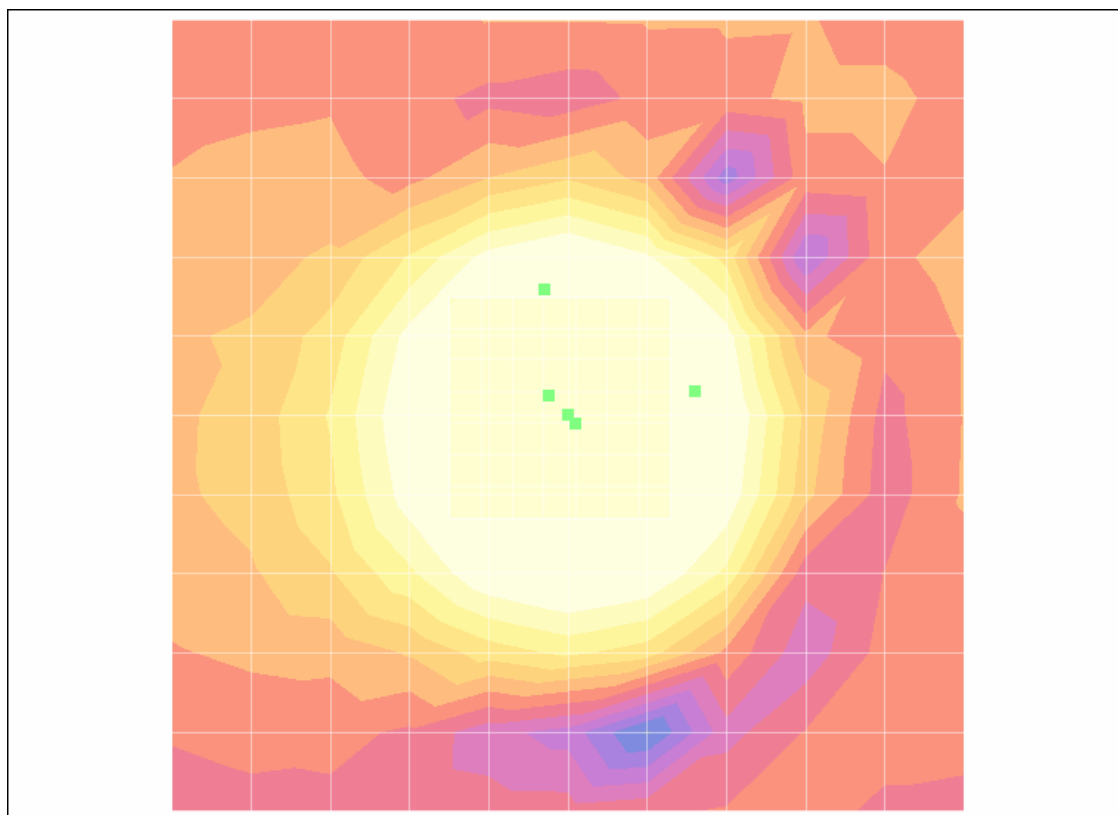

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

PCS1900 (1175CH) Slide down

Test Laboratory: HCT

File Name: [down 006_1175ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 1900MHz FCC; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -16.4 dB A/m

Location: -5, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 22.3 dB

ABM1 comp = 5.81 dB A/m

BWC Factor = 0.15103 dB

Location: -5, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.81 dB A/m

BWC Factor = 0.15103 dB

Location: -5, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -20.1 dB A/m

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 25.4 dB

ABM1 comp = 5.24 dB A/m

BWC Factor = 0.15103 dB

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.24 dB A/m

BWC Factor = 0.15103 dB

Location: 1.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.4 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 1.71 dB

BWC Factor = 10.8 dB

Location: 1.2, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -15.4 dB A/m

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 27.4 dB

ABM1 comp = 12.0 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.0 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.4 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

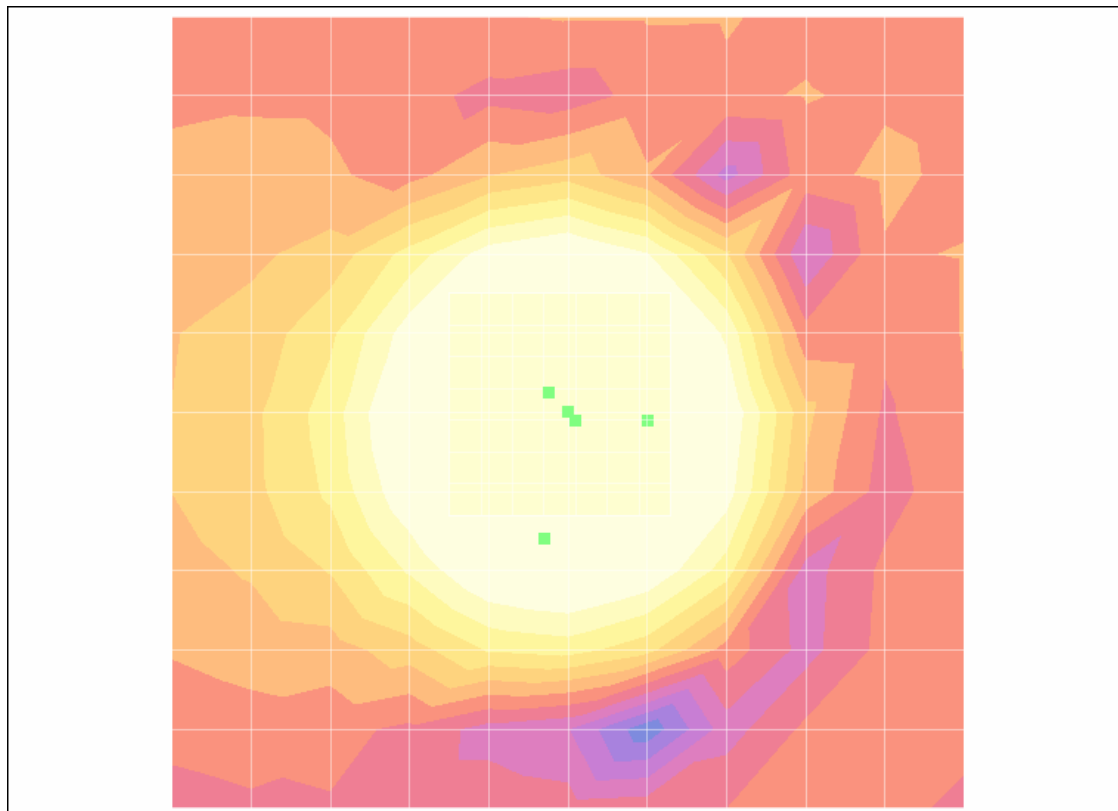

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

CDMA835 (1013CH) Slide up

Test Laboratory: HCT

File Name: [up_001_1013ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -43.9 dB A/m

Location: -10, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 46.0 dB

ABM1 comp = 2.10 dB A/m

BWC Factor = 0.151969 dB

Location: -10, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 2.10 dB A/m

BWC Factor = 0.151969 dB

Location: -10, 2.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -41.5 dB A/m

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 46.8 dB

ABM1 comp = 5.28 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.28 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.4 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, -1.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 2.00 dB

BWC Factor = 10.8 dB

Location: -0.8, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -33.9 dB A/m

Location: -2.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 46.1 dB

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.1 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

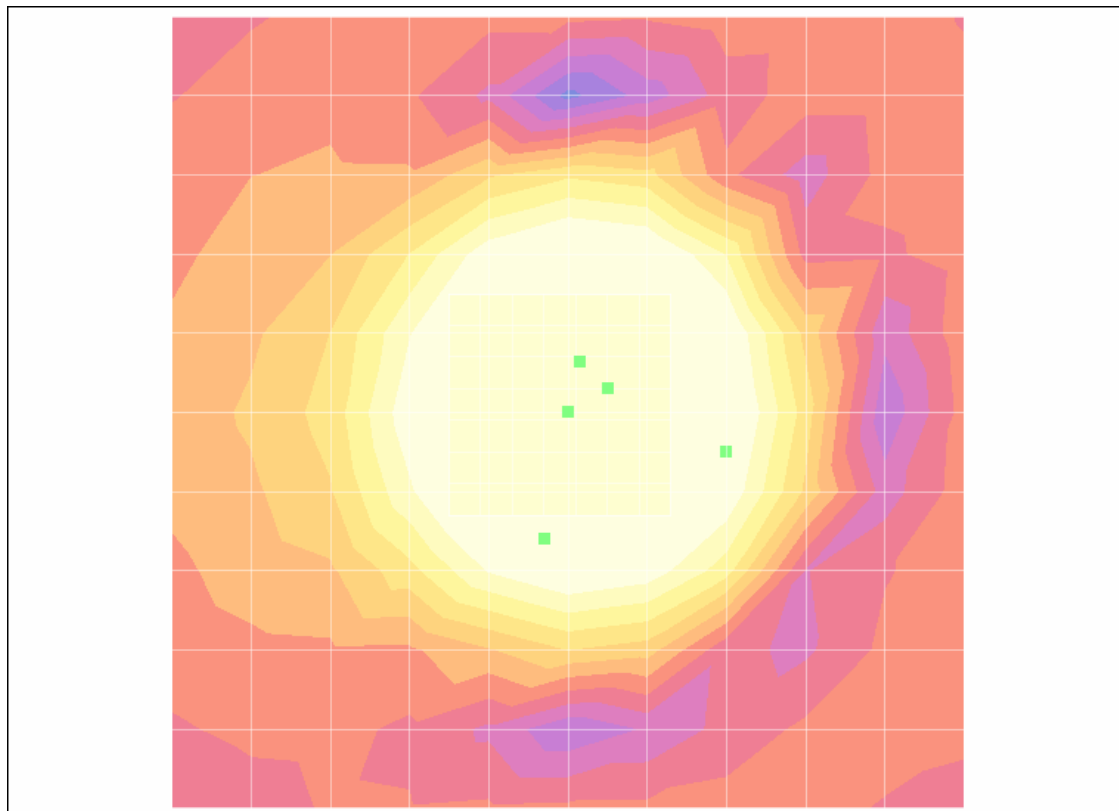

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011

CDMA835 (384CH) Slide up

Test Laboratory: HCT

File Name: [up_002_384ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -40.0 dB A/m

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 45.6 dB

ABM1 comp = 5.53 dB A/m

BWC Factor = 0.184002 dB

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.53 dB A/m

BWC Factor = 0.184002 dB

Location: -7, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -44.7 dB A/m

Location: -0.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 49.5 dB

ABM1 comp = 4.78 dB A/m

BWC Factor = 0.184002 dB

Location: -0.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.78 dB A/m

BWC Factor = 0.184002 dB

Location: -0.5, 10, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.4 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 0.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300~3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 0.714 dB

BWC Factor = 10.8 dB

Location: 1.2, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -34.8 dB A/m

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 47.0 dB

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.184002 dB

Location: -0.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.184002 dB

Location: -0.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.0 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

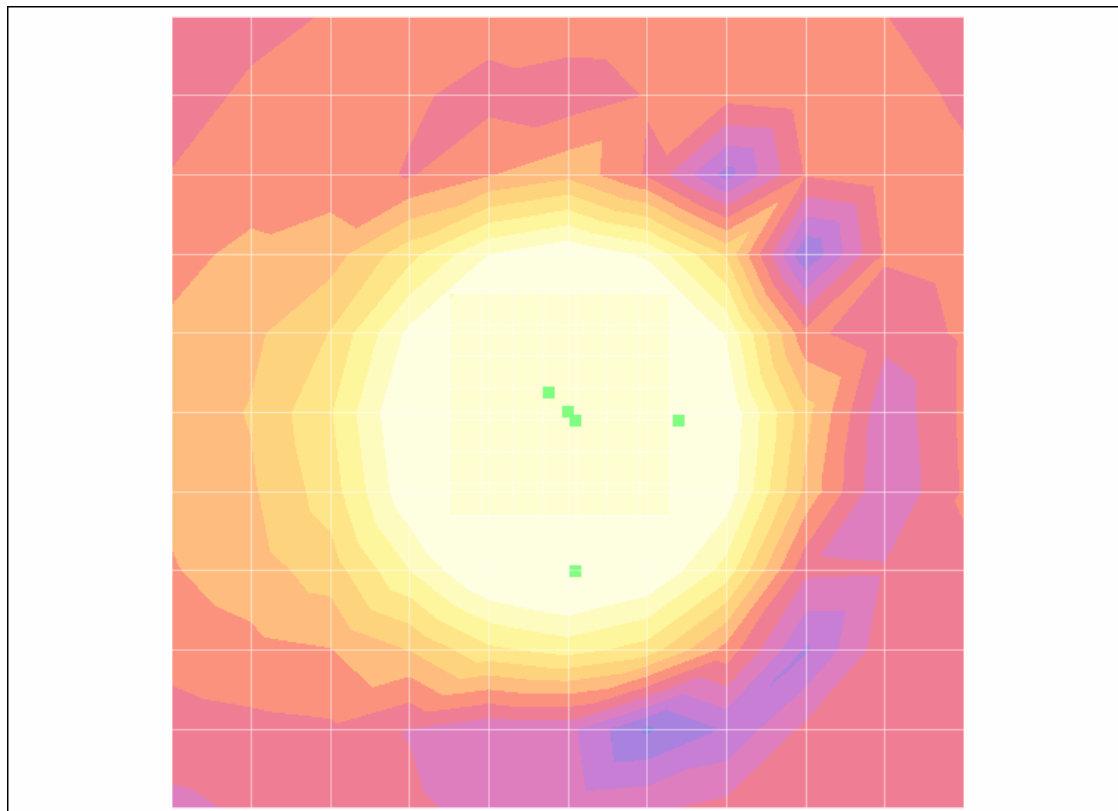

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

CDMA800 (777CH) Slide up

Test Laboratory: HCT

File Name: [up 003_777ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -37.2 dB A/m

Location: -8, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.6 dB

ABM1 comp = 2.36 dB A/m

BWC Factor = 0.15103 dB

Location: -8, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 2.36 dB A/m

BWC Factor = 0.15103 dB

Location: -8, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -40.6 dB A/m

Location: 1.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 45.5 dB

ABM1 comp = 4.87 dB A/m

BWC Factor = 0.15103 dB

Location: 1.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.87 dB A/m

BWC Factor = 0.15103 dB

Location: 1.5, 10, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 2.00 dB

BWC Factor = 10.8 dB

Location: 1.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -30.9 dB A/m

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.2 dB

ABM1 comp = 12.3 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.3 dB A/m

BWC Factor = 0.15103 dB

Location: -0.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.6 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

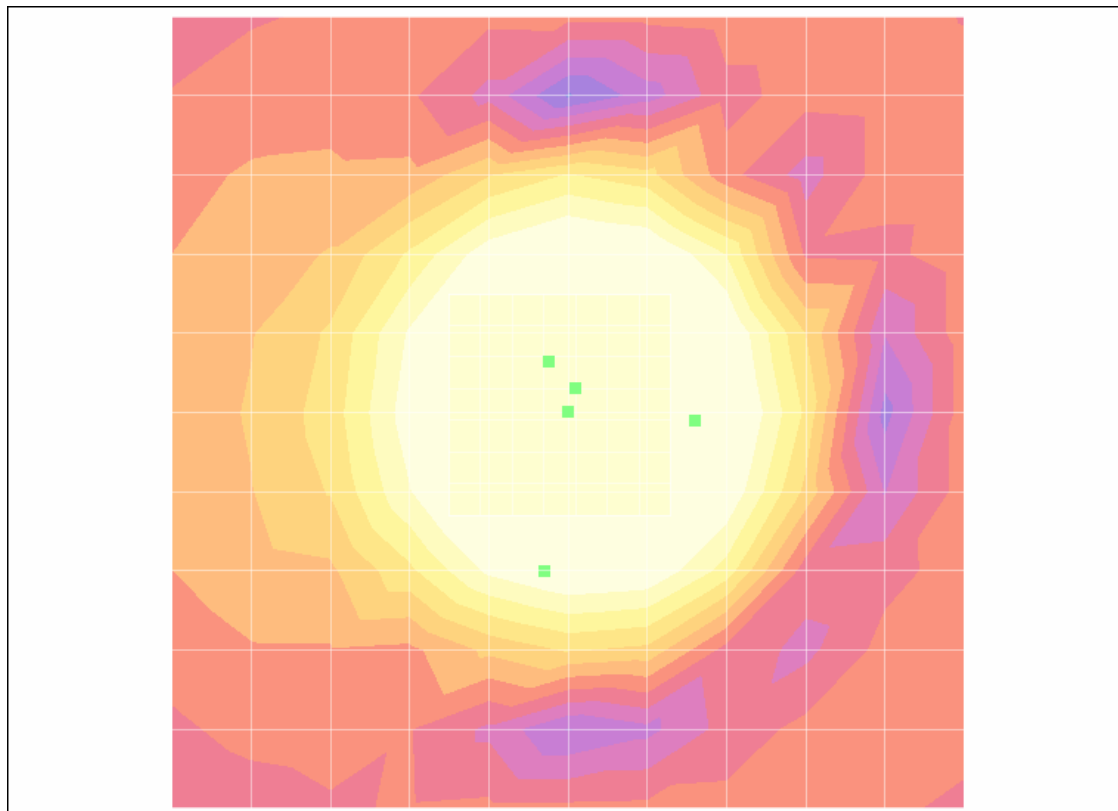

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

PCS1900 (25CH) Slide up

Test Laboratory: HCT

File Name: [up_004_25ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 1900MHz FCC; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -34.7 dB A/m

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.8 dB

ABM1 comp = 6.09 dB A/m

BWC Factor = 0.151969 dB

Location: -7, 0.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 6.09 dB A/m

BWC Factor = 0.151969 dB

Location: -7, 0.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -37.3 dB A/m

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.6 dB

ABM1 comp = 5.32 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 8, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 5.32 dB A/m

BWC Factor = 0.151969 dB

Location: 1.5, 8, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.5 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300~3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 1.86 dB

BWC Factor = 10.8 dB

Location: 1.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -30.4 dB A/m

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 42.0 dB

ABM1 comp = 11.6 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 11.6 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 11.7 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

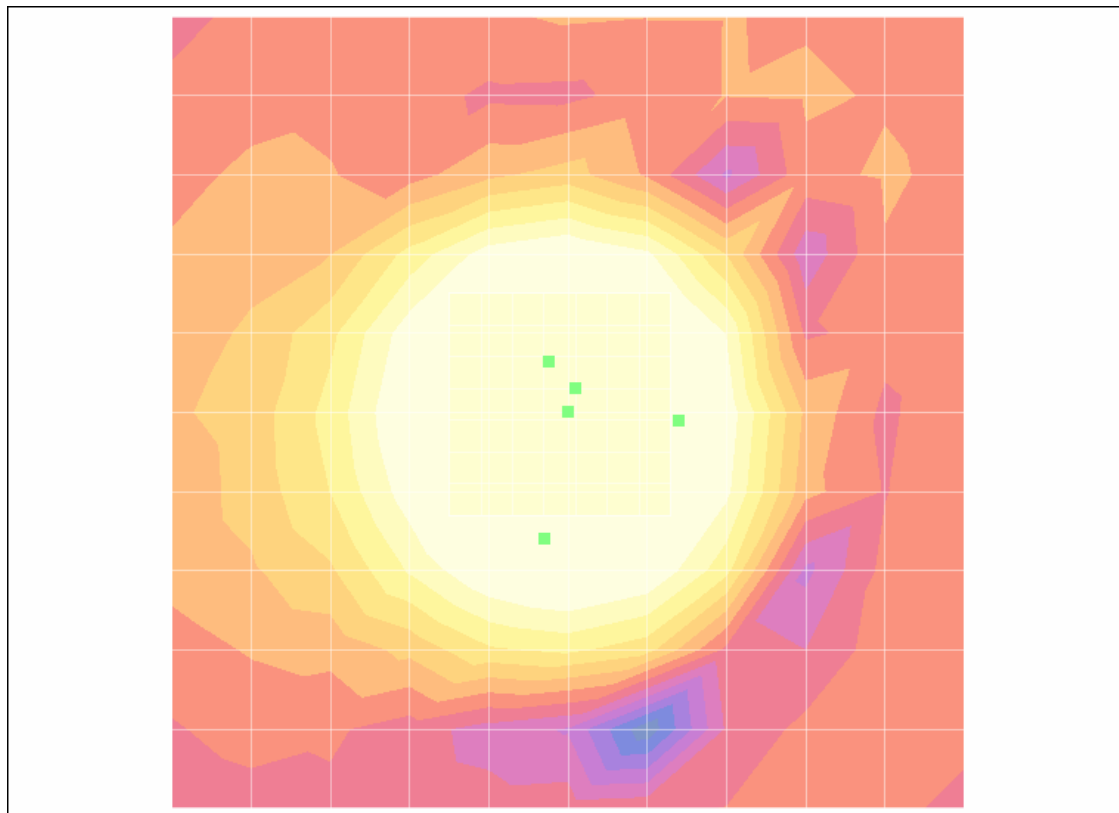

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

PCS1900 (600CH) Slide up

Test Laboratory: HCT

File Name: [up_005_600ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -38.8 dB A/m

Location: -8, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 40.9 dB

ABM1 comp = 2.12 dB A/m

BWC Factor = 0.152993 dB

Location: -8, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 2.12 dB A/m

BWC Factor = 0.152993 dB

Location: -8, 2.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -40.9 dB A/m

Location: -0.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 45.8 dB

ABM1 comp = 4.81 dB A/m

BWC Factor = 0.152993 dB

Location: -0.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.81 dB A/m

BWC Factor = 0.152993 dB

Location: -0.5, 10, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.3 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, -1.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 1.57 dB

BWC Factor = 10.8 dB

Location: 1.2, -3.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -31.2 dB A/m

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.3 dB

ABM1 comp = 12.1 dB A/m

BWC Factor = 0.152993 dB

Location: -0.5, -1.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.1 dB A/m

BWC Factor = 0.152993 dB

Location: -0.5, -1.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.2 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

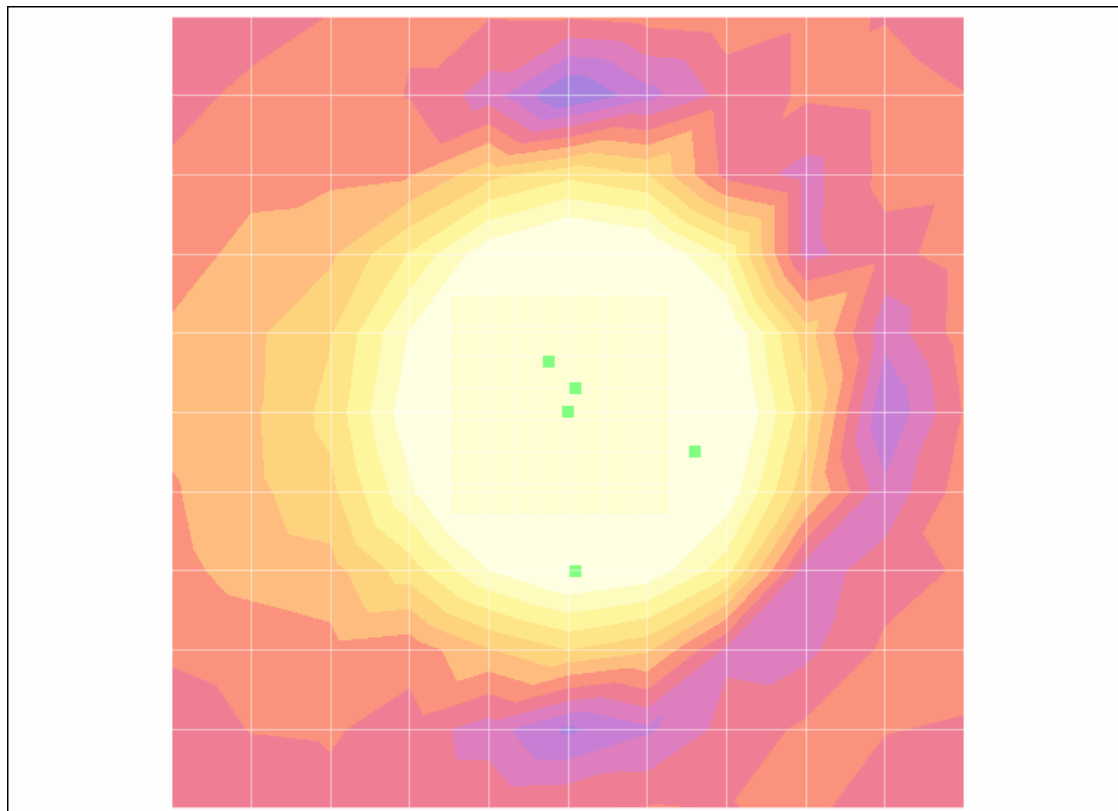

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

PCS1900 (1175CH) Slide up

Test Laboratory: HCT

File Name: [up_006_1175ch.da4](#)

DUT: TXT8040; Type: Slide down

Program Name: HAC_TCoil_WD_Emission

Communication System: PCS 1900MHz FCC; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1$ kg/m³

Phantom section: AMB with Coil Section

DASY4 Configuration:

- Probe: AM1DV2 - 1013; ; Calibrated: 2006-04-18
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAB4 Sn869; Calibrated: 2010-09-21
- Phantom: HAC Test Arch with Coil; Type: SD HAC P01 BA
- Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 184

Point measurement/x (longitudinal) at max x/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -37.7 dB A/m

Location: -8, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 39.9 dB

ABM1 comp = 2.19 dB A/m

BWC Factor = 0.151969 dB

Location: -8, 2.5, 363.7 mm

Point measurement/x (longitudinal) at max x/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 2.19 dB A/m

BWC Factor = 0.151969 dB

Location: -8, 2.5, 363.7 mm

Point measurement/y (transversal) at max y/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -40.6 dB A/m

Location: -0.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 45.4 dB

ABM1 comp = 4.78 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 10, 363.7 mm

Point measurement/y (transversal) at max y/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 4.78 dB A/m

BWC Factor = 0.151969 dB

Location: -0.5, 10, 363.7 mm

Scans/z (axial) 15 x 15/ABM Signal(x,y,z) (8x8x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.4 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, 0.5, 363.7 mm

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011
-------------	--------------	---------	---------	----------------	---------------

Point measurement/z (axial) 300-3k response at max/ABM Freq Resp(x,y,z,f) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

Diff = 1.08 dB

BWC Factor = 10.8 dB

Location: -0.8, -1.2, 365 mm

Point measurement/z (axial) at max z/ABM Noise(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM2 = -31.5 dB A/m

Location: -2.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM SNR(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1/ABM2 = 43.4 dB

ABM1 comp = 12.0 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, 0.5, 363.7 mm

Point measurement/z (axial) at max z/ABM Signal(x,y,z) (1x1x1):

Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.0 dB A/m

BWC Factor = 0.151969 dB

Location: -2.5, 0.5, 363.7 mm

Scans/z (axial) rough 50 x 50/ABM Signal(x,y,z) (11x11x1):


Measurement grid: dx=10mm, dy=10mm

Cursor:

ABM1 comp = 12.6 dB A/m

BWC Factor = 0.151969 dB

Location: 0, 0, 363.7 mm

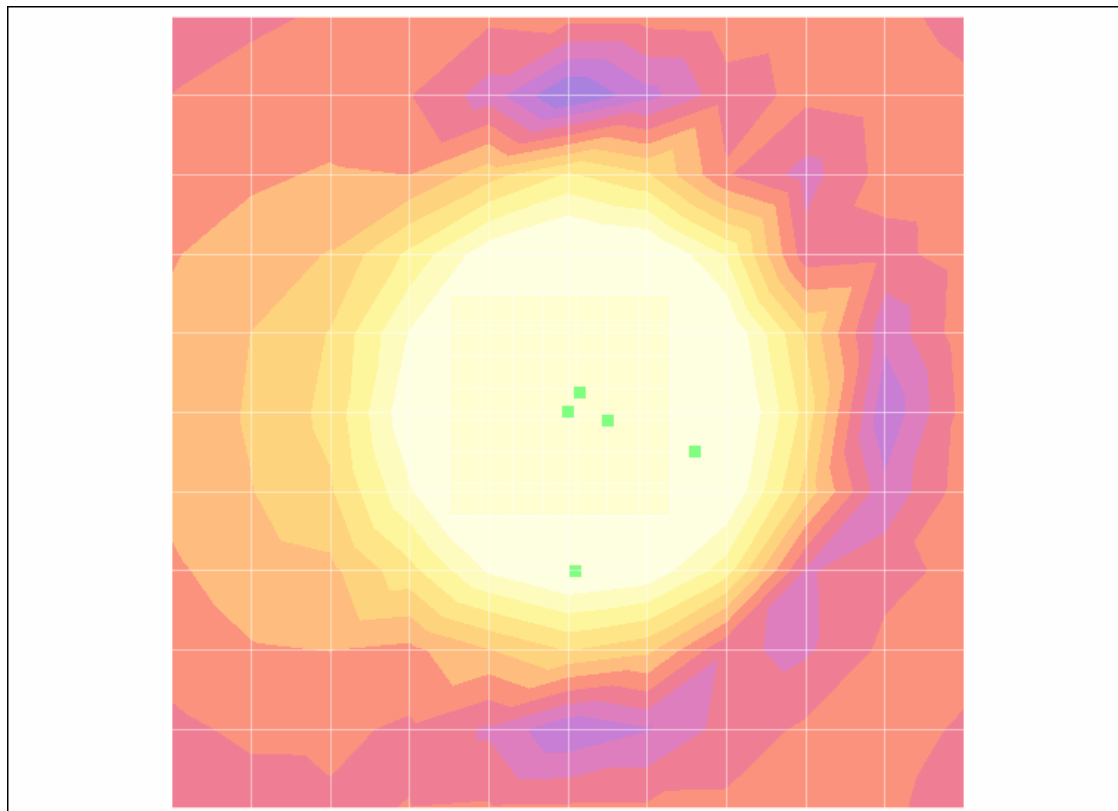

0 dB = 1.00A/m

Report No.:	HCTA1102FT01	FCC ID:	JYCSHOW	Date of Issue:	Feb. 11, 2011