




GALTRONICS (GTK) LTD.

Revision: P1

Part No: 02036075-04695

ANTENNA SPECIFICATION

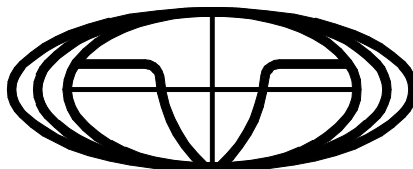



Project No: 04695



DESIGN SPECIFICATION

CDMA / USPCS

PANTECH TOW INTERNAL ANTENNA

<u>DISTRIBUTION LIST:</u> 1. QC 2. SALES	3.Pantech	
<u>APPROVED BY</u>	<u>SIGNATURE</u>	<u>DATE</u>
Engineering Department Manager Denis		2010-10-18
RF Manager James		2010-10-18
Mechanical Engineer Branden		2010-10-18
RF Engineer Duke		2010-10-18
<u>Approved By Customer(As Required):</u> Pantech		

2010 © COPYRIGHT GALTRONICS LTD.

This document is issued by Galtronics (GTK) Ltd. (hereinafter called Galtronics) in confidence, and is not to be reproduced in whole or in part without the prior written permission of Galtronics. The information contained herein is the property of Galtronics and is to be used only for the purpose for which it is submitted and is not to be released in whole or in part without the prior written permission of Galtronics.



ANTENNA SPECIFICATION

CONTENTS

- * PURPOSE ----- 5
 - . PURPOSE AND SCOPE
 - . RELATED DOCUMENTS
 - . ABBREVIATIONS AND DEFINITIONS

- 1. PRODUCT REVISION ----- 6
 - 1.1 The list of approval sheet revision

- 2. MATERIAL CERTIFICATION----- 6
 - 2.1 Description and part number
 - 2.1.1 Description
 - 2.1.2 Part number
 - 2.1.3 Part List

- 3. ELECTRICAL SPECIFICATIONS ----- 7
 - 3.1 Frequency Band
 - 3.2 Impedance.
 - 3.3 Matching Requirements
 - 3.4 Input VSWR
 - 3.4.1 Maximum Values of VSWR in Frequency Band
 - 3.4.2 Test Method (Engineering)
 - 3.4.3 Test Method (Production)
 - 3.4.4 Test Method (Customer)
 - 3.4.5 Test Method (Jig Data)
 - 3.4.6 Phone VSWR Data
 - 3.4.7 Maximum Values of VSWR in Frequency Band
 - 3.5 Gain
 - 3.5.1 Minimum Gain Values for average in Azimuth / Elevation Plane
 - 3.5.2 Measured Gain Values for average in Azimuth / Elevation Plane
 - 3.5.3 Test Method

- 4. MECHANICAL SPECIFICATIONS----- 12
 - 4.1 Mechanical Configuration
 - 4.2 Contact Force Test
 - 4.2.1 Compression Test
 - 4.2.2 Restitution Test
 - 4.3 Drop Test

- 5. ENVIRONMENTAL SPECIFICATIONS ----- 13
 - 5.1 Low Temperature Soaking Test
 - 5.2 High Temperature Soaking Test
 - 5.3 Thermal Shock Test
 - 5.4 Static Humidity Test
 - 5.5 Salt Spray (Corrosion) Test

- 6. QUALIFICATION ----- 15

- 7. APPENDIX AND CERTIFICATION -----16
 - 7.1 Electrical data (VSWR and Jig data)
 - 7.2 Product Drawing
 - 7.3 Packaging (TBD)
 - 7.4 LOT marking information



ANTENNA SPECIFICATION

*** PURPOSE AND SCOPE**

The purpose of this document is to establish a design specification for the antenna product that Galtronics is developing for Pantech. Any changes or additions to this specification can affect schedule and/or cost of the product and should be negotiated between Galtronics and Pantech before being incorporated into the specification. Upon agreement of this specification Galtronics will make no changes without written approval from Pantech. Any changes requested by Pantech will be given to Galtronics with sufficient time frame to evaluate the cost impact and react as required. The development of this product within Galtronics was conducted according to the Design Control Procedure SOP-006E.

-. RELATED DOCUMENTS

SOP006E	Product Launch Procedure (Design Control)
EN006E	Reliability Guidelines
EIA-STD-556	Outer Shipping Container Bar Code Label Standard

-. ABBREVIATIONS AND DEFINITIONS

Ω	Ohm
°	Degree
°C	Celsius (degrees Centigrade)
cm	Centimetre
g	Grams
GHz	Gigahertz
Hz	Hertz
kg	Kilograms
MHz	Megahertz
M	Meter
mm	Millimetre
N	Newton
PCB	Printed Circuit Board
RH	Relative Humidity
W	Watt

Design Specification: A preliminary target specification to guide the design process.

Product Specification: A final specification for the qualified product.

**ANTENNA SPECIFICATION****1. PRODUCT REVISION**

1.1 The list of approval sheet revision

<u>REV NO.</u>	<u>PANTECH REV NO</u>	<u>DATE</u>	<u>DESCRIPTION</u>
P-1	P1	18. Oct, 10	RELEASED FOR CUSTOMER PERLIMINARY APPROVAL

2. MATERIAL CERTIFICATION**2.1 Description and part number****2.1.1 DESCRIPTION**

The antenna consists of two components – Element and Carrier.

2.1.2 PART NUMBER

Galtronics Part number	Frequency Band	Pantech Part number
02036075-04695	CDMA/ USPCS	

2.1.3 PART LIST

PART NUMBER	PART NAME	MATERIAL & FINISH	PROCESS	SUPPLIER	Q'TY	Remark
02036075-04695	Internal Antenna Assembly	—	Manual Assembly & Heat Stakes Machine	-		
28-5505-03	Carrier	PC Lexan(141R) (Color : Black / Code:701)	Mold Tooling & Injection Machine	QDM TECH	1	QDM
06-5830-03	Pattern	Phosphor Bronze Sheet (Grade : C5210, Hardness : 1H Thickness : 0.15T)	Stamping Tooling & Press Machine Electro pre overall Ni(1.0~6.0 μm) Plating and Chemical Passivation	HYUN TECH	1	Hand made



ANTENNA SPECIFICATION

3. ELECTRICAL SPECIFICATIONS:

3.1 FREQUENCY BAND

BAND	FREQUENCY
CDMA	TX(824-849MHz)
	RX(869-894MHz)
USPCS	TX(1850-1910MHz)
	RX(1930-1990MHz)

3.2 IMPEDANCE - Nominal impedance: 50Ω

3.3 MATCHING REQUIREMENTS.

In order to assure the best performance of the antenna, the matching shall be evaluated in free space with the antenna vertically positioned. Galtronics shall give design support to the customer to obtain the optimum matching circuit for the antenna system.

The antenna shall comply with the Electrical Specification requirements, as set out below, while mounted on the customer supplied handset containing the PCB with the matching circuit. The handset with PCB is to be supplied by the customer and should be representative of the production parts. Any modifications in the handset or PCB can affect the performance of the antenna and should be discussed with Galtronics to determine the affect of such changes on antenna performance and delivery requirements.

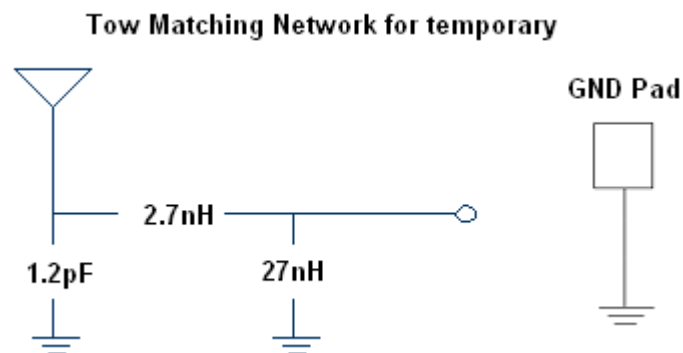


FIGURE 1. Matching Circuit

3.4 INPUT VSWR

3.4.1 MAXIMUM VALUES OF VSWR IN FREQUENCY BAND (PHONE JIG SPECIFICATION)

BAND	FREQUENCY	VSWR
CDMA	824	5.5
	894	4.5
USPCS	1850	4.0
	1990	3.5

*** Means pending on final PCB and matching circuit**



3.4.2 TEST METHOD (Engineering)

The antenna is tested while mounted on the handset with the matching circuit (Fig 2). The handset is positioned in the air.

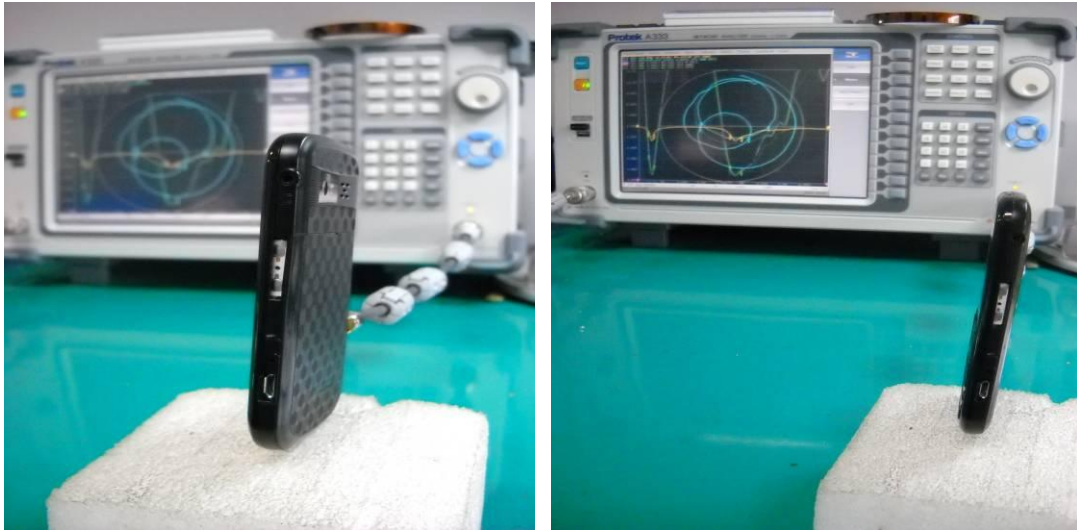


FIGURE 2. Test Method

3.4.3 TEST METHOD (Production)

In mass production it is not practical to use the handset supplied by customer. Galtronics will design a representative production test fixture for use on the processes that require electrical testing. The results of the test fixture will be correlated to the results obtained on the customer handset.

3.4.4 TEST METHOD (Customer)

Galtronics supply the antennas. And then, assemble antenna into the handset before checking the RF performance. (Refer to the Fig. 3)



FIGURE 3. The Antenna



3.4.5 TEST METHOD (RF Test Jig Data)

The antenna is tested while mounted on the test jig that is positioned in the air(Refer to Fig. 4).

FIGURE 4. RF Test Fixture

3.4.6 Phone VSWR DATA

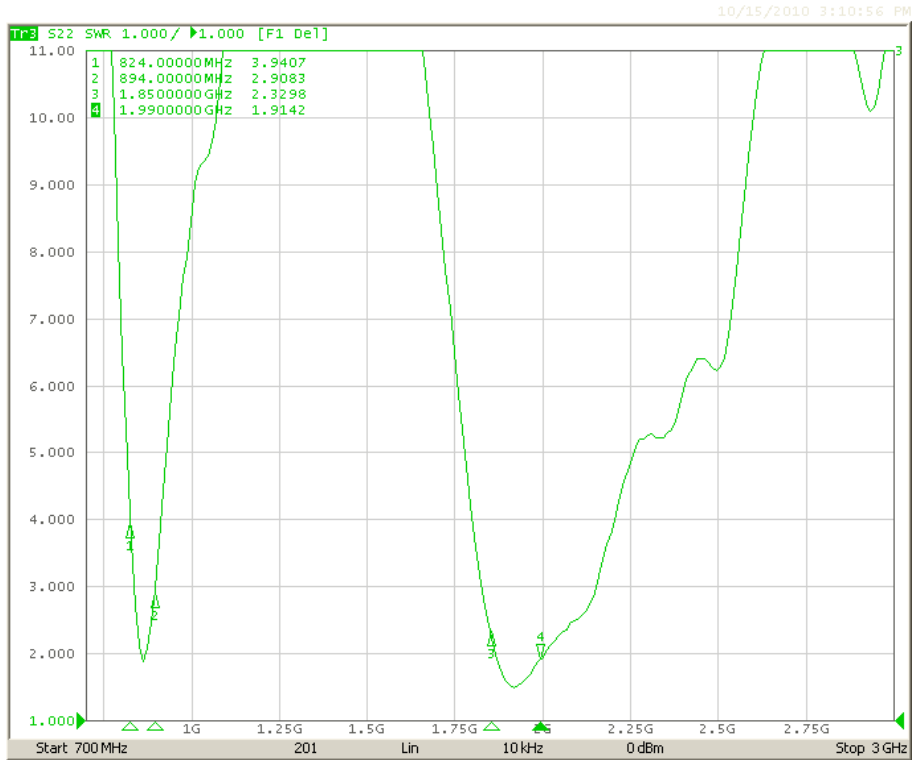


FIGURE 5. RF Test Jig VSWR

3.4.7 MAXIMUM VALUES OF VSWR IN FREQUENCY BAND (RF TEST JIG SPECIFICATION)

****Means pending on the RF test jig**

3.5 GAIN

3.5.1 MINIMUM GAIN VALUES FOR AVERAGE IN AZIMUTH/ EVALUATION PLANE :

(Measured in the APLUS TECH Chamber in Galtronics Korea)
(unit : dBi)

BAND	FREQUENCY (MHz)	PLANE	Gain
CDMA	824	H	-3.0
		E1	-8.5
		E2	-8.5
	894	H	-1.5



ANTENNA SPECIFICATION

USPCS	1850	E1	-8.0
		E2	-8.0
		H	-4.0
		E1	-9.5
	1990	E2	-7.5
		H	-4.0
		E1	-9.5
		E2	-7.5

**** Means pending on final PCB and matching circuit**

3.5.2 MEASURED GAIN VALUES FOR AVERAGE IN AZIMUTH/ ELEVATION PLANE

(Measured in the APLUS TECH Chamber in Galtronics Korea)
(unit : dBi)

BAND	FREQUENCY (MHz)	PLANE	Gain
CDMA	824	H	-1.5
		E1	-6.8
		E2	-6.9
	894	H	0.1
		E1	-6.3
		E2	-6.5
USPCS	1850	H	-2.6
		E1	-7.8
		E2	-6.0
	1990	H	-2.3
		E1	-7.9
		E2	-6.0

**** Means pending on final PCB and matching circuit**

3.5.3 TEST METHOD;


The antenna is tested while mounted on handset with the correct matching circuit in free space. Radiation patterns are measured on following frequencies: 824MHz, 894MHz, 1850MHz, 1990MHz

The antenna is measured for 2 elevation cuts at two different azimuth positions ($\phi = 0$, $\phi = 90$). Azimuth(H) $\theta = 90^\circ$, Elevation $\phi = 0^\circ$, $\phi = 90^\circ$ The results of the test will be correlated to the customer handset and the measurement environment. (Refer to Fig. 2)




ANTENNA SPECIFICATION

MEASURED RADIATION PATTERN

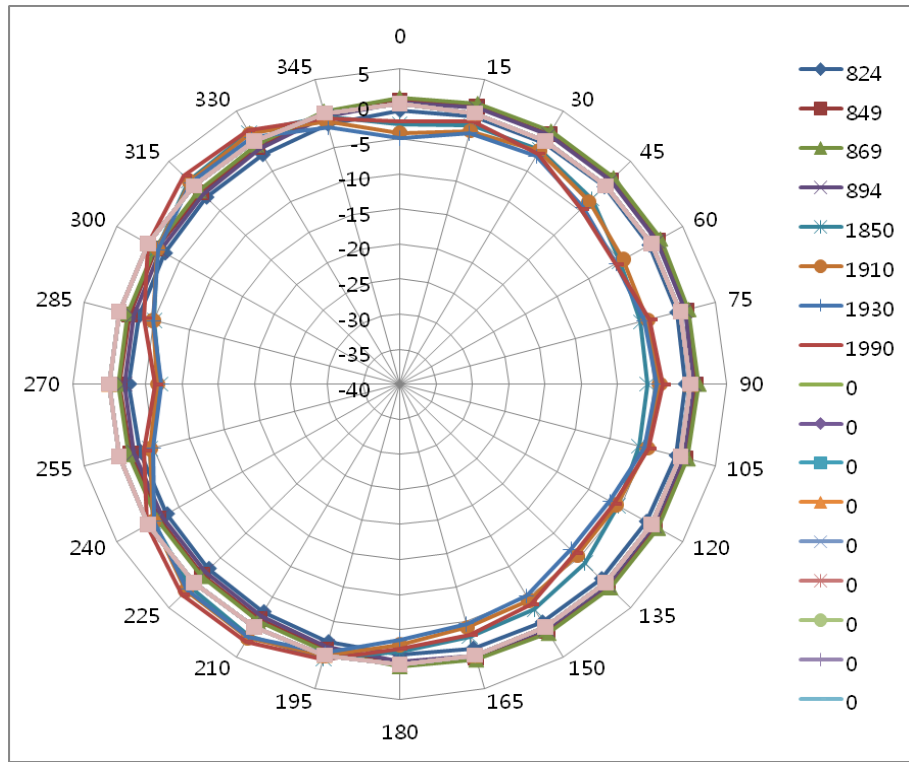


<H>

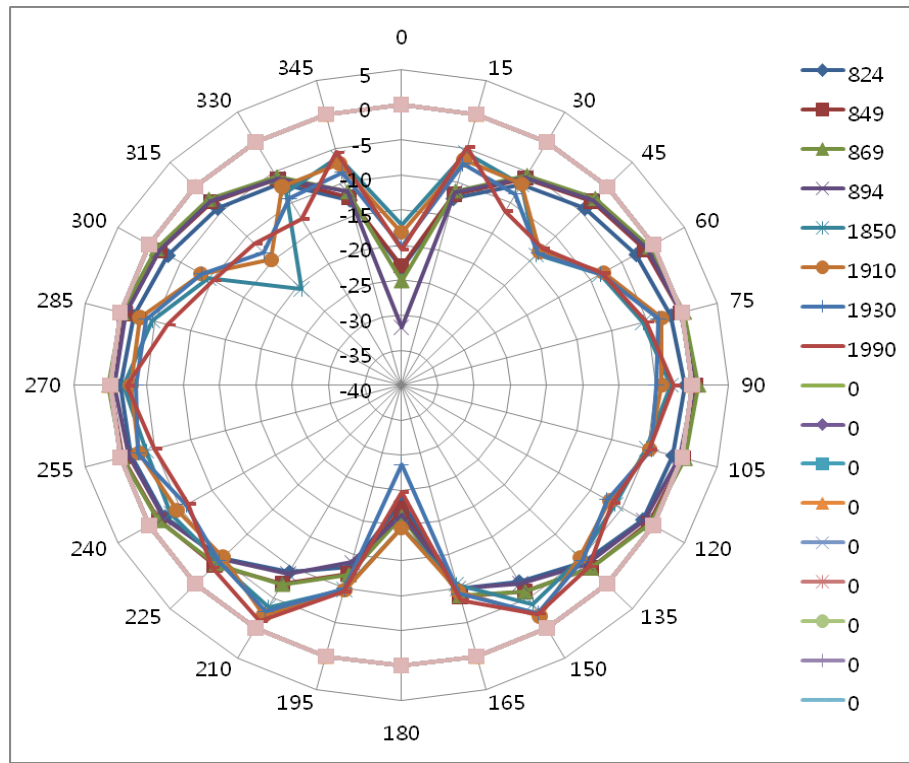

<E1>



ANTENNA SPECIFICATION

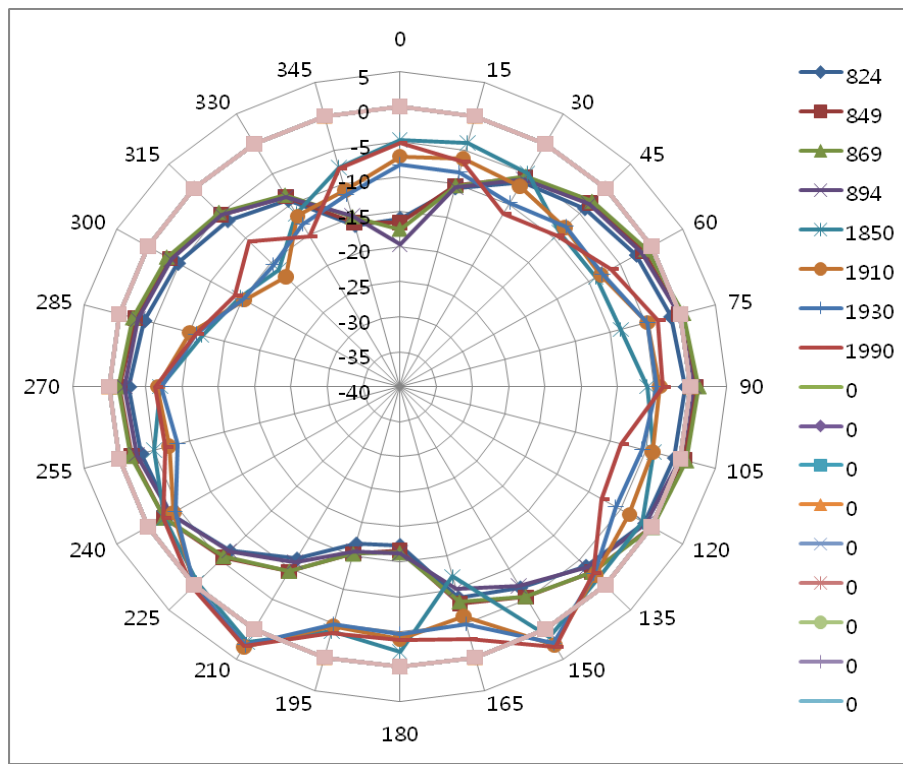

< E2 >

4. MECHANICAL SPECIFICATIONS;

4.1 MECHANICAL CONFIGURATION

The appearance of the antenna is in accordance with drawing 02036075-04695

4.2 CONTACT FORCE TEST

4.2.1 COMPRESSION TEST

Place the antenna on the compression test machine, fix the antenna, and press on the top contact point to the height PCB contact area (See figure 6)

The force shall be within the range of 100gf to 500gf.

The test should be done at room temperature $+24^{\circ}\text{C} \pm 3^{\circ}\text{C}$

4.2.2 RESTITUTION TEST

Place the antenna on the compression test machine, fix the antenna, and press on the top contact point to the height PCB contact area. Antenna contact should have no more than 20% of shape change after 500 cycles of the performed test.



FIGURE 6. Compression Test Method

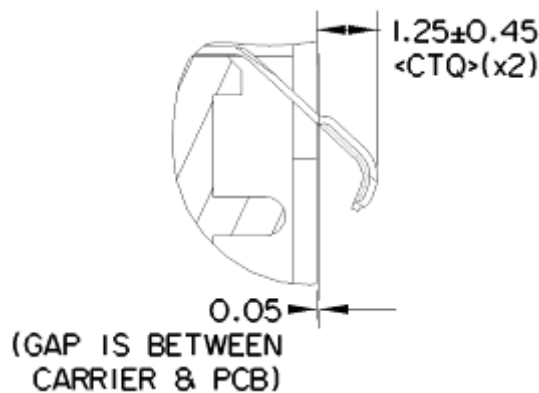


FIGURE 7. Contact Dimensions

4.3 DROP TEST

The antenna assembled to the mobile phone provided by Pantech, should withstand 5 drops per every each 6 sides from 1.5m heights onto a steel plate 500×500mm with thickness of 20mm. The antenna should function mechanically after the test. Electrical characteristics should be within the specified range.

The temperature of the environment should be +24°C±3°C

5.0 ENVIRONMENTAL SPECIFICATIONS

5.1 LOW TEMPERATURE SOAKING

The antenna should be placed in an environmental chamber at -40°C for 48 hours.

Soak antenna at ambient temperature at least 1 hour after the test.

After test is complete, the antenna should function mechanically. Electrical characteristics should be within the specified range.



ANTENNA SPECIFICATION

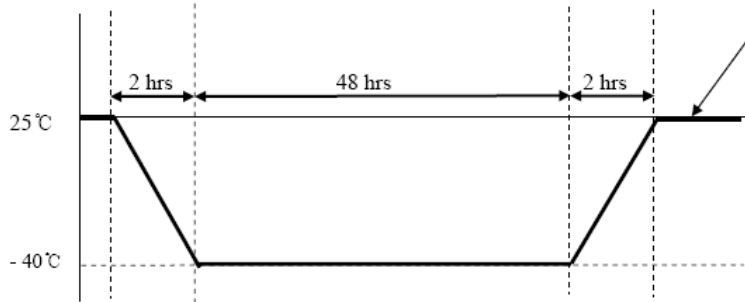


FIGURE 8. Low Temperature soaking

5.2 HIGH TEMPERATURE SOAKING

The antenna should be placed in an environmental chamber at +85°C for 48 hours. Soak antenna at ambient temperature at least 1 hour after the test.

After test is complete, the antenna should function mechanically. Electrical characteristics should be within the specified range

안

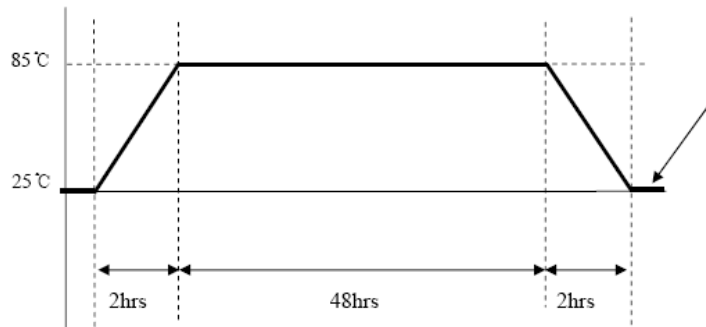


FIGURE 9. High Temperature soaking

5.3 THERMAL SHOCK TEST

Place the antenna in an environmental chamber at temperature T1=-40°C. Expose antenna to this temperature during 45 minutes. Then expose antenna at temperature T2=+85°C during 45 minutes. Transfer time is 5 min.

Repeat this cycle 27 times.

After test is complete, there shall be no visual deterioration or damage. Electrical characteristics should be within the specified range.

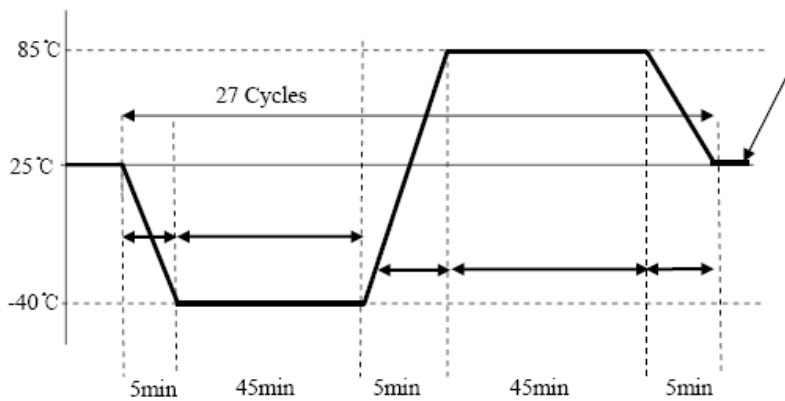


FIGURE 10. Thermal Shock Test

5.4 STATIC HUMIDITY TEST

Place the complete in an environmental chamber at +25°C. Then increase temperature during 1 hour to +60° C with humidity increasing to 95% RH during 1 hours. Soak antenna



ANTENNA SPECIFICATION

with these parameters for 48 hours. After the finish initial ambient parameters should be achieved during 1 hour.

After test is complete, there shall be no visual degradation in esthetical and mechanical performance. Electrical characteristics should be within the specified range.

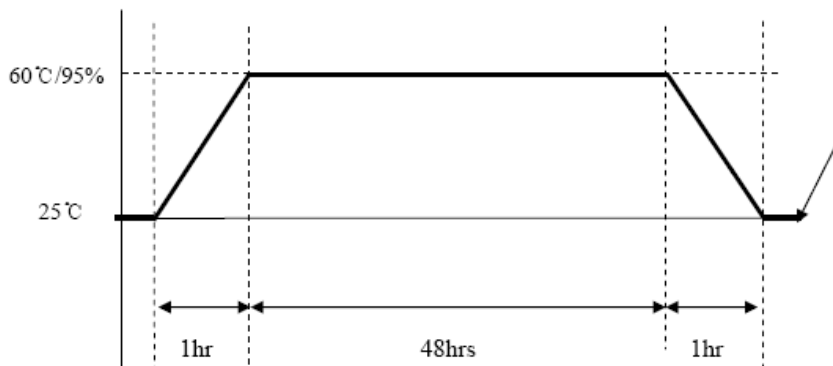


FIGURE 11. Static Humidity Test

5.5 SALT SPRAY (CORROSION) TEST

Place complete antenna in Salt Spray Cabinet at temperature +35°C with the salt fog of NaCl solution (5%); soak time - 48 hours.

After test is complete, there shall be no visual degradation in esthetical and mechanical performance. Electrical characteristics should be within the specified range.

6.0 QUALIFICATION

The mechanical and environmental tests mentioned above are performed according to the flow chart shown in Figure 12 below. The entire testing procedure will be conducted according to EN006E. A summary report of the results of the tests will be sent to the customer. Galtronics will not start mass production until the customer will grant the product a qualified status.

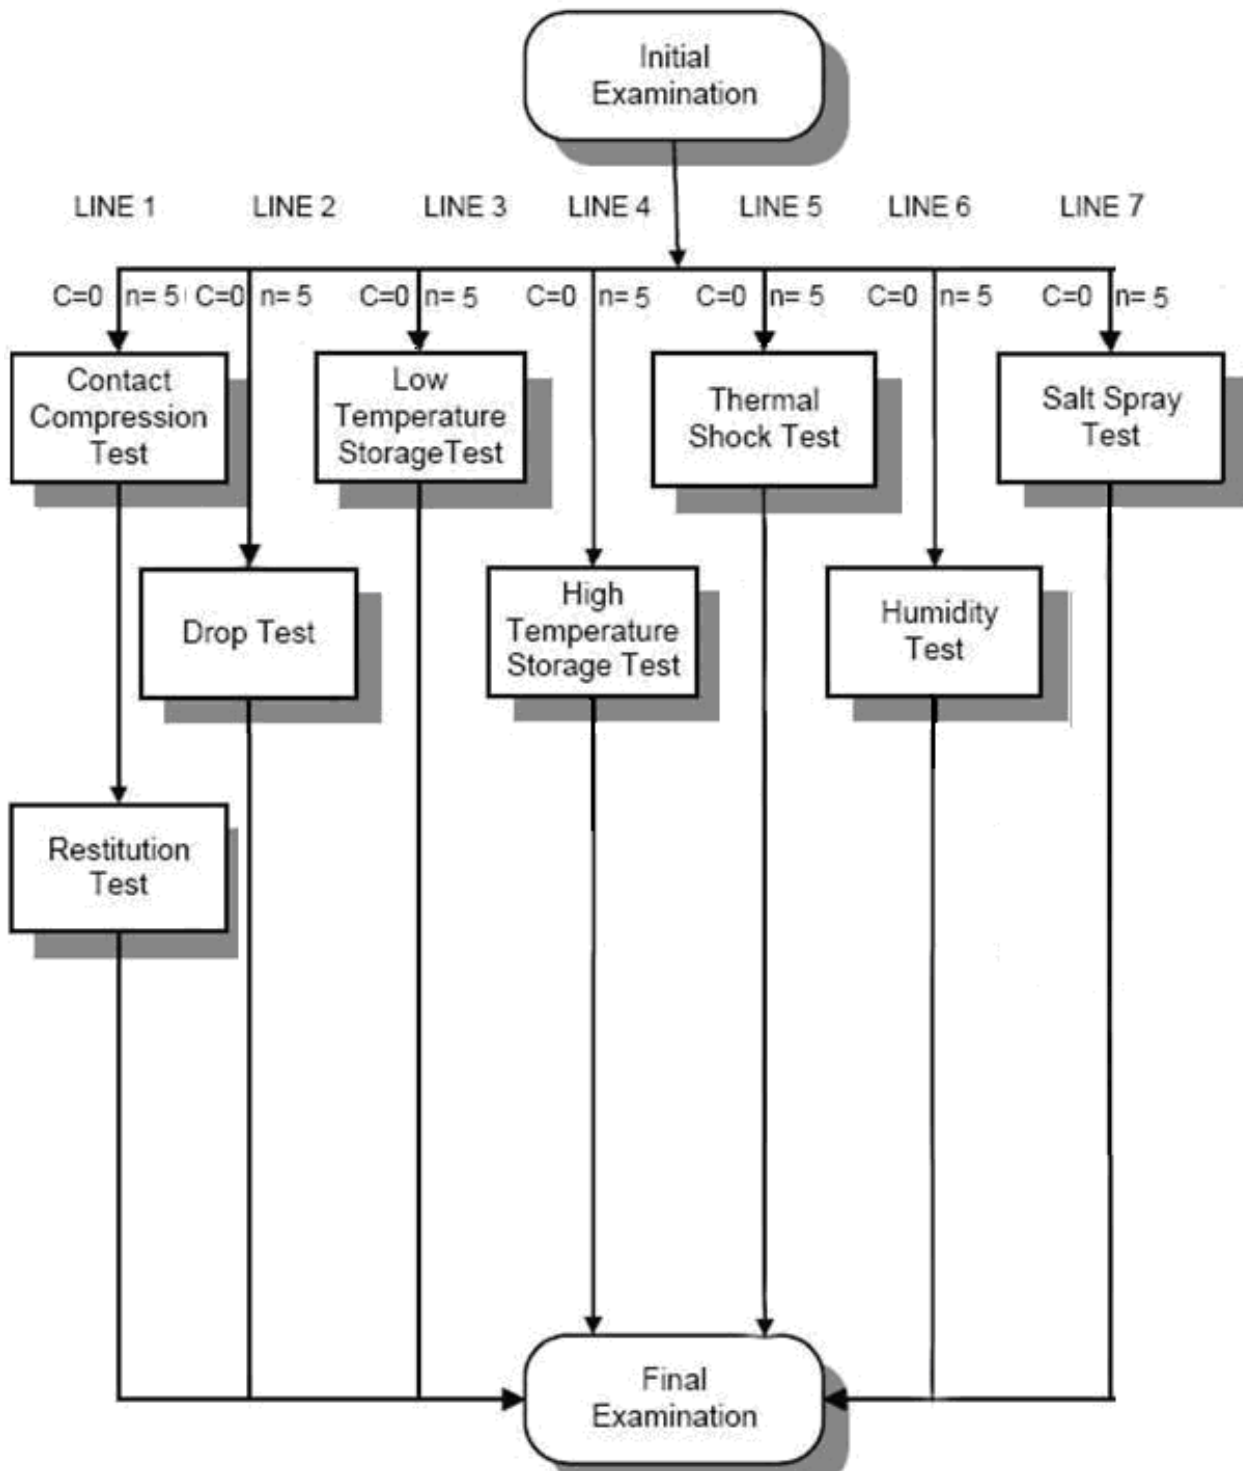


Figure 12. Property Verification test Flow Chart
Note: n - sample size; c - allowable amount of critical failure


7.0 APPENDIX AND CERTIFICATION

7.1 ELECTRICAL DATA (VSWR AND JIG DATA)



ANTENNA SPECIFICATION

7.2 PRODUCT DRAWING

DWG No 02036075-04695		 GALTRONICS	
DRAWING COVER SHEET			
REV	ISSUE DATE	ECO #	DESCRIPTION
APPLICABLE SPEC'S:			INTERNAL DISTRIBUTION
SURFACE FINISH, MICROMETERS, CLA (UNLESS STATED) 0.8 TOLERANCES UNLESS OTHERWISE SPECIFIED: NO PLACE (X)±1 TWO PLACE (X.XX)±0.1 ONE PLACE (X.X)±0.2 THREE PLACE (X.XXX)±0.05			<input checked="" type="checkbox"/> PROCESS <input checked="" type="checkbox"/> PURCHASING <input type="checkbox"/> PRODUCTION <input type="checkbox"/> PLASTICS <input checked="" type="checkbox"/> QUALITY <input checked="" type="checkbox"/> INCOMING INSPECTION <input type="checkbox"/> FINAL INSPECTION <input type="checkbox"/> MARKETING
METRIC SCREW THREAD TO ISO STANDARDS 724, 2861, 965-1 AND 965-2 INCHES SCREW THREAD TO ANSI/ASME B1.1. ALL ANGLES TO BE 90° UNLESS OTHERWISE STATED. TOLERANCE ON ANGLES ±/4° ALL TOLERANCES APPLY AFTER FINISHING. MACHINE CORNER RADS, 0.25 MAX., TO BE FREE FROM BURRS, SHARP EDGES AND ALL FOREIGN MATERIALS. FLASH ALLOWANCE FOR PLASTIC MOLDED PARTS TO BE 0.1mm UNLESS OTHERWISE STATED. DIAMETER MUST BE CONCENTRIC WITHIN 0.08 T.I.R., ENVIRONMENTAL REQUIREMENTS; COMPLIANCE WITH GALTRONICS STANDARD "SUPPLIER ENVIRONMENTAL DECLARATION PROCEDURE"(SOPG002E)			
QUALITY ASSURANCE NOTES:		<input checked="" type="checkbox"/> XR PROCESS CONTROL CHART REQUIRED WITH EACH SHIPMENT <input type="checkbox"/> CRITICAL DIMENSION AFFECTS FORM FIT OR FUNCTION	
NO CHANGE SHALL BE ALLOWED ON PRODUCTION. MATERIAL WITHOUT PRIOR EXPLICIT WRITTEN APPROVAL BY GALTRONICS ENGINEERING AND PURCHASING DEPARTMENTS FOR SPECIAL REQUIREMENTS SEE FM149			
SUFFIX #	DESCRIPTION		
03	Finished Piece Part		
SEE NOTE		GALTRONICS LTD.2007 THE DRAWING AND INFORMATION ON THIS PRINT ARE GALTRONICS- CONFIDENTIAL AND PROPRIETARY INFORMATION - MAY NOT BE COPIED OR DISCLOSED	
INTERNAL ANTENNA DIRECT CONTACT CDMA/USPCS		CHKD: ..	DWG. No.
		APRVD: ..	02036075-04695
		DATE ..	REV. P1 PAGE 1 OF 2

CONFIDENTIAL / P10237

FIGURE 13. COVER SHEET OF PRODUCT DRAWING



ANTENNA SPECIFICATION

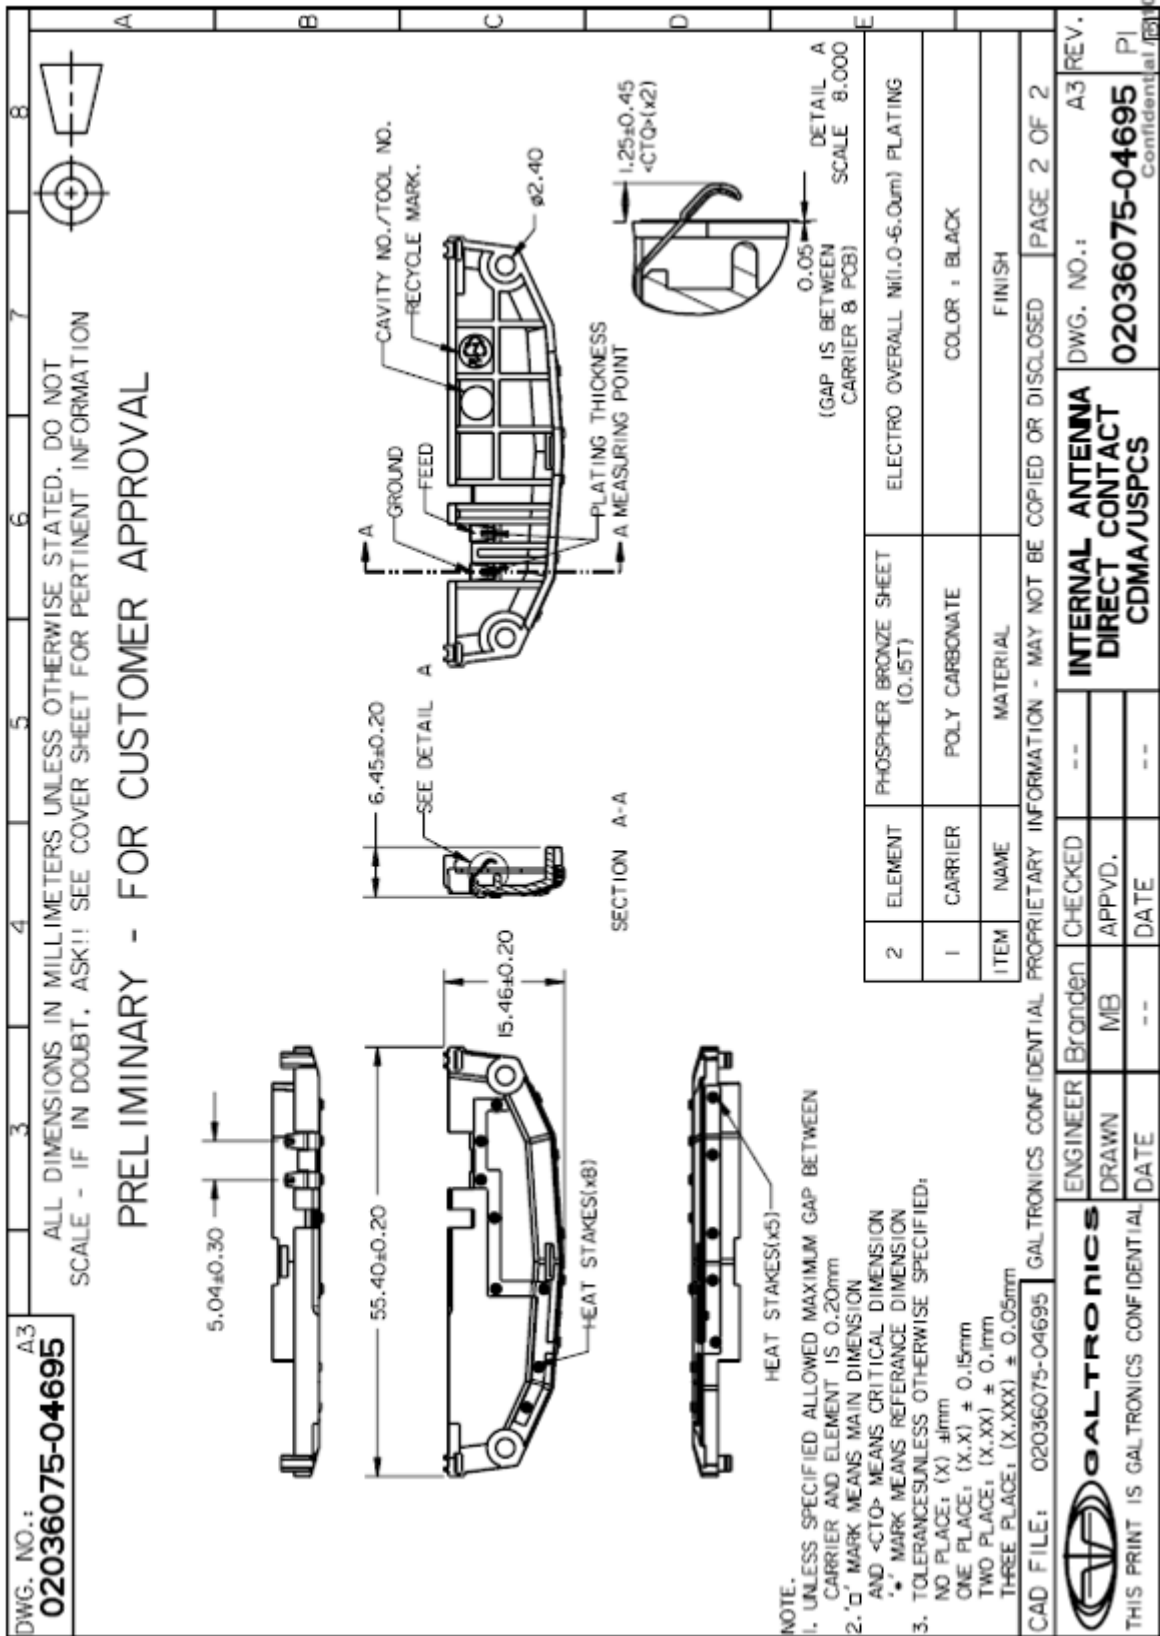


FIGURE 14. PRODUCT DRAWING



ANTENNA SPECIFICATION

7.3 PACKING

TBD

7.4 LOT MARKING INFORMATION

Lot Number is made by laser marking on the carrier bottom or upper side.

