



FCC / IC TEST REPORT

for

47 CFR Part 22H, 24E, RSS-128, RSS-133

Equipment : FLYBOOK
Trade Name : DIALOGUE
Model No. : V33iG-W-B
FCC ID : JYV-V33IG-W-B
IC ID : 4947A-V33IG-W-B
Tx Frequency Range : GSM 850: 824.2~848.8MHz
: PCS 1900: 1850.2~1909.8MHz
Max. ERP/EIRP Power : GSM 850: 0.03W
: PCS 1900: 0.56W
Emission Designator : 300 KGXW
Applicant : Dialogue Technology Corp.
10F, No. 196, Sec. 2, Jungshing Rd., Shindian City, Taipei
231, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**
- The data shown in this test report were carried out on Nov. 21, 2005 at **Sporton International Inc. LAB.**

Dr. Daniel Lee
EMC/SAR Director

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

Rev. 01



Table of Contents

History of this test report.....	ii
1. General Information	1
1.1. Applicant	1
1.2. Manufacturer	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Feature of Equipment under Test	2
1.5. Report Date.....	2
2 Test Configuration of Equipment under Test.....	3
2.1. Test Manner	3
2.2. Test Mode	3
2.3. Connection Diagram of Test System	3
2.4. Ancillary Equipment List.....	3
3. General Information of Test Site	4
3.1. Test Voltage	4
3.2. Test in Compliance with	4
3.3. Frequency Range Investigated	4
3.4. Test Distance	4
4. Test Data and Test Result.....	5
4.1. List of Measurements and Examinations	5
4.2. RF Output Power	6
4.3. ERP / EIRP Measurement	7
4.4. Occupied Bandwidth and Band Edge Measurement	10
4.5. Conducted Emission	19
4.6. Field Strength of Spurious Radiation	29
4.7. Frequency Stability (Temperature Variation)	42
4.8. Frequency Stability (Voltage Variation).....	44
5 List of Measurement Equipments	45
6 Uncertainty Evaluation.....	46
Appendix A. Photographs of EUT External	
Appendix B. Photographs of EUT Internal	
Appendix C. Photographs of Setup	



History of this test report

Report Issue Date: Nov. 29, 2005

Report No.	Description



1. General Information

1.1. Applicant

Dialogue Technology Corp.

10F, No. 196, Sec. 2, Jungshing Rd., Shindian City, Taipei 231, Taiwan, R.O.C.

1.2 Manufacturer

Tak-Lin's Electronics Co., Ltd.

5F, No. 782, Chung Cheng Rd., Chung Ho City, Taipei Hsien, Taiwan, R.O.C.

1.3 Basic Description of Equipment under Test

Equipment : FLYBOOK
Trade Name : DIALOGUE
Model No. : V33iG-W-B
FCC ID : JYV-V33IG-W-B
IC ID : 4947A-V33IG-W-B

**1.4 Feature of Equipment under Test**

DUT Type :	FLYBOOK
Trade Name :	DIALOGUE
Model Name :	V33iG-W-B
FCC ID :	JYV-V33IG-W-B
IC ID :	4947A-V33IG-W-B
Tx Frequency :	GSM 850: 824.2~848.8 MHz PCS 1900: 1850.2~1909.8 MHz Bluetooth: 2400~2483.5 MHz
Rx Frequency :	GSM 850: 869.2~893.8 MHz PCS 1900: 1930.2~1989.8 MHz Bluetooth: 2400~2483.5 MHz
Antenna Type :	Fixed Internal
Maximum Output Power to Antenna :	GSM 850: 33.3 dBm PCS 1900: 29.0 dBm BT: 2.08 dBm
Maximum ERP/EIRP :	GSM 850: 0.03 W (14.57 dBm) PCS 1900: 0.56 W (27.49 dBm)
Power Rating (DC/AC, Voltage) :	4V / 3.2A
Digital Modulation Emission :	GMSK
Type of Emission :	300 KGXW
DUT Stage :	Production Unit

1.5 Report Date

EUT Received : Oct. 21, 2005

Report Date : Nov. 29, 2005

2 Test Configuration of Equipment under Test


2.1 Test Manner

- The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range.
- During all testings, EUT is in link mode with base station emulator at maximum power level. (PCL=5 for GSM 850 or PCL=0 for PCS 1900)
- Frequency range investigated: radiated emission 30 MHz to 9000 MHz for GSM850; 30MHz to 19000 MHz for PCS 1900.

2.2 Test Mode

Application	GSM 850	PCS 1900
Radiated Emission	☒ Mode 1: CH 189	☒ Mode 3: CH 661
	☒ Mode 2: CH 189 + Bluetooth CH00	☒ Mode 4: CH 661+Bluetooth CH00
Conducted Measurement	☒ Mode 1: CH 189	☒ Mode 2: CH 661

2.3 Connection Diagram of Test System

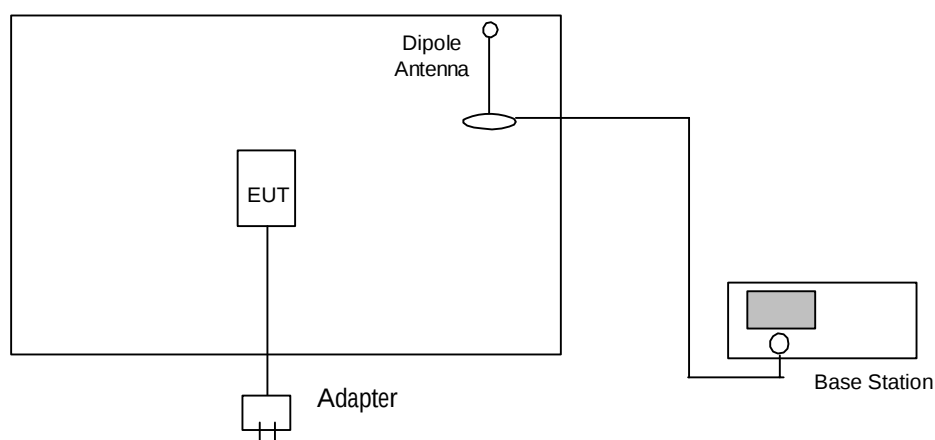

2.4 Ancillary Equipment List

Item	Equipment	Model No.	Serial No.
1.	Base Station(R&S)	CMU200	N/A



3. General Information of Test Site

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : 03CH06-HY, 05CH02-HY

The chamber meets the characteristics of ANSI C63.4-2003. This site is on file with the FCC. The Industry Canada file number for this site is IC 4088.

3.1 Test Voltage

120V/ 60Hz

3.2 Test in Compliance with

47 CFR Part 22H, 24E, Part 2, RSS-128 and RSS-133.

3.3 Frequency Range Investigated

- a. Radiation: from 30MHz to 9000MHz for GSM 850.
- b. Radiation: from 30 MHz to 19000 MHz for PCS 1900.

3.4 Test Distance

The test distance of radiated emission from antenna to EUT is 3 m.



4. Test Data and Test Result

4.1 List of Measurements and Examinations

FCC Rule	IC Rule	Description of Test	Result	Section
§2.1046	RSS-128 §7.1 RSS-133 §6.2	RF Output Power	Passed	4.2
§ 22.913 §24.232	RSS-128 §7.1 RSS-133 §6.2	ERP / EIRP	Passed	4.3
§2.1049, § 22.917, § 24.238(b)	RSS-128 §7.4 RSS-133 §6.3	Occupied Bandwidth & Band Edge Measurement	Passed	4.4
§2.1051	RSS-128 §7.4 RSS-133 §6.3	Conducted Emission	Passed	4.5
§2.1053	RSS-128 §7.4 RSS-133 §6.3	Field Strength of Spurious Radiation	Passed	4.6
§2.1055, § 22.355, §24.235	RSS-128 §9 RSS-133 §7	Frequency Stability vs. Temperature	Passed	4.7
§2.1055, §22.355, §24.235	RSS-128 §9 RSS-133 §7	Frequency Stability vs. Voltage	Passed	4.8

4.2 RF Output Power


4.2.1 Measurement Instruments :

As described in chapter 5 of this test report.

4.2.2 Test Procedure :

1. The transmitter output was connected to power meter and base station through power divider.
2. Set EUT at PCL=5 for GSM 850 and/or PCL=0 for PCS 1900 through base station.
3. Select lowest, middle, and highest channels for each band.

4.2.3 Test Setup Layout :

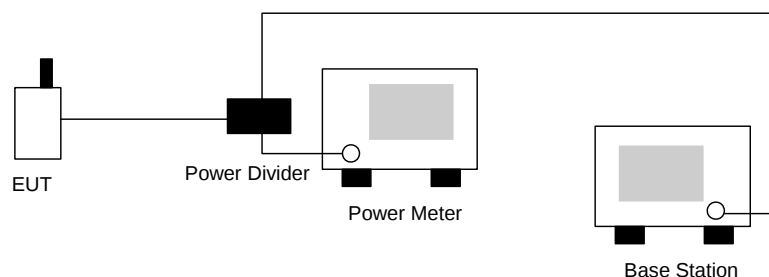

4.2.4 Test Result :

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM 850	128	824.2 (Low)	33.3	2.138
	189	836.4 (Mid)	32.8	1.905
	251	848.8 (High)	31.4	1.380

Bands	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
PCS 1900	512	1850.2 (Low)	29.0	0.800
	661	1880.0 (Mid)	28.6	0.716
	810	1909.8 (High)	28.6	0.718



4.3 ERP / EIRP Measurement

Equivalent isotropic radiated power measurements by substitution method according to ANSI/TIA/EIA-603-A.

4.3.1 Measurement Instruments

As described in chapter 5 of this test report.

4.3.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 1.5 meter height in an anechoic chamber.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiated power.
4. The height of the receiving antenna is also kept at 1.5M height.
5. Taking the record of maximum ERP/EIRP.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. The conducted power at the terminal of the Horn antenna is measured.
8. Repeat step 3 to step 5 to get the maximum ERP/EIRP of the substitution antenna.
9. $ERP/EIRP = P_s + E_t - E_s + G_s = P_s + R_t - R_s + G_s$

P_s (dBm): Input power to substitution antenna.

G_s (dBi or dBd): Substitution antenna Gain.


$E_t = R_t + AF$

$E_s + R_s + AF$

AF (dB/m): Receive antenna factor

10. R_t : the highest received signal in Spectrum Analyzer for EUT.

4.3.3 Test Setup Layout of ERP/EIRP

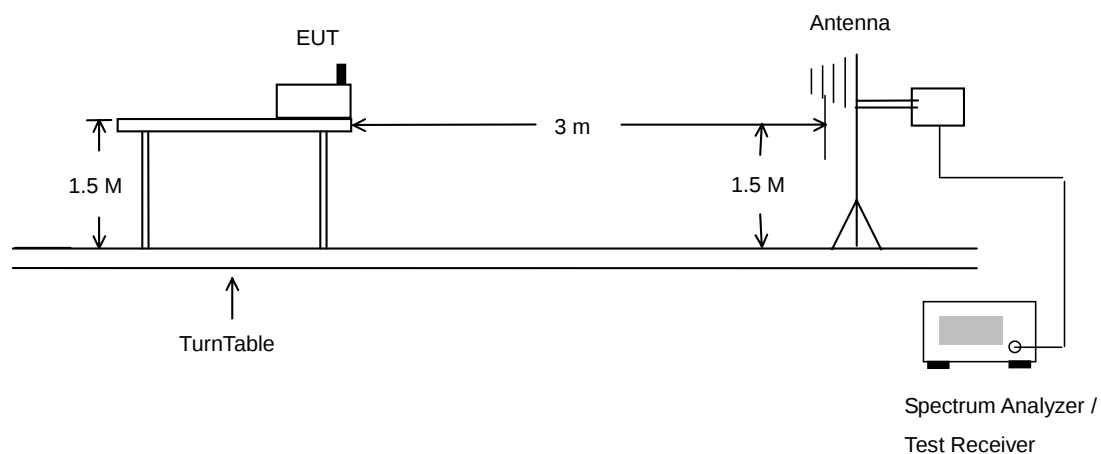

**4.3.4 Test Result**

GSM 850 Radiated Power ERP					
H Polarization			V Polarization		
Frequency (MHz)	ERP (dBm)	ERP (Watts)	Frequency (MHz)	ERP (dBm)	ERP (Watts)
824.120	12.620	0.02	824.170	14.570	0.03
836.390	11.860	0.02	836.440	13.220	0.02
848.790	11.580	0.01	848.720	12.140	0.02

PCS 1900 Radiated Power EIRP					
H Polarization			V Polarization		
Frequency (MHz)	EIRP (dBm)	EIRP (Watts)	Frequency (MHz)	EIRP (dBm)	EIRP (Watts)
1850.120	27.350	0.54	1850.190	23.860	0.24
1879.920	27.490	0.56	1879.990	23.950	0.25
1909.820	27.230	0.53	1909.820	24.070	0.26

4.4 Occupied Bandwidth and Band Edge Measurement


4.4.1 Measurement Instruments

As described in chapter 5 of this test report.

4.4.2 Test Procedure


1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The occupied bandwidth of middle channel for the highest and lowest RF powers were measured.
3. The bandedge of low and high channels for the highest RF powers within the transmitting frequency band were measured. Setting RBW as roughly BW/100.

4.4.3 Test Setup Layout

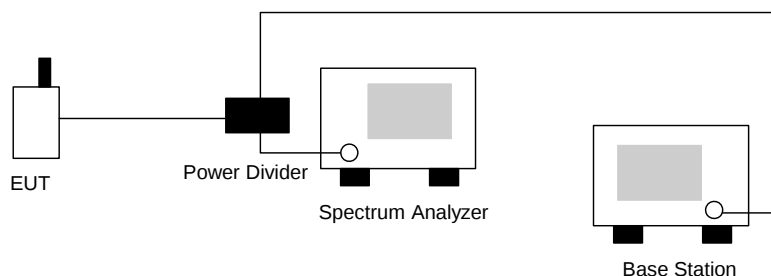

**4.4.4 Test Result**

- Test Mode : GSM 850 CH128 Lower Band Edge
- Power State : High

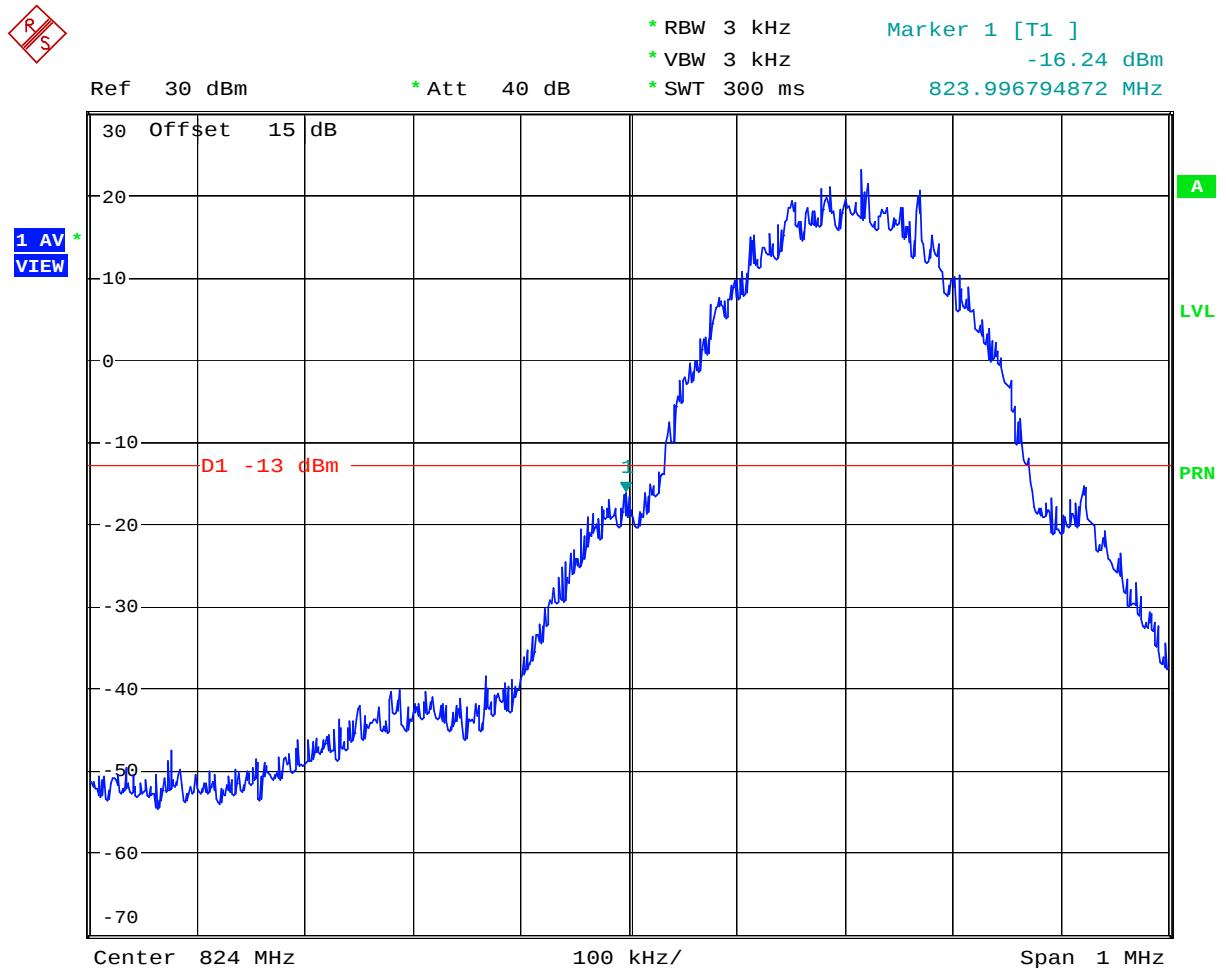


Date: 22.NOV.2005 15:57:42



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : GSM 850 CH189 99% Occupied Bandwidth
- Power State : Low

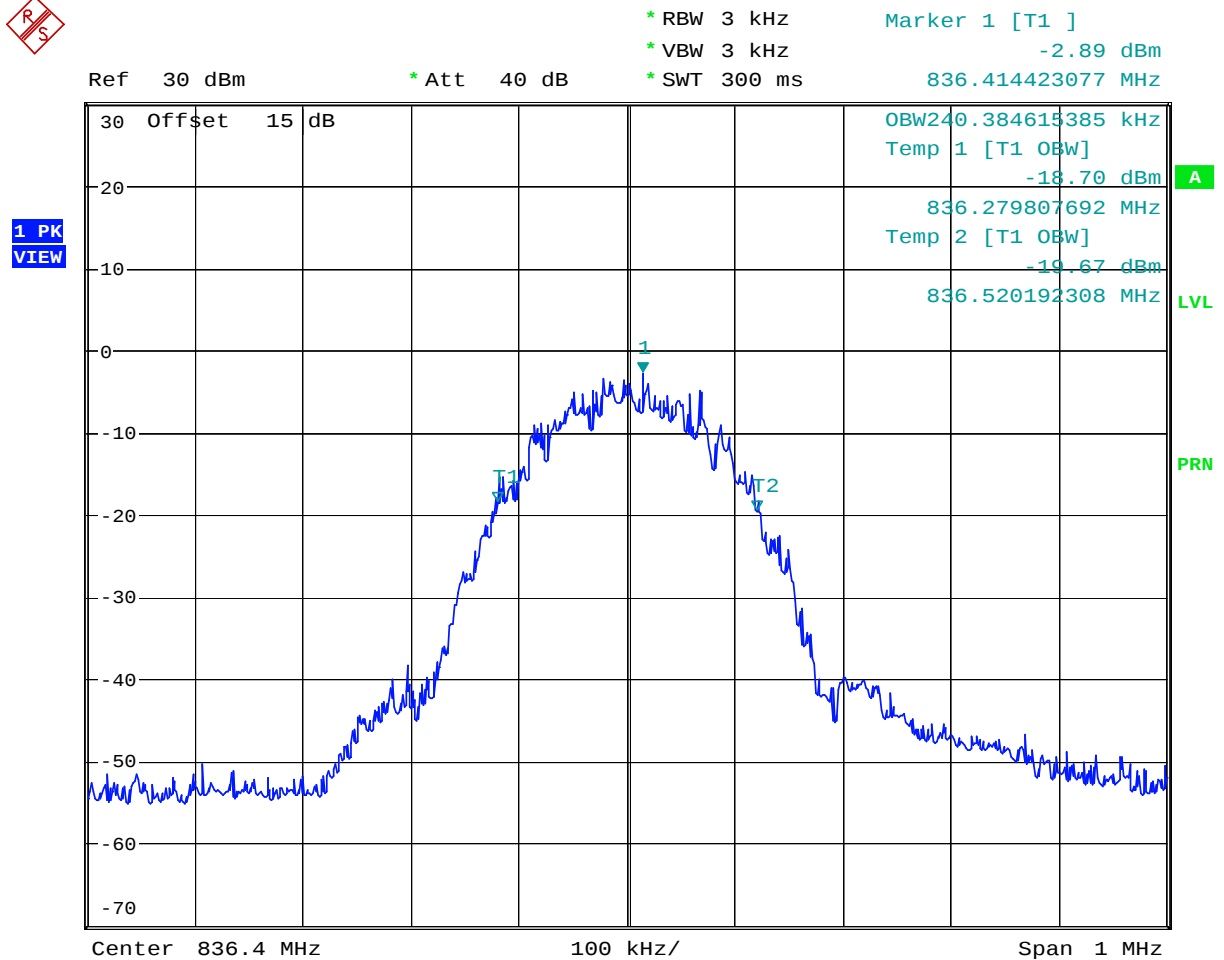

Date: 22.NOV.2005 14:13:26

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B

IC ID : 4947A-V33IG-W-B

Page No. : 12 of 46

Report Issued Date : Nov. 29, 2005


Rev. 01



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : GSM 850 CH189 99% Occupied Bandwidth
- Power State : High

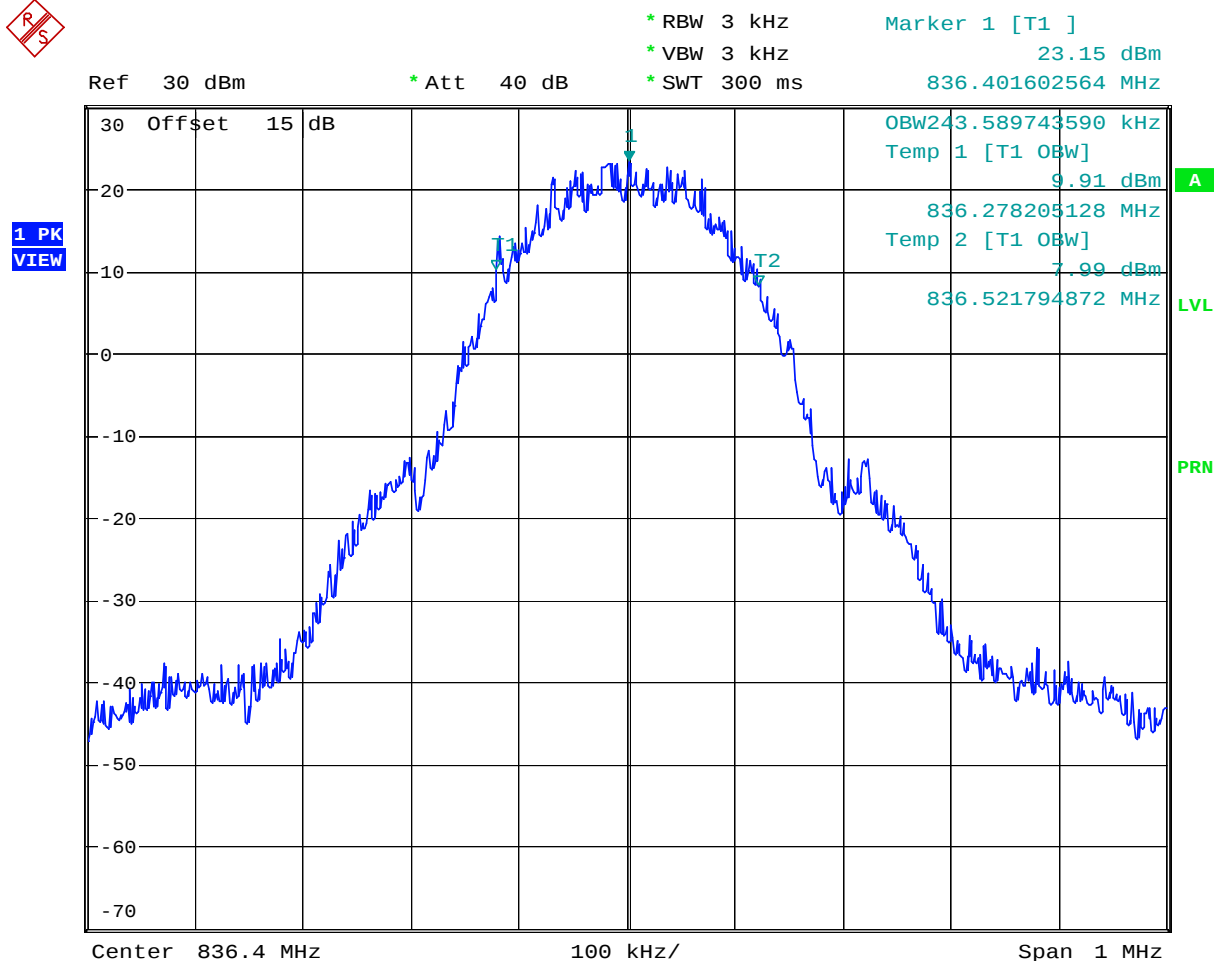

Date: 22.NOV.2005 14:12:16

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B

IC ID : 4947A-V33IG-W-B

Page No. : 13 of 46

Report Issued Date : Nov. 29, 2005


Rev. 01



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : GSM 850 CH251 Higher Band Edge
- Power State : High

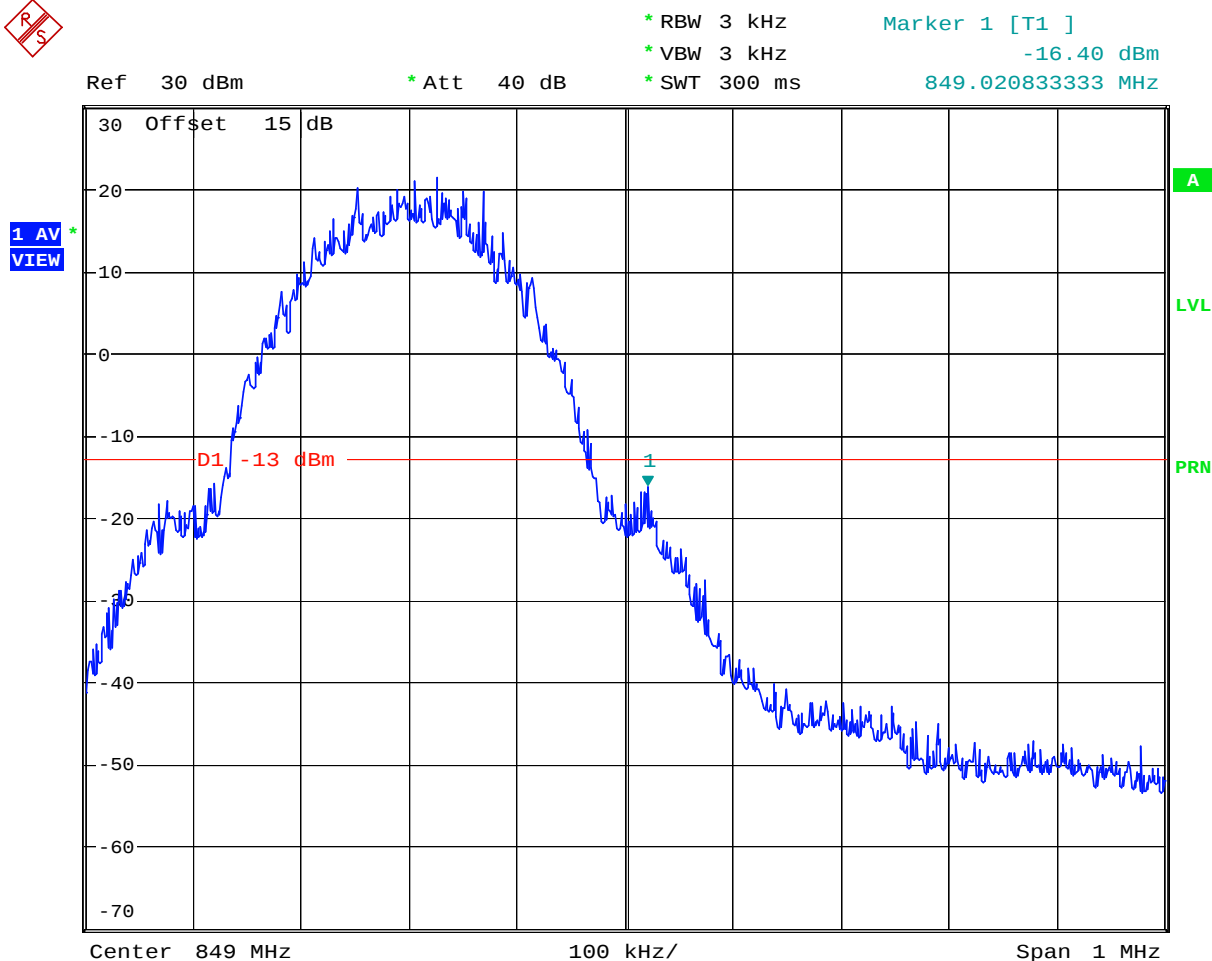

Date: 22.NOV.2005 15:59:58

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B

IC ID : 4947A-V33IG-W-B


Page No. : 14 of 46

Report Issued Date : Nov. 29, 2005

Rev. 01



- Test Mode : PCS 1900 CH512 Lower Band Edge
- Power State : High

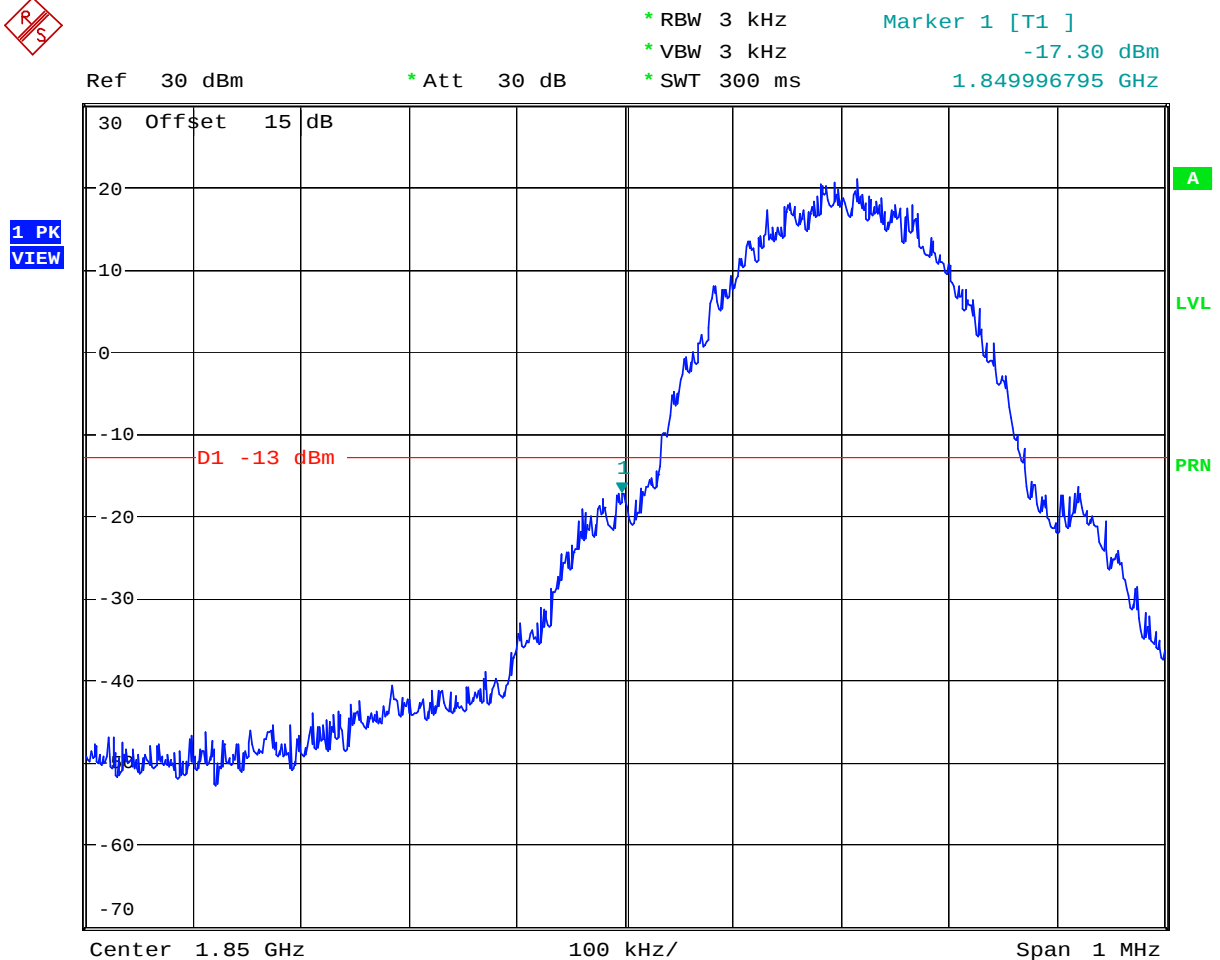


Date: 22.NOV.2005 16:14:00



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : PCS 1900 CH661 99% Occupied Bandwidth
- Power State : Low

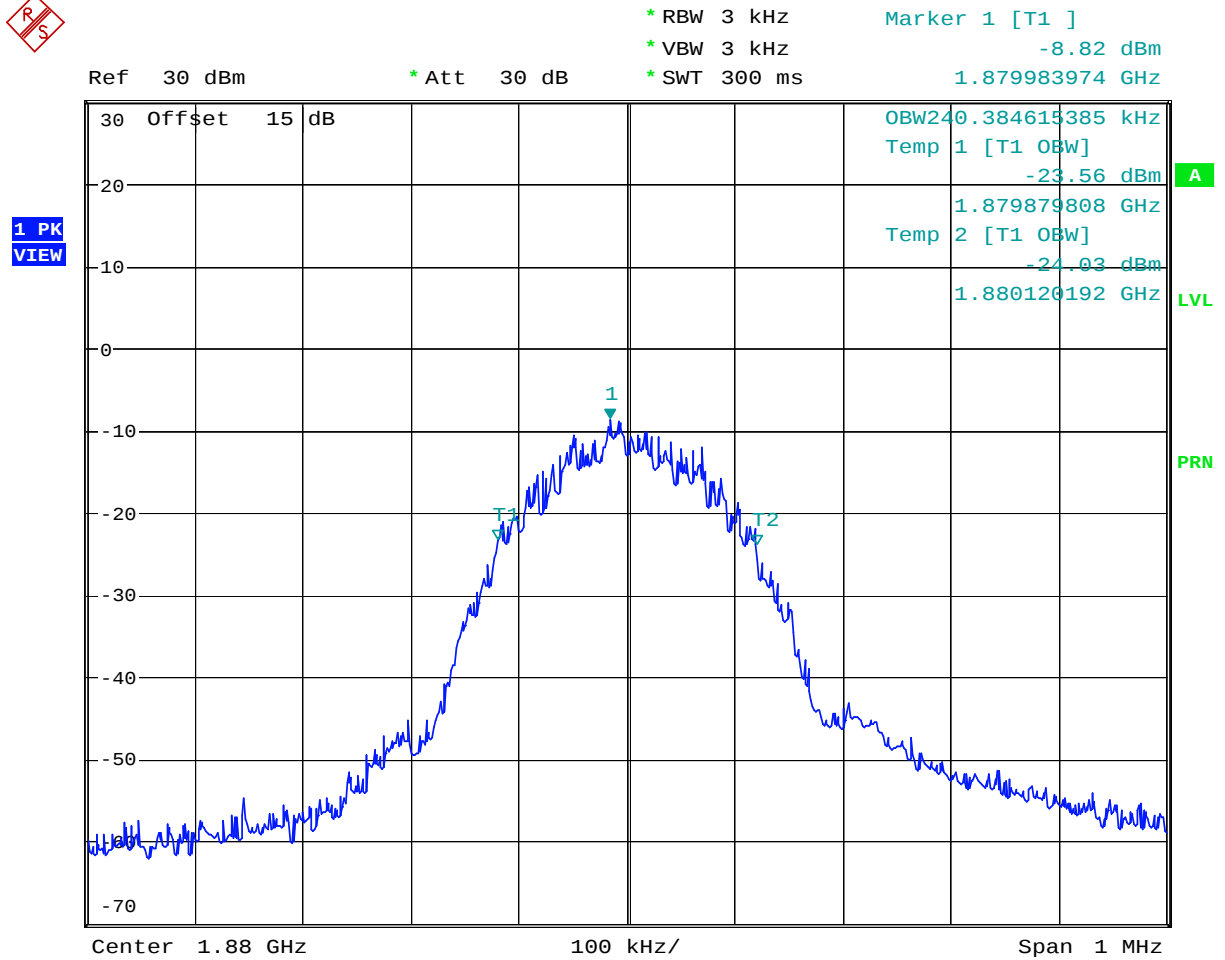

Date: 22.NOV.2005 16:11:43

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B

IC ID : 4947A-V33IG-W-B

Page No. : 16 of 46

Report Issued Date : Nov. 29, 2005


Rev. 01



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : PCS 1900 CH661 99% Occupied Bandwidth
- Power State : High

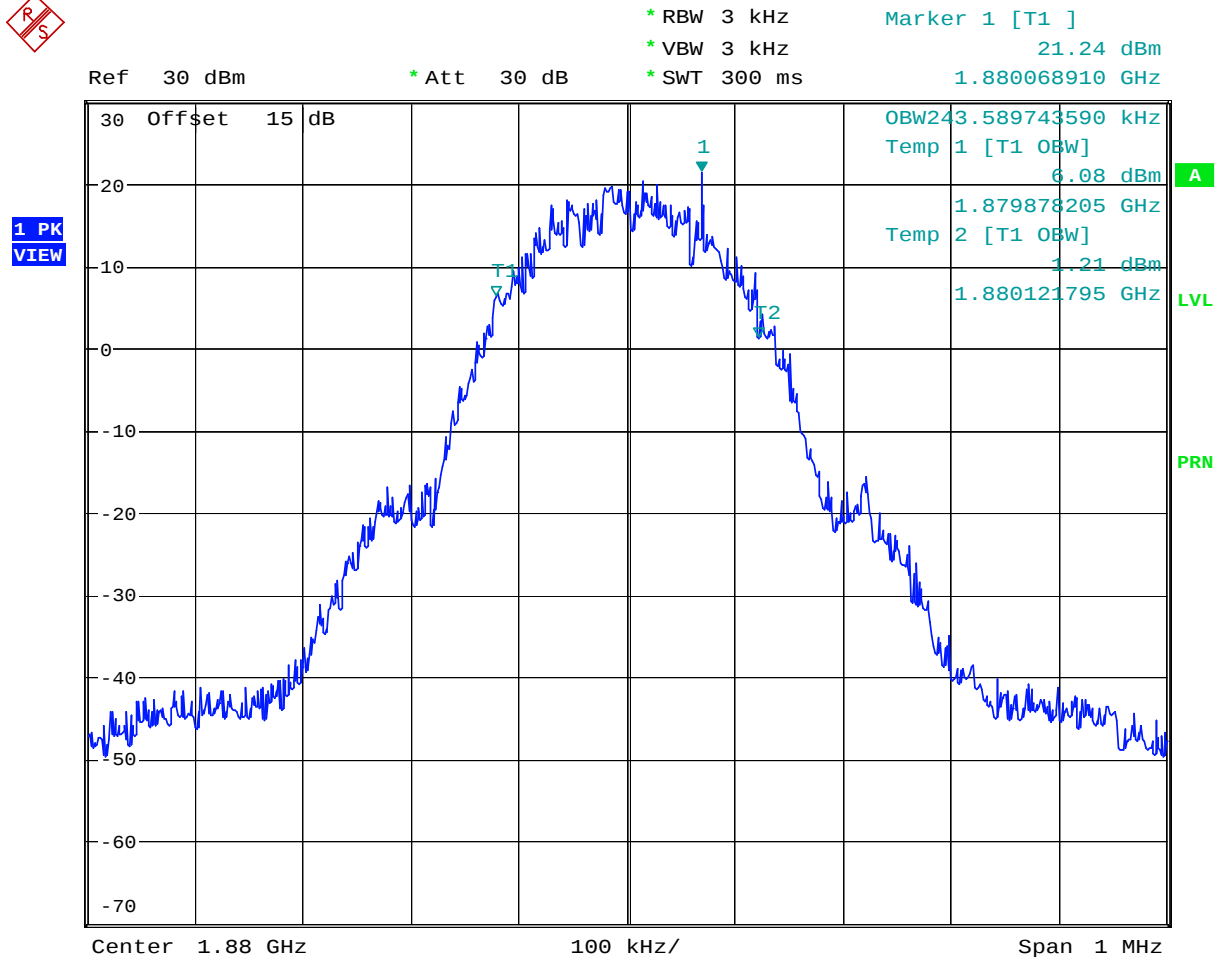

Date: 22.NOV.2005 16:10:25

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B

IC ID : 4947A-V33IG-W-B

Page No. : 17 of 46

Report Issued Date : Nov. 29, 2005


Rev. 01



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : PCS 1900 CH810 Higher Band Edge
- Power State : High

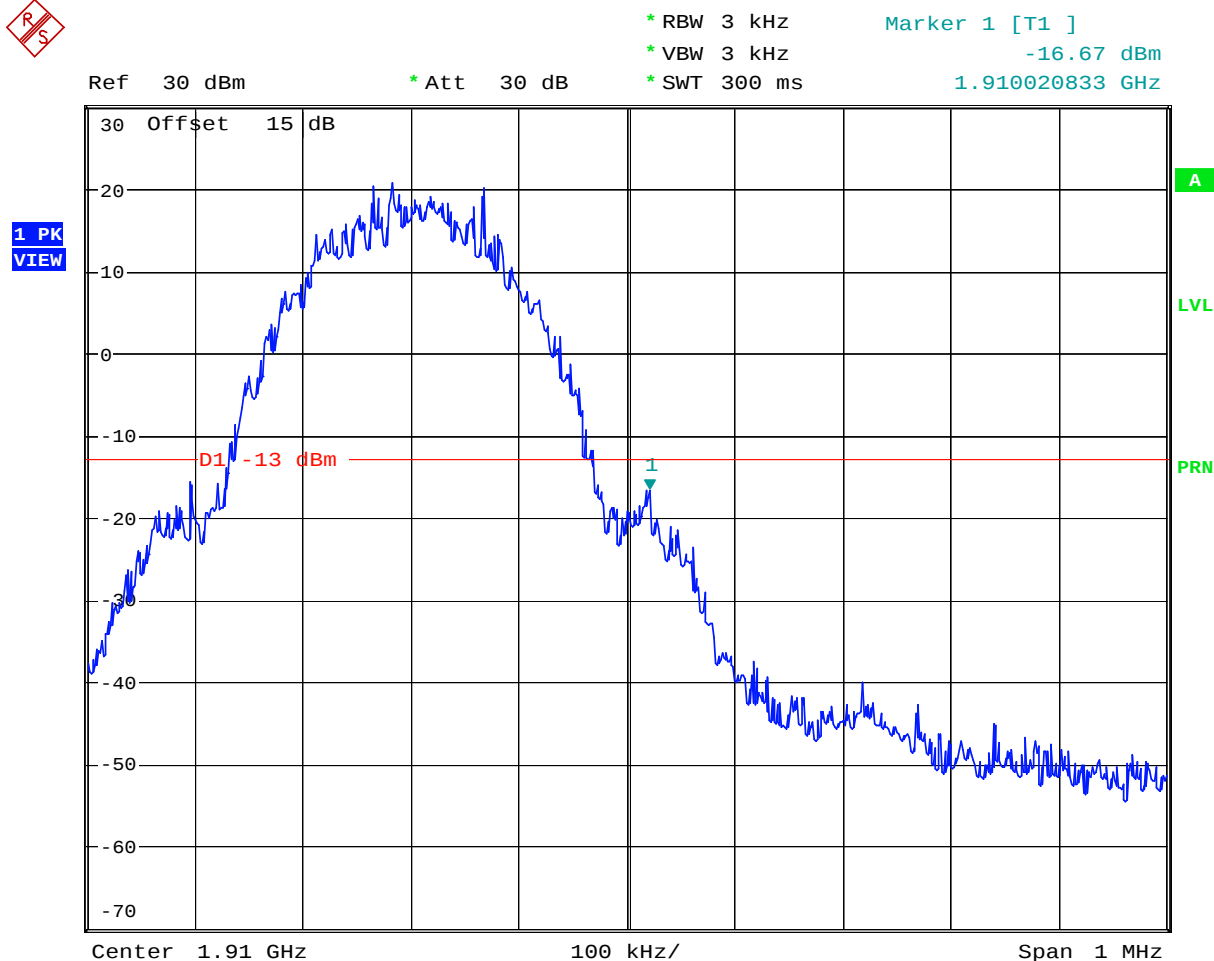

Date: 22.NOV.2005 16:14:57

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B

IC ID : 4947A-V33IG-W-B

Page No. : 18 of 46

Report Issued Date : Nov. 29, 2005

Rev. 01

4.5 Conducted Emission


4.5.1 Measurement Instruments

As described in chapter 5 of this test report.

4.5.2 Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The middle channel for the highest RF power within the transmitting frequency was measured.
3. The conducted spurious emission for the whole frequency range was taken.


4.5.3 Test Setup Layout

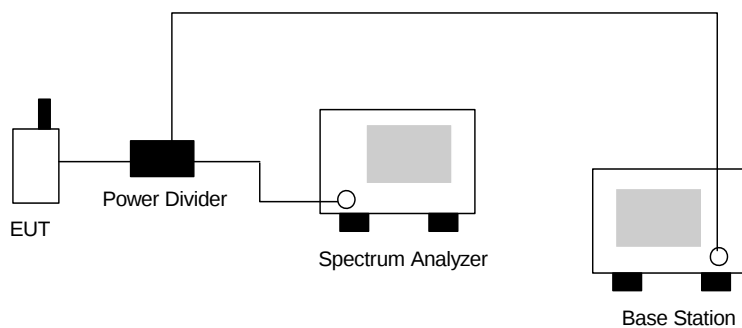




4.5.4 Test Result

- Test Mode : GSM 850 CH189
- Frequency Range : 30M-1G

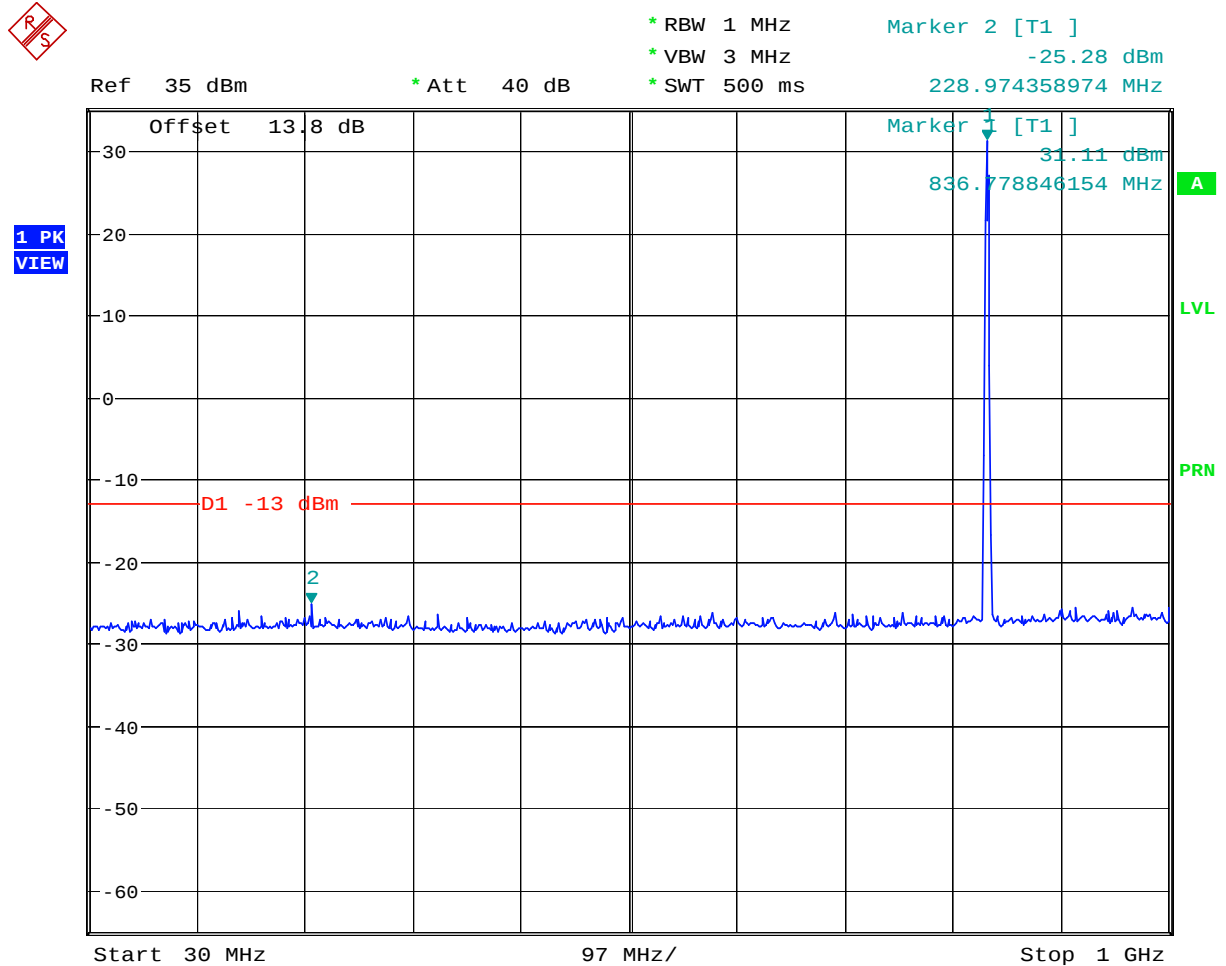

Date: 22.NOV.2005 16:05:52


- Test Mode : GSM 850 CH189
- Frequency Range : 1G-3G

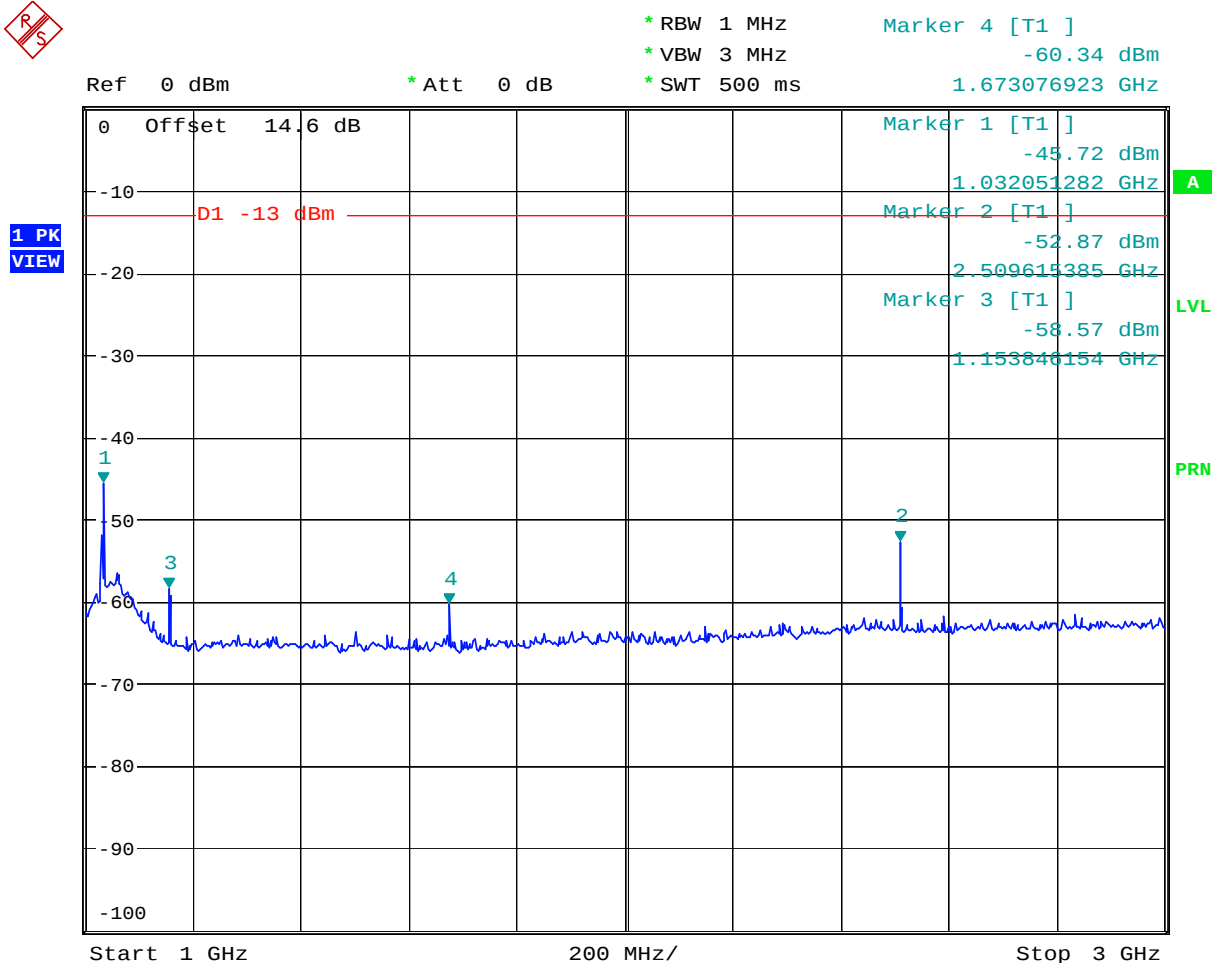

Date: 22.NOV.2005 14:30:41



- Test Mode : GSM 850 CH189
- Frequency Range : 3G-7G

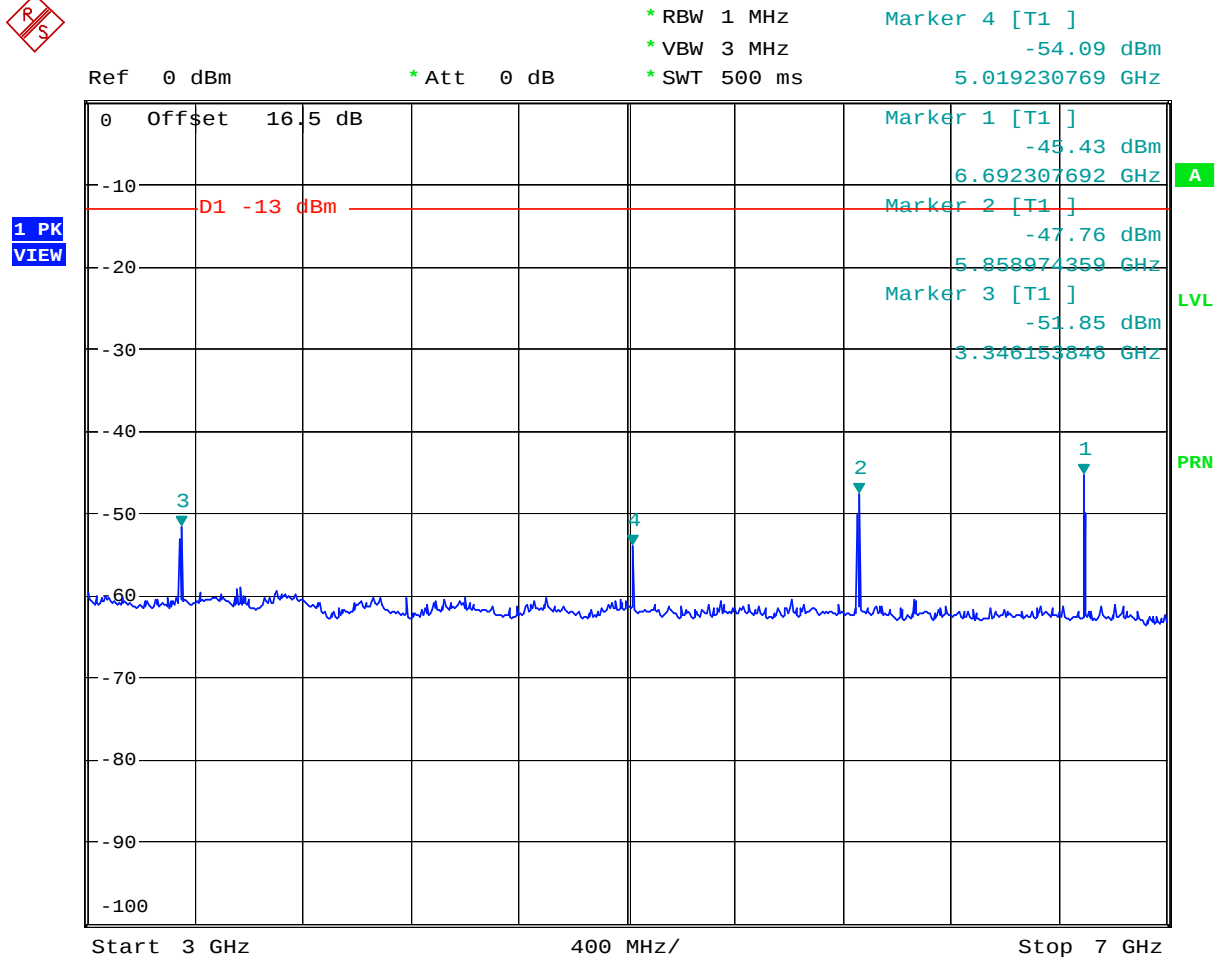


Date: 22.NOV.2005 14:27:48



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : GSM 850 CH189
- Frequency Range : 7G-9G

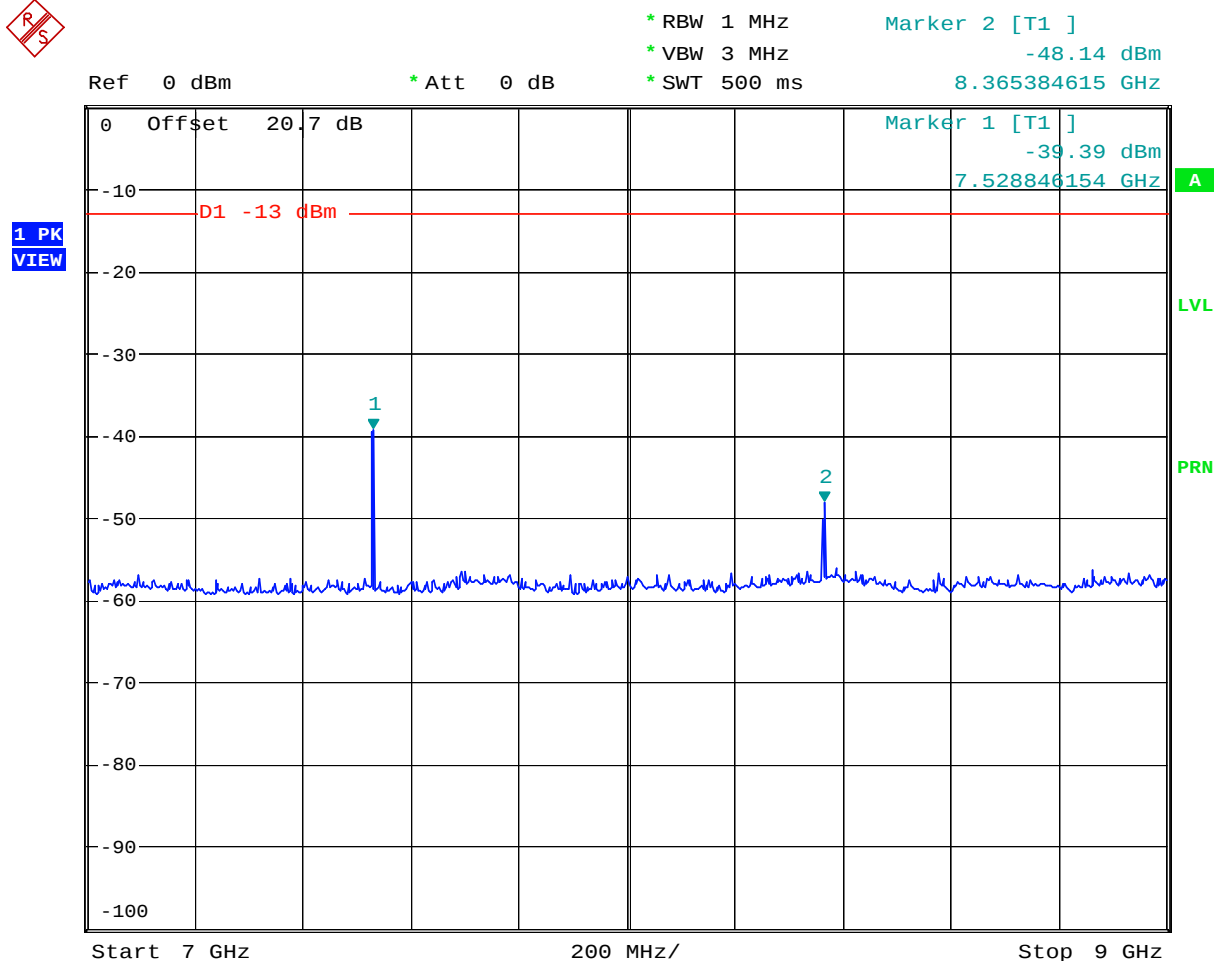

Date: 22.NOV.2005 14:32:20


SPORTON International Inc.

TEL : 886-2-2696-2468
FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B
IC ID : 4947A-V33IG-W-B
Page No. : 23 of 46
Report Issued Date : Nov. 29, 2005
Rev. 01




- Test Mode : PCS 1900 CH661
- Frequency Range : 30M-1G

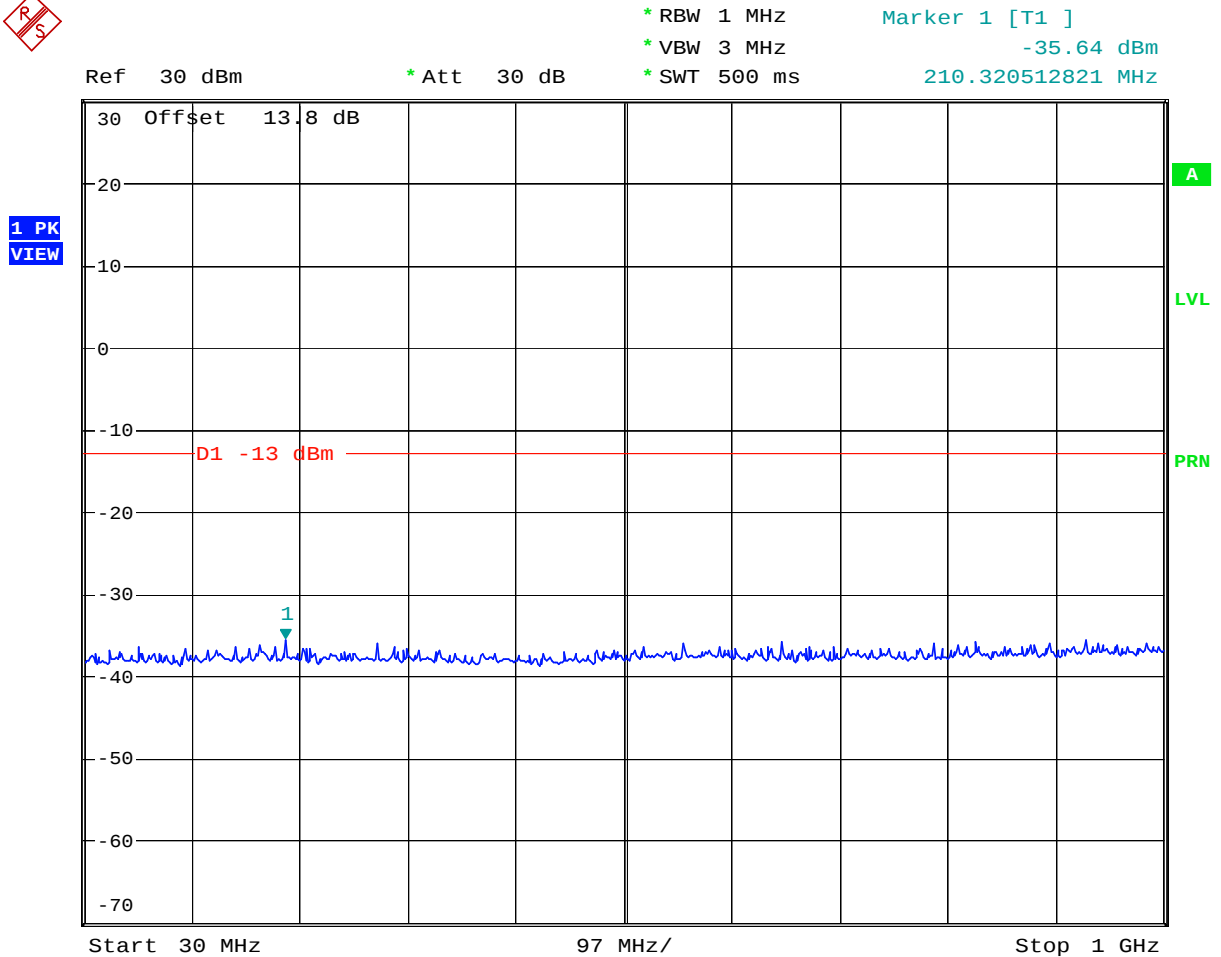

Date: 22.NOV.2005 16:18:03




- Test Mode : PCS 1900 CH661
- Frequency Range : 1G-3G

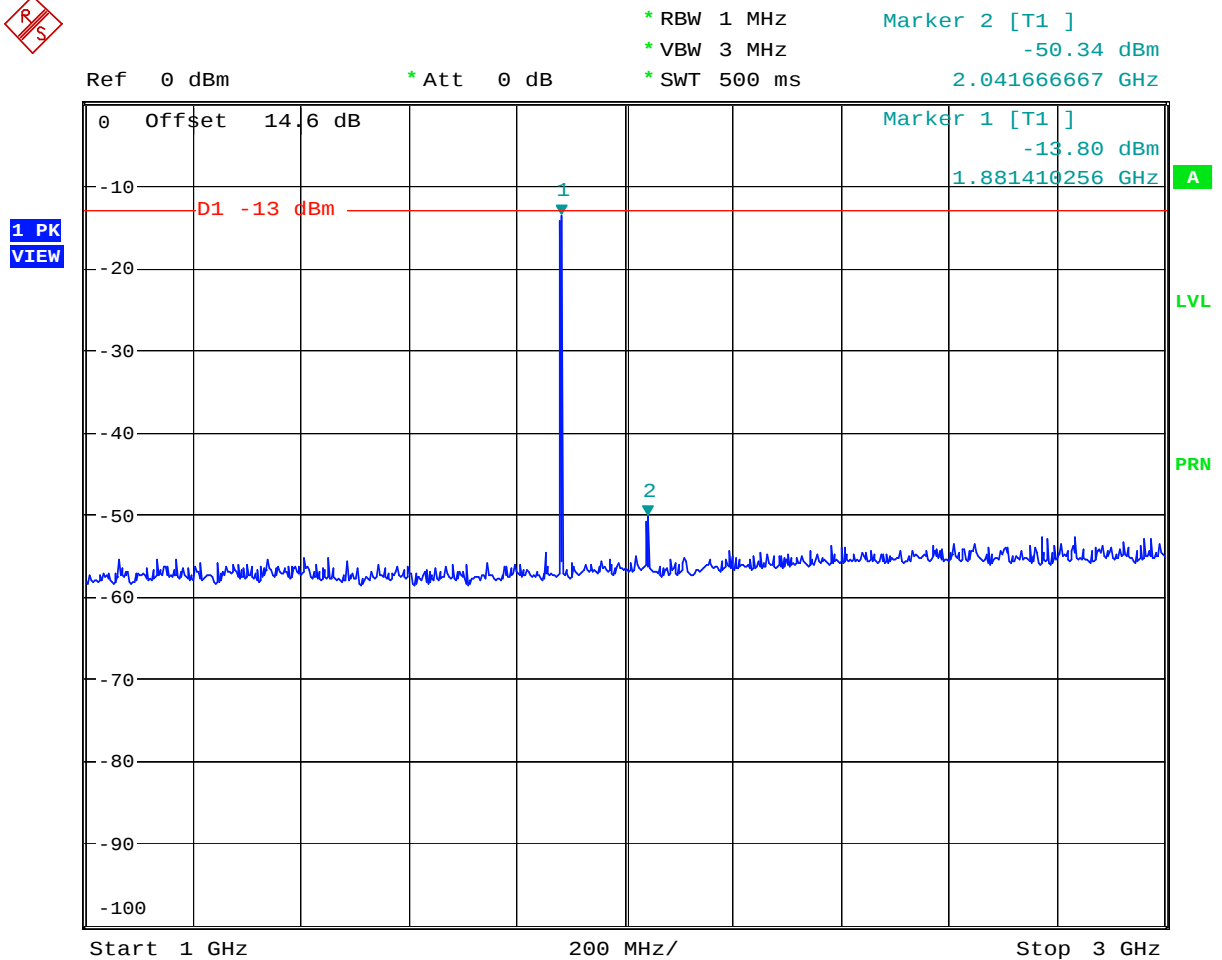

Date: 22.NOV.2005 16:27:04




- Test Mode : PCS 1900 CH661
- Frequency Range : 3G-7G

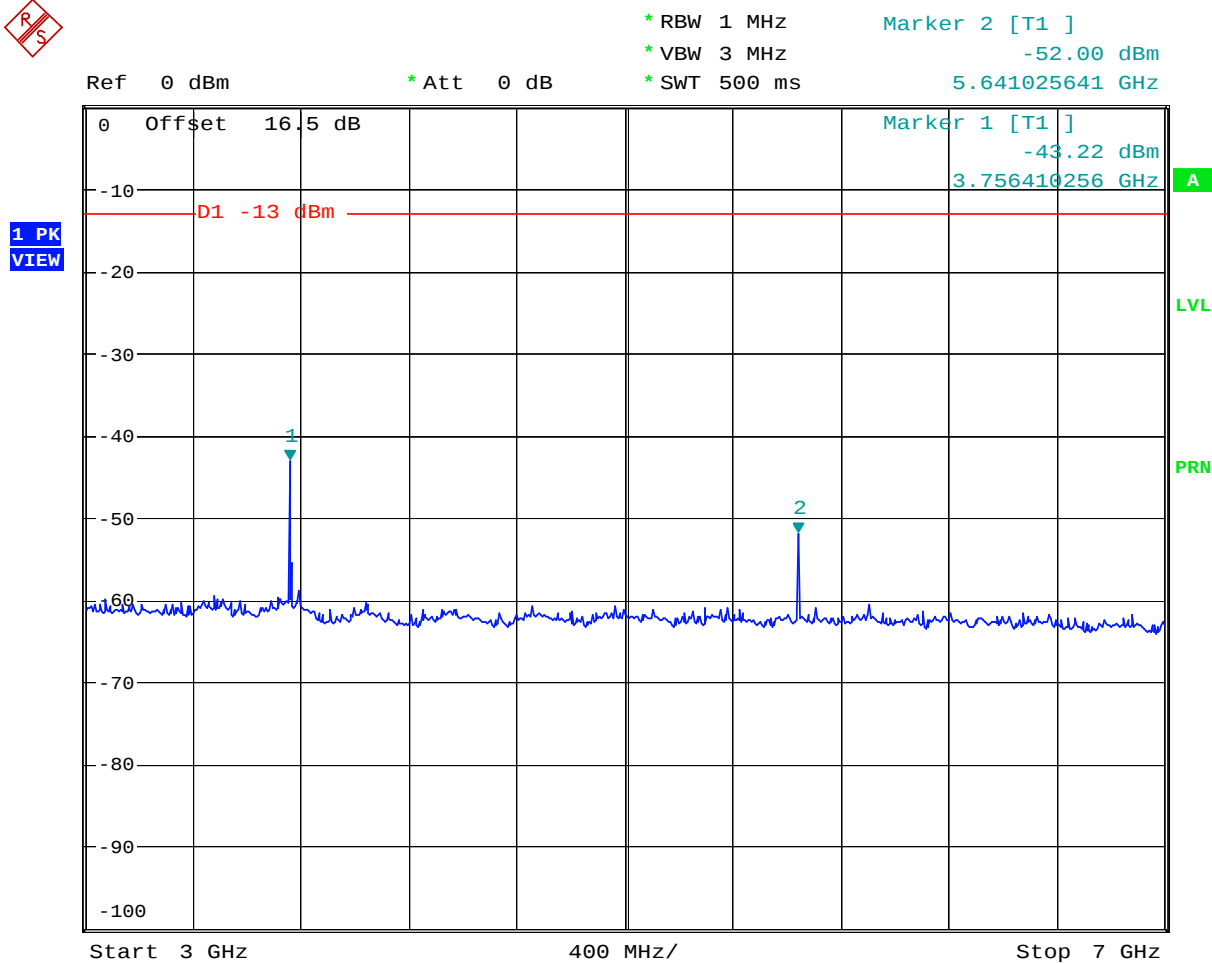

Date: 22.NOV.2005 16:28:16

- Test Mode : PCS 1900 CH661
- Frequency Range : 7G-13.6G

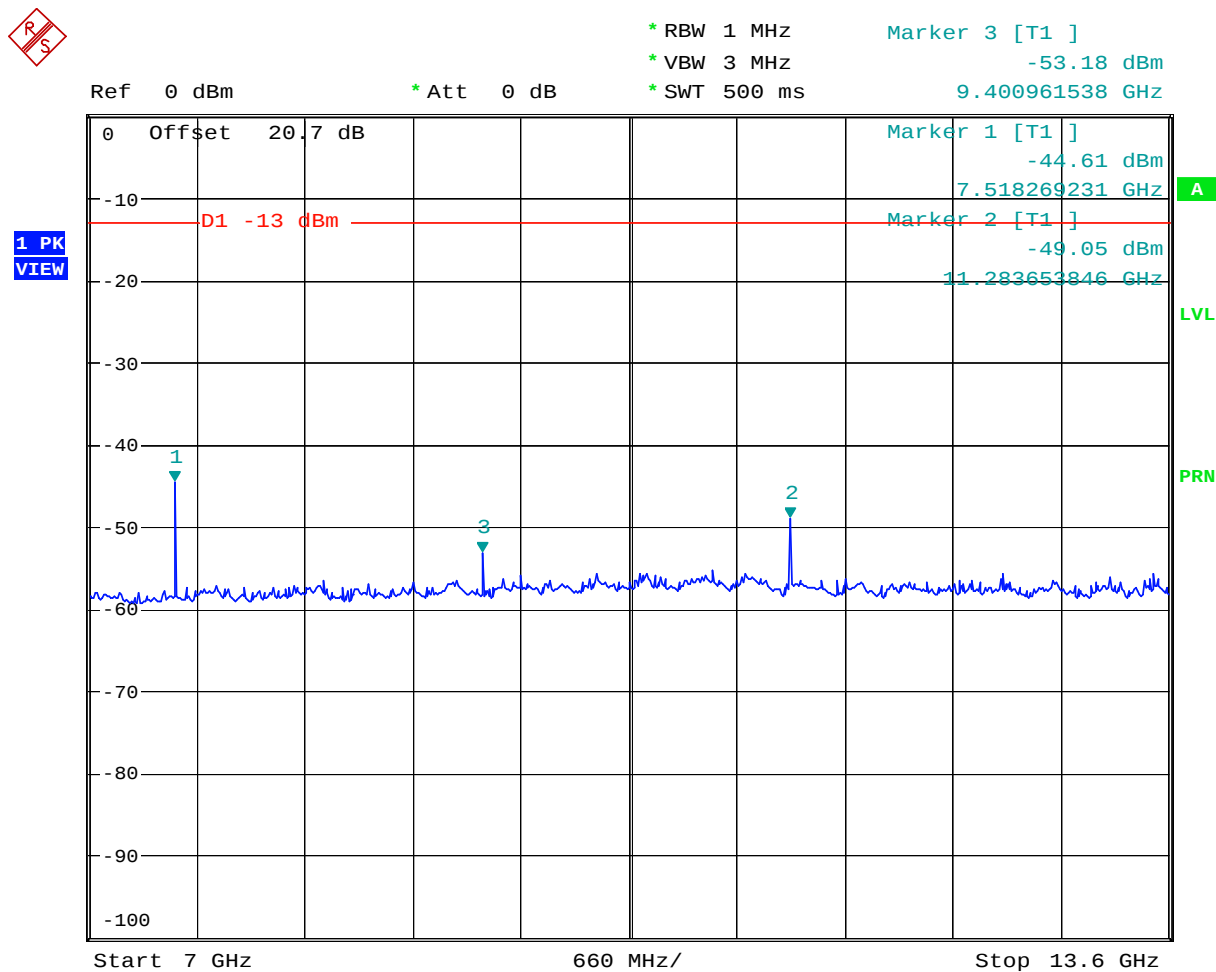


Date: 22.NOV.2005 16:29:39



FCC / IC TEST REPORT

Report No. : FG590924

- Test Mode : PCS 1900 CH661
- Frequency Range : 13.6G-19.1G

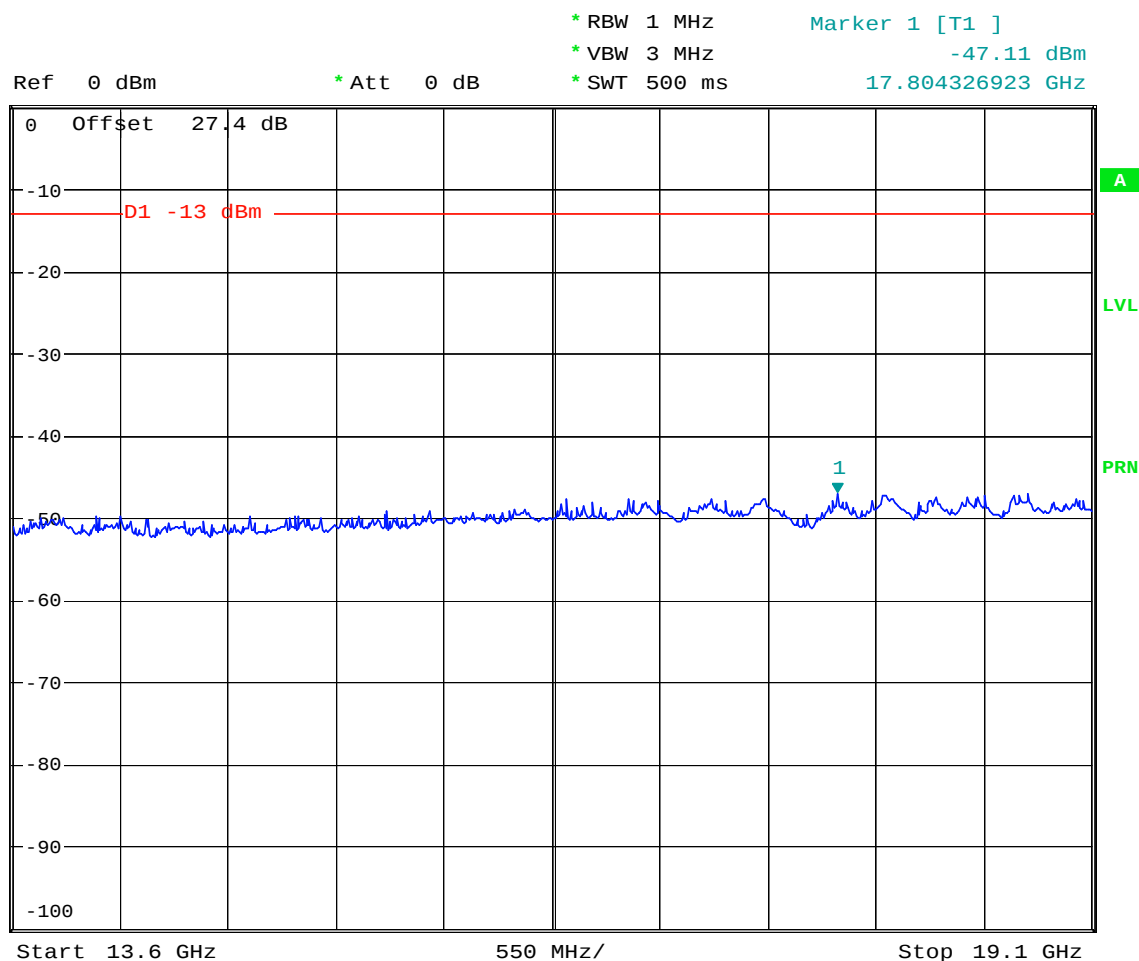

Date: 22.NOV.2005 16:31:38

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B
IC ID : 4947A-V33IG-W-B
Page No. : 28 of 46
Report Issued Date : Nov. 29, 2005
Rev. 01



4.6 Field Strength of Spurious Radiation

Equivalent isotropic radiated Power Measurements by substitution method according to ANSI/TIA/EIA-603-A.

4.6.1 Measurement Instruments

As described in chapter 5 of this test report.

4.6.2 Test Procedure

1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to reach the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A Horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. Emission level (dBm) = output power + substitution Gain.

4.6.3 Test Setup Layout

As the setup in section 4.3.3.

**4.6.4 Test Result**

- Test Mode : Mode 1

GSM 850 Radiated Spurious ERP							
H Polarization				V Polarization			
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)
30.000	-56.01	-13	-43.01	34.590	-45.76	-13	-32.76
34.590	-56.75	-13	-43.75	94.530	-48.97	-13	-35.97
271.380	-58.53	-13	-45.53	147.180	-51.78	-13	-38.78
399.400	-55.84	-13	-42.84	300.000	-60.00	-13	-47.00
528.900	-61.23	-13	-48.23	399.400	-57.62	-13	-44.62
959.400	-57.57	-13	-44.57	700.400	-61.39	-13	-48.39
6688.000	-49.55	-13	-36.55	4184.000	-52.95	-13	-39.95
				6688.000	-47.96	-13	-34.96



- Test Mode : Mode 2

GSM 850 with Bluetooth Co-location Radiated Spurious ERP							
H Polarization				V Polarization			
Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)
30.00	-57.00	-13	-44.00	38.64	-45.26	-13	-32.26
199.83	-57.58	-13	-44.58	93.99	-51.86	-13	-38.86
285.69	-52.11	-13	-39.11	284.88	-46.47	-13	-33.47
570.90	-58.61	-13	-45.61	598.90	-55.91	-13	-42.91
600.30	-58.11	-13	-45.11	726.30	-55.41	-13	-42.41
969.90	-56.22	-13	-43.22	995.80	-55.59	-13	-42.59
1000.00	-53.07	-13	-40.07	1034.00	-57.98	-13	-44.98
1024.00	-52.59	-13	-39.59	1198.00	-56.06	-13	-43.06
1054.00	-55.49	-13	-42.49	1308.00	-56.90	-13	-43.90
1084.00	-54.87	-13	-41.87	1398.00	-60.10	-13	-47.10
1198.00	-53.93	-13	-40.93	1564.00	-54.69	-13	-41.69
1228.00	-55.88	-13	-42.88	1674.00	-55.85	-13	-42.85
1248.00	-54.87	-13	-41.87	2398.00	-25.08	-13	-12.08
1284.00	-55.13	-13	-42.13	2508.00	-54.40	-13	-41.40
1314.00	-54.60	-13	-41.60	3234.00	-56.29	-13	-43.29
1398.00	-58.61	-13	-45.61	5854.00	-52.80	-13	-39.80
1564.00	-54.38	-13	-41.38				
1674.00	-54.89	-13	-41.89				
2398.00	-26.16	-13	-13.16				
2508.00	-54.62	-13	-41.62				



- Test Mode : Mode 3

PCS 1900 Radiated Spurious EIRP							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
33.240	-53.970	-13	-40.97	34.590	-43.530	-13	-30.53
233.580	-59.230	-13	-46.23	95.340	-48.470	-13	-35.47
264.630	-56.190	-13	-43.19	95.340	-48.470	-13	-35.47
399.400	-54.070	-13	-41.07	147.180	-50.730	-13	-37.73
526.800	-59.120	-13	-46.12	300.000	-58.110	-13	-45.11
880.300	-57.110	-13	-44.11	880.300	-51.650	-13	-38.65
1088.000	-46.220	-13	-33.22	958.700	-60.060	-13	-47.06
1118.000	-46.050	-13	-33.05	1584.000	-53.490	-13	-40.49
1154.000	-40.450	-13	-27.45	1768.000	-54.960	-13	-41.96
				1958.000	-56.800	-13	-43.80
				2964.000	-51.560	-13	-38.56
				3758.000	-52.340	-13	-39.34



▪ Test Mode : Mode 4

PCS 1900 with Bluetooth Co-location Radiated Spurious EIRP							
H Polarization				V Polarization			
Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)
30.00	-52.88	-13	-39.88	39.18	-46.32	-13	-33.32
199.83	-52.44	-13	-39.44	257.88	-50.97	-13	-37.97
286.23	-47.81	-13	-34.81	285.69	-44.57	-13	-31.57
332.90	-55.04	-13	-42.04	332.90	-54.53	-13	-41.53
519.80	-54.72	-13	-41.72	598.90	-53.69	-13	-40.69
570.90	-54.52	-13	-41.52	799.80	-53.25	-13	-40.25
1000.00	-49.60	-13	-36.60	1198.00	-52.15	-13	-39.15
1198.00	-50.23	-13	-37.23	1878.00	-49.06	-13	-36.06
1878.00	-48.71	-13	-35.71	2398.00	-25.22	-13	-12.22
2398.00	-24.32	-13	-11.32	2918.00	-50.54	-13	-37.54
2918.00	-49.94	-13	-36.94	3758.00	-50.88	-13	-37.88



4.6.5 Test Data

4.6.5.1 Mode 1

Horizontal Polarization

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	
1 @	30.00	-53.86	-40.86	-13.00	-54.22	0.36	0.00	400	0	Peak
2 @	34.59	-54.60	-41.60	-13.00	-51.92	-2.69	0.00	400	0	Peak
3 @	271.38	-56.38	-43.38	-13.00	-45.47	-10.91	0.00	400	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	
1 @	399.40	-53.69	-40.69	-13.00	-47.19	-6.50	0.00	100	0	Peak
2 @	528.90	-59.08	-46.08	-13.00	-54.35	-4.73	0.00	100	0	Peak
3 @	836.90	-45.17	-32.17	-13.00	-43.84	-1.33	0.00	100	0	Peak
4 @	881.00	-56.95	-43.95	-13.00	-56.04	-0.91	0.00	100	0	Peak
5 @	959.40	-55.42	-42.42	-13.00	-55.27	-0.15	0.00	100	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	cm	deg	
1 @	6688.00	-47.40	-34.40	-13.00	-60.54	13.14	0.00	100	0	Peak



Vertical Polarization

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	34.59	-43.61	-30.61	-13.00	-33.17	-10.44	0.00	0.00	400	1	Peak
2 @	94.53	-46.82	-33.82	-13.00	-38.43	-8.39	0.00	0.00	400	1	Peak
3 @	147.18	-49.63	-36.63	-13.00	-41.51	-8.12	0.00	0.00	400	1	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	300.00	-57.85	-44.85	-13.00	-51.39	-6.46	0.00	0.00	100	0	Peak
2 @	399.40	-55.47	-42.47	-13.00	-51.14	-4.33	0.00	0.00	100	0	Peak
3 @	700.40	-59.24	-46.24	-13.00	-58.81	-0.43	0.00	0.00	100	0	Peak
4 @	836.90	-44.40	-31.40	-13.00	-45.76	1.36	0.00	0.00	100	0	Peak
5 @	880.30	-51.34	-38.34	-13.00	-53.05	1.71	0.00	0.00	100	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	4184.00	-50.80	-37.80	-13.00	-59.16	8.36	0.00	0.00	300	359	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	6688.00	-45.81	-32.81	-13.00	-57.34	11.53	0.00	0.00	100	0	Peak

Remark : There is no more obvious emission until 9 GHz.

**4.6.5.2 Mode 2****Horizontal Polarization**

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	30.00	-54.85	-41.85	-13.00	-55.21	0.36	Peak
2	199.83	-55.43	-42.43	-13.00	-42.04	-13.39	Peak
3 @	285.69	-49.96	-36.96	-13.00	-39.55	-10.41	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	570.90	-56.46	-43.46	-13.00	-52.32	-4.14	Peak
2	600.30	-55.96	-42.96	-13.00	-52.22	-3.74	Peak
3 @	836.90	-38.96	-25.96	-13.00	-37.62	-1.33	Peak
4	883.80	-59.41	-46.41	-13.00	-58.52	-0.88	Peak
5	969.90	-54.07	-41.07	-13.00	-54.02	-0.05	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	1000.00	-50.92	-37.92	-13.00	-52.73	1.80	Peak
2	1024.00	-50.44	-37.44	-13.00	-52.22	1.78	Peak
3	1054.00	-53.34	-40.34	-13.00	-55.05	1.71	Peak
4	1084.00	-52.72	-39.72	-13.00	-54.35	1.64	Peak
5	1198.00	-51.78	-38.78	-13.00	-53.15	1.37	Peak
6	1228.00	-53.73	-40.73	-13.00	-55.03	1.30	Peak
7	1248.00	-52.72	-39.72	-13.00	-53.92	1.20	Peak
8	1284.00	-52.98	-39.98	-13.00	-54.07	1.09	Peak
9	1314.00	-52.45	-39.45	-13.00	-53.47	1.02	Peak
10	1398.00	-56.46	-43.46	-13.00	-57.13	0.67	Peak
11	1564.00	-52.23	-39.23	-13.00	-52.64	0.41	Peak
12	1674.00	-52.74	-39.74	-13.00	-52.96	0.22	Peak
13 @	2398.00	-24.01	-11.01	-13.00	-24.89	0.89	Peak
14	2508.00	-52.47	-39.47	-13.00	-53.67	1.20	Peak



Vertical Polarization

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	38.64	-43.11	-30.11	-13.00	-31.57	-11.53	Peak
2 @	93.99	-49.71	-36.71	-13.00	-41.19	-8.53	Peak
3 @	284.88	-44.32	-31.32	-13.00	-37.55	-6.77	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	598.90	-53.76	-40.76	-13.00	-51.81	-1.95	Peak
2	726.30	-53.26	-40.26	-13.00	-53.22	-0.04	Peak
3 @	836.90	-37.72	-24.72	-13.00	-39.09	1.36	Peak
4	880.30	-53.24	-40.24	-13.00	-54.96	1.71	Peak
5	995.80	-53.44	-40.44	-13.00	-56.07	2.63	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	1034.00	-55.83	-42.83	-13.00	-55.09	-0.73	Peak
2	1198.00	-53.91	-40.91	-13.00	-53.19	-0.72	Peak
3	1308.00	-54.75	-41.75	-13.00	-53.93	-0.82	Peak
4	1398.00	-57.95	-44.95	-13.00	-57.04	-0.91	Peak
5	1564.00	-52.54	-39.54	-13.00	-51.85	-0.70	Peak
6	1674.00	-53.70	-40.70	-13.00	-53.22	-0.48	Peak
7 @	2398.00	-22.93	-9.93	-13.00	-24.80	1.87	Peak
8	2508.00	-52.25	-39.25	-13.00	-54.52	2.27	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	3234.00	-54.14	-41.14	-13.00	-58.19	4.05	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	5854.00	-50.65	-37.65	-13.00	-59.46	8.81	Peak

Remark: There is no more obvious emission until 19 GHz.



4.6.5.3 Mode 3

Horizontal Polarization

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	33.24	-53.97	-40.97	-13.00	-52.51	-1.47	0.00	0.00	400	0	Peak
2 @	233.58	-59.23	-46.23	-13.00	-47.01	-12.22	0.00	0.00	400	0	Peak
3 @	264.63	-56.19	-43.19	-13.00	-45.04	-11.15	0.00	0.00	400	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	399.40	-54.07	-41.07	-13.00	-47.57	-6.50	0.00	0.00	100	0	Peak
2 @	526.80	-59.12	-46.12	-13.00	-54.36	-4.75	0.00	0.00	100	0	Peak
3 @	880.30	-57.11	-44.11	-13.00	-56.19	-0.91	0.00	0.00	100	0	Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dBm	dB	dB	dB	cm	deg	
1 @	1088.00	-46.22	-33.22	-13.00	-47.85	1.64	0.00	0.00	100	0	Peak
2 @	1118.00	-46.05	-33.05	-13.00	-47.63	1.58	0.00	0.00	100	0	Peak
3 @	1154.00	-40.45	-27.45	-13.00	-41.96	1.51	0.00	0.00	100	0	Peak
4 @	1878.00	-53.85	-40.85	-13.00	-53.34	-0.51	0.00	0.00	100	0	Peak



Vertical Polarization

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg	
1 @	34.59	-43.53	-30.53	-13.00	-33.09	-10.44	0.00	0.00	400	0 Peak
2 @	95.34	-48.47	-35.47	-13.00	-40.08	-8.39	0.00	0.00	400	0 Peak
3 @	95.34	-48.47	-35.47	-13.00	-40.08	-8.39	0.00	0.00	400	0 Peak
4 @	147.18	-50.73	-37.73	-13.00	-42.61	-8.12	0.00	0.00	400	0 Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg	
1 @	300.00	-58.11	-45.11	-13.00	-51.65	-6.46	0.00	0.00	100	0 Peak
2 @	880.30	-51.65	-38.65	-13.00	-53.36	1.71	0.00	0.00	100	0 Peak
3 @	958.70	-60.06	-47.06	-13.00	-62.38	2.33	0.00	0.00	100	0 Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg	
1 @	1584.00	-53.49	-40.49	-13.00	-52.82	-0.67	0.00	0.00	100	0 Peak
2 @	1768.00	-54.96	-41.96	-13.00	-54.60	-0.36	0.00	0.00	100	0 Peak
3 @	1878.00	-52.16	-39.16	-13.00	-51.76	-0.40	0.00	0.00	100	0 Peak
4 @	1958.00	-56.80	-43.80	-13.00	-56.21	-0.60	0.00	0.00	100	0 Peak
5 @	2964.00	-51.56	-38.56	-13.00	-54.95	3.39	0.00	0.00	100	0 Peak

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Remark
	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg	
1 @	3758.00	-52.34	-39.34	-13.00	-58.98	6.64	0.00	0.00	300	360 Peak

Remark: There is no more obvious emission until 19 GHz.

**4.6.5.4 Mode 4****Horizontal Polarization**

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	30.00	-52.88	-39.88	-13.00	-53.24	0.36	Peak
2	199.83	-52.44	-39.44	-13.00	-39.05	-13.39	Peak
3 @	286.23	-47.81	-34.81	-13.00	-37.39	-10.41	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	332.90	-55.04	-42.04	-13.00	-46.24	-8.81	Peak
2	519.80	-54.72	-41.72	-13.00	-49.87	-4.85	Peak
3	570.90	-54.52	-41.52	-13.00	-50.38	-4.14	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	1000.00	-49.60	-36.60	-13.00	-51.40	1.80	Peak
2	1198.00	-50.23	-37.23	-13.00	-51.60	1.37	Peak
3	1878.00	-48.71	-35.71	-13.00	-48.19	-0.51	Peak
4 @	2398.00	-24.32	-11.32	-13.00	-25.21	0.89	Peak
5	2918.00	-49.94	-36.94	-13.00	-53.78	3.84	Peak

**Vertical Polarization**

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1 @	39.18	-46.32	-33.32	-13.00	-34.78	-11.53	Peak
2	257.88	-50.97	-37.97	-13.00	-43.62	-7.35	Peak
3 @	285.69	-44.57	-31.57	-13.00	-37.82	-6.75	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	332.90	-54.53	-41.53	-13.00	-48.77	-5.76	Peak
2	598.90	-53.69	-40.69	-13.00	-51.74	-1.95	Peak
3	799.80	-53.25	-40.25	-13.00	-54.32	1.07	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	1198.00	-52.15	-39.15	-13.00	-51.43	-0.72	Peak
2	1878.00	-49.06	-36.06	-13.00	-48.66	-0.40	Peak
3 @	2398.00	-25.22	-12.22	-13.00	-27.09	1.87	Peak
4	2918.00	-50.54	-37.54	-13.00	-53.84	3.30	Peak

	Freq	Level	Over Limit	Limit Line	Read Level	Factor	Remark
	MHz	dBm	dB	dBm	dBm	dB	
1	3758.00	-50.88	-37.88	-13.00	-57.51	6.64	Peak

Remark: There is no more obvious emission until 19 GHz.

4.7 Frequency Stability (Temperature Variation)


4.7.1 Measurement Instrument

As described in chapter 5 of this test report.

4.7.2 Test Procedure

1. The EUT and test equipment were set up as shown on the following section.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. Test data was recorded.

4.7.3 Test Setup Layout

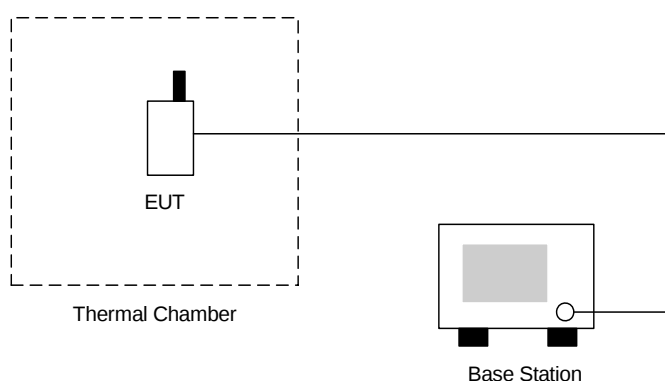

**4.7.4 Test Result**

▪ Test Mode : GSM 850 CH189

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	-42	-0.02		
-10	26	0.01		
0	-18	-0.01		
10	15	0.01		
20	-9	0.00		
30	16	0.01		
40	23	0.01		
50	-27	-0.01		

Remark : The EUT can not be turned on at the temperature of -30 .

▪ Test Mode : PCS 1900 CH661

Temperature(°C)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
-30	X	X	2.5	Passed
-20	-39	-0.02		
-10	-27	-0.01		
0	21	0.01		
10	-23	-0.01		
20	27	0.01		
30	25	0.01		
40	31	0.02		
50	-37	-0.02		

Remark : The EUT can not be turned on at the temperature of -30 .

4.8 Frequency Stability (Voltage Variation)


4.8.1 Measurement Instrument

As described in chapter 5 of this test report.

4.8.2 Test Procedure

1. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected as the following section.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

4.8.3 Test Setup Layout

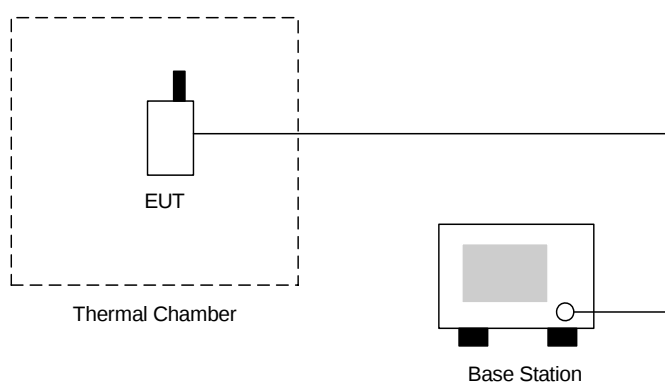

4.8.4 Test Result

- Test Mode : GSM 850 CH189

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
19	-16	-0.01	2.5	Passed
BEP	18	0.01		
21.9	23	0.01		

- Test Mode : PCS 1900 CH661

Voltage(Volt)	Change (Hz)	Change (ppm)	Limit (ppm)	Result
19	23	0.01	2.5	Passed
BEP	29	0.02		
21.9	-21	-0.01		

Remark:

1. Normal Voltage=19 V
2. Battery End Point (BEP)=16.2 V



5 List of Measurement Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Antenna Mast	INN-CO	MM3000	114/8000604/L	1m~4m	NCR	N/A	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL6112B	2885	30MHz~2GHz	Nov. 21, 2004	Nov. 20, 2006	Radiation (03CH06-HY)
Controller	INN-CO	CO2000	114/8000604/L	N/A	NCR	N/A	Radiation (03CH06-HY)
Digital Radio Communication	R&S	CMD55	832796/0061	RF Link	Feb. 18, 2004	Feb. 17, 2006	Radiation (03CH06-HY)
Double Ridge Horn Antenna	Com-Power	AH118	071025	1G~18G	Feb. 01, 2005	Jan. 31, 2006	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESCS30	100356	9KHz~2.75GHz	Jun. 28, 2005	Jun. 27, 2006	Radiation (03CH06-HY)
PreAmplifier	Agilent	8449B	3008A01917	1~26.5GHz	Mar. 29, 2005	Mar. 28, 2006	Radiation (03CH06-HY)
PreAmplifier	Com-Power	PA-103	161055	1MHz~1000MHz	Mar. 29, 2005	Mar. 28, 2006	Radiation (03CH06-HY)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	9170-249	14G~40G	Jul. 21, 2004	Jul. 20, 2006	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY44211030	9KHz~26.5GHz	Jul. 25, 2005	Jul. 24, 2006	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0~360 Degree	NCR	N/A	Radiation (03CH06-HY)
Spectrum analyzer	Agilent	E4408B	MY44211028	9KHz-26.5GHz	Jul. 22, 2005	Jul. 21, 2006	Radiation (05CH02-HY)
Controller	CT	SC100	8010604	N/A	N/A	N/A	Radiation (05CH02-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2885	30MHz -2GHz	Apr. 20, 2004	Apr. 18, 2006	Radiation (05CH02-HY)
Horn Antenna	Com-Power	AH117	1071025	1G-18G	Feb. 22, 2005	Feb. 22, 2006	Radiation (05CH02-HY)
SHF-EHF Horn	SCHWARZBECK	BBHA 9170	9170-249	14G - 40G	Jun. 22, 2004	Jun. 22, 2006	Radiation (05CH02-HY)
Amplifier	MITEQ	AFS44	973248	0.1G - 26.5G	Nov. 11, 2005	Nov 11, 2006	Radiation (05CH02-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	N/A	Radiation (05CH02-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	N/A	Radiation (05CH02-HY)
Base Station Simulator	R & S	CMU 200	106656	N/A	Aug. 9, 2005	Aug. 8, 2007	Radiation (05CH02-HY)



6 Uncertainty Evaluation

Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

Contribution	Uncertainty of x_i		$u(x_i)$
	dB	Probability Distribution	
Receiver reading	0.41	Normal(k=2)	0.21
Antenna factor calibration	0.83	Normal(k=2)	0.42
Cable loss calibration	0.25	Normal(k=2)	0.13
Pre Amplifier Gain calibration	0.27	Normal(k=2)	0.14
RCV/SPA specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site imperfection	1.43	Rectangular	0.83
Mismatch	+0.39/-0.41	U-shaped	0.28
combined standard uncertainty Uc(y)	1.27		
Measuring uncertainty for a level of confidence of 95% U=2Uc(y)	2.54		

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Contribution	Uncertainty of x_i		$u(x_i)$	C_i	$C_i * u(x_i)$
	dB	Probability Distribution			
Receiver reading	±0.10	Normal(k=1)	0.10	1	0.10
Antenna factor calibration	±1.70	Normal(k=2)	0.85	1	0.85
Cable loss calibration	±0.50	Normal(k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20 \log(1 - \Gamma_1 * \Gamma_2 * \Gamma_3)$	+0.34/-0.35	U-shaped	0.244	1	0.244
Combined standard uncertainty Uc(y)	2.36				
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	4.72				

END OF TEST REPORT

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : JYV-V33IG-W-B
 IC ID : 4947A-V33IG-W-B
 Page No. : 46 of 46
 Report Issued Date : Nov. 29, 2005
 Rev. 01