



## TEST REPORT

**REGULATION :** FCC Part 2, 90  
 RSS-119 Issue 11

Applicant	Testing Laboratory
JVC KENWOOD Corporation  1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan Tel.: +81 45 939 6254 Fax.: +81 45 939 6261	Intertek Japan K.K. Kashima Laboratory URL: <a href="http://www.japan.intertek-etlsemko.com">http://www.japan.intertek-etlsemko.com</a> (Open area test site) 3-2 Sunayama, Kamisu, Ibaraki 314-0255 Japan Tel. +81 479 40 1097 (Anechoic chamber) 298-6 Sada, Kashima, Ibaraki 314-0027 Japan Tel. +81 299 82 8464

<b>Equipment type</b>	VHF DIGITAL TRANSCEIVER
<b>Trademark</b>	KENWOOD
<b>FCC Model(s)</b>	NX-5700-K, NX-5700-F
<b>IC Model(s)</b>	NX-5700-K
<b>Serial No.</b>	27
<b>FCC ID</b>	K44471100
<b>IC CN and UPN</b>	282F-471100
<b>Test Result</b>	Complied
<b>Report Number</b>	1410002JKA-001
<b>Original Issue Date</b>	November 14, 2014

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Kazuo Gokita

[Manager]

Tested by

Koichi Wagatsuma

[Engineer]

**In Accordance with FCC Rules and Regulations, Volume II, Part 2 and 90**

**Sub-part 2.1033**

<b>(c)(1) Applicant and Manufacture Information</b>	
APPLICANT	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
Contact Person	: Tamaki Shimamura Manager, Communications Equipment Division
MANUFACTURER	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
<b>(c)(2) FCC ID</b>	
FCC ID	: K44471100
Model number	: NX-5700-K, NX-5700-F
Serial number	: 27
<b>(c)(3) Instruction Manual(S)</b>	
Instruction manual(s)	: Please refer to attached Exhibits F
<b>(c)(4) Type of Emission</b>	
Emission Designation	: 16K0F3E(Wide) 16K0F3E is IC only 11K0F3E(Narrow) 8K10F1E(Narrow) / 8K10F1D(Narrow) / 8K10F1W(Narrow) 8K30F1E(Narrow) / 8K30F1D(Narrow) / 8K30F7W(Narrow) 4K00F1E(Very Narrow) / 4K00F1D(Very Narrow) / 4K00F7W(Very Narrow) 4K00F2D(Very Narrow)
<b>(c)(5) Frequency range</b>	
Frequency Range	: FCC : 150 to 174 MHz IC : 138 to 144 MHz and 148 to 174 MHz
<b>(c)(6) Power Rating</b>	
Output Power	: 5 to 50 W
Type	: Continuously Variable
<b>(c)(7) Maximum Power Rating</b>	
Output Power	: 50W
<b>(c)(8): Voltages &amp; currents in all elements in final RF stage, including final transistor or solid-state device</b>	
Collector Current, A	: 13.0 A Maximum
Collector Voltage, Vdc	: 13.6 Vdc
Supply Voltage, Vdc	: 13.6 Vdc
<b>Other Information</b>	
Number of Channel	: Zone 128max. Cannels 512 max.(per Zone)
Maximum Deviation	: ± 5 kHz (16K0F3E), ± 2.5 kHz (11K0F3E)
Frequency Stability	: 2.0 ppm
	:
Antenna Impedance	: 50 Ω Norminal
<b>Note</b>	

## TABLE OF CONTENTS

---

	Page
SECTION 1. GENERAL INFORMATION	4
SECTION 2. SUMMARY OF TEST RESULT	5
SECTION 3. TEST AND MEASUREMENT DATA	6
SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)	7
SECTION 5. SUPPORT EQUIPMENT	8
SECTION 6. USED CABLE(S)	9
SECTION 7. TEST CONFIGURATION	10
SECTION 8. OPERATING CONDITION	11
SECTION 9. MEASUREMENT UNCERTAINTY	12
SECTION 10. TEST DATA	
10.1 Carrier Output Power (Conducted)	13
10.2 Unwanted Emissions (Transmitter Conducted)	15
10.3 Field Strength of Spurious Radiation	18
10.4 Emission Masks (Occupied Bandwidth)	23
10.5 Transient Frequency Behavior	35
10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)	45
10.7 Modulation Limiting	49
10.8 Frequency Stability (Temperature Variation)	54
10.9 Frequency Stability (Voltage Variation)	58
10.10 Receiver Spurious Emissions(Radiated)	60
10.11 Necessary Bandwidth and Emission Bandwidth	64
APPENDIX           PHOTOGRAPHS	

---

**SECTION 1. GENERAL INFORMATION**

**TEST PERFORMED**

Location	Kashima No.1 Test Site, No.3 Test Site and No.12 Test Site
EUT Received	October 06, 2014
Date of Test	October 09, 2014 to November 06, 2014
Standard Applied	FCC Part 2, 90 RSS-119 Issue 11
Measurement Method	ANSI/TIA-603-D-2010 / RSS-119 Issue 11(2011), RSS-Gen Issue 3(2010)
Deviation from Standard(s)	Not applicable

**QUALIFICATIONS OF TESTING LABORATORY (Kashima Lab.)**

ACCREDITATION	SCOPE	LAB. CODE	Remarks
NVLAP	EMC Testing	100290-0	USA
VLAC	EMC Testing	VLAC-008-1	JAPAN
BSMI	EMC Testing	SL2-IN-E-6008	TAIWAN
FILING			
VCCI	EMC Testing	A-0126	JAPAN
FCC	EMC Testing	Designation Number:JP0008	
IC	EMC Testing	IC-2042K-3, IC-2042Q-12	CANADA
CB-Scheme	EMC Testing	TL222	IECEE
SAUDI ARABIA	EMC Testing	N/A	

**ABBREVIATIONS**

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	4LEVEL FSK	4LEVEL Frequency Shift Key
GMSK	Gaussian Maximum Shift Key	CW ID	Continuously Repeating bit stream
FM	Frequency Modulation	C4FM	Constant envelope 4 Level FM
PTT	Push to Talk	AFC	Automatic frequency control

**Revision Summary**

Revised Date	Section	Description of Changes

**SECTION 2. SUMMARY OF TEST RESULT**

FCC Part2	Part90	IC RSS-119	TEST ITEM	TEST ITEI RESULTS
2.1046 (a)	-	5.4	Carrier Output Power (Conducted)	<b>PASS</b>
2.1051	90.210	5.8	Unwanted Emissions (Transmitter Conducted)	<b>PASS</b>
2.1053 (a)	90.210	5.8	Field Strength of Spurious Radiation	<b>PASS</b>
2.1049 (c) (1)	90.210	5.8	Emission Masks (Occupied Bandwidth)	<b>PASS</b>
-	90.214	5.9	Transient Frequency Behavior	<b>PASS</b>
2.1047 (a)	-	-	Audio Low Pass Filter (Voice Input)	<b>PASS</b>
2.1047 (a)	-	-	Audio Frequency Response	<b>PASS</b>
2.1047 (b)	-	-	Modulation Limiting	<b>PASS</b>
2.1055 (a) (1)	90.213 (a)	5.3	Frequency Stability (Temperature Variation)	<b>PASS</b>
2.1055 (d) (1)	90.213 (a)	5.3	Frequency Stability (Voltage Variation)	<b>PASS</b>
-	90.203 (j)(3)	-	Certification required (FCC Part 90.203(j)(3))	<b>Complied</b>
-	90.203 (j)(4)	-	Certification required (FCC Part 90.203(j)(4))	<b>Complied</b>
-	90.203 (j)(5)	-	Certification required (FCC Part 90.203(j)(5))	<b>Complied</b>
-	90.203 (e)	-	Certification required (FCC Part 90.203(e))	<b>Complied</b>

**Limitation on Results**

The test result of this report is effective equipment under test itself and under the test configuration described on the report.

This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

**Note:**

As for the FCC Part 15 Subpart B-Unintentional Radiators, the EUT has been measured and declared as Verification by JVC Kenwood Corporation.

**SECTION 3. TEST AND MEASUREMENT DATA**

All test and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J and Industry Canada as the following individual parts:

FCC Rule	Test Item	Tested
Part 21	Domestic Public Fixed radio Services	N.A.
Part 22	Non Cellular	N.A.
Part 22	Public Mobile Services	N.A.
Part 22	Subpart H - Cellular Radiotelephone Service	N.A.
Part 22	Alternative technologies and auxiliary service	N.A.
Part 23	International Fixed Public Radiocommunication service	N.A.
Part 24	Personal Communications Services	N.A.
Part 74	Experimental Radio Auxiliary , Special Broadcast and Other Program Distributional Services	N.A.
Part 80	Stations in the Maritime Services	N.A.
Part 80	Subpart E - general Technical Standards	N.A.
Part 80	Subpart F - Equipment Authorization for Compulsory Ships	N.A.
Part 80	Subpart K - Private Coast Stations and Marine Utility Stations	N.A.
Part 80	Subpart S - Compulsory radiotelephone Installations for Small Passenger Boats	N.A.
Part 80	Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes	N.A.
Part 80	Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act	N.A.
Part 80	Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)	N.A.
Part 80	Subpart W - Global Maritime Distress and Safety System (GMDSS)	N.A.
Part 80	Subpart X - Voluntary Radio Installations	N.A.
Part 87	Aviation Services	N.A.
<b>Part 90</b>	<b>Private Land Mobile radio Services</b>	<b>YES</b>
Part 94	Private Operational - Fixed Microwave Service	N.A.
Part 95	Subpart A - General Mobile radio Service	N.A.
Part 95	Subpart C - Radio Control (R/C) radio Service	N.A.
Part 95	Subpart D - Citizens Band (CB) Radio Service	N.A.
Part 95	Subpart E -Family radio Service	N.A.
Part 95	Subpart F -Interactive Video and Data Service (IVDS)	N.A.
Part 97	Amateur Radio Service	N.A.
Part 101	Fixed Microwave Service	N.A.

IC Rule	Test Item	Tested
<b>RSS-119</b>	<b>Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.4-960 MHz</b>	<b>YES</b>
RSS-134	900MHz Narrowband Personal Communication Service	N.A.
<b>RSS-Gen</b>	<b>General Requirements and Information for the Certification of Radio Apparatus</b>	<b>YES</b>

**SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)**

**4.1 List of System Configuration**

Symbol	Item	Model No.	Serial No.	Manufacture	Remarks
A	VHF DIGITAL TRANSCEIVER	NX-5700-K NX-5700-F	27	JVC KENWOOD Corporation	EUT
<b>Power Ratings of EUT :</b>		DC 13.6 V +/- 15%		13.0 A Maximum	
<b>Power Supply :</b>		DC 13.6 V +/- 15%			
<b>Condition of Equipment</b>		Proto type			
<b>Type</b>		Mobile type			
<b>Suppression Devices</b>		No Modifications by the laboratory were made to the device			

**4.2 Port(s)/Connector(s)**

Port Name	Connector Type	Connector Pin	Remarks
ACC	D-sub	25 pin	
External Speaker	3.5φ	2 pin	
RF Antenna	M	2 pin	
GPS Antenna	SMA	2 pin	
Ignition sense	Original	2 pin	

**4.3 Highest Frequency Oscillator(s)/Crystal(s)**

Operating Frequency	Board Name	Remarks
223.95 MHz	TXRX UNIT	
4960 MHz	Bluetooth UNIT	

**SECTION 5. SUPPORT EQUIPMENT**

The EUT was supported by the following equipment during the test.

Symbol	Item	Model No.	Serial No.	Manufacture	FCC ID
B	PANEL SEPARATE KIT	KRK-15B	001	JVC KENWOOD Corporation	N/A
C	PANEL SEPARATE KIT	KRK-14H	001	JVC KENWOOD Corporation	N/A
D	Keypad Microphone	KMC-36	None	JVC KENWOOD Corporation	N/A
E	Dummy Load	CT-150NP	1138693	TME	N/A
F	GPS Antenna	KRA-40	None	JVC KENWOOD Corporation	N/A
G	SECURE CRYPTOGRAPHIC MODULE	KWD-AE30	None	JVC KENWOOD Corporation	N/A
H	REMOTE CONTROL HEAD	KCH-19	001	JVC KENWOOD Corporation	N/A
I	External Speaker	KES-3	None	JVC KENWOOD Corporation	N/A
J	DC Power Supply (1)	PMC35-3A	LE000716	KIKUSUI	N/A
K	DC Power Supply (2)	GZV4000	9E+07	Daiichi Denpa Kogyo	N/A
Supplied Power:					
J, K	AC	100V,60Hz			



## SECTION 6. USED CABLE(S)


The following cable(s) was used for the test.

No.	Name	Length (m)	Shield	Connector	Ferrite core
1	Speaker cable	2.90	No	Plastic	
2	Antenna cable	1.00	Yes	Metal	
3	Microphone cable	0.55	No	Plastic	
4	Ignition sense cable	0.12	No	Metal	
5	GPS Antenna cable	2.00	Yes	Metal	
6	DC cable	0.25	No	-	
7	KCT-71 (REMOTE CONTROL CABLE)	7.60	Yes	Plastic	
8	ACC cable	1.70	Yes	Metal	
9	KCT-46 (Ignition sense cable)	3.10	No	Metal	
10	DC cable	3.40	No	-	
11	Power cable for DC Power Supply (1)	2.00	No	-	
12	Power cable for DC Power Supply (2)	1.80	No	-	

## SECTION 7. TEST CONFIGURATION

### Details of Configuration and Connection

Example: Case of Section 10.3,10.10Test

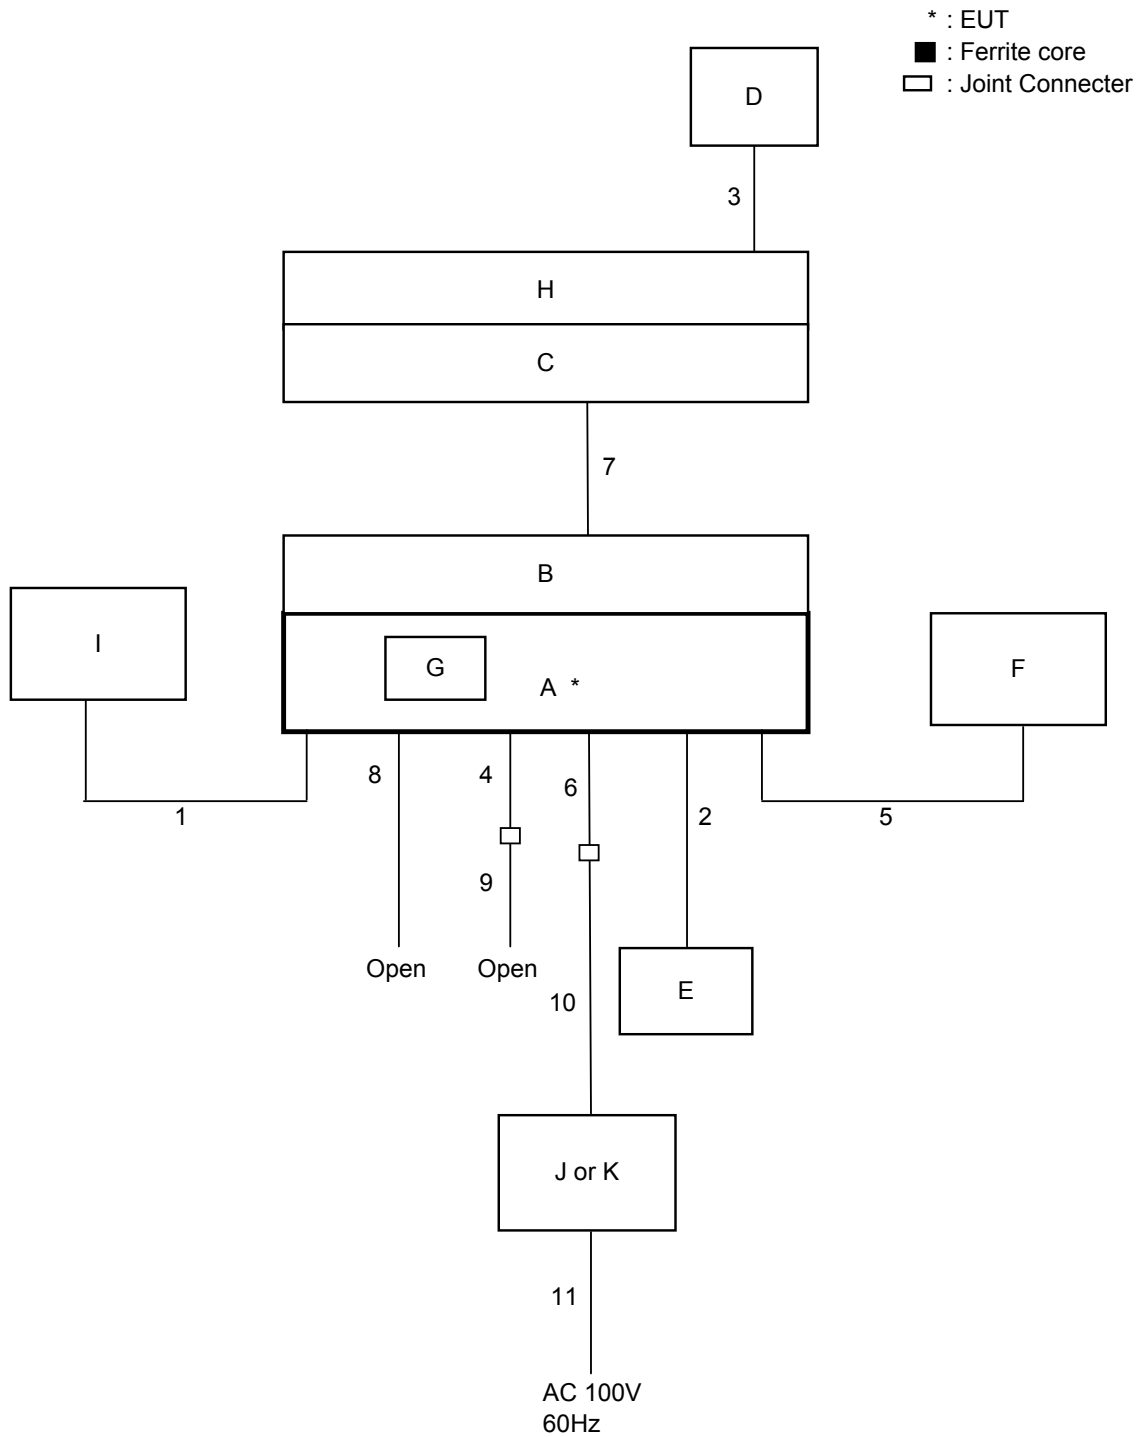

## SECTION 8. OPERATING CONDITION

The EUT was operated under the following condition during the test.

### 8.1 Operating Condition

The test was carried out under Transmit mode.

(FCC: 150.05MHz, 162.05MHz, 173.95MHz / RSS: 138.05MHz, 158.05MHz, 173.95MHz)

(High Power : 50W, Low Power : 5 W)


The test was carried out under Receive mode.

(RSS: 138.05MHz, 158.05MHz, 173.95MHz)

EUT was examined in the operating conditions that had maximum emissions.


### 8.2 Operating Flow [Transmit mode]

Following operations were performed continuously.

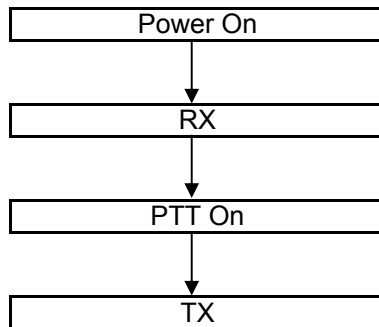

### 8.3 Operating Flow [Receive mode]

Following operations were performed continuously.



**SECTION 9. MEASUREMENT UNCERTAINTY**

Carrier Output Power (Conducted)	U <sub>lab</sub>	Utia-603-d
	+/- 0.29dB (k = 2)	+/- 0.59 dB
Unwanted Emissions (Transmitter Conducted)		
	+/- 2.19 dB (k = 2)	+/- 1.1 dB
Field Strength of Spurious Radiation		
	+/- 5.02dB (k = 2)	+/- 3.3 dB
Emission Masks (Occupied Bandwidth)		
	+/- 0.5dB (k = 2)	+/- 2.1 dB
Transient Frequency Behavior		
	+/- 1.10% (k = 2)	+/- 21.6 %
Audio Low Pass Filter (Voice Input)		
	+/- 0.1dB (k = 2)	+/- 1.2 dB
Audio Frequency Response		
	+/- 0.1dB (k = 2)	+/- 1.2 dB
Modulation Limiting		
	+/- 1% (k = 2)	+/- 1 %
Frequency Stability (Temperature Variation)		
	+/- 10.1Hz (k=2)	+/-34.2 Hz
Frequency Stability (Voltage Variation)		
	+/- 10.1Hz (k=2)	+/-34.2 Hz
Receiver Spurious Emissions	U <sub>lab</sub>	Ucisp
30-1000MHz	+/- 4.83dB (k = 2)	+/- 5.2 dB
abobe 1GHz	+/- 4.90dB (k = 2)	

## SECTION 10. TEST DATA

### 10.1 Carrier Output Power (Conducted)

REGULATIONS	: FCC Part 2 Section 1046 (a) / RSS-119 Section 5.4
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.1.2 / RSS-119 Section 4.1

#### Test Procedure

- The EUT and test equipment were set up as shown on the following page.
- The EUT was conducted to a resistive coaxial attenuator of normal load impedance.  
 $RF\ Power\ (dBm) = Power\ Meter\ reading\ (dBm) + Attenuator\ Loss\ (dB) + Cable\ Loss\ (dB)$   
 $RF\ Power\ (W) = 10^{(RF\ Power\ (dBm)/10)}/1000$
- Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only as for the test of RSS)


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 03, 14	Jun. 30, 15
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 03, 14	Jun. 30, 15
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
4	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
5	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
5	Audio Generator	Anritsu	MG443B	M70150	Apr. 09, 14	Apr. 30, 15
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

#### Measuring Cables

No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Nov. 20, 13	Nov. 30, 14
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Nov. 21, 13	Nov. 30, 14

#### Measuring Equipment Configuration

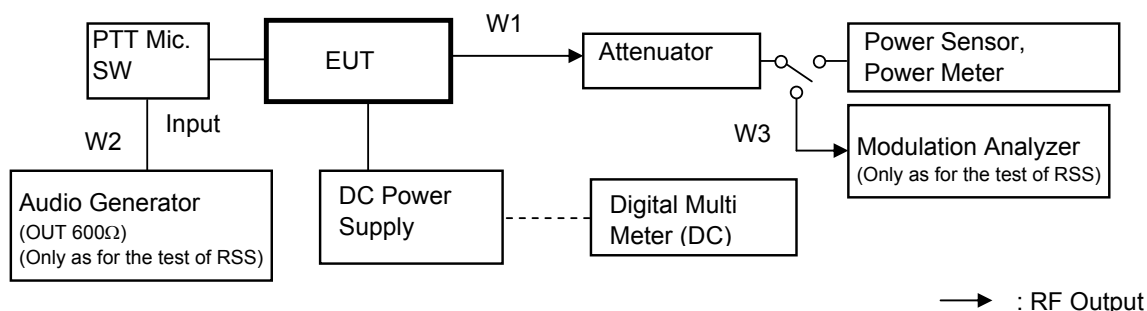

**Test Results**

Test date	Oct 09, 2014	
Location	Kashima No.1 Test Site	
temperature	23.0	[degree C]
Humidity Variation	60.0	[%]
Atmospheric Pressure	102.2	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the Authorized Bandwidth.  
 State the worst case (below).

No.	Frequency (MHz)	Band	Setting	RF Power (W)
1	138.05	Low (RSS)	High Power	50
2	150.05	Low (FCC)	High Power	50
3	158.05	Middle (RSS)	High Power	50
4	162.05	Middle (FCC)	High Power	50
5	173.95	High (FCC / RSS)	High Power	50
6	138.05	Low (RSS)	Low Power	5
7	150.05	Low (FCC)	Low Power	5
8	158.05	Middle (RSS)	Low Power	5
9	162.05	Middle (FCC)	Low Power	5
10	173.95	High (FCC / RSS)	Low Power	5

RF Power: Peak reading

## 10.2 Unwanted Emissions (Transmitter Conducted)

REGULATIONS	: FCC Part 2 Section 1051, Part 90 Section 210 / RSS-119 Section 5.8
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.13.2 / RSS-119 Section 4.2, RSS-Gen Section 4.9

### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that than that necessary to produce 50 % of rated system deviation.
- 3 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) Detector mode : Average power (FM Modulation) , Positive peak with peak hold (Digital Modulation)
- 4 The emissions were measured for the worst case as follows:
  - a) : within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - b) : from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.


### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Highpass Filter	Anritsu	MP526B	6200220636	Nov. 20, 13	Nov. 30, 14
4	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
5	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Feb. 04, 14	Feb. 28, 15
6	Audio Generator	Anritsu	MG443B	M70150	Apr. 09, 14	Apr. 30, 15
7	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
8	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
9	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W3	Balance Cable	Nicoon	3D-2V	KSR00092	Nov. 20, 13	Nov. 30, 14
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Nov. 21, 13	Nov. 30, 14
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Nov. 21, 13	Nov. 30, 14

### Measuring Equipment Configuration

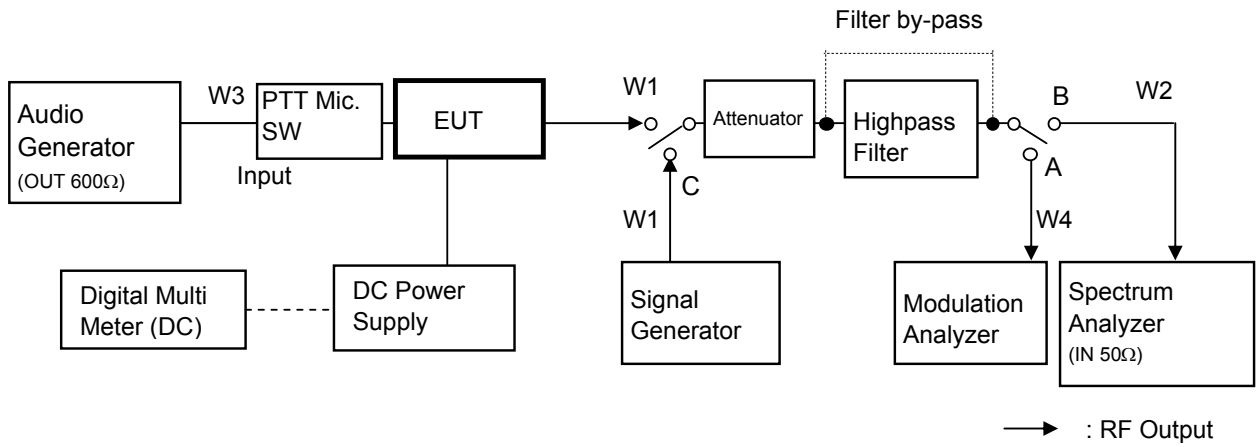



**Test Results**

Test date	Oct 09, 2014	
Location	Kashimai No.1 Test Site	
temperature	24.0	[degree C]
Humidity Variation	60.0	[%]
Atmospheric Pressure	102.2	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	138.05 (RSS)	Low	276.10	-41.90	<b>-88.89</b>	-67.0	21.9
2	150.05 (FCC)	Low	300.10	-44.53	<b>-91.52</b>	-67.0	24.5
3	158.05 (RSS)	Middle	316.10	-37.80	<b>-84.79</b>	-67.0	17.8
4	162.05 (FCC)	Middle	324.10	-38.40	<b>-85.39</b>	-67.0	18.4
5	173.95 (FCC/RSS)	High	347.90	-42.00	<b>-88.99</b>	-67.0	22.0

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) =  $-(50+10\log(P))$   
 Correct Level (dBm) = Substitute SG Level (dBm)  
 Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$   
 P = Carrier Level (W)  
 " - " = Measurement Limit

State : Low Power / Authorized Bandwidth 6 kHz

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask E Limit (dBc)	Margin (dB)
1	138.05 (RSS)	Low	276.10	-46.60	<b>-83.59</b>	-62.0	21.6
2	150.05 (FCC)	Low	300.10	-39.83	<b>-76.82</b>	-62.0	14.8
3	158.05 (RSS)	Middle	316.10	-37.80	<b>-74.79</b>	-62.0	12.8
4	162.05 (FCC)	Middle	324.10	-44.00	<b>-80.99</b>	-62.0	19.0
5	173.95 (FCC/RSS)	High	347.90	-46.10	<b>-83.09</b>	-62.0	21.1

There is the margin of 20dB over except for the above points.

Mask E Limit (dBc) = whichever is the lesser attenuation ;  $-(55+10\log(P))$  or -65  
 Correct Level (dBm) = Substitute SG Level (dBm)  
 Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$   
 P = Carrier Level (W)  
 " - " = Measurement Limit

**10.3 Field Strength of Spurious Radiation**

REGULATIONS	:	FCC Part 2 Section 1053 (a), Part 90 Section 210 / RSS-119 Section 5.8
TEST METHOD/GUIDE	:	ANSI/TIA-603-D Section 2.2.12.2 / RSS-119 Section 4.2, RSS-Gen Section 4.9

**Test Procedure**

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) Detector mode : Positive Peak
- 3 The transmitter was placed on a wooden turntable, and it was transmitting into non-radiating load which was also placed on the turntable.
- 4 The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 5 The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 6 Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- 7 Spurious emissions in dB = 10 Log (TX power in Watts/0.001) – the absolute level


**Measuring Equipments**

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator(6dB)	HUBER+SUHNER	6806.17B	4962	Nov. 21, 13	Nov. 30, 14
2	Attenuator(10dB)	HUBER+SUHNER	6810.17B	5061	Jun. 23, 14	Jun. 30, 15
3	Dummy Load	TME	CT-150NP	1138693	Nov. 20, 13	Nov. 30, 14
4	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Feb. 04, 14	Feb. 28, 15
5	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
6	D.R.G Antenna(RX)	Schwarzbeck	3115	5044	Jul. 16, 14	Jul. 31, 15
7	D.R.G Antenna(TX)	Schwarzbeck	3115	5045	Mar. 25, 14	Mar. 31, 15
8	Dipole Antenna(TX)	Schwarzbeck	UHA9105	AM0082002	Jul. 31, 14	Jul. 31, 15
9	Tri-log Antenna(RX)	Schwarzbeck	VULB9168WP	288	Jul. 14, 14	Jul. 31, 15
10	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
11	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15
12	Amplifier	Intertek Japan	ZFL-1200GH+L	2013075-2	Jul. 11, 14	Jul. 31, 15
13	Amplifier	Hewlett Packard	83051A	3332A00329	Mar. 14, 14	Mar. 31, 15

**Measuring Cables**

No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
R11	Coaxial Cable	Suhner	SUCOFLEX104	F000018	Nov. 21, 13	Nov. 30, 14
R12	Coaxial Cable	Suhner	SUCOFLEX104	F000019	Nov. 21, 13	Nov. 30, 14
R13	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 23, 14	Jun. 30, 15
W5	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 23, 14	Jun. 30, 15
R2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00217	Jun. 23, 14	Jun. 30, 15
R14	Coaxial Cable	Suhner	SUCOFLEX 102E	712/2EA	Aug. 04, 14	Aug. 31, 15
R1	Coaxial Cable	FUJIKURA	5D-2W	KSR00312	Jun. 23, 14	Jun. 30, 15
W13	Coaxial Cable	Suhner	SUCOFLEX106	KSR00207	Jun. 23, 14	Jun. 30, 15

**Measuring Equipment Configuration**

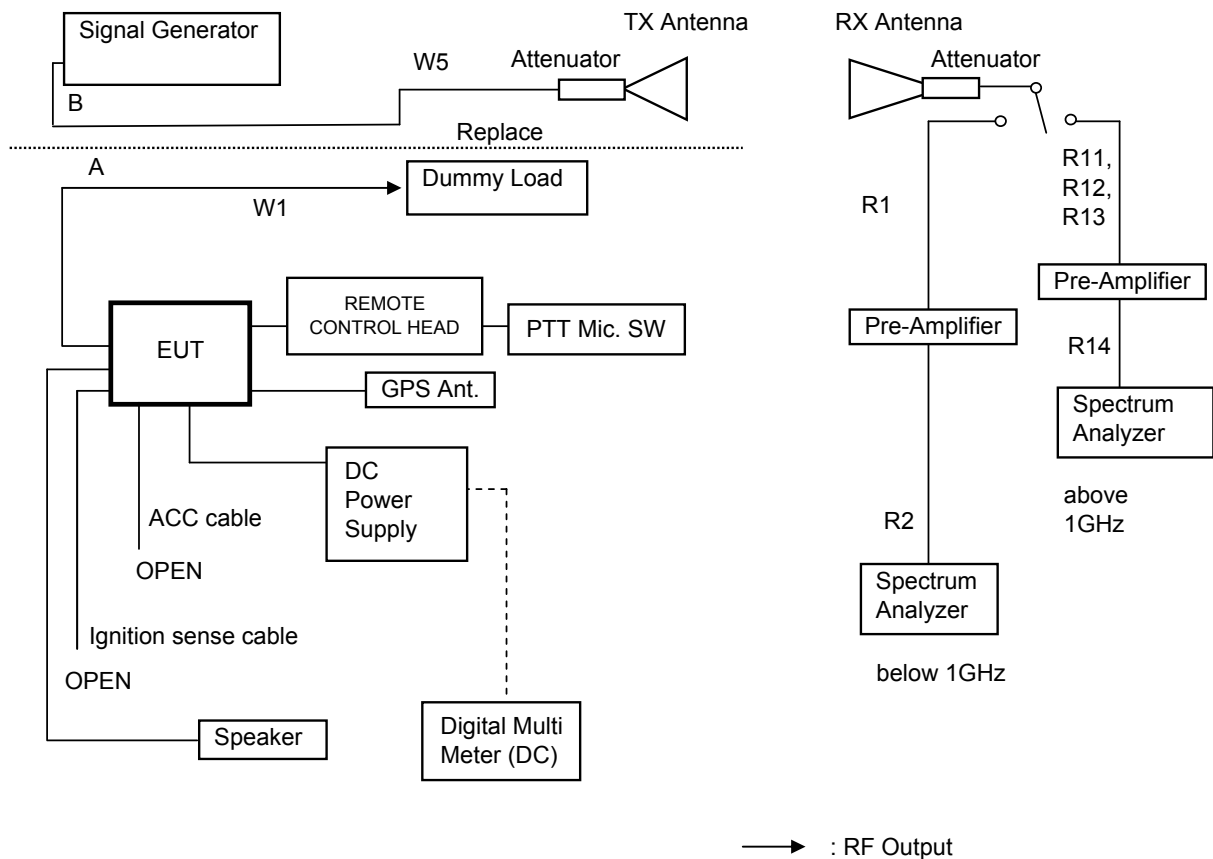

**Test Results**

Test date	Oct 23, 2014 to Oct 24, 2014
Location	Kashima No.3 Test Site
temperature	21 to 25 [degree C]
Humidity Variation	50 to 60 [%]
Atmospheric Pressure	101.0 to 102.3 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05MHz(FCC)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK D Limit Level (dBc)	Margin (dB)
1	300.10	Hor.	-51.36	-44.30	2.15	11.32	-53.5	<b>-100.5</b>	-67.0	33.5
		Ver.	-61.20	-50.40	2.15	11.32	-59.6	<b>-106.6</b>	-67.0	39.6
2	450.15	Hor.	-40.77	-28.30	2.15	11.61	-37.8	<b>-84.7</b>	-67.0	17.7
		Ver.	-41.33	-28.10	2.15	11.61	-37.6	<b>-84.5</b>	-67.0	17.5
3	600.20	Hor.	-51.70	-37.70	2.15	11.86	-47.4	<b>-94.4</b>	-67.0	27.4
		Ver.	-51.43	-36.10	2.15	11.86	-45.8	<b>-92.8</b>	-67.0	25.8
4	750.25	Hor.	-65.20	-48.00	2.15	12.09	-57.9	<b>-104.9</b>	-67.0	37.9
		Ver.	-68.00	-48.20	2.15	12.09	-58.1	<b>-105.1</b>	-67.0	38.1
5	900.30	Hor.	-74.60	-56.80	2.15	12.31	-67.0	<b>-114.0</b>	-67.0	47.0
		Ver.	-74.00	-55.20	2.15	12.31	-65.4	<b>-112.4</b>	-67.0	45.4
6	1050.35	Hor.	-	-	5.92	12.52	-	-	-67.0	-
		Ver.	-	-	5.92	12.52	-	-	-67.0	-
7	1200.40	Hor.	-	-	6.80	12.68	-	-	-67.0	-
		Ver.	-62.63	-48.30	6.80	12.68	-54.2	<b>-101.2</b>	-67.0	34.2
8	1350.45	Hor.	-63.44	-50.00	7.54	12.84	-55.3	<b>-102.3</b>	-67.0	35.3
		Ver.	-62.06	-45.50	7.54	12.84	-50.8	<b>-97.8</b>	-67.0	30.8
9	1500.50	Hor.	-	-	8.18	13.00	-	-	-67.0	-
		Ver.	-	-	8.18	13.00	-	-	-67.0	-

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = whichever is the lesser attenuation ;  $-(50+10\log(P))$  or 70

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBi) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : High Power / Authorized Bandwidth 11.25 kHz / 138.05MHz(RSS)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK D Limit Level (dBc)	Margin (dB)
1	276.10	Hor.	-56.60	-50.60	2.15	11.26	-59.7	<b>-106.7</b>	-67.0	39.7
		Ver.	-56.90	-44.20	2.15	11.26	-53.3	<b>-100.3</b>	-67.0	33.3
2	414.15	Hor.	-36.91	-27.10	2.15	11.54	-36.5	<b>-83.5</b>	-67.0	16.5
		Ver.	-39.96	-27.30	2.15	11.54	-36.7	<b>-83.7</b>	-67.0	16.7
3	552.20	Hor.	-51.85	-38.80	2.15	11.78	-48.4	<b>-95.4</b>	-67.0	28.4
		Ver.	-50.68	-36.10	2.15	11.78	-45.7	<b>-92.7</b>	-67.0	25.7
4	690.25	Hor.	-61.18	-44.70	2.15	12.00	-54.5	<b>-101.5</b>	-67.0	34.5
		Ver.	-63.28	-46.90	2.15	12.00	-56.7	<b>-103.7</b>	-67.0	36.7
5	828.30	Hor.	-70.37	-53.00	2.15	12.20	-63.1	<b>-110.0</b>	-67.0	43.0
		Ver.	-66.12	-45.30	2.15	12.20	-55.4	<b>-102.3</b>	-67.0	35.3
6	966.35	Hor.	-	-	2.15	12.41	-	-	-67.0	-
		Ver.	-	-	2.15	12.41	-	-	-67.0	-
7	1104.40	Hor.	-	-	6.26	12.57	-	-	-67.0	-
		Ver.	-	-	6.26	12.57	-	-	-67.0	-
8	1242.45	Hor.	-	-	7.02	12.72	-	-	-67.0	-
		Ver.	-	-	7.02	12.72	-	-	-67.0	-
9	1380.50	Hor.	-	-	7.68	12.87	-	-	-67.0	-
		Ver.	-	-	7.68	12.87	-	-	-67.0	-

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = whichever is the lesser attenuation ;  $-(50+10\log(P))$  or 70

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBi) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 6 kHz / 173.95MHz(FCC/RSS)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK E Limit Level (dBc)	Margin (dB)
1	876.10	Hor.	-44.56	-35.92	2.15	11.41	-45.2	<b>-82.2</b>	-62.0	20.2
		Ver.	-46.79	-34.46	2.15	11.41	-43.7	<b>-80.7</b>	-62.0	18.7
2	1314.15	Hor.	-56.90	-43.55	2.15	11.74	-53.1	<b>-90.1</b>	-62.0	28.1
		Ver.	-57.33	-42.05	2.15	11.74	-51.6	<b>-88.6</b>	-62.0	26.6
3	1752.20	Hor.	-72.80	-56.15	2.15	12.01	-66.0	<b>-103.0</b>	-62.0	41.0
		Ver.	-72.00	-54.60	2.15	12.01	-64.5	<b>-101.4</b>	-62.0	39.4
4	2190.25	Hor.	-	-	2.15	12.27	-	-	-62.0	-
		Ver.	-	-	2.15	12.27	-	-	-62.0	-
5	2628.30	Hor.	-	-	5.88	12.51	-	-	-62.0	-
		Ver.	-	-	5.88	12.51	-	-	-62.0	-
6	3066.35	Hor.	-	-	6.89	12.69	-	-	-62.0	-
		Ver.	-	-	6.89	12.69	-	-	-62.0	-
7	3504.40	Hor.	-	-	7.73	12.88	-	-	-62.0	-
		Ver.	-	-	7.73	12.88	-	-	-62.0	-
8	3942.45	Hor.	-	-	8.26	13.07	-	-	-62.0	-
		Ver.	-	-	8.26	13.07	-	-	-62.0	-
9	4380.50	Hor.	-	-	8.40	13.26	-	-	-62.0	-
		Ver.	-	-	8.40	13.26	-	-	-62.0	-

There is the margin of 20dB over except for the above points.

Mask E Limit (dBc) = whichever is the lesser attenuation ;  $-(55+10\log(P))$  or -65

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dB) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

#### 10.4 Emission Masks (Occupied Bandwidth)

REGULATIONS	: FCC Part 2 Section 1049 (c) (1), Part 90 Section 210 / RSS-119 Section 5.8
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.11.2 / RSS-119 Section 4.2.1, 4.2.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 For EUT supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for +/- 2.5 kHz deviation (or 50 % modulation). (FM modulation).
- 3 With level constant, the signal level was increased 16 dB.
- 4 For EUT supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- 5 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100Hz (Non modulation and Authorized Band 6 kHz),  
100Hz (Non modulation and Authorized Band 11.25 kHz),  
300Hz (Non modulation and Authorized Band 20 kHz).
  - b) VBW : 10times the RBW (Non modulation , Authorized Band 11.25 kHz and Authorized Band 20 kHz).
  - c) RBW and VBW : 30 kHz (Non Modulation / Digital Modulation).
- 6 The occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Apr. 09, 14	Apr. 30, 15
5	Spectrum Analyzer	Agilent	N9030A	US51350220	Jul. 03, 14	Jul. 31, 15
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W3	Balance Cable	Nicoon	3D-2V	KSR00092	Nov. 20, 13	Nov. 30, 14
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Nov. 21, 13	Nov. 30, 14
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Nov. 21, 13	Nov. 30, 14

### Measuring Equipment Configuration

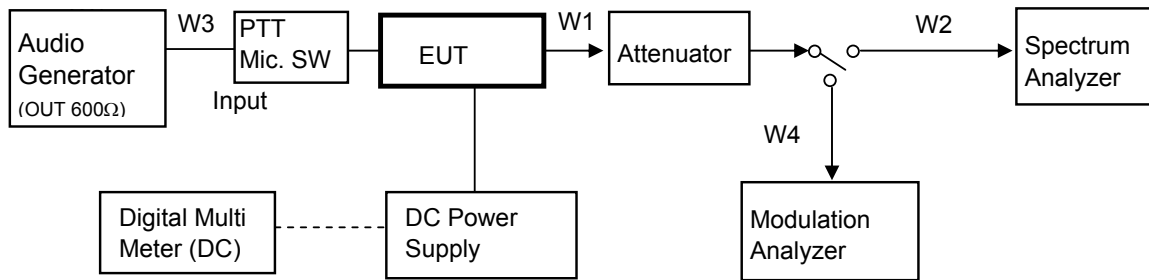

Note: Configuration of other Modulation test is composed without the Audio Generator.

— : RF Output




**Test Results**


Test date	Oct 10, 2014	
Location	Kashima No.1 Test Site	
temperature	23	[degree C]
Humidity Variation	60	[%]
Atmospheric Pressure	101.9	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz/ 16K0F3E/ 138.05 MHz (RSS)  
 RSS Limit : Mask B

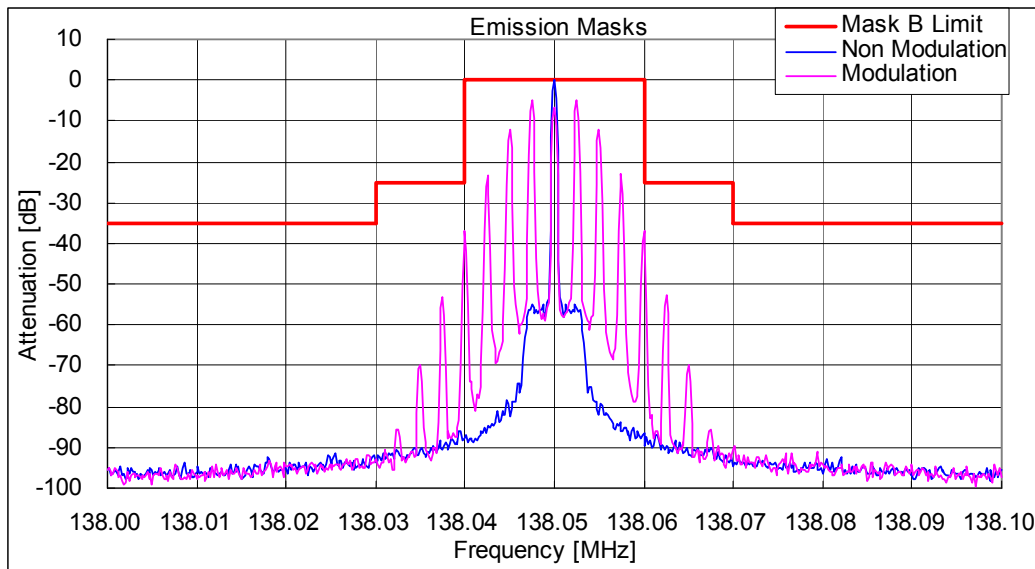


State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E/ 162.05 MHz(FCC)  
 FCC Limit : Mask D

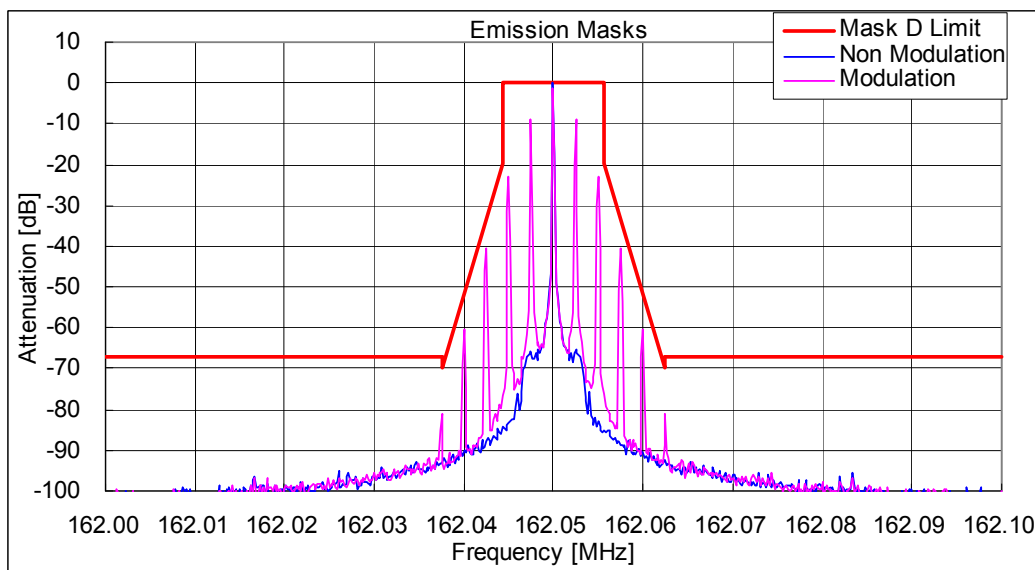


State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E/ 173.95 MHz (RSS)  
RSSLimit : Mask D

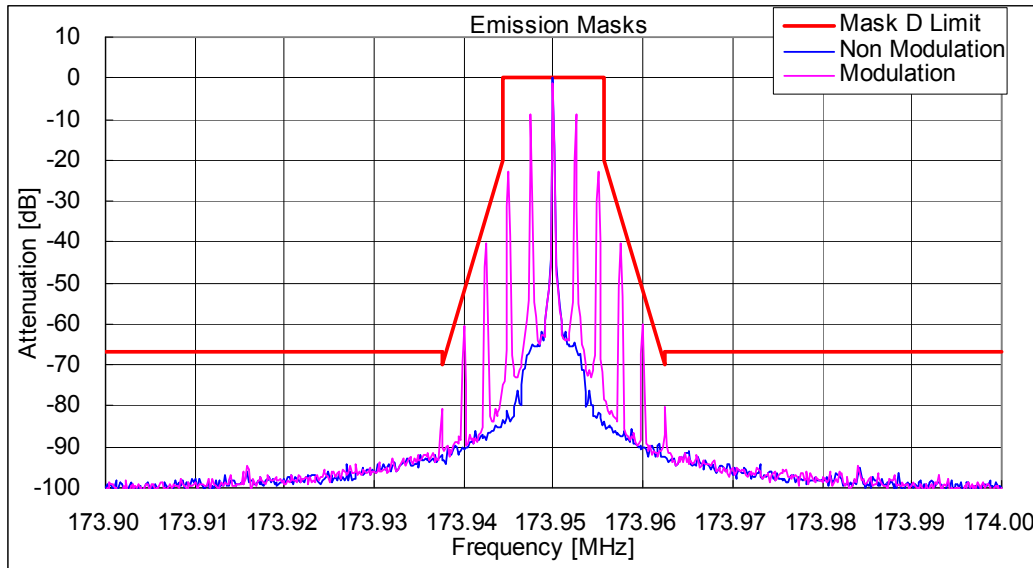


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K10F1E/F1D/F1W / 173.95 MHz (FCC / RSS)  
FCC / RSS Limit : Mask D

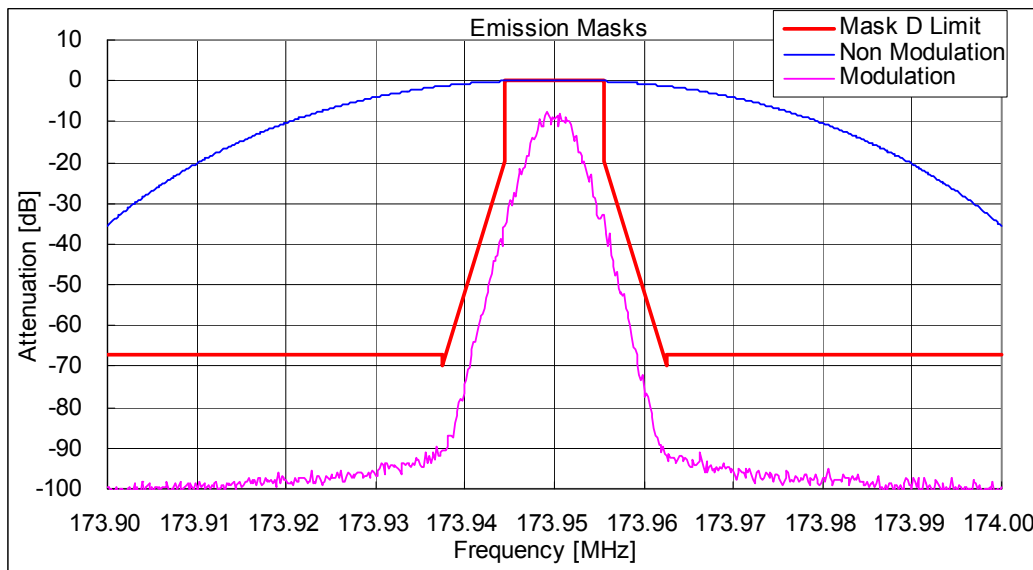


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E/F1D/F7W / 162.05 MHz (FCC)  
FCC Limit : Mask D

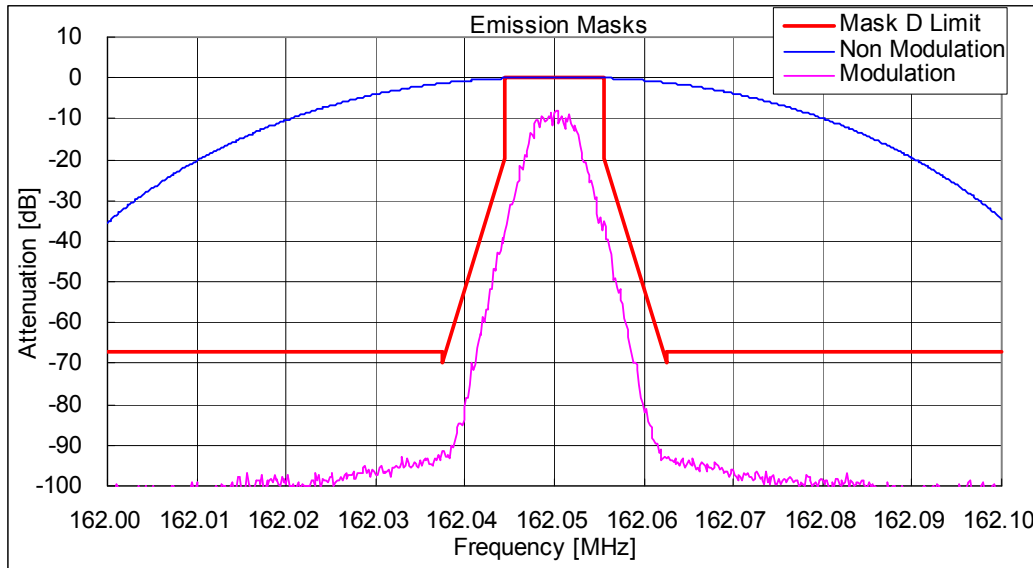


State : High Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E/F1D/F7W / 138.05 MHz(RSS)  
RSS Limit : Mask D

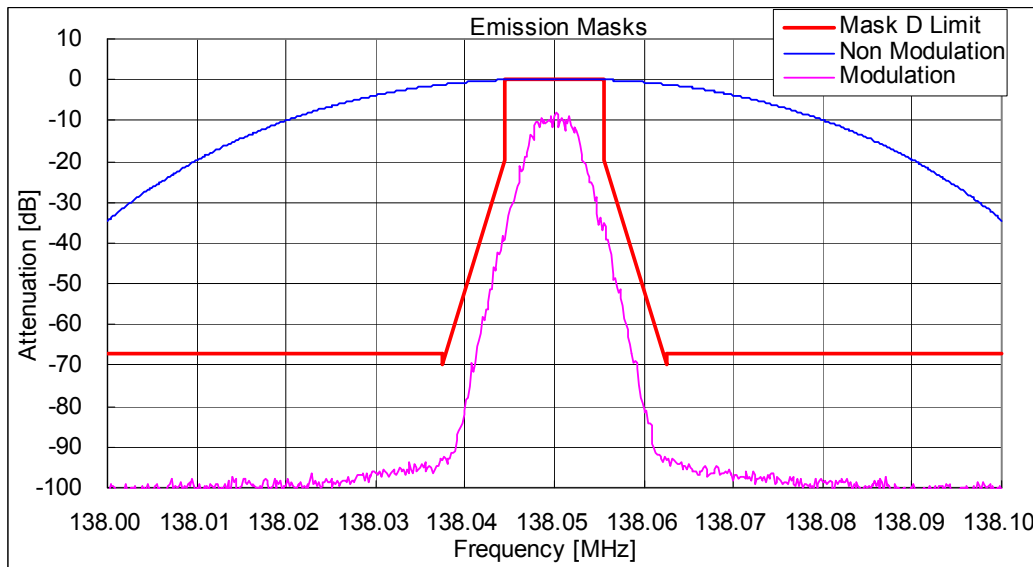


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F1E/F1D/F7W/ 173.95 MHz (FCC / RSS)  
FCC/RSS Limit : Mask E

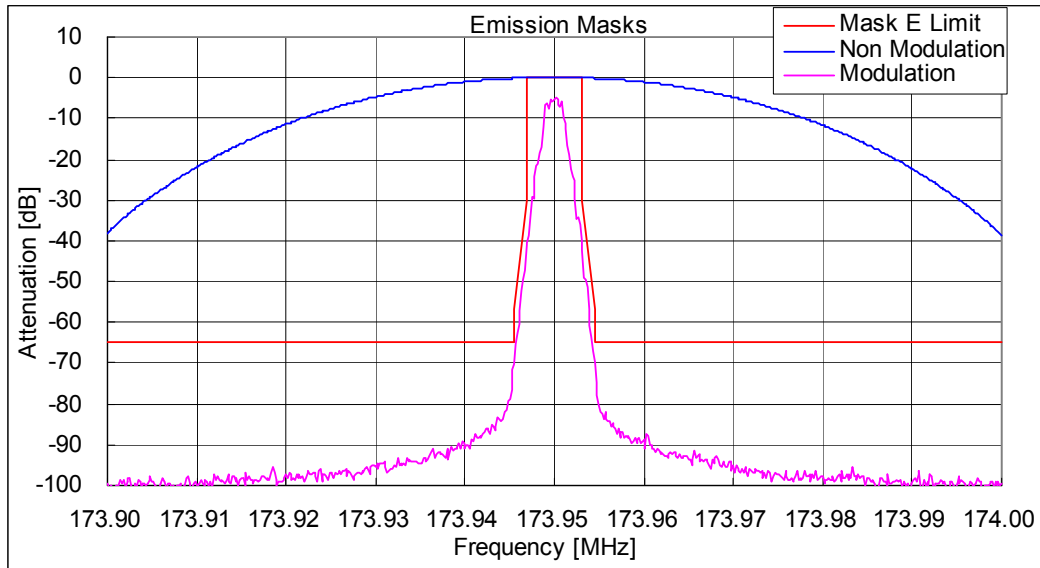


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F2D/ 162.05 MHz (FCC)  
FCC Limit : Mask E

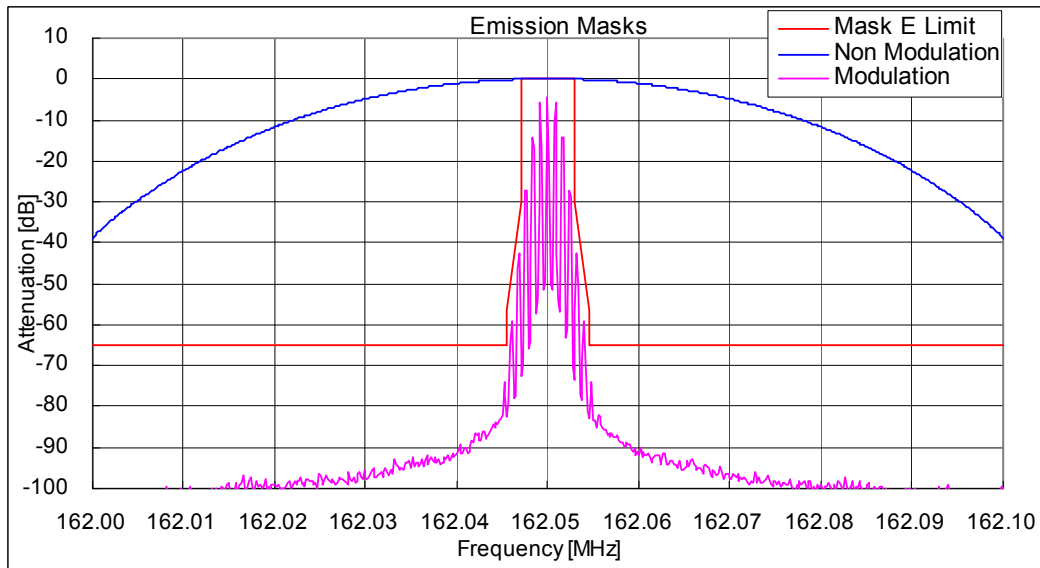


State : High Power / Authorized Bandwidth 6 kHz/ 4K00F2D/ 173.95 MHz (RSS)  
RSS Limit : Mask E

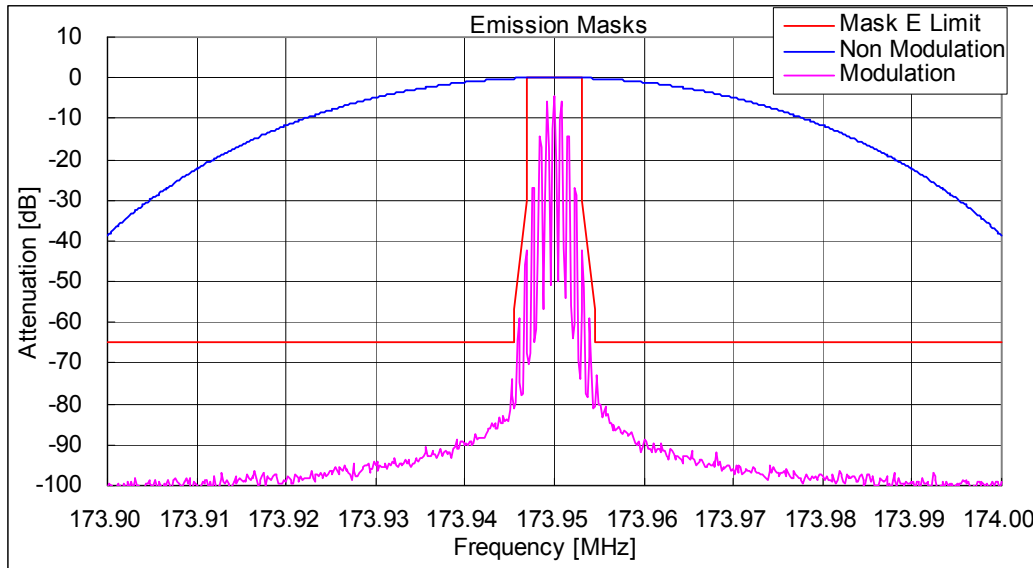


State : Low Power / Authorized Bandwidth 20 kHz/ 16K0F3E/ 138.05 MHz (RSS)  
FCC Limit : Mask B

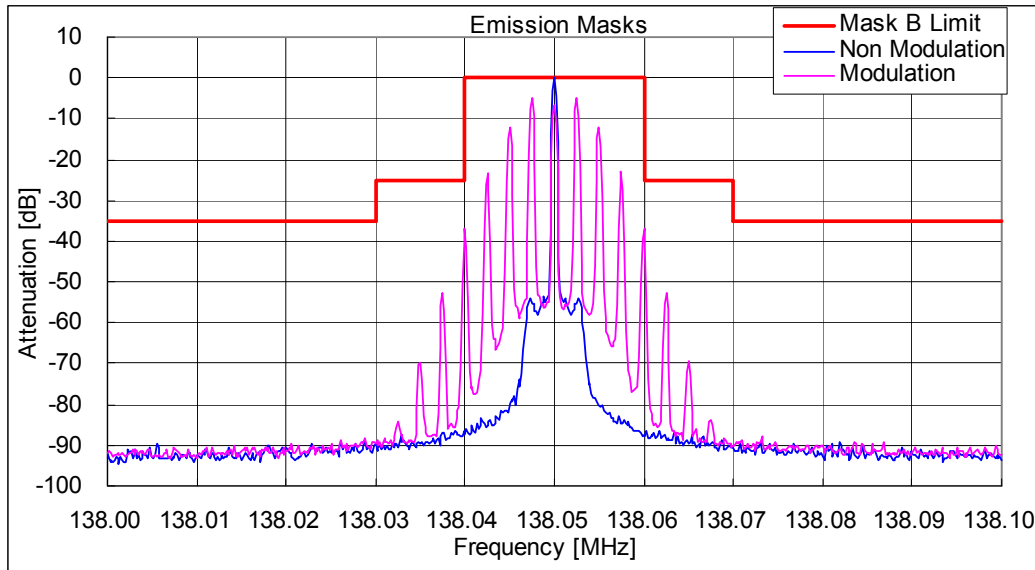


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E/ 162.05 MHz (FCC)  
FCC Limit : Mask D

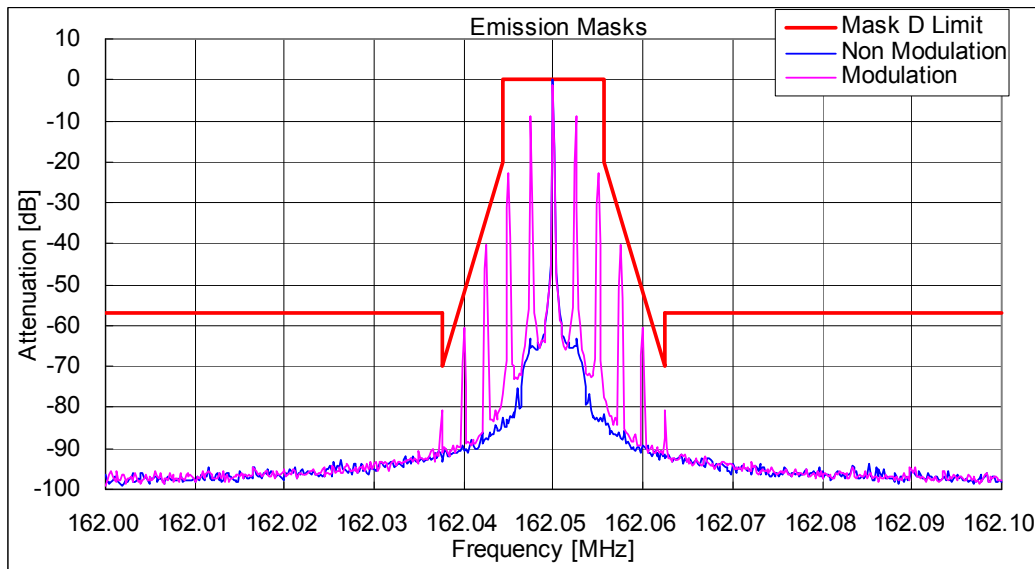


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E/ 173.95 MHz (RSS)  
RSS Limit : Mask D

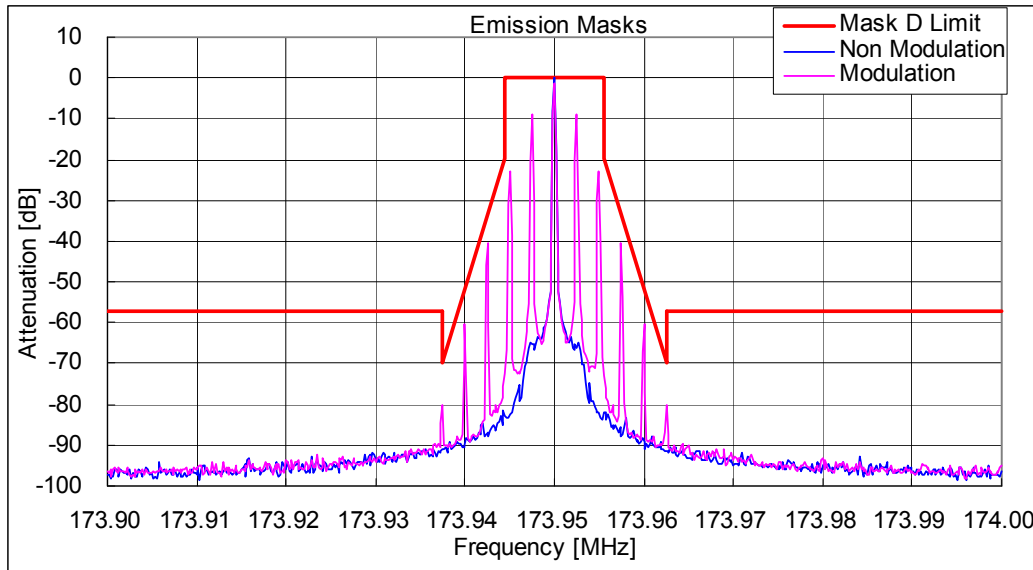


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K10F1E/F1D/F1W / 173.95 MHz (FCC / RSS)  
FCC / RSS Limit : Mask D

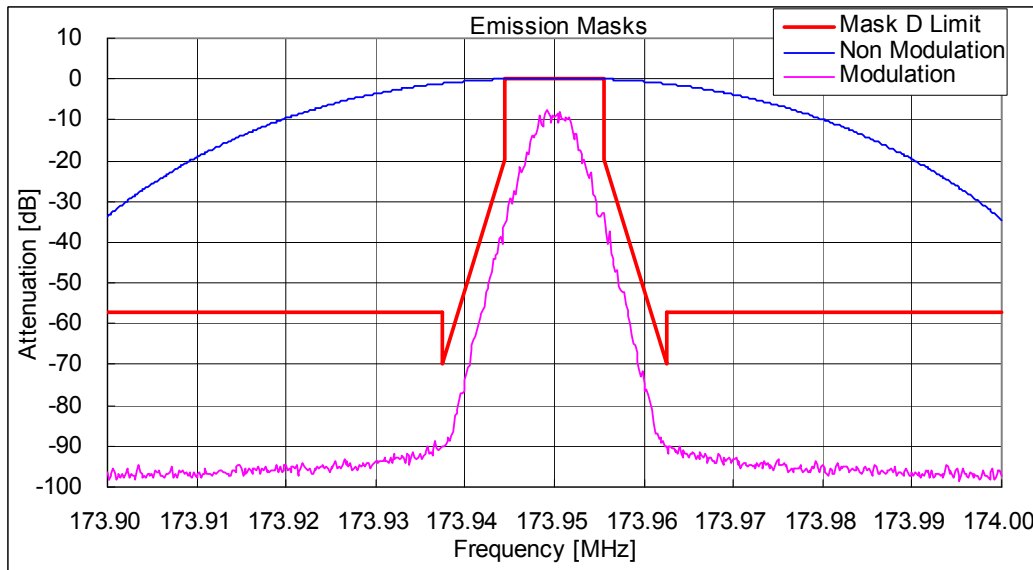

State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E/F1D/F7W/ 150.05 MHz (FCC)  
FCC Limit : Mask D

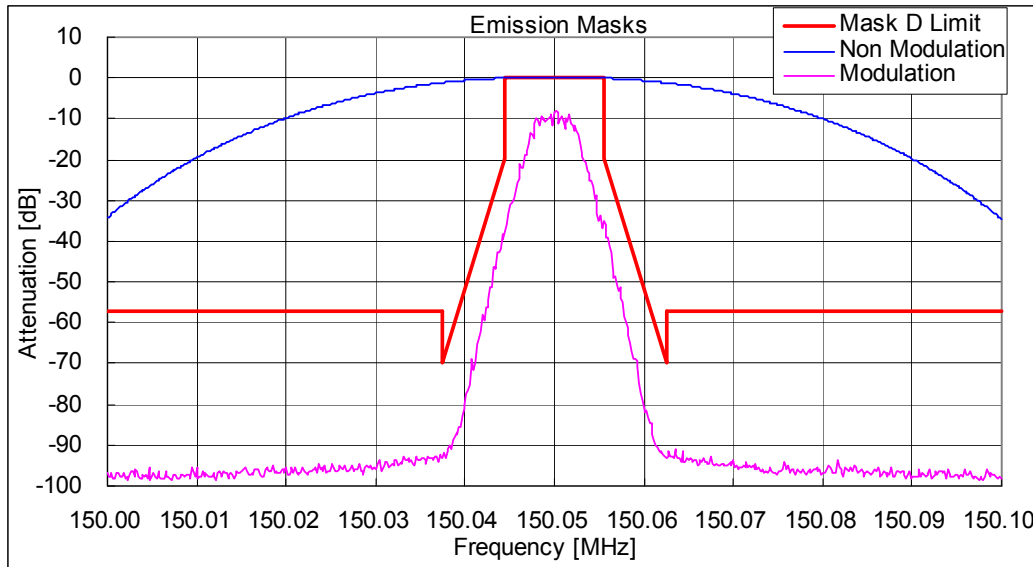


State : Low Power / Authorized Bandwidth 11.25 kHz/ 8K30F1E/F1D/F7W / 158.05 MHz (RSS)  
RSS Limit : Mask D

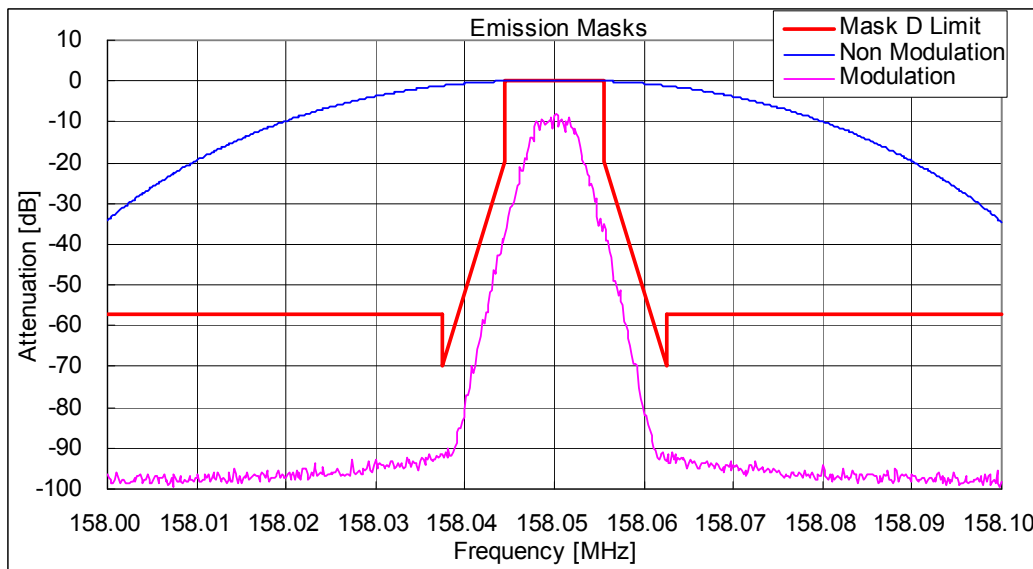





State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F1E/F1D/F7W/ 173.95 MHz (FCC / RSS)  
FCC/RSS Limit : Mask E

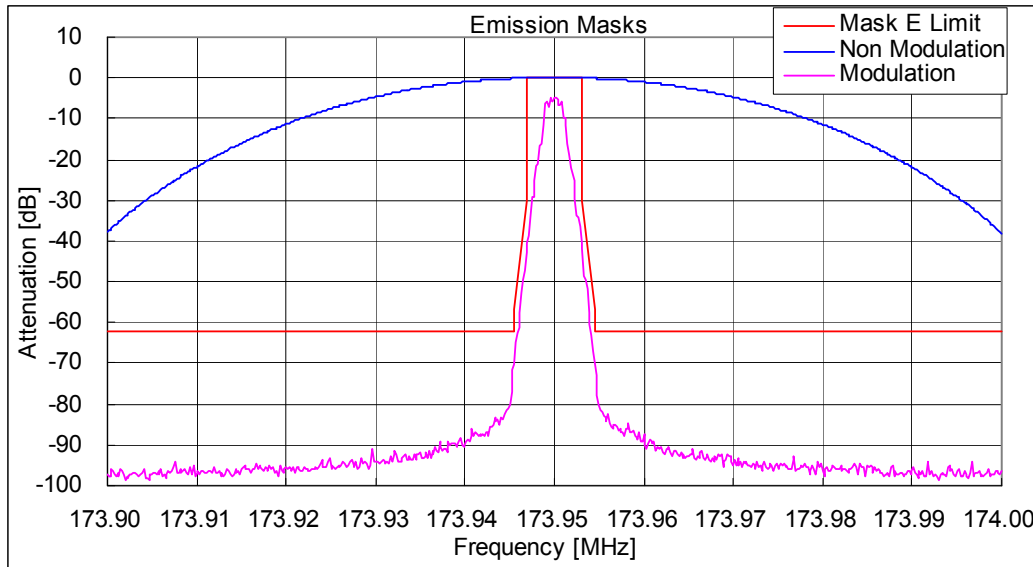

State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F2D/ 162.05 MHz (FCC)  
FCC Limit : Mask E

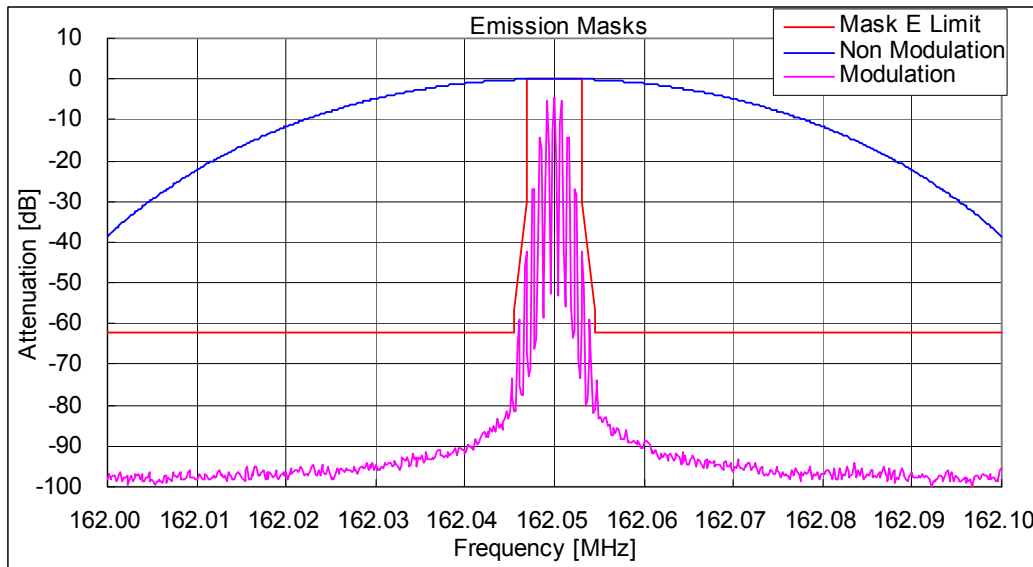

State : Low Power / Authorized Bandwidth 6 kHz/ 4K00F2D/ 173.95 MHz (RSS)  
RSS Limit : Mask E

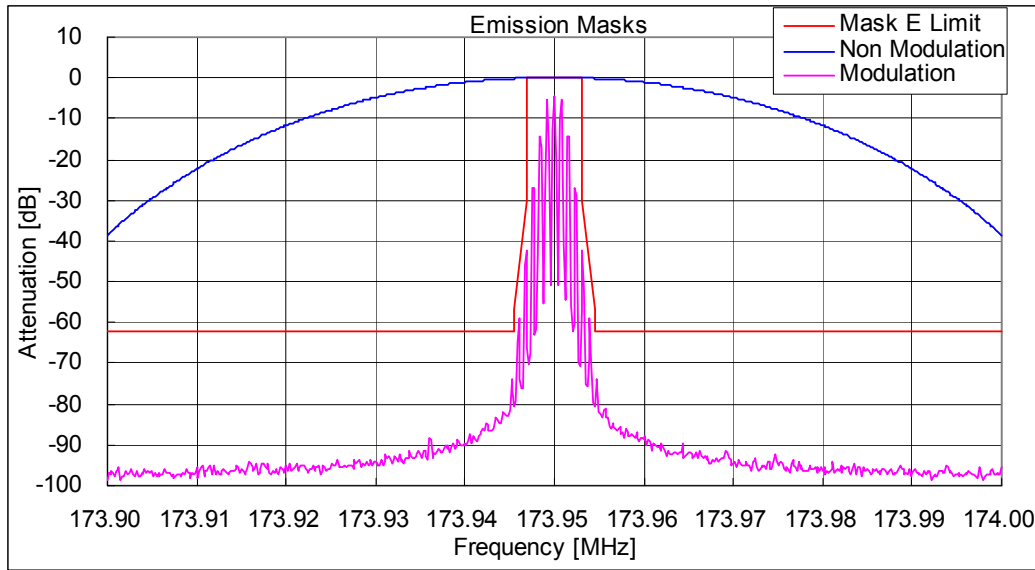

### 10.5 Transient Frequency Behavior

REGULATIONS	: FCC Part 90 Section 214 / RSS-119 Section 5.9
TEST METHOD/GUIDE	: ANSI/TIA-603-D, Section 2.2.19.3

#### Test Procedure


- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The transmitter was turned on.
- 3 The transmitter carrier level was measured at the output of the combiner .
- 4 The transmitter was turned off.
- 5 An RF signal generator (1) modulated with a 1 kHz tone at either 25 kHz or 12.5 kHz or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -30 dB below the level recorded in Procedure 3, as measured at the output of the combiner.  
 This level was then fixed for the remainder of the test and is recorded at step h.
- 6 The oscilloscope was setup using TIA-603 steps j and k as a guide, however 1000 Hz tone was adjusted at +- 2.5 /div vertically centered on the display.
- 7 The transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
- 8 The carrier on-time as referenced in TIA-603 steps m, n, and o was captured and plotted.
- 9 The carrier off-time as referenced in TIA-603 steps p, q, r, and s was captured and plotted.

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 03, 14	Jun. 30, 15
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 03, 14	Jun. 30, 15
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
4	Attenuator (3dB)	TME	CFA-20NPJ-3	679701	Jun. 23, 14	Jun. 30, 15
5	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
6	Step Attenuator	Hewlett Packard	8494B	272614515	Nov. 21, 13	Nov. 30, 14
7	Combiner(1)	Anritsu	Z-164A	M89249	Nov. 20, 13	Nov. 30, 14
8	Combiner(2)	Anritsu	Z-164A	M89549	Nov. 20, 13	Nov. 30, 14
9	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
10	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Feb. 04, 14	Feb. 28, 15
11	Oscilloscope	Tektronix	TDS 680B	B010292	Jan. 27, 14	Jan. 31, 15
12	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
13	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

**Measuring Cables**

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Nov. 20, 13	Nov. 30, 14
W2	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00097	Nov. 20, 13	Nov. 30, 14
W5	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W3	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00041	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Nov. 21, 13	Nov. 30, 14

**Measuring Equipment Configuration**

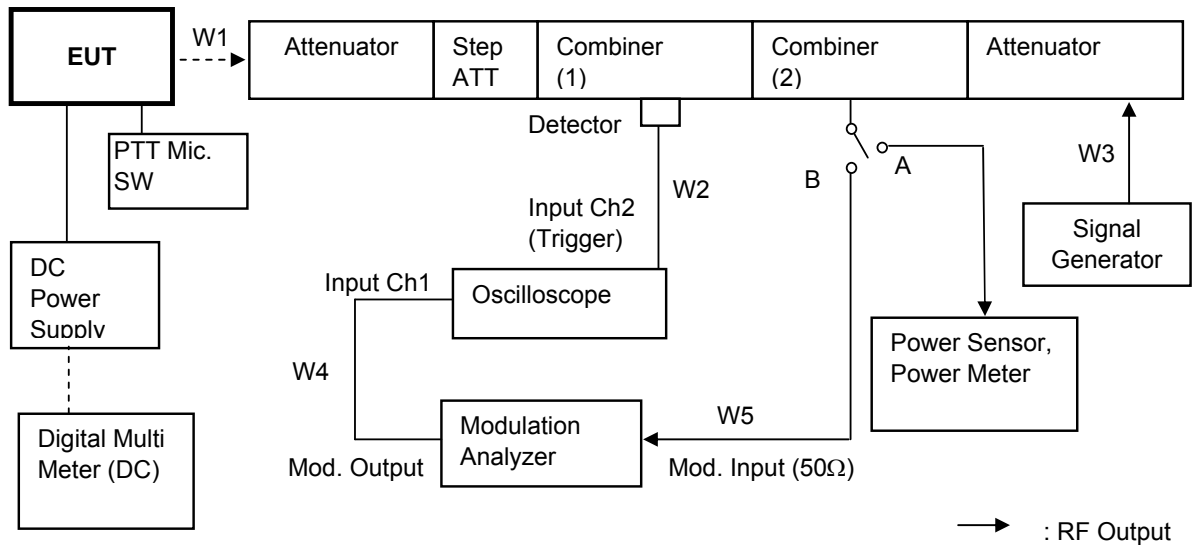


**Test Results**


Test date	Oct 21, 2014	
Location	Kashima No.1 Test Site	
temperature	22	[degree C]
Humidity Variation	58	[%]
Atmospheric Pressure	101.8	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 138.05 MHz (RSS)/ PTT:OFF -ON

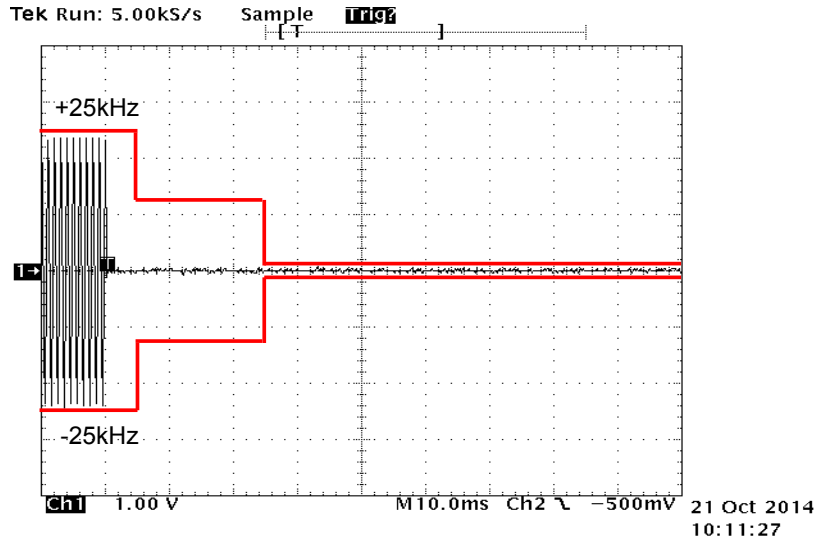


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 138.05 MHz (RSS)/ PTT:ON -OFF

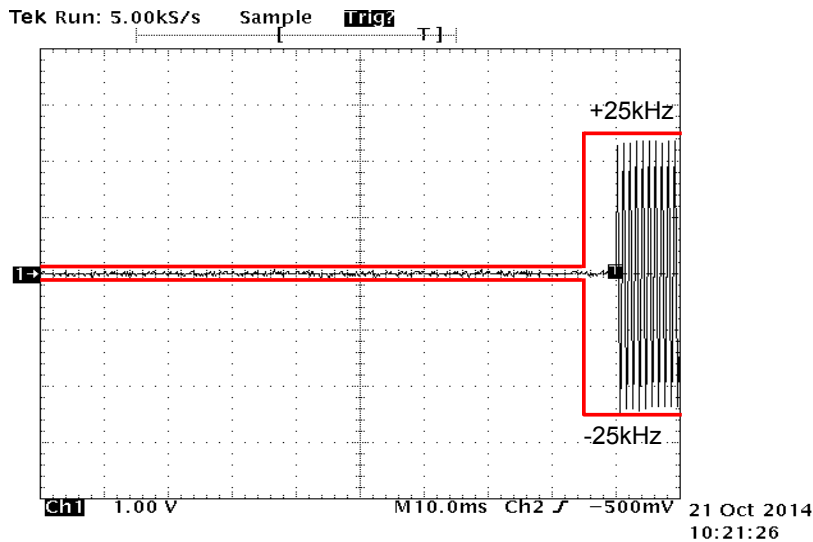


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 162.05 MHz (FCC)/ PTT:OFF -ON

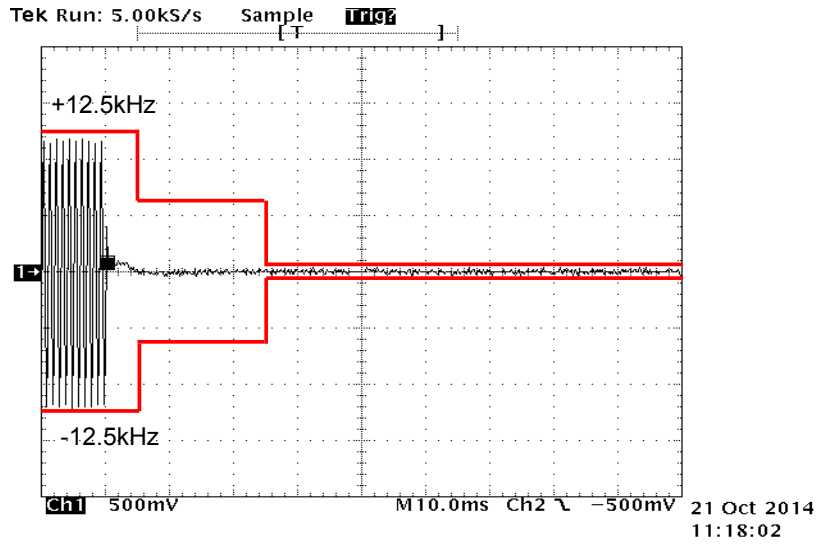


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 162.05 MHz (FCC)/ PTT:ON -OFF

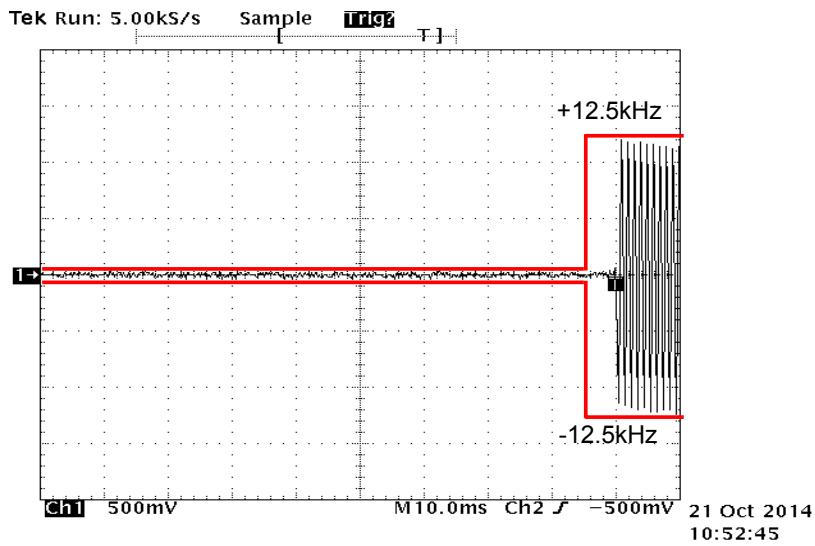


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 138.05 MHz (RSS)/ PTT:OFF -ON

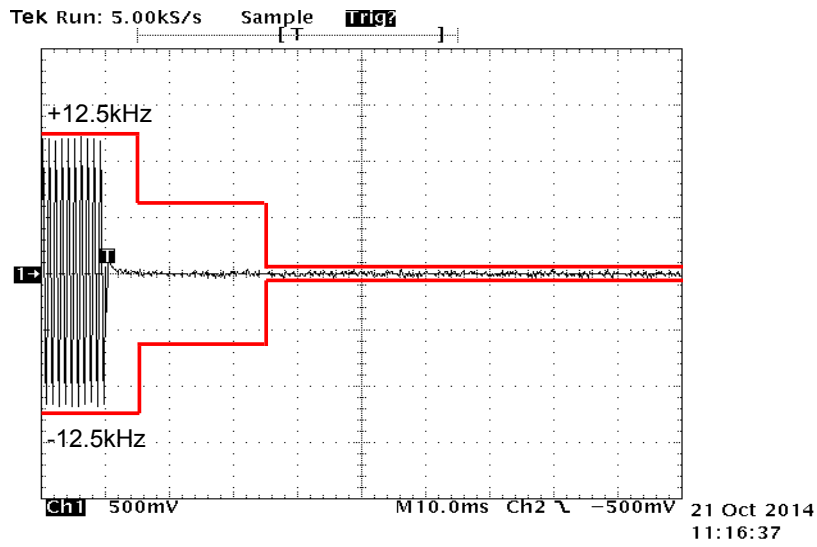


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 138.05 MHz (RSS)/ PTT:ON -OFF

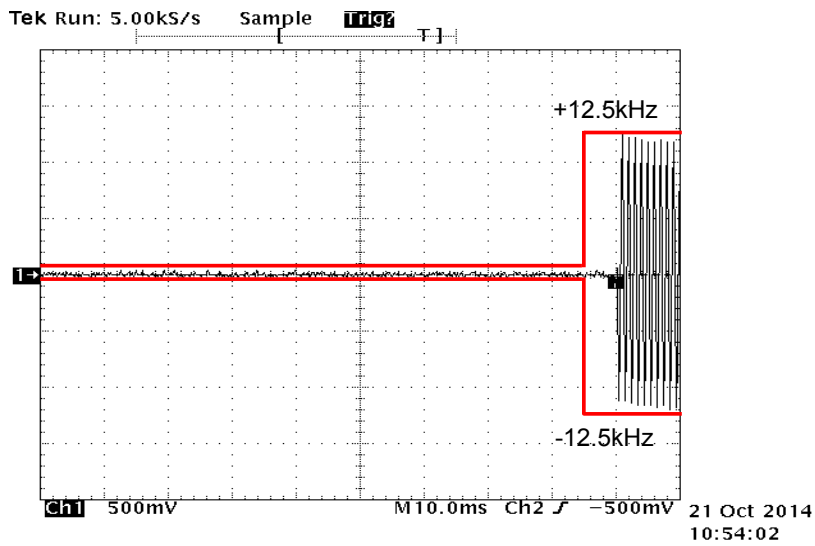

State : High Power / Authorized Bandwidth 11.25 kHz / 8K10F1E/F1D/F1W / 173.95 MHz (FCC/RSS)/ PTT:OFF -ON

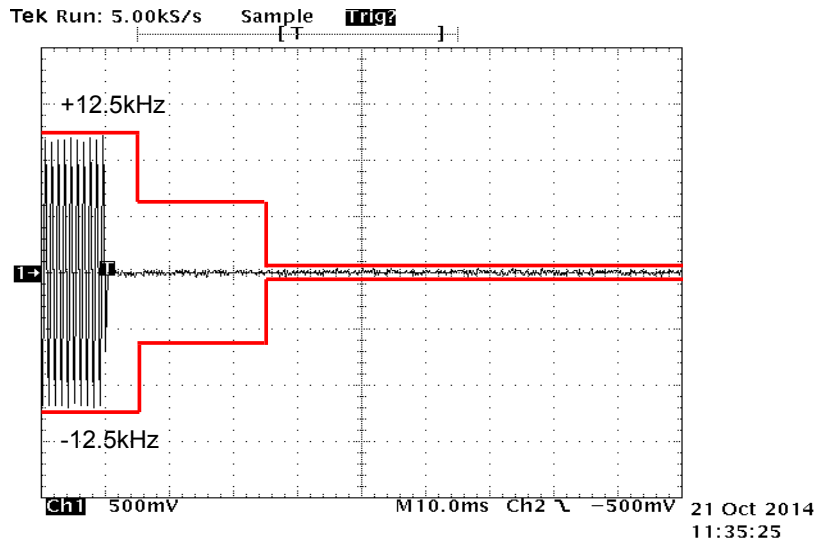


State : High Power / Authorized Bandwidth 11.25 kHz / 8K10F1E/F1D/F1W / 173.95 MHz (FCC/RSS)/ PTT:ON-OFF

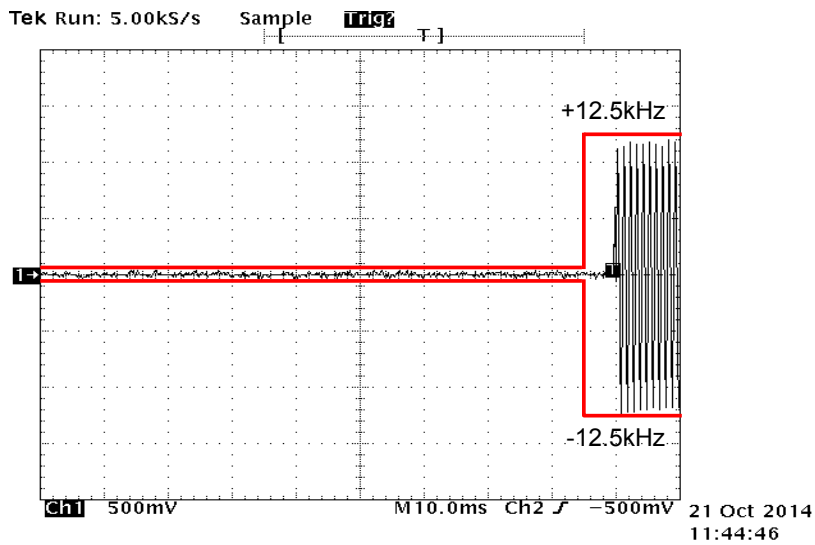





State : High Power / Authorized Bandwidth 11.25 kHz / 8K30F1E/F1D/F7W / 173.95 MHz (FCC/RSS)/ PTT:OFF -ON

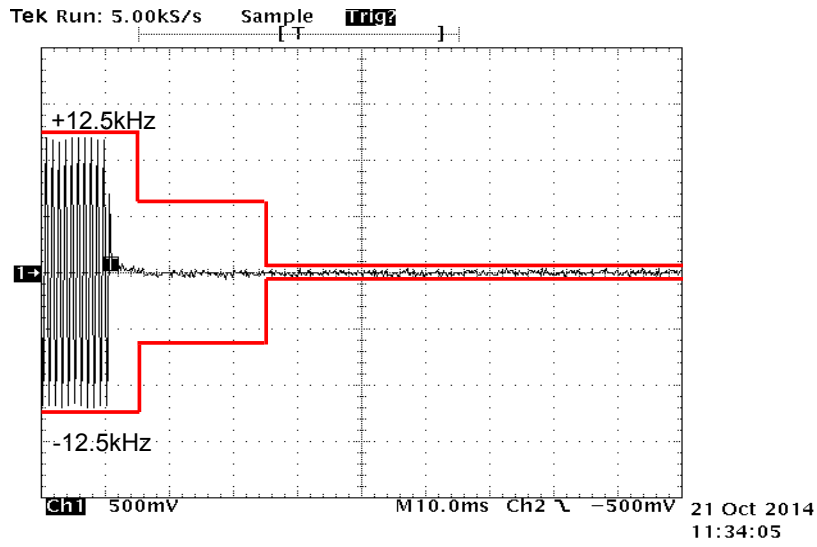


State : High Power / Authorized Bandwidth 11.25 kHz / 8K30F1E/F1D/F7W / 173.95 MHz (FCC/RSS)/ PTT:ON-OFF

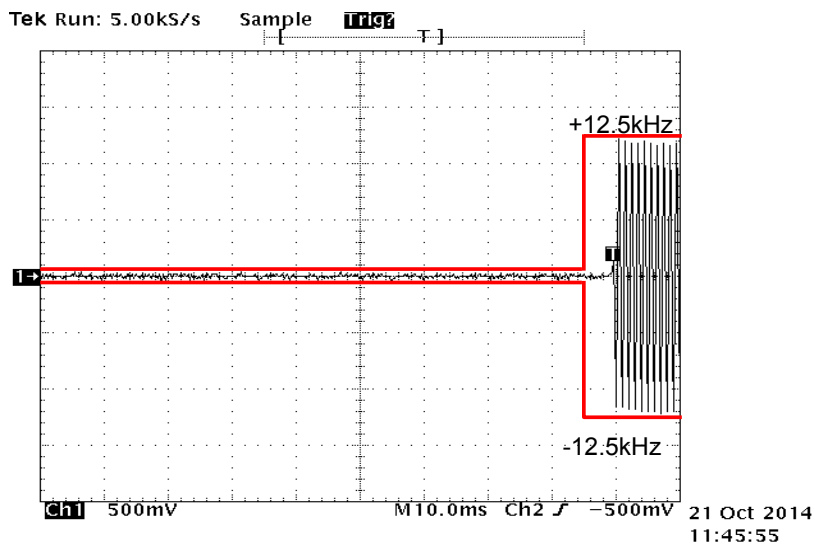


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E/F1D/F7W / 158.05 MHz (RSS)/ PTT:OFF -ON

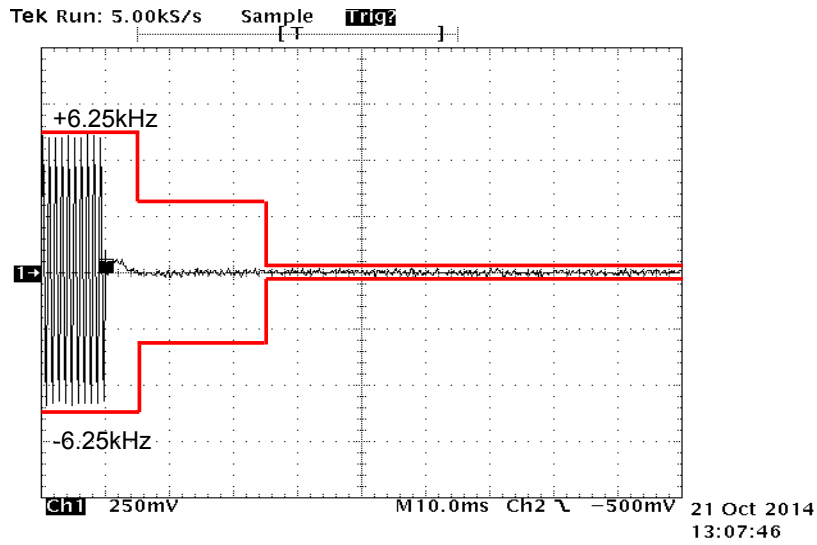


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E/F1D/F7W / 158.05 MHz (RSS)/ PTT:ON-OFF

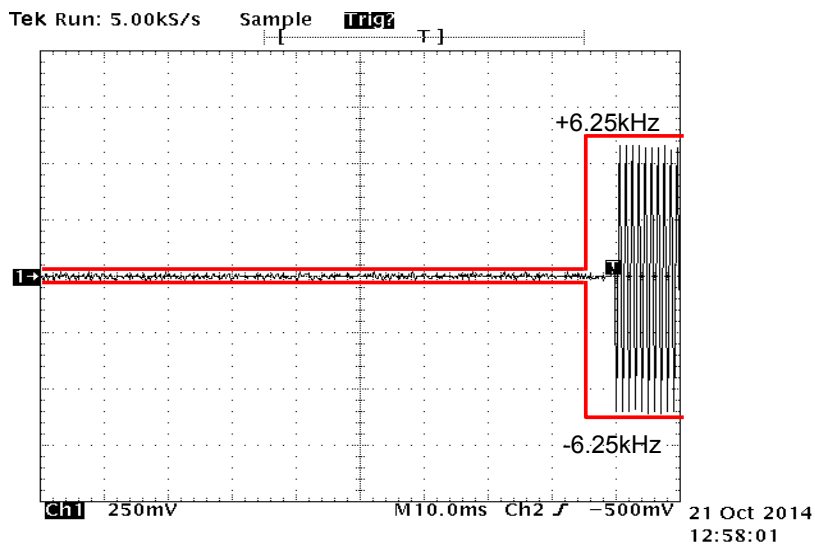


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E/F1D/F7W / 162.05 MHz (FCC)/ PTT:OFF -ON

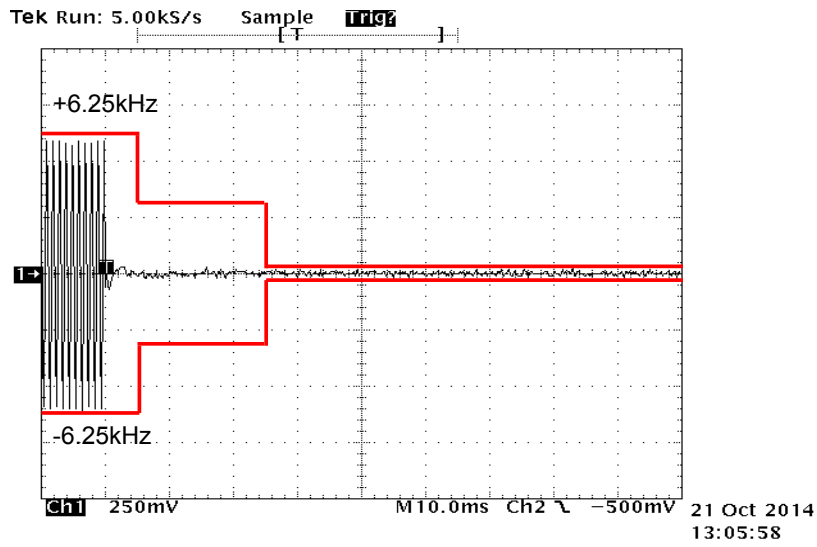


State : High Power / Authorized Bandwidth 6 kHz / 4K00F1E/F1D/F7W / 162.05 MHz (FCC)/ PTT:ON-OFF

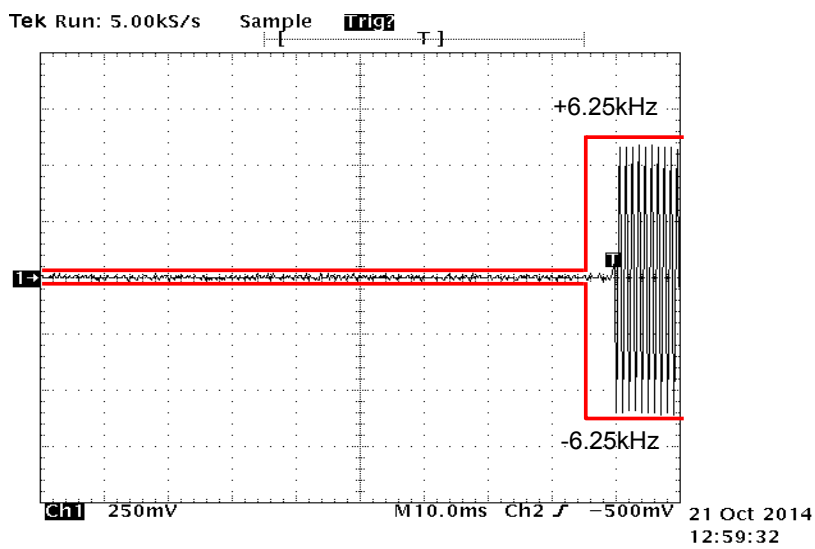

State : High Power / Authorized Bandwidth 6 kHz / 4K00F2D / 173.95 MHz (FCC/RSS)/ PTT:OFF -ON

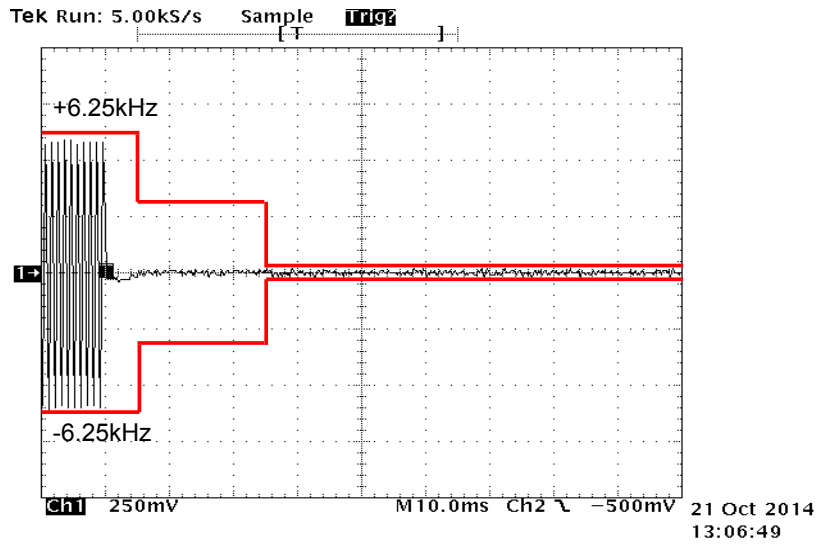

State : High Power / Authorized Bandwidth 6 kHz / 4K00F2D / 173.95 MHz (FCC/RSS)/ PTT:ON-OFF

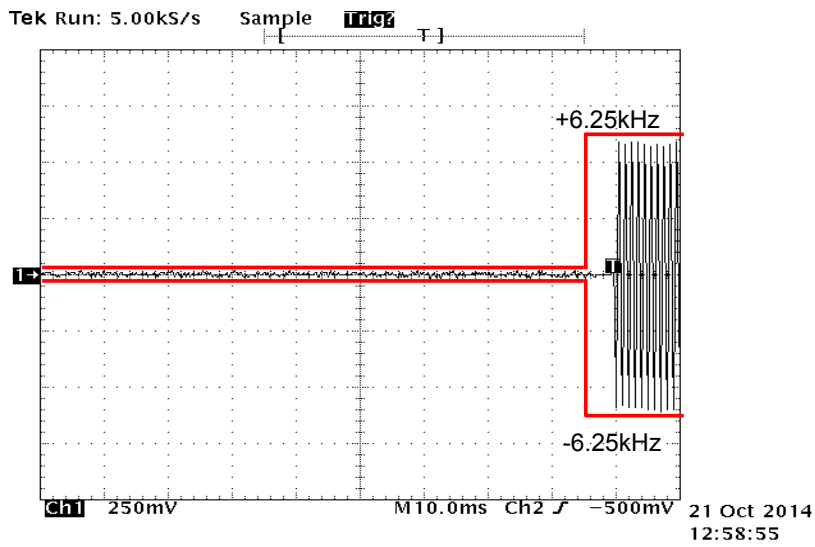

### 10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)

REGULATIONS	: FCC Part 2 Section 1047 (a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.6.2.2, 3.2.6.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter : 50 Hz
  - b) Low-pass filter : 15 kHz
  - c) Detector : positive peak
  - d) Function : FM
- 3 The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- 4 With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 5 kHz.
- 5 The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Apr. 09, 14	Apr. 30, 15
5	Audio Analyzer	Hewlett Packard	8903B	2948A07326	Apr. 10, 14	Apr. 30, 15
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Nov. 20, 13	Nov. 30, 14
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Nov. 20, 13	Nov. 30, 14
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Nov. 21, 13	Nov. 30, 14

### Measuring Equipment Configuration

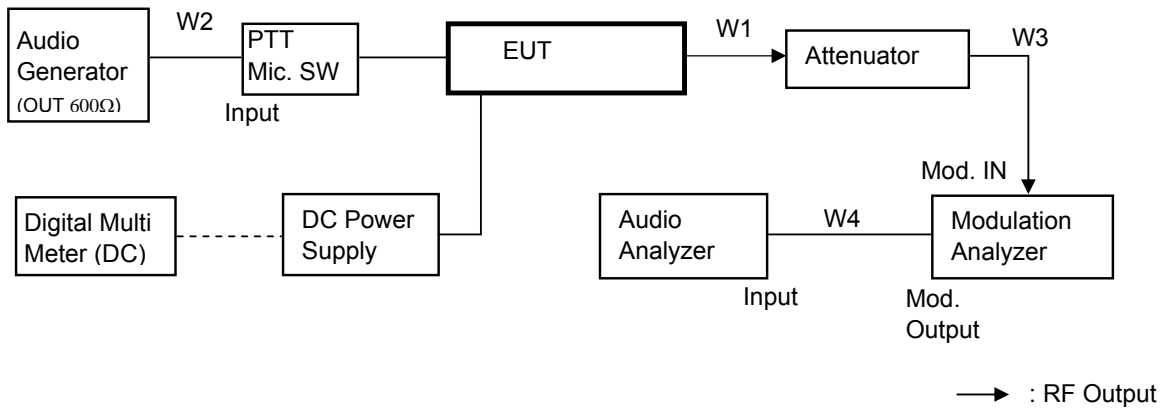


**Test Results**

Test date	Oct 15, 2014	
Location	Kashima No.1 Test Site	
temperature	20	[degree C]
Humidity Variation	51	[%]
Atmospheric Pressure	101.6	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz(RSS)

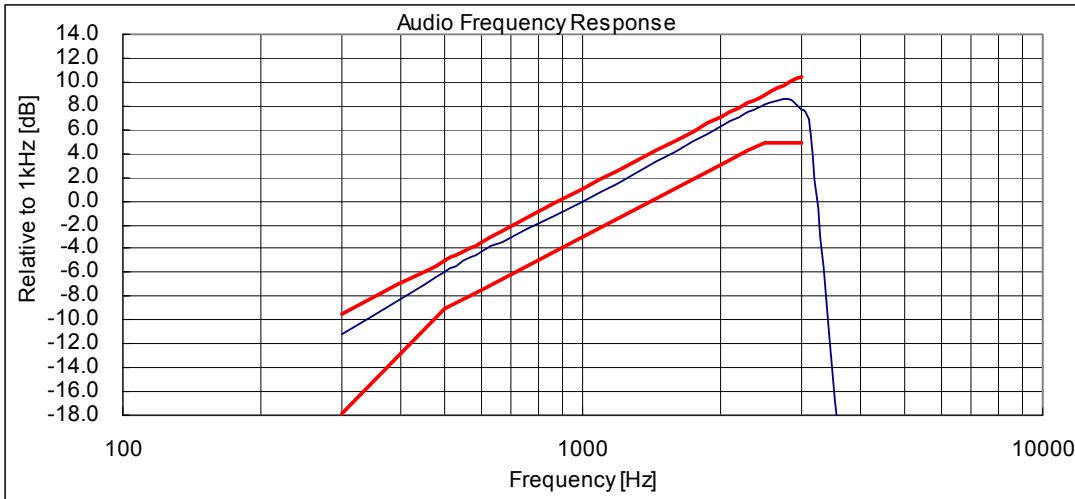

**Note:**

Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.  
 On the transmission condition below 3kHz,  
 Transceiver shows pre-emphasis condition of transmission function.  
 On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 173.95 MHz(FCC/RSS)

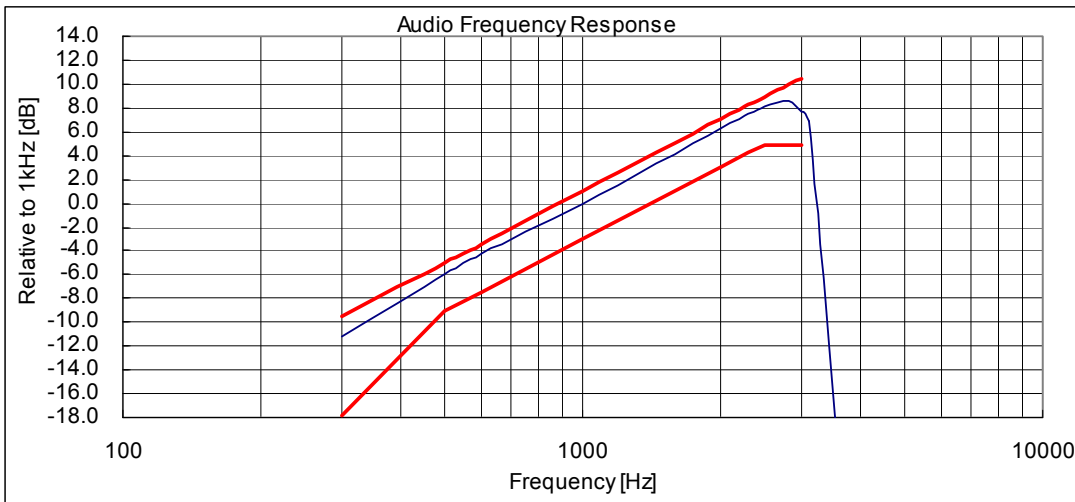

Note:

Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.

On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.



### 10.7 Modulation Limiting

REGULATIONS	: FCC Part 2 Section 1047 (b)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.3.2, 1.3.4.4

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter : off
  - b) Low-pass filter : 15 kHz
  - c) Detector : positive peak
  - d) Function : FM
- 3 Apply a 1kHz modulation signal to the transmitter from the audio generator, and adjust the level to obtain 60% of full rated system deviation.
- 4 Measure the modulation frequency that was showed on the Modulation Analyzer when the output levels of the Audio Generator were changed from -20 dB to +50 dB by 10 dB.
- 5 Set the output frequencies of the Audio Generator 300 Hz and 3 kHz, and repeat test procedure 4.
- 6 Set the Detector of the Modulation Analyzer Negative Peak.
- 7 Repeat test procedure 4 and 5.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Apr. 09, 14	Apr. 30, 15
5	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
4	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Nov. 20, 13	Nov. 30, 14
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 23, 14	Jun. 30, 15
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Nov. 21, 13	Nov. 30, 14

### Measuring Equipment Configuration

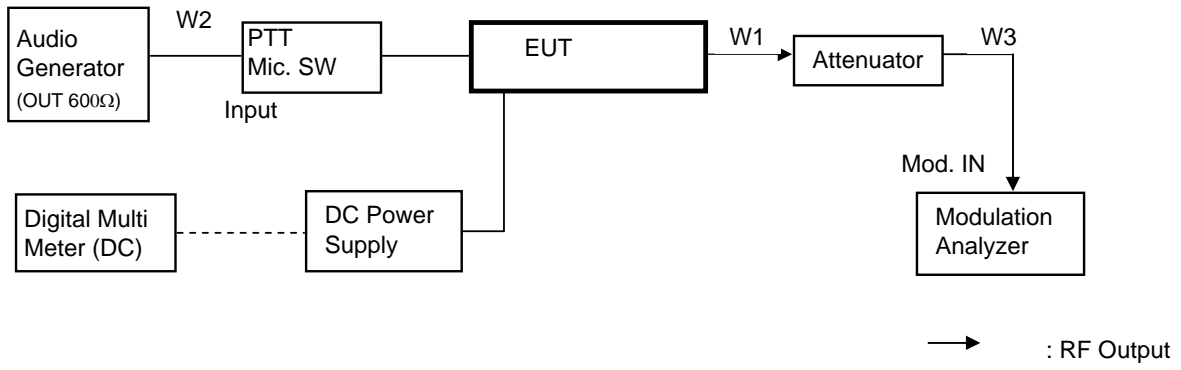


**Test Results**


Test date	Oct 15, 2014	
Location	Kashima No.1 Test Site	
temperature	20	[degree C]
Humidity Variation	51	[%]
Atmospheric Pressure	101.6	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 138.05 MHz(RSS)

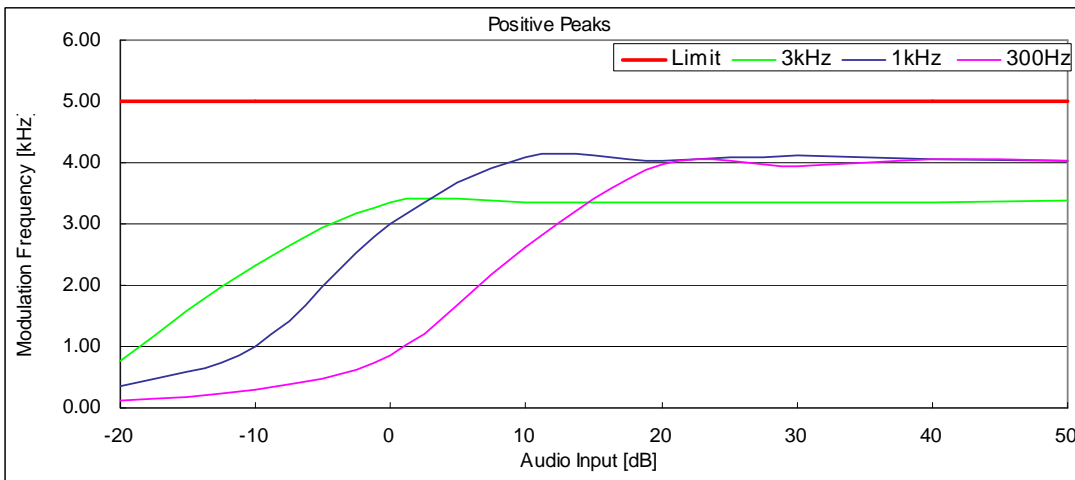


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 138.05 MHz(RSS)

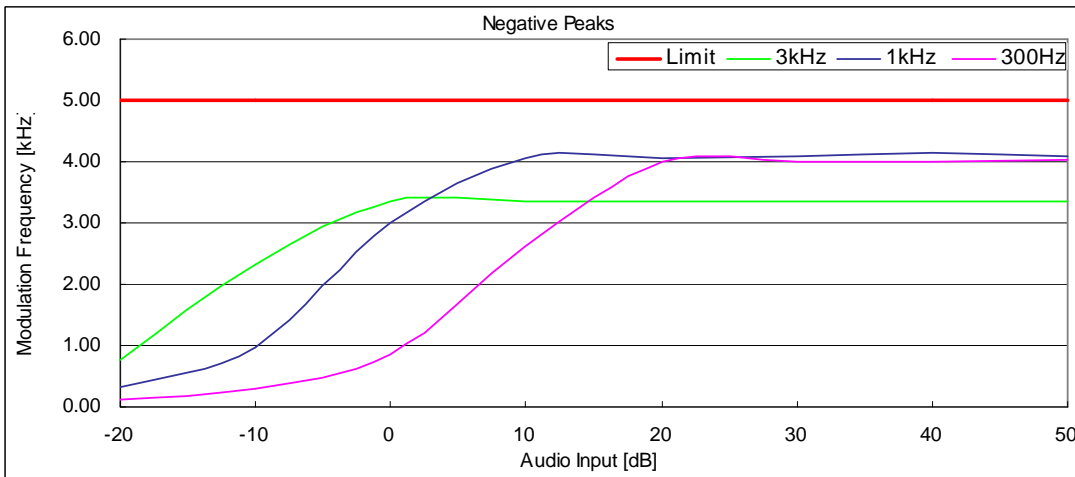


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz(FCC)

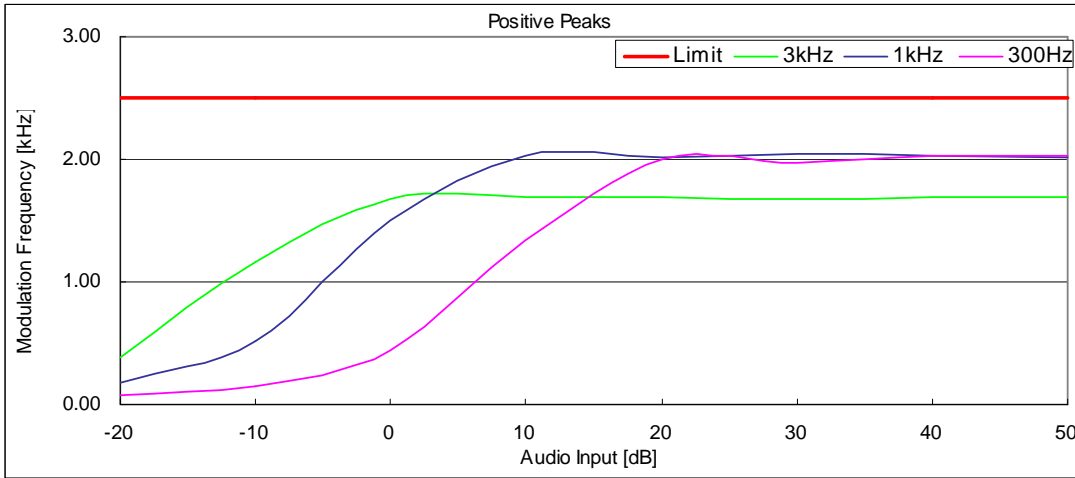


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz(FCC)

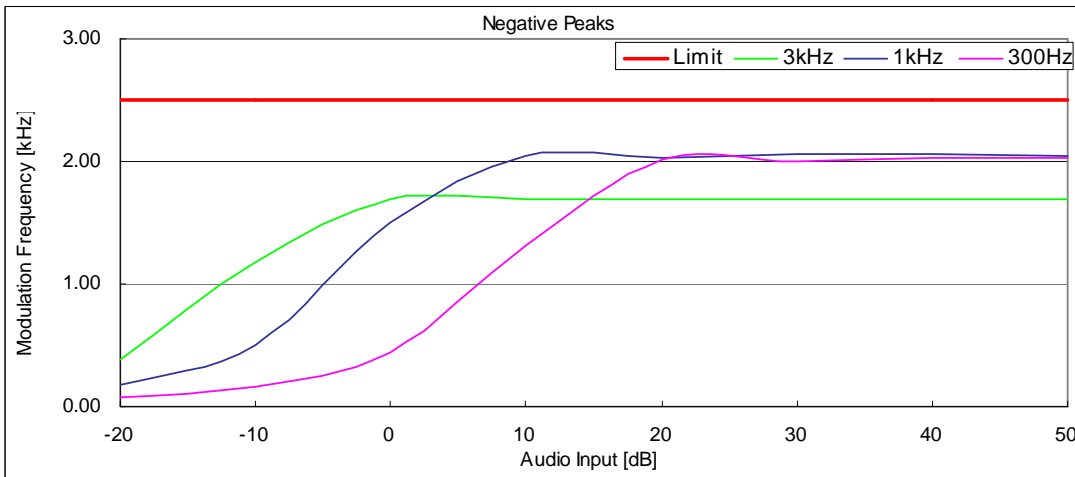

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 138.05 MHz(RSS)

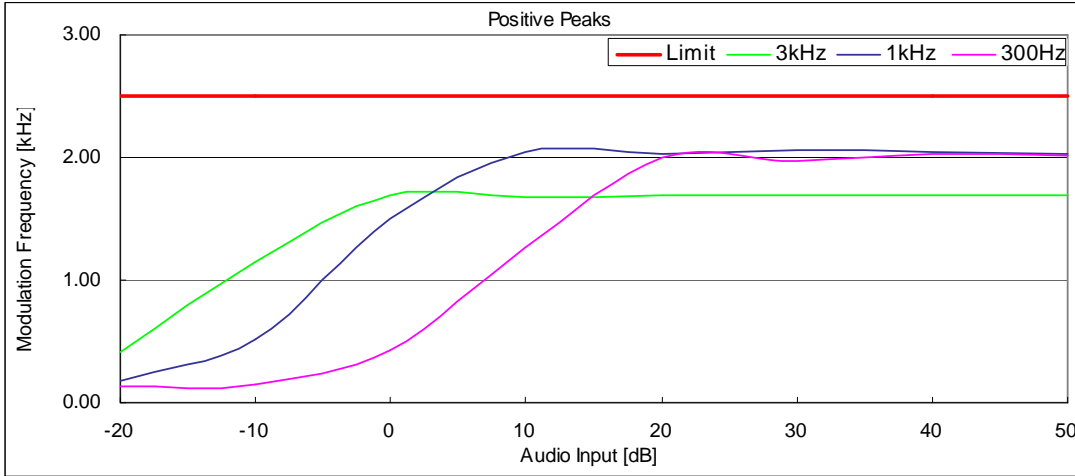

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 138.05 MHz(RSS)

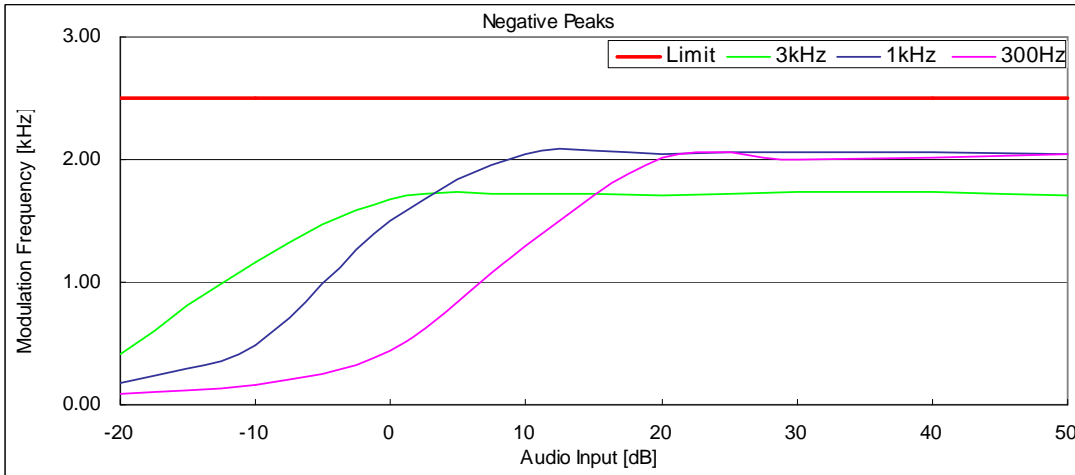

### 10.8 Frequency Stability (Temperature Variation)

REGULATIONS	: FCC Part 2 Section 1055 (a) (1), Part 90 Section 213(a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.2.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Set the temperature -30 degrees C.
- 3 Leave the EUT for 1 hour after it became the temperature that was set up.
- 4 Make the EUT the transmitting state.  
One minutes later, measure the output frequency.
- 5 Make the EUT the receiving state.
- 6 Set the temperature 50 degrees C by 10 degrees C.  
And repeat test procedure 3 to 5.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
4	DC Power Supply	Takasago	GP035-20R	1014199060	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15
6	Temperature Chamber	Tabai	PL-3F	5103661	None	None
7	Temperature Meter	Sato	TC-5000 I KTH-II	A11999972	Apr. 15, 14	Apr. 30, 15
8	GPS Receiver	Hewlett Packard	HP Z3801A	3542A02414	None	None

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 23, 14	Jun. 30, 15
W2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 23, 14	Jun. 30, 15

### Measuring Equipment Configuration

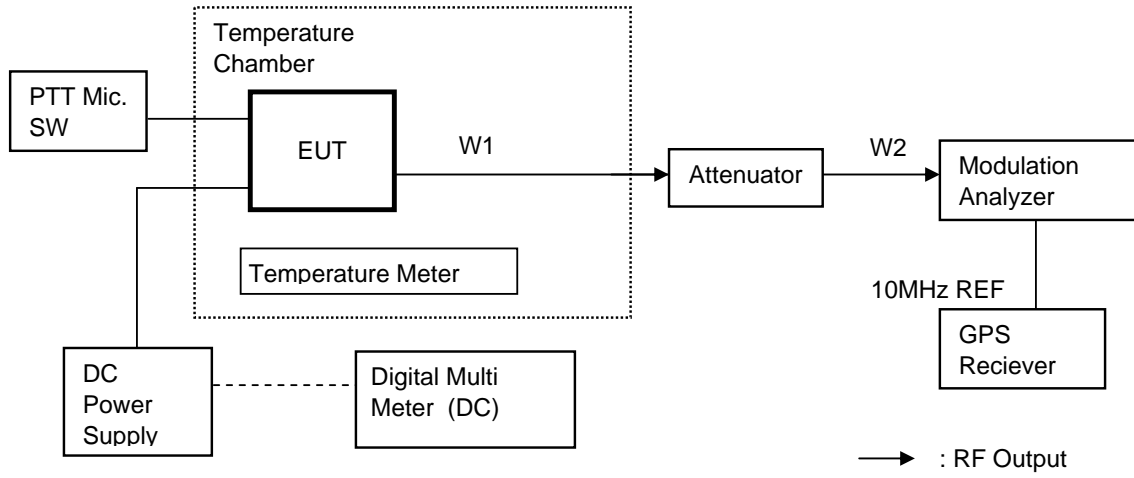


**Test Results**

Test date	Nov 06, 2014
Location	Kashima No.1 Test Site
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05 MHz (FCC)  
 Reference Frequency: 150.050000 MHz(FCC Stability)


No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	150.049970	-0.20	2.0	1.80
2	-20	150.049980	-0.13	2.0	1.87
3	-10	150.049980	-0.13	2.0	1.87
4	0	150.049960	-0.27	2.0	1.73
5	10	150.049960	-0.27	2.0	1.73
6	20	150.049970	-0.20	2.0	1.80
7	30	150.049980	-0.13	2.0	1.87
8	40	150.049960	-0.27	2.0	1.73
9	50	150.049960	-0.27	2.0	1.73

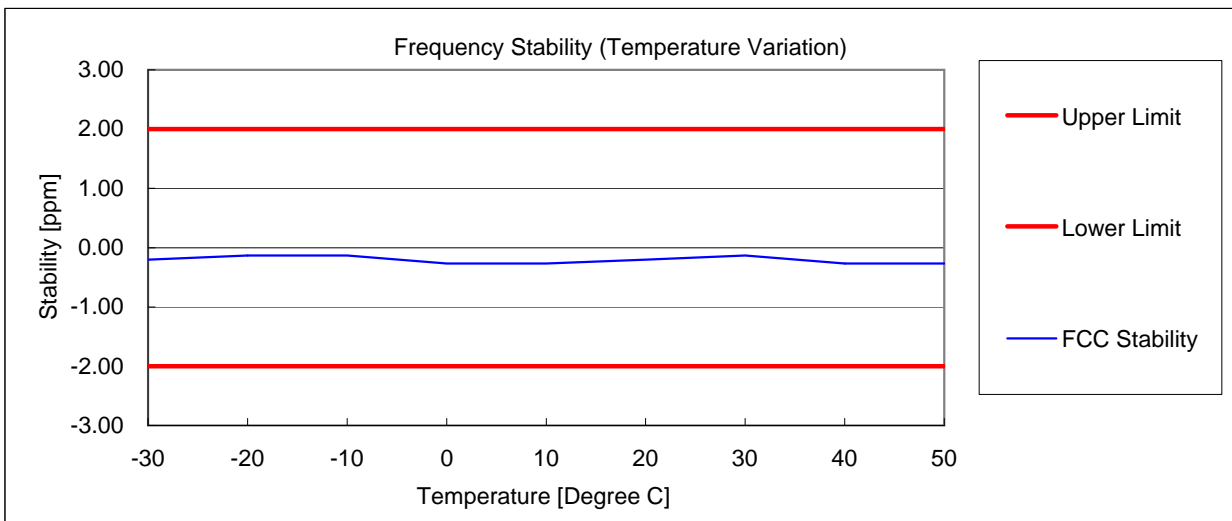



State : High Power / Authorized Bandwidth 20 kHz / 158.05 MHz (RSS)  
 Reference Frequency: 158.050000 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	158.049970	0.06	2.0	1.94
2	-20	158.049970	0.06	2.0	1.94
3	-10	158.049980	0.13	2.0	1.87
4	0	158.049970	0.06	2.0	1.94
5	10	158.049960	0.00	2.0	2.00
6	20	158.049960	0.00	2.0	2.00
7	30	158.049980	0.13	2.0	1.87
8	40	158.049960	0.00	2.0	2.00
9	50	158.049970	0.06	2.0	1.94

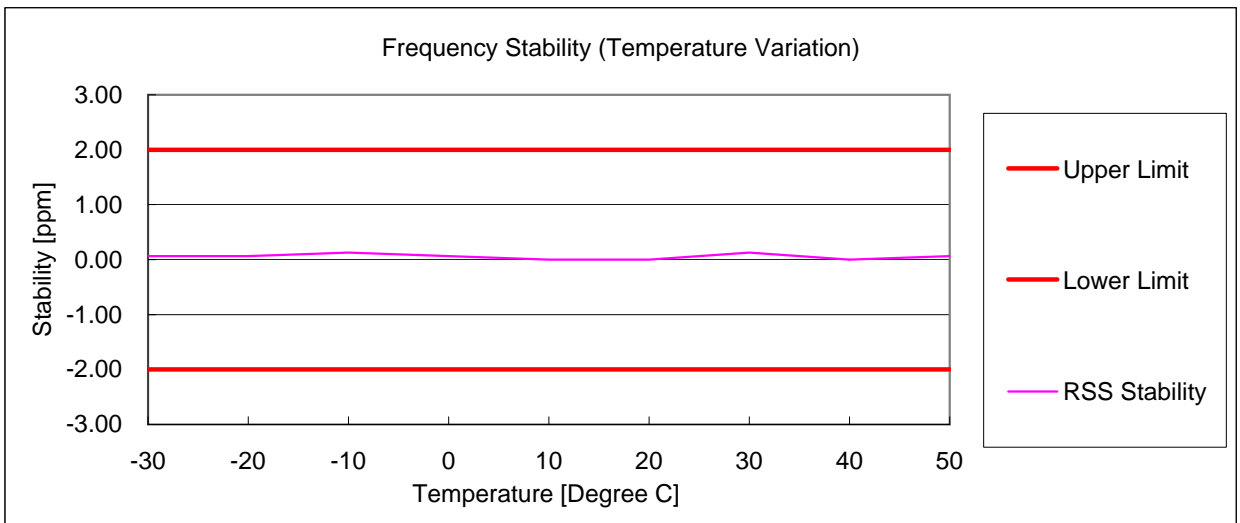

### 10.9 Frequency Stability (Voltage Variation)

REGULATIONS	: FCC Part 2 Section 1055 (d) (1), Part 90 Section 213(a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.2.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The power supply voltage to the EUT was varied from 85 % to 115 % of the nominal value measured at the input to the EUT.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 23, 14	Jun. 30, 15
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 23, 14	Jun. 30, 15
3	Modulation Analyzer	Hewlett Packard	8901B	2608A00781	Aug. 27, 14	Aug. 31, 15
4	DC Power Supply	Takasago	GP035-20R	1014199060	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15
6	Temperature Chamber	Tabai	PL-3F	5103661	None	None
7	Temperature Meter	Sato	PC-5000TRH-II	A11999972	Apr. 15, 14	Apr. 30, 15
8	GPS Receiver	Hewlett Packard	HP Z3801A	3542A02414	None	None

#### Measuring Cable:

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 23, 14	Jun. 30, 15
W2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 23, 14	Jun. 30, 15

#### Measuring Equipment Configuration

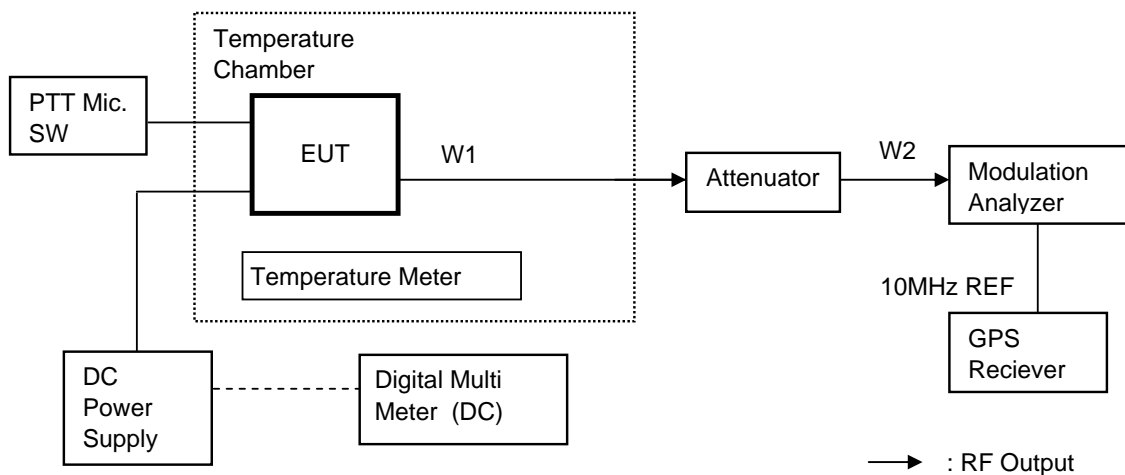

**Test Results**

Test date	Nov 06, 2014
Location	Kashima No.1 Test Site
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05 MHz (FCC)

Reference Frequency: 150.050000 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.56	150.049980	-0.13	2.0	1.87
2	20+/-5	100	13.60	150.049970	-0.20	2.0	1.80
3	20+/-5	115	15.64	150.049980	-0.13	2.0	1.87

State : High Power / Authorized Bandwidth 20 kHz / 158.05 MHz (RSS)

Reference Frequency: 158.049960 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.56	158.049970	0.06	2.0	1.94
2	20+/-5	100	13.60	158.049960	0.00	2.0	2.00
3	20+/-5	115	15.64	158.049970	0.06	2.0	1.94

### 10.10 Receiver Spurious Emissions(Radiated)

REGULATIONS	:	RSS-119 Section 5.11, RSS-Gen Section 6
TEST METHOD/GUIDE	:	RSS-Gen Section 4.10

#### TEST PROCEDURE

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Tabletop Equipment  
EUT is placed on the wooden table, the top of which is 0.8meter above the metal ground plane(turntable).
- 3 Interconnecting Cables  
Excess part of the interconnecting cables longer than 1 meter are bundled in the center. Cables that hang closer than 40 cm to the ground plane is folded back and forth forming to 40 cm long, hanging approx, in the middle between ground plane and table.
- 4 Measuring Instruments  
Measuring instruments list and their calibration schedule are shown on Measurement Equipment Configuration.  
The brief description are as follows;
- 5 Antennas  
The broadband Bi-cog antenna is used for measurement on the frequency range 30 – 1000 MHz.  
The Double ridged guide antenna is used for frequency higher than 1000 MHz.
- 6 Pre-amplifier  
The broadband pre-amplifier is used for radiated emission measurement.  
The signal to noise ratio is improved by using pre-amplifier.
- 7 Spectrum Analyzer  
The spectrum analyzer is used for preliminary measurement of frequency range 30 – 1000 MHz, and also used for final measurement of higher than 1000 MHz (RBW : 1 MHz).
- 8 EMI Test Receiver  
The Quasi-peak detector (IF bandwidth : 120 kHz) built in test receiver is used for final measurement of the frequency 30 – 1000 MHz.  
The test receiver is complied with the specification of the CISPR publication 16.
- 9 Turntable  
The turntable is capable for EUT weight and rotatable 0 to 360 degree horizontally by remote control in the test room.
- 10 Antenna Mast  
The antenna mast is attachable to all antennas described on antenna height is adjustable 1 to 4 meters continuously by remote control at the test room, and antenna polarization is also changed by the remote control.
- 11 Preliminary Measurement  
EUT is tested on all operating conditions.  
The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to find the worst emission conditions in configuration, operating mode, or ambient noise notation.

12 Final Measurement

The EUT operated in the condition where maximum emission is found in the preliminary test.

The turntable azimuth(EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.


**TEST EQUIPMENTS**

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Broad Band Antenna	Schwarzbeck	VULB9168	288	Jul. 14, 14	Jul. 31, 15
2	Amplifier	Intertek Japan	ZX60-3018G	005	Jan. 14, 14	Jan. 31, 15
3	6dB Attenuator	TAMAGAWA	CFA-01	A00040805	Jan. 14, 14	Jan. 31, 15
4	Spectrum Analyzer	Agilent	N9030A	US51350170	Feb. 08, 14	Feb. 28, 15
5	Double Ridged Antenna	EMCO	3115	5045	Mar. 25, 14	Mar. 31, 15
6	3dB Attenuator	HUBER + SUHNER	6803.17.B	5111	Feb. 26, 14	Feb. 28, 15
7	Amplifier	TOYO	TPA0118-30	402	Feb. 26, 14	Feb. 28, 15
8	Double Ridged Antenna	TSJ	MLA-18265-B03-	1694440	Sep. 11, 14	Sep. 30, 15
9	Test receiver	Rohde & Schwarz	N9038A	MY51210201	Aug. 02, 14	Aug. 31, 15
10	RF Switch	Intertek Japan	ACX-150-1	A12301501	Jan. 14, 14	Jan. 31, 15
11	DC Power Supply	KIKUSUI	PMC35-3A	LE000716	None	None
12	Digital Multi Meter	FLUKE	8846A	9642018	Jun. 04, 14	Jun. 30, 15
13	Dummy Load	TME	CT-150NP	1138693	Nov. 20, 13	Nov. 30, 14

**USED CABLES**

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
R11	Coaxial Cable	FUJIKURA	5D-2W	R11	Jan 14, 14	Jan. 31, 15
R3	Coaxial Cable	FUJIKURA	10D-2W	R3	Jan 14, 14	Jan. 31, 15
R5	Coaxial Cable	FUJIKURA	RG-5A/U	R5	Jan 14, 14	Jan. 31, 15
R7	Coaxial Cable	MIYAZAKI	5D-2W	R7	Jan 14, 14	Jan. 31, 15
R10	Coaxial Cable	FUJIKURA	5D-2W	R10	Jan 14, 14	Jan. 31, 15
R12	Coaxial Cable	SUHNER	SUCOFLEX 104	229603/4	Feb 26, 14	Feb. 28, 15
R13	Coaxial Cable	Candox	5B-048-98-98-5000	111130	Feb 26, 14	Feb. 28, 15
R14	Coaxial Cable	Candox	5B-048-98-98-6000	120315	Sep 12, 14	Sep. 30, 15
W5	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun 23, 14	Jun. 30, 15

**MEASUREMENT EQUIPMENT CONFIGURATION**

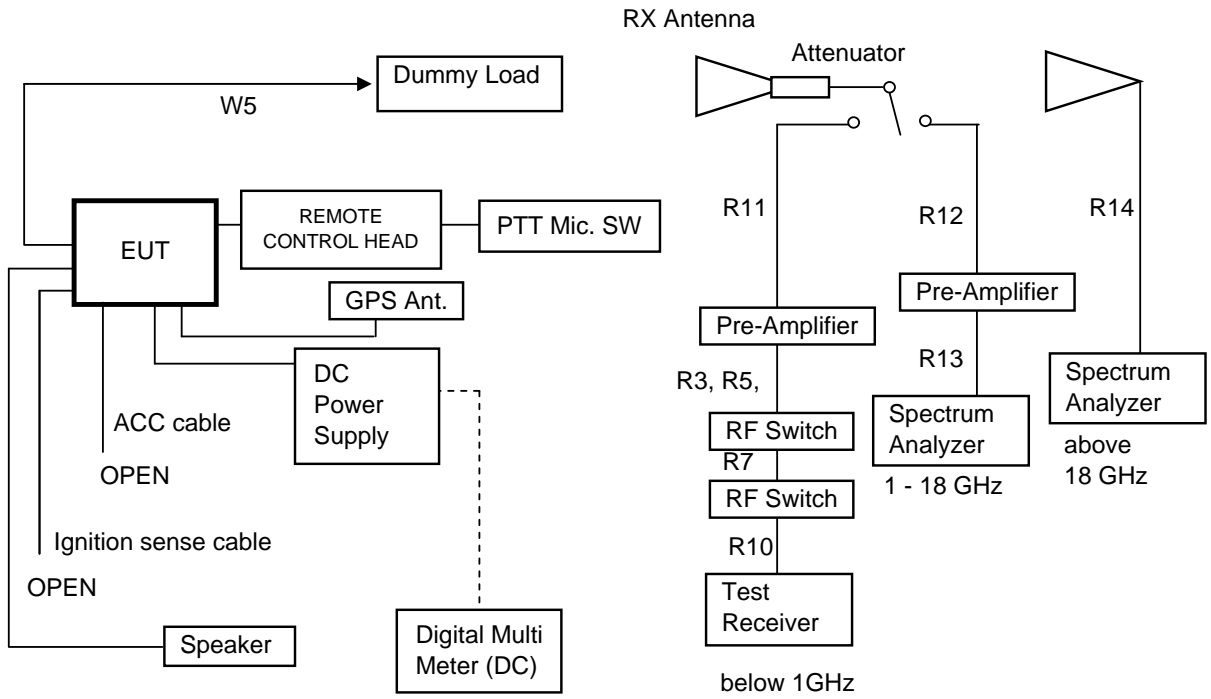

**TEST RESULTS**

Test date	Nov. 01, 2014 and Nov. 02, 2014
Location	Kashima No.12 Test Site
temperature	20.2 to 20.6 [degree C]
Humidity Variation	59 to 60 [%]
Atmospheric Pressure	101.0 to 101.2 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for the RSS frequency band of section 10.1  
 State the worst case (below).

State : 158.05 MHz Receiver Condition

No.	Frequency (MHz)	Pol	Mode	Level (dBuV)	Factor* (dB)	Emission Level (dBuV/m)	Limit Level (dBuV/m)	Margin (dB)
1	38.77	Hor.		-	-3.0	-	40.0	-
		Ver.		25.9	-3.0	22.9	40.0	17.1
2	109.44	Hor.		-	-4.8	-	43.5	-
		Ver.		29.8	-4.8	25.0	43.5	18.5
3	633.59	Hor.		17.1	10.1	27.2	46.0	18.8
		Ver.		16.5	10.1	26.6	46.0	19.4
4	710.40	Hor.		18.3	11.6	29.9	46.0	16.1
		Ver.		18.0	11.6	29.6	46.0	16.4
5	748.75	Hor.		15.7	12.4	28.1	46.0	17.9
		Ver.		15.0	12.4	27.4	46.0	18.6
6	787.20	Hor.		18.4	13.2	31.6	46.0	14.4
		Ver.		-	13.2	-	46.0	-
7	806.37	Hor.		15.8	13.6	29.4	46.0	16.6
		Ver.		-	13.6	-	46.0	-
8	6239.64	Hor.	AVG	27.0	8.8	35.8	54.0	18.2
		Ver.	AVG	27.8	8.8	36.6	54.0	17.4

There is the margin of 20dB over except for the above points.

\* Factor = Antenna, Antenna Pad, Cable, Preamp

Emission Level = Reading Level + Factor

Note:

- 1 Measurement distance is 3 metres.
- 2 Scanned frequency are 30 to 25000 MHz.
- 3 Highest oscillator frequency is 4960 MHz.  
(TXRX UNIT : 223.95MHz.)

**10.10 Necessary Bandwidth and Emission Bandwidth**

REGULATIONS	: FCC Part 2 Section 202 (g) & Federal Register/ Vol.68, No236 TRC 43
-------------	--

**Calculation Results**

State : 16K0F3E (Authorized Bandwidth 20 kHz)

Item	Mark		
Maximum Modulation	(M)	3	kHz
Maximum Deviation	(D)	5	kHz
Constant Factor	(K)	1	
Necessary Bandwidth	(Bn)	16	kHz

$B_n = (2 \times M) + (2 \times D \times K)$

State : 11K0F3E (Authorized Bandwidth 11.25 kHz)

Item	Mark		
Maximum Modulation	(M)	3	kHz
Maximum Deviation	(D)	2.5	kHz
Constant Factor	(K)	1	
Necessary Bandwidth	(Bn)	11	kHz

$B_n = (2 \times M) + (2 \times D \times K)$

State: 8K10F1D / 8K10F1E / 8K10F1W (9600bps, Authorized Bandwidth 11.25 kHz)

Item	Mark		
Digital information rate	(R)	9600	bps
Peak frequency deviation	(D)	3.111	kHz
Signaling states	(S)	4	
Numerical factor	(K)	1	
Necessary Bandwidth	(Bn)	8.1	kHz Measurements were done*

\*Measurements per Rule 47CFR Part 2.202(c)(4) were done because Part 2.202(g) Table III-A.1. formulation produces an excessive result using the value of K recommended in th Table. Therefore the 99% energy rule (title 47CFR 2.202(a)) was used for digital mode and is more accurate than Carson's rule. It basically states that 99% of the modulation energy falls within X kHz, in this case, 8.10kHz Measurements were performed in accordance with TIA/EIA 102.CAAB Section 2.2.5.2. The emission mask was obtained from 47CFR 90.210(d).

State : 8K30F1E / 8K30F1D / 8K30F7W (4Level FSK / 9600bps, Authorized Bandwidth 11.25 kHz)

Item	Mark		
Digital information rate	(R)	9600	bps
Peak frequency deviation	(D)	3.391	kHz
Signaling states	(S)	4	
Numerical factor	(K)	0.516	
Necessary Bandwidth	(Bn)	8.3	kHz

$B_n = (R / \log_2 S) + 2 \times D \times K$

State : 4K00F1E / 4K00F1D / 4K00F7W (4Level FSK / 4800bps, Authorized Bandwidth 6 kHz)

Item	Mark		
Digital information rate	(R)	4800	bps
Peak frequency deviation	(D)	1.55	kHz
Signaling states	(S)	4	
Numerical factor	(K)	0.516	
Necessary Bandwidth	(Bn)	4	kHz

$B_n = (R / \log_2 S) + 2 \times D \times K$

State : 4K00F2D (CWID, Authorized Bandwidth 6 kHz)

Item	Mark		
Maximum Modulation	(M)	0.8	kHz
Maximum Deviation	(D)	1.2	kHz
Numerical factor	(K)	1	
Necessary Bandwidth	(Bn)	4	kHz

$B_n = (2 \times M) + (2 \times D \times K)$