



## TEST REPORT

REGULATION :

FCC Part 2, 90

RSS-119 Issue 12

Applicant	Testing Laboratory
JVC KENWOOD Corporation 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan Tel.: +81 45 939 6254 Fax.: +81 45 939 6261	Intertek Japan K.K. Kashima Laboratory URL: <a href="http://www.japan.intertek-etlsemko.com">http://www.japan.intertek-etlsemko.com</a> (Anechoic chamber) 298-6 Sada, Kashima, Ibaraki 314-0027 Japan Tel. +81 299 82 8464 (Open area test site) 3-2 Sunayama, Kamisu, Ibaraki 314-0255 Japan Tel. +81 479 40 1097

<b>Equipment type</b>	VHF DIGITAL TRANSCEIVER
<b>Trademark</b>	KENWOOD
<b>FCC Model(s)</b>	TK-D740-M, TK-D740H-K, TK-D740HV-K
<b>IC Model(s)</b>	TK-D740H-K
<b>Serial No.</b>	ES2-2
<b>FCC ID</b>	K44475600
<b>IC CN and UPN</b>	282F-475600
<b>Test Result</b>	Complied
<b>Report Number</b>	15080011JKA-003
<b>Original Issue Date</b>	September 14, 2015

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Hideaki Kosemura

[Technical Dept. Manager]

Tested by

Koichi Wagatsuma

[Engineer]

**In Accordance with FCC Rules and Regulations, Volume II, Part 2 and 90****Sub-part 2.1033**

<b>Applicant and Manufacture Information</b>	
APPLICANT	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
Contact Person	: Tamaki Shimamura Manager, Communications Systems Business Operation
MANUFACTURER	
Company	: JVC KENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
<b>(c)(2) FCC ID</b>	
FCC ID	: K44475600
Model number	: TK-D740-M, TK-D740H-K, TK-D740HV-K
Serial number	: ES2-2
<b>Instruction Manual(S)</b>	
Instruction manual(s)	: Please refer to attached Exhibits F
<b>Type of Emission</b>	
Emission Designation	: 16K0F3E(Wide) 16K0F3E is IC Only 11K0F3E(Narrow) 7K60FXD(Narrow) / 7K60FXE(Narrow)
<b>Frequency range</b>	
Frequency Range	: FCC: 150 to 174 MHz IC: 138 to 144 MHz and 148 to 174 MHz
<b>Power Rating</b>	
Output Power	: 5 to 50 W
Type	: Continuously Variable
<b>Maximum Power Rating</b>	
Output Power	: 50W
<b>Voltages &amp; currents in all elements in final RF stage, including final transistor or solid-state device</b>	
Collector Current, A	: 15.0 A Maximum
Collector Voltage, Vdc	: 13.6 Vdc
Supply Voltage, Vdc	: 13.6 Vdc
<b>Other Information</b>	
Number of Channel	: 32 channels / 2 zone
Maximum Deviation	: $\pm 5$ kHz (16K0F3E), $\pm 2.5$ kHz (11K0F3E)
Frequency Stability	: 2.0 ppm
:	:
Antenna Impedance	: 50 $\Omega$ Norminal
<b>Note</b>	

## TABLE OF CONTENTS

---

	Page
SECTION 1. GENERAL INFORMATION	4
SECTION 2. SUMMARY OF TEST RESULT	5
SECTION 3. TEST AND MEASUREMENT DATA	6
SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)	7
SECTION 5. SUPPORT EQUIPMENT	8
SECTION 6. USED CABLE(S)	9
SECTION 7. TEST CONFIGURATION	10
SECTION 8. OPERATING CONDITION	11
SECTION 9. MEASUREMENT UNCERTAINTY	12
SECTION 10. TEST DATA	
10.1 Carrier Output Power (Conducted)	13
10.2 Unwanted Emissions (Transmitter Conducted)	16
10.3 Field Strength of Spurious Radiation	19
10.4 Emission Masks (Occupied Bandwidth)	25
10.5 Transient Frequency Behavior	32
10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)	38
10.7 Modulation Limiting	42
10.8 Frequency Stability (Temperature Variation)	47
10.9 Frequency Stability (Voltage Variation)	51
10.10 Receiver Spurious Emissions(Radiated)	53
10.11 Necessary Bandwidth and Emission Bandwidth	57
10.12 99% Occupied Bandwidth	58
APPENDIX PHOTOGRAPHS	

---

## SECTION 1. GENERAL INFORMATION

### TEST PERFORMED

Location	Kashima No.1 Test Site and No.12 Test Site		
EUT Received	August 07, 2015		
Date of Test	August 08, 2015	to	September 07, 2015
Standard Applied	FCC Part 2, 90 RSS-119 Issue 12		
Measurement Method	ANSI/TIA-603-D-2010 / RSS-119 Issue 12(2015), RSS-Gen Issue 4(2014)		
Deviation from Standard(s)	Not applicable		

### QUALIFICATIONS OF TESTING LABORATORY (Kashima Lab.)

ACCREDITATION	SCOPE	LAB. CODE	Remarks
VLAC	EMC Testing	VLAC-008-1	JAPAN
BSMI	EMC Testing	SL2-IN-E-6008	TAIWAN
FILING			
VCCI	EMC Testing	A-0126	JAPAN
FCC	EMC Testing	JP0008	
IC	EMC Testing	IC-2042K-3, IC-2042Q-12	CANADA
CB-Scheme	EMC Testing	TL222	IECEE

### ABBREVIATIONS

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	4LEVEL FSK	4LEVEL Frequency Shift Key
GMSK	Gaussian Maximum Shift Key	CW ID	Continuously Repeating bit stream
FM	Frequency Modulation	C4FM	Constant envelope 4 Level FM
PTT	Push to Talk	AFC	Automatic frequency control

### Revision Summary

Revised Date	Section	Description of Changes

## SECTION 2. SUMMARY OF TEST RESULT

FCC Part2	Part90	IC RSS-119	TEST ITEM	RESULTS	Comments
2.1046 (a)	-	5.4	Carrier Output Power (Conducted)	<b>PASS</b>	
2.1051	90.210	5.8	Unwanted Emissions (Transmitter Conducted)	<b>PASS</b>	
2.1053 (a)	90.210	5.8	Field Strength of Spurious Radiation	<b>PASS</b>	
2.1049 (c) (1)	90.210	5.5	Emission Masks (Occupied Bandwidth)	<b>PASS</b>	
-	90.214	5.9	Transient Frequency Behavior	<b>PASS</b>	
2.1047 (a)	-	-	Audio Low Pass Filter (Voice Input)	<b>PASS</b>	
2.1047 (a)	-	-	Audio Frequency Response	<b>PASS</b>	
2.1047 (b)	-	-	Modulation Limiting	<b>PASS</b>	
2.1055 (a) (1)	90.213 (a)	5.3	Frequency Stability (Temperature Variation)	<b>PASS</b>	
2.1055 (d) (1)	90.213 (a)	5.3	Frequency Stability (Voltage Variation)	<b>PASS</b>	
-	-	RSS-Gen 7.1	Receiver Spurious Emissions	<b>PASS</b>	
-	90.203 (j)(3)	-	Certification required (FCC Part 90.203(j)(3))	<b>Complied</b>	
-	90.203 (j)(4)	-	Certification required (FCC Part 90.203(j)(4))	<b>Complied</b>	
-	90.203 (j)(5)	-	Certification required (FCC Part 90.203(j)(5))	<b>Complied</b>	
-	90.203 (e)	-	Certification required (FCC Part 90.203(e))	<b>Complied</b>	
-	-	5.5	99% Occupied Bandwidth	<b>PASS</b>	

### Limitation on Results

The test result of this report is effective equipment under test itself and under the test configuration described on the report. This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

### Note:

As for the FCC Part 15 Subpart B-Unintentional Radiators, the EUT has been measured and declared as Verification by JVC Kenwood Corporation.

### SECTION 3. TEST AND MEASUREMENT DATA

All test and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J and Industry Canada as the following individual parts

FCC Rule	Test Item	Tested
Part 21	Domestic Public Fixed radio Services	N.A.
Part 22	Non Cellular	N.A.
Part 22	Public Mobile Services	N.A.
Part 22	Subpart H - Cellular Radiotelephone Service	N.A.
Part 22	Alternative technologies and auxiliary service	N.A.
Part 23	International Fixed Public Radiocommunication service	N.A.
Part 24	Personal Communications Services	N.A.
Part 74	Experimental Radio Auxiliary , Special Broadcast and Other Program Distributional Services	N.A.
Part 80	Stations in the Maritime Services	N.A.
Part 80	Subpart E - general Technical Standards	N.A.
Part 80	Subpart F - Equipment Authorization for Compulsory Ships	N.A.
Part 80	Subpart K - Private Coast Stations and Marine Utility Stations	N.A.
Part 80	Subpart S - Compulsory radiotelephone Installations for Small Passenger Boats	N.A.
Part 80	Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes	N.A.
Part 80	Subpart U - Radiotelephone Installations Required by the Bridge-to- Bridge Act	N.A.
Part 80	Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)	N.A.
Part 80	Subpart W - Global Maritime Distress and Safety System (GMDSS)	N.A.
Part 80	Subpart X - Voluntary Radio Installations	N.A.
Part 87	Aviation Services	N.A.
<b>Part 90</b>	<b>Private Land Mobile radio Services</b>	<b>YES</b>
Part 94	Private Operational - Fixed Microwave Service	N.A.
Part 95	Subpart A - General Mobile radio Service	N.A.
Part 95	Subpart C - Radio Control (R/C) radio Service	N.A.
Part 95	Subpart D - Citizens Band (CB) Radio Service	N.A.
Part 95	Subpart E -Family radio Service	N.A.
Part 95	Subpart F -Interactive Video and Data Service (IVDS)	N.A.
Part 97	Amateur Radio Service	N.A.
Part 101	Fixed Microwave Service	N.A.

IC Rule	Test Item	Tested
<b>RSS-119</b>	<b>Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.4-960 MHz</b>	<b>YES</b>
RSS-134	900MHz Narrowband Personal Communication Service	N.A.
<b>RSS-Gen</b>	<b>General Requirements for Compliance of Radio Apparatus</b>	<b>YES</b>

**SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)****4.1 List of System Configuration**

Symbol	Item	Model No.	Serial No.	Manufacture	Remarks
A	VHF DIGITAL TRANSCEIVER	TK-D740-M TK-D740H-K TK-D740HV-K	ES2-2	JVC KENWOOD Corporation	EUT
<b>Power Ratings of EUT :</b>		DC 13.6V $\pm$ 15%	15.0 A Maximum		
<b>Power Supply :</b>		DC 13.6 V			
<b>Condition of Equipment</b>		Proto type			
<b>Type</b>		Mobile type			
<b>Suppression Devices</b>		No Modifications by the laboratory were made to the device			

**4.2 Port(s)/Connector(s)**

Port Name	Connector Type	Connector Pin	Remarks
ACC	D-sub	15 pin	
External Speaker	3.5 $\phi$	2 pin	
Antenna	M	2 pin	
Microphone	RJ-45	8 pin	

**4.3 Highest Frequency Oscillator(s)/Crystal(s)**

Operating Frequency	Board Name	Remarks
223.95 MHz	TXRX UNIT	

**SECTION 5. SUPPORT EQUIPMENT**

The EUT was supported by the following equipment during the test.

Symbol	Item	Model No.	Serial No.	Manufacture	FCC ID
B	Keypad Microphone	KMC-32	N/A	JVC KENWOOD Corporation	N/A
C	External Speaker	KES-3	N/A	JVC KENWOOD Corporation	N/A
D	Dummy Load	TME	CT-150NP	1138693	N/A
E	DC Power Supply	PMC35-3A	LE000716	KIKUSUI	N/A

Supplied Power:

E	AC	100V,60Hz
---	----	-----------



## SECTION 6. USED CABLE(S)

The following cable(s) was used for the test.


No.	Name	Length (m)	Shield	Connector	Ferrite core
1	Speaker cable	2.90	No	Yes	
2	Antenna cable	1.00	Yes	Yes	
3	Microphone cable	0.55	No	No	
4	KCT-18 (Ignition sense cable)	3.10	No	Yes	
5	KCT-60 (Connection cable)	0.30	No	No	
6	DC cable	0.25	No	No	
7	DC cable	3.40	No	No	
8	Power cable for DC Power Supply	2.50	No	No	

## SECTION 7. TEST CONFIGURATION

### Details of Configuration and Connection

Example: Case of Section 10.10Test

- \* : EUT
- : Ferrite core
- : Joint Connector

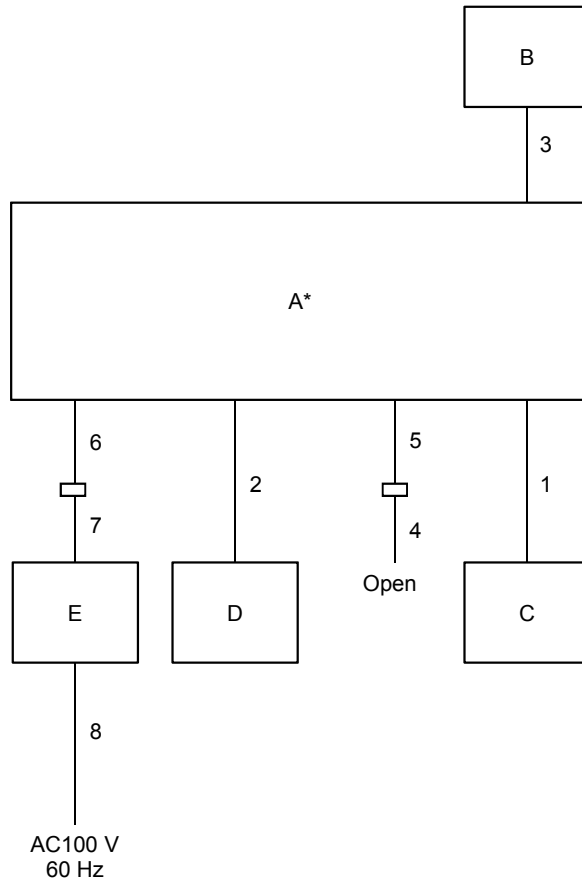

## SECTION 8. OPERATING CONDITION

The EUT was operated under the following condition during the test.

### 8.1 Operating Condition

The test was carried out under Transmit mode.

(FCC:150.05MHz, 162.05MHz, 173.95MHz, RSS:138.05MHz, 156.05MHz, 173.95MHz)

(High Power : 50W, Low Power : 5 W)


The test was carried out under Receive mode.

(138.05MHz, 156.05MHz, 173.95MHz)

EUT was examined in the operating conditions that had maximum emissions.


### 8.2 Operating Flow [Transmit mode]

Following operations were performed continuously.



### 8.3 Operating Flow [Receive mode]

Following operations were performed continuously.



**SECTION 9. MEASUREMENT UNCERTAINTY**

	$U_{lab}$	$U_{tia-603-d}$
Carrier Output Power (Conducted)	+/- 0.29dB ( $k = 2$ )	+/- 0.59 dB
Unwanted Emissions (Transmitter Conducted)	+/- 2.19 dB ( $k = 2$ )	+/- 1.1 dB
Field Strength of Spurious Radiation	+/- 2.78dB ( $k = 2$ )	+/- 3.3 dB
Emission Masks (Occupied Bandwidth)	+/- 0.5dB ( $k = 2$ )	+/- 2.1 dB
Transient Frequency Behavior	+/- 1.10% ( $k = 2$ )	+/- 21.6 %
Audio Low Pass Filter (Voice Input)	+/- 0.1dB ( $k = 2$ )	+/- 1.2 dB
Audio Frequency Response	+/- 0.1dB ( $k = 2$ )	+/- 1.2 dB
Modulation Limiting	+/- 1% ( $k = 2$ )	+/- 1.0 %
Frequency Stability (Temperature Variation)	+/- 10.1Hz ( $k=2$ )	+/-34.2 Hz
Frequency Stability (Voltage Variation)	+/- 10.1Hz ( $k=2$ )	+/-34.2 Hz
Receiver Spurious Emissions	$U_{lab}$	$U_{cispr}$
30-1000MHz	+/- 4.83dB ( $k = 2$ )	+/- 6.3 dB
abobe 1GHz	+/- 4.90dB ( $k = 2$ )	

## SECTION 10. TEST DATA

### 10.1 Carrier Output Power (Conducted)

REGULATIONS	: FCC Part 2 Section 1046 (a) / RSS-119 Section 5.4
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.1.2 / RSS-119 Section 4.1

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The EUT was conducted to a resistive coaxial attenuator of normal load impedance.  
 $RF\ Power\ (dBm) = Power\ Meter\ reading\ (dBm) + Attenuator\ Loss\ (dB) + Cable\ Loss\ (dB)$   
 $RF\ Power\ (W) = 10^{(RF\ Power\ (dBm)/10)}/1000$
- 3 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only as for the test of RSS)

#### Measuring Equipments


No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 09, 15	Jun. 30, 16
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 09, 15	Jun. 30, 16
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
4	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
5	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
6	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
7	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
8	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16

#### Measuring Cables

No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

### Measuring Equipment Configuration

#### <Analog Modulation Case>

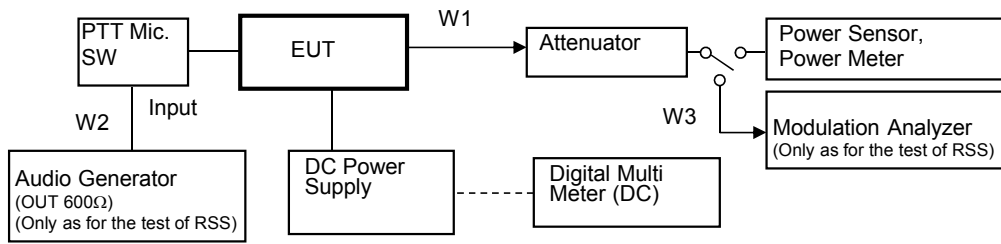

Note: Configuration of other Modulation test is composed without the Audio Generator.

**Test Results**

Test date	Aug. 12, 2015	
Location	Kashima No.1 Test Site	
temperature	23.0	[degree C]
Humidity Variation	50.0	[%]
Atmospheric Pressure	100.6	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the Authorized Bandwidth.  
 State the worst case (below).

No.	Frequency (MHz)	Band	Setting	RF Power (W)
1	138.05 (RSS)	Low	High Power	50
2	150.05 (FCC)	Low	High Power	50
3	156.05 (RSS)	Middle	High Power	50
4	162.05 (FCC)	Middle	High Power	50
5	173.95 (FCC/RSS)	High	High Power	50
6	138.05 (RSS)	Low	Low Power	5
7	150.05 (FCC)	Low	Low Power	5
8	156.05 (RSS)	Middle	Low Power	5
9	162.05 (FCC)	Middle	Low Power	5
10	173.95 (FCC/RSS)	High	Low Power	5

RF Power: Peak reading

## 10.2 Unwanted Emissions (Transmitter Conducted)

REGULATIONS	: FCC Part 2 Section 1051, Part 90 Section 210 / RSS-119 Section 5.8
TEST METHOD/GUIDE	: RSS-119 Section 4.2, RSS-Gen Section 4.9

### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that than necessary to produce 50 % of rated system deviation.
- 3 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
  - c) Detector mode : Average power (FM Modulation) , Positive peak with peak hold (Digital Modulation)
- 4 The emissions were measured for the worst case as follows:
  - a) : within a band of frequencies defined by the carrier frequency plus and minus one channel.
  - b) : from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.

### Measuring Equipments


No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Highpass Filter	Anritsu	MP526B	6200220636	Jan. 20, 15	Jan. 31, 16
4	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
5	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
6	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
7	Spectrum Analyzer	Agilent	N9030A	US51350170	Mar. 12, 15	Mar. 31, 16
8	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
9	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16

### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W3	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 15	Jan. 31, 16



### Measuring Equipment Configuration

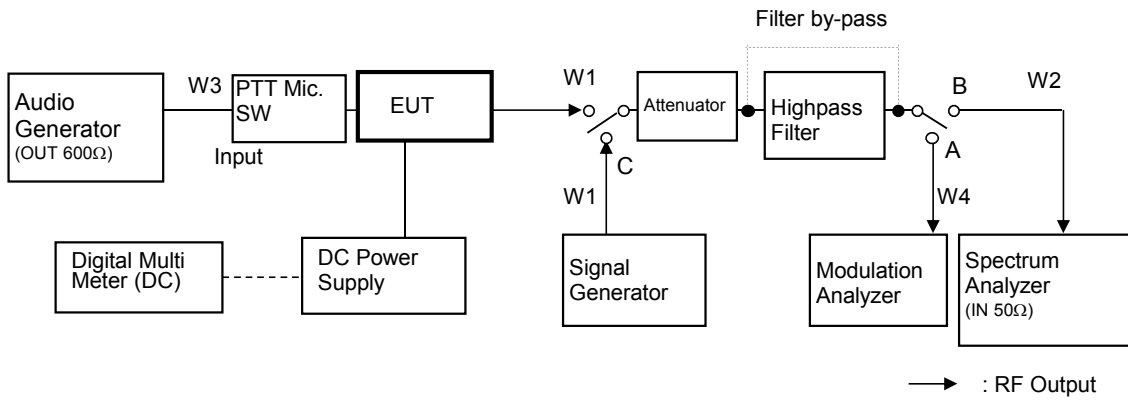

**Test Results**

Test date	Aug. 20, 2015
Location	Kashima No.1 Test Site
temperature	25 [degree C]
Humidity Variation	58 [%]
Atmospheric Pressure	100.6 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	138.05(RSS)	Low	276.10	-38.12	<b>-85.11</b>	-67.0	18.1
2	150.05(FCC)	Low	300.10	-38.19	<b>-85.18</b>	-67.0	18.2
3	156.05(RSS)	Middle	312.10	-40.30	<b>-87.29</b>	-67.0	20.3
4	162.05(FCC)	Middle	324.10	-40.99	<b>-87.98</b>	-67.0	21.0
5	173.95(FCC/RSS)	High	347.90	-37.25	<b>-84.24</b>	-67.0	17.2

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) =  $-(50+10\log(P))$

Correct Level (dBm) = Substitute SG Level (dBm)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 11.25 kHz

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	138.05(RSS)	Low	276.10	-43.58	<b>-80.57</b>	-57.0	23.6
2	150.05(FCC)	Low	300.10	-41.55	<b>-78.54</b>	-57.0	21.5
3	156.05(RSS)	Middle	312.10	-42.72	<b>-79.71</b>	-57.0	22.7
4	162.05(FCC)	Middle	324.10	-41.74	<b>-78.73</b>	-57.0	21.7
5	173.95(FCC/RSS)	High	347.90	-43.04	<b>-80.03</b>	-57.0	23.0

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) =  $-(50+10\log(P))$

Correct Level (dBm) = Substitute SG Level (dBm)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

### 10.3 Field Strength of Spurious Radiation

REGULATIONS	:	FCC Part 2 Section 1053 (a), Part 90 Section 210 / RSS-119 Section 5.8
TEST METHOD/GUIDE	:	ANSI/TIA-603-D Section 2.2.12.2 / RSS-119 Section 4.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
  - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
  - c) Detector mode : Positive Peak
- 3 The transmitter was placed on a wooden turntable, and it was transmitting into non-radiating load which was also placed on the turntable.
- 4 The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 5 The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 6 Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.
- 7 Spurious emissions in dB = 10 Log (TX power in Watts/0.001) – the absolute level


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator(6dB)	HUBER+SUHNER	6806.17B	4962	Jan. 23, 15	Jan. 31, 16
2	Attenuator(10dB)	HUBER+SUHNER	6810.17B	5061	Jun. 01, 15	Jun. 30, 16
3	Dummy Load	TME	CT-150NP	1138693	Jan. 20, 15	Jan. 31, 16
4	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
5	Spectrum Analyzer	Agilent	N9000A	MY51260520	Apr. 20, 15	Apr. 30, 16
6	D.R.G Antenna(RX)	Schwarzbeck	3115	5044	Jul. 31, 15	Jul. 31, 16
7	D.R.G Antenna(TX)	Schwarzbeck	3115	5045	Apr. 15, 15	Apr. 30, 16
8	Dipole Antenna(TX)	Schwarzbeck	UHA9105	AM0082002	Jul. 21, 15	Jul. 31, 16
9	Dipole Antenna(TX)	Schwarzbeck	VHA9103	C01082007	Jul. 21, 15	Jul. 31, 16
10	Tri-log Antenna(RX)	Schwarzbeck	VULB9168WP	126	Nov. 21, 14	Nov. 30, 15
11	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
12	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16
13	Amplifier	Intertek Japan	ZFL-1200GH+L	2013075-2	Aug. 13, 15	Aug. 31, 16
14	Amplifier	TOYO	TPA0118-30	0402	Feb. 23, 15	Feb. 29, 16
15	Attenuator	HUBER + SUHNER	6803.17.B	5111	Feb. 23, 15	Feb. 29, 16

**Measuring Cables**

No.	Cable	Manufacturer	Model No.	Serial No.	Cal Date	Cal Exp.
R2	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W5	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 09, 15	Jun. 30, 16
R12	Coaxial Cable	SUHNER	SUCOFLEX 104	229603	Feb. 23, 15	Feb. 29, 16
R11	Coaxial Cable	Candox	5B-048-98-98-5000	111130	Feb. 23, 15	Feb. 29, 16
R1	Coaxial Cable	FUJIKURA	5D-2W	KSR00312	Jun. 09, 15	Jun. 30, 16
W13	Coaxial Cable	Suhner	SUCOFLEX106	KSR00207	Jun. 09, 15	Jun. 30, 16

**Measuring Equipment Configuration**

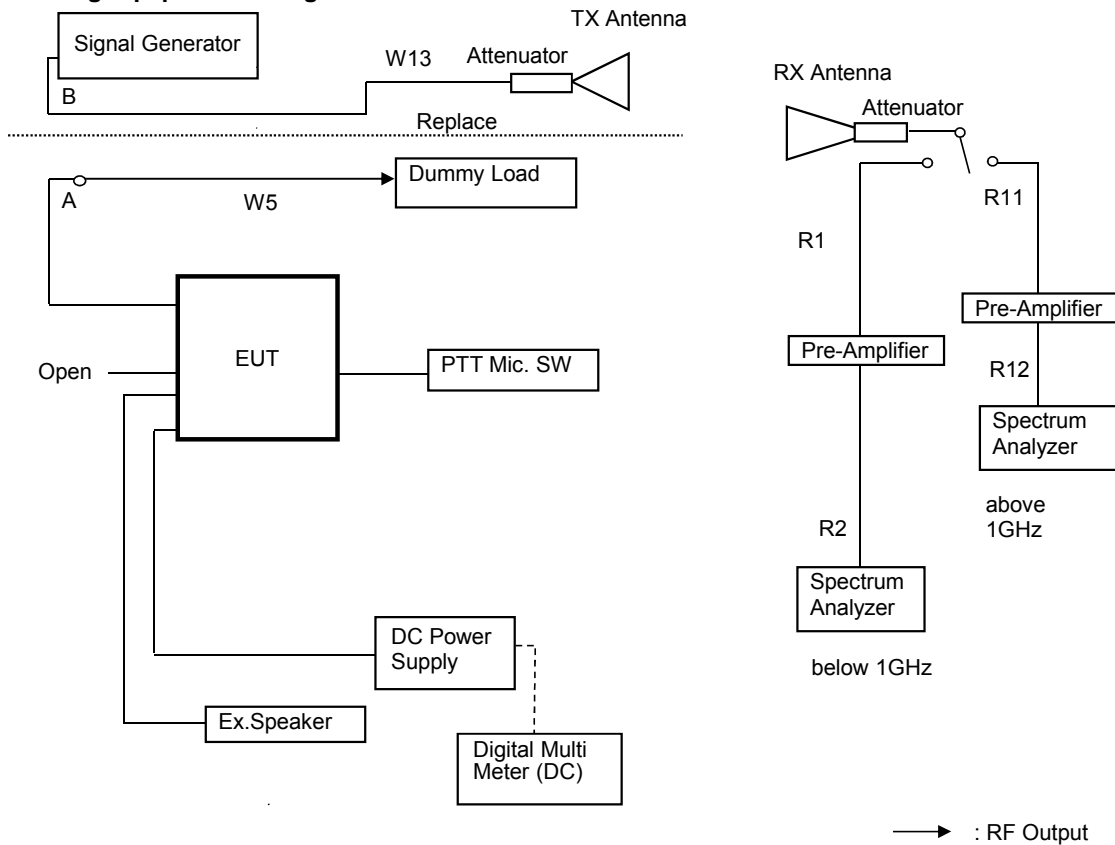

**Test Results**

Test date	Aug 14, 2015 to Aug 17, 2015
Location	Kashima No.12 Test Site
temperature	20 to 25 [degree C]
Humidity Variation	50 to 60 [%]
Atmospheric Pressure	100.0 to 103.3 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05MHz(FCC)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK D Limit Level (dBc)	Margin (dB)
1	300.10	Hor.	-48.30	-42.68	2.15	11.36	-51.9	<b>-98.9</b>	-67.0	31.9
		Ver.	-53.86	-44.25	2.15	11.36	-53.5	<b>-100.4</b>	-67.0	33.4
2	450.15	Hor.	-57.63	-44.86	2.15	11.66	-54.4	<b>-101.4</b>	-67.0	34.4
		Ver.	-59.00	-41.53	2.15	11.66	-51.0	<b>-98.0</b>	-67.0	31.0
3	600.20	Hor.	-70.65	-55.66	2.15	11.93	-65.4	<b>-112.4</b>	-67.0	45.4
		Ver.	-67.76	-51.08	2.15	11.93	-60.9	<b>-107.8</b>	-67.0	40.8
4	750.25	Hor.	-64.00	-46.80	2.15	12.16	-56.8	<b>-103.8</b>	-67.0	36.8
		Ver.	-58.57	-39.78	2.15	12.16	-49.8	<b>-96.8</b>	-67.0	29.8
5	900.30	Hor.	-62.90	-44.18	2.15	12.36	-54.4	<b>-101.4</b>	-67.0	34.4
		Ver.	-67.44	-46.94	2.15	12.36	-57.1	<b>-104.1</b>	-67.0	37.1
6	1050.35	Hor.	-59.68	-47.99	6.13	12.54	-54.4	<b>-101.4</b>	-67.0	34.4
		Ver.	-60.16	-48.97	6.13	12.54	-55.4	<b>-102.4</b>	-67.0	35.4
7	1200.40	Hor.	-	-	6.99	12.70	-	-	-67.0	-
		Ver.	-62.00	-49.80	6.99	12.70	-55.5	<b>-102.5</b>	-67.0	35.5
8	1350.45	Hor.	-	-	7.71	12.86	-	-	-67.0	-
		Ver.	-62.14	-50.50	7.71	12.86	-55.7	<b>-102.6</b>	-67.0	35.6
9	1500.50	Hor.	-62.26	-51.59	8.32	13.02	-56.3	<b>-103.3</b>	-67.0	36.3
		Ver.	-63.10	-51.63	8.32	13.02	-56.3	<b>-103.3</b>	-67.0	36.3

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = whichever is the lesser attenuation ;  $-(50+10\log(P))$  or 70  
 Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBi) - Loss (Cable, Attenuator) (dB)  
 Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$   
 P = Carrier Level (W)  
 " - " = Measurement Limit

State : Low Power / Authorized Bandwidth 11.25 kHz / 150.05MHz(FCC)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK D Limit Level (dBc)	Margin (dB)
1	300.10	Hor.	-47.90	-42.28	2.15	11.36	-51.5	<b>-88.5</b>	-57.0	31.5
		Ver.	-56.14	-46.53	2.15	11.36	-55.7	<b>-92.7</b>	-57.0	35.7
2	450.15	Hor.	-56.25	-43.48	2.15	11.66	-53.0	<b>-90.0</b>	-57.0	33.0
		Ver.	-58.75	-41.28	2.15	11.66	-50.8	<b>-87.8</b>	-57.0	30.8
3	600.20	Hor.	-67.93	-52.94	2.15	11.93	-62.7	<b>-99.7</b>	-57.0	42.7
		Ver.	-63.49	-46.81	2.15	11.93	-56.6	<b>-93.6</b>	-57.0	36.6
4	750.25	Hor.	-69.55	-52.35	2.15	12.16	-62.4	<b>-99.4</b>	-57.0	42.4
		Ver.	-68.82	-50.03	2.15	12.16	-60.0	<b>-97.0</b>	-57.0	40.0
5	900.30	Hor.	-62.95	-44.23	2.15	12.36	-54.4	<b>-91.4</b>	-57.0	34.4
		Ver.	-67.93	-47.43	2.15	12.36	-57.6	<b>-94.6</b>	-57.0	37.6
6	1050.35	Hor.	-	-	6.13	12.54	-	-	-57.0	-
		Ver.	-	-	6.13	12.54	-	-	-57.0	-
7	1200.40	Hor.	-	-	6.99	12.70	-	-	-57.0	-
		Ver.	-	-	6.99	12.70	-	-	-57.0	-
8	1350.45	Hor.	-	-	7.71	12.86	-	-	-57.0	-
		Ver.	-	-	7.71	12.86	-	-	-57.0	-
9	1500.50	Hor.	-	-	8.32	13.02	-	-	-57.0	-
		Ver.	-	-	8.32	13.02	-	-	-57.0	-

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = whichever is the lesser attenuation ;  $-(50+10\log(P))$  or 70

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dBi) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : High Power / Authorized Bandwidth 11.25 kHz / 138.05MHz(RSS)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK D Limit Level (dBc)	Margin (dB)
1	276.10	Hor.	-55.23	-49.55	2.15	11.29	-58.7	<b>-105.7</b>	-67.0	38.7
		Ver.	-54.23	-41.44	2.15	11.29	-50.6	<b>-97.6</b>	-67.0	30.6
2	414.15	Hor.	-58.98	-49.79	2.15	11.59	-59.2	<b>-106.2</b>	-67.0	39.2
		Ver.	-58.84	-46.23	2.15	11.59	-55.7	<b>-102.7</b>	-67.0	35.7
3	552.20	Hor.	-63.10	-48.52	2.15	11.85	-58.2	<b>-105.2</b>	-67.0	38.2
		Ver.	-62.23	-46.54	2.15	11.85	-56.2	<b>-103.2</b>	-67.0	36.2
4	690.25	Hor.	-62.00	-46.65	2.15	12.08	-56.6	<b>-103.6</b>	-67.0	36.6
		Ver.	-59.31	-42.88	2.15	12.08	-52.8	<b>-99.8</b>	-67.0	32.8
5	828.30	Hor.	-57.00	-39.56	2.15	12.26	-49.7	<b>-96.7</b>	-67.0	29.7
		Ver.	-60.95	-41.11	2.15	12.26	-51.2	<b>-98.2</b>	-67.0	31.2
6	966.35	Hor.	-65.00	-45.13	2.15	12.45	-55.4	<b>-102.4</b>	-67.0	35.4
		Ver.	-67.40	-45.25	2.15	12.45	-55.5	<b>-102.5</b>	-67.0	35.5
7	1104.40	Hor.	-59.29	-46.54	6.46	12.60	-52.7	<b>-99.7</b>	-67.0	32.7
		Ver.	-60.34	-47.95	6.46	12.60	-54.1	<b>-101.1</b>	-67.0	34.1
8	1242.45	Hor.	-	-	7.20	12.75	-	-	-67.0	-
		Ver.	-59.90	-48.61	7.20	12.75	-54.2	<b>-101.1</b>	-67.0	34.1
9	1380.50	Hor.	-	-	7.84	12.90	-	-	-67.0	-
		Ver.	-61.59	-49.50	7.84	12.90	-54.6	<b>-101.5</b>	-67.0	34.5

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = whichever is the lesser attenuation ;  $-(50+10\log(P))$  or 70

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dB) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit

State : Low Power / Authorized Bandwidth 11.25 kHz / 138.05MHz(RSS)

No	Frequency (MHz)	Pol	Reading Level (dBm)	SG Out Level (dBm)	Antenna Gain (dBi)	Loss (dB)	Correct Level (dBm)	Emission Level (dBc)	MASK D Limit Level (dBc)	Margin (dB)
1	276.10	Hor.	-46.35	-40.68	2.15	11.29	-49.8	<b>-86.8</b>	-57.0	29.8
		Ver.	-50.40	-37.61	2.15	11.29	-46.8	<b>-83.7</b>	-57.0	26.7
2	414.15	Hor.	-61.90	-52.71	2.15	11.59	-62.1	<b>-99.1</b>	-57.0	42.1
		Ver.	-64.10	-51.49	2.15	11.59	-60.9	<b>-97.9</b>	-57.0	40.9
3	552.20	Hor.	-64.80	-50.22	2.15	11.85	-59.9	<b>-96.9</b>	-57.0	39.9
		Ver.	-64.92	-49.23	2.15	11.85	-58.9	<b>-95.9</b>	-57.0	38.9
4	690.25	Hor.	-65.00	-49.65	2.15	12.08	-59.6	<b>-96.6</b>	-57.0	39.6
		Ver.	-66.20	-49.77	2.15	12.08	-59.7	<b>-96.7</b>	-57.0	39.7
5	828.30	Hor.	-56.90	-39.46	2.15	12.26	-49.6	<b>-86.6</b>	-57.0	29.6
		Ver.	-60.50	-40.66	2.15	12.26	-50.8	<b>-87.8</b>	-57.0	30.8
6	966.35	Hor.	-64.46	-44.59	2.15	12.45	-54.9	<b>-91.9</b>	-57.0	34.9
		Ver.	-66.29	-44.14	2.15	12.45	-54.4	<b>-91.4</b>	-57.0	34.4
7	1104.40	Hor.	-60.19	-47.45	6.46	12.60	-53.6	<b>-90.6</b>	-57.0	33.6
		Ver.	-61.15	-48.76	6.46	12.60	-54.9	<b>-91.9</b>	-57.0	34.9
8	1242.45	Hor.	-	-	7.20	12.75	-	-	-57.0	-
		Ver.	-62.53	-51.24	7.20	12.75	-56.8	<b>-93.8</b>	-57.0	36.8
9	1380.50	Hor.	-	-	7.84	12.90	-	-	-57.0	-
		Ver.	-	-	7.84	12.90	-	-	-57.0	-

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = whichever is the lesser attenuation ;  $-(50+10\log(P))$  or 70

Correct Level (dBm) = Substitute SG Level (dBm) + ANT Gain (dB) - Loss (Cable, Attenuator) (dB)

Emission Level (dBc) = Correct Level (dBm) -  $10\log(P*1000)$

P = Carrier Level (W)

" - " = Measurement Limit



#### 10.4 Emission Masks (Occupied Bandwidth)

REGULATIONS	: FCC Part 2 Section 1049 (c) (1), Part 90 Section 210 / RSS-119 Section 5.5
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.11.2 / RSS-119 Section 5.5

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 For EUT supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for +/- 2.5 kHz deviation (or 50 % modulation). (FM modulation).
- 3 With level constant, the signal level was increased 16 dB.
- 4 For EUT supporting digital modulation, the digital modulation mode was operated to its maximum extent.
- 5 Adjust the spectrum analyzer for the following setting:
  - a) RBW : 100Hz (Non modulation and Authorized Band 6 kHz),  
100Hz (Non modulation and Authorized Band 11.25 kHz),  
300Hz (Non modulation and Authorized Band 20 kHz).
  - b) VBW : 10times the RBW (Non modulation , Authorized Band 6kHz, 11.25 kHz and 20 kHz).
  - c) RBW and VBW : 30 kHz (Non modulation(Digital Modulation)).
- 6 The occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
5	Spectrum Analyzer	Agilent	N9030A	US51350170	Mar. 12, 15	Mar. 31, 16
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W3	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 15	Jan. 31, 16

### Measuring Equipment Configuration

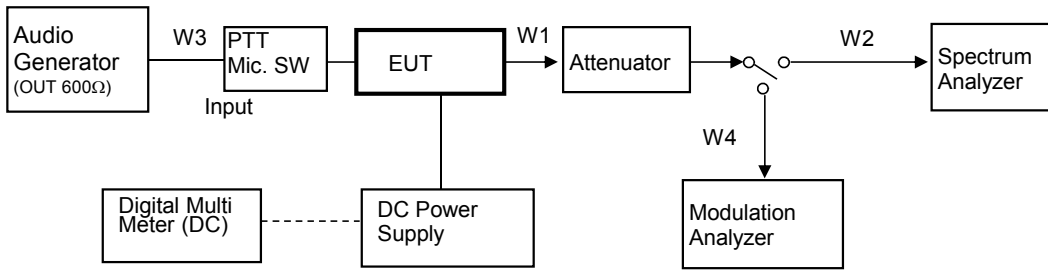

Note: Configuration of other Modulation test is composed without the Audio Generator.


→ : RF Output

**Test Results**


Test date	Aug. 18, 2015	
Location	Kashima No.1 Test Site	
temperature	25.2	[degree C]
Humidity Variation	51	[%]
Atmospheric Pressure	99.9	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 173.95 MHz(RSS)  
 Limit : Mask B

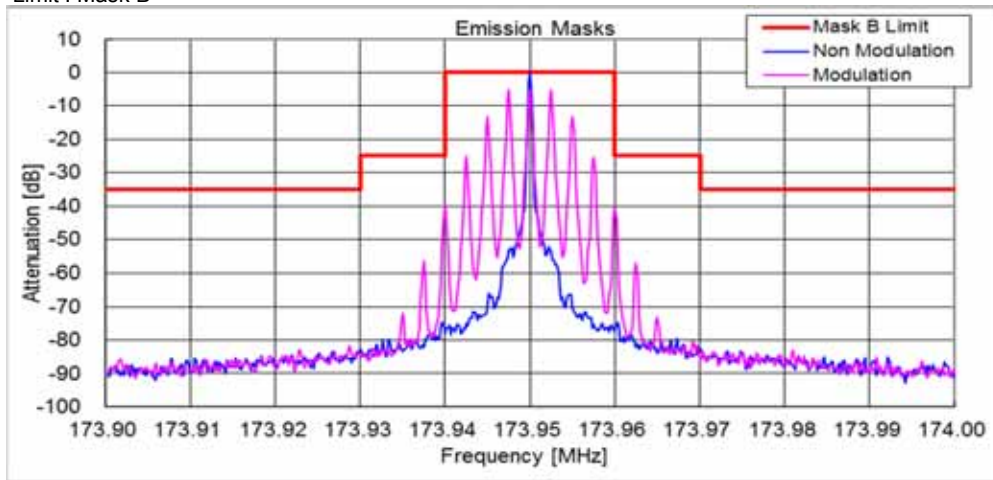


State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 150.05 MHz(FCC)  
 Limit : Mask D

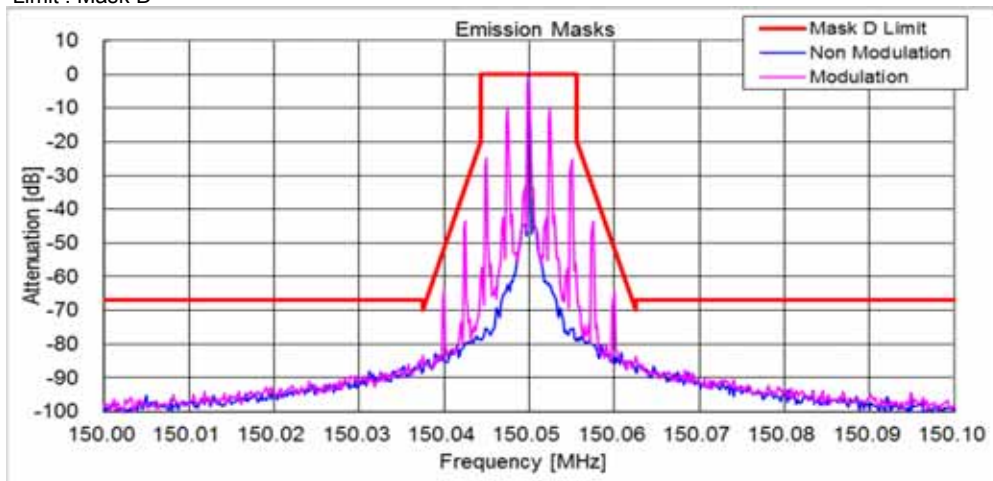


State : High Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 138.05 MHz(RSS)  
Limit : Mask D

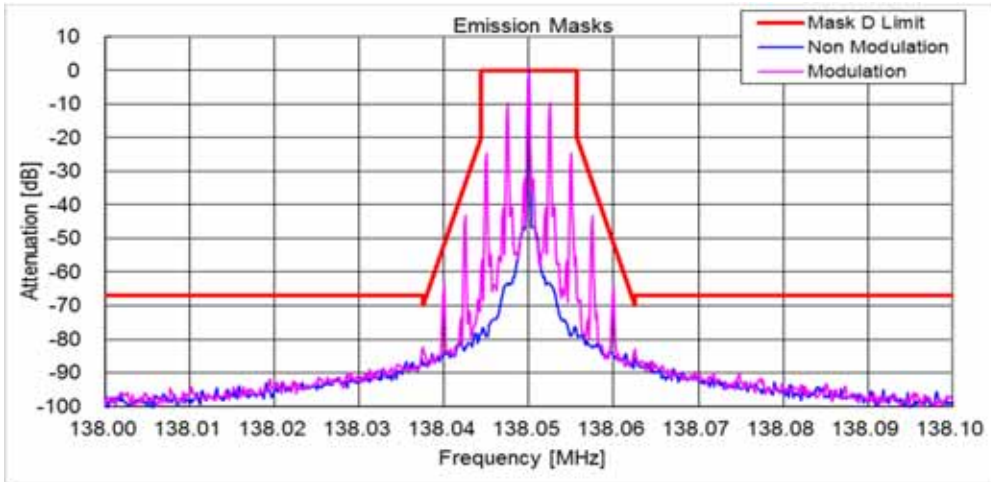


State : High Power / Authorized Bandwidth 11.25 kHz/ 7K60FXD/FXE / 173.95 MHz(FCC/RSS)  
Limit : Mask D

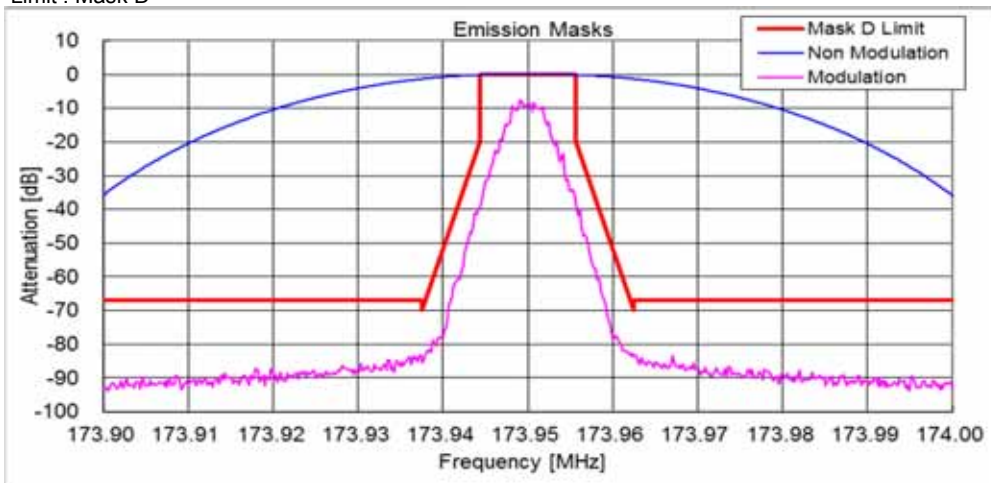


State : Low Power / Authorized Bandwidth 20 kHz/ 16K0F3E / 173.95 MHz(RSS)  
Limit : Mask B

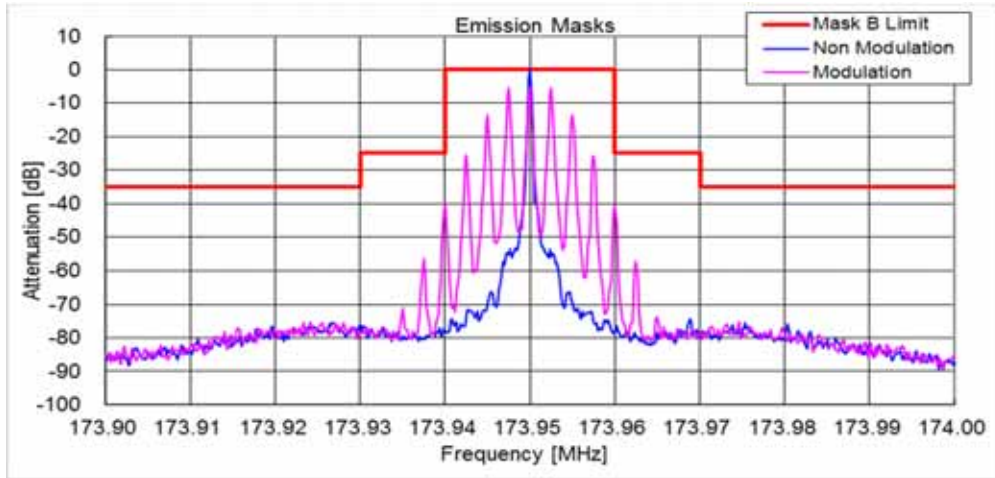


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 150.05 MHz(FCC)  
Limit : Mask D

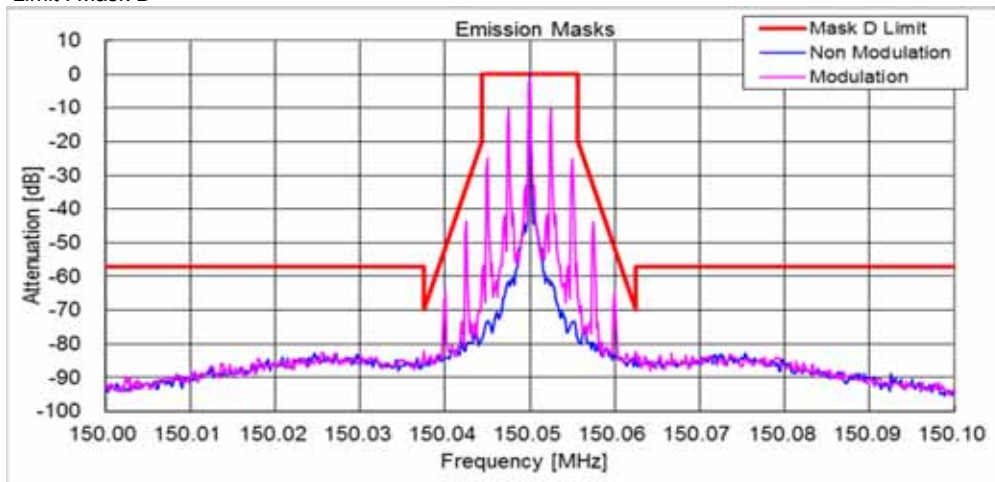


State : Low Power / Authorized Bandwidth 11.25 kHz/ 11K0F3E / 156.05 MHz(RSS)  
Limit : Mask D

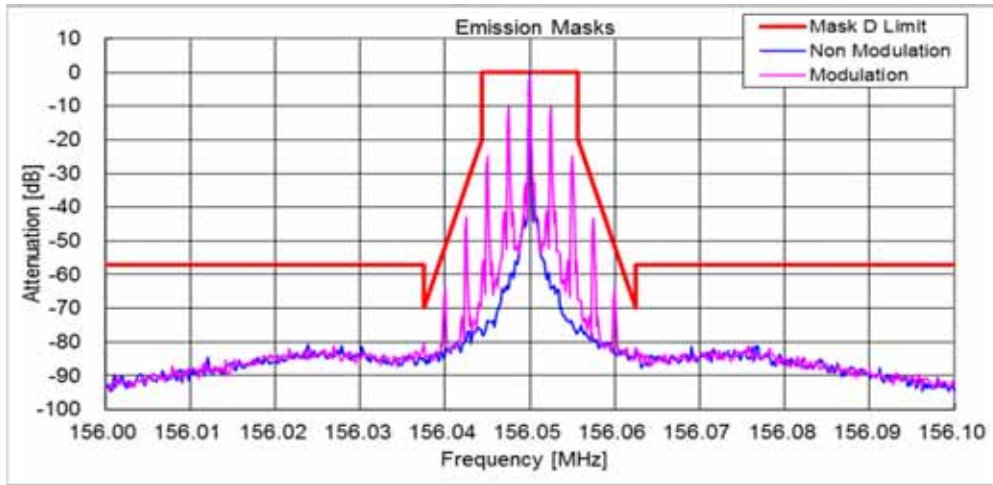

State : Low Power / Authorized Bandwidth 11.25 kHz/ 7K60FXD/FXE / 150.05 MHz(FCC)  
Limit : Mask D

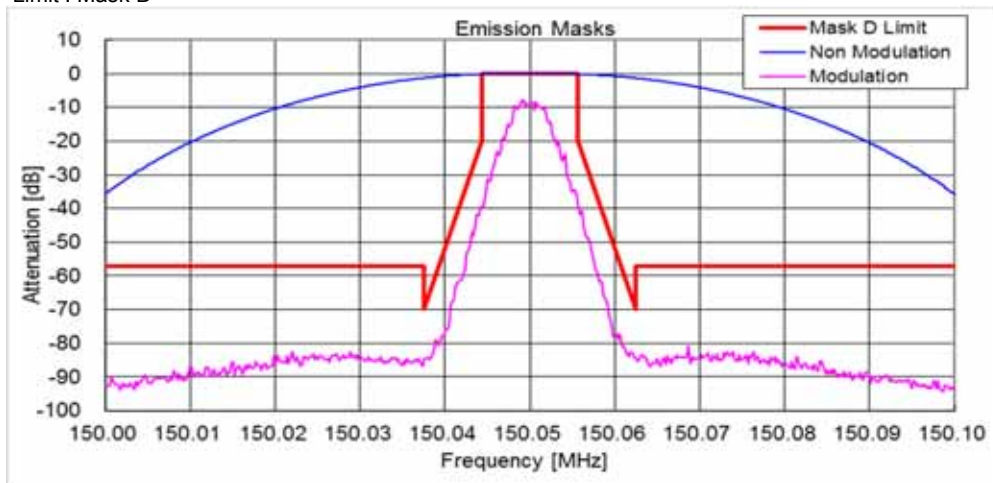

State : Low Power / Authorized Bandwidth 11.25 kHz/ 7K60FXD/FXE / 138.05 MHz(RSS)  
Limit : Mask D

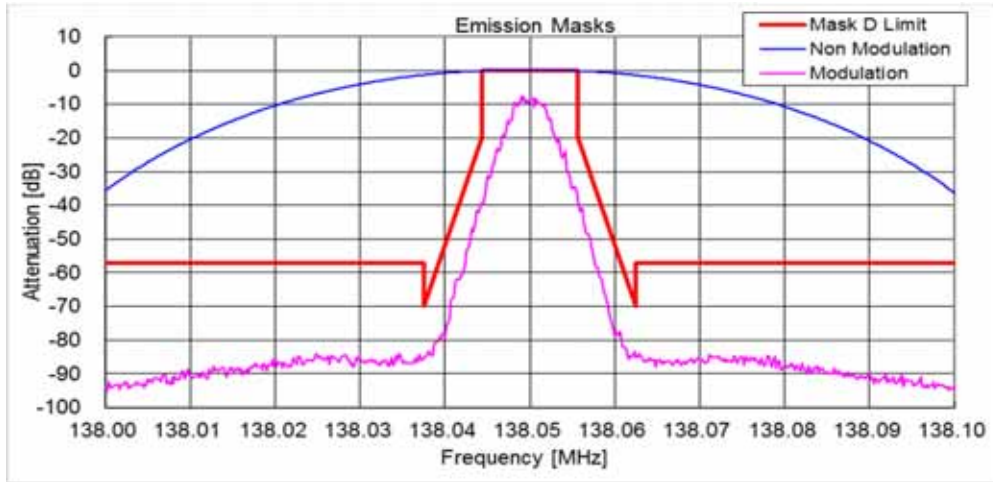

**10.5 Transient Frequency Behavior**

REGULATIONS : FCC Part 90 Section 214

TEST METHOD/GUIDE : ANSI/TIA-603-D, Section 2.2.19.3

**Test Procedure**

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The transmitter was turned on.
- 3 The transmitter carrier level was measured at the output of the combiner .
- 4 The transmitter was turned off.
- 5 An RF signal generator (1) modulated with a 1 kHz tone at either 25 kHz or 12.5 kHz or 6.25 kHz deviation, and set to the same frequency as the assigned transmitter frequency, (2) was adjusted to a level -30 dB below the level recorded in Procedure 3, as measured at the output of the combiner.  
This level was then fixed for the remainder of the test and is recorded at step h.
- 6 The oscilloscope was setup using TIA-603 steps j and k as a guide, however 1000 Hz tone was adjusted at +- 2.5 /div vertically centered on the display.
- 7 The transmitter was turned on, and the level of the carrier at the output of the combiner was recorded as step l.
- 8 The carrier on-time as referenced in TIA-603 steps m, n, and o was captured and plotted.
- 9 The carrier off-time as referenced in TIA-603 steps p, q, r, and s was captured and plotted.


No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Power Meter	Hewlett Packard	E4418B	GB38410265	Jun. 09, 15	Jun. 30, 16
2	Power Sensor	Hewlett Packard	8482A	US37292237	Jun. 09, 15	Jun. 30, 16
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
4	Attenuator (3dB)	TME	CFA-20NPJ-3	679701	Jun. 01, 15	Jun. 30, 16
5	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
6	Step Attenuator	Hewlett Packard	8494B	272614515	Jan. 23, 15	Jan. 31, 16
7	Combiner(1)	Anritsu	Z-164A	M89249	Jan. 20, 15	Jan. 31, 16
8	Combiner(2)	Anritsu	Z-164A	M89549	Jan. 20, 15	Jan. 31, 16
9	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
10	Signal Generator	Rohde&Schwarz	SMB 100A	105709	Mar. 18, 15	Mar. 31, 16
11	Oscilloscope	Tektronix	TDS 680B	B010292	Jan. 30, 15	Jan. 31, 16
12	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
13	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16



**Measuring Cables**

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00094	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Jan. 23, 15	Jan. 31, 16
W5	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00041	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

**Measuring Equipment Configuration**

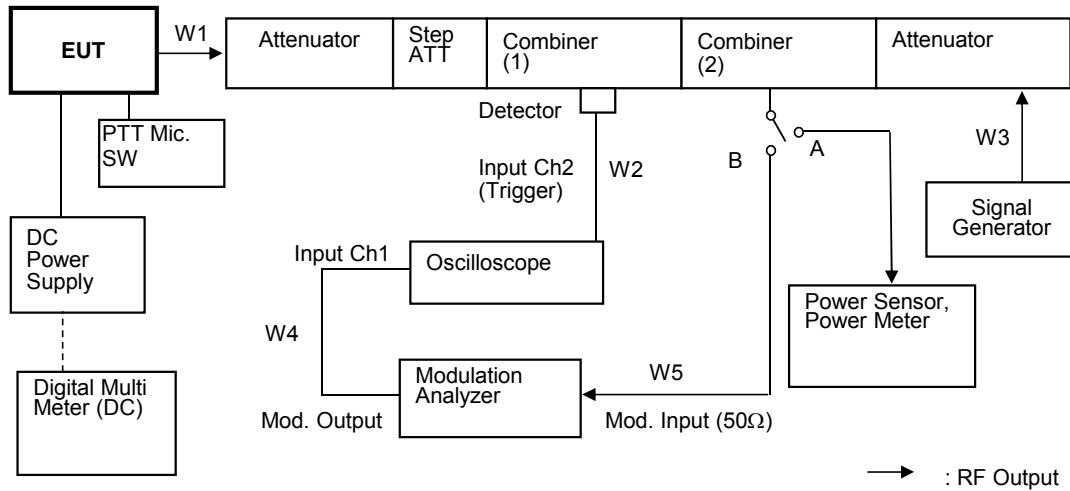


**Test Results**


Test date	Aug 21, 2015	
Location	Kashima No.1 Test Site	
temperature	25.6	[degree C]
Humidity Variation	55	[%]
Atmospheric Pressure	100.5	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz (RSS)/ PTT:OFF -ON

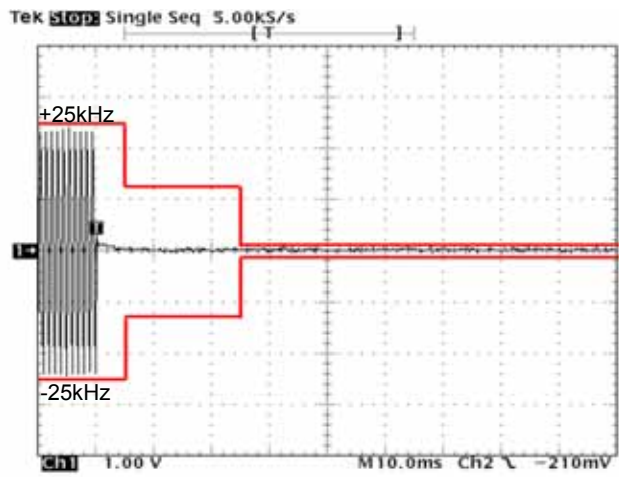


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 173.95 MHz (RSS)/ PTT:ON -OFF

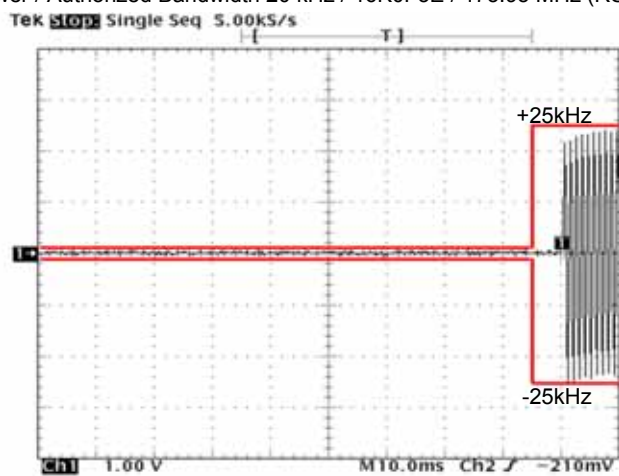


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz (FCC)/ PTT:OFF -ON

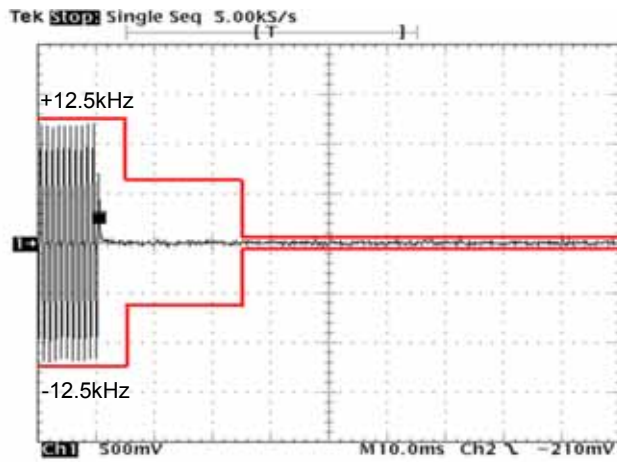


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 150.05 MHz (FCC)/ PTT:ON-OFF

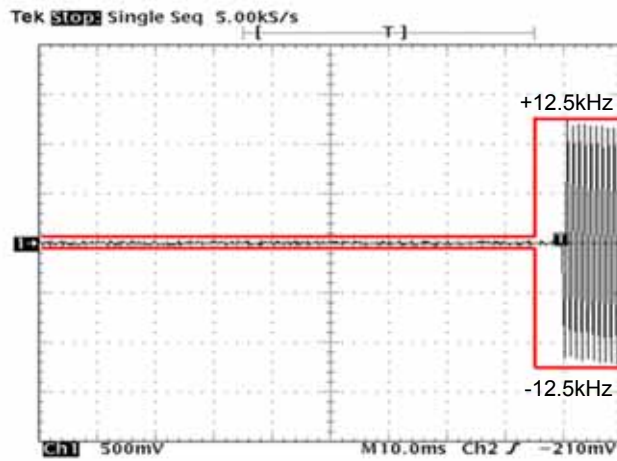


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 156.05 MHz (RSS)/ PTT:OFF -ON

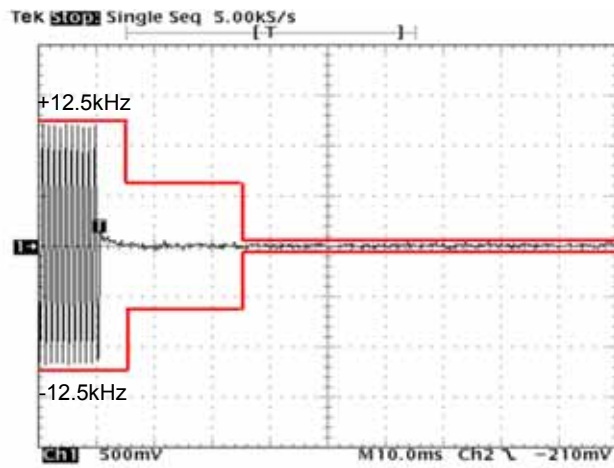


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 156.05 MHz (RSS)/ PTT:ON-OFF

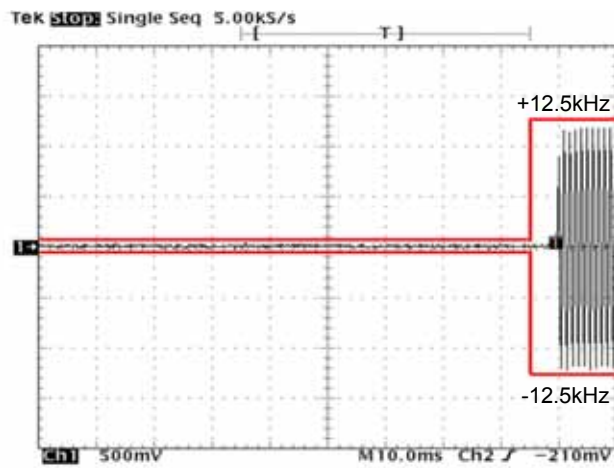

State : High Power / Authorized Bandwidth 11.25 kHz / 7K60FXD/FXE / 173.95 MHz (FCC/RSS)/ PTT:OFF -ON

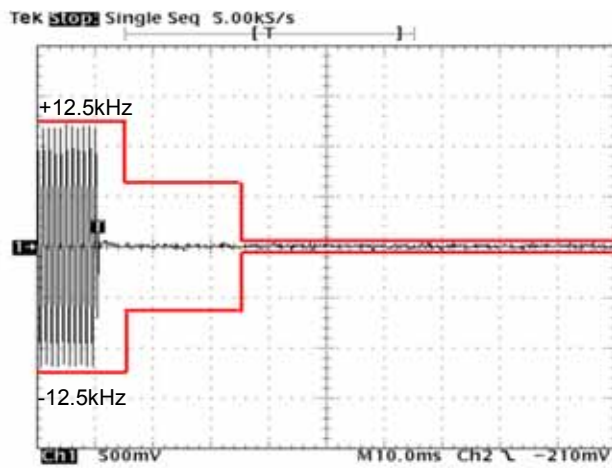

State : High Power / Authorized Bandwidth 11.25 kHz / 7K60FXD/FXE / 173.95 MHz (FCC/RSS)/ PTT:ON-OFF

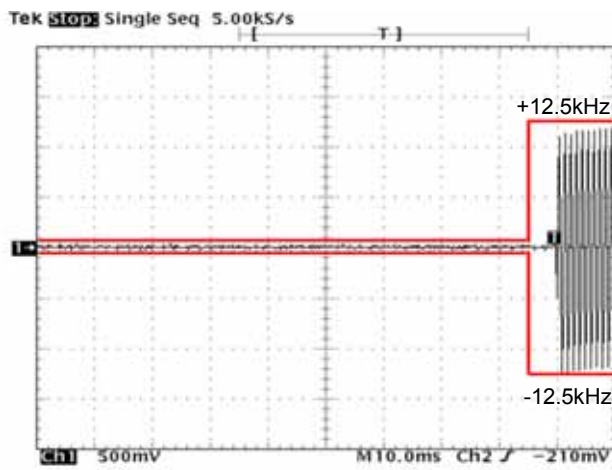

### 10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)

REGULATIONS	: FCC Part 2 Section 1047 (a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.6.2.2, 3.2.6.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter : 50 Hz
  - b) Low-pass filter : 15 kHz
  - c) Detector : positive peak
  - d) Function : FM
- 3 The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- 4 With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 5 kHz.
- 5 The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
5	Audio Analyzer	Hewlett Packard	8903B	2948A07326	Aug. 10, 15	Aug. 31, 16
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W4	Coaxial Cable	Pacific custom	RG-58 C/U	KSR00096	Jan. 23, 15	Jan. 31, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

### Measuring Equipment Configuration

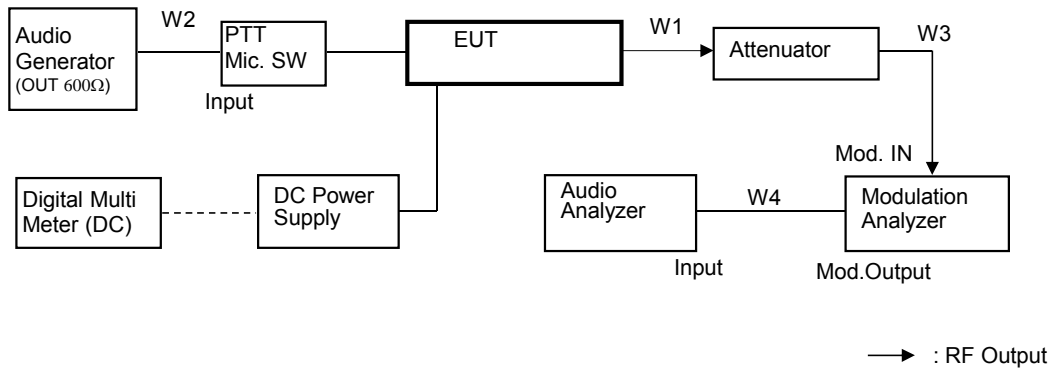


**Test Results**

Test date	Aug 13, 2015	
Location	Kashima No.1 Test Site	
temperature	25	[degree C]
Humidity Variation	50	[%]
Atmospheric Pressure	101	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 156.05 MHz(RSS)

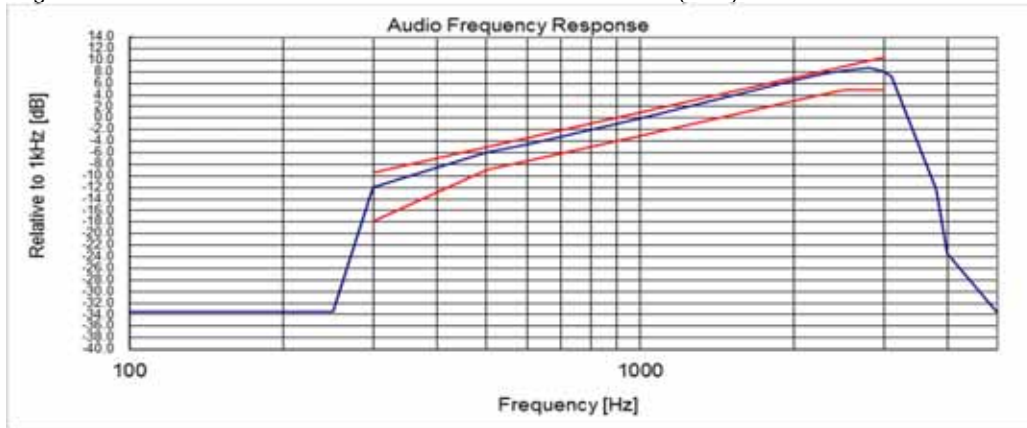


**Note:**

Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.  
 On the transmission condition below 3kHz,  
 Transceiver shows pre-emphasis condition of transmission function.  
 On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.



State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 162.05 MHz(FCC)

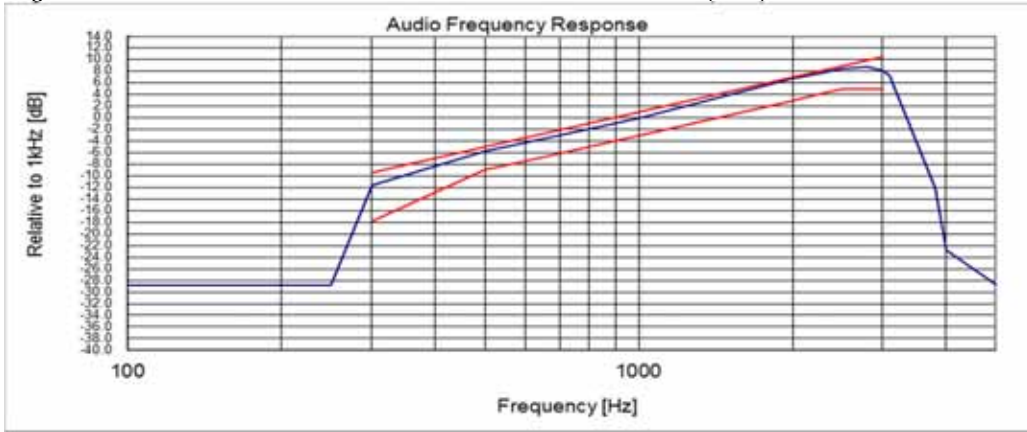

Note:


Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.

On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 156.05 MHz(RSS)

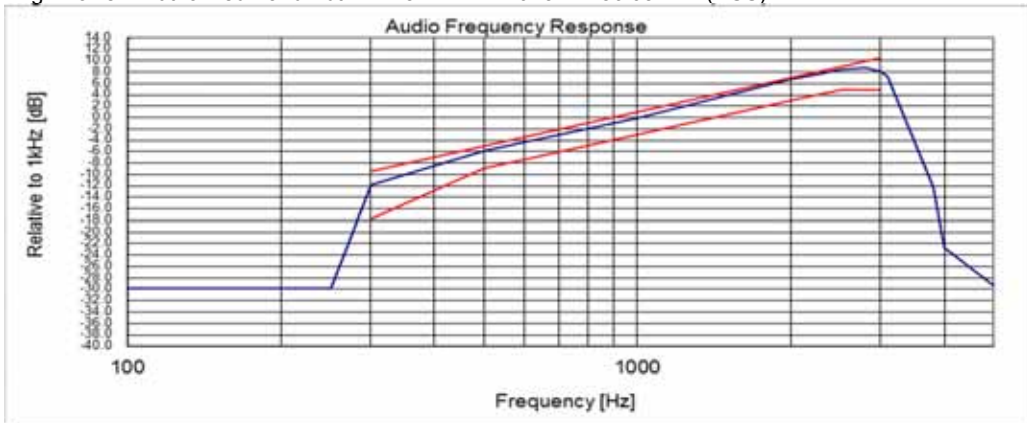

Note:

Audio Filter of the above result is substituted with the same structure as Audio Frequency Response.

On the transmission condition below 3kHz,

Transceiver shows pre-emphasis condition of transmission function.

On the transmission condition above 3kHz, Transceiver shows Audio Low Pass Filter.

**10.7 Modulation Limiting**

REGULATIONS	: FCC Part 2 Section 1047 (b)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.3.2, 1.3.4.4

**Test Procedure**

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Adjust the Modulation Analyzer for the following setting:
  - a) High-pass filter : off
  - b) Low-pass filter : 15 kHz
  - c) Detector : positive peak
  - d) Function : FM
- 3 Apply a 1kHz modulation signal to the transmitter from the audio generator, and adjust the level to obtain 60% of full rated system deviation.
- 4 Measure the modulation frequency that was showed on the Modulation Analyzer when the output levels of the Audio Generator were changed from -20 dB to +50 dB by 10 dB.
- 5 Set the output frequencies of the Audio Generator 300 Hz and 3 kHz, and repeat test procedure 4.
- 6 Set the Detector of the Modulation Analyzer Negative Peak.
- 7 Repeat test procedure 4 and 5.


**Measuring Equipments**

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 14	Oct. 31, 15
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 15	Jun. 30, 16
5	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
4	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16

**Measuring Cables**

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W2	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 15	Jan. 31, 16
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 15	Jun. 30, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 15	Jan. 31, 16

### Measuring Equipment Configuration

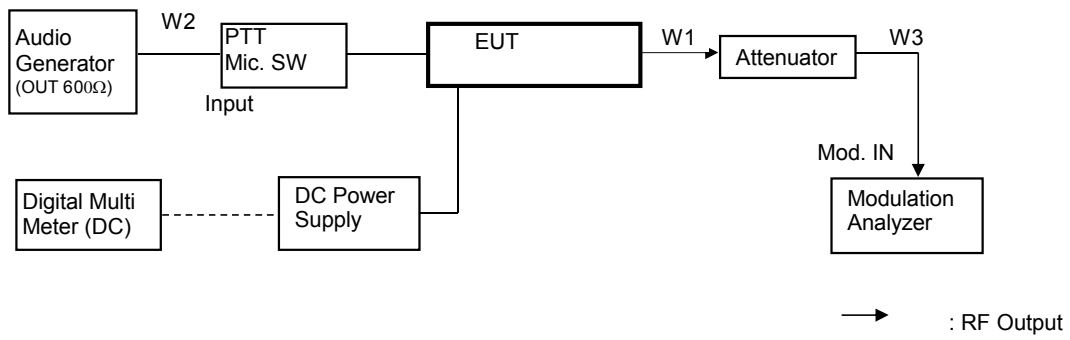


**Test Results**


Test date	Aug. 13, 2015		
Location	Kashima No.1 Test Site		
temperature	25	[degree C]	
Humidity Variation	50	[%]	
Atmospheric Pressure	101	[kPa]	
Test Engineer	Koichi Wagatsuma		

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 156.05 MHz(RSS)

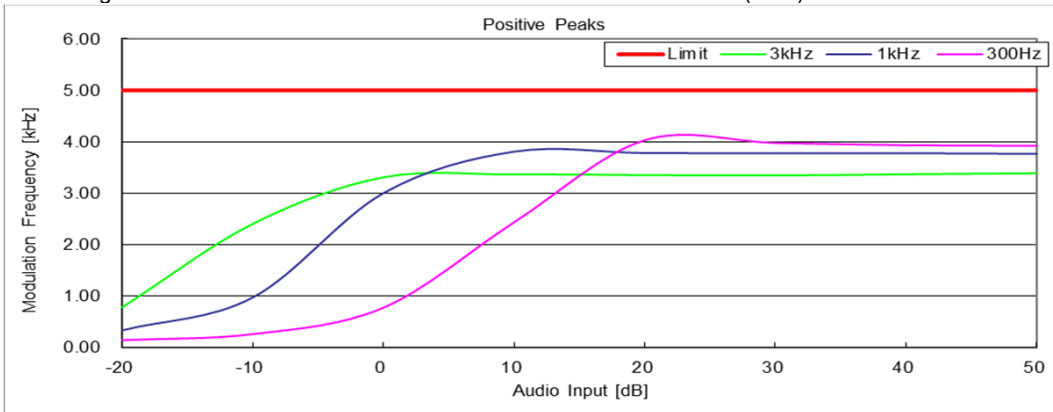


State : High Power / Authorized Bandwidth 20 kHz / 16K0F3E / 156.05 MHz(RSS)

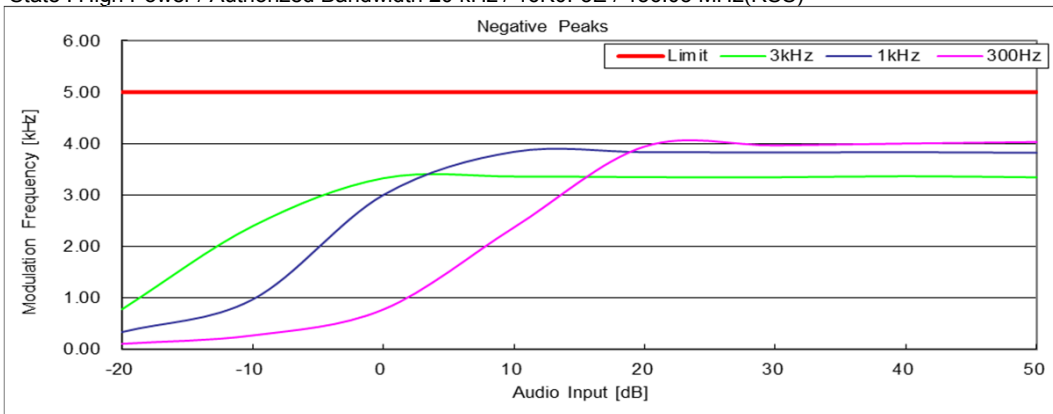


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 162.05 MHz(FCC)

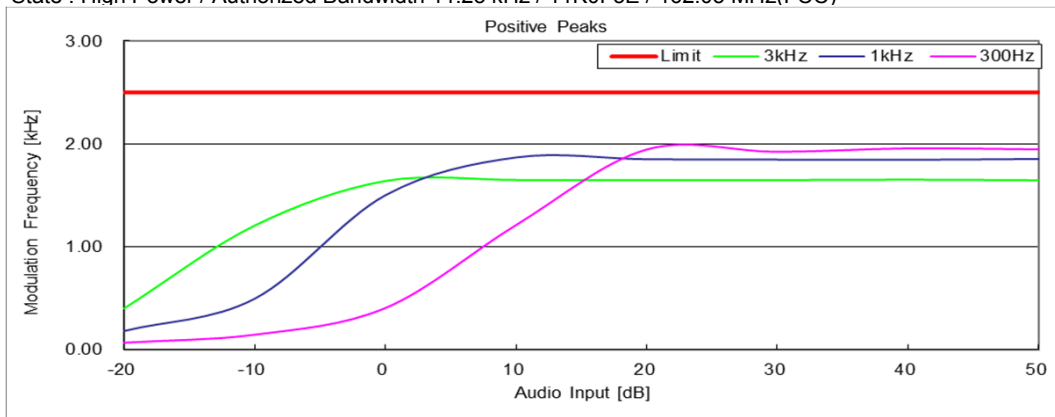


State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 162.05 MHz(FCC)

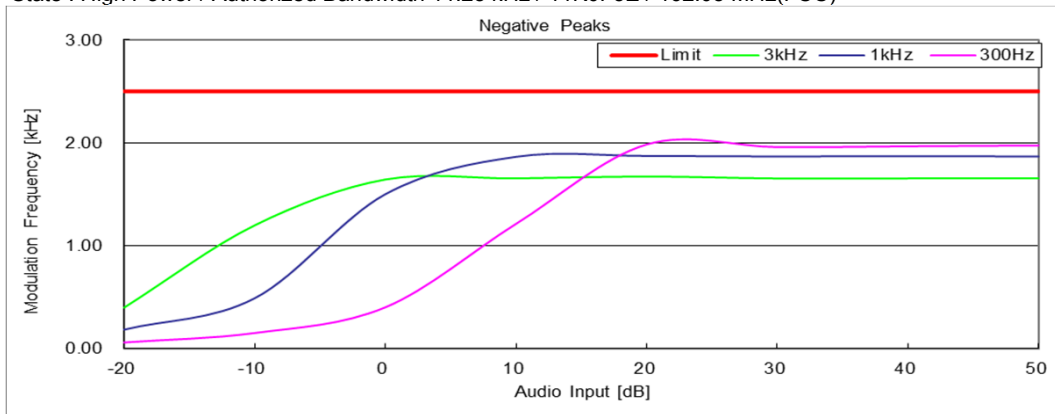

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 138.05 MHz(RSS)

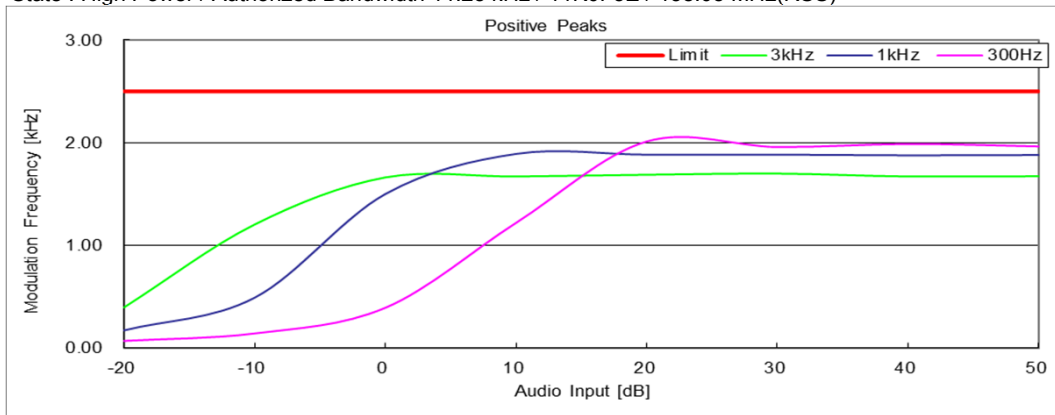

State : High Power / Authorized Bandwidth 11.25 kHz / 11K0F3E / 138.05 MHz(RSS)

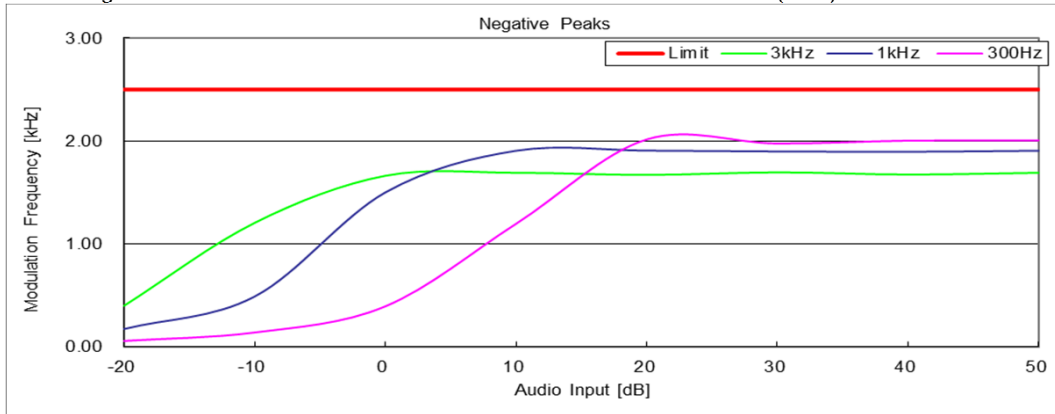

**10.8 Frequency Stability (Temperature Variation)**

REGULATIONS	: FCC Part 2 Section 1055 (a) (1), Part 90 Section 213(a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.2.2

**Test Procedure**

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Set the temperature -30 degrees C.
- 3 Leave the EUT for 1 hour after it became the temperature that was set up.
- 4 Make the EUT the transmitting state.  
measure the output frequency.
- 5 Make the EUT the receiving state.
- 6 Set the temperature 50 degrees C by 10 degrees C.  
And repeat test procedure 4 to 6.


**Measuring Equipments**

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenschel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
4	DC Power Supply	Takasago	GP035-20R	1014199060	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16
6	Temperature Chamber	Tabai	PL-3F	5103661	None	None
7	Temperature Meter	Sato	PC-5000TRH-II	A11999972	Jun. 23, 15	Jun. 30, 16
8	GPS Receiver	Hewlett Packard	HP Z3801A	3542A02414	None	None

**Measuring Cables**

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 09, 15	Jun. 30, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 09, 15	Jun. 30, 16

### Measuring Equipment Configuration

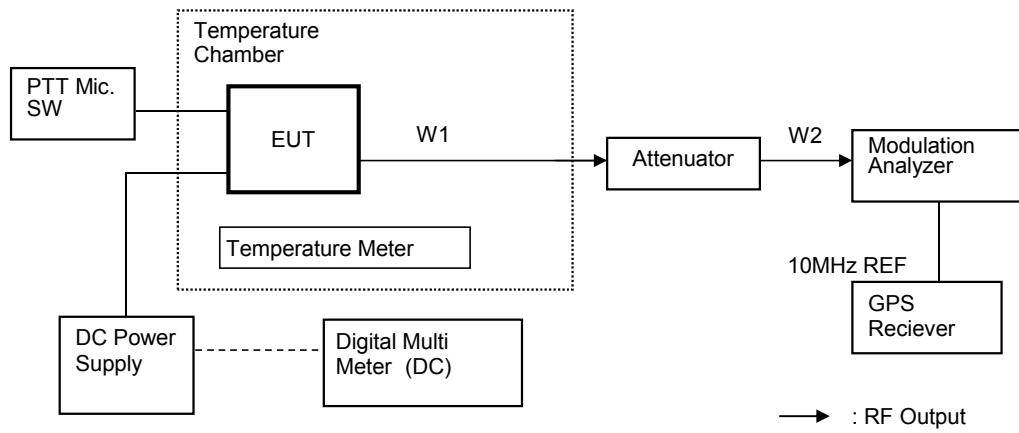




**Test Results**

Test date	Sep. 07, 2015
Location	Kashima No.1 Test Site
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).


State : High Power / Authorized Bandwidth 11.25 kHz / 150.05 MHz (FCC)  
 Reference Frequency: 150.050000 MHz(FCC Stability)  
 150.050030 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	150.050110	0.73	0.53	2.0	1.27
2	-20	150.050100	0.67	0.47	2.0	1.33
3	-10	150.050080	0.53	0.33	2.0	1.47
4	0	150.050070	0.47	0.27	2.0	1.53
5	10	150.050050	0.33	0.13	2.0	1.67
6	20	150.050030	0.20	0.00	2.0	1.80
7	30	150.050000	0.00	-0.20	2.0	1.80
8	40	150.049970	-0.20	-0.40	2.0	1.60
9	50	150.049930	-0.47	-0.67	2.0	1.33

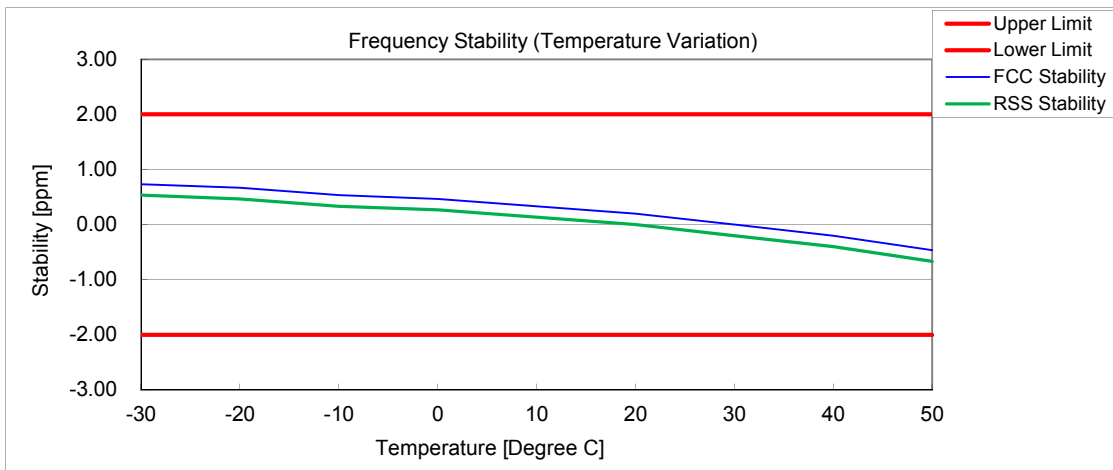

State : High Power / Authorized Bandwidth 20 kHz / 138.05 MHz (RSS)  
 Reference Frequency: 138.050000 MHz(FCC Stability)  
 Reference Frequency: 138.050030 MHz(RSS Stability)

No.	Temperature (Degree C)	Frequency (MHz)	FCC Stability (ppm)	RSS Stability (ppm)	Limit (+/- ppm)	Min. Margin (ppm)
1	-30	138.050100	0.72	0.51	2.0	1.28
2	-20	138.050090	0.65	0.43	2.0	1.35
3	-10	138.050080	0.58	0.36	2.0	1.42
4	0	138.050070	0.51	0.29	2.0	1.49
5	10	138.050060	0.43	0.22	2.0	1.57
6	20	138.050030	0.22	0.00	2.0	1.78
7	30	138.050010	0.07	-0.14	2.0	1.86
8	40	138.049970	-0.22	-0.43	2.0	1.57
9	50	138.049940	-0.43	-0.65	2.0	1.35

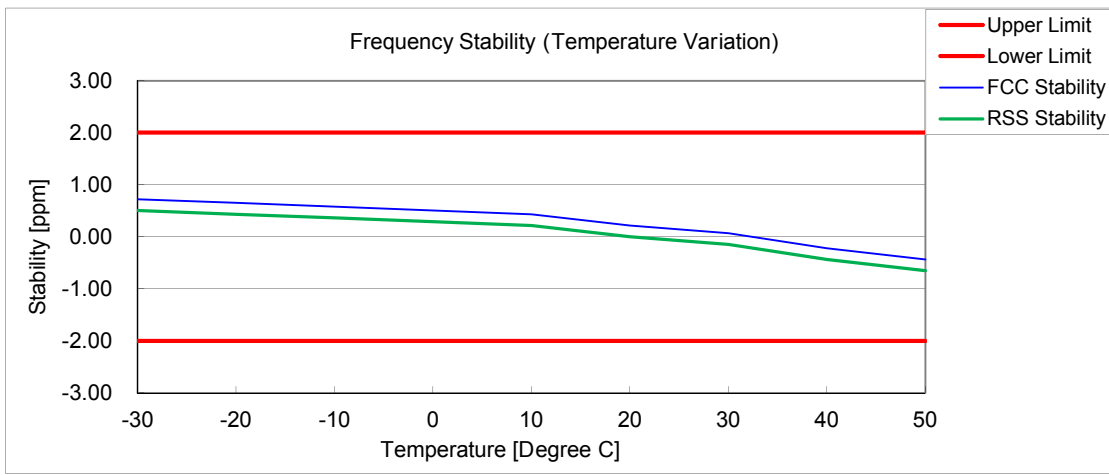

### 10.9 Frequency Stability (Voltage Variation)

REGULATIONS	: FCC Part 2 Section 1055 (d) (1), Part 90 Section 213(a)
TEST METHOD/GUIDE	: ANSI/TIA-603-D Section 2.2.2.2

#### Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 The power supply voltage to the EUT was varied from 85 % to 115 % of the nominal value measured at the input to the EUT.


#### Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (10dB)	Aeroflex/Wenshel	66-10-34	BY2887	Jun. 01, 15	Jun. 30, 16
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 15	Jun. 30, 16
3	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	Nov. 14, 14	Nov. 30, 15
4	DC Power Supply	Takasago	GP035-20R	1014199060	None	None
5	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 15	Jul. 31, 16
6	Temperature Chamber	Tabai	PL-3F	5103661	None	None
7	Temperature Meter	Sato	PC-5000TRH-II	A11999972	Jun. 23, 15	Jun. 30, 16
8	GPS Receiver	Hewlett Packard	HP Z3801A	3542A02414	None	None

#### Measuring Cables

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00042	Jun. 09, 15	Jun. 30, 16
W2	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun. 09, 15	Jun. 30, 16

#### Measuring Equipment Configuration

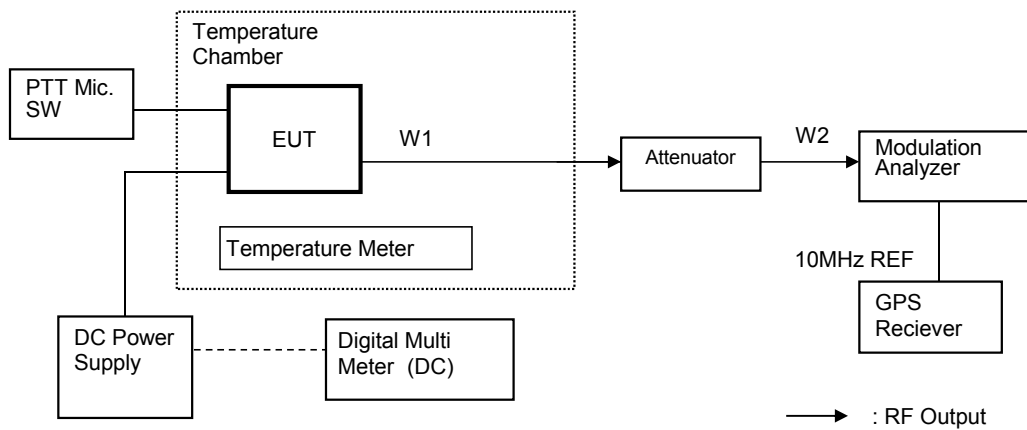

**Test Results**

Test date	Sep 07, 2015
Location	Kashima No.1 Test Site
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1  
 State the worst case (below).

State : High Power / Authorized Bandwidth 11.25 kHz / 150.05 MHz (FCC)

Reference Frequency: 150.050030 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.56	150.050020	-0.07	2.0	1.93
2	20+/-5	100	13.60	150.050030	0.00	2.0	2.00
3	20+/-5	115	15.64	150.050010	-0.13	2.0	1.87

State : High Power / Authorized Bandwidth 20 kHz / 138.05 MHz (RSS)

Reference Frequency: 138.050030 MHz

No.	Temperature (Degree C)	Diviation (%)	Voltage (V)	Frequency (MHz)	Stability (ppm)	Limit +/- (ppm)	Margin (ppm)
1	20+/-5	85	11.56	138.050030	0.00	2.0	2.00
2	20+/-5	100	13.60	138.050030	0.00	2.0	2.00
3	20+/-5	115	15.64	138.050020	-0.07	2.0	1.93

## 10.10 Receiver Spurious Emissions(Radiated)

REGULATIONS	:	RSS-Gen Section 7
TEST METHOD/GUIDE	:	RSS-Gen Section 7

### TEST PROCEDURE

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Tabletop Equipment  
EUT is placed on the wooden table, the top of which is 0.8meter above the metal ground plane(turntable).
- 3 Interconnecting Cables  
Excess part of the interconnecting cables longer than 1 meter are bundled in the center.  
Cables that hang closer than 40 cm to the ground plane is folded back and forth forming bundle 30 to 40 cm long, hanging approx, in the middle between ground plane and table.
- 4 Measuring Instruments  
Measuring instruments list and their calibration schedule are shown on Measurement Equipment Configuration.  
The brief description are as follows;
- 5 Antennas  
The broadband Bi-cog antenna or Biconical and Log periodic antenna is used for measurement on the frequency range 30 – 1000 MHz.  
The Double ridged guide antenna is used for frequency higher than 1000 MHz.
- 6 Pre-amplifier  
The broadband pre-amplifier is used for radiated emission measurement.  
The signal to noise ratio is improved by using pre-amplifier.
- 7 Spectrum Analyzer  
The spectrum analyzer is used for preliminary measurement of frequency range 30 – 1000 MHz, and also used for final measurement of higher than 1000 MHz (RBW : 1 MHz).
- 8 EMI Test Receiver  
The Quasi-peak detector (IF bandwidth : 120 kHz) built in test receiver is used for final measurement of the frequency 30 – 1000 MHz.  
The test receiver is complied with the specification of the CISPR publication 16.
- 9 Turntable  
The turntable is capable for EUT weight and rotatable 0 to 360 degree horizontally by remote control in the test room.
- 10 Antenna Mast  
The antenna mast is attachable to all antennas described on antenna height is adjustable 1 to 4 meters continuously by remote control at the test room, and antenna polarization is also changed by the remote control.
- 11 Preliminary Measurement  
EUT is tested on all operating conditions.  
The spectrum analyzer is set max-hold mode and swept during turntable was rotated 0 to 360 degree. Then spectrum chart are plotted out to find the worst emission conditions in configuration, operating mode, or ambient noise notation.

## 12 Final Measurement

The EUT operated in the condition where maximum emission is found in the preliminary test.

The turntable azimuth(EUT direction) and antenna height are adjusted the position so that maximum field strength is obtained for each frequency spectrum to be measured.

The equipment and cables are arranged or manipulated within the range of the test standard in the above condition.

When the uncertain result was obtained, the measurement is retried by using the half wave dipole antenna instead of the broadband antenna.



## TEST EQUIPMENTS

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Biconical Antenna	Schwarzbeck	BBA9106	A09082007	Sep. 24, 14	Sep. 30, 15
2	Log periodic Antenna	Schwarzbeck	USLP9143B	043	Jun. 17, 15	Jun. 30, 16
3	Amplifier	Intertek Japan	ZX60-3018G	005	Jan. 23, 15	Jan. 31, 16
4	6dB Attenuator	TAMAGAWA	CFA-01	A00040805	Jan. 23, 15	Jan. 31, 16
5	Double Ridged Antenna	ETS·LINDGREN	3117	55157	May. 21, 15	May. 31, 16
6	3dB Attenuator	HUBER + SUHNER	6803.17.B	5111	Feb. 23, 15	Feb. 29, 16
7	Amplifier	TOYO	TPA0118-30	0402	Feb. 23, 15	Feb. 29, 16
8	Test receiver	Agilent	N9038A	MY51210201	Aug. 16, 14	Aug. 31, 15
9	RF Switch	Intertek Japan	ACX-150-1	A12301501	Jan. 23, 15	Jan. 31, 16
10	Site Attenuation	Intertek Japan			Feb. 20, 15	Feb. 29, 16
11	SVSWR	Intertek Japan			Jun. 05, 15	Jun. 30, 16
12	Dummy Load	TME	CT-150NP	1138693	Jan. 20, 15	Jan. 31, 16

## USED CABLES

No.	Cable	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
R11	Coaxial Cable	FUJIKURA	5D-2W	R11	Jan 23, 15	Jan. 31, 16
R3	Coaxial Cable	FUJIKURA	10D-2W	R3	Jan 23, 15	Jan. 31, 16
R5	Coaxial Cable	FUJIKURA	RG-5A/U	R5	Jan 23, 15	Jan. 31, 16
R7	Coaxial Cable	MIYAZAKI	5D-2W	R7	Jan 23, 15	Jan. 31, 16
R10	Coaxial Cable	FUJIKURA	5D-2W	R10	Jan 23, 15	Jan. 31, 16
R13	Coaxial Cable	SUHNER	SUCOFLEX 104	229603	Feb 23, 15	Feb. 29, 16
R12	Coaxial Cable	Candox	5B-048-98-98-5000	111130	Feb 23, 15	Feb. 29, 16
W1	Coaxial Cable	Suhner	SUCOFLEX104	KSR00091	Jun 09, 15	Jun. 30, 16

**MEASUREMENT EQUIPMENT CONFIGURATION**

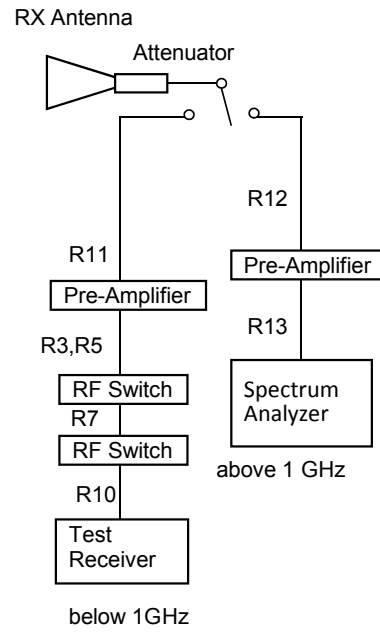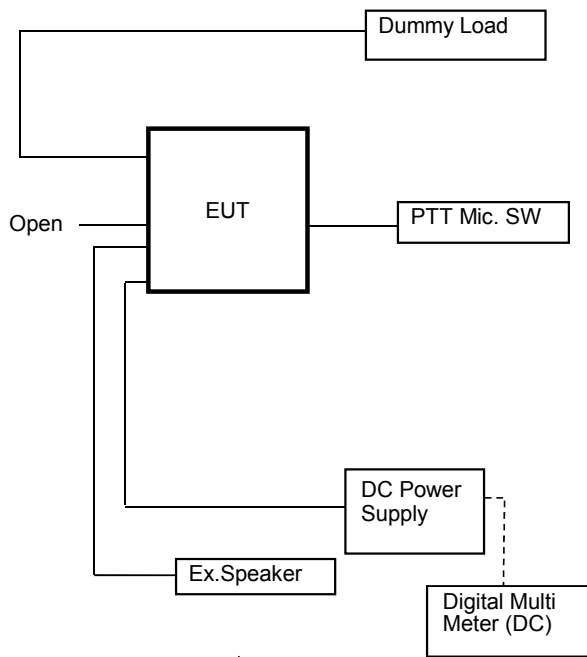

**TEST RESULTS**

Test date	Aug. 08, 2015 and Aug. 09, 2015
Location	Kashima No.12 Test Site
temperature	24.5 to 25 [degree C]
Humidity Variation	58 to 59 [%]
Atmospheric Pressure	100.9 to 101.1 [kPa]
Test Engineer	Koichi Wagatsuma

Test was carried out for the frequency band of section 10.1

State the worst case (below).

State : 173.95 MHz Receiver Condition

No.	Frequency (MHz)	Pol	Mode	Reading Level (dBuv)	Factor* (dB)	Emission Level (dBuV/m)	Limit Level (dBuV/m)	Margin (dB)
1	211.20	Hor.		40.0	-1.3	38.7	43.5	4.8
		Ver.		38.1	-1.3	36.8	43.5	6.7
2	249.61	Hor.		35.4	-0.1	35.3	46.0	10.7
		Ver.		-	-0.1	-	46.0	-
3	288.01	Hor.		39.8	1.2	41.0	46.0	5.0
		Ver.		29.4	1.2	30.6	46.0	15.4
4	326.40	Hor.		31.4	2.4	33.8	46.0	12.2
		Ver.		-	2.4	-	46.0	-
5	748.81	Hor.		21.2	11.5	32.7	46.0	13.3
		Ver.		-	11.5	-	46.0	-
6	787.20	Hor.		19.9	12.6	32.5	46.0	13.5
		Ver.		-	12.6	-	46.0	-
7	1696.00	Hor.	AVG	29.8	4.7	34.5	54.0	19.5
		Ver.	AVG	34.1	4.7	38.8	54.0	15.2
8	1908.00	Hor.	AVG	33.3	6.5	39.8	54.0	14.2
		Ver.	AVG	39.1	6.5	45.6	54.0	8.4

There is the margin of 20dB over except for the above points.  
\* Factor = Antenna, Antenna Pad, Cable, Preamp, (Dist. Conversion)  
Emission Level = Reading Level + Factor

**Note:**

- 1 Measurement distance is 3 metres. (Above 1GHz is 4.80 metres)
- 2 Scanned frequency are 30 to 2000 MHz.
- 3 Highest oscillator frequency is 223.95 MHz.



**10.11 Necessary Bandwidth and Emission Bandwidth**

REGULATIONS	: FCC Part 2 Section 202 (g) & Federal Register/ Vol.68, No236 TRC 43
-------------	--

**Calculation Results**

State : 16K0F3E (Authorized Bandwidth 20 kHz)

Item	Mark		
Maximum Modulation	(M)	3	kHz
Maximum Deviation	(D)	5	kHz
Constant Factor	(K)	1	
Necessary Bandwidth	(Bn)	16	kHz

$B_n = (2 \times M) + (2 \times D \times K)$

State : 11K0F3E (Authorized Bandwidth 11.25 kHz)

Item	Mark		
Maximum Modulation	(M)	3	kHz
Maximum Deviation	(D)	2.5	kHz
Constant Factor	(K)	1	
Necessary Bandwidth	(Bn)	11	kHz

$B_n = (2 \times M) + (2 \times D \times K)$

State : 7K60FXE / 7K60FXD (9600bps, Authorized Bandwidth 11.25 kHz)

Item	Mark		
Digital information rate	(R)	9600	bps
Peak frequency deviation	(D)	3.024	kHz
Signaling states	(S)	4	
Numerical factor	(K)	0.463	
Necessary Bandwidth	(Bn)	7.6	kHz

$B_n = (R / \log_2 S) + 2 \times D \times K$

**10.12 99% Occupied Bandwidth**


REGULATIONS	: RSS-119 Section 5.5
TEST METHOD/GUIDE	: RSS-Gen Section 6.6

**Test Procedure**

- The EUT and test equipment were set up as shown on the following page
- Adjust the test instrument for the following setting:
  - RBW : 1 % to 5 % of the Necessary bandwidth
  - VBW : at least 3 times the RBW
  - Detector : Peak
  - Sweep Time : Auto
  - Trace mode : Max Hold
- Allow trace to fully stabilize.
- Use "Occupied Bandwidth Measurement" function to measure the 99% Occupied Bandwidth
- Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only 16K0F3E, 11K0F3E)

**Measuring Equipments**

No.	Equipment	Manufacture	Model No.	Serial No.	Cal Date	Cal Exp.
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	Jun. 01, 2015	Jun. 30, 2016
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	Jun. 01, 2015	Jun. 30, 2016
3	Modulation Analyzer	Hewlett Packard	8901B	2806A01669	Oct. 13, 2014	Oct. 31, 2015
4	Audio Generator	Anritsu	MG443B	M70150	Jun. 18, 2015	Jun. 30, 2016
5	Spectrum Analyzer	Agilent	N9030A	US51350170	Mar. 12, 2015	Mar. 31, 2016
6	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
7	Digital Multi Meter	FLUKE	8846A	9642018	Jul. 10, 2015	Jul. 31, 2016
8	Balance Cable	Nicoon	3D-2V	KSR00092	Jan. 23, 2015	Jan. 31, 2016
9	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C04	Jun. 09, 2015	Jun. 30, 2016
10	Coaxial Cable	Suhner	SUCOFLEX104	F0000017	Jan. 23, 2015	Jan. 31, 2016
11	Coaxial Cable	Suhner	SUCOFLEX104	F0000018	Jan. 23, 2015	Jan. 31, 2016



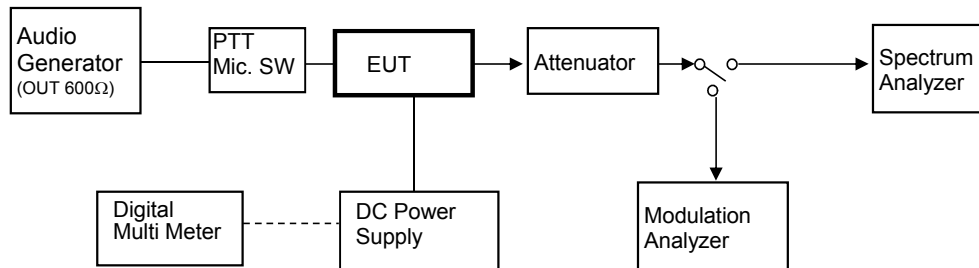
**Measuring Equipment Configuration**

**Test Results**

Test date	Aug 20, 2015	
Location	Kashima No.1 Test Site	
temperature	20	[degree C]
Humidity Variation	60	[%]
Atmospheric Pressure	101	[kPa]
Test Engineer	Koichi Wagatsuma	

Emission Designation	Frequency (MHz)	99% Occupied Bandwidth (kHz)	Authorized bandwidth (kHz)
16K0F3E	138.05	10.506	20
	156.05	10.522	
	173.95	10.545	
11K0F3E	138.05	5.195	11.25
	156.05	5.197	
	173.95	5.218	
7K60FXD/FXE	138.05	7.471	11.25
	156.05	7.510	
	173.95	7.530	

Ferquency (MHz)	Emission Designation	
	16K0F3E	11K0F3E
138.05	<p>Agilent Spectrum Analyzer - Occupied BW        RBW 300.00 Hz Center Freq: 138.050000 MHz        #Res BW 300 Hz #VBW 3 kHz Span 50 kHz        Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.506 kHz Total Power -0.94 dBm        Transmit Freq Error 6 Hz OBW Power 99.00 %        x dB Bandwidth 15.48 kHz x dB -26.00 dB</p>	<p>Agilent Spectrum Analyzer - Occupied BW        Avg/Hold Number 500 Center Freq: 138.050000 MHz        #Res BW 110 Hz #VBW 1.1 kHz Span 50 kHz        Sweep FFT</p> <p>Occupied Bandwidth 5.195 kHz Total Power -1.67 dBm        Transmit Freq Error -27 Hz OBW Power 99.00 %        x dB Bandwidth 10.10 kHz x dB -26.00 dB</p>
156.05	<p>Agilent Spectrum Analyzer - Occupied BW        Center Freq: 156.050000 MHz        #Res BW 300 Hz #VBW 3 kHz Span 50 kHz        Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.522 kHz Total Power -0.97 dBm        Transmit Freq Error -6 Hz OBW Power 99.00 %        x dB Bandwidth 15.50 kHz x dB -26.00 dB</p>	<p>Agilent Spectrum Analyzer - Occupied BW        Center Freq: 156.050000 MHz        #Res BW 110 Hz #VBW 1.1 kHz Span 50 kHz        Sweep FFT</p> <p>Occupied Bandwidth 5.197 kHz Total Power -1.55 dBm        Transmit Freq Error -29 Hz OBW Power 99.00 %        x dB Bandwidth 10.10 kHz x dB -26.00 dB</p>
173.95	<p>Agilent Spectrum Analyzer - Occupied BW        Avg/Hold Number 50 Center Freq: 173.950000 MHz        #Res BW 300 Hz #VBW 3 kHz Span 50 kHz        Sweep 512.8 ms</p> <p>Occupied Bandwidth 10.545 kHz Total Power -1.19 dBm        Transmit Freq Error -23 Hz OBW Power 99.00 %        x dB Bandwidth 15.52 kHz x dB -26.00 dB</p>	<p>Agilent Spectrum Analyzer - Occupied BW        Center Freq: 173.950000 MHz        #Res BW 110 Hz #VBW 1.1 kHz Span 50 kHz        Sweep FFT</p> <p>Occupied Bandwidth 5.218 kHz Total Power -1.86 dBm        Transmit Freq Error -39 Hz OBW Power 99.00 %        x dB Bandwidth 10.10 kHz x dB -26.00 dB</p>

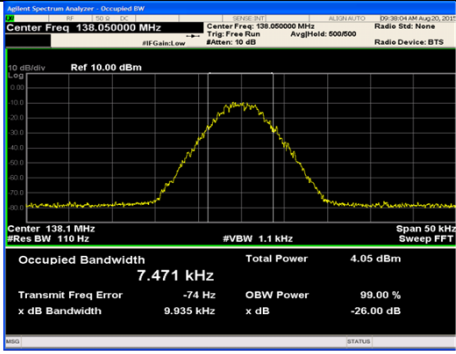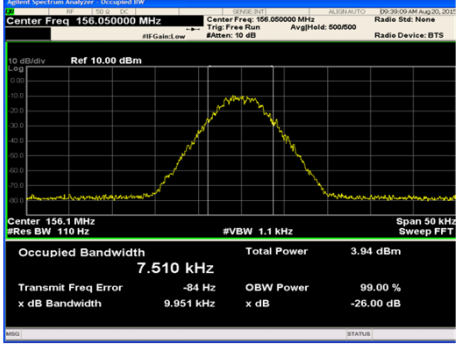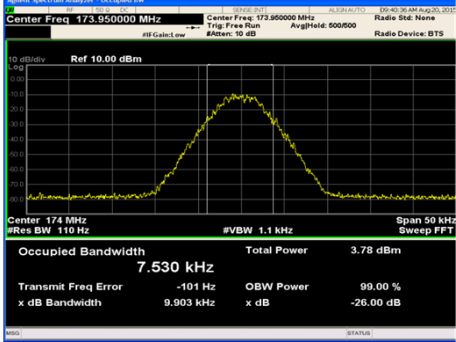Ferquency (MHz)	Emission Designation	
138.05	<p align="center"><b>7K60FXD/FXE</b></p>  <p>Agilent Spectrum Analyzer - Occupied BW        Center Freq 138.050000 MHz Center Freq: 138.050000 MHz Radio Std: None        Trig: Free Run AvgHeld: 500/500        #FGate: Low #Att: 10 dB Radio Device: BTS</p> <p>Center 138.1 MHz Span 50 kHz        #Res BW 110 Hz #VBW 1.1 kHz Sweep FFT</p> <p>Occupied Bandwidth Total Power 4.05 dBm  <b>7.471 kHz</b></p> <p>Transmit Freq Error -74 Hz OBW Power 99.00 %        x dB Bandwidth 9.935 kHz x dB -26.00 dB</p>	
156.05	 <p>Agilent Spectrum Analyzer - Occupied BW        Center Freq 156.050000 MHz Center Freq: 156.050000 MHz Radio Std: None        Trig: Free Run AvgHeld: 500/500        #FGate: Low #Att: 10 dB Radio Device: BTS</p> <p>Center 156.1 MHz Span 50 kHz        #Res BW 110 Hz #VBW 1.1 kHz Sweep FFT</p> <p>Occupied Bandwidth Total Power 3.94 dBm  <b>7.510 kHz</b></p> <p>Transmit Freq Error -84 Hz OBW Power 99.00 %        x dB Bandwidth 9.951 kHz x dB -26.00 dB</p>	
173.95	 <p>Agilent Spectrum Analyzer - Occupied BW        Center Freq 173.950000 MHz Center Freq: 173.950000 MHz Radio Std: None        Trig: Free Run AvgHeld: 500/500        #FGate: Low #Att: 10 dB Radio Device: BTS</p> <p>Center 174 MHz Span 50 kHz        #Res BW 110 Hz #VBW 1.1 kHz Sweep FFT</p> <p>Occupied Bandwidth Total Power 3.78 dBm  <b>7.530 kHz</b></p> <p>Transmit Freq Error -101 Hz OBW Power 99.00 %        x dB Bandwidth 9.903 kHz x dB -26.00 dB</p>	