

# FCC/ISED BT REPORT

## Certification

**Applicant Name:**

JVC KENWOOD Corporation

**Address:**

3-12, MORIYACHO, KANAGAWA-KU, YOKOHAMA-SHI, KANAHAWS, 221-0022 JAPAN

**Date of Issue:**

April 28, 2017

**Location:**HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-R-1704-F012**HCT FRN:** 0005866421**ISED Registration Number :** 5944A-6

<b>FCC ID</b>	<b>: K44479000</b>
<b>ISED ID</b>	<b>: 282F-479000</b>
<b>APPLICANT</b>	<b>: JVC KENWOOD Corporation</b>

<b>FCC Model(s):</b>	NX-3220-K, NX-3220-K2, NX-3220-K3
<b>IC Model(s):</b>	NX-3220-K, NX-3220-K2, NX-3220-K3
<b>EUT Type:</b>	VHF DIGITAL TRANSCEIVER
<b>Max. RF Output Power:</b>	-0.017 dBm (1.00 mW)
<b>Frequency Range:</b>	2402 MHz - 2480 MHz (Bluetooth)
<b>Modulation type</b>	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
<b>FCC Classification:</b>	FCC Part 15 Spread Spectrum Transmitter
<b>FCC Rule Part(s):</b>	Part 15 subpart C 15.247
<b>ISED Rule Part(s):</b>	RSS-247 Issue 2 (February 2017) , RSS-GEN Issue 4(November 2014)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)



Report prepared by : **Se Wook Park**  
Engineer of Telecommunication testing center



Approved by : **Jong Seok Lee**  
Manager of Telecommunication testing center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1704-F012	April 28, 2017	- First Approval Report

# Table of Contents

1.	GENERAL INFORMATION.....	4
2.	EUT DESCRIPTION.....	4
3.	TEST METHODOLOGY.....	5
3.1	EUT CONFIGURATION .....	5
3.2	EUT EXERCISE .....	5
3.3	GENERAL TEST PROCEDURES .....	5
3.4	DESCRIPTION OF TEST MODES .....	6
4.	INSTRUMENT CALIBRATION .....	6
5.	FACILITIES AND ACCREDITATIONS.....	6
5.1	FACILITIES .....	6
5.2	EQUIPMENT .....	6
6.	ANTENNA REQUIREMENTS .....	6
7.	MEASUREMENT UNCERTAINTY.....	7
8.	SUMMARY OF TEST RESULTS .....	8
8.1	FCC Part .....	8
8.2	ISED Part .....	9
9.	TEST RESULT .....	10
9.1	PEAK POWER .....	10
9.2	BAND EDGES.....	17
9.3	FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW) .....	25
9.4	NUMBER OF HOPPING FREQUENCY .....	34
9.5	TIME OF OCCUPANCY (DWELL TIME).....	38
9.6	SPURIOUS EMISSIONS.....	45
9.6.1	CONDUCTED SPURIOUS EMISSIONS .....	45
9.6.2	RADIATED SPURIOUS EMISSIONS .....	54
9.6.3	RADIATED RESTRICTED BAND EDGES .....	84
9.6.4	RECEIVER SPURIOUS EMISSIONS.....	94
9.7	POWERLINE CONDUCTED EMISSIONS.....	95
10.	LIST OF TEST EQUIPMENT .....	100
10.1	LIST OF TEST EQUIPMENT(Conducted Test) .....	100
10.2	LIST OF TEST EQUIPMENT(Radiated Test) .....	101

## 1. GENERAL INFORMATION

<b>Manufacturer:</b>	JVC KENWOOD Corporation
<b>Address:</b>	1-16-2, Hakusan, Midori-ku, Yokohama-shi, Kanagawa, 226-8525 Japan
<b>FCC ID:</b>	K44479000
<b>IC:</b>	282F-479000
<b>EUT Type:</b>	VHF DIGITAL TRANSCEIVER
<b>FCC Model(s):</b>	NX-3220-K, NX-3220-K2, NX-3220-K3
<b>IC Model(s):</b>	NX-3220-K, NX-3220-K2, NX-3220-K3
<b>Date(s) of Tests:</b>	March 25, 2017 ~ April 21, 2017
<b>Place of Tests:</b>	HCT Co., Ltd. 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

## 2. EUT DESCRIPTION

<b>FCC Model(s):</b>	NX-3220-K, NX-3220-K2, NX-3220-K3
<b>IC Model(s):</b>	NX-3220-K, NX-3220-K2, NX-3220-K3
<b>EUT Type</b>	VHF DIGITAL TRANSCEIVER
<b>Power Supply</b>	DC 7.5 V
<b>Battery Information</b>	Model: KNB-55L, KNB-57L, KNB-68LC Type: Li-ion Battery Pack Model: KNB-56N Type: Ni-ion Battery Pack Model: KBP-5 Type: AA Alkaline Battery Pack
<b>Frequency Range</b>	2402 MHz - 2480 MHz (Bluetooth)
<b>Max. RF Output Power:</b>	-0.017 dBm (1.00 mW)
<b>BT Operating Mode</b>	Normal, EDR, AFH
<b>Modulation Type</b>	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
<b>Modulation Technique</b>	FHSS
<b>Number of Channels</b>	79Channels, Minimum 20 Channels(AFH)
<b>Antenna Specification</b>	Manufacturer: JVC KENWOOD Corporation Antenna type: Built-in Sheet metal antenna Peak Gain : 2.53 dBi

### ※ 15.247 / RSS-247 Requirements for Bluetooth transmitter

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
  - 1) This system is hopping pseudo-randomly.
  - 2) Each frequency is used equally on the average by each transmitter.
  - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
  - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

### 3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C / the RSS-GEN issue 4, RSS-247 issue 2.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

##### Conducted Antenna Terminal

See Section from 7.8.2 to 7.8.8.(ANSI 63.10-2013)

### 3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

## 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 6. ANTENNA REQUIREMENTS

**According to FCC 47 CFR §15.203 / RSS-Gen(Issue 4) Section 8.3:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\*The E.U.T Complies with the requirement of §15.203 / RSS-GEN

## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

## 8. SUMMARY OF TEST RESULTS

### 8.1 FCC Part

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)(ii) or (iii)	N/A	CONDUCTED	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	< 1 W if ≥ 75 non-overlapping hopping channels used < 0.125 W if < 75 non-overlapping hopping channels used		PASS
Carrier Frequency Separation	§15.247(a)(1)	>25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 9.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 9.6.2	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 9.6.3		PASS



**8.2 ISED Part**

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	RSS-247, 5.1.1	N/A	CONDUCTED	PASS
99 % Bandwidth	RSS-GEN, 6.6	N/A		PASS
Conducted Maximum Peak Output Power	RSS-247, 5.4.2	< 1 W if the hopset uses 75 or more hopping channels < 0.125 W if the hopset uses less than 75 hopping channels		PASS
Carrier Frequency Separation	RSS-247, 5.1.2	> 25 kHz or > 2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	RSS-247, 5.1.4	≥ 15		PASS
Time of Occupancy	RSS-247, 5.1.4	< 0.4 s		PASS
Conducted Spurious Emissions	RSS-247, 5.5	< 20 dB for all out-of band emissions		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	< 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	RSS-GEN section 8.8 table 3		PASS
Radiated Spurious Emissions	RSS-GEN, 8.9	RSS-GEN section 8.9 table 4, 5		RADIATED
Radiated Restricted Band Edge	RSS-GEN, 8.10	RSS-GEN section 8.10 table 6	PASS	
Receiver Spurious Emissions	RSS-GEN, 5 RSS-GEN, 7.1.2	RSS-GEN section 7.1.2 table 2	PASS	

## 9. TEST RESULT


### 9.1 PEAK POWER

#### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

#### Test Configuration

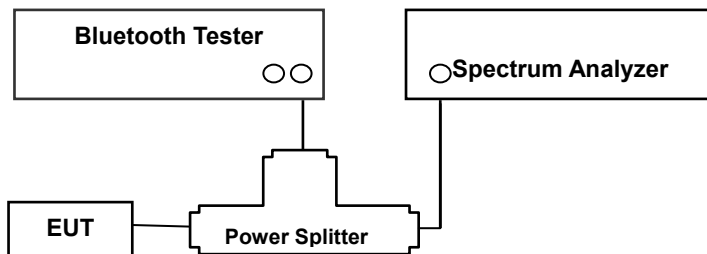

#### TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

#### SAMPLE CALCULATION

$$\begin{aligned} \text{Output Power} &= \text{Spectrum Reading Power} + \text{Power Splitter loss} + \text{Cable loss}(2 \text{ ea}) \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the splitter and cable combination.
2. Spectrum offset = Power Splitter loss + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the splitter and cable combination is 7.36 dB at 2402 MHz and is 7.44 dB at 2480 MHz.

So, 7.4 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

**TEST RESULTS**


No non-compliance noted

**Test Data**


Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)	Result
		(dBm)	(mW)		
Low	2402	-3.055	0.49	125	PASS
Mid	2441	-3.146	0.48		PASS
High	2480	-3.132	0.49		PASS

Channel	Frequency (MHz)	Output Power (8DPSK)		Output Power ( $\pi/4$ DQPSK)		Limit (mW)	Result
		(dBm)	(mW)	(dBm)	(mW)		
Low	2402	-0.017	1.00	-0.662	0.86	125	PASS
Mid	2441	-0.096	0.98	-0.720	0.85		PASS
High	2480	-0.062	0.99	-0.714	0.85		PASS


Test Plots (GFSK)  
Peak Power (CH.0)

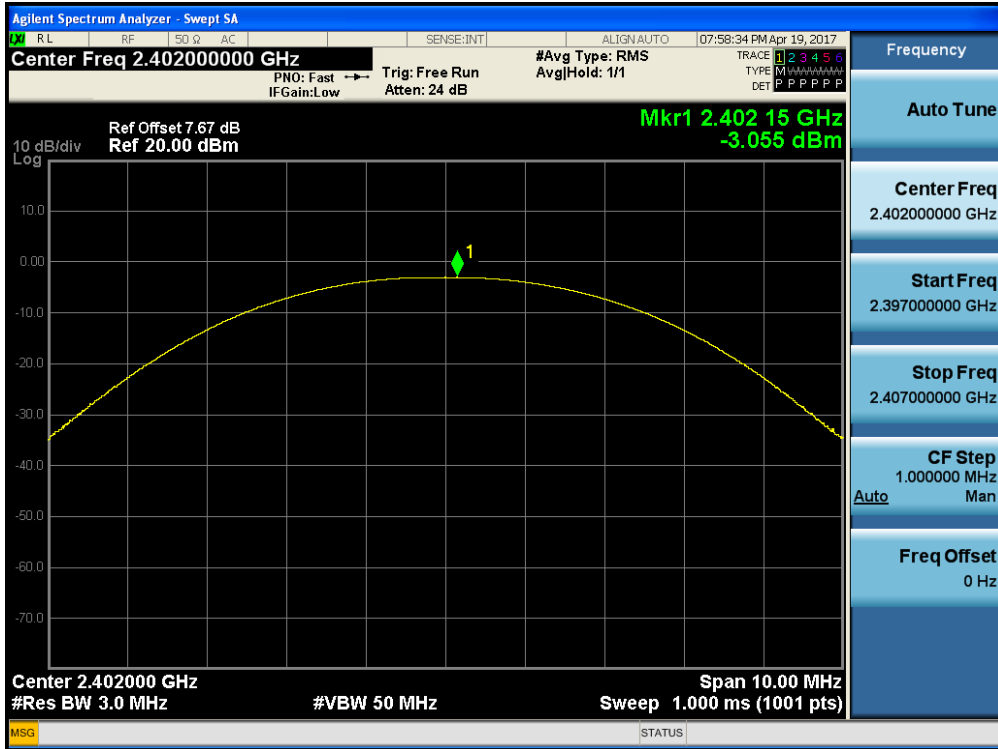


Test Plots (GFSK)  
Peak Power (CH.39)

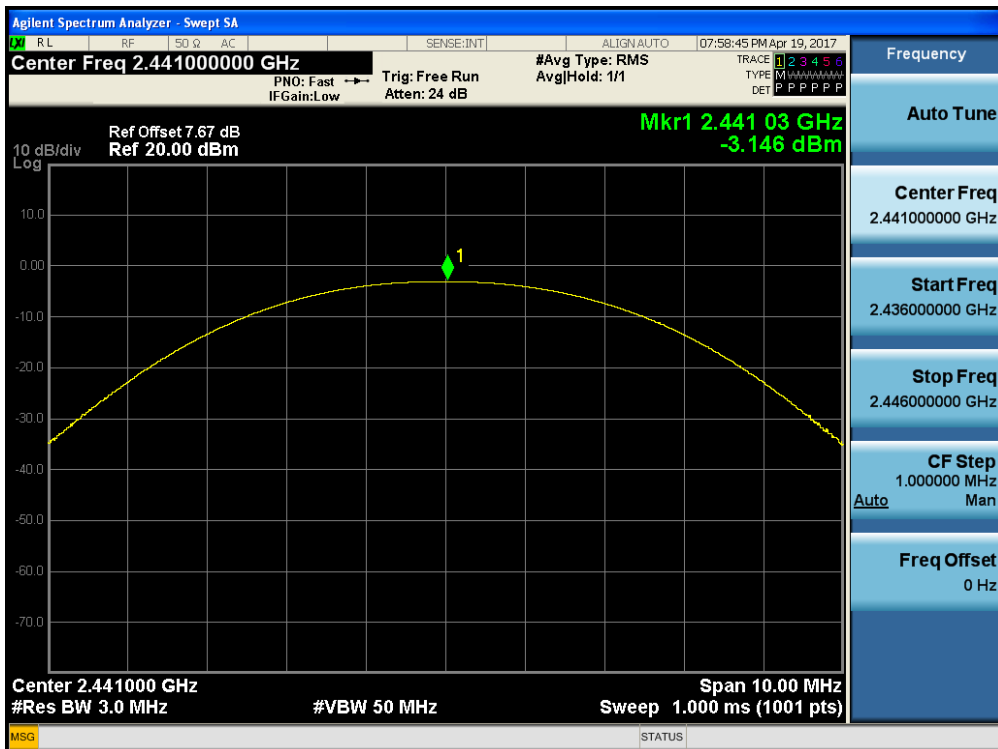


Test Plots (GFSK)  
Peak Power (CH.78)

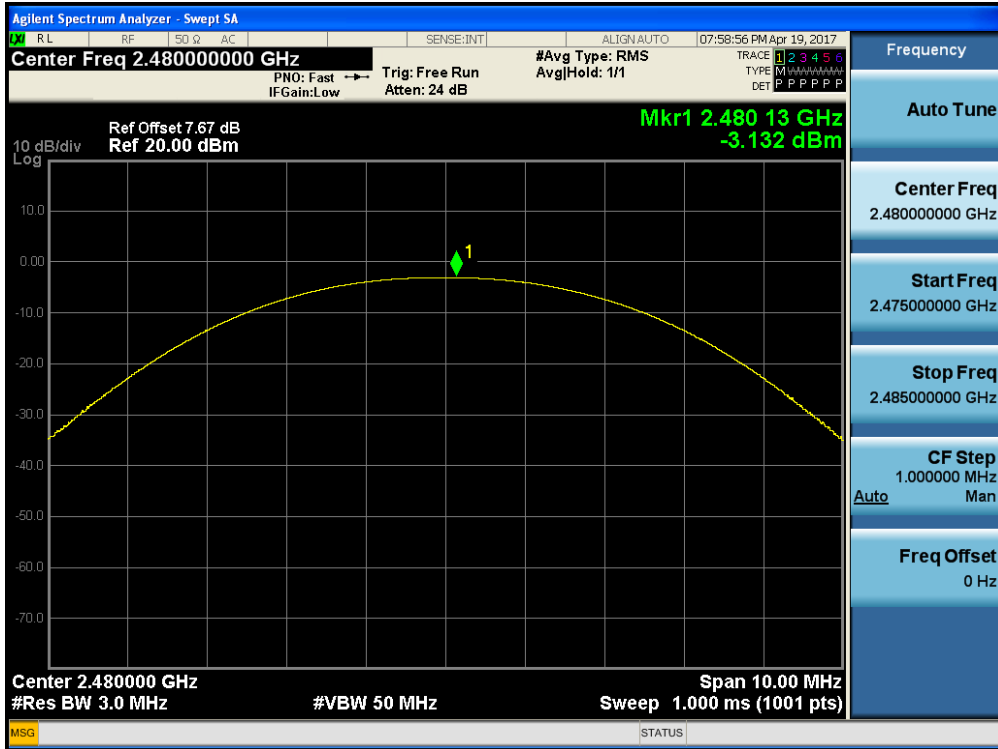


Test Plots (8DPSK)  
Peak Power (CH.0)

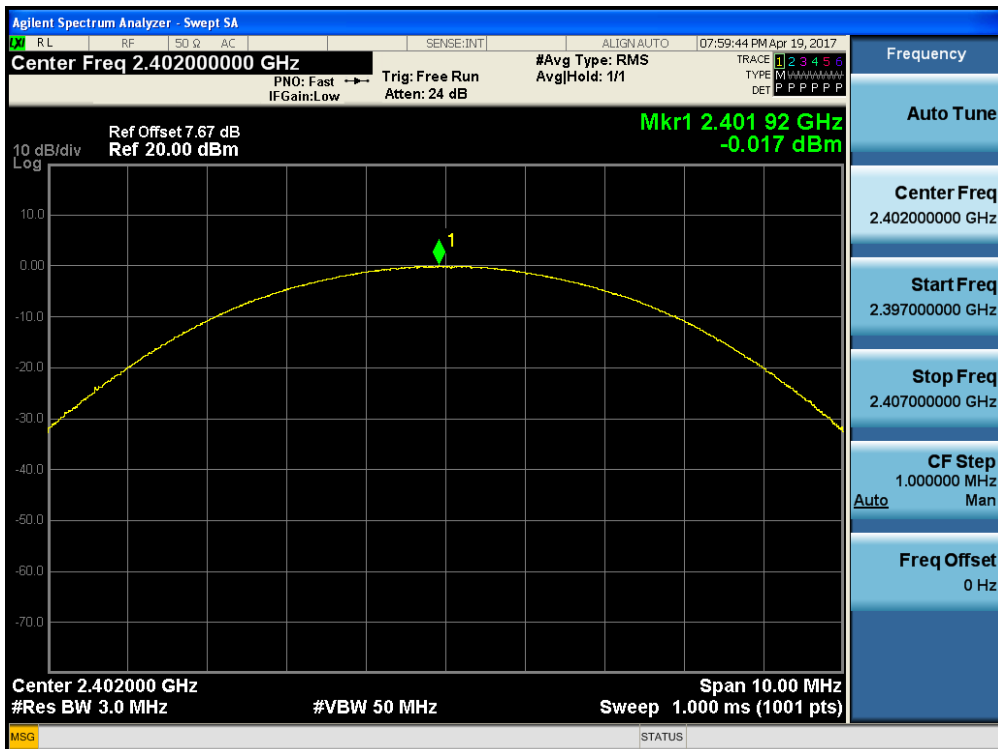


Test Plots (8DPSK)  
Peak Power (CH.39)

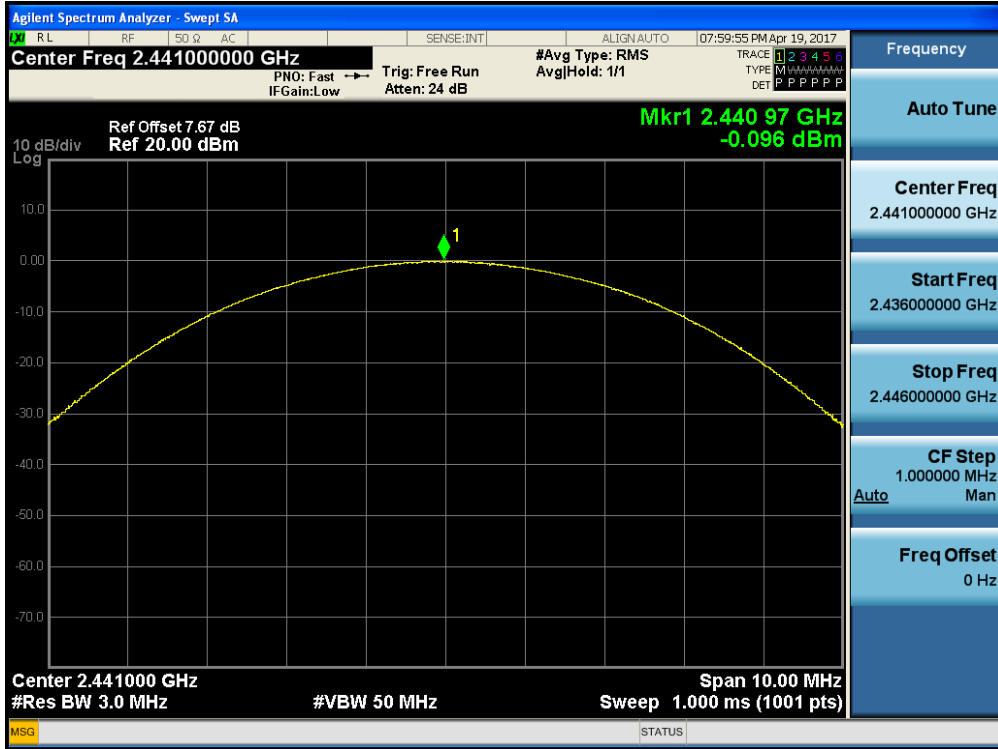


Test Plots (8DPSK)  
Peak Power (CH.78)

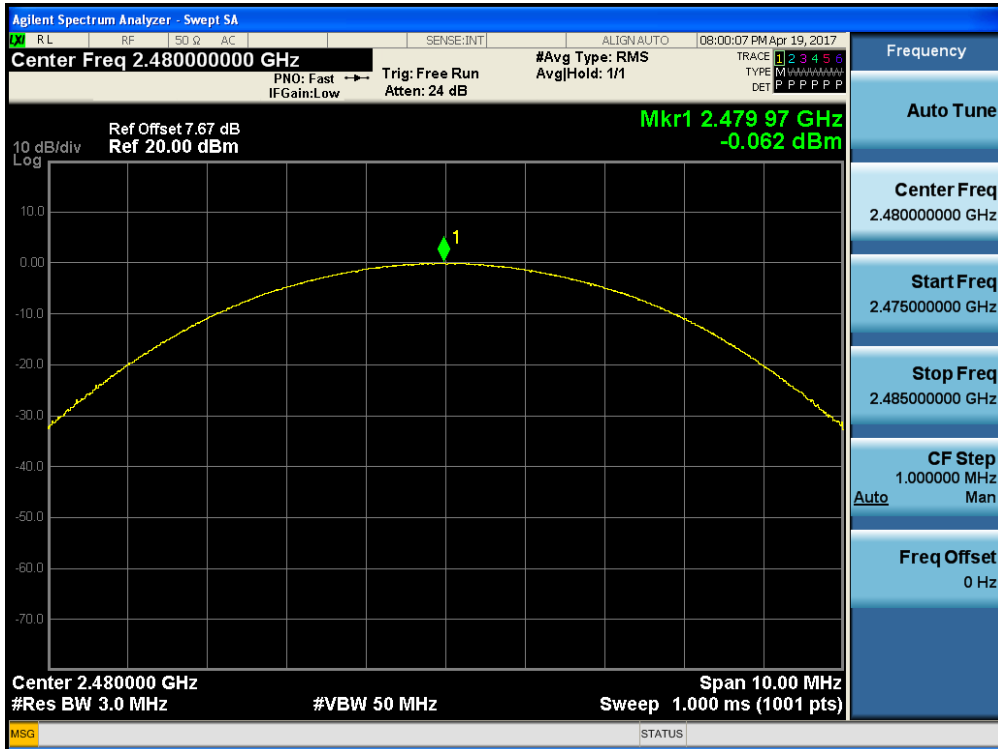


Test Plots ( $\pi/4$ DQPSK)  
Peak Power (CH.0)

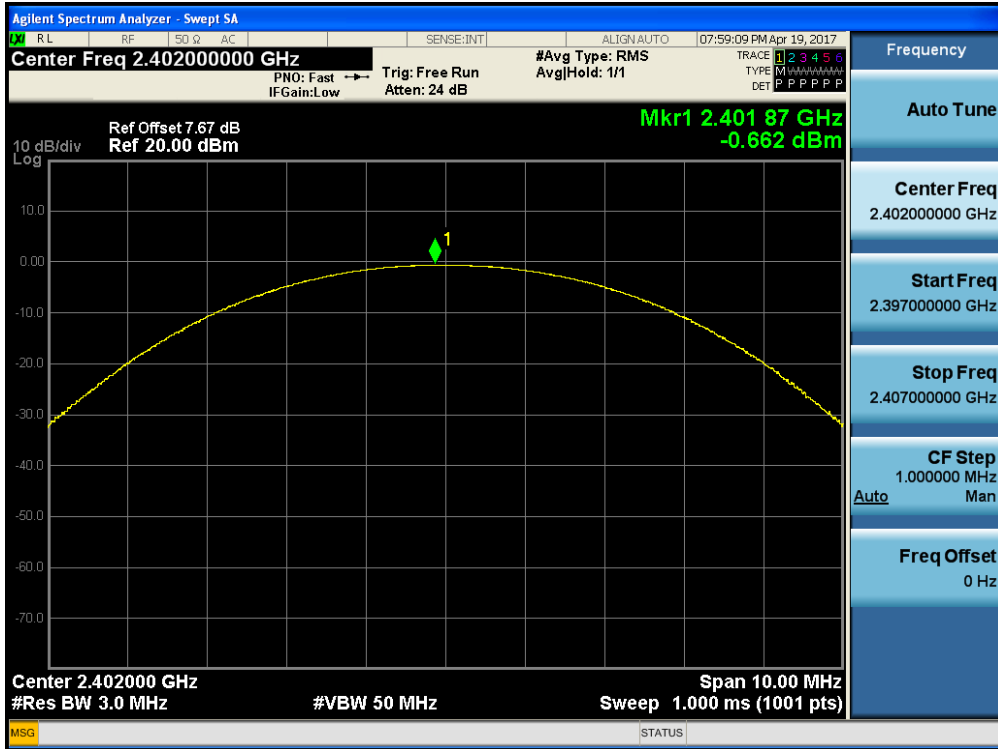

Test Plots ( $\pi/4$ DQPSK)  
Peak Power (CH.39)

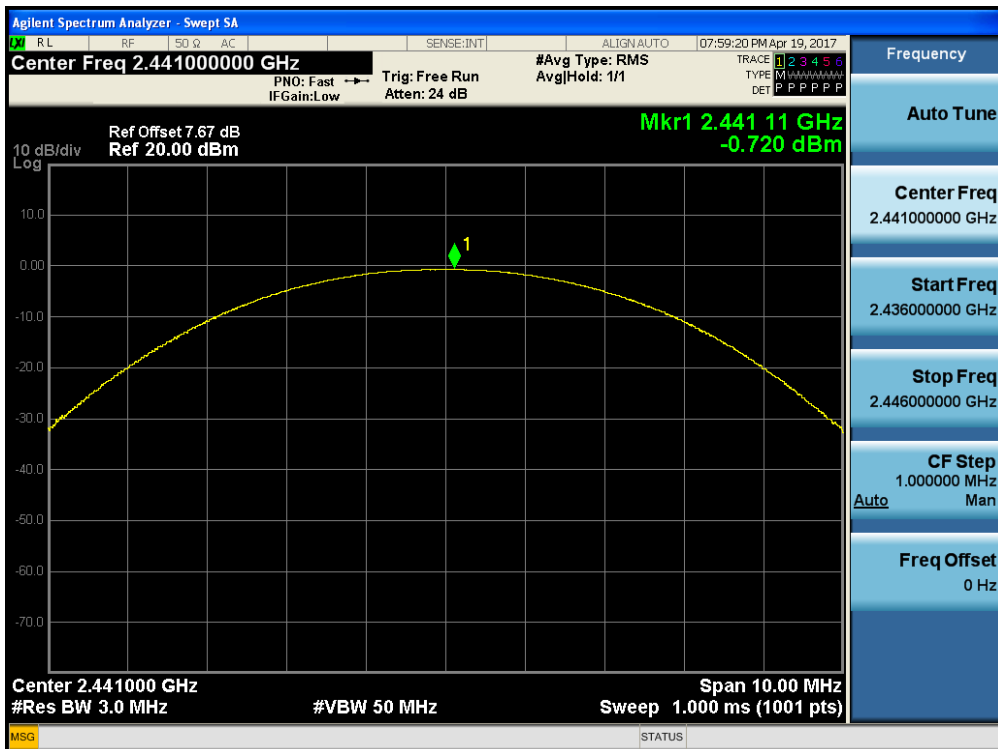

Test Plots ( $\pi/4$ DQPSK)  
Peak Power (CH.78)

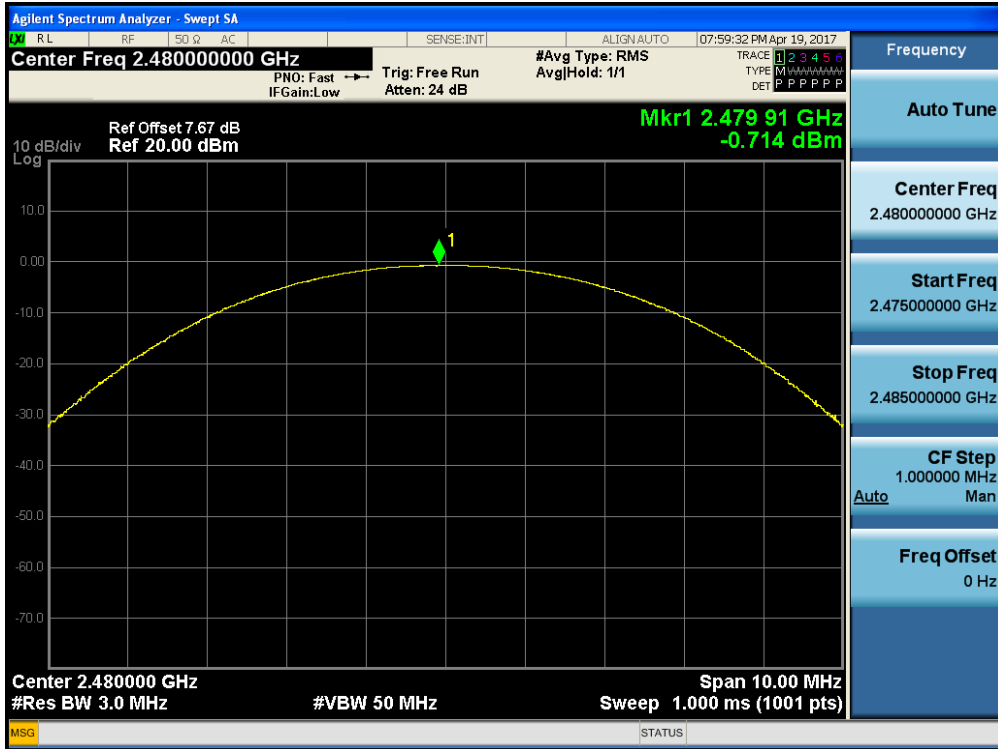




## 9.2 BAND EDGES

### LIMIT

According to §15.247(d) / RSS-247 5.5, in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Test Configuration

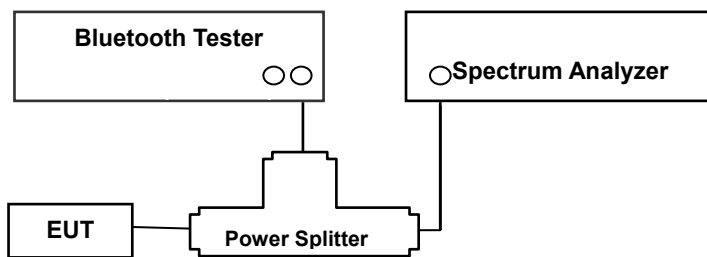

### TEST PROCEDURE

**This test is performed with hopping off and hopping on.**

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than  $[10 \log (OBW/RBW)]$  below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

**TEST RESULTS**

See attached.

Note :

1. The results in plot is already including the actual values of loss for the splitter and cable combination.
2. Spectrum offset = Power Splitter loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the splitter and cable combination is 7.36 dB at 2402 MHz and is 7.44 dB at 2480 MHz. So, 7.4 dB is offset. And the offset gap in the 2.4 GHz range do not affect the band edge measurement final result.

**Test Data**


- Without hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)	Margin			Result
	(dB)	(dB)	(dB)		GFSK (dBc)	8DPSK (dBc)	$\pi/4$ DQPSK (dBc)	
Lower	53.301	36.293	36.649	20	33.30	16.29	16.65	PASS
Upper	52.727	47.284	50.886		32.73	27.28	30.89	PASS


- With hopping

Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)	Margin			Result
	(dB)	(dB)	(dB)		GFSK (dBc)	8DPSK (dBc)	$\pi/4$ DQPSK (dBc)	
Lower	53.238	47.539	37.014	20	33.24	27.54	17.01	PASS
Upper	52.986	52.639	53.088		32.99	32.64	33.09	PASS


Test Plots without hopping (GFSK)  
Band Edges (CH.0)

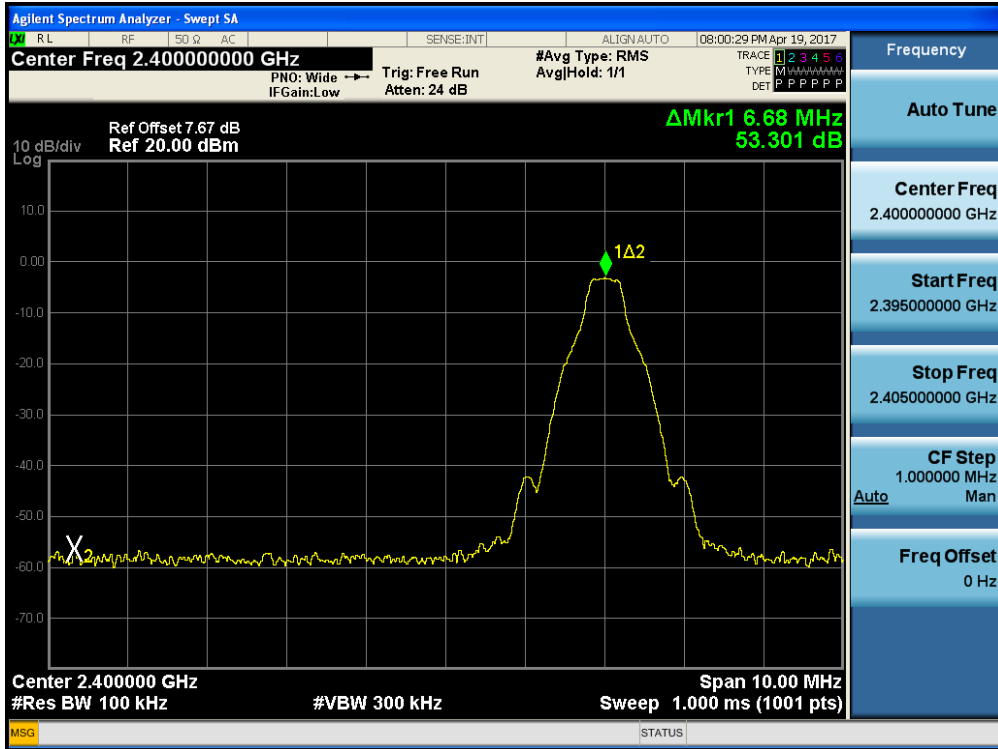


Test Plots without hopping (GFSK)  
Band Edges (CH.78)

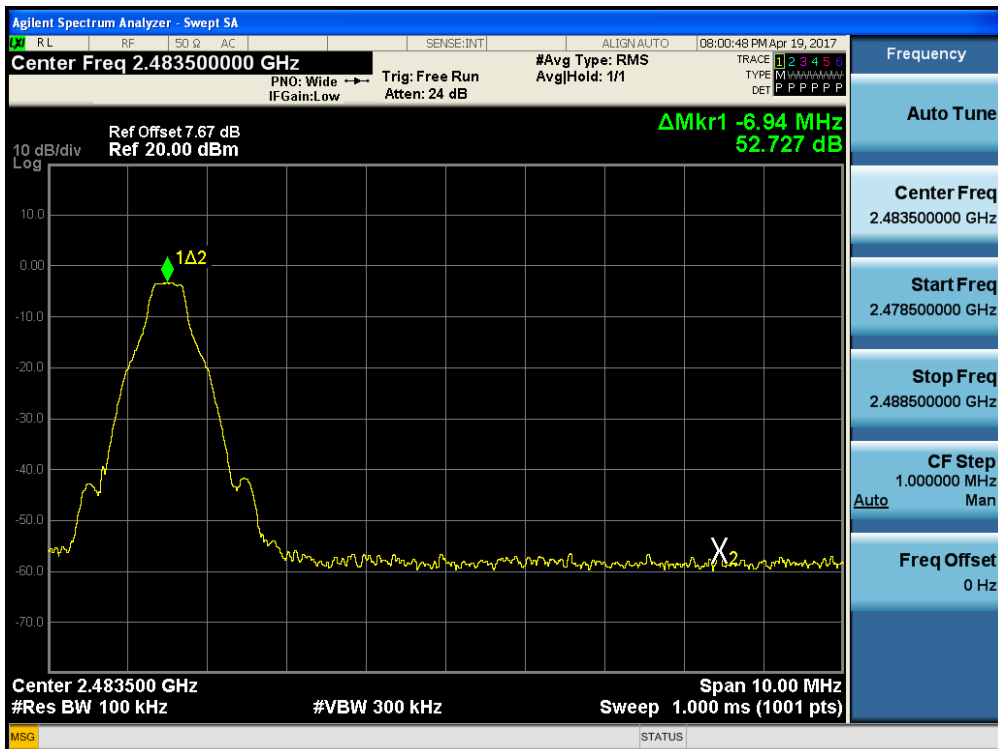


Test Plots without hopping (8DPSK)  
Band Edges (CH.0)

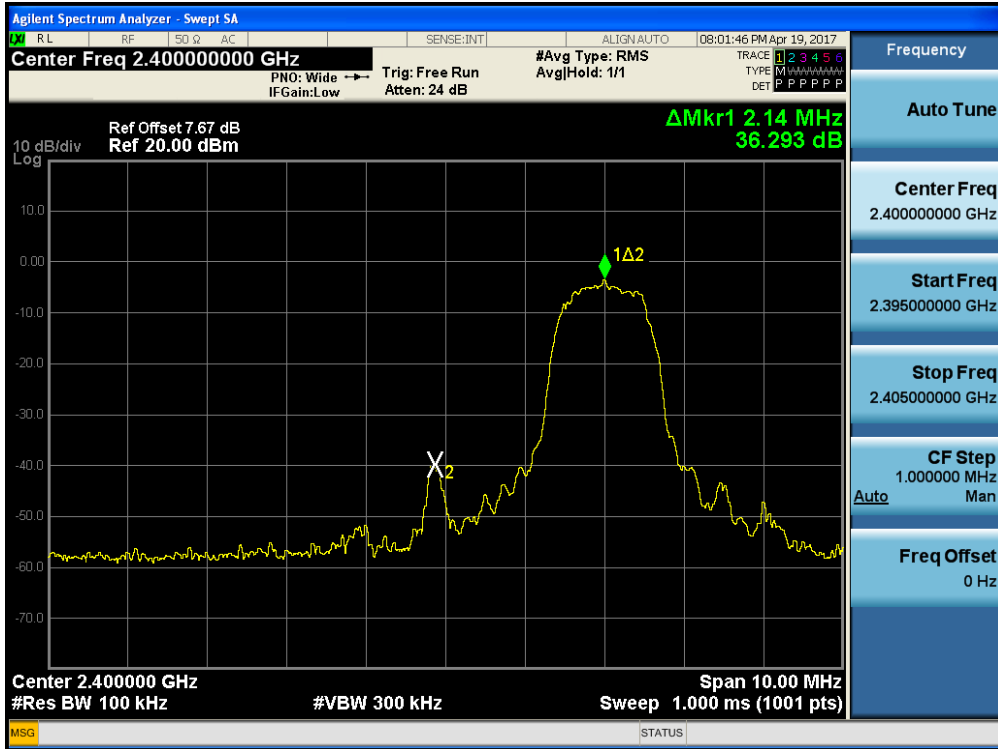

Test Plots without hopping (8DPSK)  
Band Edges (CH.78)

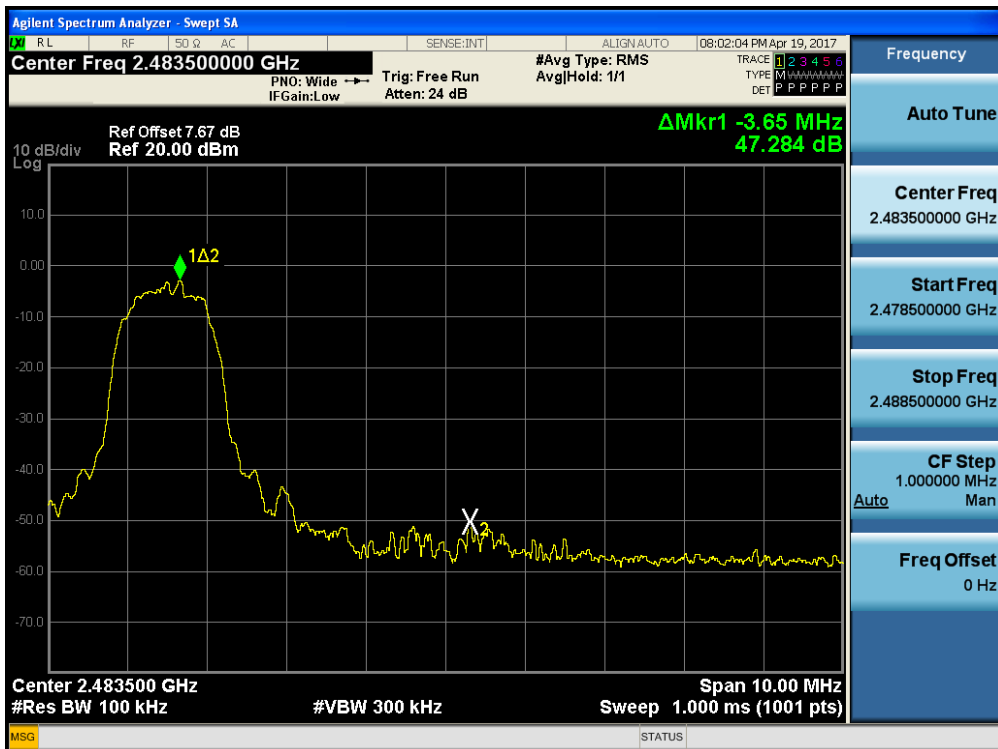


Test Plots without hopping ( $\pi/4$ DQPSK)  
Band Edges (CH.0)

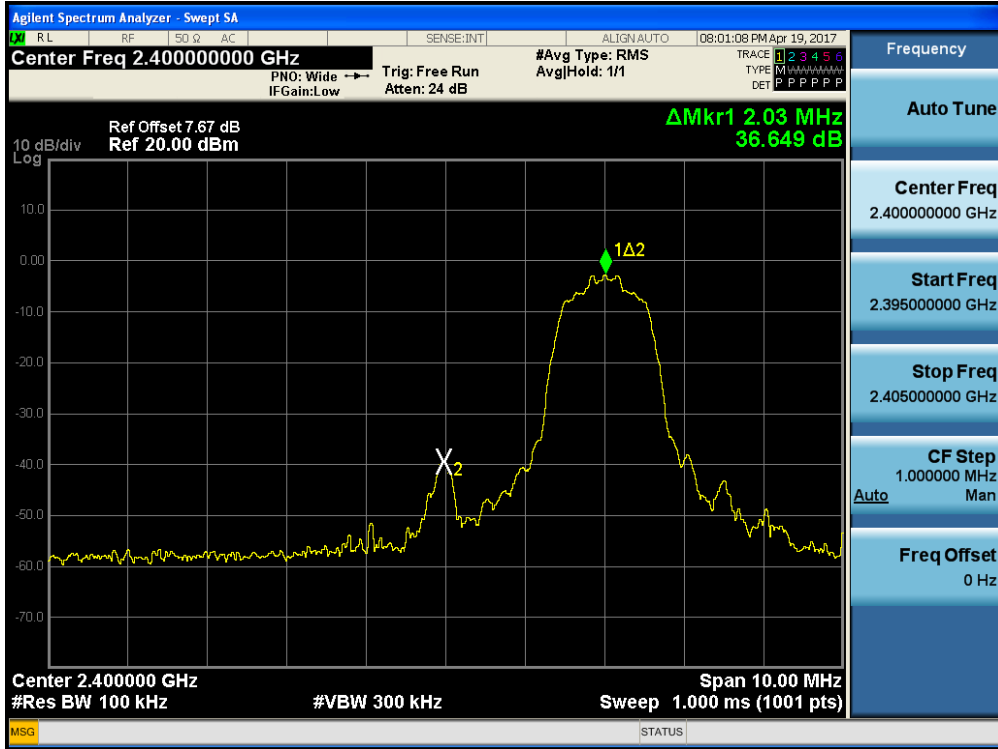


Test Plots without hopping ( $\pi/4$ DQPSK)  
Band Edges (CH.78)




Test Plots with hopping (GFSK)  
Band Edges (CH.0)

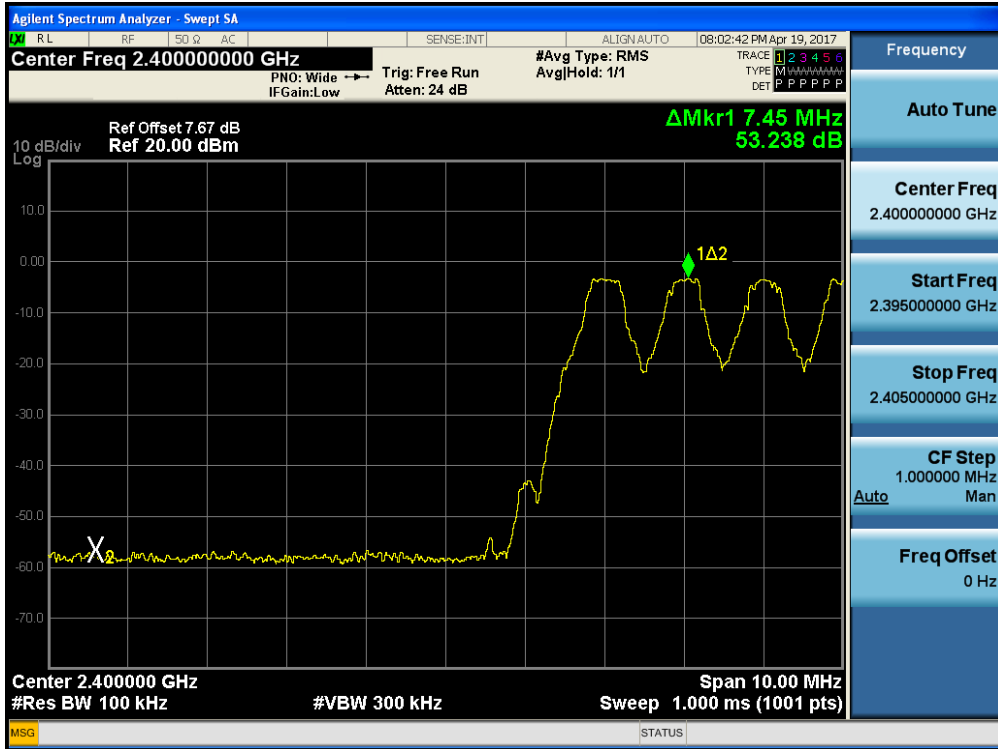

Test Plots with hopping (GFSK)  
Band Edges (CH.78)

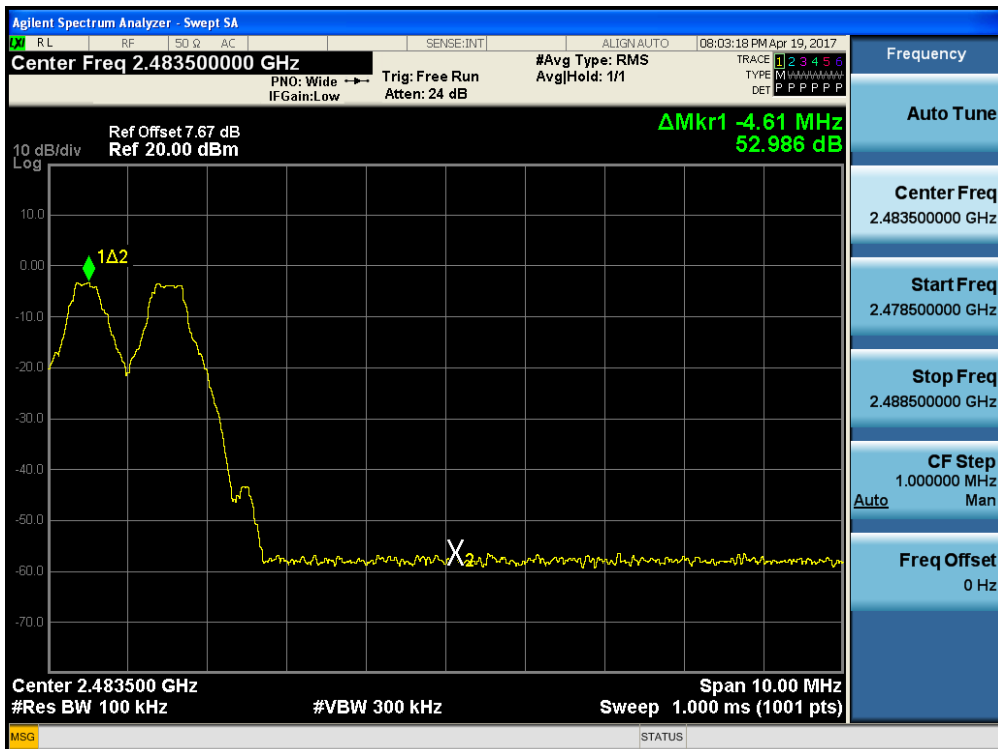


Test Plots with hopping (8DPSK)  
Band Edges (CH.0)

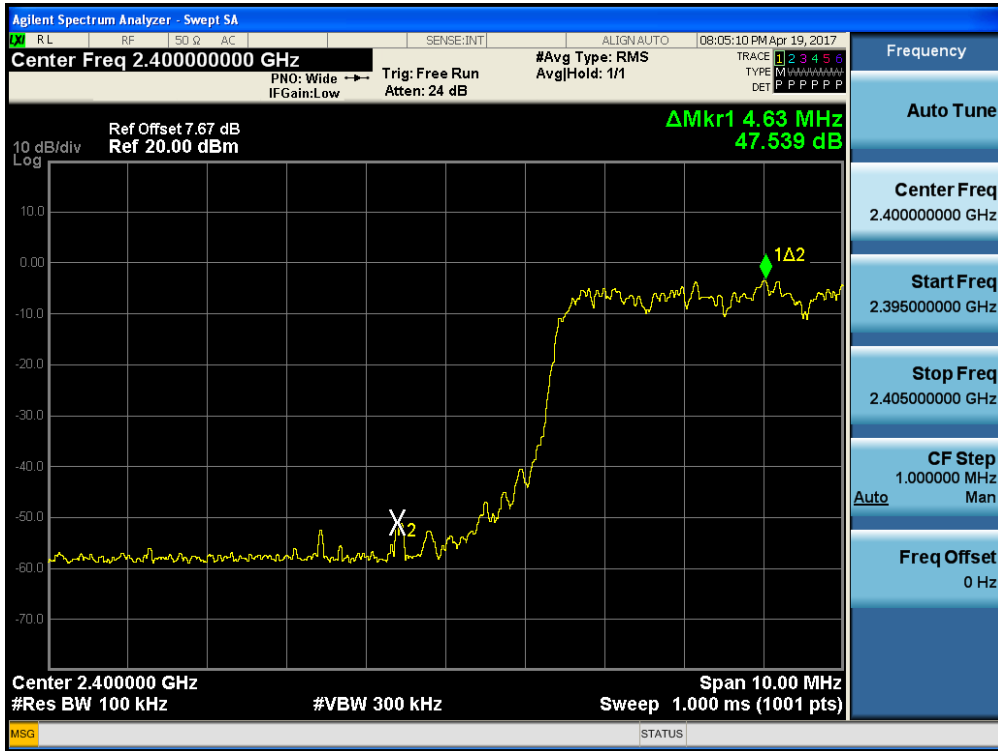


Test Plots with hopping (8DPSK)  
Band Edges (CH.78)



Test Plots with hopping ( $\pi/4$ DQPSK)  
Band Edges (CH.0)

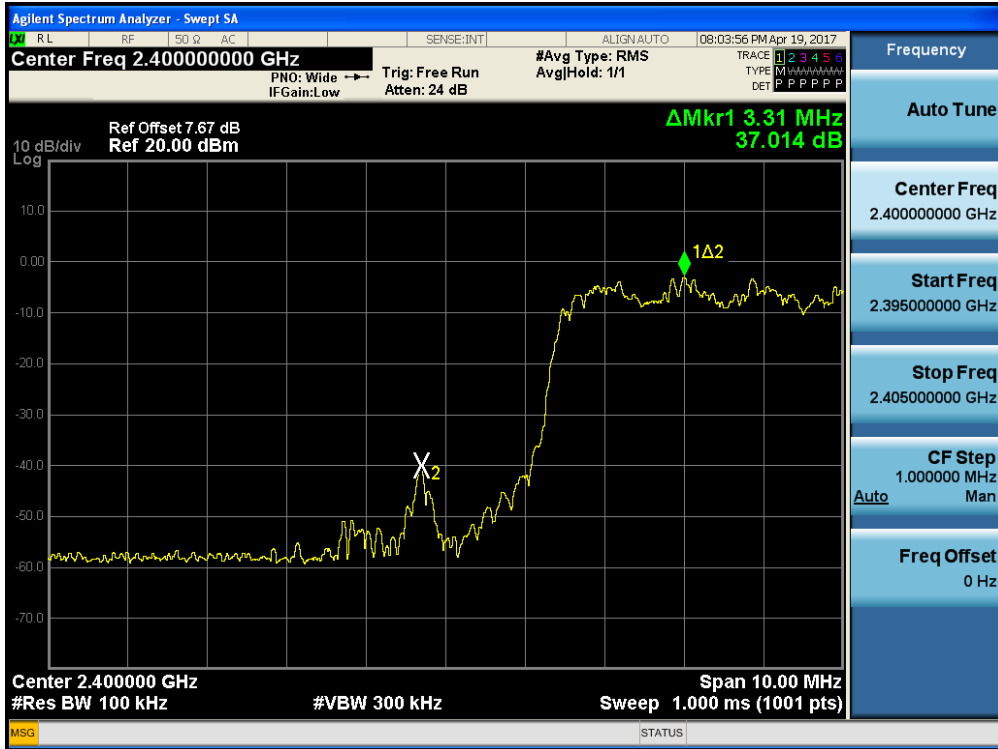

Test Plots with hopping ( $\pi/4$ DQPSK)  
Band Edges (CH.78)

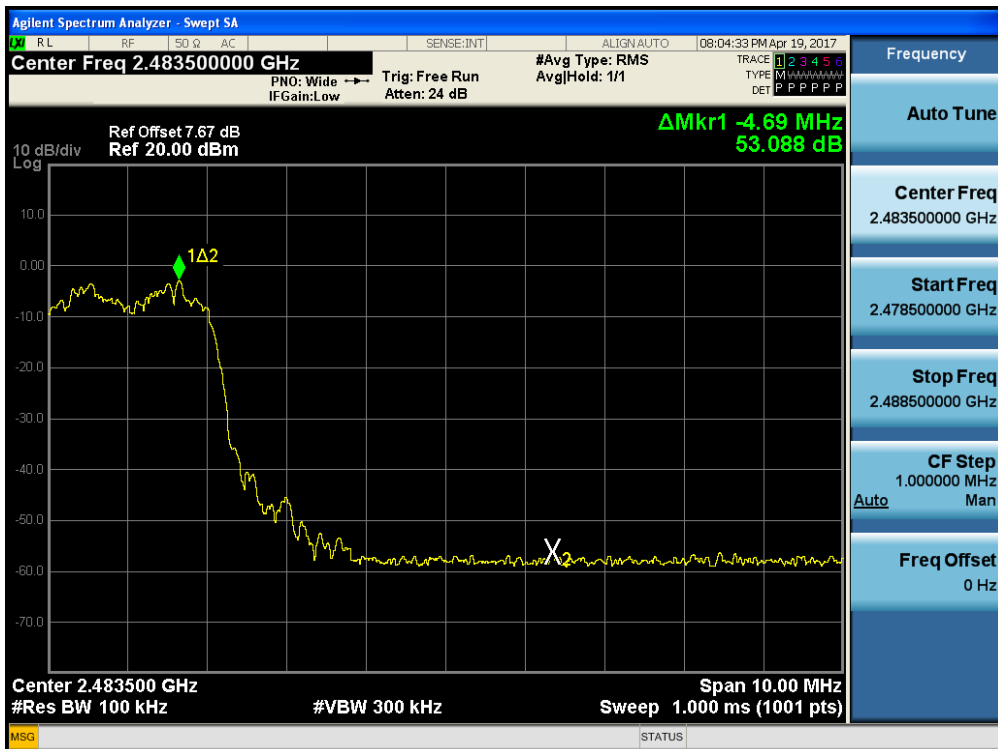




### 9.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

#### LIMIT

According to §15.247(a)(1) / RSS-247 5.1.2, Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### Test Configuration

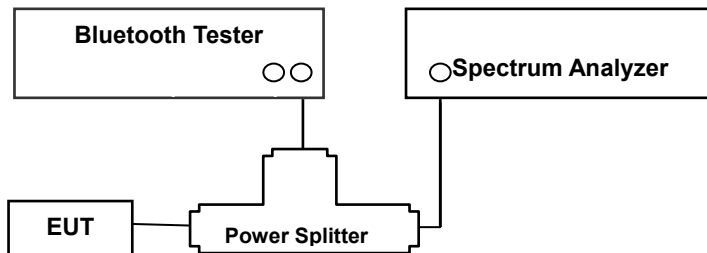

#### TEST PROCEDURE

The Channel Separation test is performed with hopping on. And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

#### TEST RESULTS

No non-compliance noted

**Test Data**

Channel Separation (kHz)			20dB Bandwidth (kHz)				Limit (kHz)	Result
GFSK	8DPSK	$\pi/4$ DQPSK	Channel	GFSK	8DPSK	$\pi/4$ DQPSK		
1001	991	1004	Low CH	955	1324	1342	>25 or >2/3 of the 20dB BW	Pass
			Middle CH	956	1323	1339		
			High CH	957	1323	1340		

**Occupied Bandwidth (99% BW )**


99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	851.49	1203.0	1196.7
CH.39	857.34	1201.8	1200.5
CH.78	853.76	1201.6	1196.0

Note : We can not know what use channel in AFH mode. So, we can not test in AFH mode. Also, if the test performs some channel in AFH mode, the test result is not different with normal mode.


Test Plots (GFSK)  
Channel Separation



Test Plots (8DPSK)  
Channel Separation

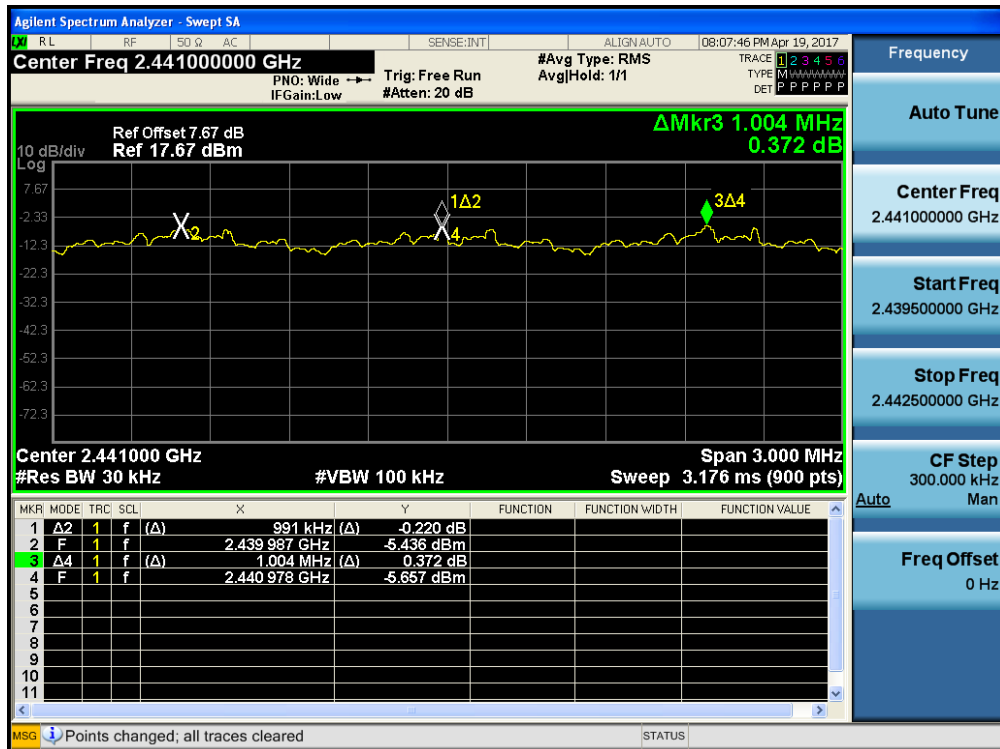


Test Plots ( $\pi/4$ DQPSK)  
Channel Separation

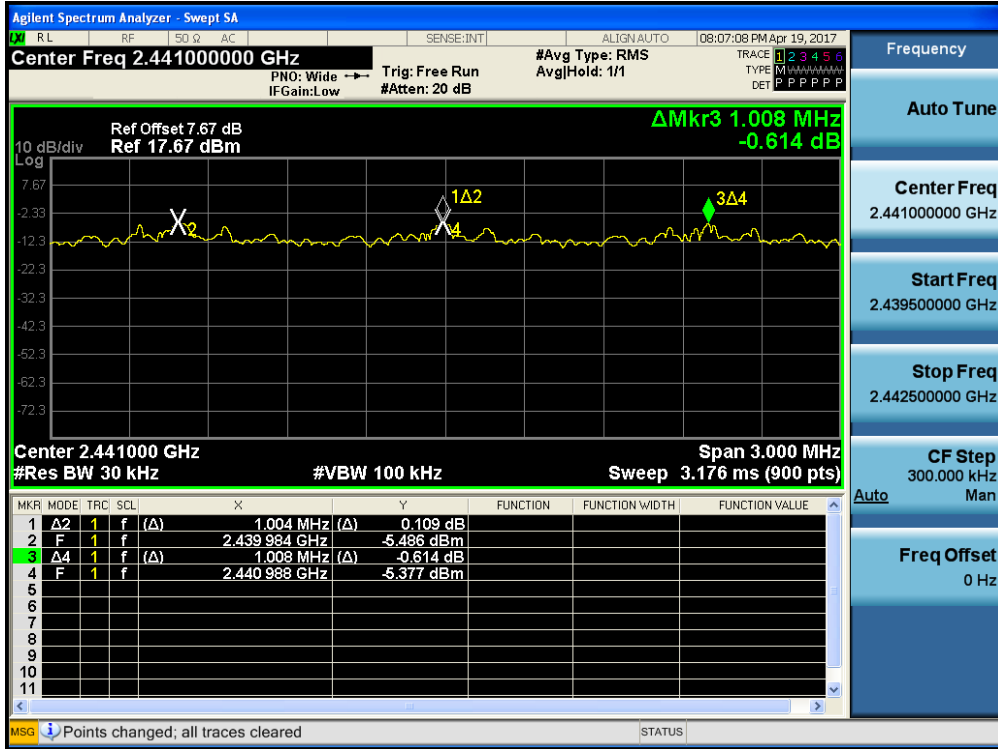


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

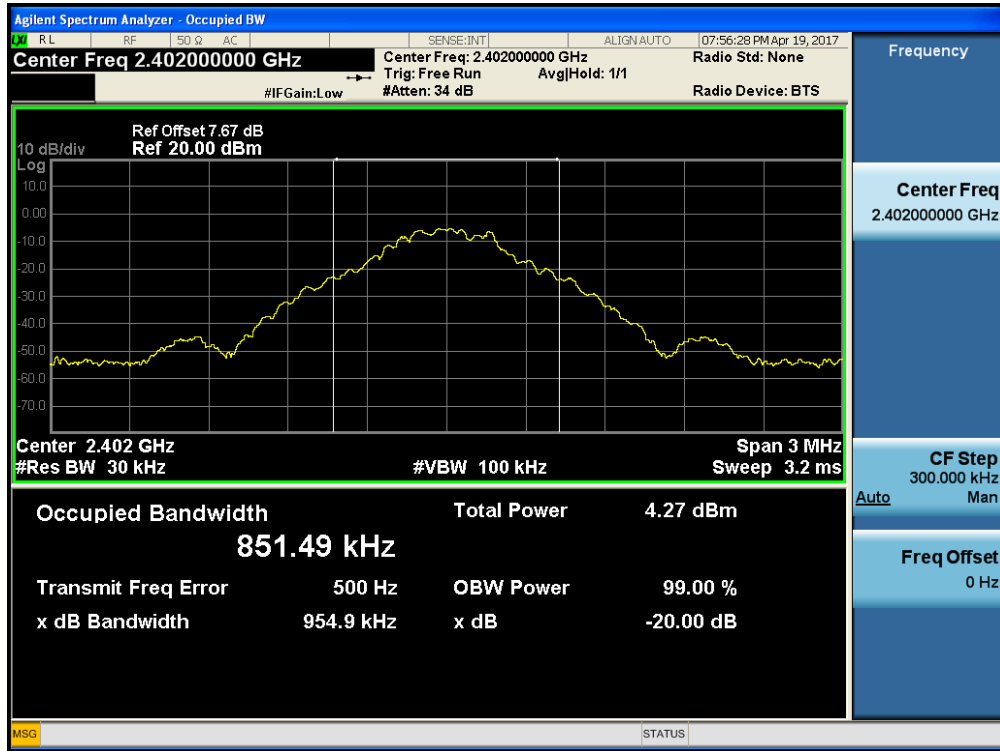


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

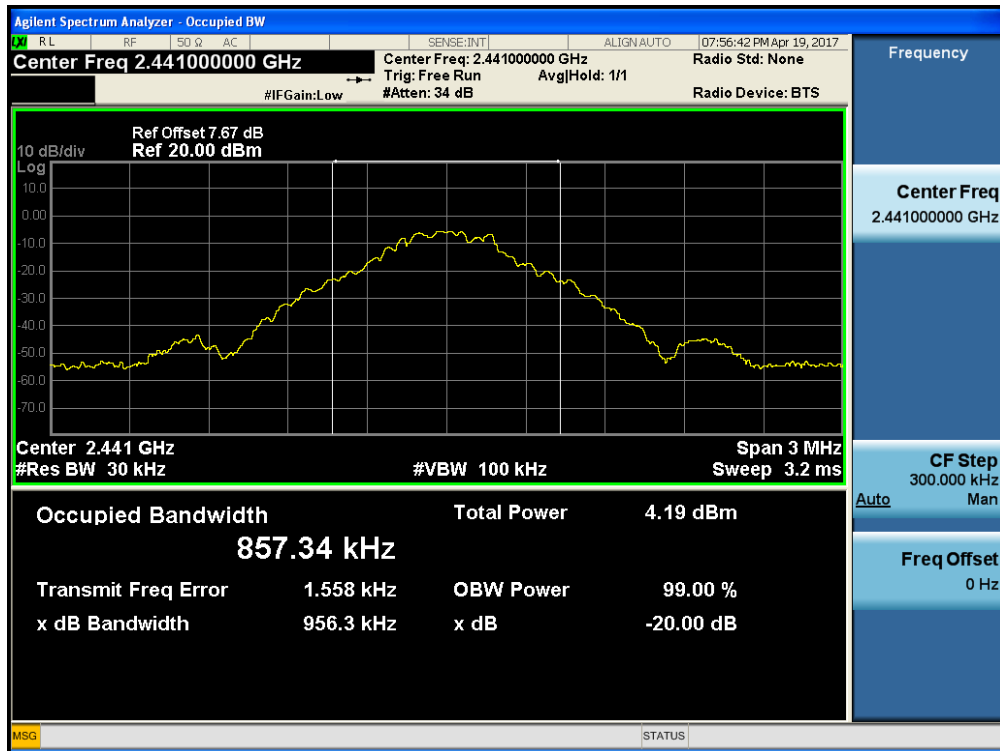


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

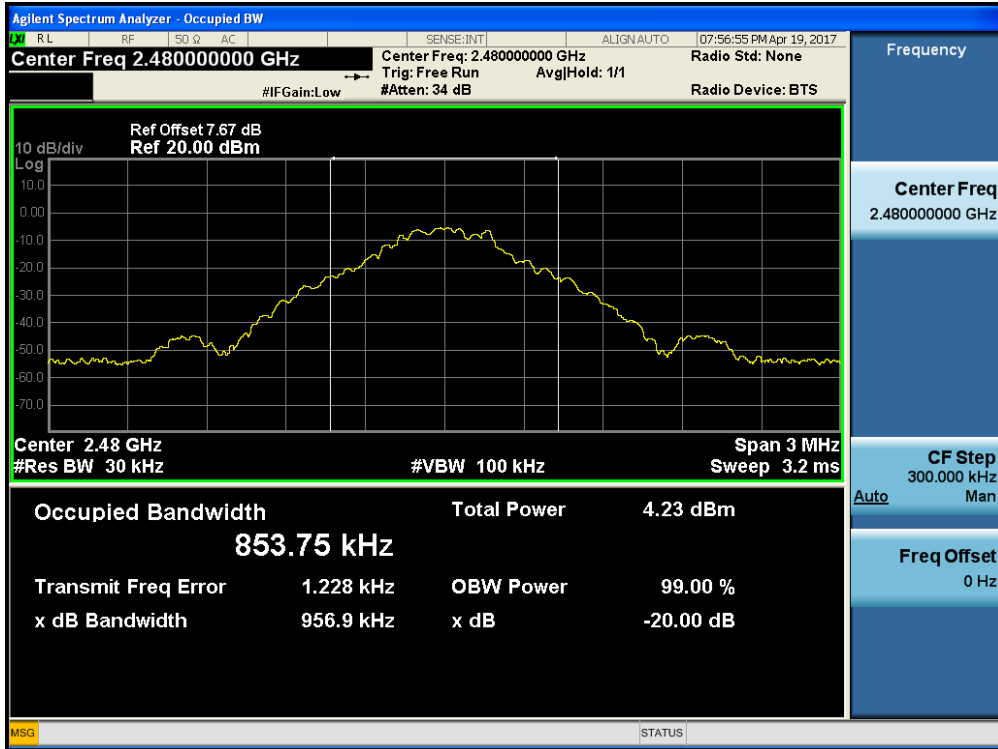


Test Plots (8DPSK)


20 dB Bandwidth & Occupied Bandwidth (CH.0)

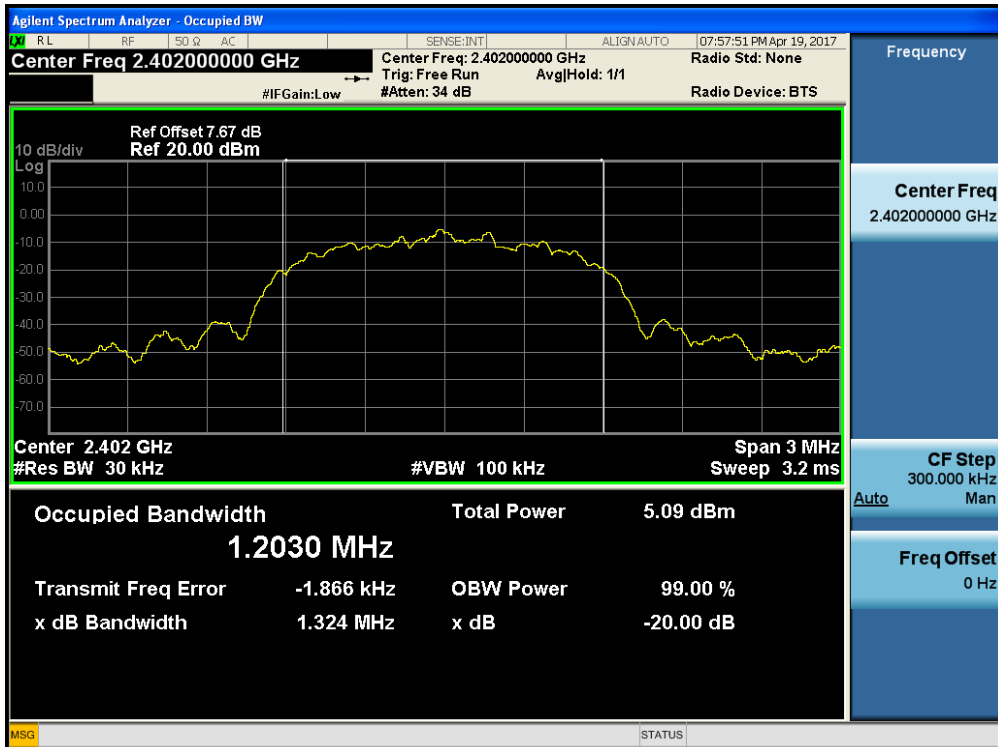


Test Plots (8DPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.39)

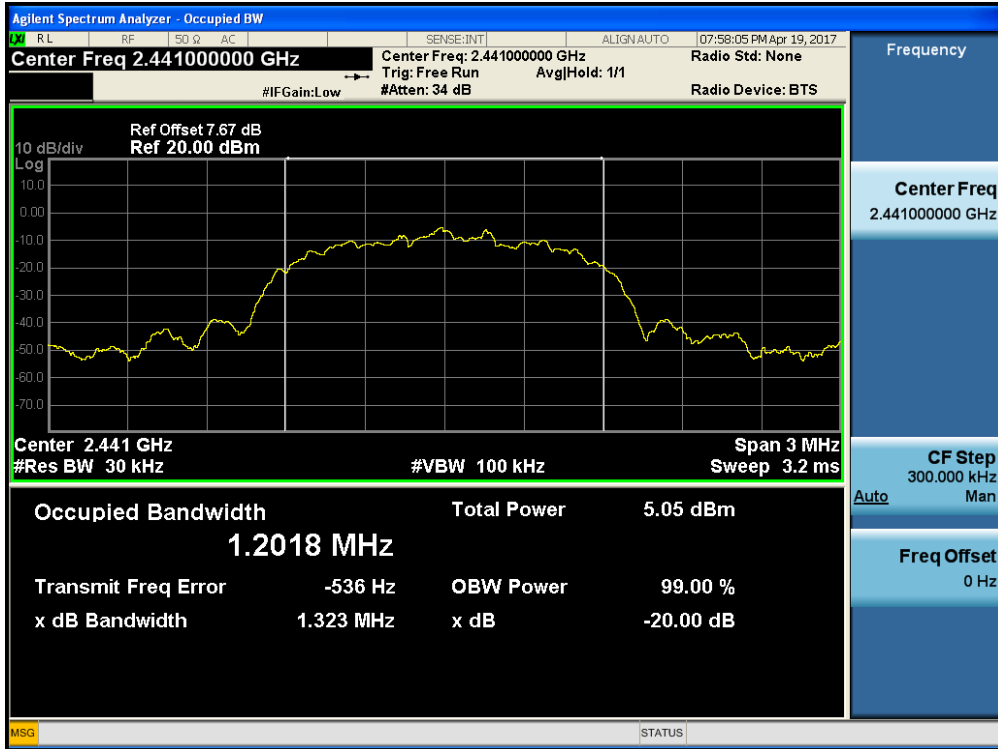


Test Plots (8DPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.78)

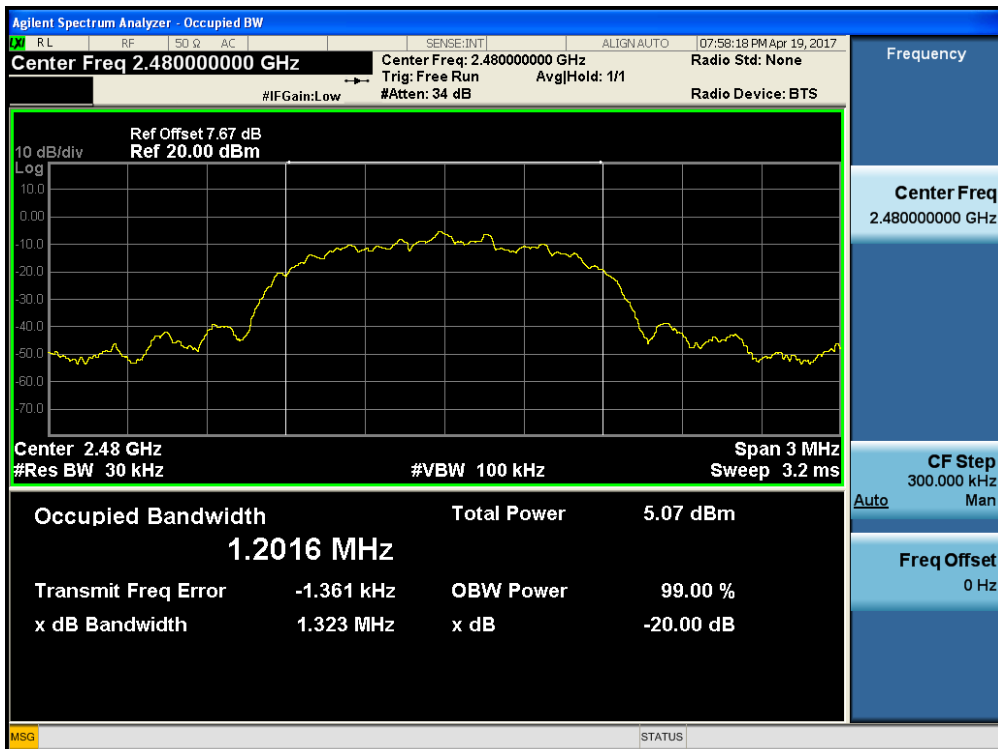

Test Plots ( $\pi/4$ DQPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.0)

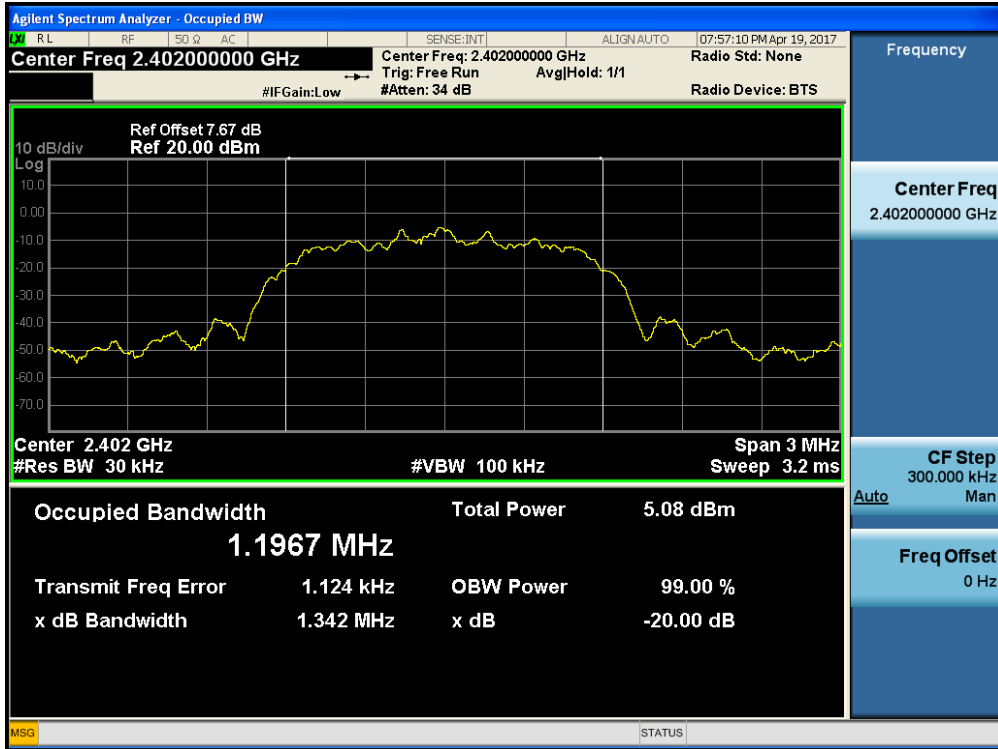


Test Plots ( $\pi/4$ DQPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.39)

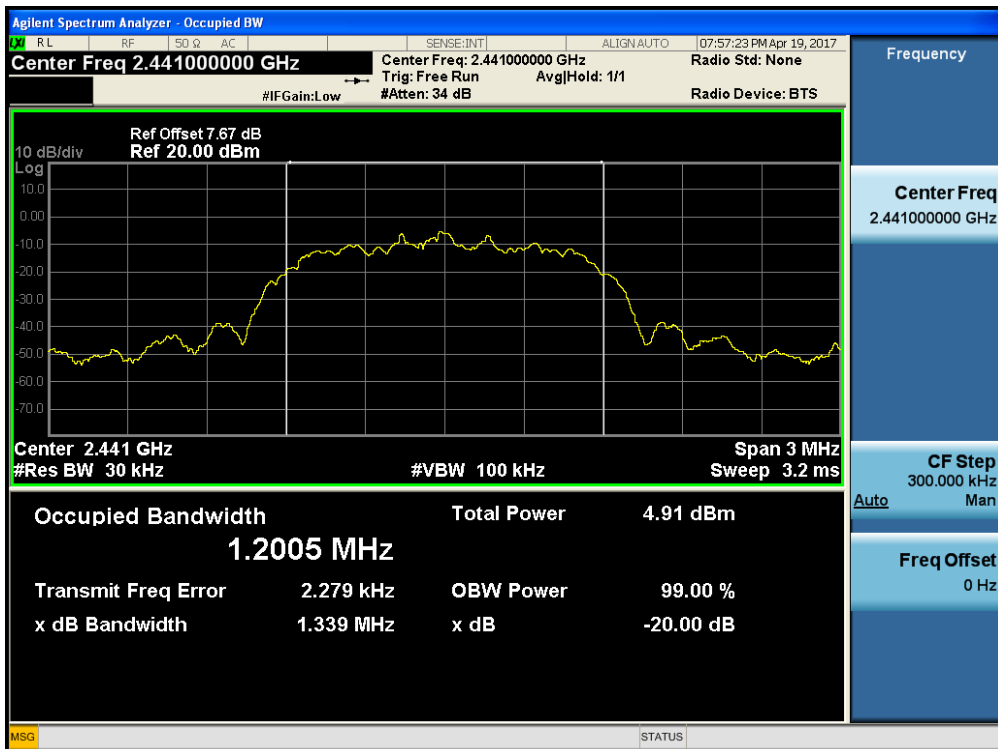



Test Plots ( $\pi/4$ DQPSK)  
20 dB Bandwidth & Occupied Bandwidth (CH.78)

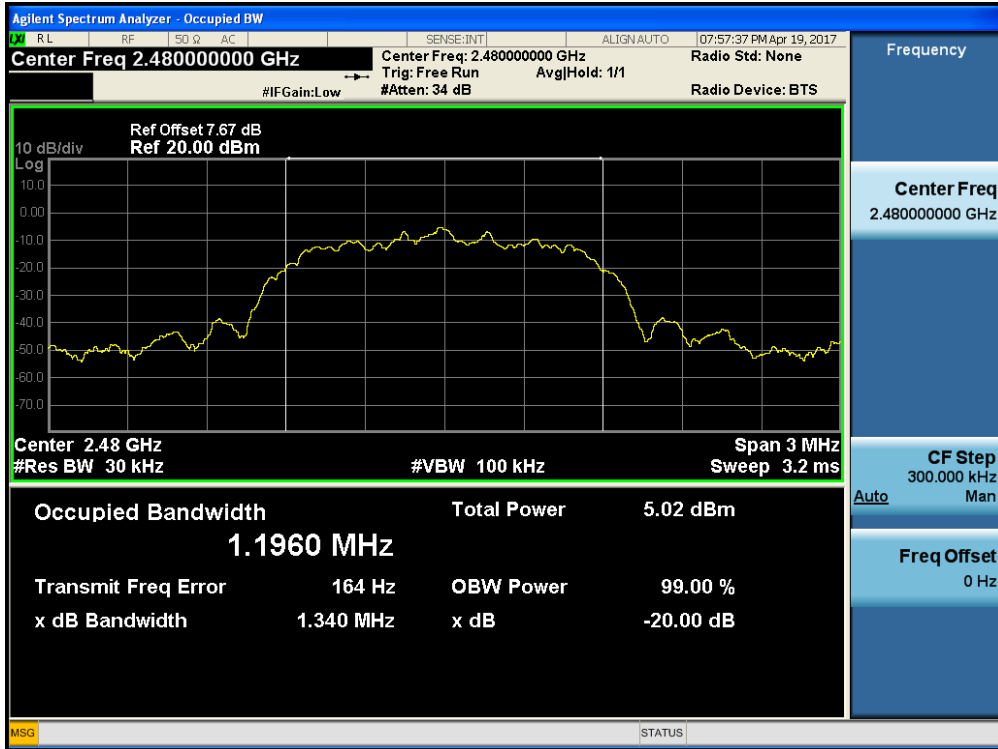


## 9.4 NUMBER OF HOPPING FREQUENCY

### LIMIT

According to §15.247(a)(1)(iii) / RSS-247 5.1.4, Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

### Test Configuration

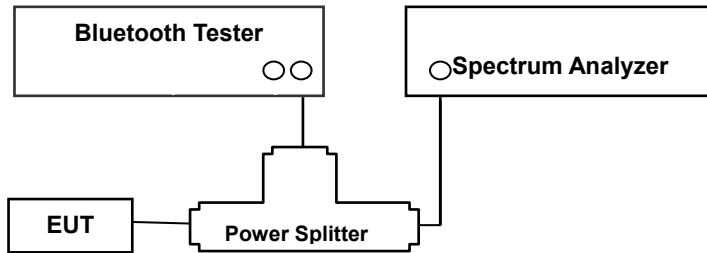

### TEST PROCEDURE

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013)

- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW  $\geq$  RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

### TEST RESULTS

No non-compliance noted


#### Test Data

Result (No. of CH)			Limit	Result
GFSK	8DPSK	$\pi/4$ DQPSK		
79	79	79	>15	Pass

**Note :** In case of AFH mode, minimum number of hopping channels is 20.


Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

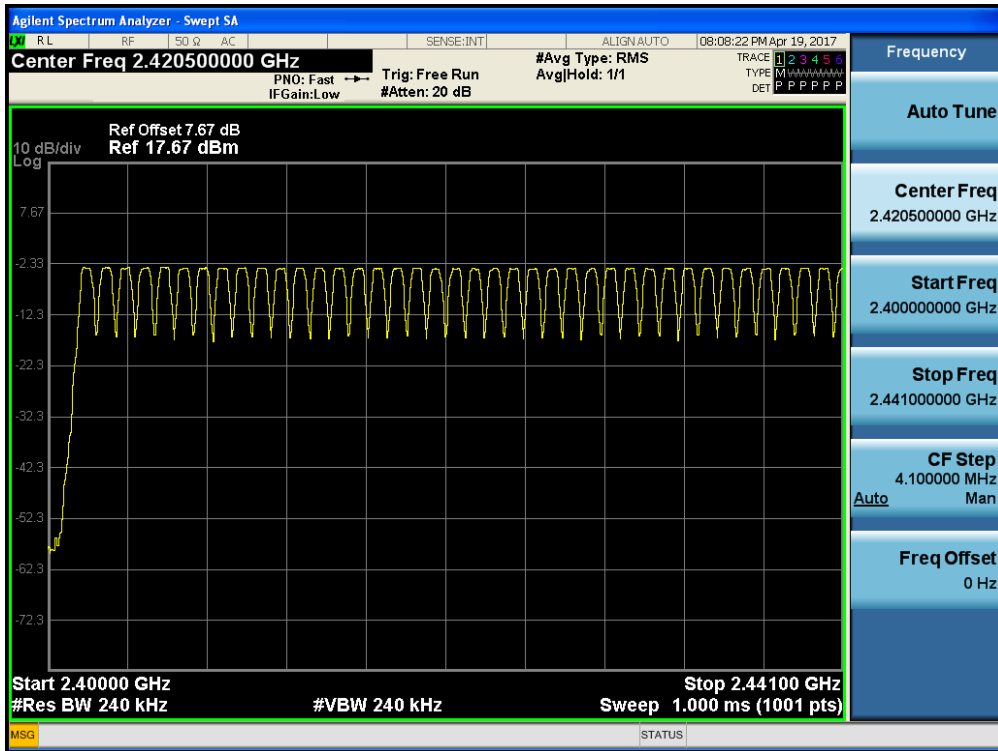


Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

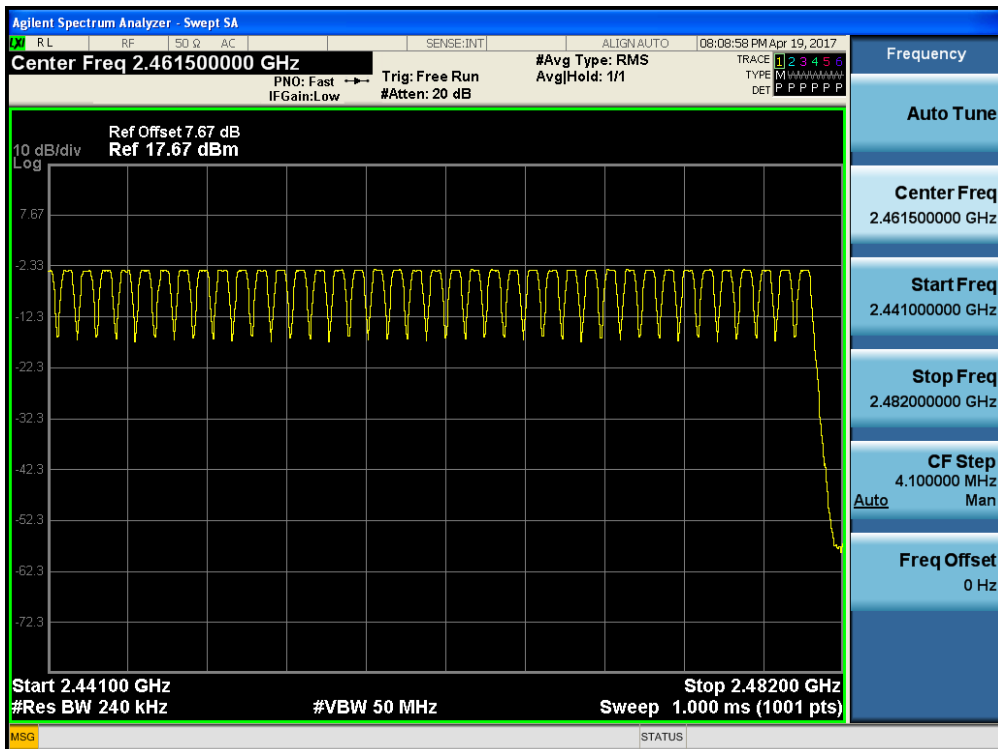


Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

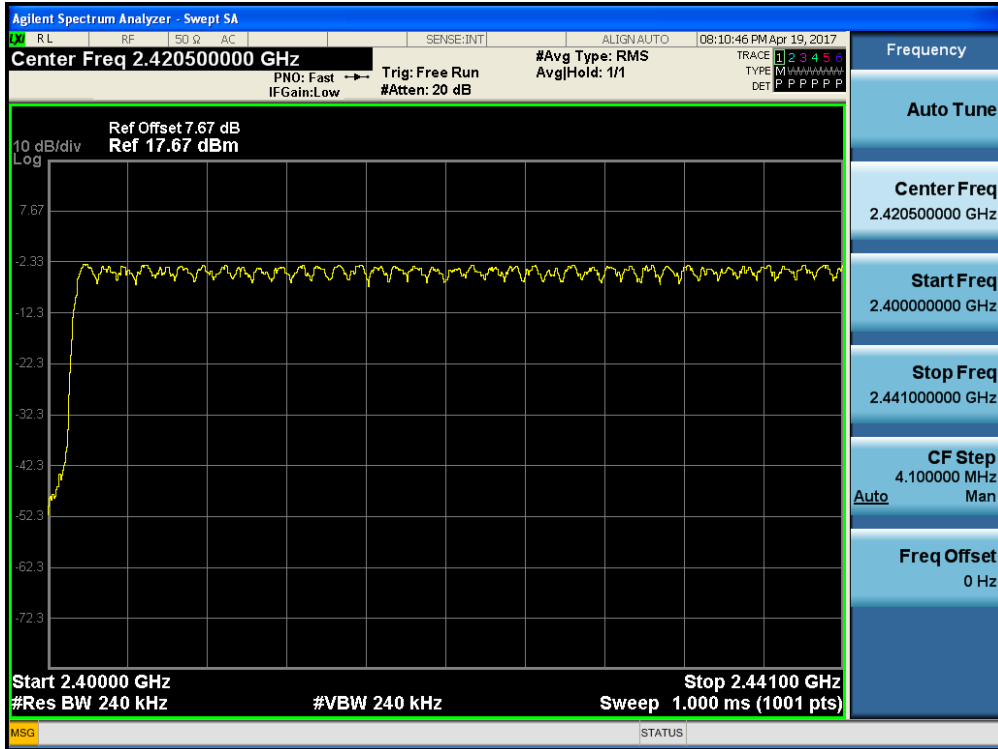


Test Plots (8DPSK)


Number of Channels (2.441 GHz - 2.4835 GHz)

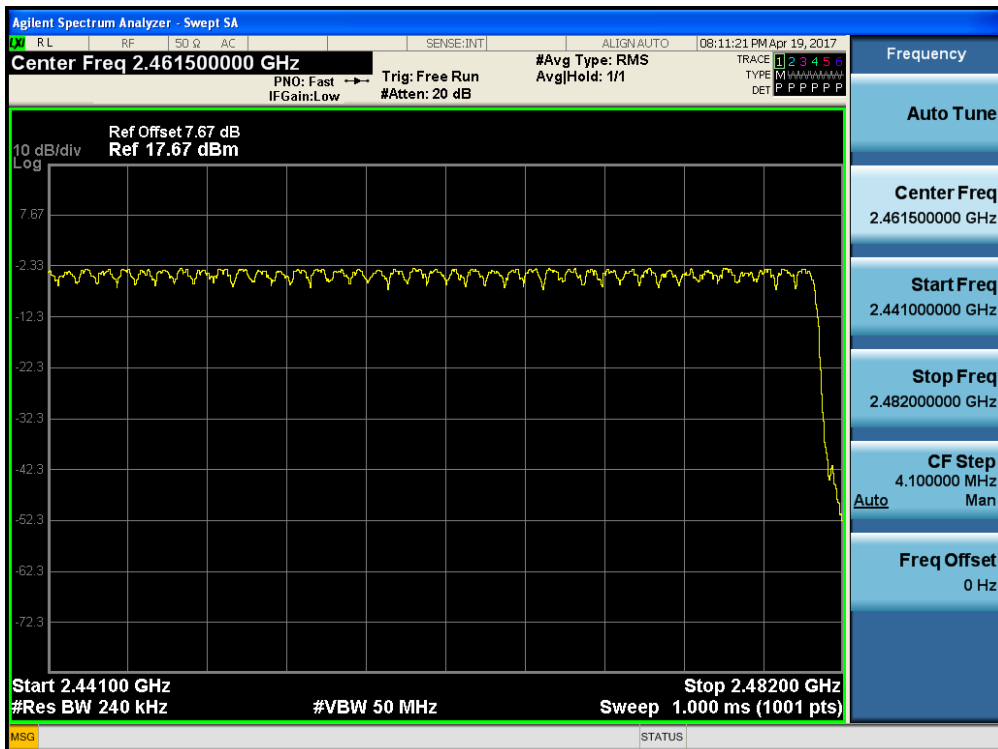

Test Plots ( $\pi/4$ DQPSK)  
Number of Channels (2.4 GHz - 2.441 GHz)

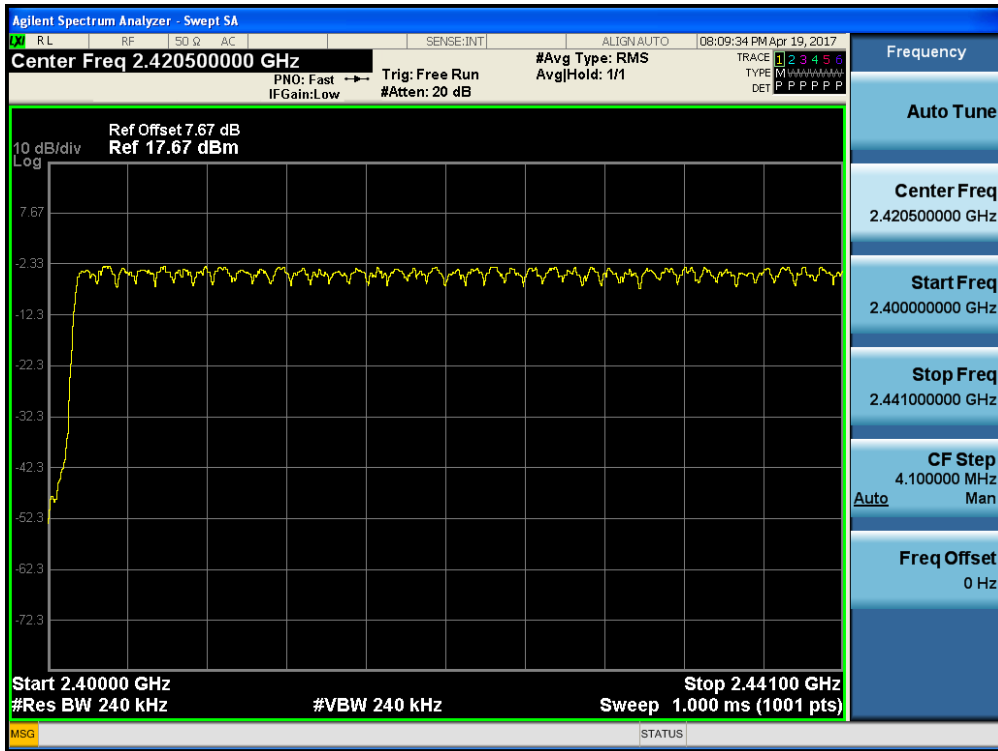

Test Plots ( $\pi/4$ DQPSK)  
Number of Channels (2.441 GHz - 2.4835 GHz)

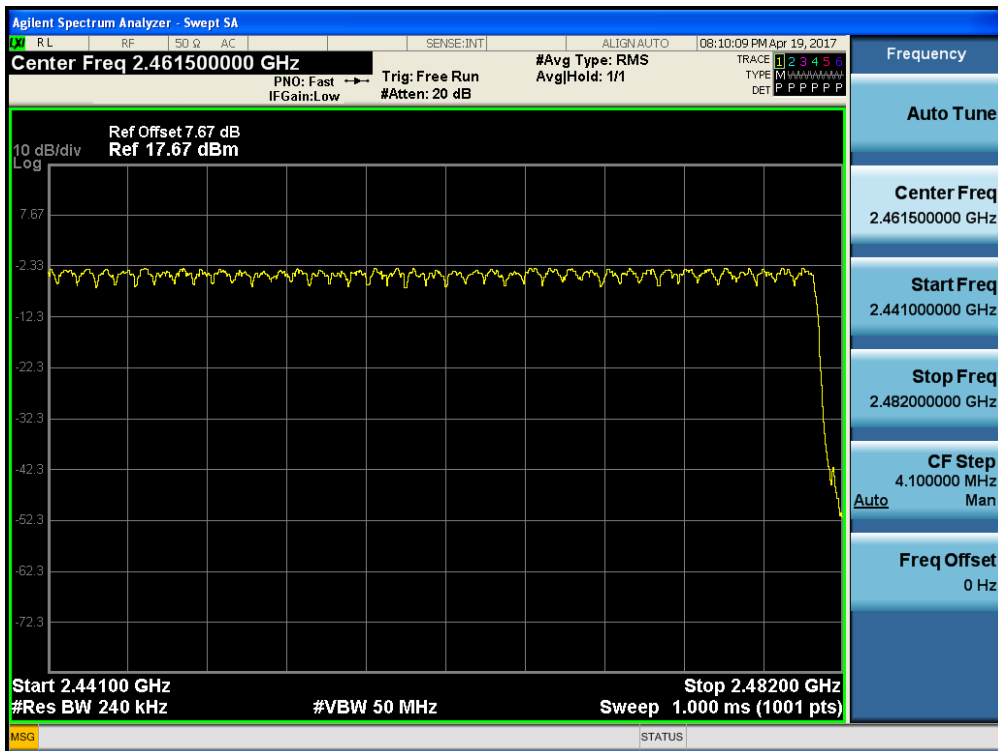


## 9.5 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT

According to §15.247(a)(1)(iii) / RSS-247 5.1.4, Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### Test Configuration

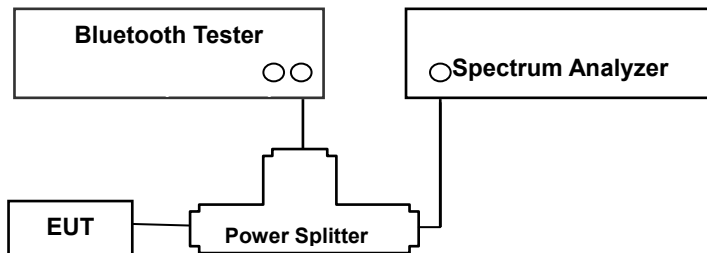

### TEST PROCEDURE

This test is performed with hopping off.

EUT was set to transmit the longest packet type (DH5)

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be  $\leq$  channel spacing and where possible RBW should be set  $\gg 1 / T$ , where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

### Normal Mode / EDR Mode

**DH 5**(The longest packet type for GFSK)

CH Mid :  $2.890 * (1600/6)/79 * 31.6 = 308.27$  (ms)

**2-DH 5**(The longest packet type for  $\pi/4$ DQPSK)

CH Mid :  $2.890 * (1600/6)/79 * 31.6 = 308.27$  (ms)

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid :  $2.890 * (1600/6)/79 * 31.6 = 308.27$  (ms)

### AFH Mode

**DH 5**(The longest packet type for GFSK)

CH Mid :  $2.890 * (800/6)/20 * 8.0 = 154.13$  (ms)

**2-DH 5**(The longest packet type for  $\pi/4$ DQPSK)

CH Mid :  $2.890 * (800/6)/20 * 8.0 = 154.13$  (ms)

**3-DH 5**(The longest packet type for 8DPSK)

CH Mid :  $2.890 * (800/6)/20 * 8.0 = 154.13$  (ms)

Note :

A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance.

Each tx-time per appearance of DH5 is 2.892 ms.

Dwell time = Tx-time \* 106.7


## TEST RESULTS

See the table.


	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.890	2.895	2.895
	Mid	2.895	2.900	2.890
	High	2.890	2.895	2.895

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)	Result
Total of Dwell (ms)	Low	308.27	308.80	308.80	32	400	PASS
	Mid	308.80	309.33	308.27	32		PASS
	High	308.27	308.80	308.80	32		PASS

Test Plots (GFSK)  
Dwell Time (CH.0)

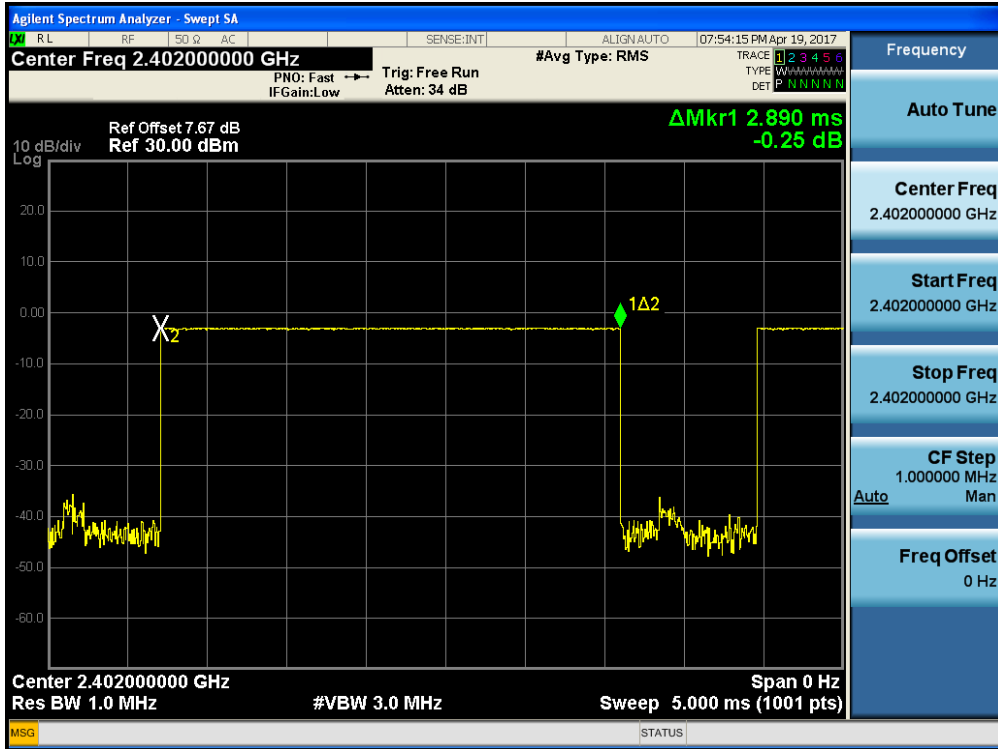


Test Plots (GFSK)  
Dwell Time (CH.39)

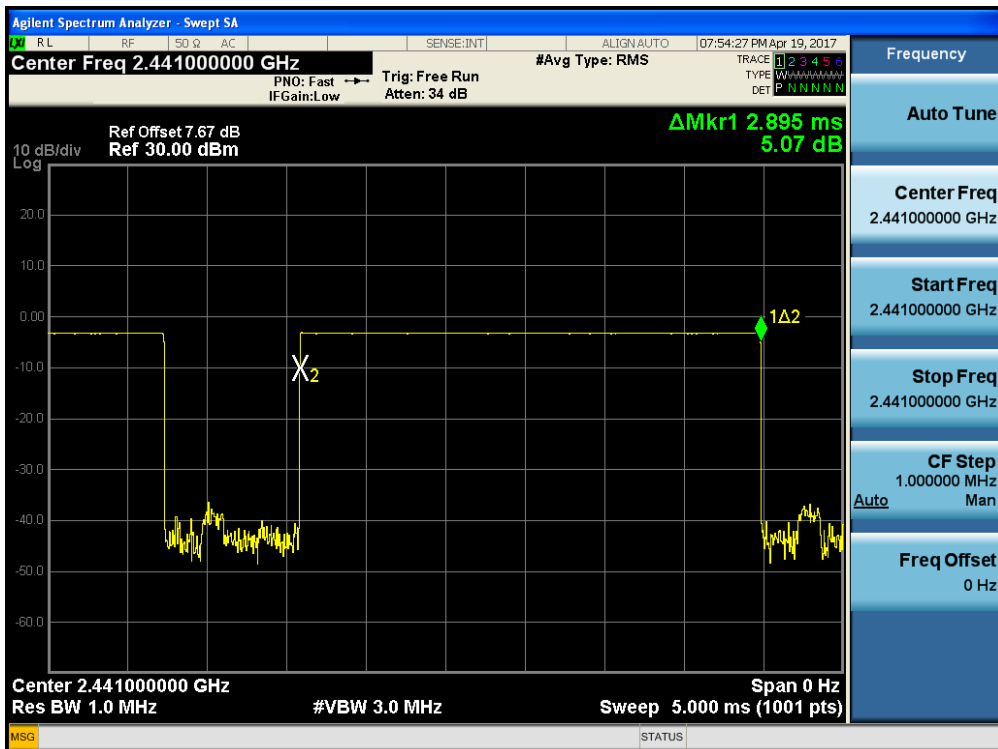





Test Plots (GFSK)  
Dwell Time (CH.78)

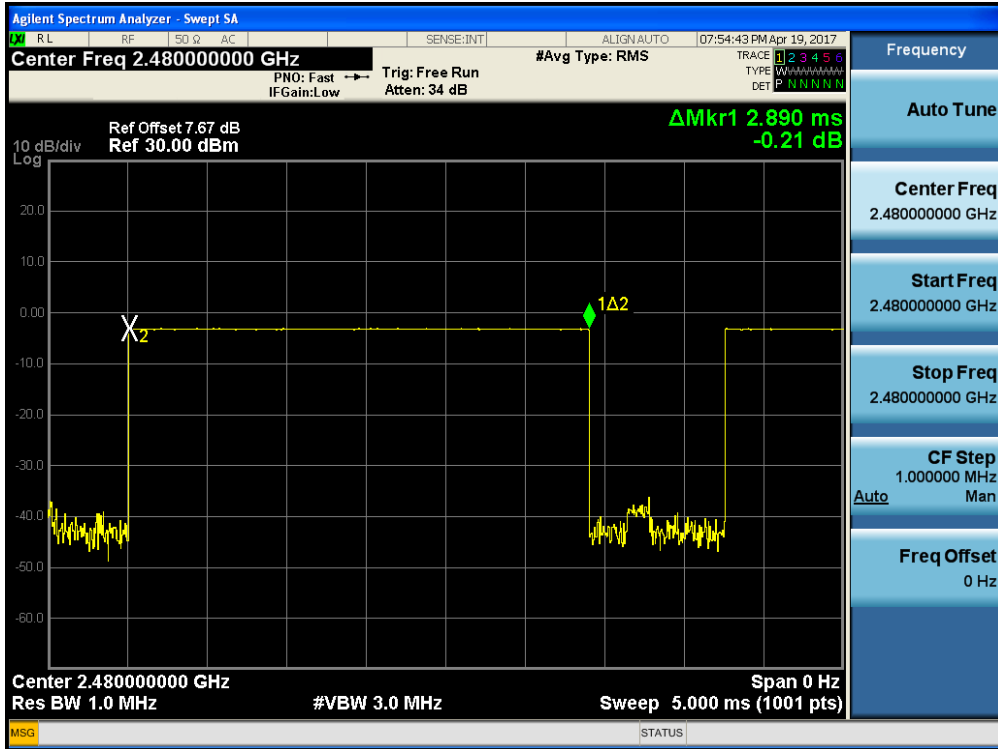


Test Plots (8DPSK)  
Dwell Time (CH.0)

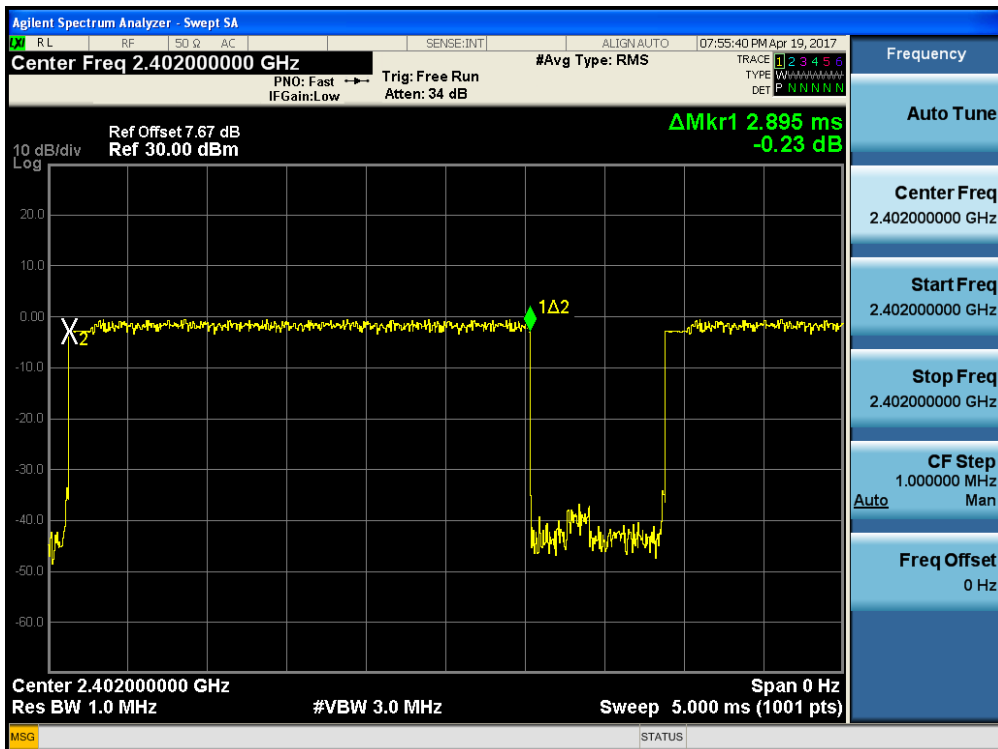


Test Plots (8DPSK)  
Dwell Time (CH.39)

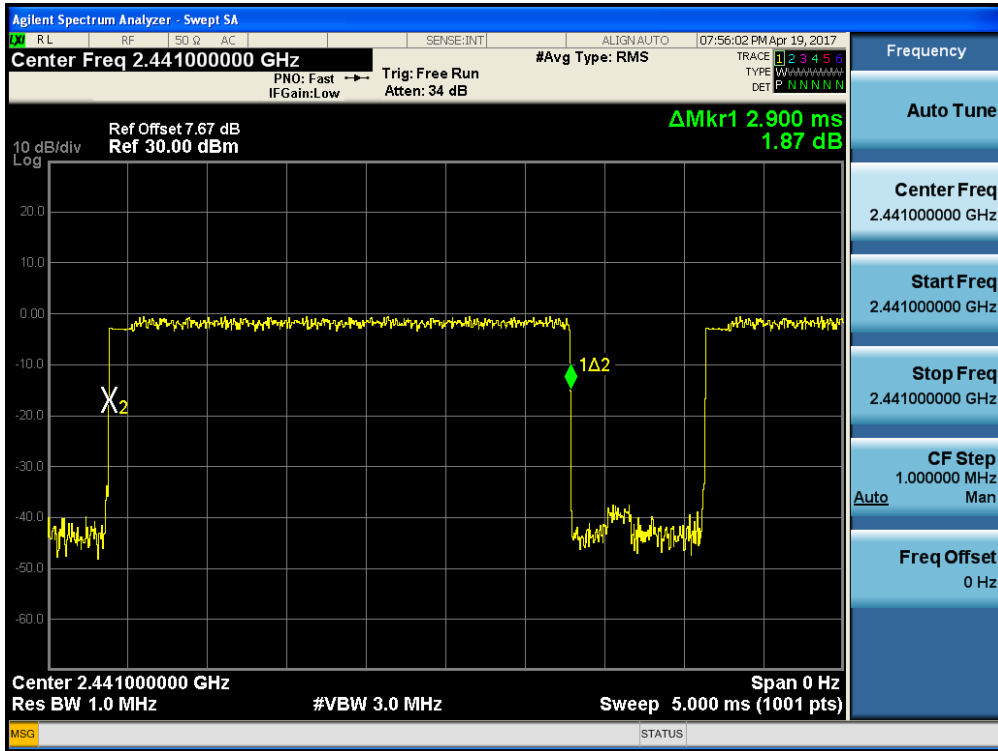


Test Plots (8DPSK)  
Dwell Time (CH.78)

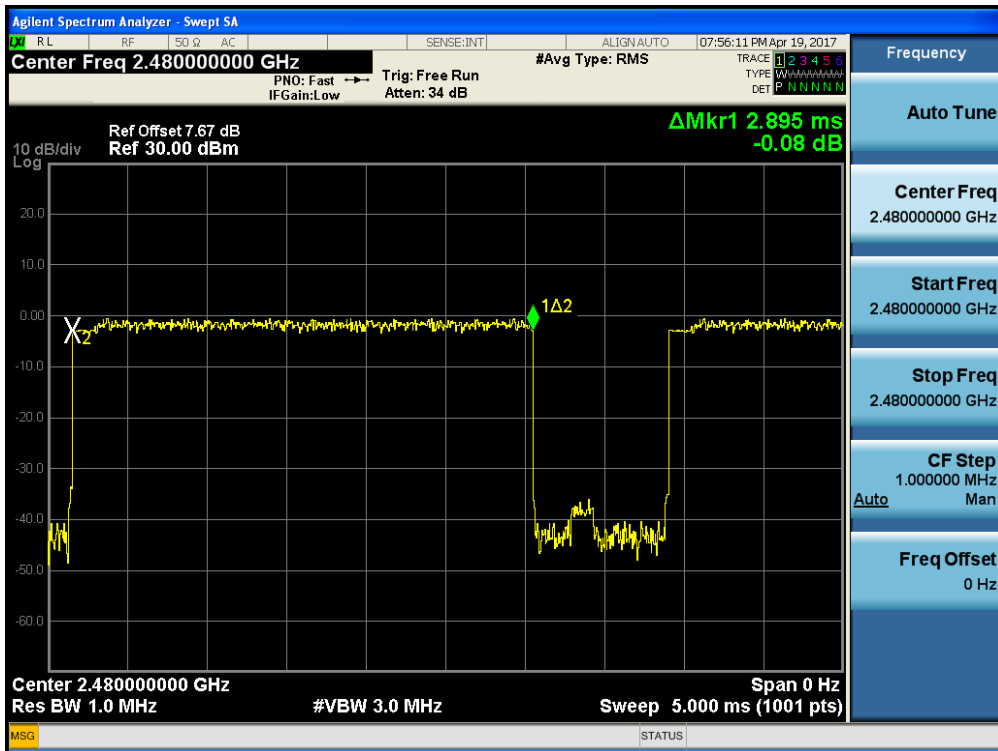


Test Plots ( $\pi/4$ DQPSK)  
Dwell Time (CH.0)

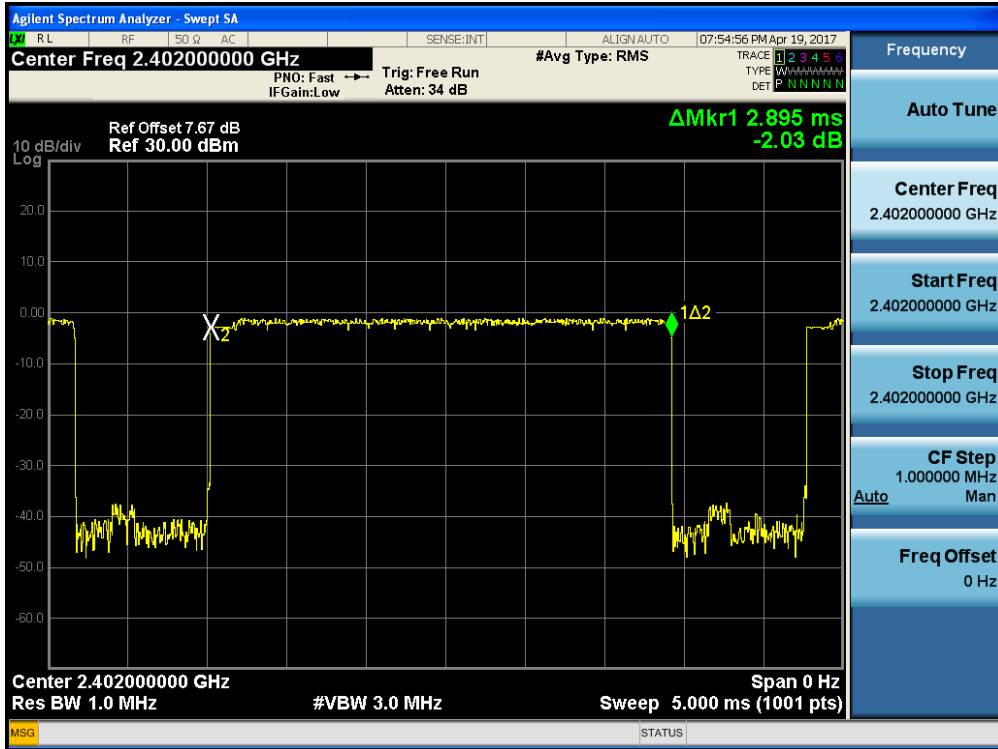

Test Plots ( $\pi/4$ DQPSK)  
Dwell Time (CH.39)

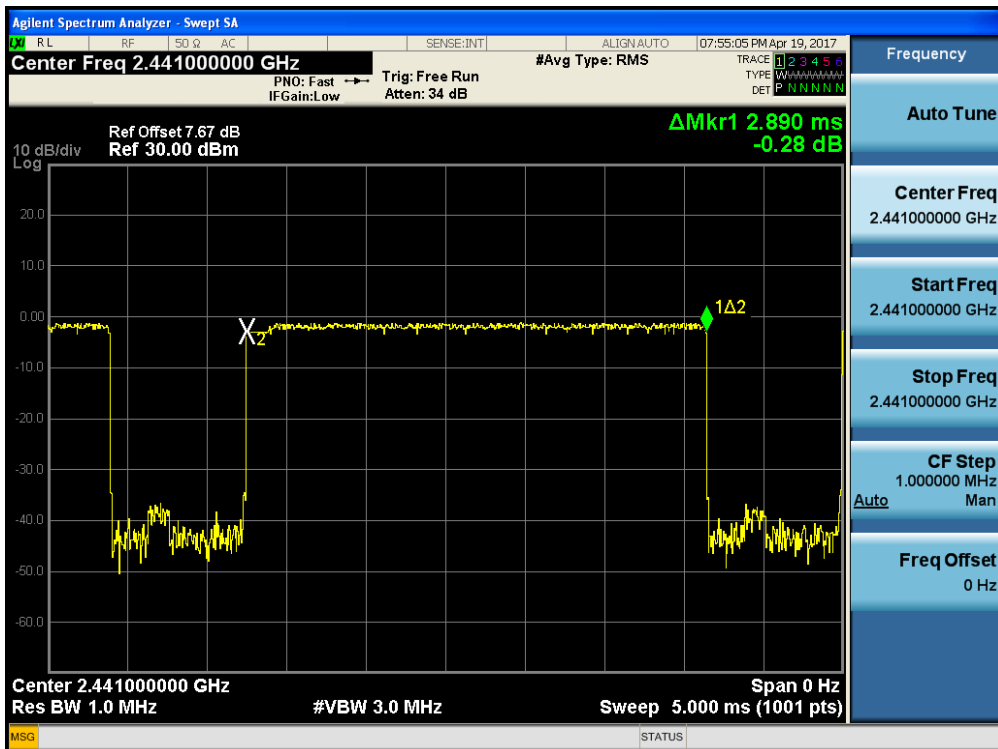

Test Plots ( $\pi/4$ DQPSK)  
Dwell Time (CH.78)

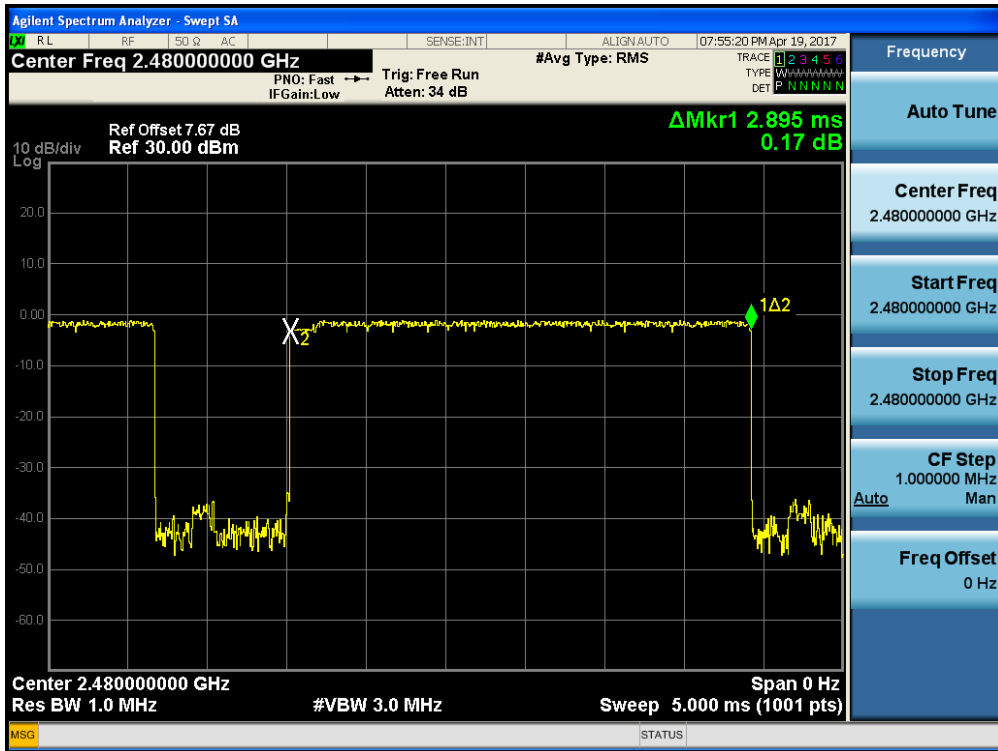

## 9.6 SPURIOUS EMISSIONS


### 9.6.1 CONDUCTED SPURIOUS EMISSIONS

#### Test Requirements and limit, §15.247(d) / RSS-247(Issue 2) Section 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) / RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit : 20 dBc**

#### Test Configuration

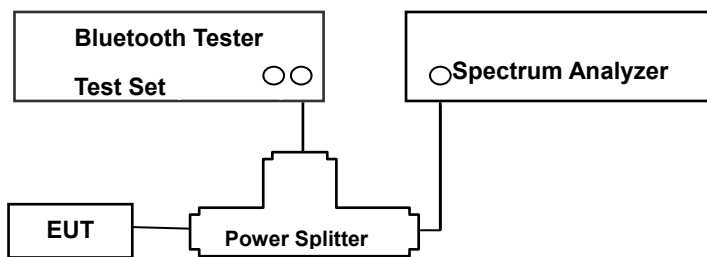

## TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

**TEST RESULTS**

No non-compliance noted.

Note : In order to simplify the report, attached plots were only the worst case channel and data rate.


**FACTORS FOR FREQUENCY**

Freq(MHz)	Factor(dB)
30	7.18
100	6.35
200	7.04
300	6.58
400	6.26
500	5.95
600	6.17
700	6.34
800	6.72
900	7.08
1000	7.38
2000	7.78
2400*	7.36
2500*	7.44
3000	7.88
4000	8.95
5000	9.57
6000	6.68
7000	9.99
8000	8.34
9000	9.61
10000	10.47
11000	8.96
12000	9.73
13000	8.84
14000	9.50
15000	11.54
16000	8.14
17000	11.73
18000	9.71
19000	10.40
20000	11.69
21000	10.72
22000	12.31
23000	9.85
24000	12.52
25000	11.07
26000	10.50


Note : 1. \*\* is fundamental frequency range.

2. Factor = Cable loss + Splitter loss


Test Plots (8DPSK)- 30 MHz - 1 GHz  
Spurious Emission (CH.0)

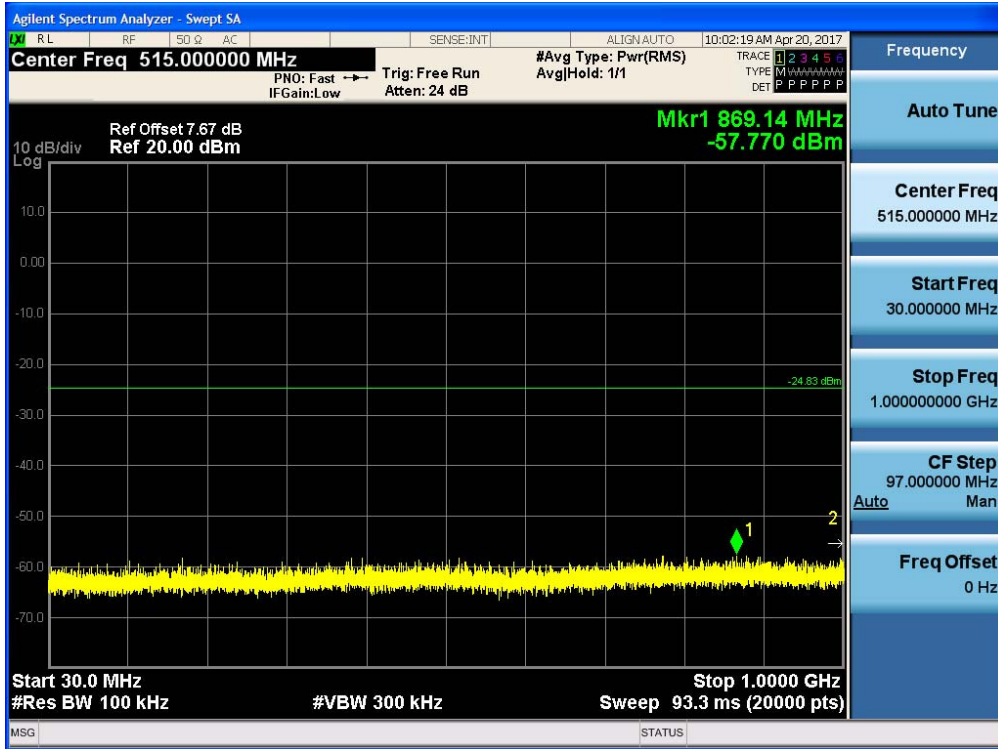


Test Plots (8DPSK)- 1 GHz – 3 GHz  
Spurious Emission (CH.0)

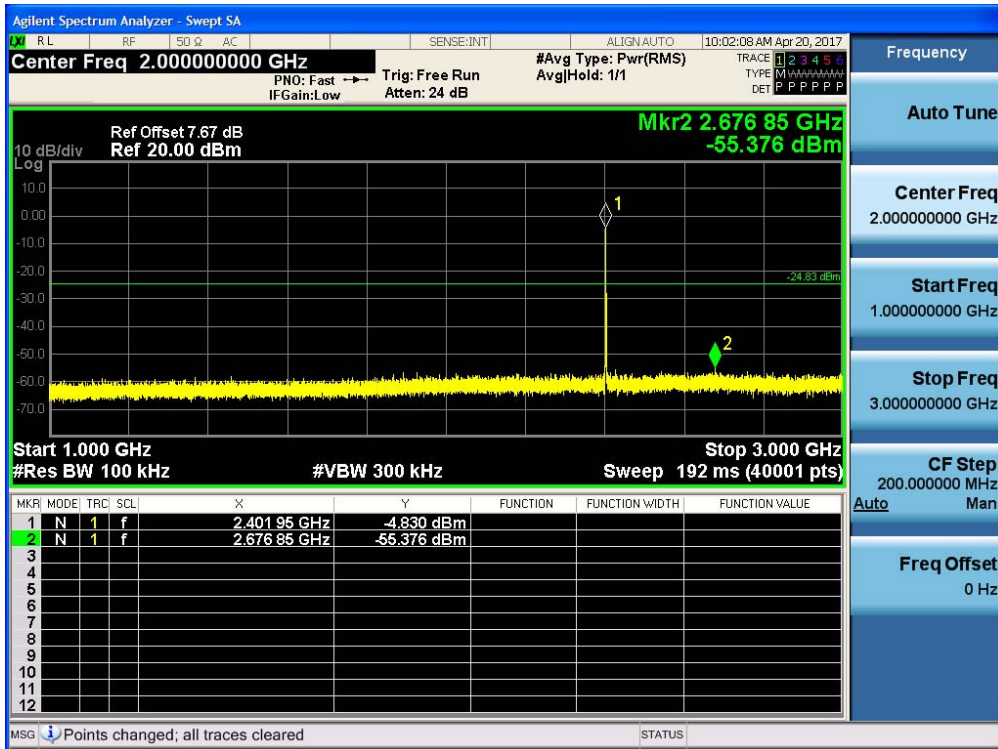

Test Plots(8DPSK)- 3 GHz - 5 GHz  
Spurious Emission (CH.0)

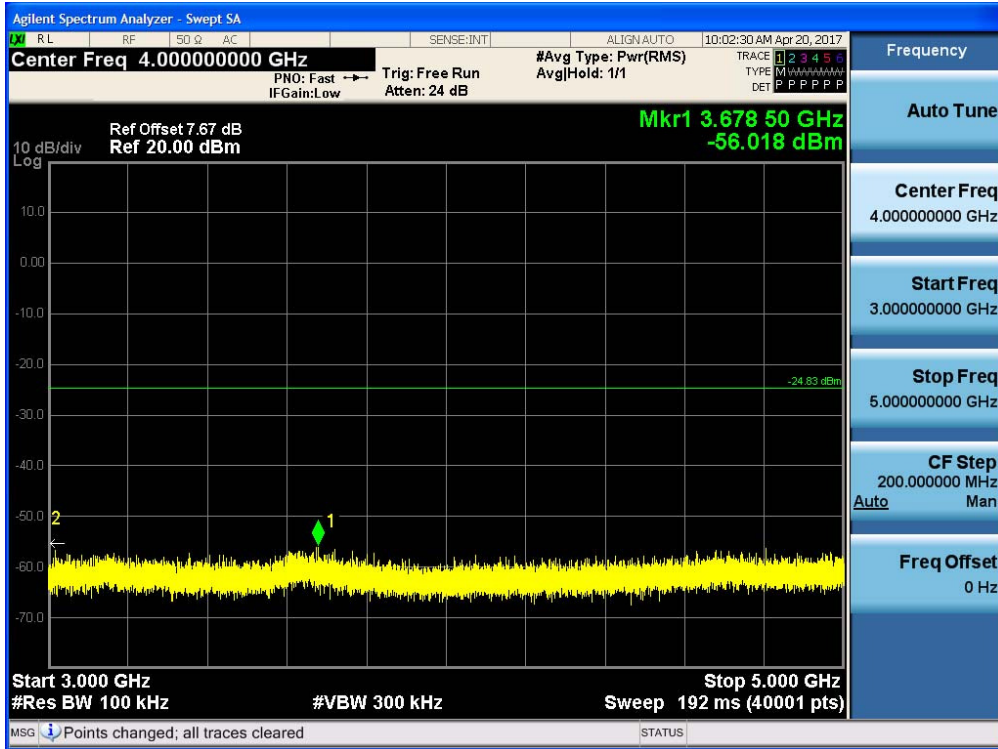


Test Plots (8DPSK)- 5 GHz - 7 GHz  
Spurious Emission (CH.0)

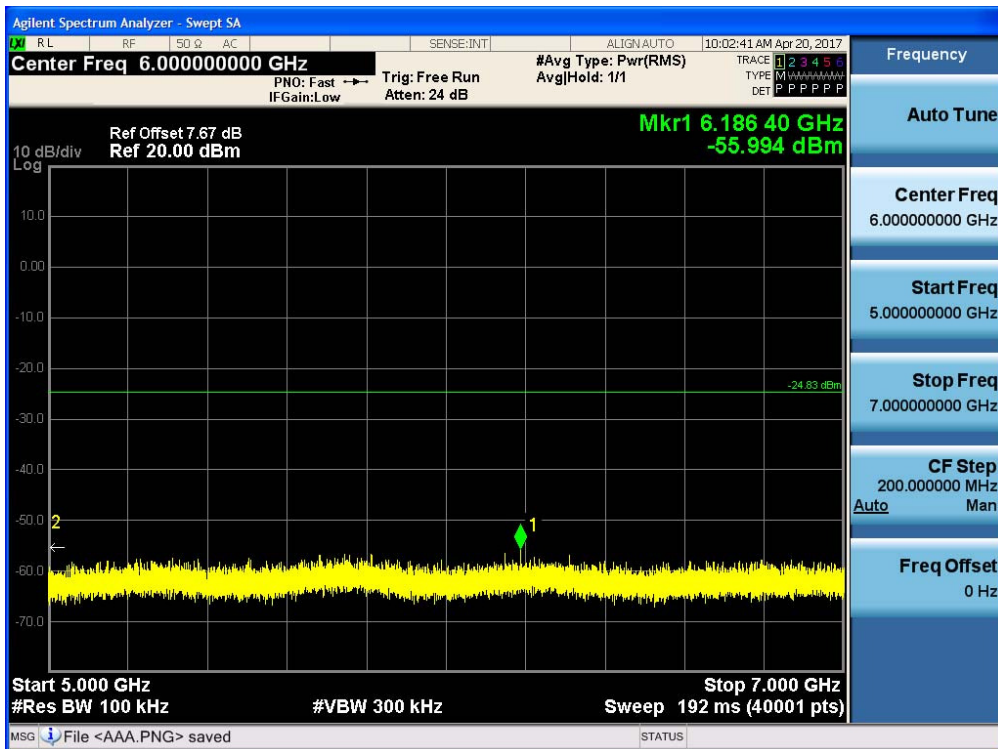





Test Plots(8DPSK)- 7 GHz - 9 GHz  
Spurious Emission (CH.0)

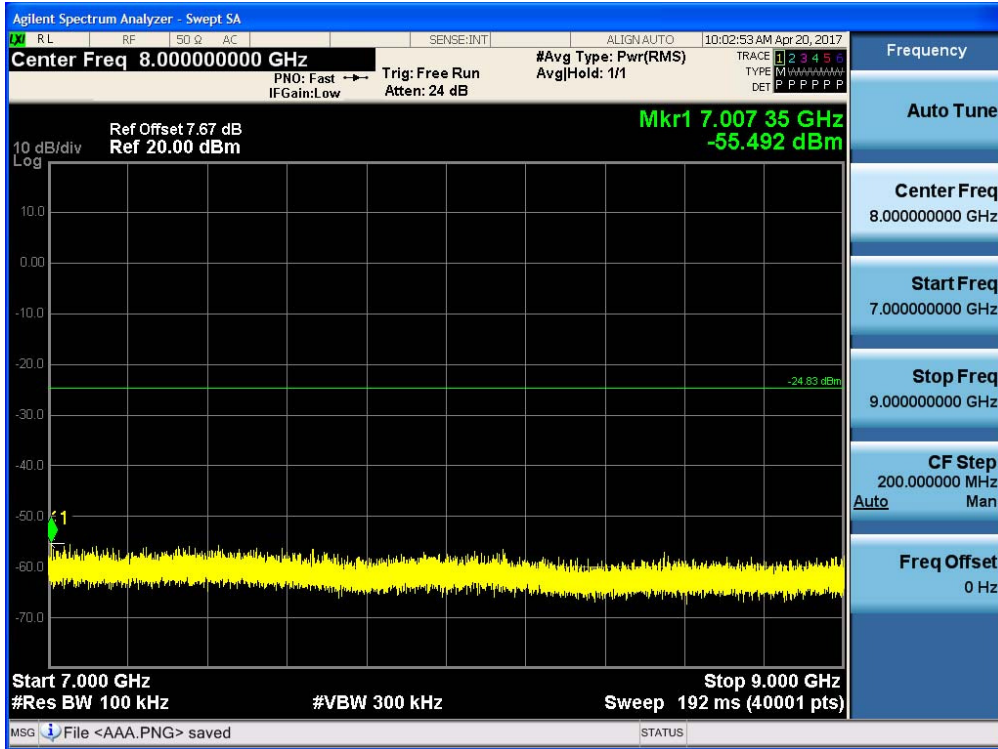


Test Plots(8DPSK)- 9 GHz - 11 GHz  
Spurious Emission (CH.0)

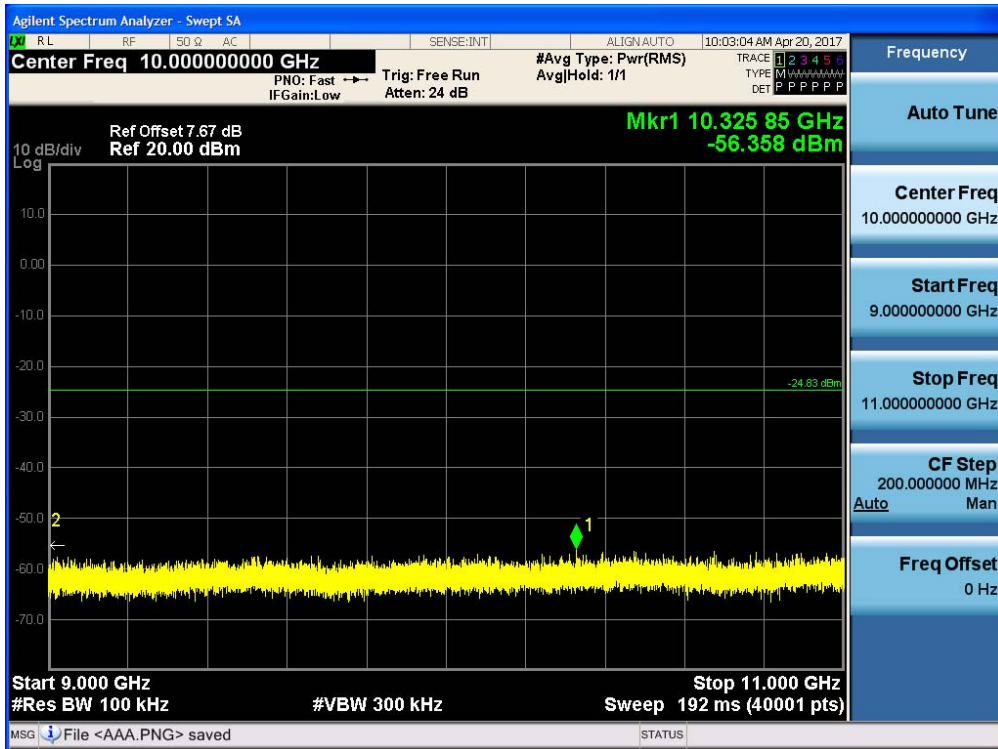


Test Plots(8DPSK) 11 GHz - 13 GHz  
Spurious Emission (CH.0)

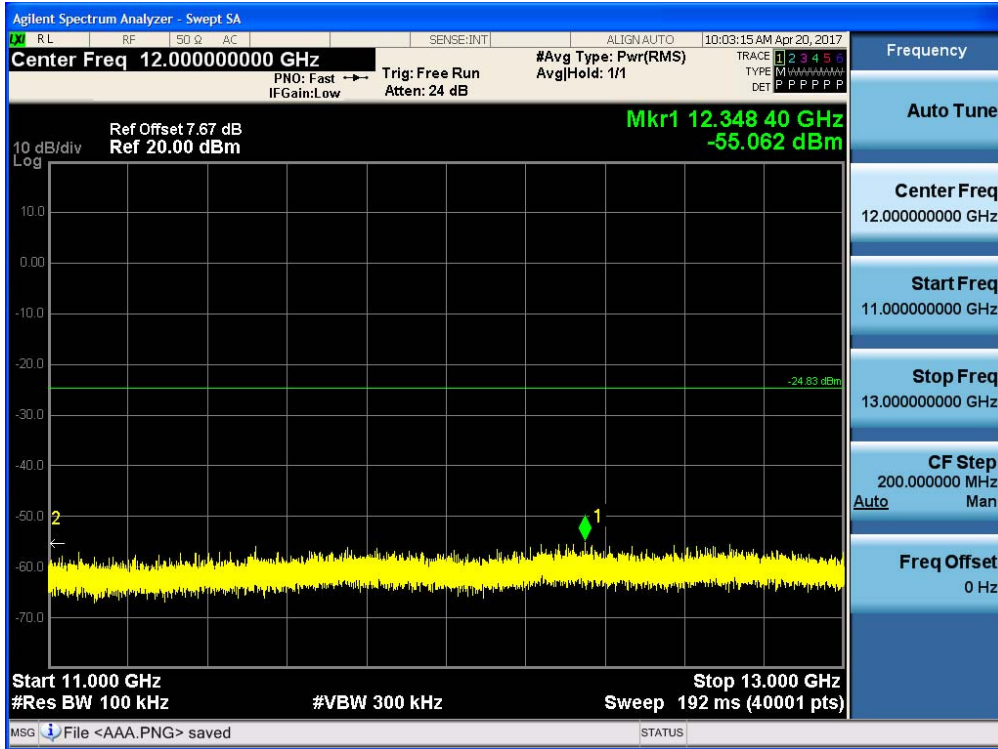


Test Plots (8DPSK)- 13 GHz – 15 GHz  
Spurious Emission (CH.0)

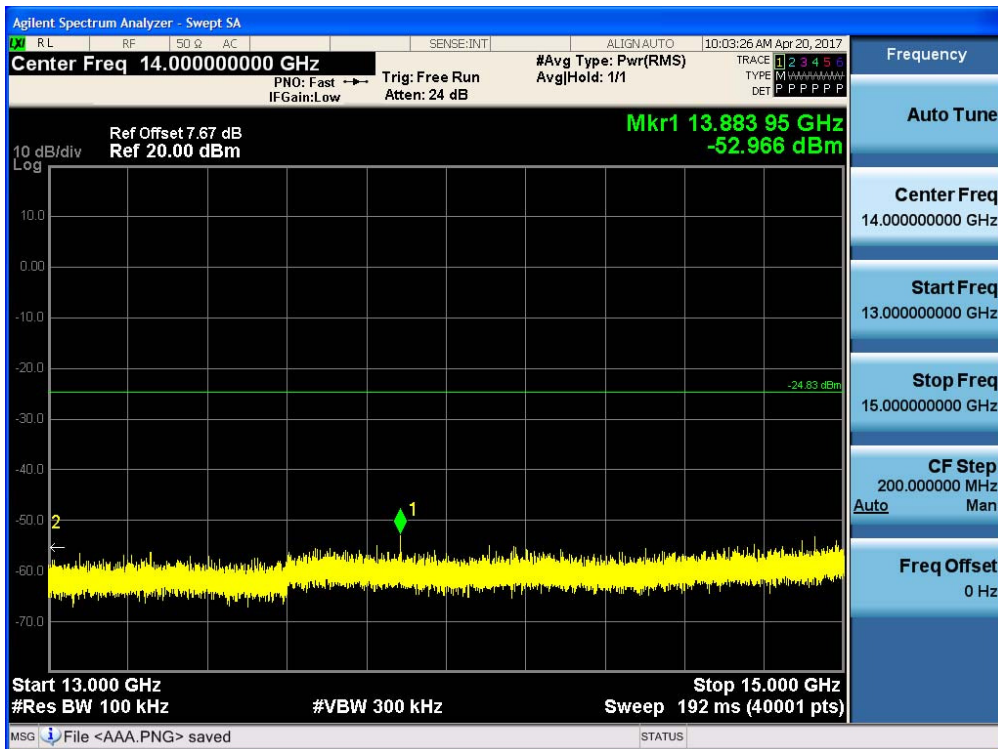


Test Plots(8DPSK)- 15 GHz - 17 GHz  
Spurious Emission (CH.0)

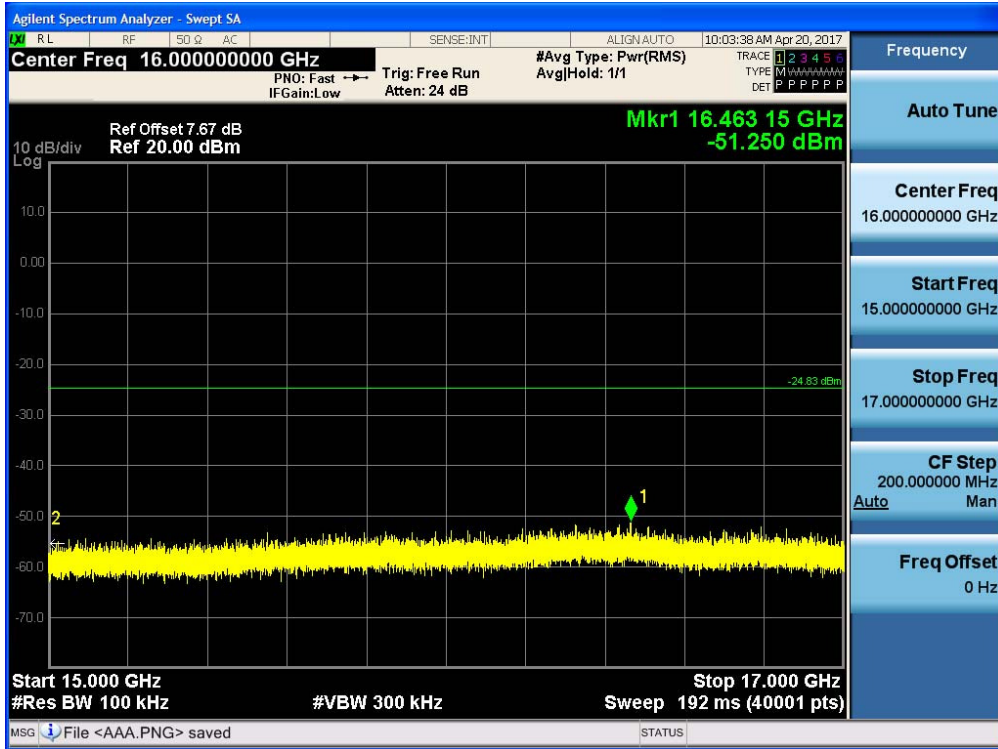


Test Plots(8DPSK)- 17 GHz - 19 GHz  
Spurious Emission (CH.0)

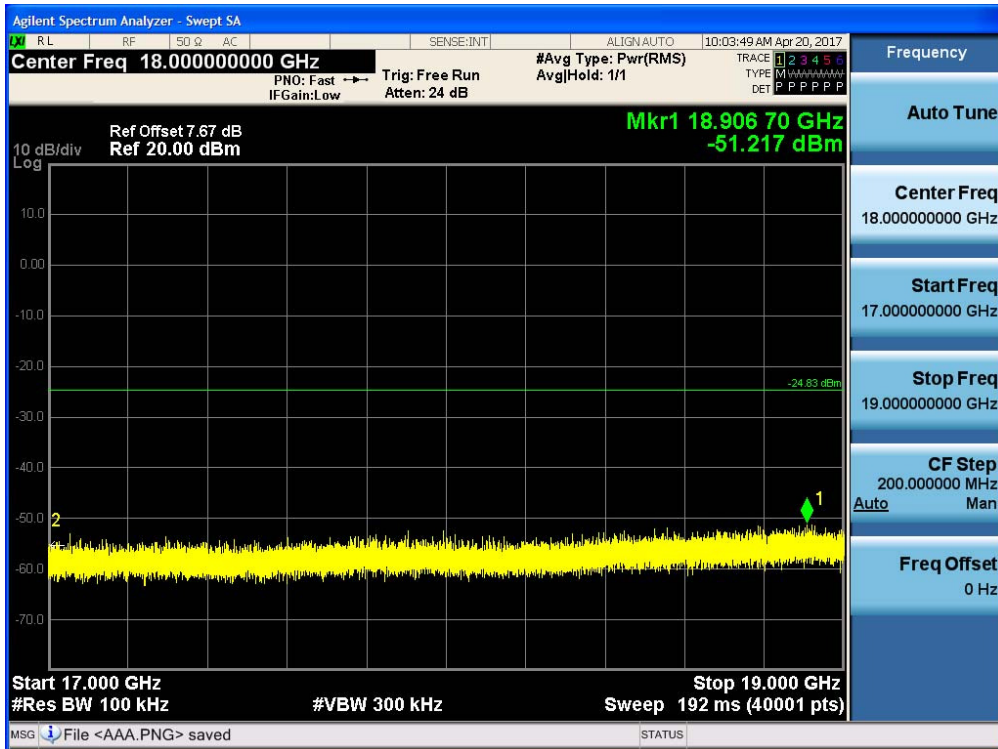


Test Plots (8DPSK)- 19 GHz - 21 GHz  
Spurious Emission (CH.0)

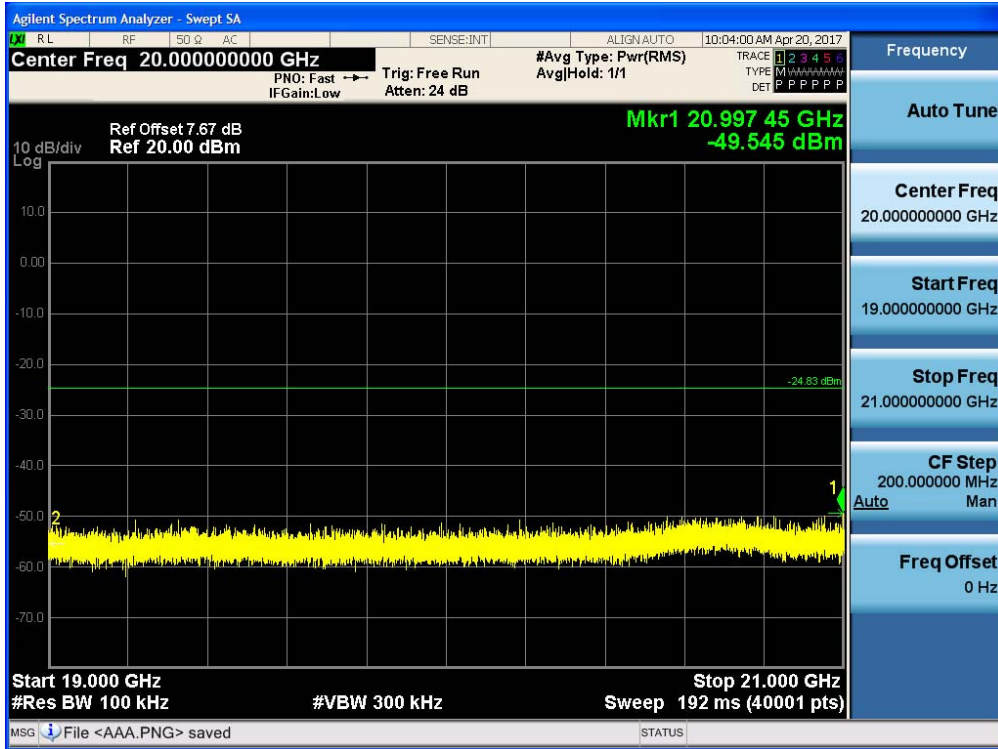

Test Plots (8DPSK)- 21 GHz - 23 GHz  
Spurious Emission (CH.0)

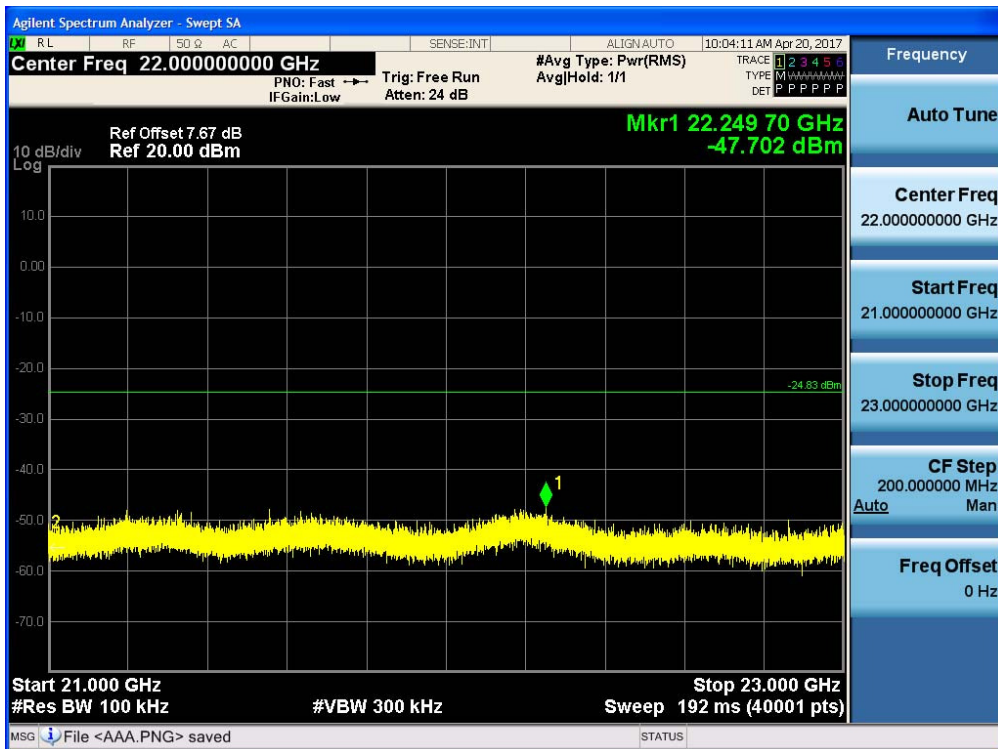

Test Plots (8DPSK)- 23 GHz - 25 GHz  
Spurious Emission (CH.0)

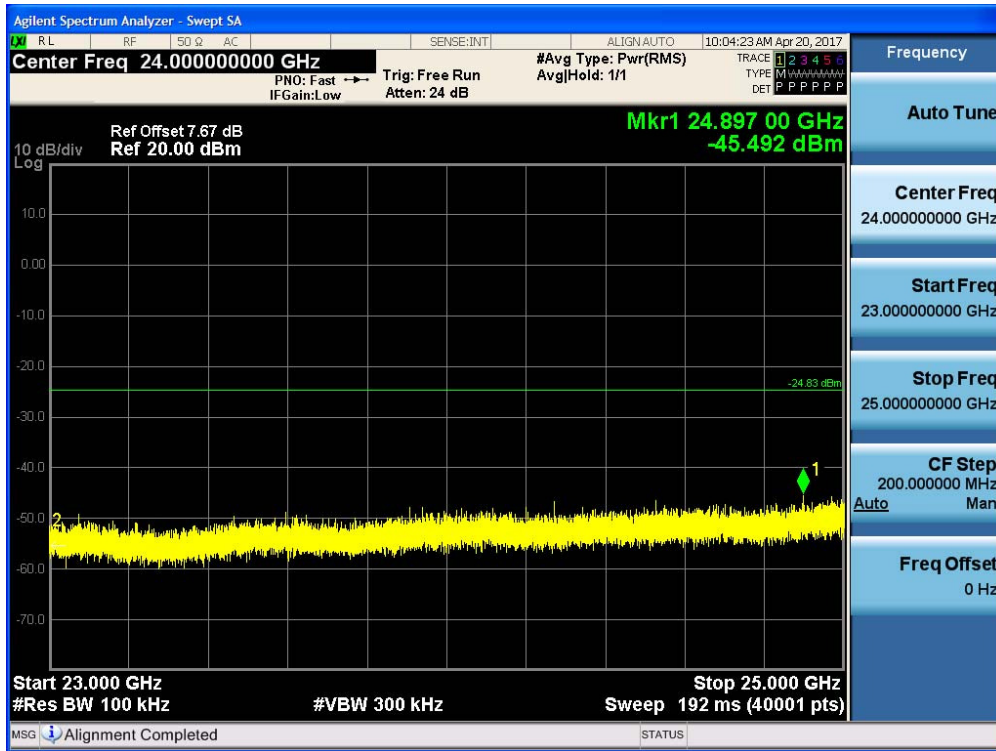


**9.6.2 RADIATED SPURIOUS EMISSIONS****LIMIT : §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 4) Section 8.9, 8.10**

20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) / RSS-Gen 8.10, then the 15.209(a) / RSS-Gen 8.9 limit in the table below has to be followed.


<b>Frequency (MHz)</b>	<b>Field Strength (uV/m)</b>	<b>Measurement Distance (m)</b>
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


**Test Configuration**

**Below 30 MHz**

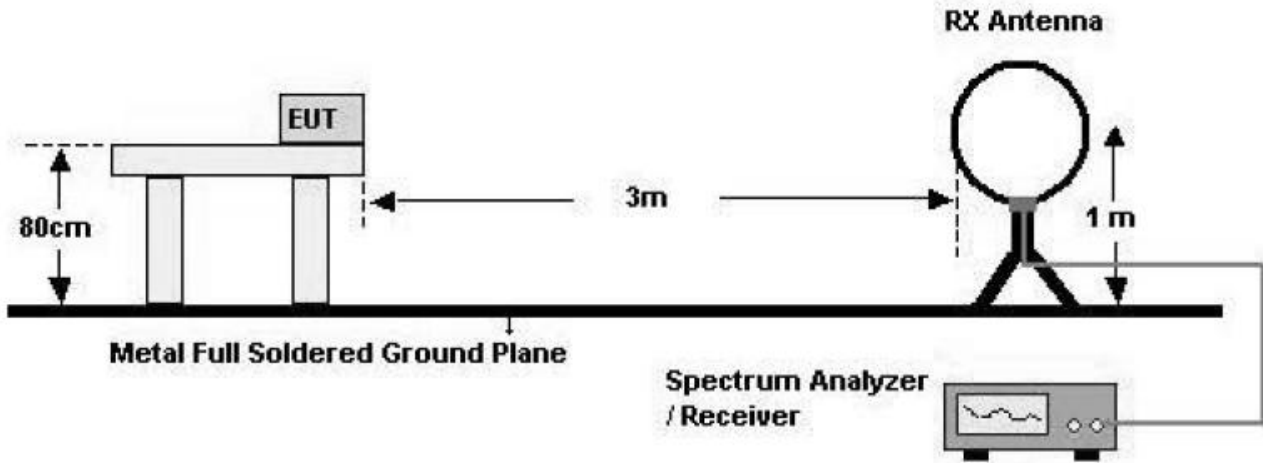

**30 MHz - 1 GHz**

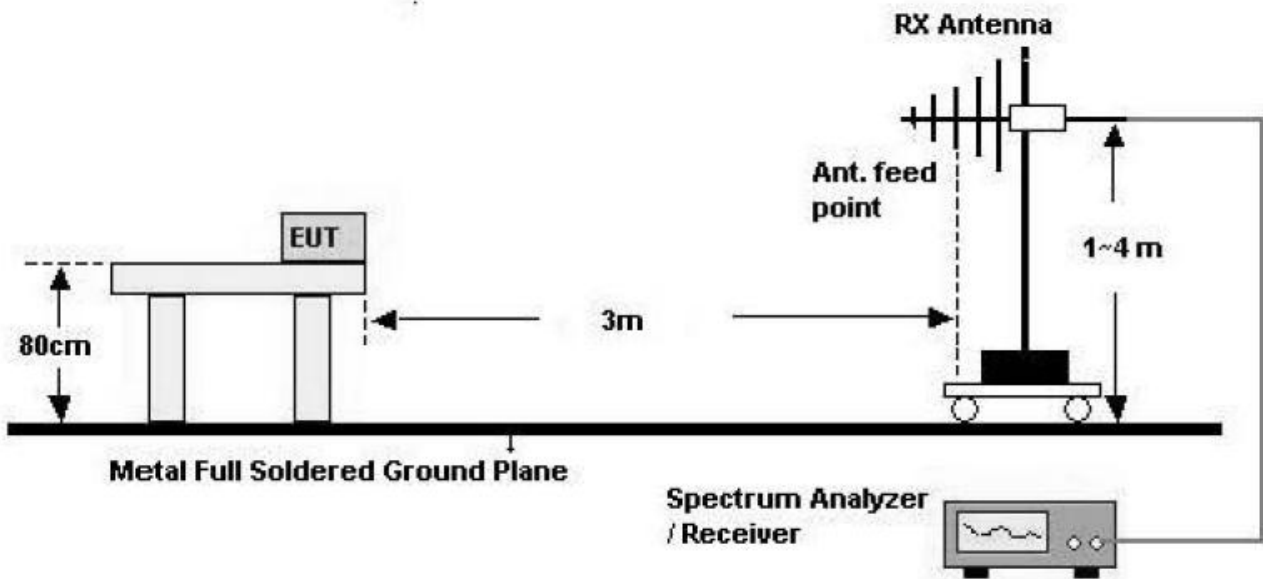

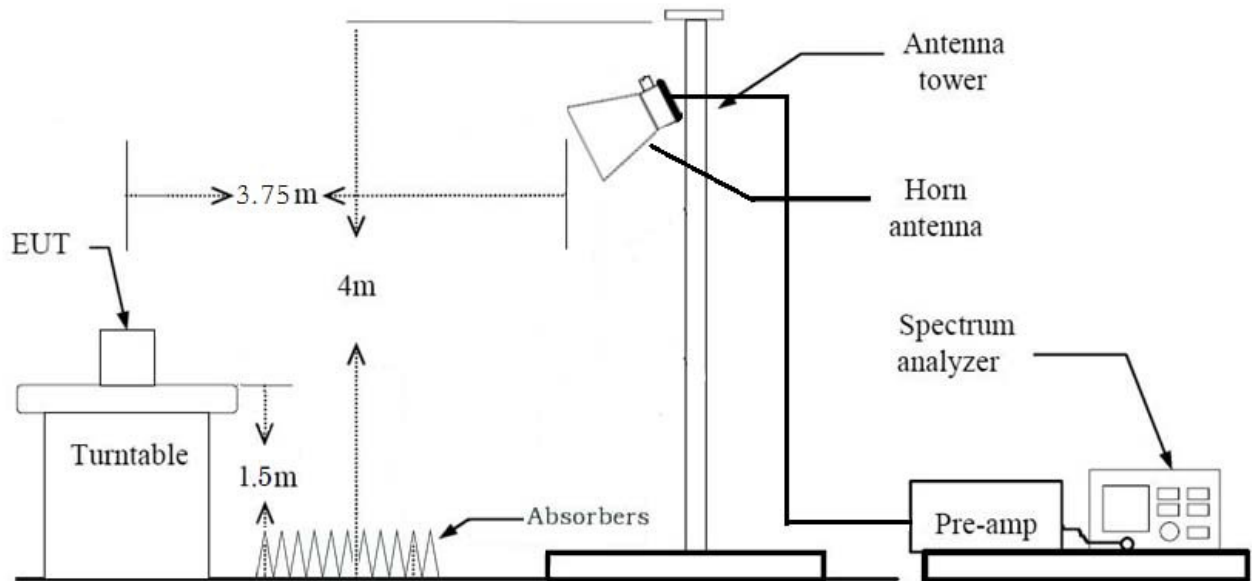**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
  - a. Peak: 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 3 \times$  RBW
  - b. Average: 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.



**Note :**

1. We are performed the RSE and radiated band edge using standard radiated method.
2. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
4. The duty cycle factor for BT mode.

<b>BT Mode</b>	<b>T<sub>on</sub></b> (ms)	<b>VBW(1/T)</b> (Hz)	<b>The actual setting value of VBW</b> (Hz)
<b>GFSK</b>	<b>2.890</b>	<b>346</b>	<b>1000</b>
<b><math>\pi/4</math>DQPSK</b>	<b>2.890</b>	<b>346</b>	<b>1000</b>
<b>8DPSK</b>	<b>2.895</b>	<b>345</b>	<b>1000</b>

**TEST RESULTS****9 kHz – 30MHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**TEST RESULTS****Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Notes:**

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**NX-3220-K3 (Full test)**

Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	49.31	2.35	V	51.66	73.98	22.32	PK
4804	35.10	2.35	V	37.45	53.98	16.53	AV
7206	48.68	9.30	V	57.98	73.98	16.00	PK
7206	34.87	9.30	V	44.17	53.98	9.81	AV
4804	49.45	2.35	H	51.8	73.98	22.18	PK
4804	35.23	2.35	H	37.58	53.98	16.40	AV
7206	49.21	9.30	H	58.51	73.98	15.47	PK
7206	35.03	9.30	H	44.33	53.98	9.65	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.74	2.35	V	51.09	73.98	22.89	PK
4804	35.17	2.35	V	37.52	53.98	16.46	AV
7206	49.61	9.30	V	58.91	73.98	15.07	PK
7206	34.88	9.30	V	44.18	53.98	9.80	AV
4804	48.95	2.35	H	51.3	73.98	22.68	PK
4804	35.32	2.35	H	37.67	53.98	16.31	AV
7206	49.26	9.30	H	58.56	73.98	15.42	PK
7206	35.00	9.30	H	44.3	53.98	9.68	AV

Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.57	2.35	V	50.92	73.98	23.06	PK
4804	35.11	2.35	V	37.46	53.98	16.52	AV
7206	49.03	9.30	V	58.33	73.98	15.65	PK
7206	34.99	9.30	V	44.29	53.98	9.69	AV
4804	48.77	2.35	H	51.12	73.98	22.86	PK
4804	35.26	2.35	H	37.61	53.98	16.37	AV
7206	48.97	9.30	H	58.27	73.98	15.71	PK
7206	35.14	9.30	H	44.44	53.98	9.54	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
- Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
- Spectrum setting:
  - Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
- FYI : Duty Cycle Correction Factor (79 channel hopping)
  - Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - Duty Cycle Correction =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
- Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
  - Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - Duty Cycle Correction(AFH) =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB

- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.59	2.77	V	51.36	73.98	22.62	PK
4882	34.86	2.77	V	37.63	53.98	16.35	AV
7323	48.31	9.35	V	57.66	73.98	16.32	PK
7323	34.28	9.35	V	43.63	53.98	10.35	AV
4882	48.74	2.77	H	51.51	73.98	22.47	PK
4882	34.99	2.77	H	37.76	53.98	16.22	AV
7323	48.49	9.35	H	57.84	73.98	16.14	PK
7323	34.54	9.35	H	43.89	53.98	10.09	AV

## Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.35	2.77	V	51.12	73.98	22.86	PK
4882	34.86	2.77	V	37.63	53.98	16.35	AV
7323	47.96	9.35	V	57.31	73.98	16.67	PK
7323	34.67	9.35	V	44.02	53.98	9.96	AV
4882	48.57	2.77	H	51.34	73.98	22.64	PK
4882	35.03	2.77	H	37.8	53.98	16.18	AV
7323	48.06	9.35	H	57.41	73.98	16.57	PK
7323	34.85	9.35	H	44.2	53.98	9.78	AV

Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.15	2.77	V	50.92	73.98	23.06	PK
4882	34.84	2.77	V	37.61	53.98	16.37	AV
7323	47.91	9.35	V	57.26	73.98	16.72	PK
7323	34.24	9.35	V	43.59	53.98	10.39	AV
4882	48.37	2.77	H	51.14	73.98	22.84	PK
4882	35.05	2.77	H	37.82	53.98	16.16	AV
7323	48.14	9.35	H	57.49	73.98	16.49	PK
7323	34.54	9.35	H	43.89	53.98	10.09	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction(AFH) =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB



- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.35	3.28	V	51.63	73.98	22.35	PK
4960	35.08	3.28	V	38.36	53.98	15.62	AV
7440	47.95	9.91	V	57.86	73.98	16.12	PK
7440	34.22	9.91	V	44.13	53.98	9.85	AV
4960	48.49	3.28	H	51.77	73.98	22.21	PK
4960	35.20	3.28	H	38.48	53.98	15.50	AV
7440	48.02	9.91	H	57.93	73.98	16.05	PK
7440	34.40	9.91	H	44.31	53.98	9.67	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	※A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.47	3.28	V	51.75	73.98	22.23	PK
4960	34.98	3.28	V	38.26	53.98	15.72	AV
7440	47.61	9.91	V	57.52	73.98	16.46	PK
7440	34.32	9.91	V	44.23	53.98	9.75	AV
4960	48.62	3.28	H	51.9	73.98	22.08	PK
4960	35.17	3.28	H	38.45	53.98	15.53	AV
7440	47.87	9.91	H	57.78	73.98	16.20	PK
7440	34.39	9.91	H	44.3	53.98	9.68	AV

Operation Mode: CH High ( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.64	3.28	V	51.92	73.98	22.06	PK
4960	35.06	3.28	V	38.34	53.98	15.64	AV
7440	47.66	9.91	V	57.57	73.98	16.41	PK
7440	34.36	9.91	V	44.27	53.98	9.71	AV
4960	48.85	3.28	H	52.13	73.98	21.85	PK
4960	35.25	3.28	H	38.53	53.98	15.45	AV
7440	48.00	9.91	H	57.91	73.98	16.07	PK
7440	34.41	9.91	H	44.32	53.98	9.66	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log(\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction(AFH) =  $20 \log(\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB

- e. We applied DCCF in the test result which hopping channel number is 20.
- 9. We have done Normal Mode and EDR Mode test.
- 10. This test is performed with hopping off.
- 11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**NX-3220-K2 (Spot check)**

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	49.23	2.35	H	51.58	73.98	22.40	PK
4804	36.92	2.35	H	39.27	53.98	14.71	AV
7206	48.11	9.30	H	57.41	73.98	16.57	PK
7206	34.86	9.30	H	44.16	53.98	9.82	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	49.38	2.35	H	51.73	73.98	22.25	PK
4804	36.94	2.35	H	39.29	53.98	14.69	AV
7206	47.82	9.30	H	57.12	73.98	16.86	PK
7206	34.83	9.30	H	44.13	53.98	9.85	AV

Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.98	2.35	H	51.33	73.98	22.65	PK
4804	37.10	2.35	H	39.45	53.98	14.53	AV
7206	48.34	9.30	H	57.64	73.98	16.34	PK
7206	34.80	9.30	H	44.1	53.98	9.88	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
9. We have done Normal Mode and EDR Mode test.
10. This test is performed with hopping off.
11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.54	2.77	H	51.31	73.98	22.67	PK
4882	35.74	2.77	H	38.51	53.98	15.47	AV
7323	48.01	9.35	H	57.36	73.98	16.62	PK
7323	34.41	9.35	H	43.76	53.98	10.22	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.18	2.77	H	50.95	73.98	23.03	PK
4882	35.78	2.77	H	38.55	53.98	15.43	AV
7323	47.13	9.35	H	56.48	73.98	17.50	PK
7323	34.15	9.35	H	43.5	53.98	10.48	AV

Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.31	2.77	H	51.08	73.98	22.90	PK
4882	35.99	2.77	H	38.76	53.98	15.22	AV
7323	47.73	9.35	H	57.08	73.98	16.90	PK
7323	34.17	9.35	H	43.52	53.98	10.46	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
9. We have done Normal Mode and EDR Mode test.
10. This test is performed with hopping off.
11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	49.11	3.28	H	52.39	73.98	21.59	PK
4960	36.43	3.28	H	39.71	53.98	14.27	AV
7440	46.57	9.91	H	56.48	73.98	17.50	PK
7440	34.32	9.91	H	44.23	53.98	9.75	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.91	3.28	H	52.19	73.98	21.79	PK
4960	36.20	3.28	H	39.48	53.98	14.50	AV
7440	47.57	9.91	H	57.48	73.98	16.50	PK
7440	34.47	9.91	H	44.38	53.98	9.60	AV

Operation Mode: CH High ( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	47.82	3.28	H	51.1	73.98	22.88	PK
4960	34.93	3.28	H	38.21	53.98	15.77	AV
7440	48.14	9.91	H	58.05	73.98	15.93	PK
7440	34.29	9.91	H	44.2	53.98	9.78	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
9. We have done Normal Mode and EDR Mode test.
10. This test is performed with hopping off.
11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**NX-3220-K (Spot check)**

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.95	2.35	H	51.3	73.98	22.68	PK
4804	35.29	2.35	H	37.64	53.98	16.34	AV
7206	49.98	9.30	H	59.28	73.98	14.70	PK
7206	34.96	9.30	H	44.26	53.98	9.72	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.93	2.35	H	51.28	73.98	22.70	PK
4804	35.43	2.35	H	37.78	53.98	16.20	AV
7206	48.36	9.30	H	57.66	73.98	16.32	PK
7206	35.04	9.30	H	44.34	53.98	9.64	AV

 Operation Mode: CH Low( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	47.42	2.35	H	49.77	73.98	24.21	PK
4804	34.26	2.35	H	36.61	53.98	17.37	AV
7206	48.15	9.30	H	57.45	73.98	16.53	PK
7206	34.72	9.30	H	44.02	53.98	9.96	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
9. We have done Normal Mode and EDR Mode test.
10. This test is performed with hopping off.
11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.53	2.77	H	51.3	73.98	22.68	PK
4882	34.91	2.77	H	37.68	53.98	16.30	AV
7323	47.60	9.35	H	56.95	73.98	17.03	PK
7323	34.34	9.35	H	43.69	53.98	10.29	AV

## Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.94	2.77	H	51.71	73.98	22.27	PK
4882	35.13	2.77	H	37.9	53.98	16.08	AV
7323	47.78	9.35	H	57.13	73.98	16.85	PK
7323	34.31	9.35	H	43.66	53.98	10.32	AV

 Operation Mode: CH Mid( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	48.56	2.77	H	51.33	73.98	22.65	PK
4882	35.11	2.77	H	37.88	53.98	16.10	AV
7323	47.39	9.35	H	56.74	73.98	17.24	PK
7323	34.18	9.35	H	43.53	53.98	10.45	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor

## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
9. We have done Normal Mode and EDR Mode test.
10. This test is performed with hopping off.
11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.21	3.28	H	51.49	73.98	22.49	PK
4960	35.17	3.28	H	38.45	53.98	15.53	AV
7440	47.70	9.91	H	57.61	73.98	16.37	PK
7440	34.34	9.91	H	44.25	53.98	9.73	AV

## Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.41	3.28	H	51.69	73.98	22.29	PK
4960	35.16	3.28	H	38.44	53.98	15.54	AV
7440	48.17	9.91	H	58.08	73.98	15.90	PK
7440	34.50	9.91	H	44.41	53.98	9.57	AV

 Operation Mode: CH High ( $\pi/4$ DQPSK)

Frequency [MHz]	Reading [dBuV]	*A.F.+C.L.-A.G.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	49.13	3.28	H	52.41	73.98	21.57	PK
4960	35.33	3.28	H	38.61	53.98	15.37	AV
7440	47.62	9.91	H	57.53	73.98	16.45	PK
7440	34.35	9.91	H	44.26	53.98	9.72	AV

\*A.F. : Antenna Factor / C.L. : Cable Loss / AMP.G. : Amplifier Gain / D.F. : Distance Factor


## Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Distance Factor
5. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
6. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
7. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels =  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
8. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels =  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
9. We have done Normal Mode and EDR Mode test.
10. This test is performed with hopping off.
11. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.




■ **RESULT PLOTS for NX-3220-K3 (Worst case : X-H)**

**Radiated Spurious Emissions plot – Average Reading (GFSK, Ch.0 3rd Harmonic)**

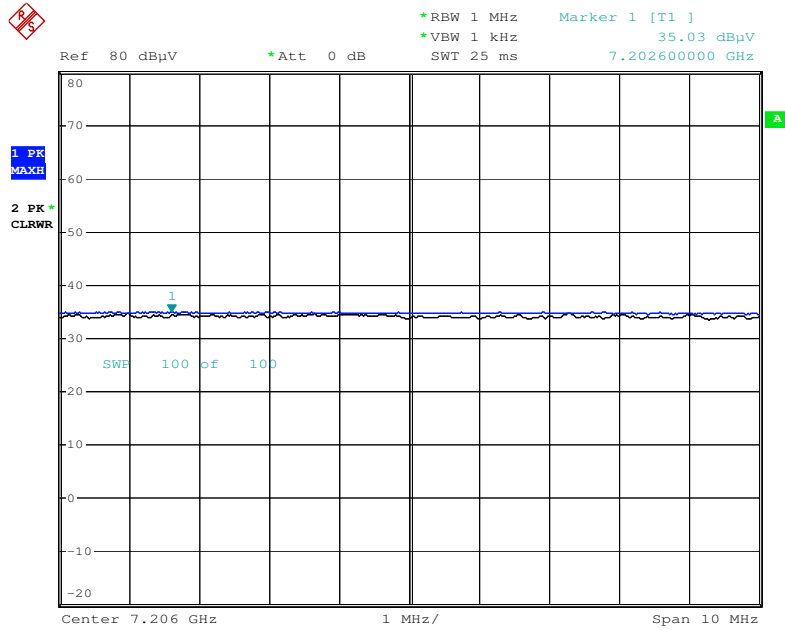


Date: 24.APR.2017 16:59:30

**Radiated Spurious Emissions plot – Peak Reading (GFSK, Ch.0 3rd Harmonic)**

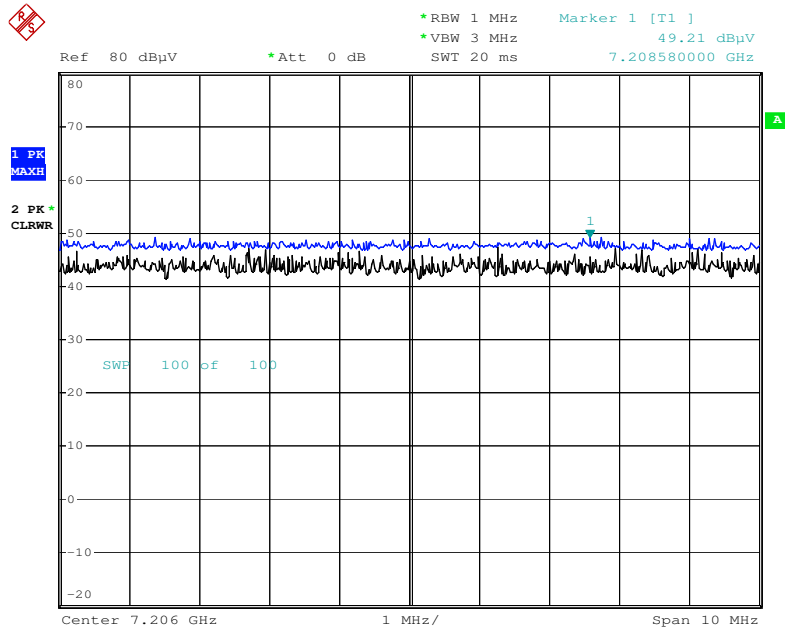


Date: 24.APR.2017 16:58:26

**Radiated Spurious Emissions plot – Average Reading (8DPSK, Ch.0 3rd Harmonic)**

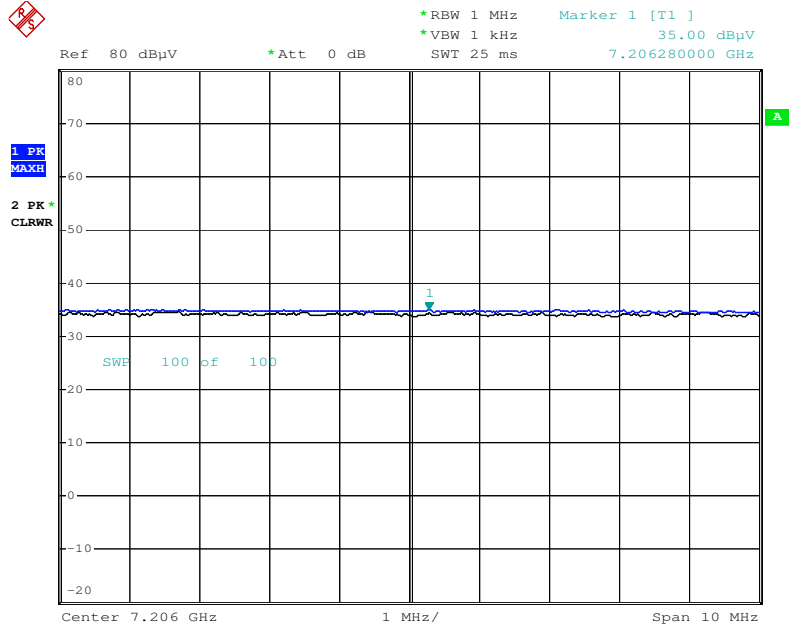


Date: 24.APR.2017 17:02:55

**Radiated Spurious Emissions plot – Peak Reading (8DPSK, Ch.0 3rd Harmonic)**

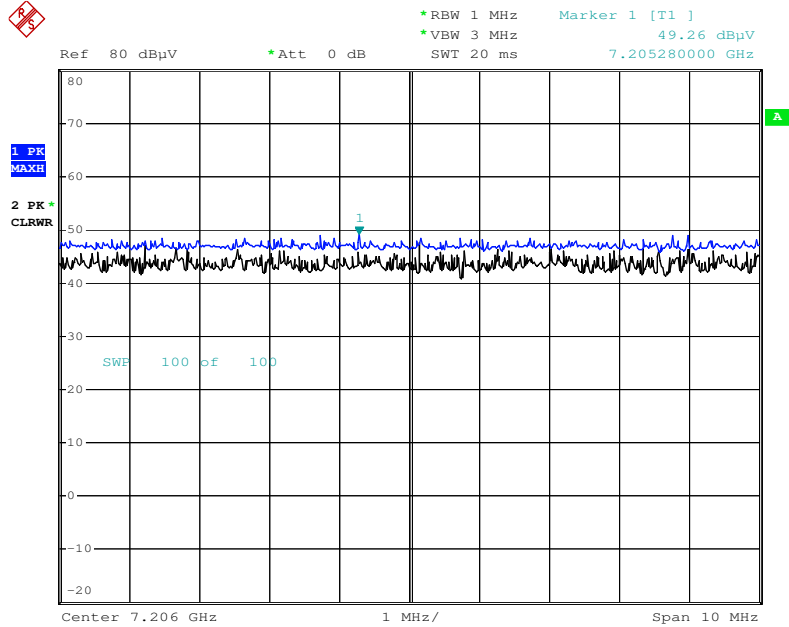


Date: 24.APR.2017 17:06:21

**Radiated Spurious Emissions plot – Average Reading ( $\pi/4$ DQPSK, Ch.39 3rd Harmonic)**

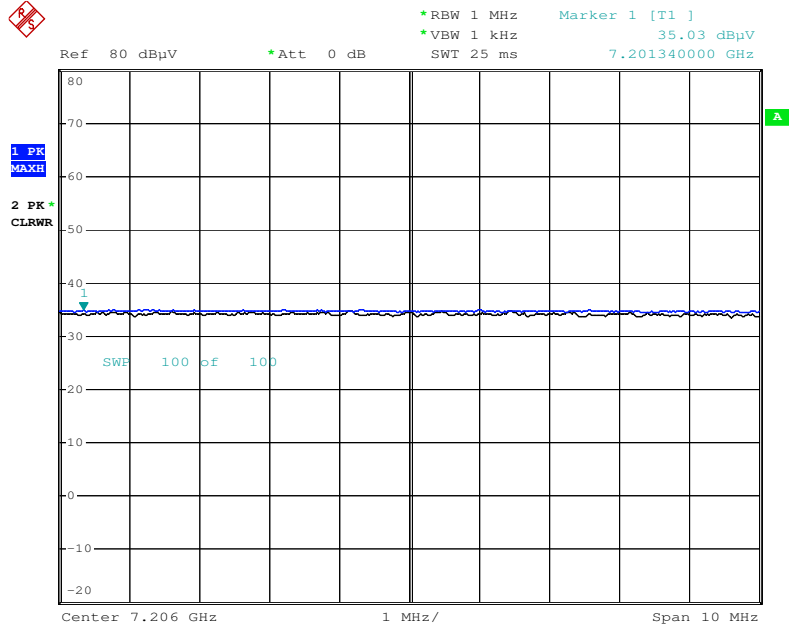

Date: 24.APR.2017 17:00:29

**Radiated Spurious Emissions plot – Peak Reading ( $\pi/4$ DQPSK, Ch.39 3rd Harmonic)**

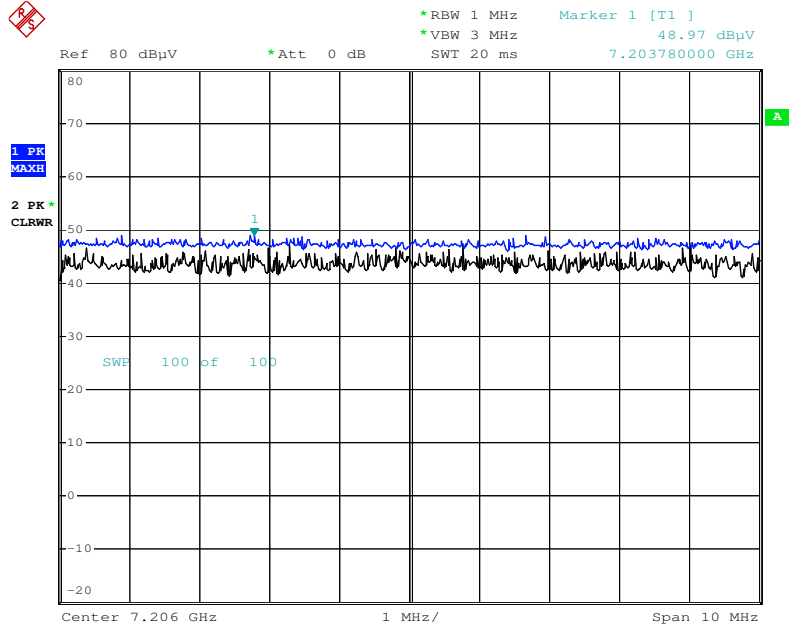

Date: 24.APR.2017 17:01:25

### 9.6.3 RADIATED RESTRICTED BAND EDGES

#### Test Requirements and limit, §15.247(d), §15.205, §15.209 / RSS-Gen(Issue 4) Section 8.10

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) / RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

#### NX-3220-K3 (Full test)

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	24.59	34.35	H	0	58.94	73.98	15.04	PK
2390.0	12.21	34.35	H	-24.73	21.83	53.98	32.15	AV
2390.0	24.81	34.35	V	0	59.16	73.98	14.82	PK
2390.0	12.24	34.35	V	-24.73	21.86	53.98	32.12	AV
2483.5	25.27	34.68	H	0	59.95	73.98	14.03	PK
2483.5	16.31	34.68	H	-24.73	26.26	53.98	27.72	AV
2483.5	25.40	34.68	V	0	60.08	73.98	13.90	PK
2483.5	16.45	34.68	V	-24.73	26.40	53.98	27.58	AV

Operation Mode Normal(8DPSK)  
 Operating Frequency 2402 MHz, 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	25.40	34.35	H	0	59.75	73.98	14.23	PK
2390.0	12.03	34.35	H	-24.73	21.65	53.98	32.33	AV
2390.0	25.70	34.35	V	0	60.05	73.98	13.93	PK
2390.0	12.26	34.35	V	-24.73	21.88	53.98	32.10	AV
2483.5	25.22	34.68	H	0	59.90	73.98	14.08	PK
2483.5	17.08	34.68	H	-24.73	27.03	53.98	26.95	AV
2483.5	25.42	34.68	V	0	60.10	73.98	13.88	PK
2483.5	17.11	34.68	V	-24.73	27.06	53.98	26.92	AV

Operation Mode Normal( $\pi/4$ DQPSK)  
 Operating Frequency 2402 MHz, 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+CL [dB]	ANT. POL [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	24.43	34.35	H	0	58.78	73.98	15.20	PK
2390.0	12.12	34.35	H	-24.73	21.74	53.98	32.24	AV
2390.0	24.68	34.35	V	0	59.03	73.98	14.95	PK
2390.0	12.31	34.35	V	-24.73	21.93	53.98	32.05	AV
2483.5	25.19	34.68	H	0	59.87	73.98	14.11	PK
2483.5	16.48	34.68	H	-24.73	26.43	53.98	27.55	AV
2483.5	25.47	34.68	V	0	60.15	73.98	13.83	PK
2483.5	17.06	34.68	V	-24.73	27.01	53.98	26.97	AV

\*A.F. : Antenna Factor  
 C.L. : Cable Loss  
 D.F. : Distance Factor

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor + Duty Cycle Correction Factor
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
5. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
6. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
7. We have done Normal Mode, EDR Mode.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**NX-3220-K2 (Spot check)**

Operation Mode Normal(GFSK)  
 Operating Frequency 2402 MHz, 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	25.46	34.68	V	0	60.14	73.98	13.84	PK
2483.5	16.18	34.68	V	-24.73	26.13	53.98	27.85	AV

Operation Mode EDR(8DPSK)  
 Operating Frequency 2402 MHz , 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	25.53	34.68	V	0	60.21	73.98	13.77	PK
2483.5	16.72	34.68	V	-24.73	26.67	53.98	27.31	AV

Operation Mode EDR( $\pi$ /4DQPSK)  
 Operating Frequency 2402 MHz , 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	26.56	34.68	V	0	61.24	73.98	12.74	PK
2483.5	16.80	34.68	V	-24.73	26.75	53.98	27.23	AV

\*A.F. : Antenna Factor  
 C.L. : Cable Loss  
 D.F. : Distance Factor

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor + Duty Cycle Correction Factor
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
5. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
6. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
7. We have done Normal Mode, EDR Mode.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



### NX-3220-K (Spot check)

Operation Mode Normal(GFSK)  
 Operating Frequency 2402 MHz, 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	25.71	34.68	V	0	60.39	73.98	13.59	PK
2483.5	16.53	34.68	V	-24.73	26.48	53.98	27.50	AV

Operation Mode EDR(8DPSK)  
 Operating Frequency 2402 MHz , 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	24.14	34.68	V	0	58.82	73.98	15.16	PK
2483.5	17.08	34.68	V	-24.73	27.03	53.98	26.95	AV

Operation Mode EDR( $\pi$ /4DQPSK)  
 Operating Frequency 2402 MHz , 2480 MHz  
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	※ A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	23.76	34.68	V	0	58.44	73.98	15.54	PK
2483.5	17.13	34.68	V	-24.73	27.08	53.98	26.90	AV


\*A.F. : Antenna Factor  
 C.L. : Cable Loss  
 D.F. : Distance Factor

**Notes:**

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Reading Value + Antenna Factor + Cable Loss + Distance Factor + Duty Cycle Correction Factor
3. Distance extrapolation factor =  $20 \log (\text{test distance} / \text{specific distance})$  (dB)
4. Spectrum setting:
  - a. Peak Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW = 3 MHz.
  - b. Average Setting 1 GHz – 25 GHz, RBW = 1 MHz, VBW  $\geq 1/\tau$  Hz, where  $\tau$  = pulse width in seconds.  
We performed using a reduced video BW method was done with the analyzer in linear mode.
5. FYI : Duty Cycle Correction Factor (79 channel hopping)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 79 channels = 229.100 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 1$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 2.900$  ms
  - d. Duty Cycle Correction =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -30.752 dB
6. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)
  - a. Time to cycle through all channels=  $\Delta t = \tau$  [ms] x 20 channels = 58.00 ms, where  $\tau$  = pulse width
  - b.  $100 \text{ ms} / \Delta t$  [ms] =  $H \rightarrow$  Round up to next highest integer,  $H' = 2$
  - c. Worst Case Dwell Time =  $\tau$  [ms] x  $H' = 5.800$  ms
  - d. Duty Cycle Correction (AFH) =  $20 \log (\text{Worst Case Dwell Time} / 100\text{ms})$  dB = -24.7314 dB
  - e. We applied DCCF in the test result which hopping channel number is 20.
7. We have done Normal Mode, EDR Mode.
8. This test is performed with hopping off.
9. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


RESULT PLOTS for NX-3220-K3 (Worst case : Z-V)

Radiated Restricted Band Edges plot – Average Reading (GFSK, Ch.78)

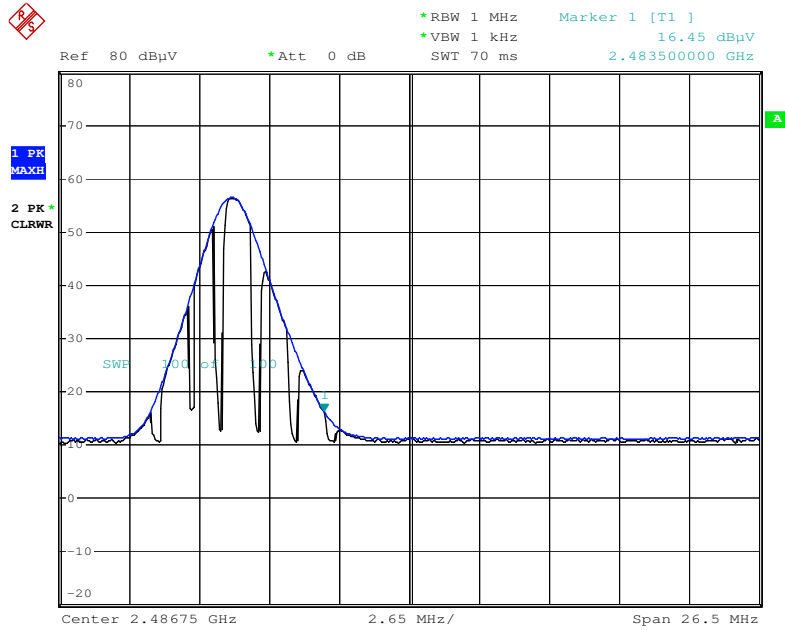

Date: 24.APR.2017 15:28:51


Radiated Restricted Band Edges plot – Peak Reading (GFSK, Ch.78)

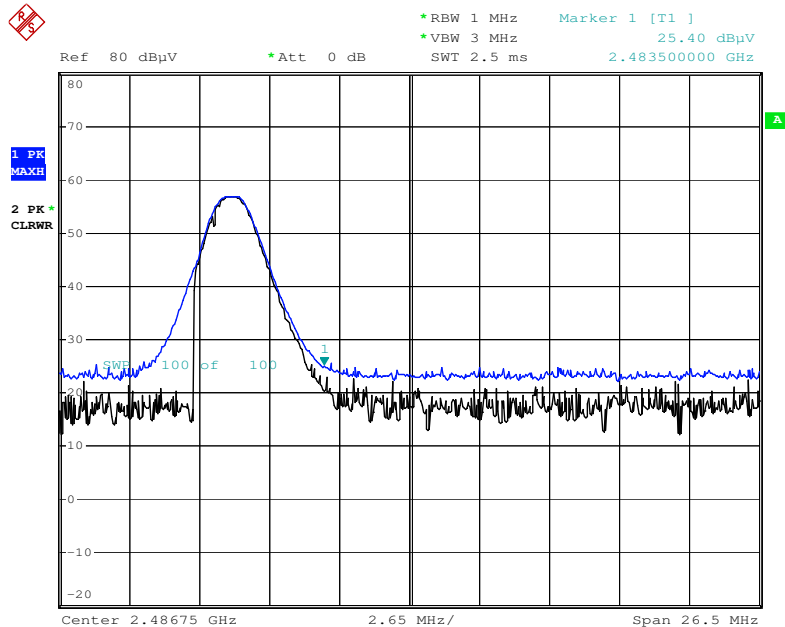

Date: 24.APR.2017 15:27:54


Note : Only the worst case plots for Radiated Restricted Band Edges.

**Radiated Restricted Band Edges plot – Average Reading (8DPSK, Ch.78)**

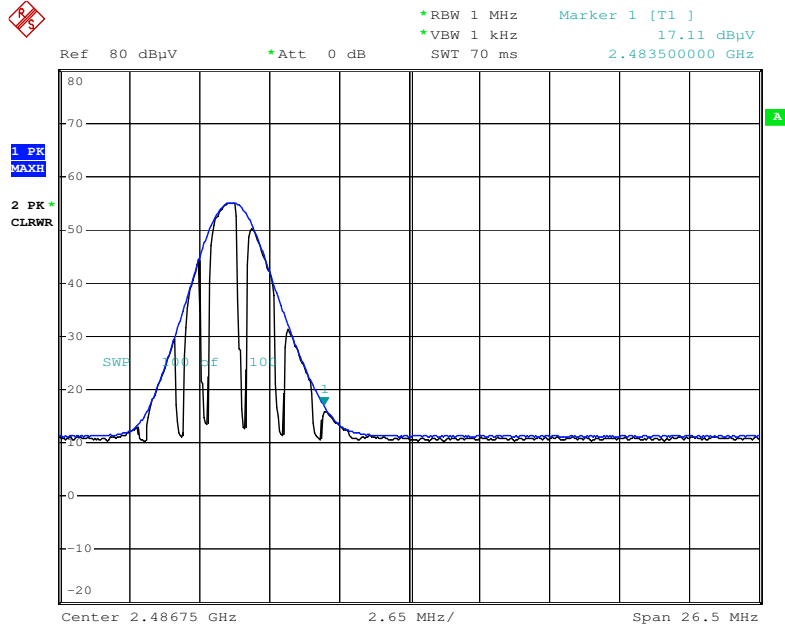

Date: 24.APR.2017 15:31:00


**Radiated Restricted Band Edges plot – Peak Reading (8DPSK, Ch.78)**

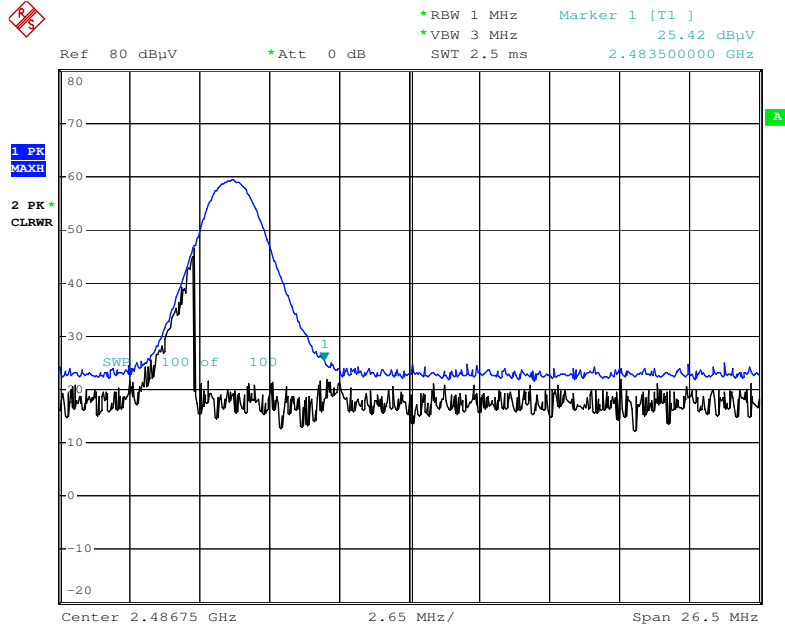

Date: 24.APR.2017 15:30:24


**Note : Only the worst case plots for Radiated Restricted Band Edges.**

**Radiated Restricted Band Edges plot – Average Reading ( $\pi/4$ DQPSK, Ch.78)**

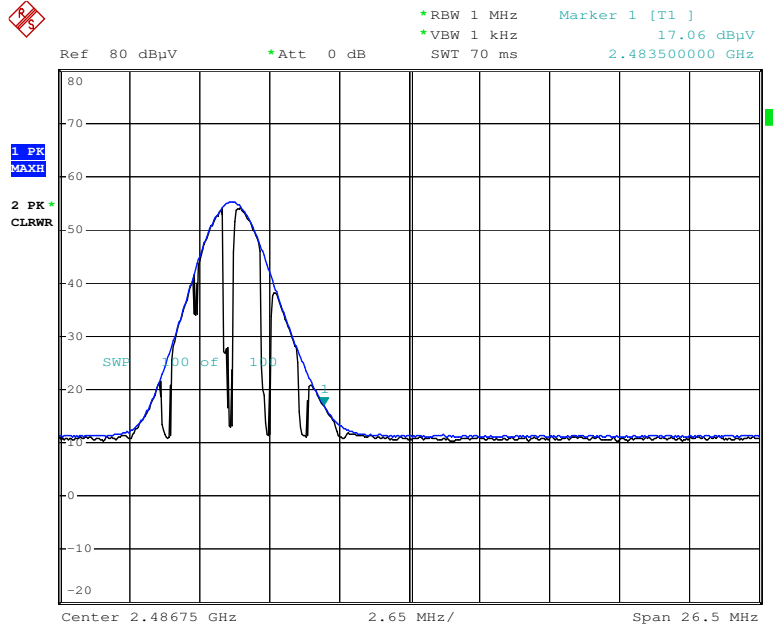

Date: 24.APR.2017 15:29:32

**Radiated Restricted Band Edges plot – Peak Reading ( $\pi/4$ DQPSK, Ch.78)**

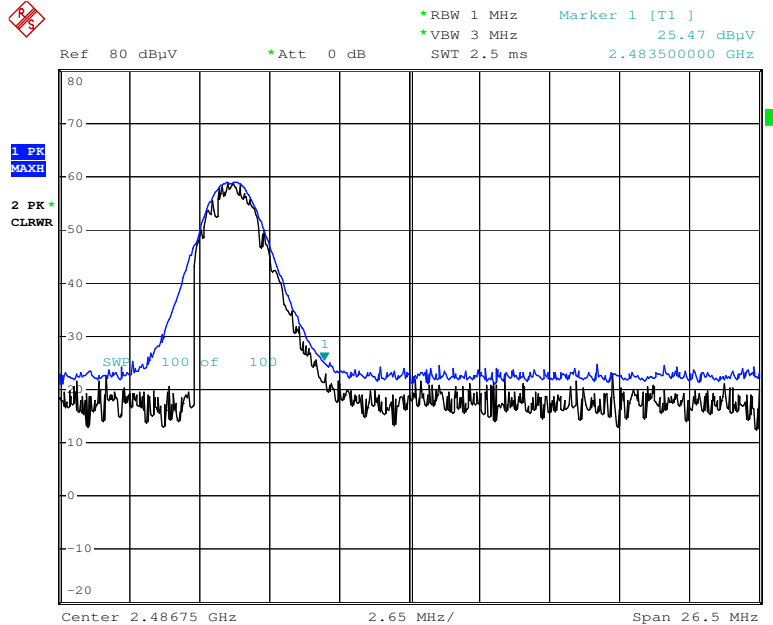

Date: 24.APR.2017 15:29:54

**Note : Only the worst case plots for Radiated Restricted Band Edges.**

### 9.6.4 RECEIVER SPURIOUS EMISSIONS

**ISED Rule(s):** RSS-GEN  
**Test Requirements:** Blow the table  
**Operating conditions:** Under normal test conditions  
**Method of testing:** Radiated

**S/A. Settings:** F < 1 GHz: RBW: 120 kHz, VBW: 300 kHz (Quasi Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
**Mode of operation:** Receive

Frequency (MHz)	Field Strength (microvolts/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

**Operation Mode: Receive:**

30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No critical peaks found							

Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB $\mu$ V	dB /m	dB	(H/V)	dB $\mu$ V/m	dB $\mu$ V/m	dB
No critical peaks found							

## 9.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ **RESULT PLOTS**

**Conducted Emissions (Line 1)**

EMI Auto Test(10)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: NX-3220-K3  
 Manufacturer: JVC KENWOOD  
 Test Site: SHIELD ROOM  
 Operating Conditions: BT MODE

FCC CLASS B

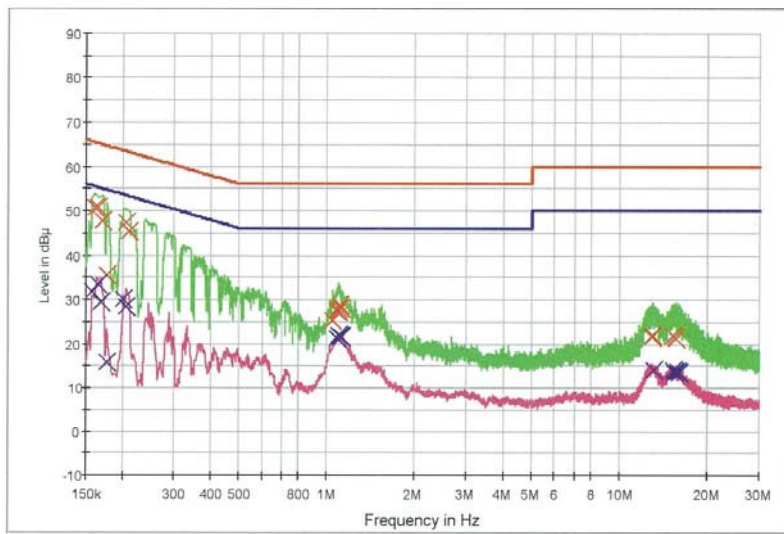

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      X Final Result 1-QPK      X Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	50.7	9.000	Off	L1	9.6	14.7	65.5
0.164000	50.5	9.000	Off	L1	9.6	14.7	65.3
0.170000	47.5	9.000	Off	L1	9.6	17.4	65.0
0.176000	35.5	9.000	Off	L1	9.6	29.2	64.7
0.206000	47.1	9.000	Off	L1	9.6	16.2	63.4
0.210000	45.4	9.000	Off	L1	9.6	17.8	63.2
1.050000	25.2	9.000	Off	L1	9.7	30.8	56.0
1.086000	27.4	9.000	Off	L1	9.7	28.6	56.0
1.090000	27.2	9.000	Off	L1	9.7	28.8	56.0
1.096000	27.9	9.000	Off	L1	9.7	28.1	56.0
1.106000	28.6	9.000	Off	L1	9.7	27.4	56.0
1.120000	27.8	9.000	Off	L1	9.7	28.2	56.0
12.898000	21.7	9.000	Off	L1	10.2	38.3	60.0
12.982000	21.6	9.000	Off	L1	10.2	38.4	60.0
15.286000	21.9	9.000	Off	L1	10.3	38.1	60.0
15.300000	22.0	9.000	Off	L1	10.3	38.0	60.0
15.458000	21.5	9.000	Off	L1	10.3	38.5	60.0
15.540000	21.1	9.000	Off	L1	10.3	38.9	60.0

2017-04-20

오후 6:59:06



EMI Auto Test(10)

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	31.8	9.000	Off	L1	9.6	23.8	55.6
0.164000	33.4	9.000	Off	L1	9.6	21.9	55.3
0.168000	29.4	9.000	Off	L1	9.6	25.6	55.1
0.176000	15.6	9.000	Off	L1	9.6	39.0	54.7
0.202000	30.0	9.000	Off	L1	9.6	23.6	53.5
0.206000	28.3	9.000	Off	L1	9.6	25.1	53.4
1.080000	21.2	9.000	Off	L1	9.7	24.8	46.0
1.086000	21.3	9.000	Off	L1	9.7	24.7	46.0
1.096000	21.8	9.000	Off	L1	9.7	24.2	46.0
1.104000	21.7	9.000	Off	L1	9.7	24.3	46.0
1.108000	21.5	9.000	Off	L1	9.7	24.5	46.0
1.120000	21.5	9.000	Off	L1	9.7	24.5	46.0
13.046000	13.9	9.000	Off	L1	10.2	36.1	50.0
15.286000	14.1	9.000	Off	L1	10.3	35.9	50.0
15.458000	13.6	9.000	Off	L1	10.3	36.4	50.0
15.466000	13.5	9.000	Off	L1	10.3	36.5	50.0
15.694000	13.7	9.000	Off	L1	10.3	36.3	50.0
15.942000	13.2	9.000	Off	L1	10.3	36.8	50.0

2017-04-20

오후 6:59:06

**Conducted Emissions (Line 2)**

EMI Auto Test(10)


1 / 2

**HCT TEST Report**

**Common Information**

EUT: NX-3220-K3  
 Manufacturer: JVC KENWOOD  
 Test Site: SHIELD ROOM  
 Operating Conditions: BT MODE

FCC CLASS B

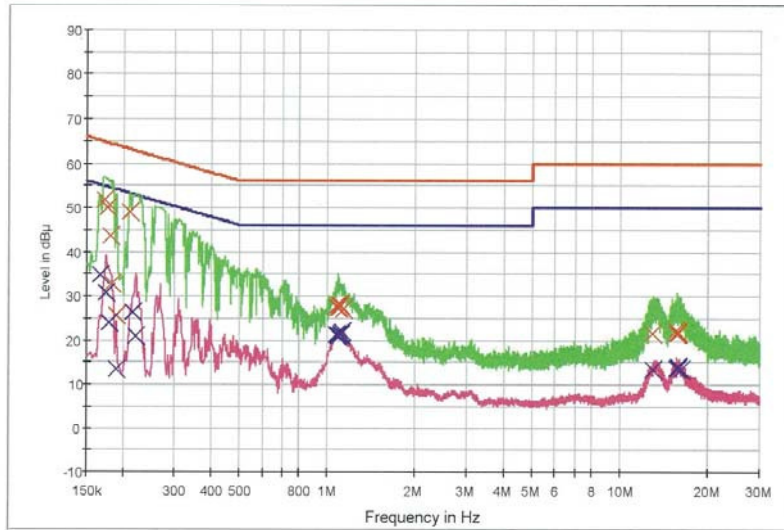

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.172000	51.8	9.000	Off	N	9.6	13.1	64.9
0.176000	50.1	9.000	Off	N	9.6	14.6	64.7
0.180000	43.4	9.000	Off	N	9.6	21.1	64.5
0.184000	32.8	9.000	Off	N	9.6	31.5	64.3
0.190000	25.7	9.000	Off	N	9.6	38.3	64.0
0.210000	48.9	9.000	Off	N	9.6	14.3	63.2
1.070000	27.5	9.000	Off	N	9.7	28.5	56.0
1.088000	27.2	9.000	Off	N	9.7	28.8	56.0
1.092000	27.9	9.000	Off	N	9.7	28.1	56.0
1.100000	27.4	9.000	Off	N	9.7	28.6	56.0
1.112000	27.9	9.000	Off	N	9.7	28.1	56.0
1.140000	26.9	9.000	Off	N	9.7	29.1	56.0
12.984000	21.5	9.000	Off	N	10.2	38.5	60.0
15.518000	22.3	9.000	Off	N	10.3	37.7	60.0
15.608000	21.6	9.000	Off	N	10.3	38.4	60.0
15.690000	21.5	9.000	Off	N	10.3	38.5	60.0
15.722000	21.5	9.000	Off	N	10.3	38.5	60.0
15.730000	21.9	9.000	Off	N	10.3	38.1	60.0

2017-04-20

오후 6:49:00

EMI Auto Test(10)

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	34.9	9.000	Off	N	9.6	20.3	55.2
0.174000	30.7	9.000	Off	N	9.6	24.0	54.8
0.178000	23.7	9.000	Off	N	9.6	30.8	54.6
0.190000	13.3	9.000	Off	N	9.6	40.8	54.0
0.216000	26.1	9.000	Off	N	9.6	26.9	53.0
0.220000	20.9	9.000	Off	N	9.6	32.0	52.8
1.070000	21.1	9.000	Off	N	9.7	24.9	46.0
1.084000	21.0	9.000	Off	N	9.7	25.0	46.0
1.088000	21.0	9.000	Off	N	9.7	25.0	46.0
1.102000	21.3	9.000	Off	N	9.7	24.7	46.0
1.110000	21.5	9.000	Off	N	9.7	24.5	46.0
1.118000	21.9	9.000	Off	N	9.7	24.1	46.0
12.984000	13.4	9.000	Off	N	10.2	36.6	50.0
15.519000	13.8	9.000	Off	N	10.3	36.2	50.0
15.608000	13.7	9.000	Off	N	10.3	36.3	50.0
15.722000	13.9	9.000	Off	N	10.3	36.1	50.0
15.730000	13.9	9.000	Off	N	10.3	36.1	50.0
16.064000	13.5	9.000	Off	N	10.3	36.5	50.0

2017-04-20

오후 6:49:00

**10. LIST OF TEST EQUIPMENT****10.1 LIST OF TEST EQUIPMENT(Conducted Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/23/2016	Annual	100073
Rohde & Schwarz	ESCI / Test Receiver	12/23/2016	Annual	100584
Agilent	N9020A / Signal Analyzer	06/24/2016	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/30/2016	Annual	MY49431210
Agilent	N1911A / Power Meter	09/28/2016	Annual	MY45101406
Agilent	N1921A / Power Sensor	08/24/2016	Annual	MY55220026
Agilent	87300B / Directional Coupler	11/23/2016	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/14/2016	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	07/07/2016	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/15/2016	Annual	07560
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2016	Annual	100422

**10.2 LIST OF TEST EQUIPMENT(Radiated Test)**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Rohde & Schwarz	Loop Antenna	02/23/2016	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	09/03/2015	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	09/10/2016	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/23/2016	Annual	101068-SZ
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/24/2016	Annual	8
Wainwright Instruments	WHFX7.0/18G-8SS / High Pass Filter	05/13/2016	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	07/06/2016	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/24/2017	Annual	2
Agilent	8493C-10 / Attenuator(10 dB)	08/11/2016	Annual	76649
CERNEX	CBLU1183540 / Power Amplifier	07/15/2016	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/15/2016	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/23/2017	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	07/11/2016	Annual	25956
TESCOM	TC-3000 / Bluetooth Tester	03/31/2017	Annual	3000C000276