



TEST REPORT

REGULATION : FCC Part 22, 74, 90
 RSS-119 Issue 12

Applicant	Testing Laboratory
JVCKENWOOD Corporation 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan Tel.: +81 45 939 6254 Fax.: +81 45 939 6261	Intertek Japan K.K. Kashima Laboratory URL: http://www.japan.intertek-etlsemko.com (No.12 Test site) 298-6 Sada, Kashima, Ibaraki 314-0027 Japan Tel. +81 299 82 8464

Equipment type	UHF TRANSCEIVER
Trademark	KENWOOD
FCC Model(s)	NX-1800H-K2
HVIN (ISED)	NX-1800H-K2
PMN (ISED)	NX-1800H-K2
Serial No.	001
FCC ID	K44517100
ISED CN and UPN	282F-517100
Test Result	Complied
Report Number	22020112JKA-001
Original Issue Date	July 08, 2022

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Approved by

Tested by

Hideaki Kosemura
 [Technical Manager]

Koichi Wagatsuma
 [Engineer]



The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

*NVLAP accreditation are valid for RSS-119.
 FCC Part90, FCC Part74 and FCC Part22 are outside the NVLAP scope.
 This report contains data that are not covered by the NVLAP accreditation.*



*VLAC accreditation are valid for FCC Part90, FCC Part74 and FCC Part22.
 RSS-119 are outside the VLAC scope.
 This report contains data that are not covered by the VLAC accreditation.*

In Accordance with FCC Rules and Regulations, Volume II, Part 2 and 90

Sub-part 2.1033

Applicant and Manufacture Information	
APPLICANT	
Company	: JVCKENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
Contact Person	: Kazuyoshi Akaike
MANUFACTURER	
Company	: JVCKENWOOD Corporation
Address	: 1-16-2, Hakusan, Midori-ku, Yokohama-shi Kanagawa, 226-8525 Japan
(c)(2) FCC ID	
FCC ID	: K44517100
Model number	: NX-1800H-K2
Serial number	: 001
Instruction Manual(S)	
Instruction manual(s)	: Please refer to attached Exhibits F
Type of Emission	
Emission Designation	: 16K0F3E(Wide) 11K0F3E(Narrow) 7K60FXD(Narrow) / 7K60FXE(Narrow) / 7K60F1E(Narrow) / 7K60F1D(Narrow) / 7K60F1W(Narrow) / 7K60FXW(Narrow) 8K30F1E(Narrow) / 8K30F1D(Narrow) / 8K30F7W(Narrow) 4K00F1E(Very Narrow) / 4K00F1D(Very Narrow) / 4K00F7W(Very Narrow) 4K00F2D(Very Narrow)
Frequency range	
Frequency Range	: FCC:406.1 to 470 MHz RSS:406.1 to 430 MHz, 450 to 470 MHz
Power Rating	
Output Power	: 5 to 45 W
Type	: Continuously Variable
Maximum Power Rating	
Output Power	: 45 W
Voltages & currents in all elements in final RF stage, including final transistor or solid-state device	
Collector Current, A	: 13.0 A Maximum
Collector Voltage, Vdc	: DC 13.6 V +/- 15%
Supply Voltage, Vdc	: 13.6 Vdc
Other Information	
Number of Channel	: Zone 128max. Cannels 250 max.(per Zone)
Maximum Deviation	: ± 5 kHz (16K0F3E), ± 2.5 kHz (11K0F3E)
Frequency Stability	: 0.5 ppm
Antenna Impedance	: 50 Ω Norminal
Note	
This information was provided by the Applicant or customer. Intertek doesn't take any responsibility for the information.	

TABLE OF CONTENTS

	Page
SECTION 1. GENERAL INFORMATION	4
SECTION 2. SUMMARY OF TEST RESULT	5
SECTION 3. TEST AND MEASUREMENT DATA	6
SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)	7
SECTION 5. SUPPORT EQUIPMENT	8
SECTION 6. USED CABLE(S)	9
SECTION 7. TEST CONFIGURATION	10
SECTION 8. OPERATING CONDITION	11
SECTION 9. MEASUREMENT UNCERTAINTY	12
SECTION 10. TEST DATA	
10.1 Carrier Output Power (Conducted)	13
10.2 Unwanted Emissions (Transmitter Conducted)	16
10.3 Field Strength of Spurious Radiation	60
10.4 Emission Masks (Occupied Bandwidth)	64
10.5 Transient Frequency Behavior	74
10.6 Audio Frequency Response / Audio Low Pass Filter (Voice Input)	82
10.7 Modulation Limiting	86
10.8 Frequency Stability (Temperature Variation)	90
10.9 Frequency Stability (Voltage Variation)	93
10.10 Necessary Bandwidth and Emission Bandwidth	95
10.11 99% Occupied Bandwidth	97
APPENDIX PHOTOGRAPHS	

SECTION 1. GENERAL INFORMATION

TEST PERFORMED

Location	Kashima No.12 Test Site		
EUT Received	June 17, 2022		
Date of Test	July 01, 2022	to	July 05, 2022
Standard Applied	FCC Part 22, 74, 90 RSS-119 Issue 12		
Measurement Method	ANSI/TIA-603-E-2016 / RSS-119 Issue 12(2015), RSS-Gen Issue 5(2018), A2(2021) ANSI C63.26 2015		
Deviation from Standard(s)	Not applicable		

QUALIFICATIONS OF TESTING LABORATORY (Kashima Lab.)

ACCREDITATION	SCOPE	LAB. CODE	Remarks
VLAC	Wireless / EMC Testing	VLAC-008-1	JAPAN
NVLAP	Wireless Testing	600233-0	USA
FCC	Wireless / EMC Testing	JP0008	USA
ISED	Wireless Testing	JP0008(CABID)	Canada

ABBREVIATIONS

EUT	Equipment Under Test	DoC	Declaration of Conformity
AMN	Artificial Mains Network	ISN	Impedance Stabilization Network
LISN	Line Impedance Stabilization Network	Q-P	Quasi-peak
AMP	Amplifier	AVG	Average
ATT	Attenuator	PK	Peak
ANT	Antenna	Cal	Calibration
BBA	Broadband Antenna	N/A	Not applicable or Not available
DIP	Dipole Antenna	LCD	Liquid-Crystal Display
AE	Associated Equipment	4LEVEL FSK	4LEVEL Frequency Shift Key
GMSK	Gaussian Maximum Shift Key	CW ID	Continuously Repeating bit stream
FM	Frequency Modulation	C4FM	Constant envelope 4 Level FM
PTT	Push to Talk	AFC	Automatic frequency control

Revision Summary

Revised Date	Section	Description of Changes

SECTION 2. SUMMARY OF TEST RESULT

TEST ITEM	FCC Part22	Part74	Part90	ISED RSS-119	RESULTS	Comments
Carrier Output Power (Conducted)	-	74.461	-	2.1046 (a)	5.4	PASS
Unwanted Emissions (Transmitter Conducted)	22.359	-	90.210	2.1051	5.8	PASS
Field Strength of Spurious Radiation	22.359	-	90.210	2.1053 (a)	5.8	PASS
Emission Masks (Occupied Bandwidth)	22.359	74.462	90.210	2.1049 (c) (1)	5.5	PASS
Transient Frequency Behavior	-	-	90.214	-	5.9	PASS
Audio Low Pass Filter (Voice Input)	-	-	-	2.1047 (a)	-	PASS
Audio Frequency Response	-	-	-	2.1047 (a)	-	PASS
Modulation Limiting	-	-	-	2.1047 (b)	-	PASS
Frequency Stability (Temperature Variation)	22.355	74.464	90.213 (a)	2.1055 (a) (1)	5.3	PASS
Frequency Stability (Voltage Variation)	22.355	74.464	90.213 (a)	2.1055 (d) (1)	5.3	PASS
Certification required (FCC Part 90.203(j)(3))	-	-	90.203 (j)(3)	-	-	Complied
Certification required (FCC Part 90.203(j)(4))	-	-	90.203 (j)(4)	-	-	Complied
Certification required (FCC Part 90.203(j)(5))	-	-	90.203 (j)(5)	-	-	Complied
Certification required (FCC Part 90.203(e))	-	-	90.203 (e)	-	-	Complied
99% Occupied Bandwidth	-	-	-	-	5.5	PASS

Limitation on Results

The test result of this report is effective equipment under test itself and under the test configuration described on the report. This test report does not assure that whether the test result taken in other testing laboratory is compatible or reproducible to the test result on this report or not.

Note:

As for the FCC Part 15 Subpart B-Unintentional Radiators, the EUT has been measured and declared as Supplier's Declaration of Conformity (SDoC) by JVCKENWOOD Corporation.

SECTION 3. TEST AND MEASUREMENT DATA

All test and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J and Industry Canada as the following individual parts:

FCC Rule	Test Item	Tested
Part 22	Non Cellular	YES
Part 74	Experimental Radio Auxiliary , Special Broadcast and Other Program Distributional Services	YES
Part 90	Private Land Mobile radio Services	YES

IC Rule	Test Item	Tested
RSS-119	Radio Transmitters and Receivers Operating in the Land Mobile and Fixed Services in the Frequency Range 27.4-960 MHz	YES
RSS-Gen	General Requirements for Compliance of Radio Apparatus	YES

SECTION 4. INFORMATION ABOUT EUT AND SUPPORT EQUIPMENT(S)

This information was provided by the Applicant or customer.
 Intertek doesn't take any responsibility for the information.

4.1 List of System Configuration

Symbol	Item	Model No.	Serial No.	Manufacture	Remarks
A	UHF TRANSCIVER	NX-1800H-K2	001	JVCKENWOOD Corporation	EUT
Power Ratings of EUT :		DC 13.6 V +/- 15%		13.0 A Maximum	
Power Supply :		13.6 Vdc			
Condition of Equipment		Proto type			
Type		Mobile Device			
Suppression Devices		No Modifications by the laboratory were made to the device			

4.2 Port(s)/Connector(s)

Port Name	Connector Type	Connector Pin	Remarks
Microphone	RJ-45	8 pin	
External Speaker	3.5φ	2 pin	
RF Antenna	M	2 pin	
ACC	D-Sub	15 pin	

4.3 Highest Frequency Oscillator(s)/Crystal(s)

Operating Frequency	Board Name	Remarks
940 MHz	Radio	

SECTION 6. USED CABLE(S)

The following cable(s) was used for the test.

Example: Case of Section 10.3Test

No.	Name	Length (m)	Shield	Metal		Remarks
				Connector	Ferrite core	
1	Mic Cable	0.55	No	No		See Note
2	Connection Cable (KCT-60)	0.36	No	Yes		See Note
3	Ignition Sense Cable (KCT-18)	0.26	No	Yes		See Note
4	Speaker Cable	2.20	No	Yes		See Note
5	DC Cable	0.25	No	No		See Note
6	DC Cable	4.00	No	No		See Note
7	AC Cable	2.00	No	No		


Note: This information was provided by the Applicant or customer.
Intertek doesn't take any responsibility for the information.

SECTION 7. TEST CONFIGURATION

Details of Configuration and Connection

Example: Case of Section 10.3Test

* : EUT
□ : Joint Connector

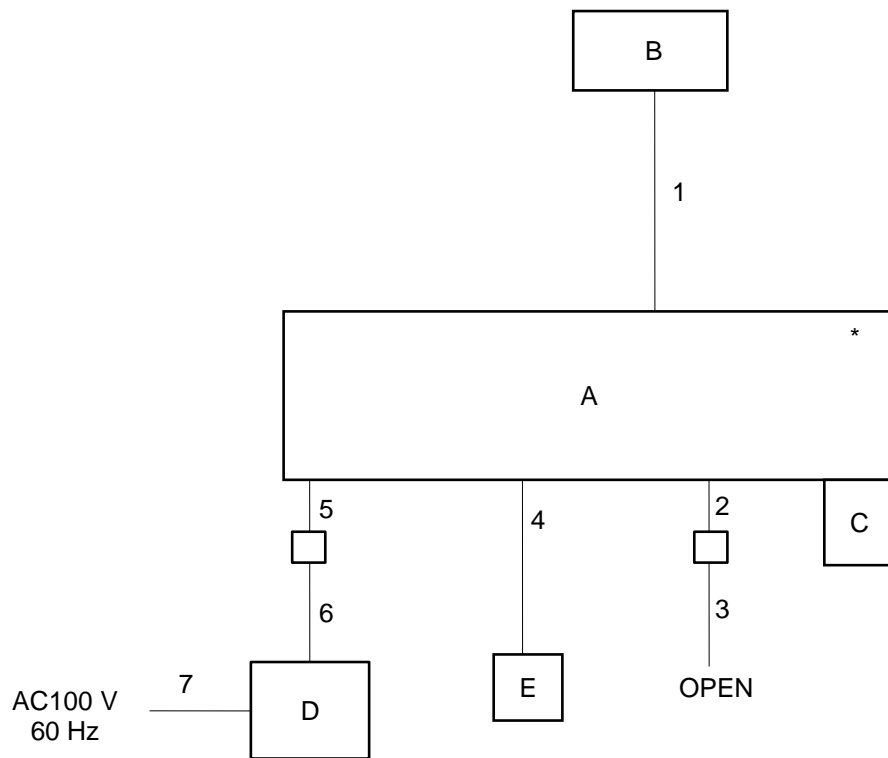

SECTION 8. OPERATING CONDITION


The EUT was operated under the following condition during the test.

8.1 Operating Condition

The test was carried out under Transmit mode.
(FCC: 406.15 MHz, 429.95 MHz, 469.95 MHz)
(RSS: 406.15 MHz, 429.95 MHz, 469.95 MHz)
(High Power : 45W, Low Power : 5W)

8.2 Operating Flow [Transmit mode]

Following operations were performed continuously.

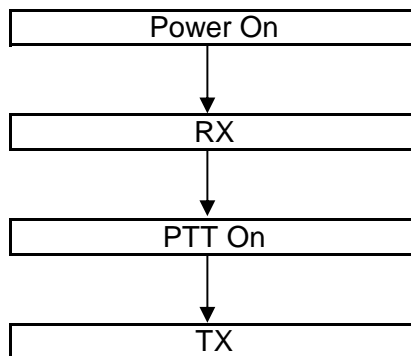

SECTION 9. MEASUREMENT UNCERTAINTY

	U_{lab}	Utia-603-e
Carrier Output Power (Conducted)	+/- 0.18dB ($k = 2$)	+/- 0.59 dB
Unwanted Emissions (Transmitter Conducted)	+/- 1.55 dB ($k = 2$)	+/- 1.1 dB
Field Strength of Spurious Radiation	+/- 3.90dB ($k = 2$)	+/- 3.3 dB
Emission Masks (Occupied Bandwidth)	+/- 0.87dB ($k = 2$)	+/- 2.1 dB
Transient Frequency Behavior	+/- 2.28% ($k = 2$)	+/- 21.6 %
Audio Low Pass Filter (Voice Input)	+/- 0.21dB ($k = 2$)	+/- 1.2 dB
Audio Frequency Response	+/- 0.12dB ($k = 2$)	+/- 1.2 dB
Modulation Limiting	+/- 0.99% ($k = 2$)	+/- 1.0 %
Frequency Stability (Temperature Variation)	+/- 9.93Hz ($k=2$)	+/-34.2 Hz
Frequency Stability (Voltage Variation)	+/- 9.93Hz ($k=2$)	+/-34.2 Hz
Bandwidth	+/- 1.00% ($k = 2$)	-

SECTION 10. TEST DATA

10.1 Carrier Output Power (Conducted)

REGULATIONS	: FCC Part 2 Section 1046 (a) RSS-119 Section 5.4
TEST METHOD/GUIDE	: ANSI/TIA-603-E Section 2.2.1.2 / RSS-119 Section 4.1 ANSI C63.26 Section 5.2

Test Procedure

- The EUT and test equipment were set up as shown on the following page.
- The EUT was conducted to a resistive coaxial attenuator of normal load impedance.
 $RF\ Power\ (dBm) = Power\ Meter\ reading\ (dBm) + Attenuator\ Loss\ (dB) + Cable\ Loss\ (dB)$
 $RF\ Power\ (W) = 10^{(RF\ Power\ (dBm)/10)}/1000$
- Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that necessary to produce 50 % of rated system deviation.(Only as for the test of RSS)


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal. Interval	Effective period
1	Power Meter	Hewlett Packard	E4418B	GB38410265	1Y	Aug. 26, 22
2	Power Sensor	Hewlett Packard	8482A	US37292237	1Y	Aug. 26, 22
3	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	1Y	Sep. 08, 22
4	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	1Y	Sep. 08, 22
5	Modulation	Hewlett Packard	8901B	3403A04852	1Y	Dec. 14, 22
6	Audio Generator	Anritsu	MG443B	M70150	1Y	Jun. 12, 23
7	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
8	Digital Multi Meter	FLUKE	8846A	9642018	1Y	Jun. 30, 23
9	JIG	HP	ProBook 430 G3	PJPNYOKL01 47	None	None


Measuring Cables

No.	Cable	Manufacturer	Model No.	Serial No.	Cal. Interval	Effective period
W2	Balance Cable	Nicoon	3D-2V	KSR00092	1Y	Sep. 09, 22
W3	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C03	1Y	Jan. 19, 23

Measuring Equipment Configuration

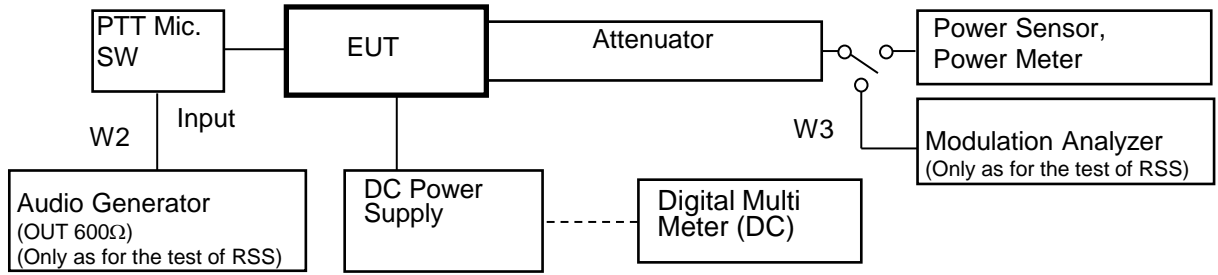

<DMR and CW ID Modulation Case>

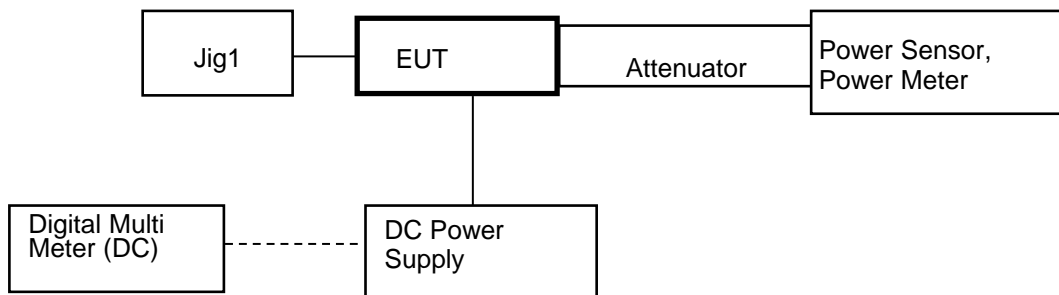

Test Results

Test date	Jul. 01, 2022	
Location	Kashima No.12 Test Site	
temperature	25.5	[degree C]
Humidity Variation	47.0	[%]
Atmospheric Pressure	101.1	[kPa]
Test Engineer	Koichi Wagatsuma	

Test was carried out for all the Authorized Bandwidth.
 State the worst case (below).

No.	Frequency (MHz)	Band	Setting	RF Power (W)
1	406.15 (FCC/RSS)	Low	High Power	45
2	429.95 (FCC/RSS)	Middle	High Power	45
3	469.95 (FCC/RSS)	High	High Power	45
4	406.15 (FCC/RSS)	Low	Low Power	5
5	429.95 (FCC/RSS)	Middle	Low Power	5
6	469.95 (FCC/RSS)	High	Low Power	5

RF Power: Maximum reading

10.2 Unwanted Emissions (Transmitter Conducted)

REGULATIONS	: FCC Part 2 Section 1051, Part 22 Section 359, Part 90 Section 210 RSS-119 Section 5.8
TEST METHOD/GUIDE	: ANSI/TIA-603-E Section 2.2.13.2 ANSI C63.26 Section 5.7

Test Procedure

- 1 The EUT and test equipment were set up as shown on the following page.
- 2 Modulate the transmitter with a 2.5 kHz sine wave at an input Level of 16 dB greater than that than that necessary to produce 50 % of rated system deviation.
- 3 Adjust the spectrum analyzer for the following setting:
 - a) RBW : 100 kHz (< 1 GHz), 1 MHz (> 1 GHz).
 - b) VBW : 300 kHz (< 1 GHz), 3 MHz (> 1 GHz).
 - c) Detector mode : Average power (FM Modulation) , Positive peak with peak hold (Digital Modulation)
- 4 The emissions were measured for the worst case as follows:
 - a) : within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - b) : from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.


Measuring Equipments

No.	Equipment	Manufacture	Model No.	Serial No.	Cal. Interval	Effective period
1	Attenuator (20dB)	Aeroflex/Wenshel	66-20-34	BY4357	1Y	Sep. 08, 22
2	Attenuator (30dB)	Weinschel	WA-29-30-34	8923	1Y	Sep. 08, 22
3	Highpass Filter	Anritsu	MP526D	6200220657	1Y	Jun. 28, 23
4	Modulation Analyzer	Hewlett Packard	8901B	3403A04852	1Y	Dec. 14, 22
5	Signal Generator	Rohde&Schwarz	SMB 100A	105709	1Y	Jun. 05, 23
6	Audio Generator	Anritsu	MG443B	M70150	1Y	Jun. 12, 23
7	Spectrum Analyzer	Agilent	N9030A	US51350220	1Y	Aug. 31, 22
8	DC Power Supply	Daiichi denpa kogyo	GZV4000	90290931	None	None
9	Digital Multi Meter	FLUKE	8846A	9642018	1Y	Jun. 30, 23
10	JIG	HP	ProBook 430 G3	PJPNYOKL0147	None	None

Measuring Cables


No.	Cable	Manufacture	Model No.	Serial No.	Cal. Interval	Effective period
W3	Balance Cable	Nicoon	3D-2V	KSR00092	1Y	Sep. 09, 22
W4	Coaxial Cable	Pacific custom	RG-58 C/U	AM90C03	1Y	Jan. 19, 23
W2	Coaxial Cable	Suhner	SUCOFLEX104	F0000019	1Y	Mar. 24, 23

Measuring Equipment Configuration

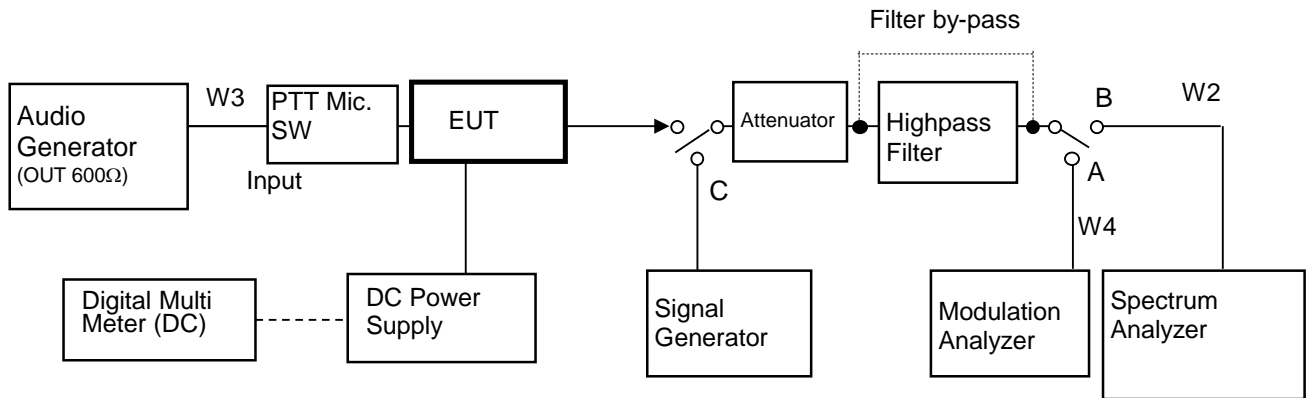

Note: Configuration of other Modulation test is composed without the Audio Generator.

<DMR and CW ID Modulation Case>

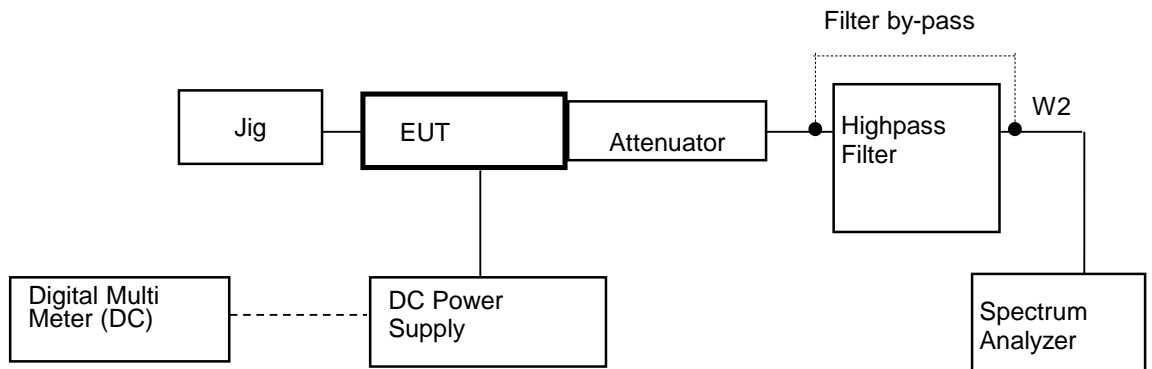

Test Results

Test date	Jul. 01, 2022
Location	Kashima No.12 Test Site
temperature	25.5
Humidity Variation	47.0
Atmospheric Pressure	101.1
Test Engineer	Koichi Wagatsuma

Test was carried out for all the frequency band of section 10.1
 State the worst case (below).

State : High Power / Authorized Bandwidth 20 kHz (16K0F3E)

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask B Limit (dBc)	Margin (dB)
1	406.15 (FCC/RSS)	Low	812.30	-36.95	-83.48	-59.5	24.0
2	429.95 (FCC/RSS)	Middle	859.90	-37.29	-83.82	-59.5	24.3
3	469.95 (FCC/RSS)	High	939.90	-38.43	-84.96	-59.5	25.5

There is the margin of 20dB over except for the above points.

Mask B Limit(dBc)=- $(43+10\log(P))$
 Correct Level (dBm) = Substitute SG Level (dBm)
 Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$
 P = Carrier Level (W)
 " - " = Measurement Limit


State : Low Power / Authorized Bandwidth 20 kHz (16K0F3E)

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask B Limit (dBc)	Margin (dB)
1	406.15 (FCC/RSS)	Low	812.30	-42.24	-79.22	-50.0	29.2
2	429.95 (FCC/RSS)	Middle	859.90	-42.08	-79.07	-50.0	29.1
3	469.95 (FCC/RSS)	High	939.90	-42.27	-79.26	-50.0	29.3

There is the margin of 20dB over except for the above points.


Mask B Limit(dBc)=- $(43+10\log(P))$
 Correct Level (dBm) = Substitute SG Level (dBm)
 Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$
 P = Carrier Level (W)
 " - " = Measurement Limit

16K0F3E
9 KHz to Fc

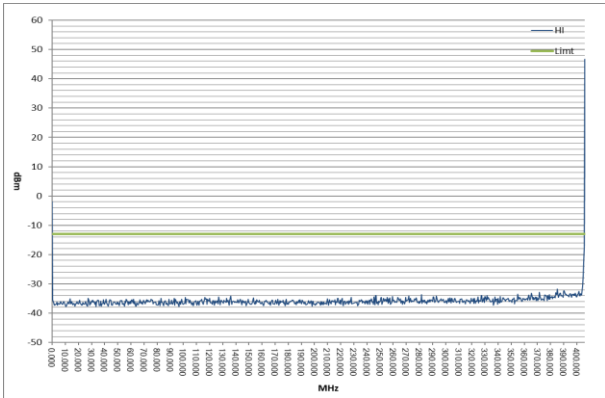


Hi Power


Fc to 2Fc

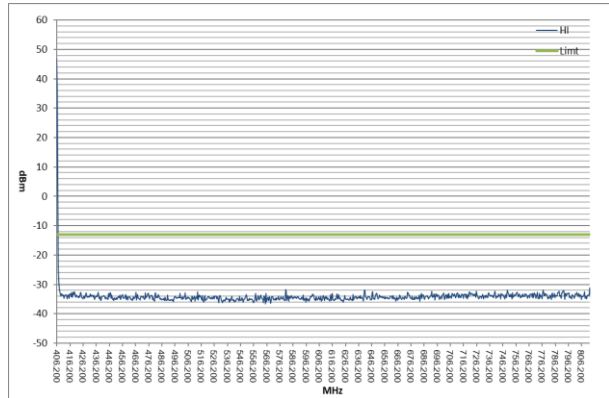


2Fc to 1GHz

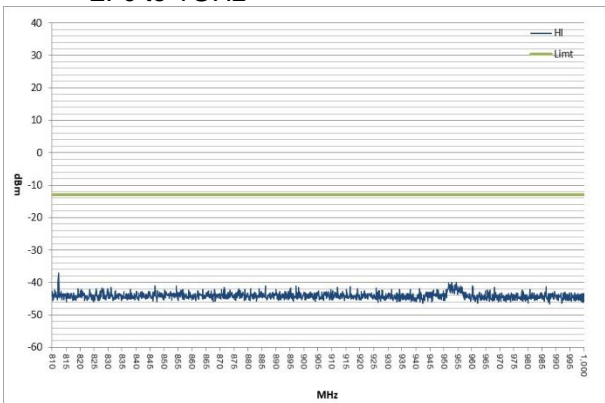


1GHz to 2GHz

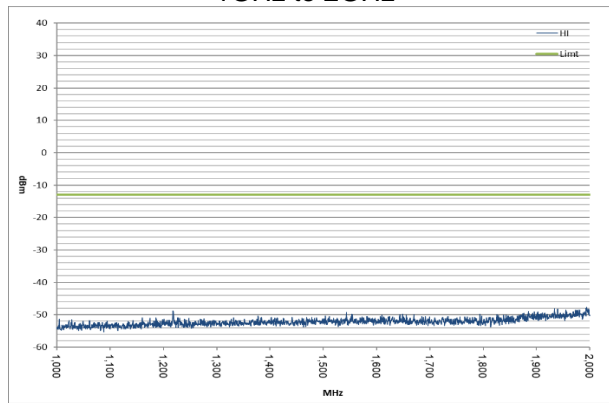

2GHz to 10Fc

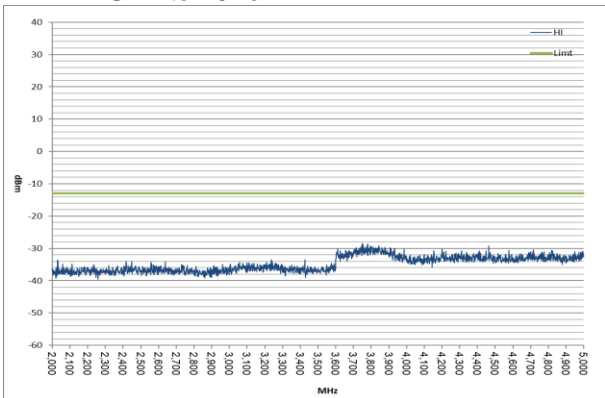


16K0F3E
9 KHz to Fc

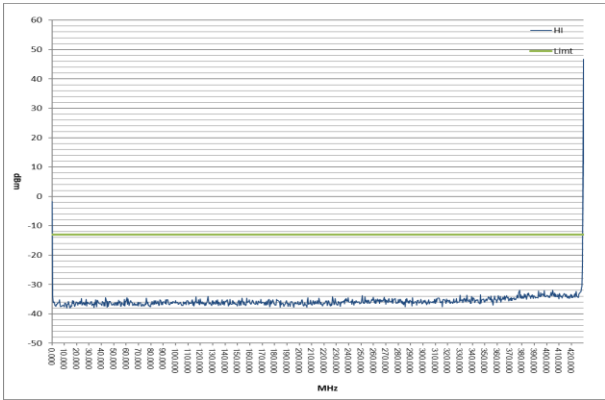


Hi Power


Fc to 2Fc

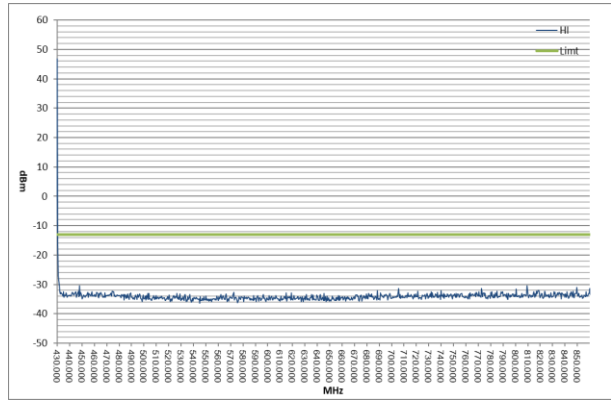


2Fc to 1GHz

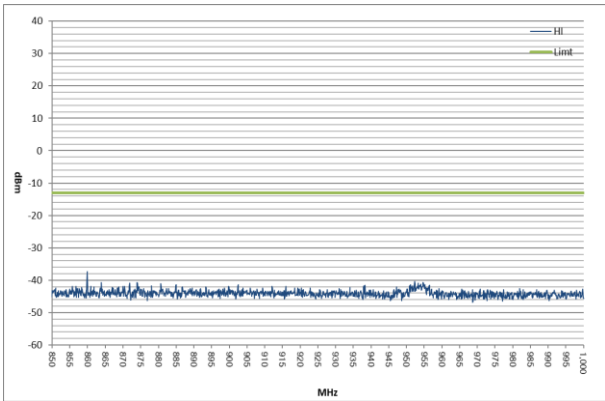


1GHz to 2GHz

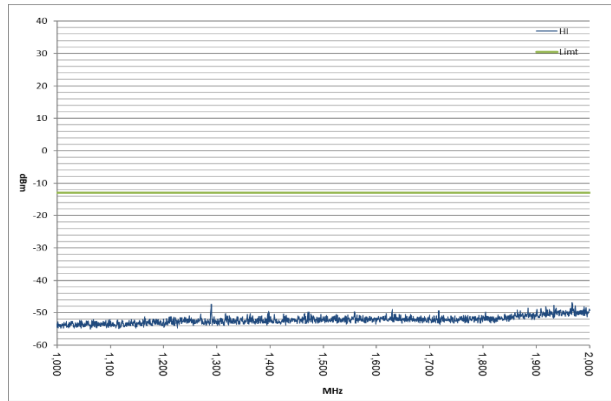

2GHz to 10Fc

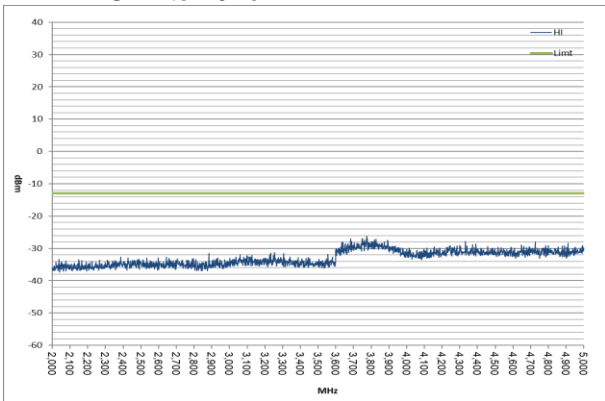


16K0F3E
9 KHz to Fc

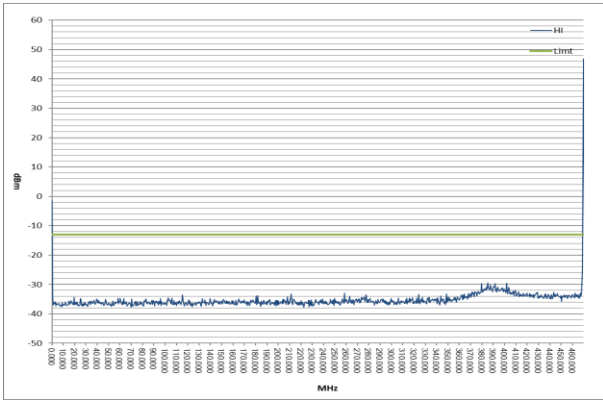


Hi Power


Fc to 2Fc

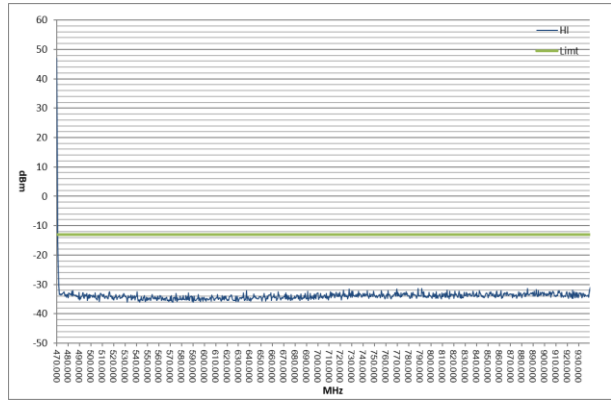


2Fc to 1GHz

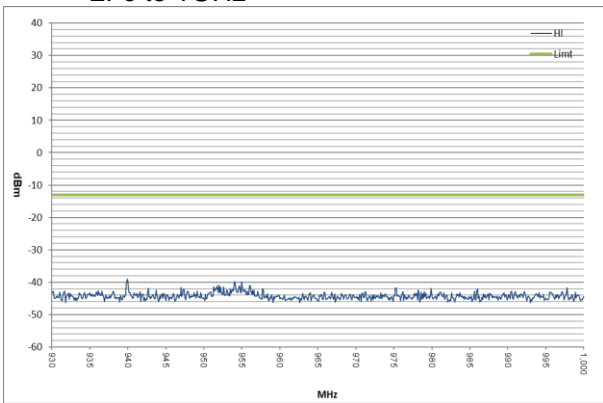


1GHz to 2GHz

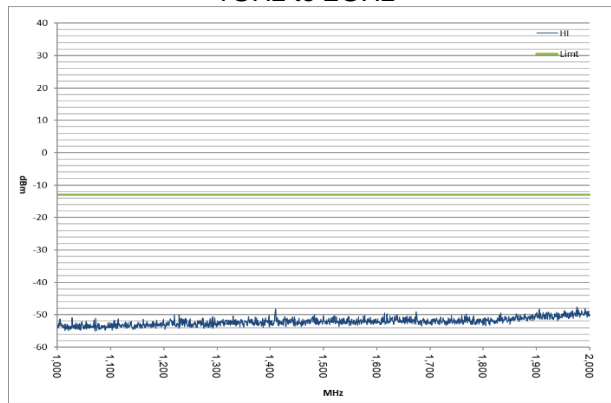

2GHz to 10Fc

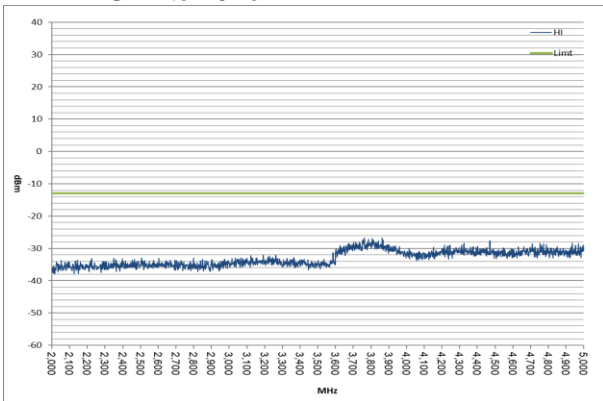


16K0F3E
9 KHz to Fc

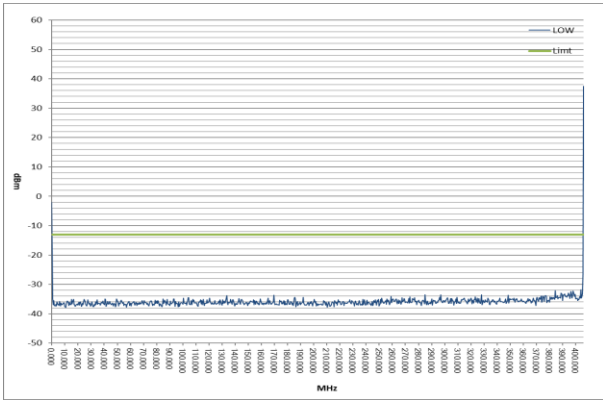


Low Power


Fc to 2Fc

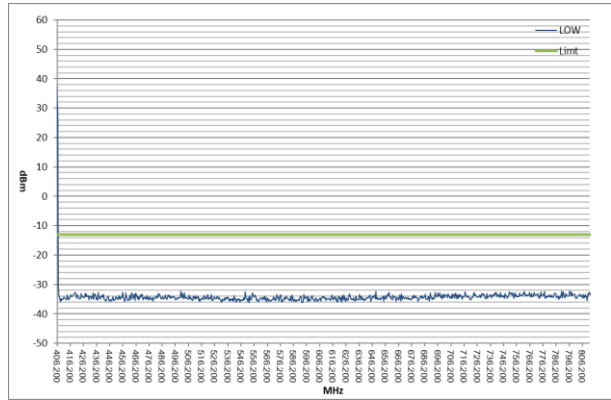


2Fc to 1GHz

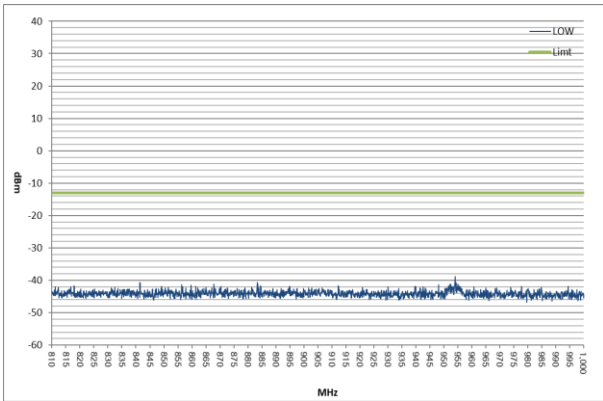


1GHz to 2GHz

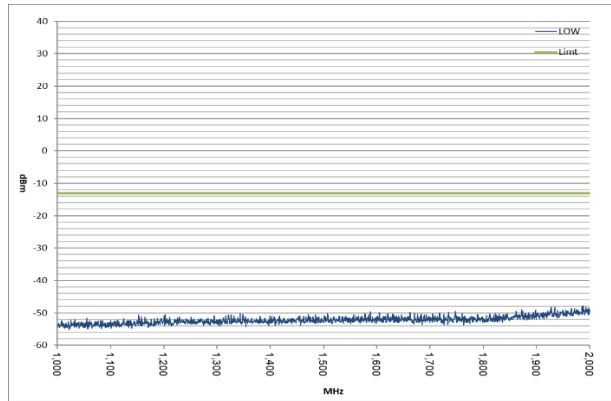

2GHz to 10Fc

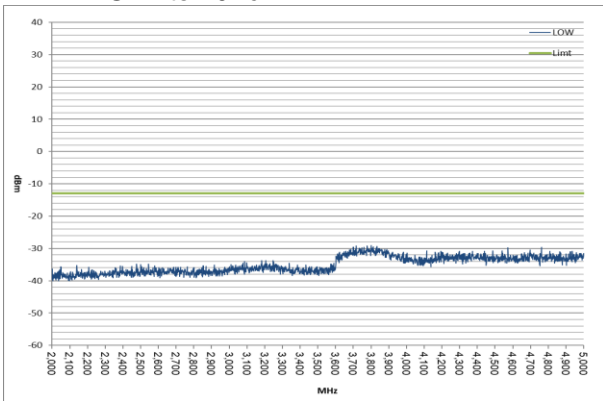


16K0F3E
9 KHz to Fc

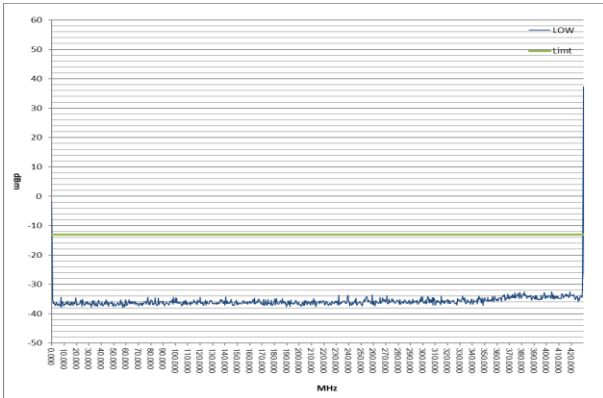


Low Power


Fc to 2Fc

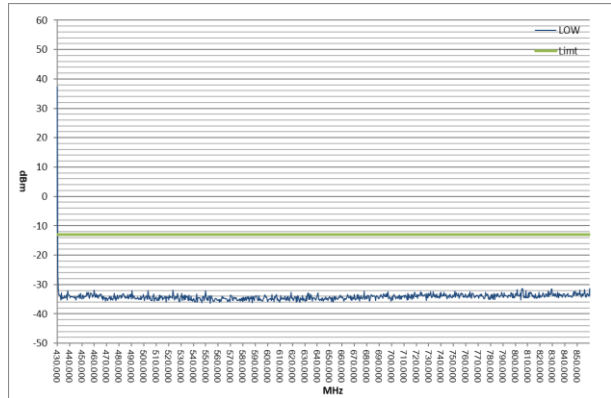


2Fc to 1GHz

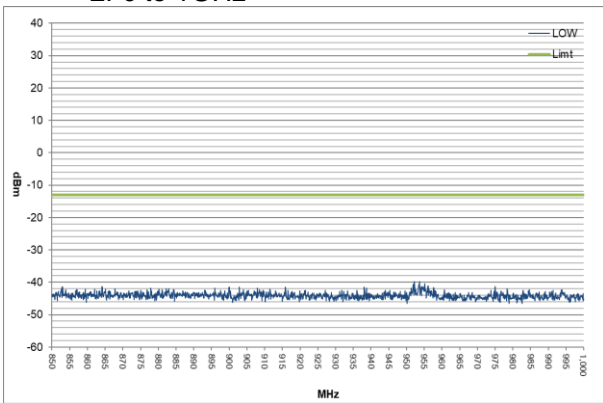


1GHz to 2GHz

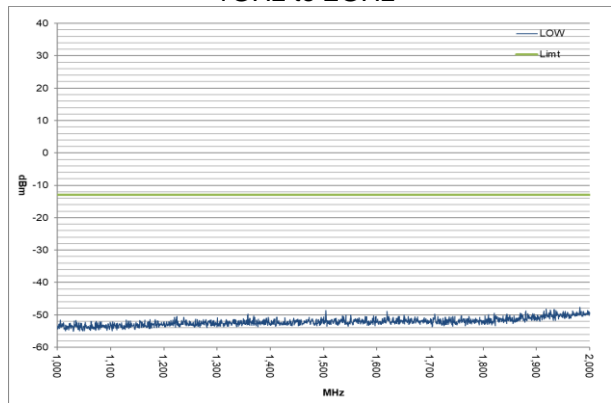

2GHz to 10Fc

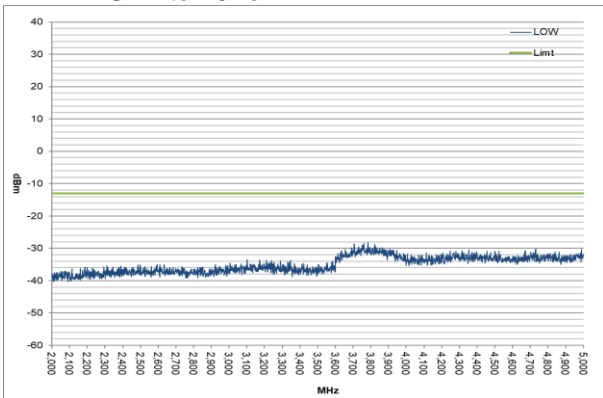


16K0F3E
9 KHz to Fc

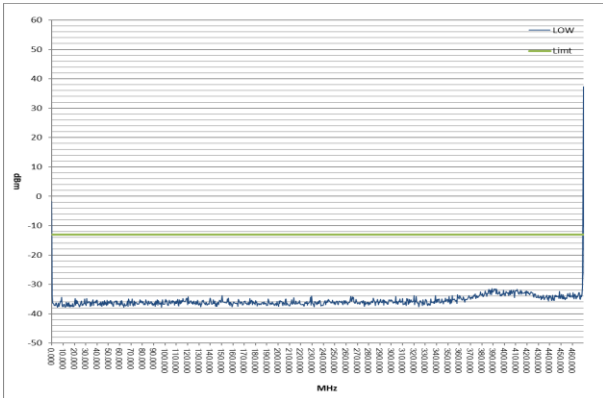


Low Power


Fc to 2Fc

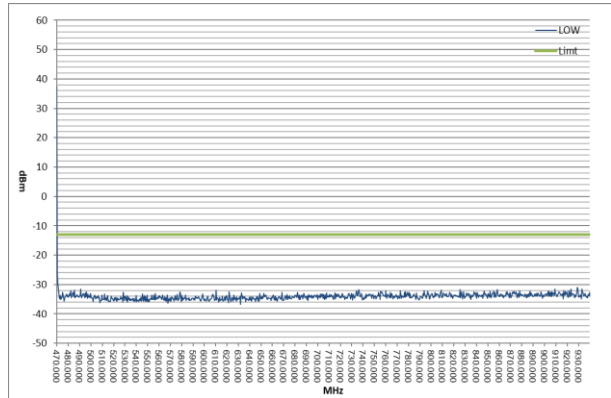


2Fc to 1GHz

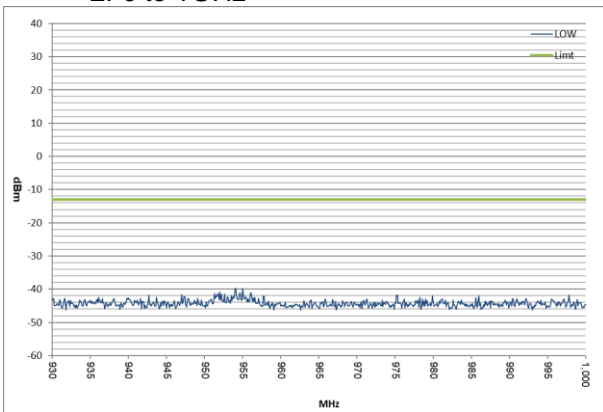

1GHz to 2GHz

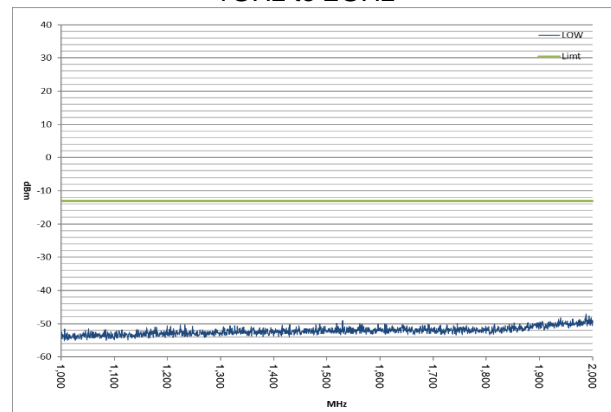

2GHz to 10Fc

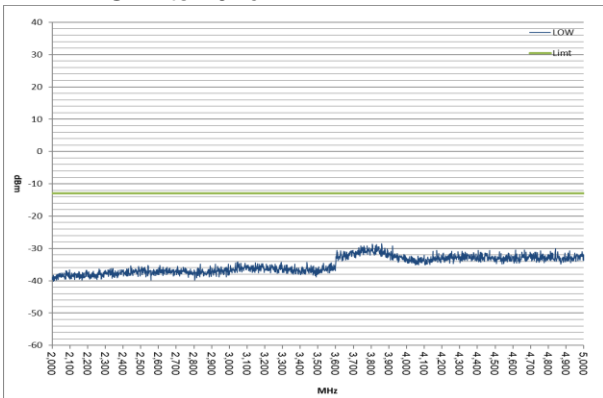

State : High Power / Authorized Bandwidth 11.25 kHz (11K0F3E)

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	406.15 (FCC/RSS)	Low	812.30	-37.45	-83.98	-66.5	17.5
2	429.95 (FCC/RSS)	Middle	859.90	-37.33	-83.86	-66.5	17.4
3	469.95 (FCC/RSS)	High	939.90	-37.92	-84.45	-66.5	18.0

There is the margin of 20dB over except for the above points.

Mask D Limit (dBc) = $-(50+10\log(P))$
 Correct Level (dBm) = Substitute SG Level (dBm)
 Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$
 P = Carrier Level (W)
 " - " = Measurement Limit


State : Low Power / Authorized Bandwidth 11.25 kHz (11K0F3E)

No.	Tuned Frequency (MHz)	Band	Spurious Frequency (MHz)	Correct Level (dBm)	Emission Level (dBc)	Mask D Limit (dBc)	Margin (dB)
1	406.15 (FCC/RSS)	Low	812.30	-42.94	-79.92	-57.0	22.9
2	429.95 (FCC/RSS)	Middle	859.90	-42.04	-79.03	-57.0	22.0
3	469.95 (FCC/RSS)	High	939.90	-42.27	-79.26	-57.0	22.3

There is the margin of 20dB over except for the above points.


Mask D Limit (dBc) = $-(50+10\log(P))$
 Correct Level (dBm) = Substitute SG Level (dBm)
 Emission Level (dBc) = Correct Level (dBm) - $10\log(P*1000)$
 P = Carrier Level (W)
 " - " = Measurement Limit

11K0F3E
9 KHz to Fc

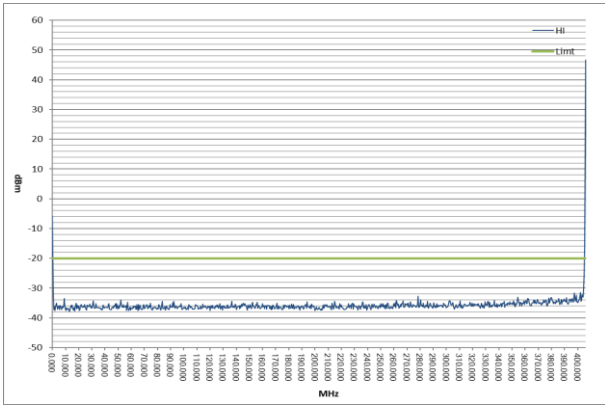


Hi Power


Fc to 2Fc

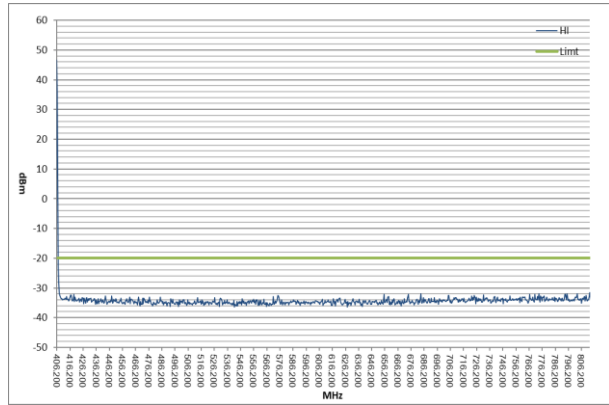


2Fc to 1GHz

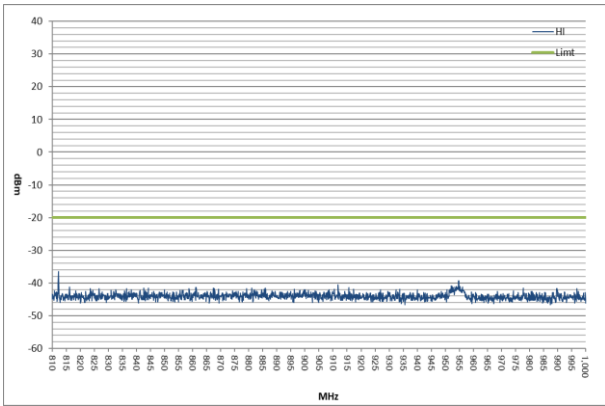


1GHz to 2GHz

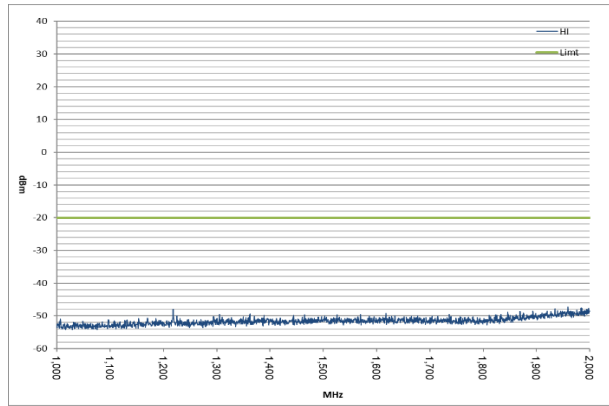

2GHz to 10Fc

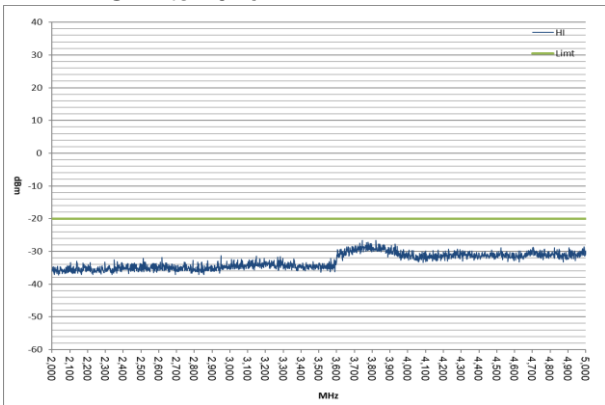


11K0F3E
9 KHz to Fc

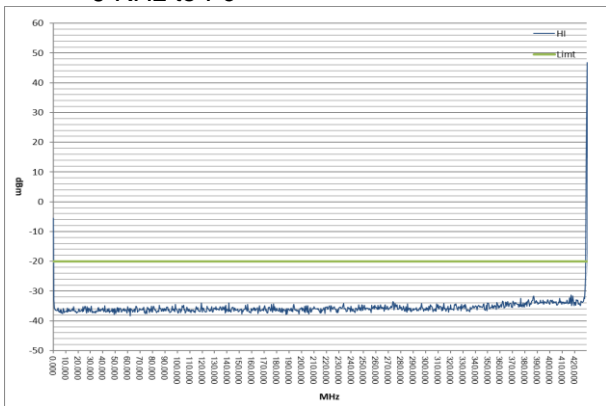


Hi Power


Fc to 2Fc

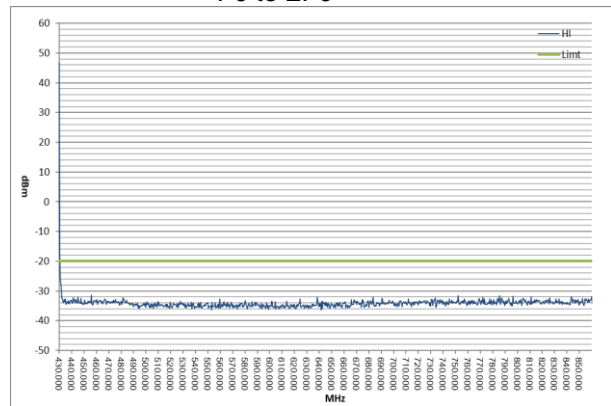


2Fc to 1GHz

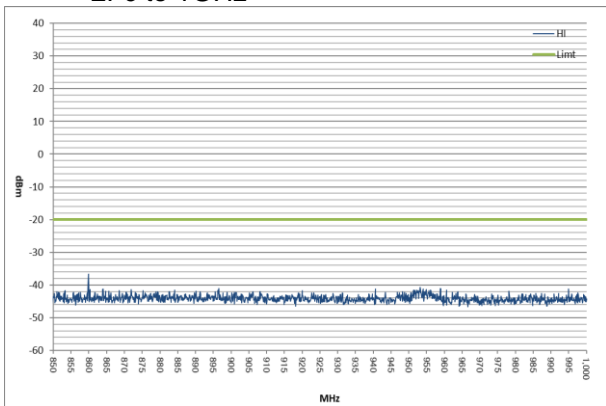


1GHz to 2GHz

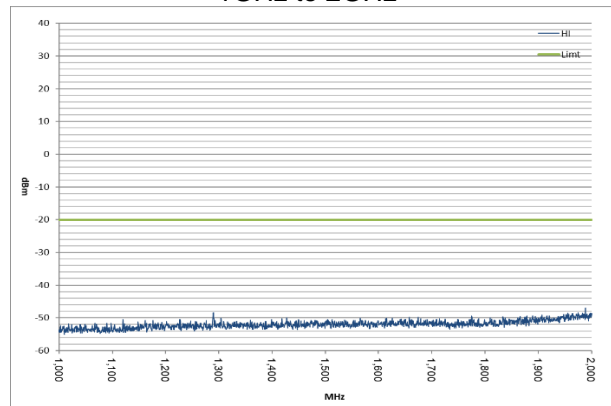

2GHz to 10Fc

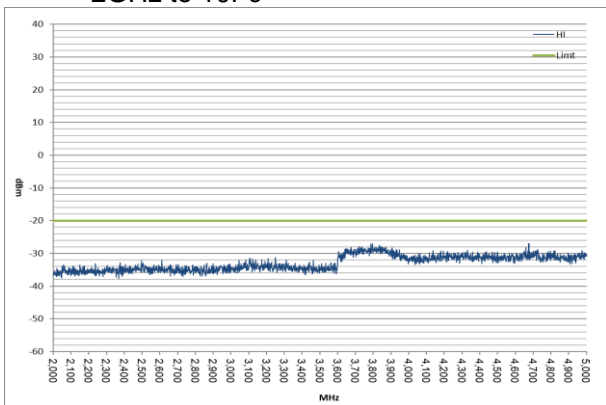


11K0F3E
9 KHz to Fc

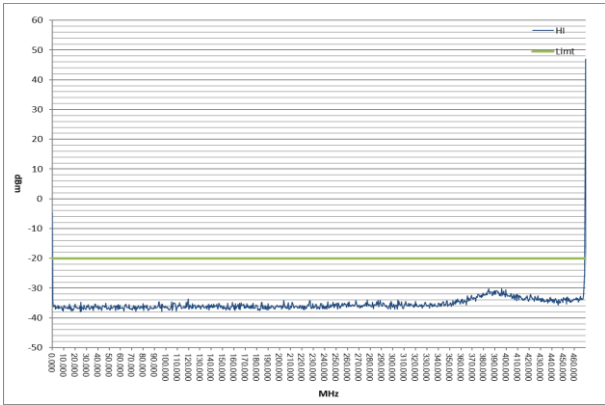


Hi Power


Fc to 2Fc

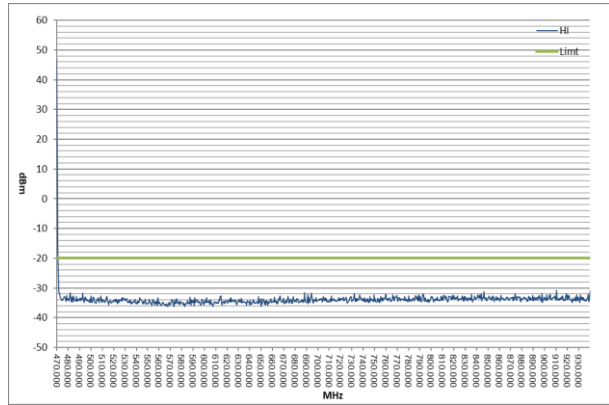


2Fc to 1GHz

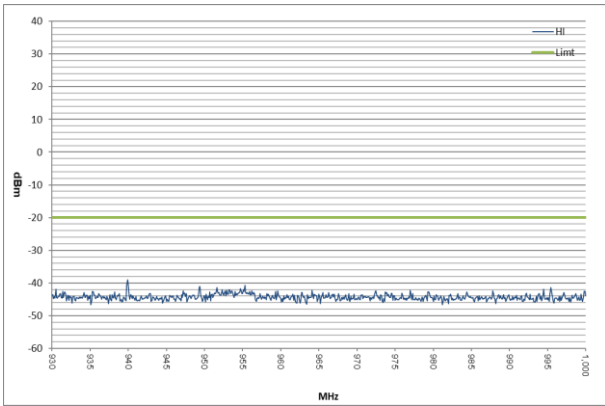


1GHz to 2GHz

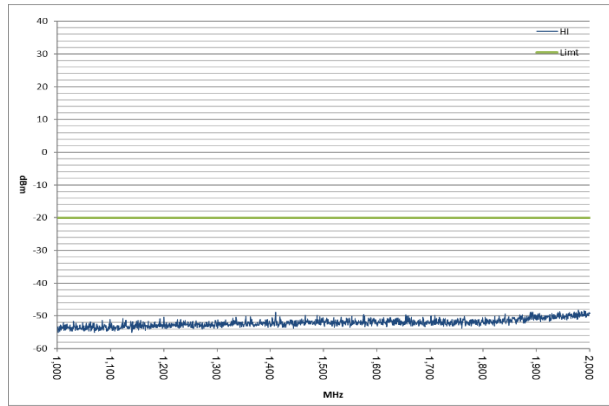

2GHz to 10Fc

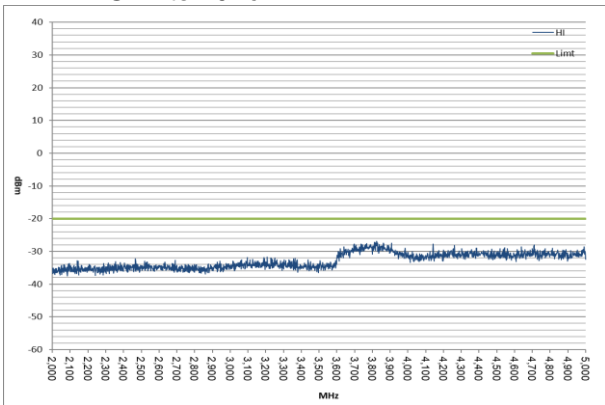


11K0F3E
9 KHz to Fc

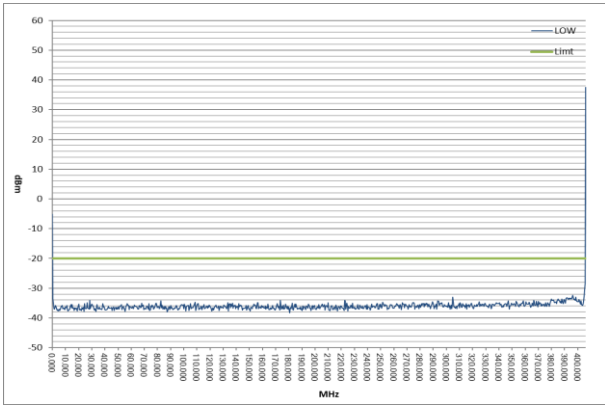


Low Power


Fc to 2Fc

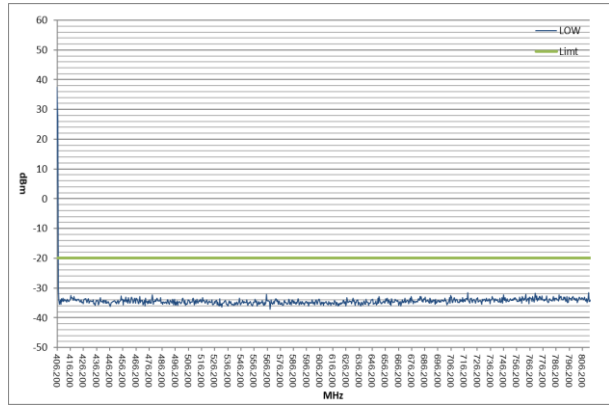


2Fc to 1GHz

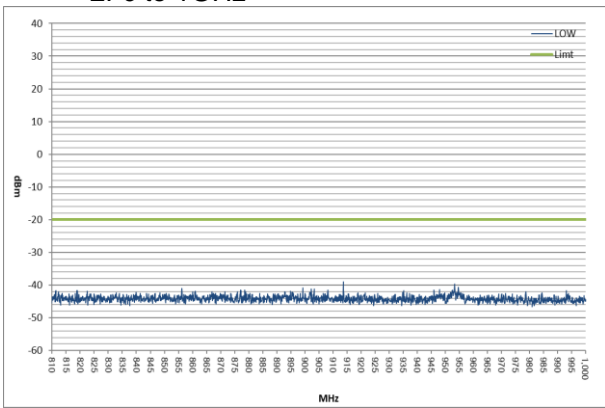


1GHz to 2GHz

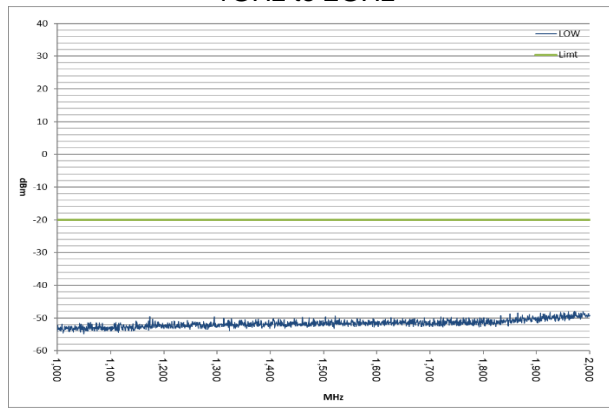

2GHz to 10Fc

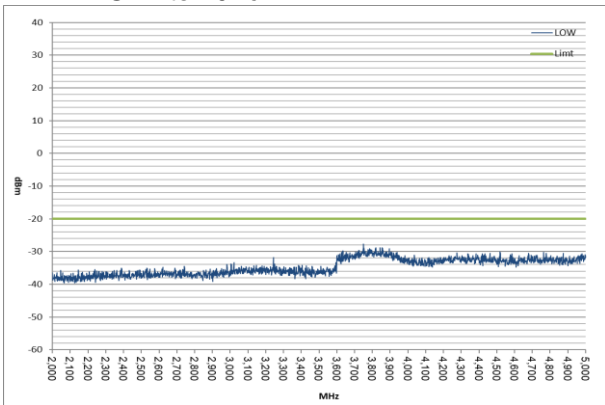


11K0F3E
9 KHz to Fc

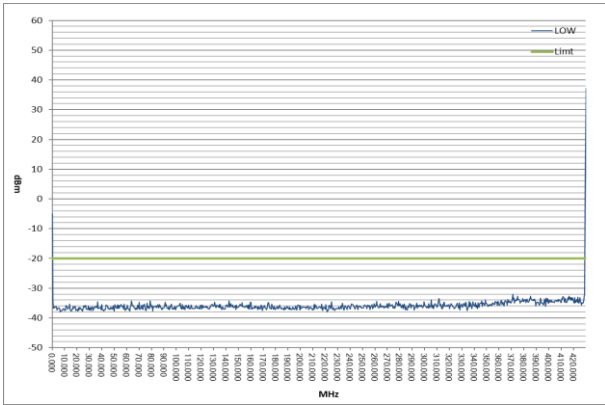


Low Power


Fc to 2Fc

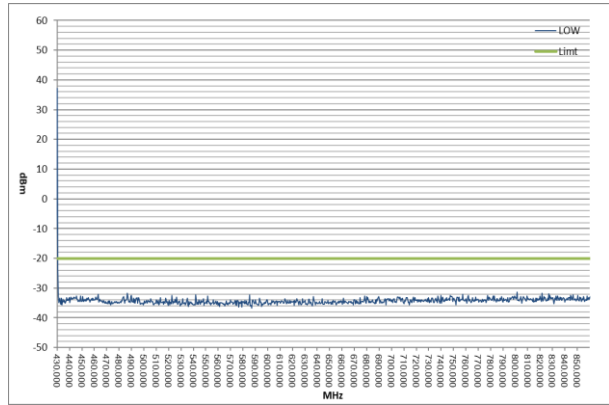


2Fc to 1GHz

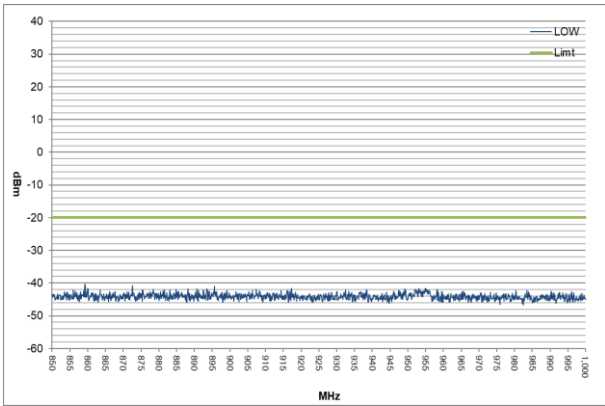


1GHz to 2GHz

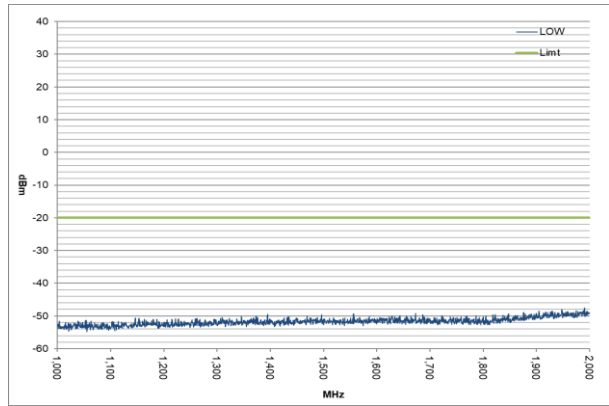

2GHz to 10Fc

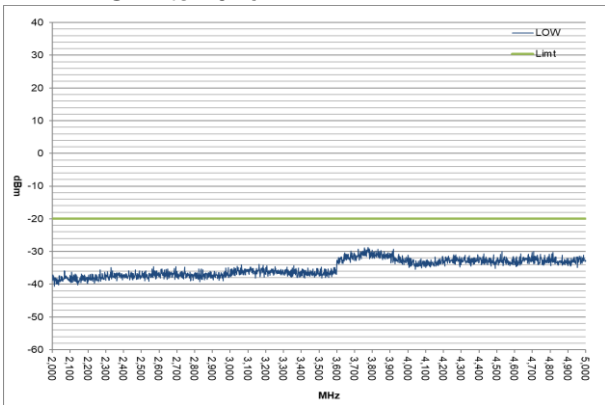


11K0F3E
9 KHz to Fc

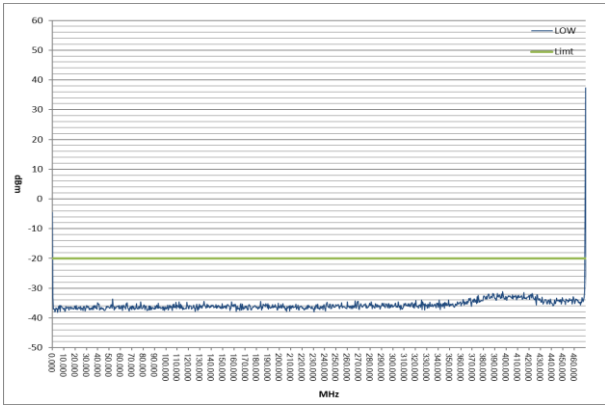


Low Power


Fc to 2Fc

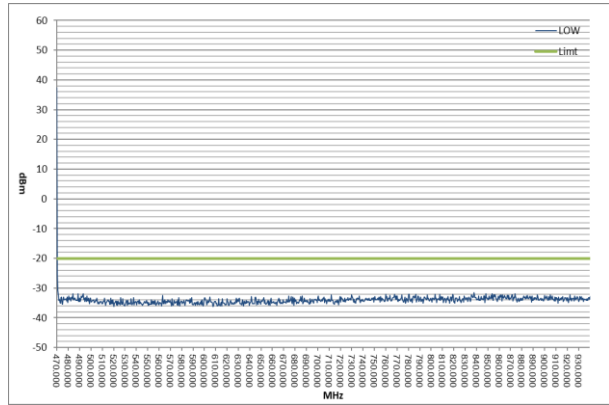

2Fc to 1GHz

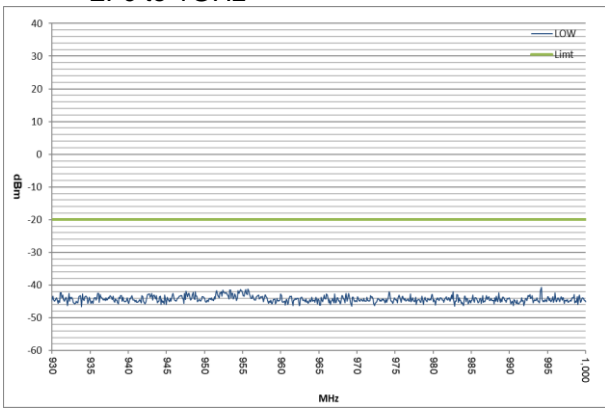

1GHz to 2GHz

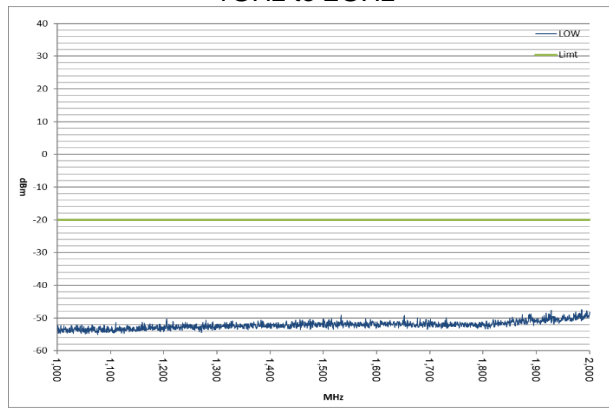

2GHz to 10Fc

