

# Radio Test Report

Report No.: STS2310324W01

Issued for

Superior Electronics Corporation

No 10, Lane 31, Chongde St., Sinyi District. Taipei City 110.  
Taiwan

Product Name: Outdoor Access Control Keypad with  
Proximity Card Reader

Brand Name: ENFORCER

Model Name: SK-1123-SPQ

Series Model(s): N/A

FCC ID: K4E1123SPQ

Test Standards: FCC Part 15 Subpart C

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.



TEST REPORT

Applicant's Name .....: Superior Electronics Corporation
Address.....: No 10, Lane 31, Chongde St., Sinyi District. Taipei City 110. Taiwan
Manufacturer's Name .....: Superior Electronics Corporation
Address.....: No 10, Lane 31, Chongde St., Sinyi District. Taipei City 110. Taiwan

Product Description

Product Name .....: Outdoor Access Control Keypad with Proximity Card Reader
Brand .....: ENFORCER
Model Number.....: SK-1123-SPQ
Series Model(s) .....: N/A

Test Standards.....: FCC Part 15 Subpart C
Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date of receipt of test item .....: 18 Oct. 2023
Date (s) of performance of tests : 18 Oct. 2023 ~ 25 Oct. 2023
Date of Issue .....: 25 Oct. 2023
Test Result .....: Pass

Testing Engineer : [Signature]
(Aaron Bu)

Technical Manager : [Signature]
(Chris Chen)

Authorized Signatory : [Signature]
(Bovey Yang)





<b>Table of Contents</b>	<b>Page</b>
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
<b>2. GENERAL INFORMATION</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
<b>3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)</b>	<b>10</b>
3.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.2 TEST PROCEDURE	11
3.3 TEST SETUP	11
3.4 EUT OPERATING CONDITIONS	11
3.5 TEST RESULTS	11
<b>4. RADIATED&amp; FIELD EMISSION TEST RESULT (SECTIOU 15.209)</b>	<b>12</b>
4.1 LIMIT	12
4.2 TEST PROCEDURE	12
4.3 TEST SETUP	13
4.4 TEST RESULTS	14
<b>APPENDIX-PHOTOS OF TEST SETUP</b>	<b>18</b>



**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	10 Sep. 2015	ATE20151933	ALL	Initial Issue
00	25 Oct. 2023	STS2310324W01	ALL	Updated brand name, radiated emission, spurious emission



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.209(a)	Radiated emission, Spurious Emission	PASS	
2.1049	20 dB Bandwidth	N/A	

### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 1.197\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.896\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 3.94\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.59\text{dB}$
6	All emissions, radiated >6G	$\pm 5.22\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.14\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.54\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Outdoor Access Control Keypad with Proximity Card Reader
Brand	ENFORCER
Model Number	SK-1123-SPQ
Series Model(s)	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Antenna Type	Please refer to the Note 3.
Equipemnt Category	Non-ISM frequency
Operating frequency	125KHz
Modulation Type	GFSK
Power Rating:	Input: 12-24V DC/AC
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

Channel List					
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
00	125				

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain	Connector	NOTE
1	ENFORCER	SK-1123-SPQ	Internal	0dBi	N/A	Antenna



### 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging+TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Charging+TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charging+TX Mode



### 2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

#### Radiated Emission Test



### 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

#### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
Signal Analyzer	R&S	FSV 40-N	101823	2023.09.26	2024.09.25
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2024.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2023.02.28	2024.02.27
Temperature & Humidity	HH660	Mieo	N/A	2023.03.03	2024.03.02
Test SW	BALUN	BL410-E/18.905			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2023.09.25	2024.09.24
LISN	R&S	ENV216	101242	2023.09.25	2024.09.24
LISN	EMCO	3810/2NM	23625	2023.09.25	2024.09.24
Temperature & Humidity	HH660	Mieo	N/A	2023.03.03	2024.03.02
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

### 3. CONDUCTED EMISSION TEST RESULT (SECTION 15.207)

#### 3.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Class B (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of "\*" marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

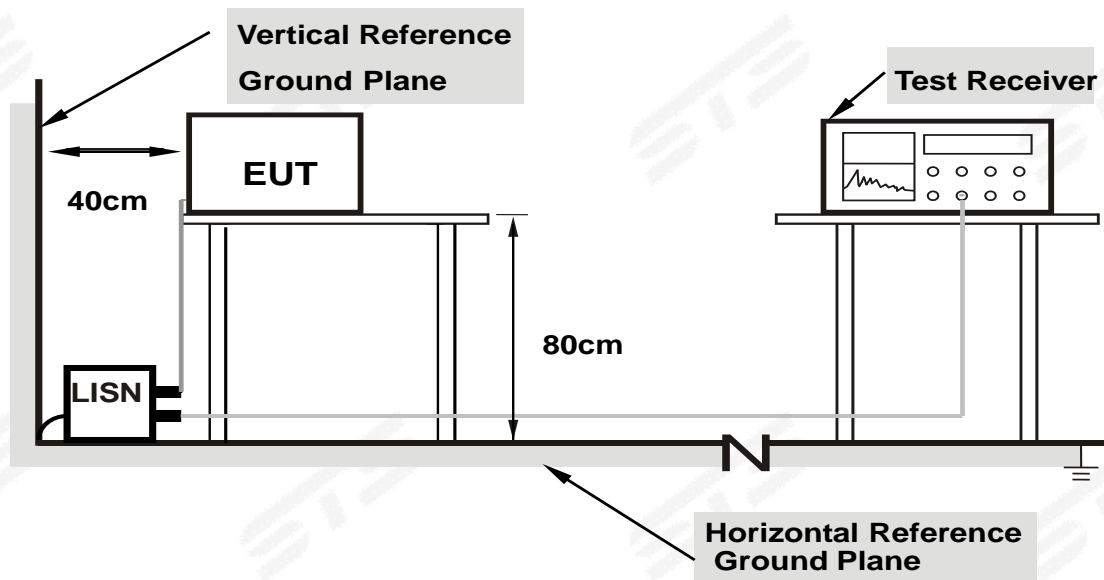

- Note: 1. Support units were connected to second LISN.**  
**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**

### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

### 3.5 TEST RESULTS

Temperature:	-- °C	Relative Humidity:	--%
Test Voltage:	N/A	Phase:	N/A
Test Mode:	N/A		



#### 4. RADIATED& FIELD EMISSION TEST RESULT (SECTION 15.209)

##### 4.1 LIMIT

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

§ 15.209(d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

##### 4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 4.3 TEST SETUP

#### (A) Radiated Emission Test-Up Frequency Below 30MHz

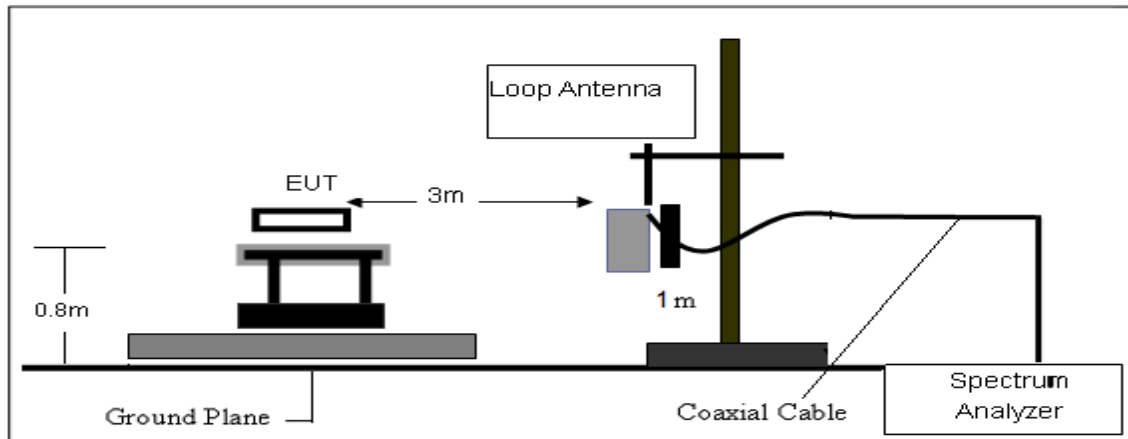

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

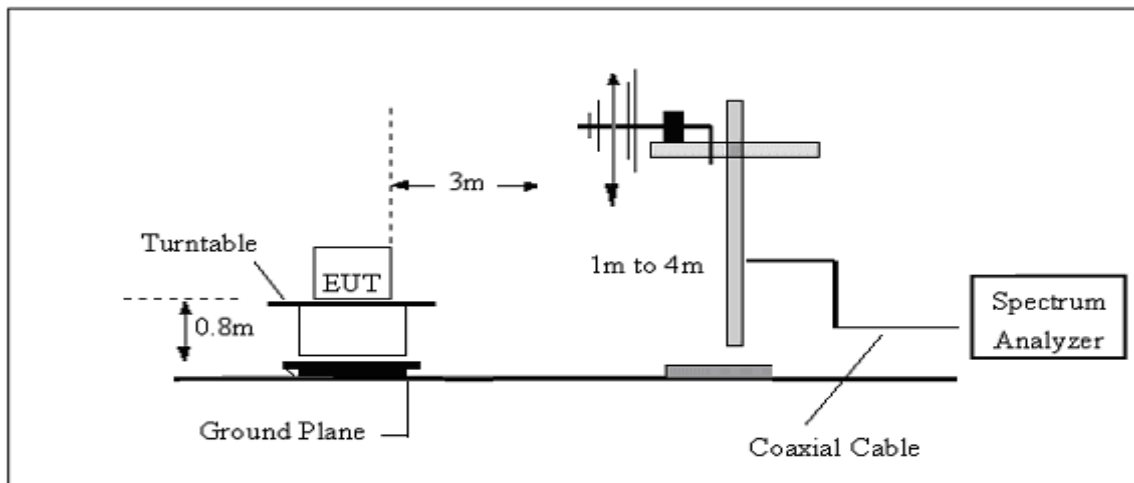




### 4.4 TEST RESULTS

Temperature :	23.1°C	Relative Humidity :	60%
Test Voltage :	DC 12V	Test Mode :	TX Mode


#### 4.4.1 Spurious Radiated Emission Below 30 MHz 9KHz-150KHz

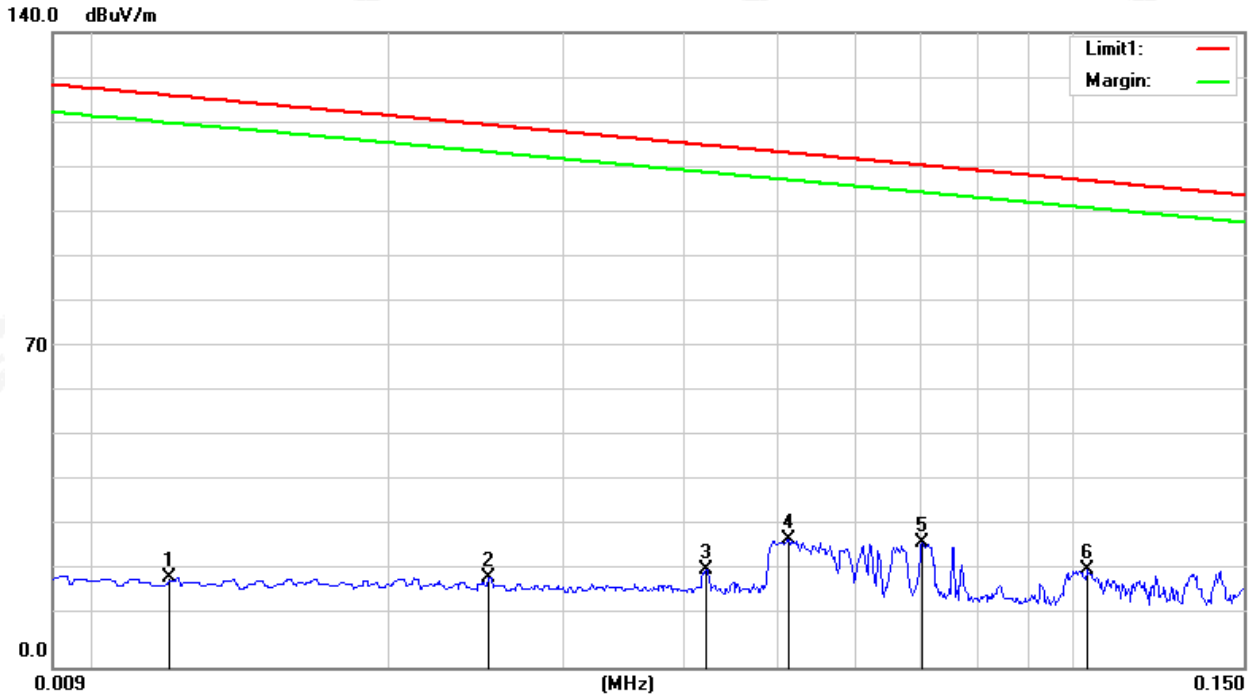

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0120	0.12	19.52	19.64	126.02	-106.38	QP
2	0.0252	-0.38	20.00	19.62	119.58	-99.96	QP
3	0.0422	1.92	19.66	21.58	115.10	-93.52	QP
4	0.0511	8.64	19.47	28.11	113.44	-85.33	QP
5	0.0703	8.49	18.93	27.42	110.67	-83.25	peak
6	0.1040	4.03	17.59	21.62	107.26	-85.64	QP



150KHz-30MHz

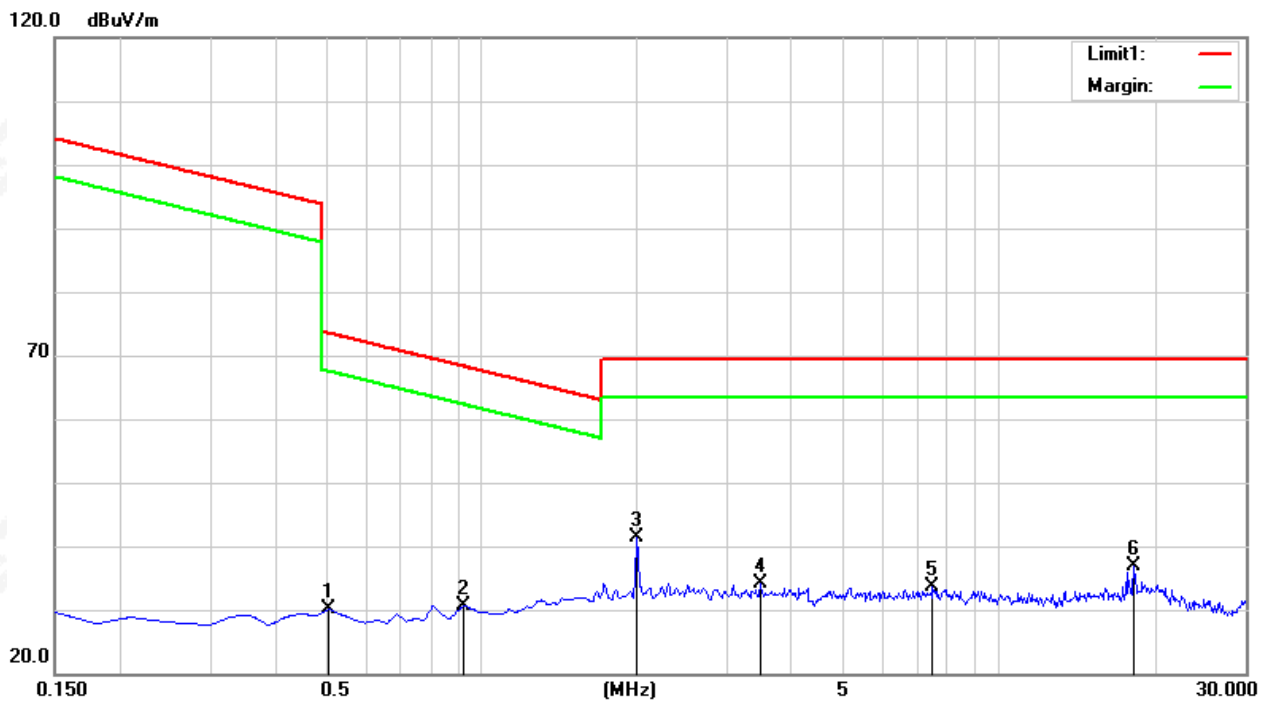

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5082	9.89	20.20	30.09	73.48	-43.39	QP
2	0.9261	10.50	20.23	30.73	68.27	-37.54	QP
3	2.0007	21.00	20.40	41.40	69.50	-28.10	QP
4	3.4634	13.77	20.24	34.01	69.50	-35.49	QP
5	7.4633	13.33	20.35	33.68	69.50	-35.82	QP
6	18.2391	14.76	22.08	36.84	69.50	-32.66	QP

4.4.2 Spurious Radiated Emission below 1 GHz


Temperature :	23.1 °C	Relative Humidity :	60%
Test Voltage :	DC 12V	Test Mode :	Mode 1

The following table shows the highest levels of radiated emissions on polarizations of vertical

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.9700	31.39	-13.35	18.04	40.00	-21.96	QP
65.8900	43.93	-25.60	18.33	40.00	-21.67	QP
180.3500	47.72	-20.04	27.68	43.50	-15.82	QP
297.7200	45.39	-14.89	30.50	46.00	-15.50	QP
730.3400	37.11	-2.46	34.65	46.00	-11.35	QP
895.2400	35.35	-0.56	34.79	46.00	-11.21	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

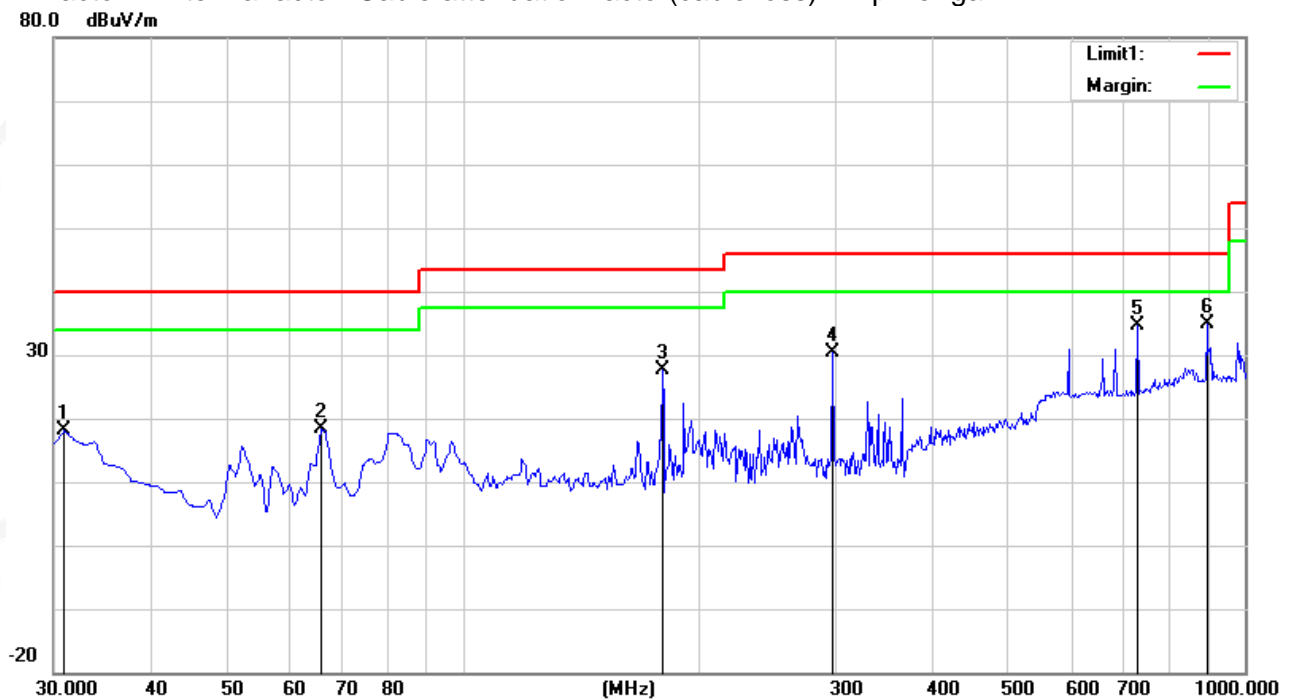






Temperature :	23.1 °C	Relative Humidity :	60%
Test Voltage :	DC 12V	Test Mode :	Mode 1

The following table shows the highest levels of radiated emissions on polarizations of horizontal

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.9700	44.46	-13.35	31.11	40.00	-8.89	QP
63.9500	49.22	-25.64	23.58	40.00	-16.42	QP
191.9900	44.94	-21.04	23.90	43.50	-19.60	QP
363.6800	38.24	-12.73	25.51	46.00	-20.49	QP
596.4800	37.33	-5.84	31.49	46.00	-14.51	QP
982.5400	30.93	2.52	33.45	54.00	-20.55	QP

Remark:

1. Margin = Result (Result =Reading + Factor) –Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

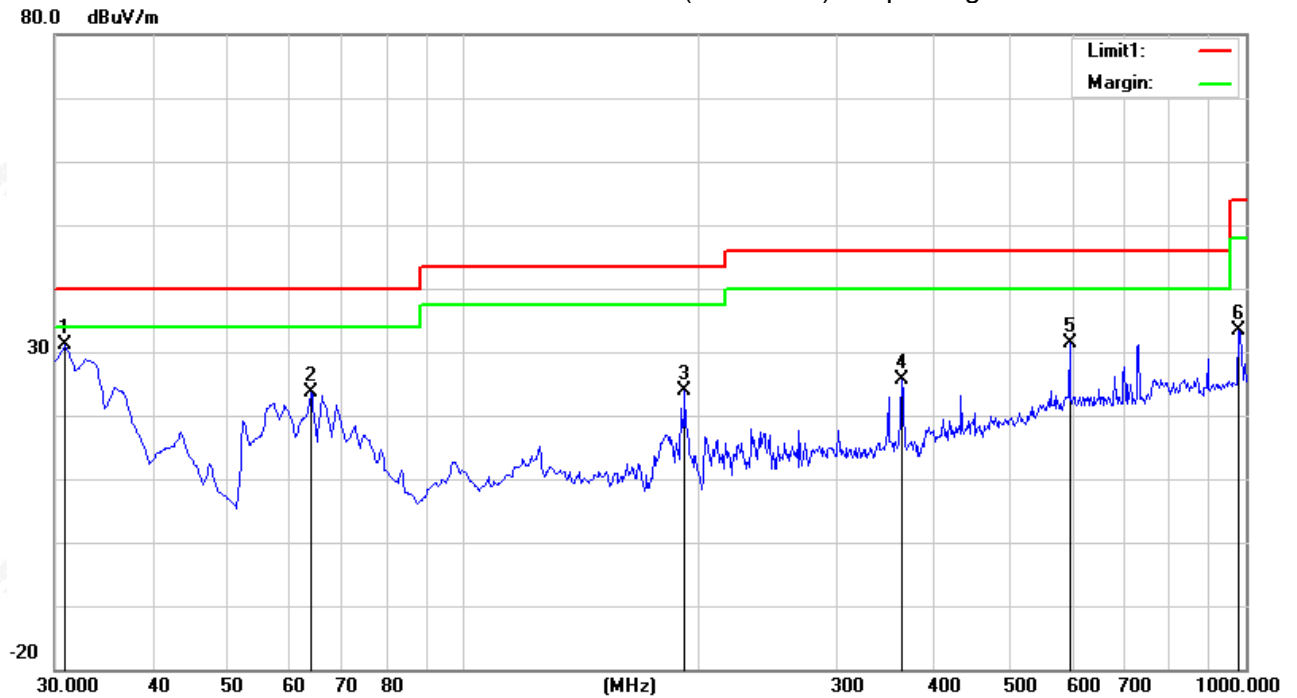



## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

※※※※※END OF THE REPORT※※※※※