

Radio Test Report

Report No.: STS2308309W01

Issued for

Superior Electronics Corporation

No 10, Lane 31, Chongde St., Sinyi District. Taipei City 110.
Taiwan

Product Name: Access Control Keypad with Proximity Card Reader

Brand Name: ENFORCER

Model Name: SK-1131-SPQ

Series Model(s): N/A

FCC ID: K4E1131SPQ

Test Standards: FCC Part 15 Subpart C

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.



TEST RESULT CERTIFICATION

Applicant's Name: Superior Electronics Corporation
 Address.....: No 10, Lane 31, Chongde St., Sinyi District. Taipei City 110. Taiwan
 Manufacturer's Name: Superior Electronics Corporation
 Address.....: No 10, Lane 31, Chongde St., Sinyi District. Taipei City 110. Taiwan

Product Description

Product Name: Access Control Keypad with Proximity Card Reader
 Brand Name.....: ENFORCER
 Model Name.....: SK-1131-SPQ
 Series Model(s): N/A

Test Standards.....: FCC Part 15 Subpart C

Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test.....:

Date of receipt of test item: 04 Aug. 2023
 Date (s) of performance of tests : 04 Aug. 2023 ~ 10 Aug. 2023
 Date of Issue: 10 Aug. 2023
 Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Sean She

(Sean she)

Authorized Signatory :

Chris Chen

(Chris Chen)



Table of Contents**Page**

1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF THE EUT	6
2.2 DESCRIPTION OF THE TEST MODES	7
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	8
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. RADIATED& FIELD EMISSION TEST RESULT (SECTION 15.209)	10
3.1 LIMIT	10
3.2 TEST PROCEDURE	10
3.3 TEST SETUP	11
3.4 TEST RESULTS	12
APPENDIX-PHOTOS OF TEST SETUP	15



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	14 Mar. 2015	ATE20150270	ALL	Initial Issue
00	10 Aug. 2023	STS2308309W01	ALL	updating radiated emission, spurious emission

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	N/A	
15.209(a)	Radiated emission, Spurious Emission	PASS	
2.1049	20 dB Bandwidth	N/A	

Note: PCB internal board has changed, updating radiated emission, spurious emission.

1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 1.197\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.896\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 3.94\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.59\text{dB}$
6	All emissions, radiated >6G	$\pm 5.22\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.14\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.54\text{dB}$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Access Control Keypad with Proximity Card Reader
Brand Name	ENFORCER
Model Name	SK-1131-SPQ
Series Model(s)	N/A
Model Difference	N/A
Channel List	Please refer to the Note 2.
Antenna Type	Please refer to the Note 3.
Equipemnt Category	Non-ISM frequency
Operating frequency	125KHz
Modulation Type	ASK
Power Supply	DC 12V
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.

2.

Channel List					
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
00	125				

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Gain	Connector	NOTE
1	ENFORCER	SK-1131-SPQ	Internal Antenna	0dBi	N/A	Antenna

2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Charging+TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charging+TX Mode

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Emission Test



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2022.09.29	2023.09.28
Signal Analyzer	R&S	FSV 40-N	101823	2022.09.29	2023.09.28
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2024.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2023.02.28	2024.02.27
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	BALUN	BL410-E/18.905			

3. RADIATED& FIELD EMISSION TEST RESULT (SECTIOU 15.209)

3.1 LIMIT

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

§ 15.209(d)The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

3.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.3 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

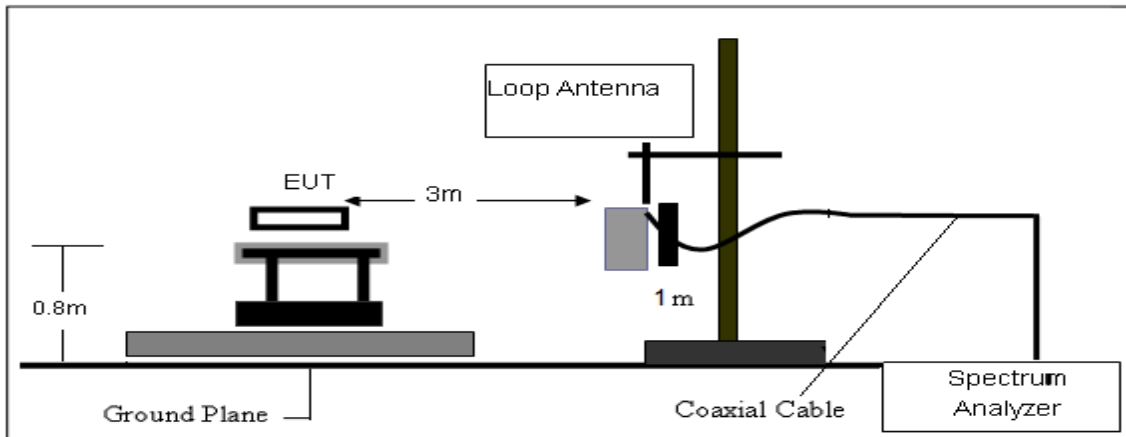


(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

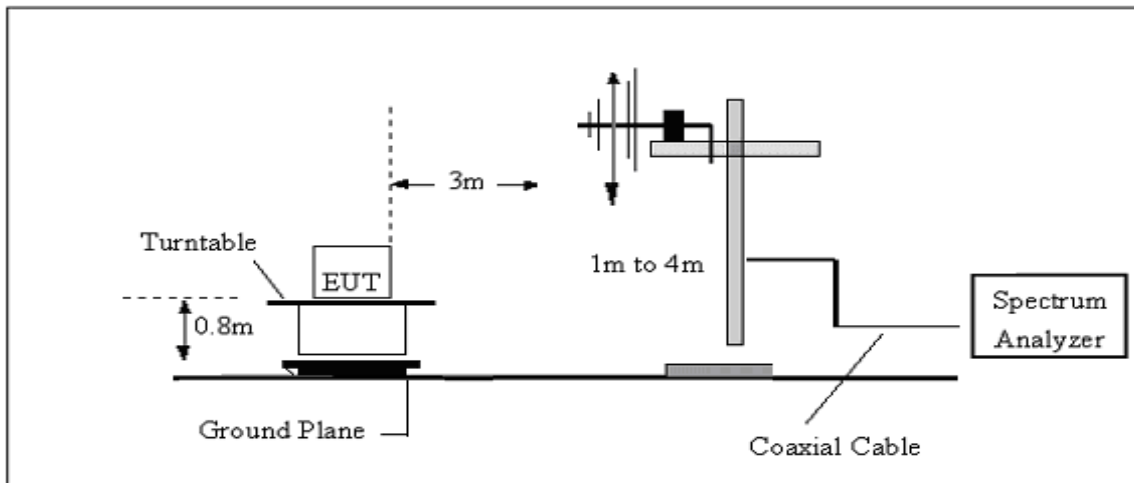

3.4 TEST RESULTS


Temperature :	23.1°C	Relative Humidity :	60%
Test Voltage :	DC 12V	Test Mode :	TX Mode

3.4.1 Spurious Radiated Emission Below 30 MHz 9KHz-150KHz

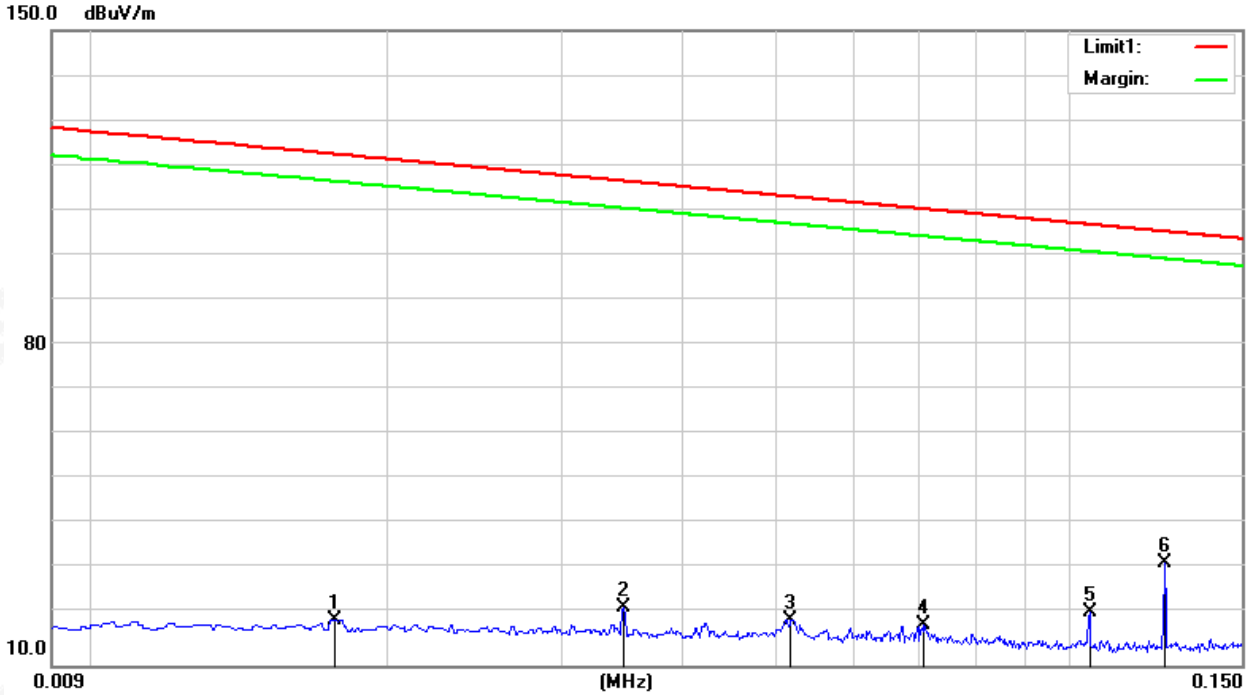

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0176	-0.06	19.93	19.87	122.69	-102.82	peak
2	0.0348	2.91	19.80	22.71	116.77	-94.06	peak
3	0.0517	0.66	19.45	20.11	113.33	-93.22	peak
4	0.0710	0.13	18.91	19.04	110.58	-91.54	peak
5	0.1046	4.08	17.59	21.67	107.21	-85.54	peak
6	0.1250	14.98	17.55	32.53	105.67	-73.14	peak

150KHz-30MHz

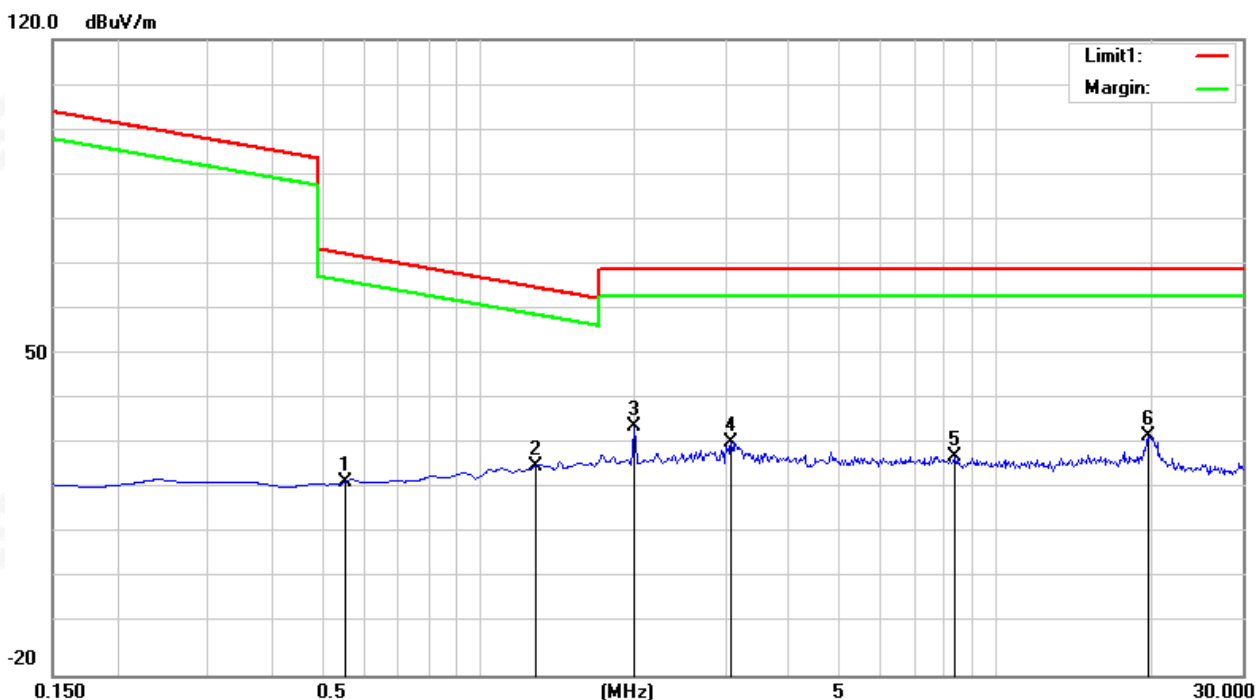

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5523	2.42	20.22	22.64	72.76	-50.12	peak
2	1.2892	5.90	20.26	26.16	65.40	-39.24	peak
3	2.0007	14.29	20.40	34.69	69.50	-34.81	peak
4	3.0753	11.25	20.12	31.37	69.50	-38.13	peak
5	8.3588	7.85	20.30	28.15	69.50	-41.35	peak
6	19.6719	10.17	22.42	32.59	69.50	-36.91	peak

3.4.2 Spurious Radiated Emission 30 MHz -1000MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	125K		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	35.39	-15.34	20.05	40.00	-19.95	peak
2	117.3000	48.41	-18.47	29.94	43.50	-13.56	peak
3	157.0700	44.36	-18.70	25.66	43.50	-17.84	peak
4	247.2800	42.35	-16.59	25.76	46.00	-20.24	peak
5	471.3500	39.33	-8.95	30.38	46.00	-15.62	peak
6	937.9200	29.06	1.20	30.26	46.00	-15.74	peak

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit

Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBuV/m

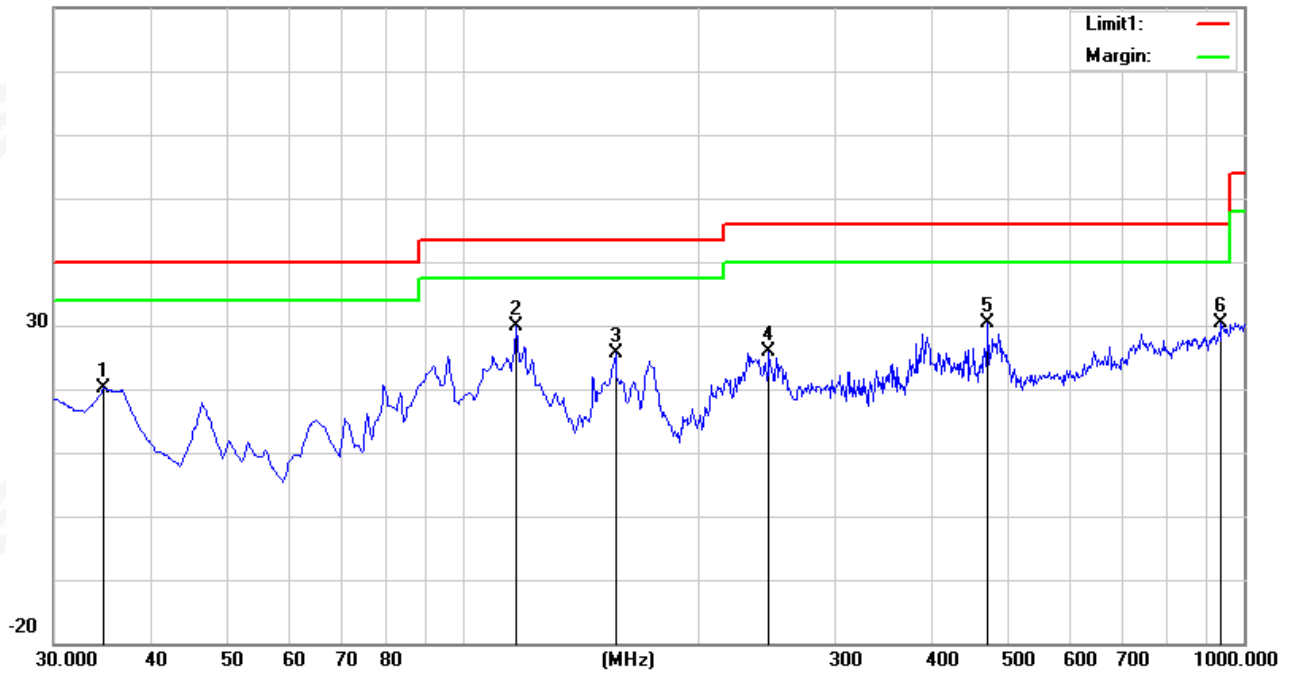

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	125K		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.3173	38.57	-13.01	25.56	40.00	-14.44	peak
2	46.4900	48.36	-21.41	26.95	40.00	-13.05	peak
3	247.2800	40.72	-16.59	24.13	46.00	-21.87	peak
4	369.5000	40.83	-12.51	28.32	46.00	-17.68	peak
5	752.6500	30.98	-2.16	28.82	46.00	-17.18	peak
6	978.6600	28.62	2.58	31.20	54.00	-22.80	peak

Remark:

2. Margin = Result (Result =Reading + Factor)-Limit

Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

80.0 dBuV/m

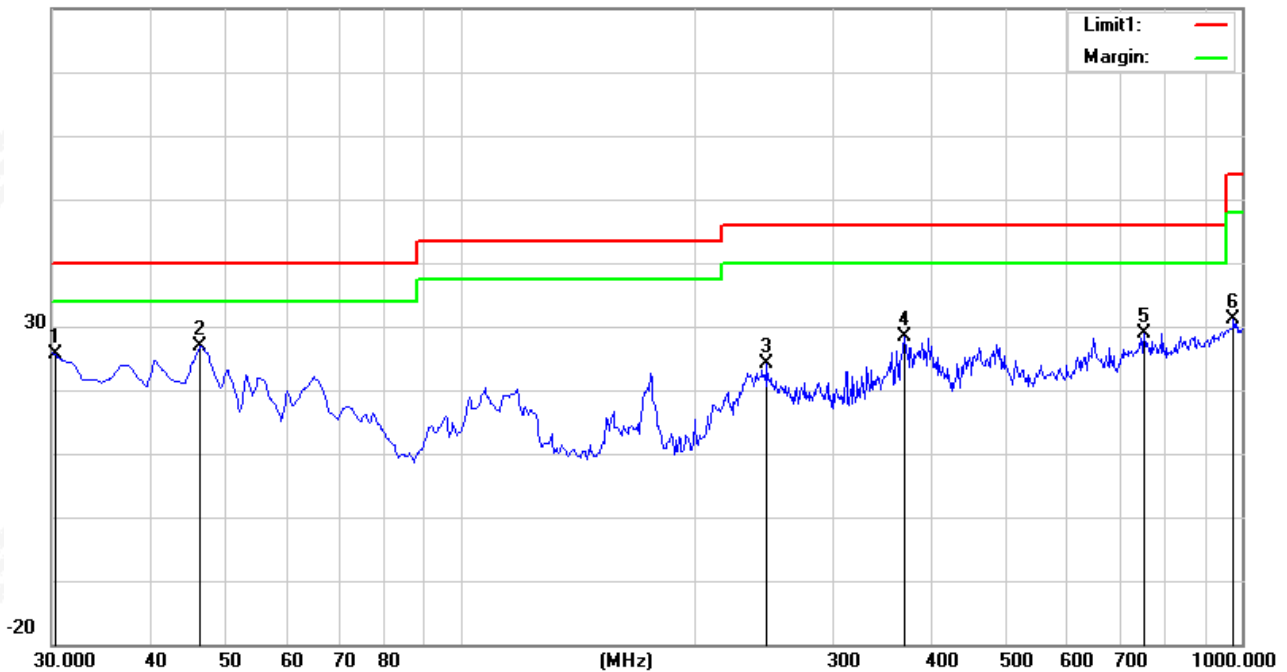

APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****