
	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**RF EXPOSURE EVALUATION**

**SPECIFIC ABSORPTION RATE**

**SAR TEST REPORT**

FOR

**VERTEX STANDARD CO., LTD.**

**PORTABLE FM UHF PTT RADIO TRANSCEIVER**

**MODEL(S): VX-351-AG7B-5 / VX-354-AG7B-5**

<b>IDENTIFIER(S)</b>	<b>FCC ID: K6610654720</b>	<b>IC: 511B-10654720</b>
<b>Test Standard(s) and Procedure(s)</b>	<b>FCC OET Bulletin 65, Supplement C (01-01)</b>	
	<b>Industry Canada RSS-102 Issue 2</b>	

Test Report Serial No.

021307K66-T816-S90U

Test Report Revision No.

Revision 1.0 (Initial Release)


Test Lab and Location



Celltech Compliance Testing & Engineering Lab  
(Celltech Labs Inc.)  
1955 Moss Court  
Kelowna, BC  
Canada  
V1Y 9L3



Certificate No. 2470.01

<u>Test Report Prepared By:</u> <b>Cheri Frangiadakis</b> Test Report Writer Celltech Labs Inc.	<u>Test Report Reviewed By:</u> <b>Jonathan Hughes</b> General Manager Celltech Labs Inc.
--	--

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

<u>Test Lab and Location</u>		<u>Company Information</u>	
<b>CELLTECH LABS INCORPORATED</b> Testing and Engineering Services 1955 Moss Court Kelowna, B.C. Canada V1Y 9L3 Phone: 250-448-7047 Fax: 250-448-7046 e-mail: info@celltechlabs.com web site: www.celltechlabs.com		<b>VERTEX STANDARD CO., LTD.</b> 4-8-8 Nakameguro, Meguro-Ku Tokyo 153-8644 Japan	
<b>FCC IDENTIFIER:</b>	<b>K6610654720</b>	<b>IC IDENTIFIER:</b>	<b>511B-10654720</b>
<b>Device Model(s):</b>	<b>VX-351-AG7B-5 / VX-354-AG7B-5</b>	<b>Device Description:</b>	<b>Portable FM UHF PTT Radio Transceiver</b>
<b>Test Requirement(s):</b>	<b>FCC 47 CFR §2.1093; Health Canada Safety Code 6</b>		
<b>Test Procedure(s):</b>	<b>FCC OET Bulletin 65, Supplement C (Edition 01-01)</b>		
<b>Device Classification:</b>	<b>Industry Canada RSS-102 Issue 2</b>		
	<b>FCC Licensed Non-Broadcast Transmitter Held to Face (TNF)</b>		
	<b>IC Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)</b>		
<b>Transmit Frequency Range:</b>	<b>450 - 512 MHz</b>		
<b>Max. RF Output Power Tested:</b>	<b>5.0 Watts (37.0 dBm) Conducted (450 MHz)</b>		
	<b>5.2 Watts (37.2 dBm) Conducted (481 MHz)</b>		
	<b>4.9 Watts (36.9 dBm) Conducted (512 MHz)</b>		
<b>Antenna Type(s) Tested:</b>	<b>Detachable Whip 450 - 490 MHz (P/N: ATU-6D)</b>		
	<b>Detachable Whip 485 - 520 MHz (P/N: ATU-6F)</b>		
<b>Battery Type(s) Tested:</b>	<b>Lithium-ion 7.4 V, 2000 mAh (P/N: FNB-V96LI)</b>		
<b>Body-Worn Accessories Tested:</b>	<b>Belt-Clip (Model: CLIP-18)</b>		
<b>Audio Accessories Tested:</b>	<b>Speaker-Microphone (P/N: MH-45B4B)</b>		
<b>Max. SAR Level(s) Evaluated:</b>	<b>Face-held: 4.04 W/kg (1g) - 50% Duty Cycle</b>		
	<b>Body-worn: 5.64 W/kg (1g) - 50% Duty Cycle</b>		

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2 for the Occupational / Controlled Exposure Environment. All measurements were performed in accordance with the SAR system manufacturer's recommendations.


I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



**Test Report Approved By:**

**Sean Johnston**  
**SAR Lab Manager**  
**Celltech Labs Inc.**



<b>Company:</b>	<b>Vertex Standard Co., Ltd.</b>	<b>FCC ID:</b>	<b>K6610654720</b>	<b>IC ID:</b>	<b>511B-10654720</b>	
<b>Model(s):</b>	<b>VX-351-AG7B-5 / VX-354-AG7B-5</b>	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 43

<b>TABLE OF CONTENTS</b>	
1.0 INTRODUCTION _____	4
2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT) _____	4
3.0 SAR MEASUREMENT SYSTEM _____	5
4.0 MEASUREMENT SUMMARY _____	6
5.0 DETAILS OF SAR EVALUATION _____	7
6.0 EVALUATION PROCEDURES _____	7
7.0 SYSTEM PERFORMANCE CHECK _____	8
8.0 SIMULATED EQUIVALENT TISSUES _____	9
9.0 SAR SAFETY LIMITS _____	9
10.0 ROBOT SYSTEM SPECIFICATIONS _____	10
11.0 PROBE SPECIFICATION (ET3DV6) _____	11
12.0 SIDE PLANAR PHANTOM _____	11
13.0 VALIDATION PLANAR PHANTOM _____	11
14.0 DEVICE HOLDER _____	11
15.0 TEST EQUIPMENT LIST _____	12
16.0 MEASUREMENT UNCERTAINTIES _____	13
MEASUREMENT UNCERTAINTIES (CONT.) _____	14
17.0 REFERENCES _____	15
APPENDIX A - SAR MEASUREMENT DATA _____	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA _____	26
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS _____	29
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS _____	32
APPENDIX E - SYSTEM VALIDATION _____	42
APPENDIX F - PROBE CALIBRATION _____	43


	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	



## 1.0 INTRODUCTION

This measurement report demonstrates compliance of the Vertex Standard Co., Ltd. Model(s): VX-351-AG7B-5 / VX-354-AG7B-5 Portable FM UHF PTT Radio Transceiver FCC ID: K6610654720 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure Environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

## 2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

<b>Test Requirement(s)</b>	FCC 47 CFR §2.1093			
	Health Canada Safety Code 6			
<b>Test Procedure(s)</b>	FCC OET Bulletin 65, Supplement C (01-01)			
	Industry Canada RSS-102 Issue 2			
<b>Device Description</b>	Portable FM UHF PTT Radio Transceiver			
<b>RF Exposure Category</b>	Occupational / Controlled Environment			
<b>FCC IDENTIFIER</b>	K6610654720			
<b>IC IDENTIFER</b>	511B-10654720			
<b>Device Model(s)</b>	VX-351-AG7B-5	VX-354-AG7B-5		
<b>Test Sample Serial No.</b>	7C000003	Identical Prototype		
<b>Transmit Frequency Range</b>	450 - 512 MHz			
<b>Max. RF Conducted Output Power Levels Measured</b>	Low	450 MHz	5.0 Watts	37.0 dBm
	Mid	481 MHz	5.2 Watts	37.2 dBm
	High	512 MHz	4.9 Watts	36.9 dBm
<b>Antenna Type(s) Tested</b>	Whip	450 - 490 MHz	P/N: ATU-6D	Length: 153 mm
	Whip	485 - 520 MHz	P/N: ATU-6F	Length: 140 mm
<b>Battery Type(s) Tested</b>	Lithium-ion	7.4 V	2000 mAh	P/N: FNB-V96LI
<b>Additional Battery Type(s)</b> (Additional Testing Not Required)	Lithium-ion	7.4 V	1800 mAh	P/N: FNB-V95LI
<b>Body-Worn Accessories Tested</b>	Belt-Clip	1.1 cm spacing	Contains Plastic and Metal Components	
<b>Audio Accessories Tested</b>	Speaker-Microphone			P/N: MH-45B4B
<b>Additional Audio Accessories</b> (Additional Testing Not Required)	Compact Speaker-Microphone			P/N: MH-360S
	Commercial Speaker-Microphone			P/N: MH-450S
	VOX Headset			P/N: VC-25

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

### 3.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.





DASY4 SAR Measurement System with Plexiglas validation phantom



DASY4 SAR Measurement System with Plexiglas side planar phantom

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 43






	Date(s) of Evaluation February 15, 2007	Test Report Serial No. 021307K66-T816-S90U	Report Revision No. Revision 1.0	 Certificate No. 2470.01
	Report Issue Date February 22, 2007	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

## 4.0 MEASUREMENT SUMMARY

### SAR EVALUATION RESULTS

Test Type	Freq.	Chan.	Test Mode	Antenna Part No.	Battery Type	Accessory Type(s)	Device Spacing to Planar Phantom	Cond. Power Before Test	Measured SAR 1g (W/kg)		SAR Drift During Test	Scaled SAR with droop 1g (W/kg)	
						Body-Worn			Duty Cycle			Duty Cycle	
	MHz	Audio	cm	Watts	100%	50%	dB	100%	50%				
Face	481	Mid	CW	ATU-6D	Li-ion	n/a	2.5	5.2	7.65	3.83	-0.239	8.08	4.04
Face	450	Low	CW	ATU-6D	Li-ion	n/a	2.5	5.0	5.50	2.75	-0.303	5.90	2.95
Face	512	High	CW	ATU-6F	Li-ion	n/a	2.5	4.9	6.11	3.06	-0.339	6.61	3.30
Body	481	Mid	CW	ATU-6D	Li-ion	Belt-Clip Speaker-Mic.	1.1	5.2	10.7	5.35	-0.230	11.3	5.64
Body	450	Low	CW	ATU-6D	Li-ion	Belt-Clip Speaker-Mic.	1.1	5.0	7.94	3.97	-0.314	8.54	4.27
Body	512	High	CW	ATU-6F	Li-ion	Belt-Clip Speaker-Mic.	1.1	4.9	9.35	4.68	-0.331	10.1	5.05
ANSI / IEEE C95.1:2005 - SAFETY LIMIT				BRAIN / BODY: 8.0 W/kg (averaged over 1 gram)				Spatial Peak - Occupational / Controlled Exposure					
Test Date(s)	February 15, 2007				February 15, 2007			Measured Fluid Type	Brain	Body	Unit		
Dielectric Constant $\epsilon_r$	450 MHz Brain				450 MHz Body			Atmospheric Pressure	102.1	102.1	kPa		
	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Relative Humidity	31	31	%			
	43.5	$\pm 5\%$	44.7	+2.8%	56.7	$\pm 5\%$	57.4	+1.3%	Ambient Temperature	23.9	24.0	$^{\circ}\text{C}$	
Conductivity $\sigma$ (mho/m)	450 MHz Brain				450 MHz Body			Fluid Temperature	21.4	23.0	$^{\circ}\text{C}$		
	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	Fluid Depth	$\geq 15$	$\geq 15$	cm			
	0.87	$\pm 5\%$	0.90	+3.5%	0.94	$\pm 5\%$	0.97	+3.2%	$\rho$ (Kg/m <sup>3</sup> )	1000			
Note(s)	1.	The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.											
	2.	If the scaled SAR levels evaluated at the mid channel (50% duty cycle) were $\geq 3$ dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).											
	3.	The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.											
	4.	The power droops measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above test data table.											
	5.	A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.											
	6.	The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.											
	7.	The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).											
	8.	The SAR evaluations were performed within 24 hours of the system performance check.											

Company:	Vertex Standard Co., Ltd.	FCC ID:	K6610654720	IC ID:	511B-10654720	
Model(s):	VX-351-AG7B-5 / VX-354-AG7B-5	Portable FM UHF PTT Radio Transceiver		450 - 512 MHz		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 5.0 DETAILS OF SAR EVALUATION

The Vertex Standard Co., Ltd. Model(s): VX-351-AG7B-5 / VX-354-AG7B-5 Portable FM UHF PTT Radio Transceiver FCC ID: K6610654720 was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

### Test Configuration(s)

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached belt-clip accessory was touching the planar phantom and provided a 1.1 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the supplied speaker-microphone accessory connected to the audio port.

### Test Mode(s) & Power Setting(s)


3. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
4. The conducted power levels were measured prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
5. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.

### Test Conditions

6. The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within  $\pm 2^{\circ}\text{C}$  of the fluid temperature reported during the dielectric parameter measurements.
7. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).

## 6.0 EVALUATION PROCEDURES


- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are  $>2$  dB from the global maximum. The remaining maxima are then used to position the cube scans.  
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency  $< 800$  MHz. Zoom scans for frequencies  $\geq 800$  MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 7 of 43


## 7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and HP 8753ET Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.						
Feb 15	Brain 450MHz	1.23 $\pm 10\%$	1.25	+1.7%	43.5 $\pm 5\%$	44.7	+2.8%	0.87 $\pm 5\%$	0.90	+3.5%	1000	23.9	21.4	$\geq 15$	31	102.1
Note(s)		1. The fluid temperature was measured prior to and after the SAR evaluation to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements. 2. The SAR evaluations were performed within 24 hours of the system performance check.														

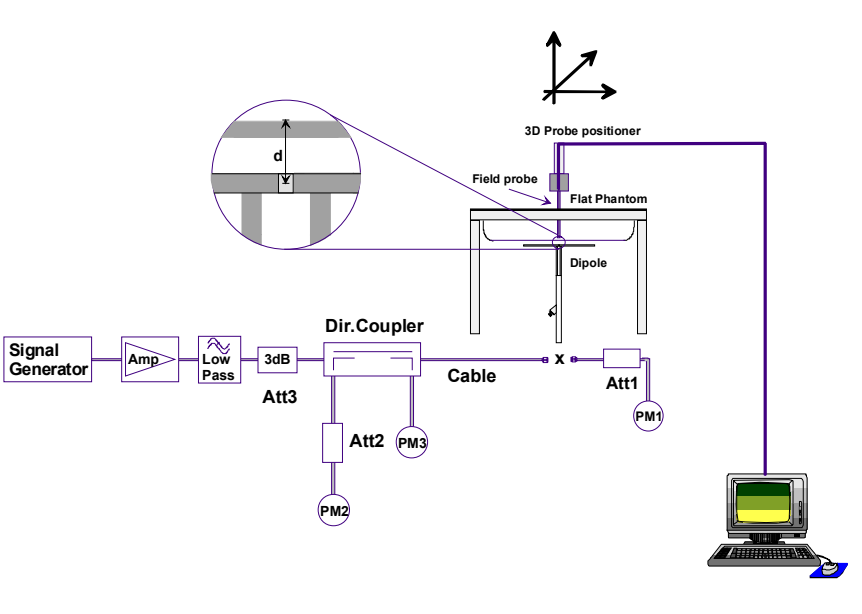



**Figure 1. System Performance Check Setup Diagram**



**450MHz Dipole Setup**



	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


## 8.0 SIMULATED EQUIVALENT TISSUES



The simulated tissue mixtures consisted of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide was added and visual inspection made to ensure air bubbles were not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 9.0 SAR SAFETY LIMITS


EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		



Company:	Vertex Standard Co., Ltd.	FCC ID:	K6610654720	IC ID:	511B-10654720	
Model(s):	VX-351-AG7B-5 / VX-354-AG7B-5	Portable FM UHF PTT Radio Transceiver		450 - 512 MHz		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


## 10.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
<b>Positioner</b>	Stäubli Unimation Corp. Robot Model: RX60L
<b>Repeatability</b>	0.02 mm
<b>No. of axis</b>	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
<b>Processor</b>	AMD Athlon XP 2400+
<b>Clock Speed</b>	2.0 GHz
<b>Operating System</b>	Windows XP Professional
<u>Data Converter</u>	
<b>Features</b>	Signal Amplifier, multiplexer, A/D converter, and control logic
<b>Software</b>	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
<b>Connecting Lines</b>	Optical downlink for data and status info.; Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
<b>Function</b>	Real-time data evaluation for field measurements and surface detection
<b>Hardware</b>	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
<b>Connections</b>	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
<b>Model</b>	ET3DV6
<b>Serial No.</b>	1387
<b>Construction</b>	Triangular core fiber optic detection system
<b>Frequency</b>	10 MHz to 6 GHz
<b>Linearity</b>	±0.2 dB (30 MHz to 3 GHz)
<u>Phantom(s)</u>	
<u>Evaluation Phantom</u>	
<b>Type</b>	Side Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	2.0 mm ± 0.1 mm
<b>Outer Dimensions</b>	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
<b>Type</b>	Planar Phantom
<b>Shell Material</b>	Plexiglas
<b>Bottom Thickness</b>	6.2 mm ± 0.1 mm
<b>Outer Dimensions</b>	86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)


<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


## 11.0 PROBE SPECIFICATION (ET3DV6)

<p><b>Construction:</b> Symmetrical design with triangular core Built-in shielding against static charges</p> <p><b>Calibration:</b> PEEK enclosure material (resistant to organic solvents, glycol) In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy <math>\pm 8\%</math>)</p> <p><b>Frequency:</b> 10 MHz to &gt; 6 GHz; Linearity: <math>\pm 0.2</math> dB (30 MHz to 3 GHz)</p> <p><b>Directivity:</b> <math>\pm 0.2</math> dB in brain tissue (rotation around probe axis) <math>\pm 0.4</math> dB in brain tissue (rotation normal to probe axis)</p> <p><b>Dynamic Range:</b> 5 <math>\mu</math>W/g to &gt; 100 mW/g; Linearity: <math>\pm 0.2</math> dB</p> <p><b>Surface Detect:</b> <math>\pm 0.2</math> mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p><b>Dimensions:</b> Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p><b>Application:</b> General dosimetry up to 3 GHz Compliance tests of mobile phone</p>	
<b>ET3DV6 E-Field Probe</b>	


## 12.0 SIDE PLANAR PHANTOM


<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
<b>Side Planar Phantom</b>	

## 13.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	
<b>Validation Planar Phantom</b>	

## 14.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
<b>Device Holder</b>	

<b>Company:</b> Vertex Standard Co., Ltd.	<b>FCC ID:</b> K6610654720	<b>IC ID:</b> 511B-10654720	
<b>Model(s):</b> VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>450 - 512 MHz</b>	
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.		Page 11 of 43

## 15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE	
USED	DESCRIPTION			Brain	Body		
x	Schmid & Partner DASY4 System	-	-	-	-	-	
x	-DASY4 Measurement Server	00158	1078	N/A	N/A	N/A	
x	-Robot	00046	599396-01	N/A	N/A	N/A	
x	-DAE4	00019	353	21Jun06	21Jun07	21Jun07	
x	-ET3DV6 E-Field Probe	00016	1387	16Mar06	16Mar07	16Mar07	
	-EX3DV4 E-Field Probe	00213	3600	24Jan07	24Jan08	24Jan08	
	-300MHz Validation Dipole	00023	135	23Oct06	23Oct07	23Oct07	
x	-450MHz Validation Dipole	00024	136	07Dec06	07Dec07	07Dec07	
	-835MHz Validation Dipole	00022	411	Brain	28Mar06	28Mar07	
				Body	18Jan07	18Jan08	
	-900MHz Validation Dipole	00020	054	Brain	06Jun06	06Jun07	
				Body	06Jun06	06Jun07	
	-1640MHz Validation Dipole	00212	0175	Brain	14Aug06	14Aug07	
	-1800MHz Validation Dipole	00021	247	Brain	08Jun06	08Jun07	
				Body	09Jun06	09Jun07	
	-1900MHz Validation Dipole	00032	151	Brain	09Jun06	09Jun07	
				Body	02Feb07	02Feb08	
	-2450MHz Validation Dipole	00025	150	Body	24Apr06	24Apr07	
	5GHz Validation Dipole	00126	1031	Body	18Jul06	18Jul07	
				-5200MHz	Body	14Nov06	14Nov07
				-5500MHz	Brain	15Mar06	15Mar07
				-5800MHz	Body	18Jul06	18Jul07
	-SAM Phantom V4.0C	00154	1033	N/A	N/A	N/A	
	-Barski Planar Phantom	00155	03-01	N/A	N/A	N/A	
x	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A	N/A	
x	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A	N/A	
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A	N/A	
x	Gigatronics 8652A Power Meter	00110	1835801	12Apr06	12Apr07	12Apr07	
	Gigatronics 8652A Power Meter	00008	1835267	22Jan07	22Jan08	22Jan08	
x	Gigatronics 80701A Power Sensor	00012	1834350	22Jan07	22Jan08	22Jan08	
	Gigatronics 80701A Power Sensor	00014	1833699	22Jan07	22Jan08	22Jan08	
x	HP 8753ET Network Analyzer	00134	US39170292	18Apr06	18Apr07	18Apr07	
	HP 8648D Signal Generator	00005	3847A00611	N/A	N/A	N/A	
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	06Apr06	06Apr07	06Apr07	
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A	N/A	N/A	
	HP E4408B Spectrum Analyzer	00015	US39240170	05Feb07	05Feb08	05Feb08	
	Anritsu Radio Communication Analyzer	00208	6200241241	06Jun06	06Jun07	06Jun07	

## 16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
<b>Combined Standard Uncertainty</b>					<b>12.65</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>25.31</b>	



Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])



## MEASUREMENT UNCERTAINTIES (CONT.)


UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V <sub>i</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration (450 MHz)	8.0	Normal	1	1	8.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
<b>Test Sample Related</b>						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
<b>Phantom and Setup</b>						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	5	Normal	1	0.64	3.2	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	5	Normal	1	0.6	3.0	∞
<b>Combined Standard Uncertainty</b>					<b>11.20</b>	
<b>Expanded Uncertainty (k=2)</b>					<b>22.39</b>	



Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


## 17.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/IEEE C95.1-2005 - "American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3 kHz to 300 GHz", New York: IEEE, April 2006.

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX A - SAR MEASUREMENT DATA**

<b>Company:</b>	<b>Vertex Standard Co., Ltd.</b>	<b>FCC ID:</b>	<b>K6610654720</b>	<b>IC ID:</b>	<b>511B-10654720</b>	
<b>Model(s):</b>	<b>VX-351-AG7B-5 / VX-354-AG7B-5</b>	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

**Face-Held SAR - 481 MHz - Mid Channel - Antenna P/N: ATU-6D**

**DUT: Vertex; Model: VX-354-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 7C000003**


Ambient Temp: 23.9°C; Fluid Temp: 21.4°C; Barometric Pressure: 102.1 kPa; Humidity: 31%


Communication System: FM UHF  
 7.4 V, 2000 mAh Li-ion Battery Pack  
 Frequency: 481 MHz; Duty Cycle: 1:1  
 RF Output Power: 5.2 Watts (Conducted)  
 Medium: HSL450 Medium parameters used:  $f = 481 \text{ MHz}$ ;  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 44.7$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


**Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - Mid Channel Area Scan (9x20x1):** Measurement grid: dx=15mm, dy=15mm

**Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - Mid Channel /Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
 Reference Value = 90.8 V/m; Power Drift = -0.239 dB  
 Peak SAR (extrapolated) = 12.0 W/kg  
**SAR(1 g) = 7.65 mW/g; SAR(10 g) = 5.4 mW/g**  
 Maximum value of SAR (measured) = 7.97 mW/g

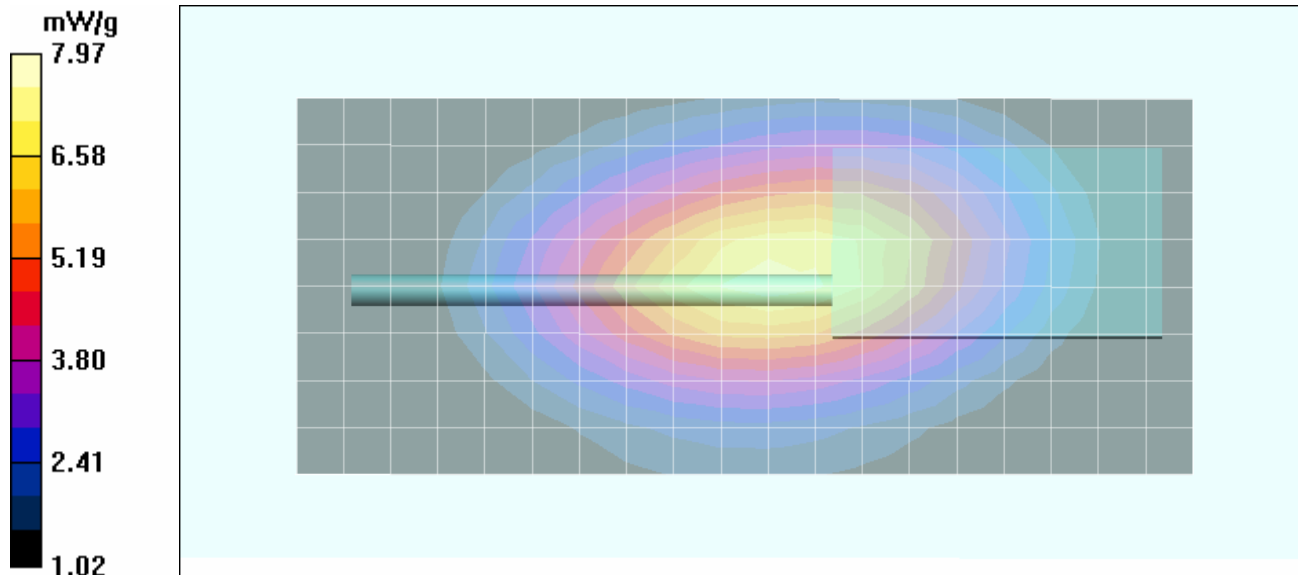



<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 43
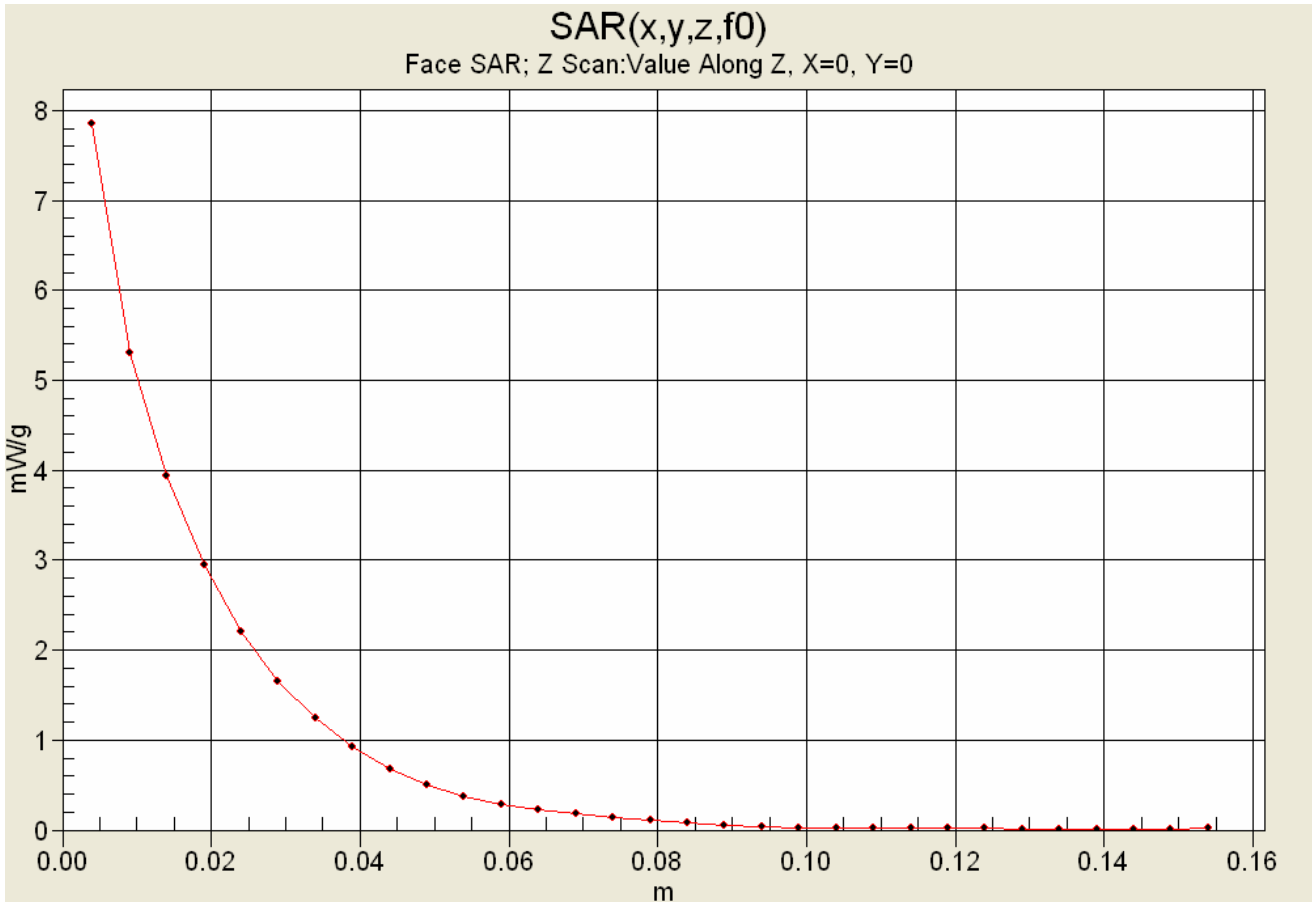
### Z-Axis Scan





	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

**Face-Held SAR - 450 MHz - Low Channel - Antenna P/N: ATU-6D**

**DUT: Vertex; Model: VX-354-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 7C000003**

Ambient Temp: 23.9°C; Fluid Temp: 21.4°C; Barometric Pressure: 102.1 kPa; Humidity: 31%

Communication System: FM UHF  
 7.4 V, 2000 mAh Li-ion Battery Pack  
 Frequency: 450 MHz; Duty Cycle: 1:1  
 RF Output Power: 5.0 Watts (Conducted)  
 Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 44.7$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


**Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - Low Channel Area Scan (9x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$


**Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - Low Channel Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$



Reference Value = 77.4 V/m; Power Drift = -0.303 dB  
 Peak SAR (extrapolated) = 8.56 W/kg

**SAR(1 g) = 5.50 mW/g; SAR(10 g) = 3.91 mW/g**

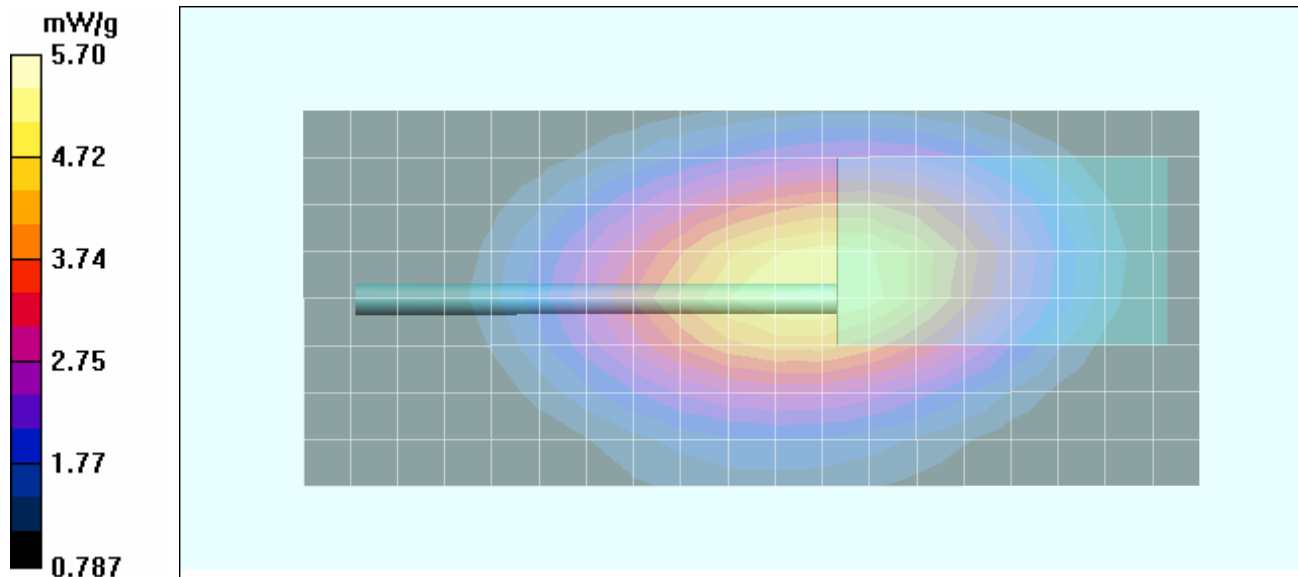Maximum value of SAR (measured) = 5.70 mW/g



<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

**Face-Held SAR - 512 MHz - High Channel - Antenna P/N: ATU-6F**

**DUT: Vertex; Model: VX-354-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 7C000003**

Ambient Temp: 23.9°C; Fluid Temp: 21.4°C; Barometric Pressure: 102.1 kPa; Humidity: 31%

Communication System: FM UHF  
 7.4 V, 2000 mAh Li-ion Battery Pack  
 Frequency: 512 MHz; Duty Cycle: 1:1  
 RF Output Power: 4.9 Watts (Conducted)  
 Medium: HSL450 Medium parameters used:  $f = 512 \text{ MHz}$ ;  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 44.7$ ;  $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


**Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - High Channel**



**Area Scan (9x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$   
 Maximum value of SAR (measured) = 6.85 mW/g

**Face-Held SAR - 2.5 cm Spacing from Front of DUT to Planar Phantom - High Channel**

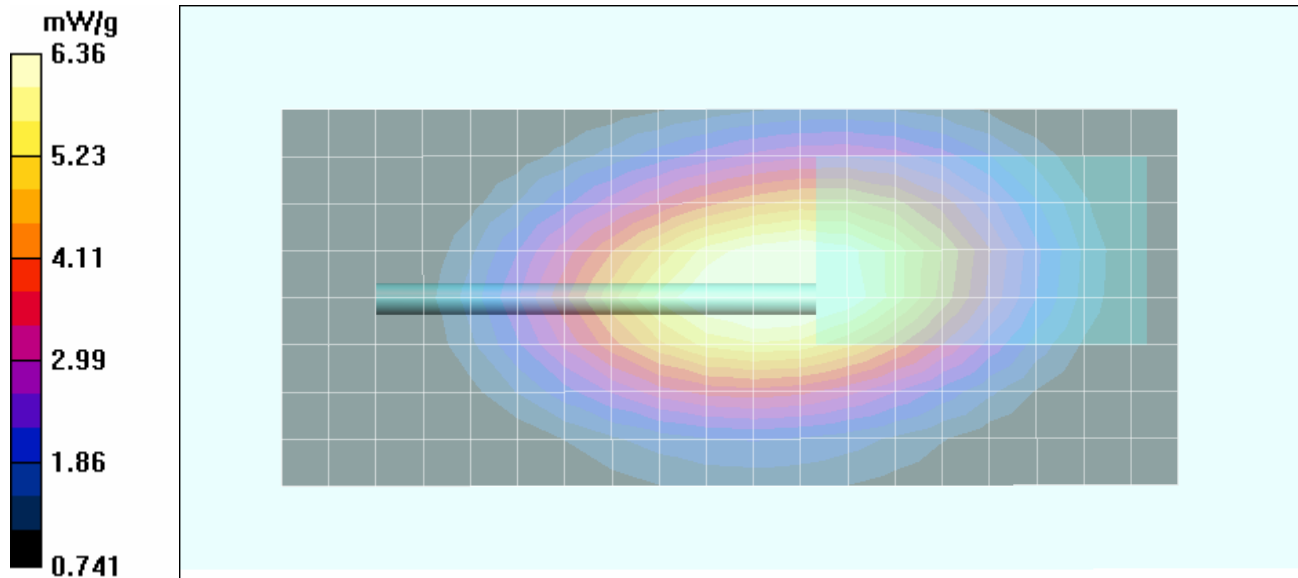**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 84.4 V/m; Power Drift = -0.339 dB  
 Peak SAR (extrapolated) = 9.57 W/kg  
**SAR(1 g) = 6.11 mW/g; SAR(10 g) = 4.28 mW/g**  
 Maximum value of SAR (measured) = 6.36 mW/g



<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

**Body-Worn SAR - 481 MHz - Mid Channel - Antenna P/N: ATU-6D**

**DUT: Vertex; Model: VX-354-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 7C000003**

**Body-Worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: Speaker-Microphone (P/N: MH-45B4B)**


Ambient Temp: 24.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 102.1 kPa; Humidity: 31%


Communication System: FM UHF  
 7.4 V, 2000 mAh Li-ion Battery Pack  
 Frequency: 481 MHz; Duty Cycle: 1:1  
 RF Output Power: 5.2 Watts (Conducted)  
 Medium: M450 Medium parameters used:  $f = 481 \text{ MHz}$ ;  $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon_r = 57.4$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


**Body-Worn SAR - 1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Mid Channel Area Scan (9x20x1):** Measurement grid: dx=15mm, dy=15mm

**Body-Worn SAR - 1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Mid Channel Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm  
 Reference Value = 101.1 V/m; Power Drift = -0.230 dB  
 Peak SAR (extrapolated) = 17.1 W/kg  
**SAR(1 g) = 10.7 mW/g; SAR(10 g) = 7.44 mW/g**  
 Maximum value of SAR (measured) = 11.1 mW/g

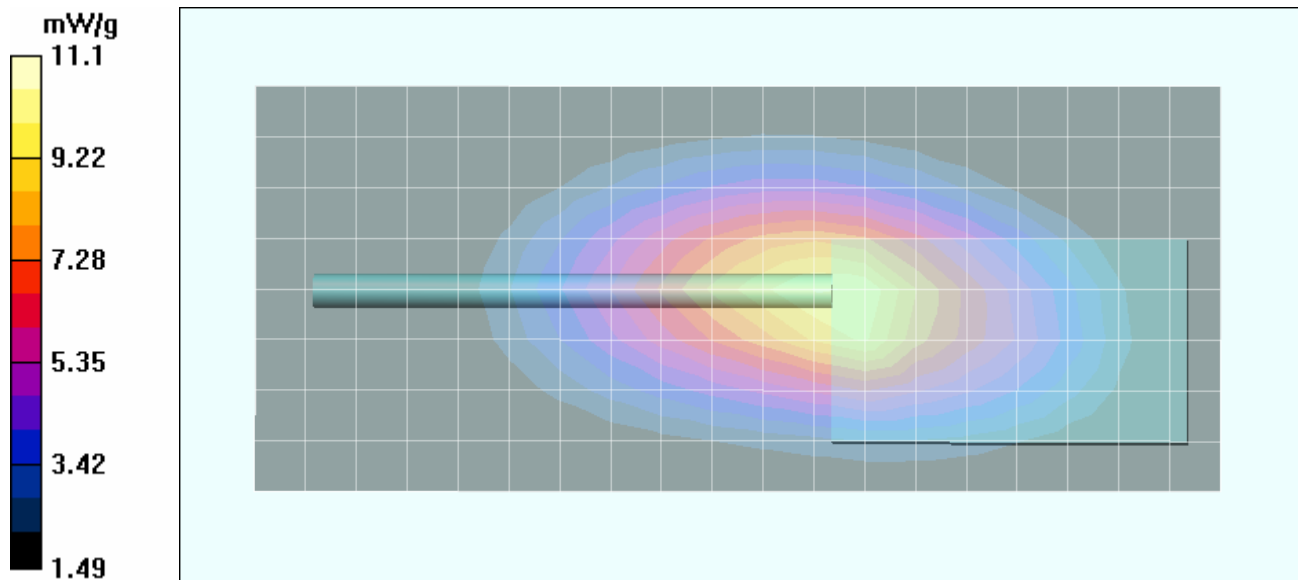


<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 43

### Z-Axis Scan

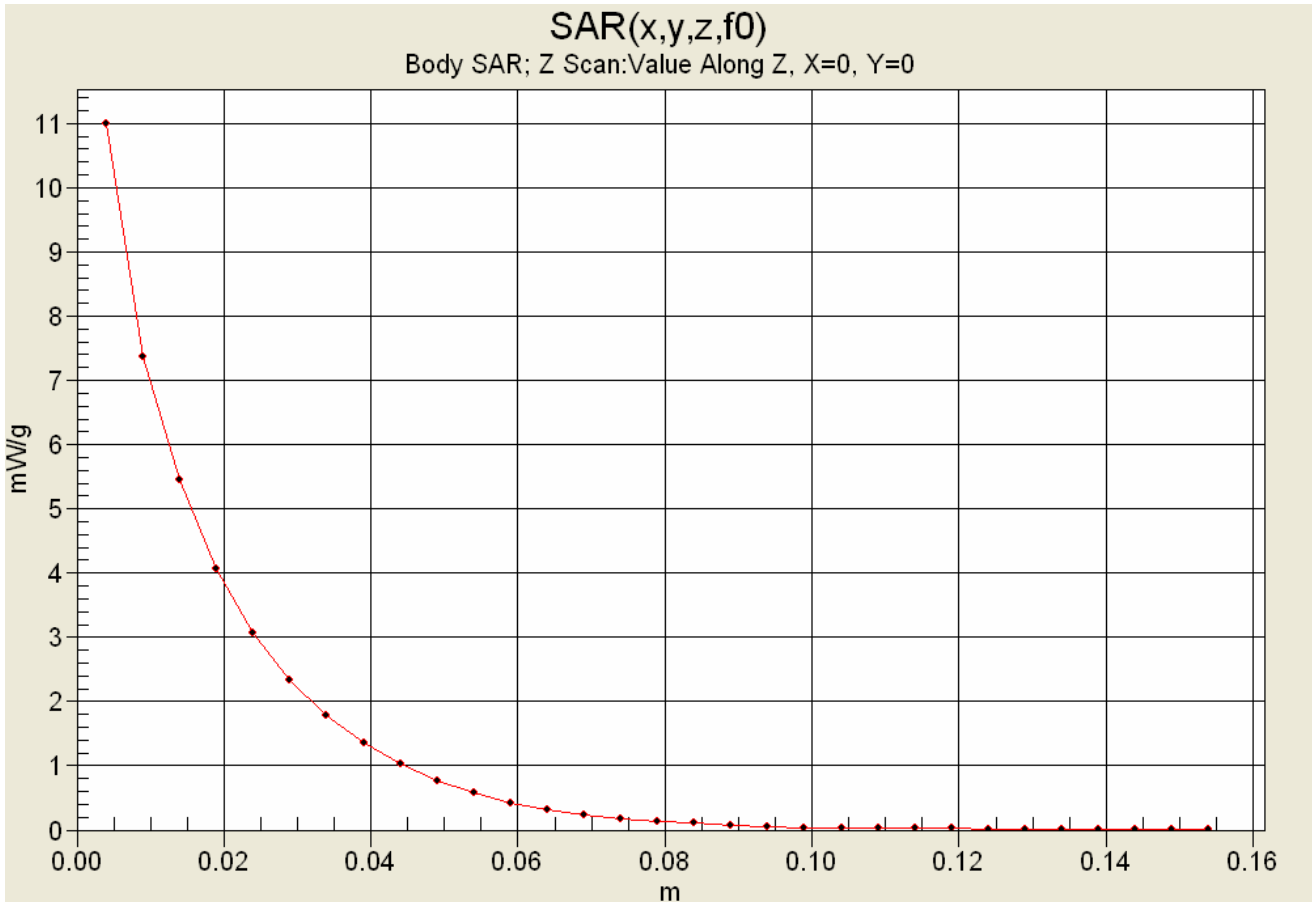



### SAR-versus-Time Power Droop Evaluation

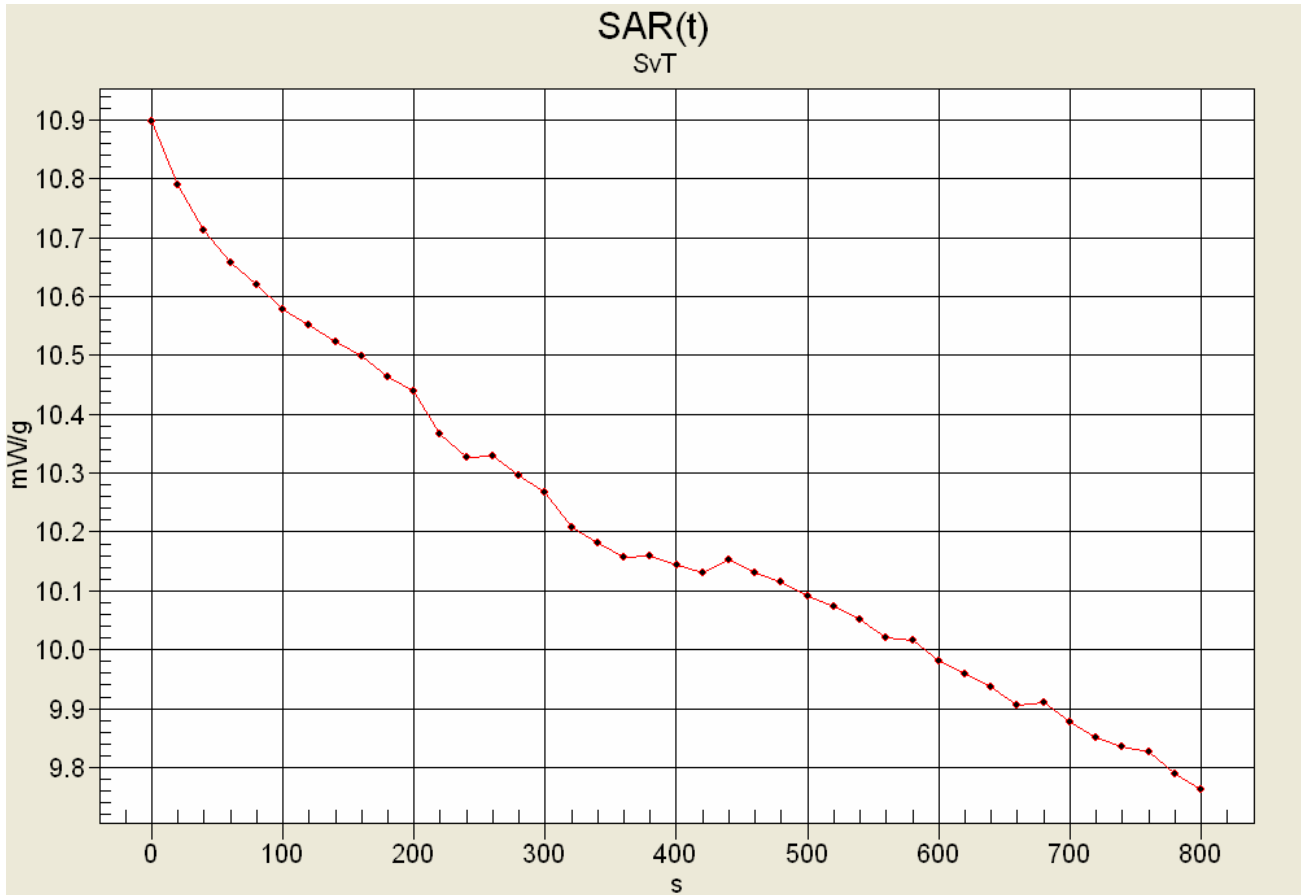Body-Worn Configuration  
Li-ion Battery Pack  
Antenna P/N: ATU-6D  
Mid Channel - 481 MHz



**Max SAR: 10.897 mW/g**  
**Low SAR: 9.763 mW/g (-0.477 dB)**  
**SAR after 340s: 10.182 mW/g (-0.295 dB)**  
(340s = Zoom Scan Duration)  
(800s = Area Scan Duration)



	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

**Body-Worn SAR - 450 MHz - Low Channel - Antenna P/N: ATU-6D**

**DUT: Vertex; Model: VX-354-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 7C000003**

**Body-Worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: Speaker-Microphone (P/N: MH-45B4B)**

Ambient Temp: 24.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 102.1 kPa; Humidity: 31%


Communication System: FM UHF  
7.4 V, 2000 mAh Li-ion Battery Pack  
Frequency: 450 MHz; Duty Cycle: 1:1  
RF Output Power: 5.0 Watts (Conducted)  
Medium: M450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon_r = 57.4$ ;  $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171



**Body-Worn SAR - 1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Low Channel Area Scan (9x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Body-Worn SAR - 1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - Low Channel Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$

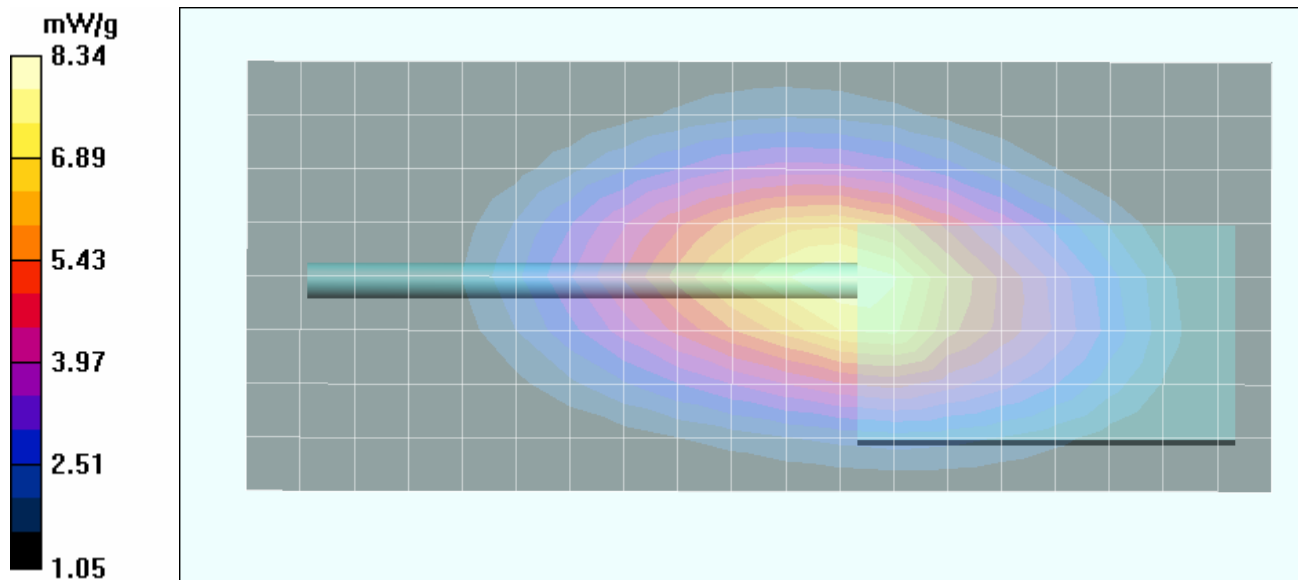Reference Value = 88.6 V/m; Power Drift = -0.314 dB  
Peak SAR (extrapolated) = 12.6 W/kg  
**SAR(1 g) = 7.94 mW/g; SAR(10 g) = 5.54 mW/g**  
Maximum value of SAR (measured) = 8.34 mW/g



<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>	<b>450 - 512 MHz</b>			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

**Body-Worn SAR - 512 MHz - High Channel - Antenna P/N: ATU-6F**

**DUT: Vertex; Model: VX-354-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 7C000003**

**Body-Worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: Speaker-Microphone (P/N: MH-45B4B)**


Ambient Temp: 24.0°C; Fluid Temp: 23.0°C; Barometric Pressure: 102.1 kPa; Humidity: 31%


Communication System: FM UHF  
7.4 V, 2000 mAh Li-ion Battery Pack  
Frequency: 512 MHz; Duty Cycle: 1:1  
RF Output Power: 4.9 Watts (Conducted)  
Medium: M450 Medium parameters used:  $f = 512 \text{ MHz}$ ;  $\sigma = 0.97 \text{ mho/m}$ ;  $\epsilon_r = 57.4$ ;  $\rho = 1000 \text{ kg/m}^3$



- Probe: ET3DV6 - SN1387; ConvF(7.3, 7.3, 7.3); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**Body-Worn SAR - 1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - High Channel Area Scan (9x20x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

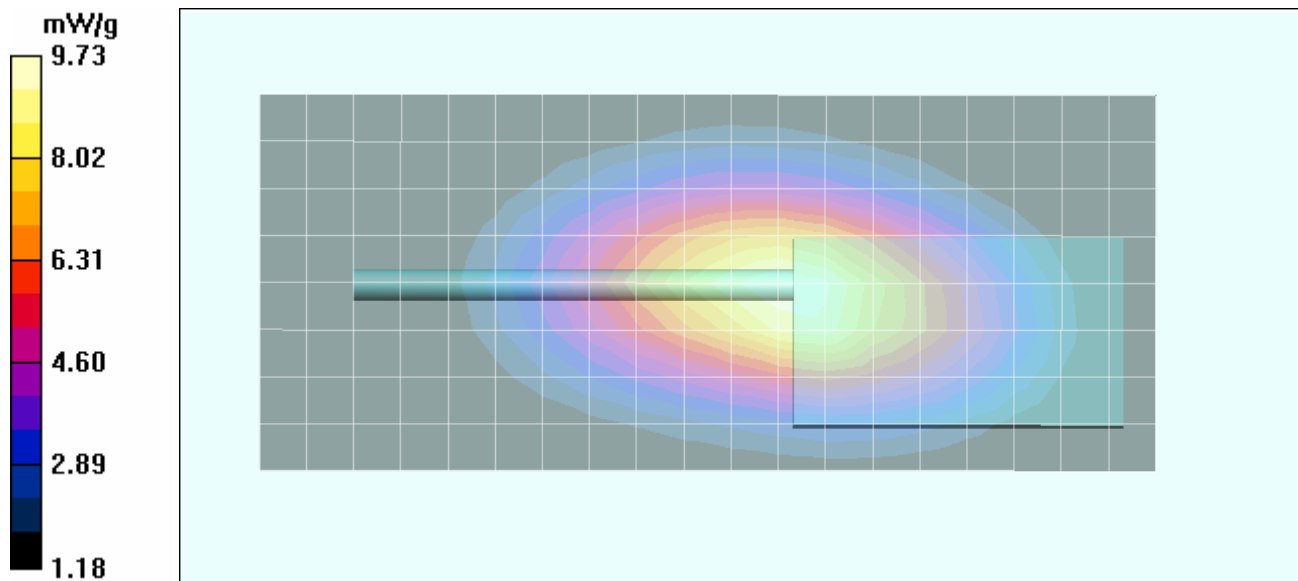
**Body-Worn SAR - 1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom - High Channel Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 98.2 V/m; Power Drift = -0.331 dB  
Peak SAR (extrapolated) = 15.0 W/kg  
**SAR(1 g) = 9.35 mW/g; SAR(10 g) = 6.44 mW/g**  
Maximum value of SAR (measured) = 9.73 mW/g





<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>	450 - 512 MHz			
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 25 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX B - SYSTEM PERFORMANCE CHECK DATA**

<b>Company:</b>	<b>Vertex Standard Co., Ltd.</b>	<b>FCC ID:</b>	<b>K6610654720</b>	<b>IC ID:</b>	<b>511B-10654720</b>	
<b>Model(s):</b>	<b>VX-351-AG7B-5 / VX-354-AG7B-5</b>	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 26 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 02/15/2007

## System Performance Check - 450 MHz Dipole

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 12/07/2006**

Ambient Temp: 23.9°C; Fluid Temp: 21.4°C; Barometric Pressure: 102.1 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450 \text{ MHz}$ ;  $\sigma = 0.90 \text{ mho/m}$ ;  $\epsilon_r = 44.7$ ;  $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASy4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### 450 MHz Dipole - System Performance Check/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

### 450 MHz Dipole - System Performance Check/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 38.1 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 2.18 W/kg


**SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.801 mW/g**

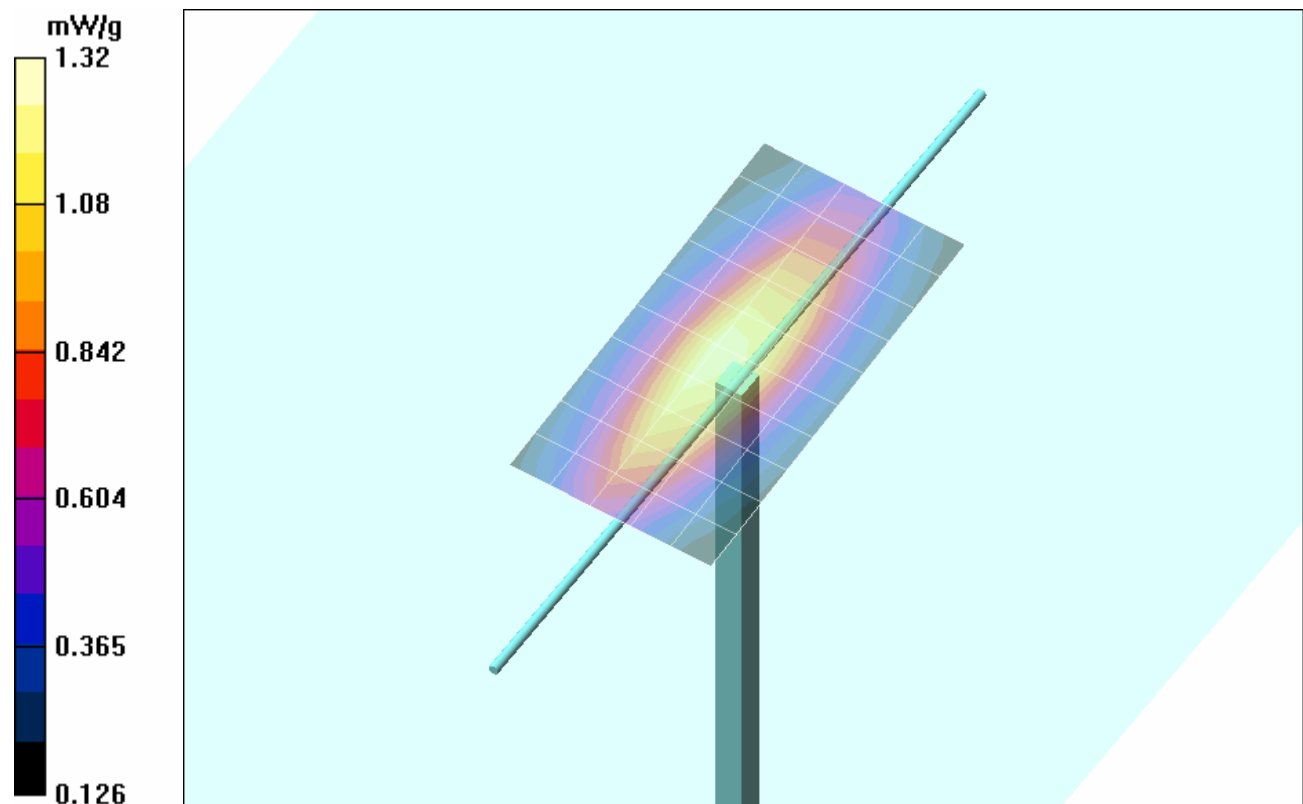

Maximum value of SAR (measured) = 1.32 mW/g




<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 43
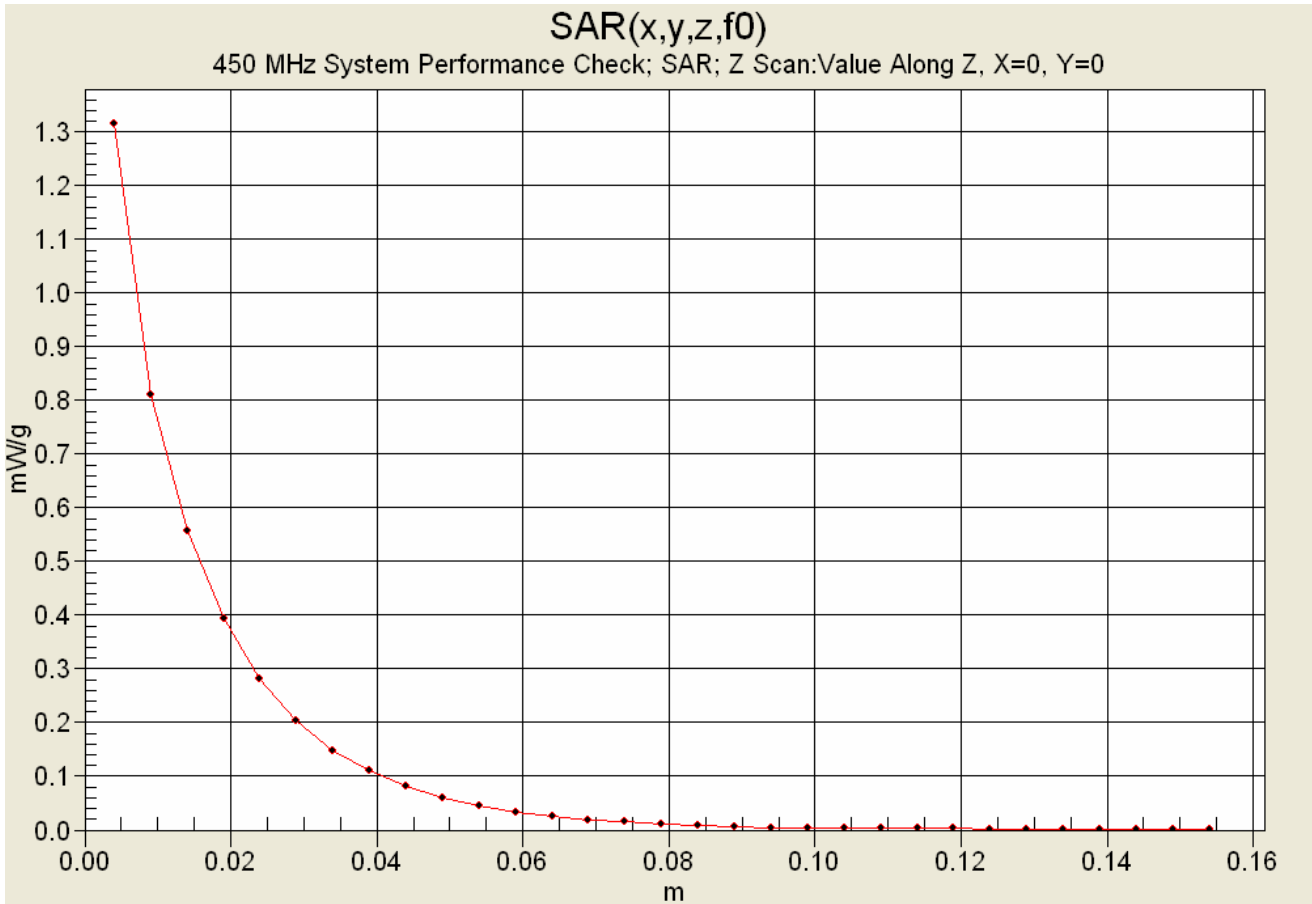
### Z-Axis Scan



	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS**

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 29 of 43

### 450 MHz System Performance Check & DUT Evaluation (Brain)



\*\*\*\*\*

Celltech Labs Inc.  
 Test Result for UIM Dielectric Parameter  
 Thu 15/Feb/2007  
 Frequency (GHz)  
 FCC\_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma  
 Test\_e Epsilon of UIM  
 Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eHFCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.27 0.81
0.3600	44.58	0.87	47.02 0.82
0.3700	44.46	0.87	46.69 0.82
0.3800	44.34	0.87	46.33 0.83
0.3900	44.22	0.87	46.05 0.84
0.4000	44.10	0.87	46.00 0.85
0.4100	43.98	0.87	45.28 0.86
0.4200	43.86	0.87	45.30 0.88
0.4300	43.74	0.87	45.30 0.88
0.4400	43.62	0.87	44.99 0.89
0.4500	43.50	0.87	44.72 0.90
0.4600	43.45	0.87	44.47 0.90
0.4700	43.40	0.87	44.36 0.92
0.4800	43.34	0.87	44.16 0.92
0.4900	43.29	0.87	43.78 0.93
0.5000	43.24	0.87	43.65 0.94
0.5100	43.19	0.87	43.39 0.94
0.5200	43.14	0.88	43.32 0.96
0.5300	43.08	0.88	43.19 0.96
0.5400	43.03	0.88	42.99 0.97
0.5500	42.98	0.88	42.77 0.98



	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


### 450 MHz DUT Evaluation (Body)



\*\*\*\*\*

Celltech Labs Inc.  
Test Result for UIM Dielectric Parameter  
Thu 15/Feb/2007  
Frequency (GHz)  
FCC\_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
FCC\_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma  
FCC\_eB FCC Limits for Body Epsilon  
FCC\_sB FCC Limits for Body Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM


\*\*\*\*\*

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	58.79	0.90
0.3600	57.60	0.93	58.84	0.90
0.3700	57.50	0.93	58.64	0.92
0.3800	57.40	0.93	58.30	0.92
0.3900	57.30	0.93	58.31	0.93
0.4000	57.20	0.93	58.11	0.93
0.4100	57.10	0.93	58.06	0.94
0.4200	57.00	0.94	57.78	0.95
0.4300	56.90	0.94	57.70	0.96
0.4400	56.80	0.94	57.49	0.96
0.4500	56.70	0.94	57.35	0.97
0.4600	56.66	0.94	57.29	0.97
0.4700	56.62	0.94	57.07	0.99
0.4800	56.58	0.94	56.75	0.99
0.4900	56.54	0.94	56.84	1.00
0.5000	56.51	0.94	56.50	1.01
0.5100	56.47	0.94	56.46	1.01
0.5200	56.43	0.95	56.62	1.03
0.5300	56.39	0.95	56.32	1.03
0.5400	56.35	0.95	56.36	1.04
0.5500	56.31	0.95	56.19	1.05


<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	



**APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS**

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 32 of 43

**FACE-HELD SAR TEST SETUP PHOTOGRAPHS**  
2.5 cm Spacing from Front of DUT to Planar Phantom  
Antenna P/N: ATU-6D

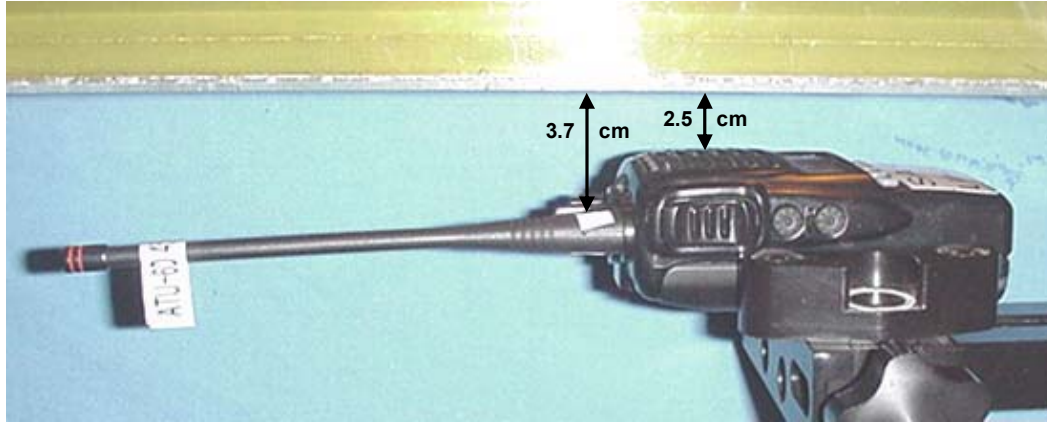


**FACE-HELD SAR TEST SETUP PHOTOGRAPHS**  
2.5 cm Spacing from Front of DUT to Planar Phantom  
Antenna P/N: ATU-6F

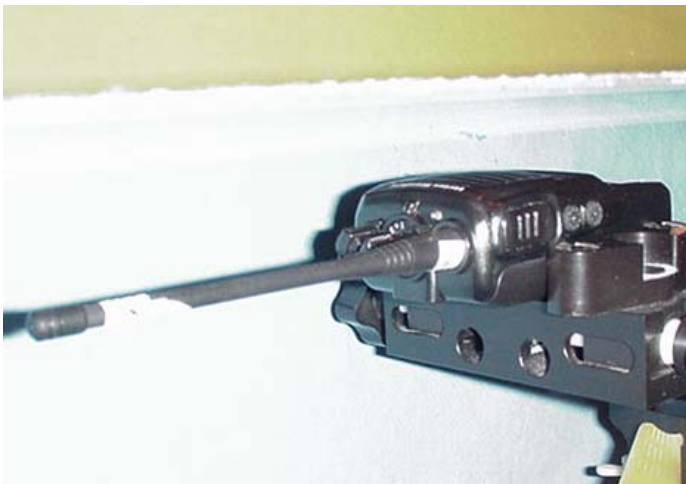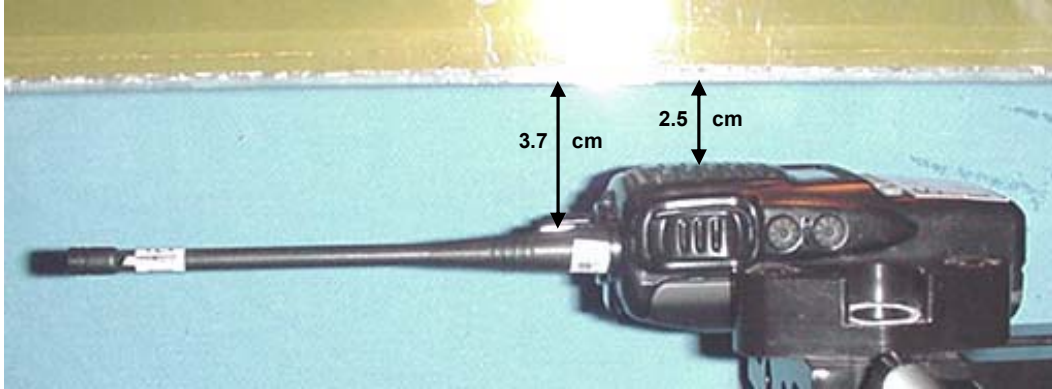




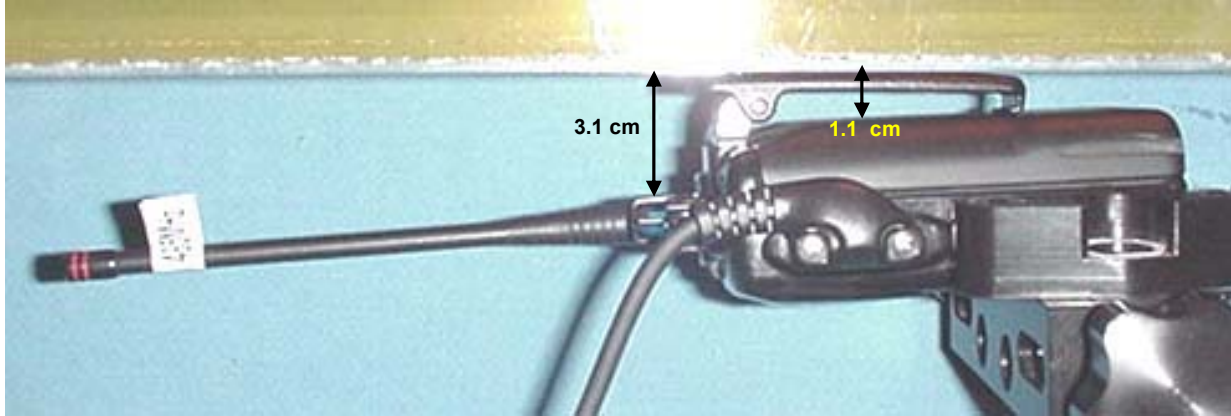

**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**  
**1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**  
**Antenna P/N: ATU-6D / Speaker-Microphone (P/N: MH-45B4B)**

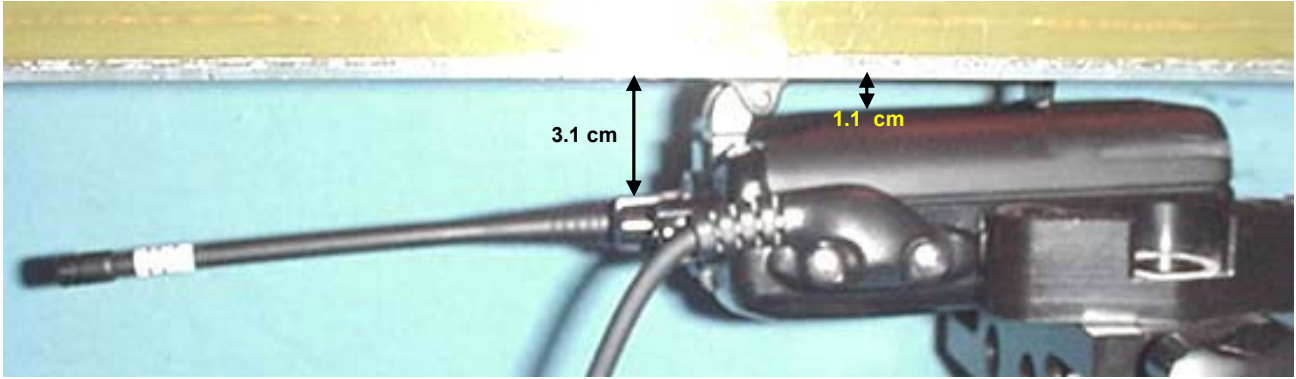

**BODY-WORN SAR TEST SETUP PHOTOGRAPHS**  
**1.1 cm Belt-Clip Spacing from Back of DUT to Planar Phantom**  
**Antenna P/N: ATU-6F / Speaker-Microphone (P/N: MH-45B4B)**



	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


**DUT PHOTOGRAPHS**



Front of DUT with  
Antenna P/N: ATU-6D



Front of DUT with  
Antenna P/N: ATU-6F

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 43



### DUT PHOTOGRAPHS



Back of DUT





Back of DUT with Belt-Clip



Top end of DUT



Bottom end of DUT

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**




Left Side of DUT with Belt-Clip





Right Side of DUT with Belt-Clip



Belt-Clip (Model: CLIP-18)

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 43

	Date(s) of Evaluation February 15, 2007	Test Report Serial No. 021307K66-T816-S90U	Report Revision No. Revision 1.0	 Certificate No. 2470.01
	Report Issue Date February 22, 2007	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

## DUT PHOTOGRAPHS



Antenna P/N: ATU-6D




Antenna P/N: ATU-6F





DUT Battery Compartment



Li-ion Battery Pack (Model: FNB-V96LI)

Company:	Vertex Standard Co., Ltd.	FCC ID:	K6610654720	IC ID:	511B-10654720	
Model(s):	VX-351-AG7B-5 / VX-354-AG7B-5	Portable FM UHF PTT Radio Transceiver	450 - 512 MHz			
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 40 of 43






	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**DUT PHOTOGRAPHS**





**DUT with Speaker-Microphone Audio Accessory (P/N: MH-45B4B)**

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 43

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX E - SYSTEM VALIDATION**

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 42 of 43

	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0	
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz	Fluid Type:

## 450 MHz SYSTEM VALIDATION

Type:

**450 MHz Validation Dipole**

Asset Number:

**00024**

Serial Number:

**136**

Place of Validation:

**Celltech Labs Inc.**

Date of Validation:

**December 07, 2006**

**Celltech Labs Inc. hereby certifies that the system validation was performed on the date indicated above.**

Validated by:





Approved by:







## 2. Validation Dipole VSWR Data

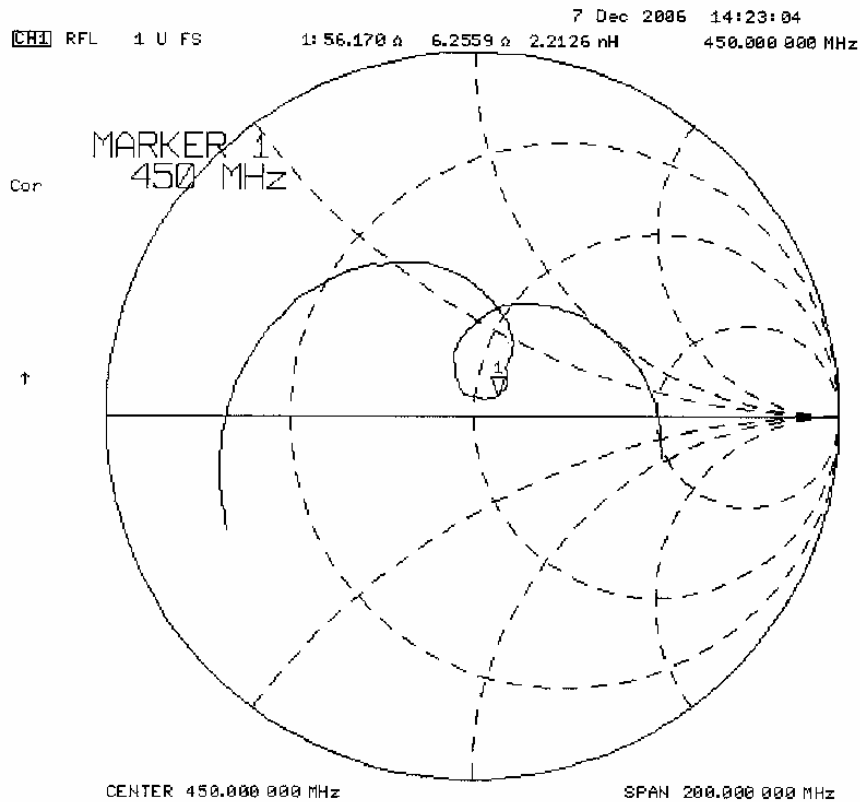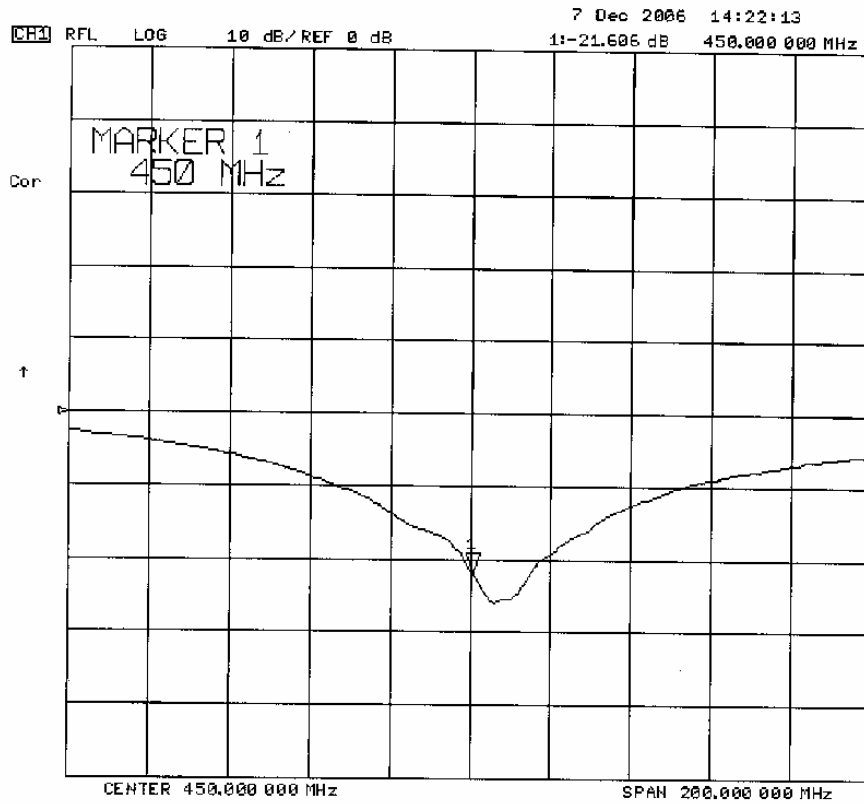

### 3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	420.0	250.0	6.2
<b>450</b>	<b>288.0</b>	<b>167.0</b>	<b>6.2</b>
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

### 4. Validation Phantom


The validation phantom was constructed using relatively low-loss tangent Plexiglas material.

The inner dimensions of the validation phantom are as follows:

Length: 83.5 cm  
Width: 36.9 cm  
Height: 21.8 cm


The bottom section of the validation phantom is constructed of  $6.2 \pm 0.1$ mm Plexiglas.

## 5. Dimensions of Plexiglas Planar Phantom

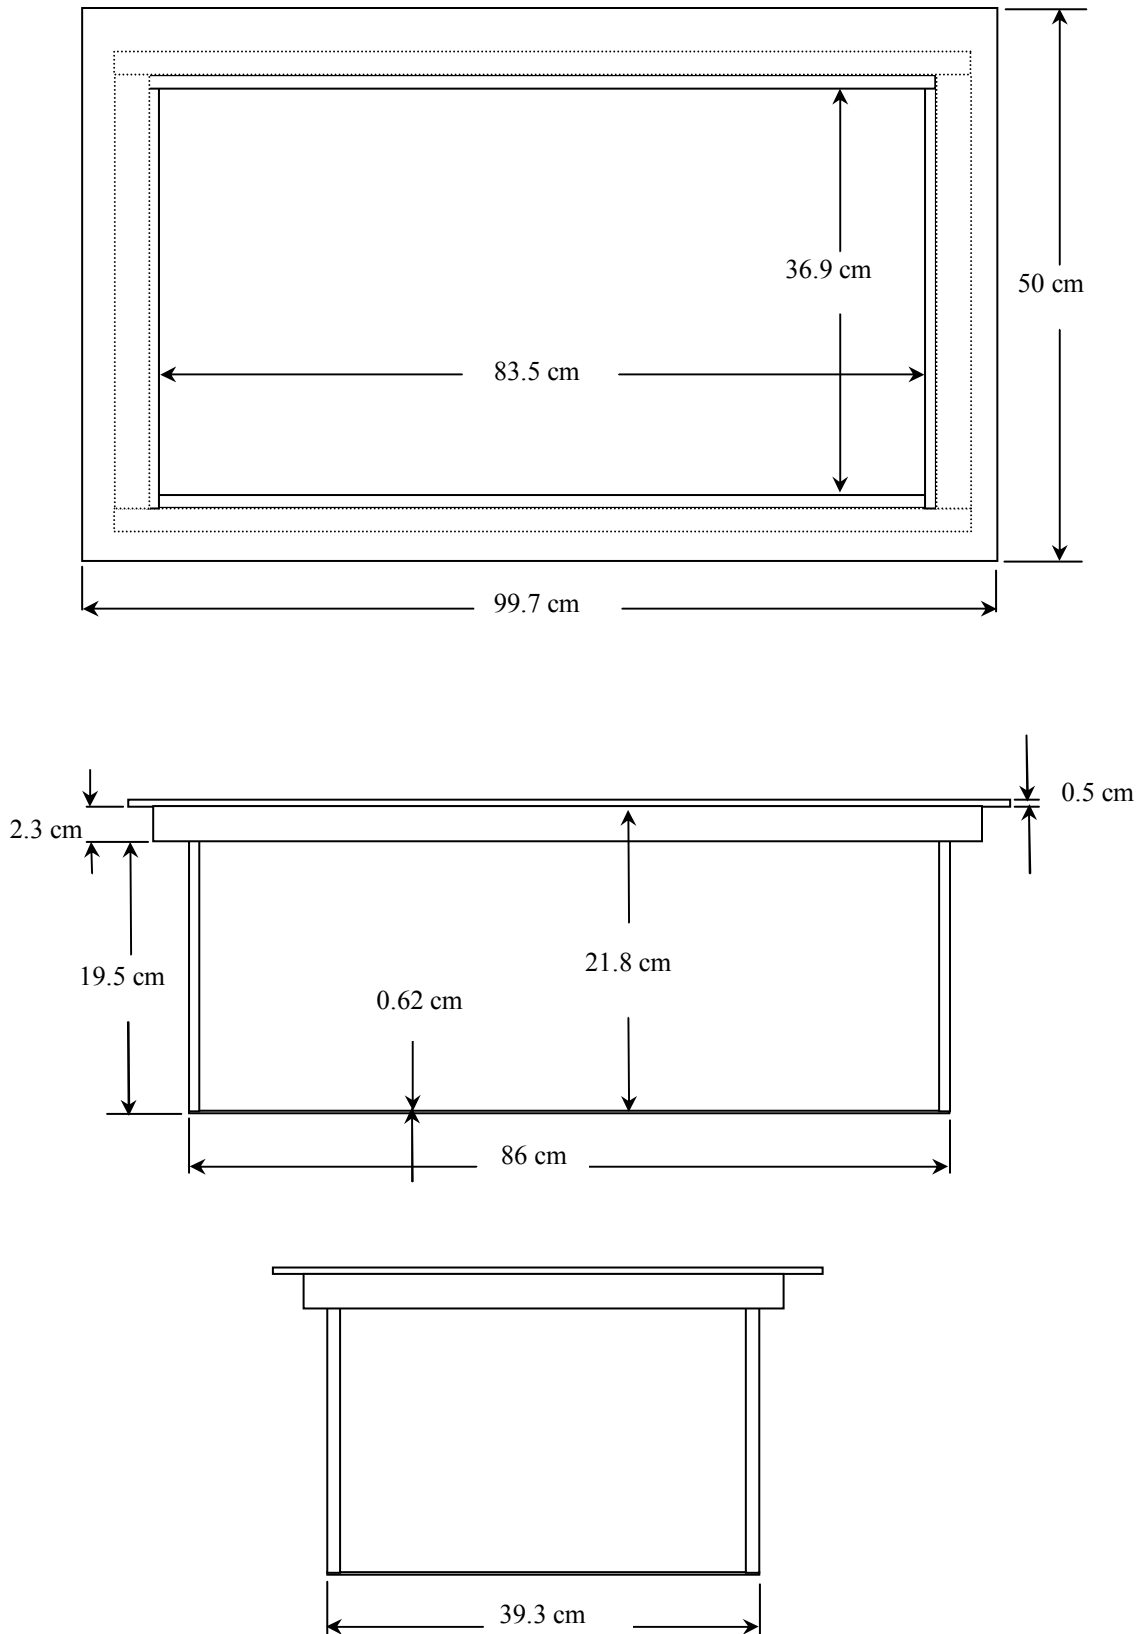

**6. 450 MHz System Validation Setup**




	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0	
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz	Fluid Type:

**7. 450 MHz Validation Dipole Setup**



## 8. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

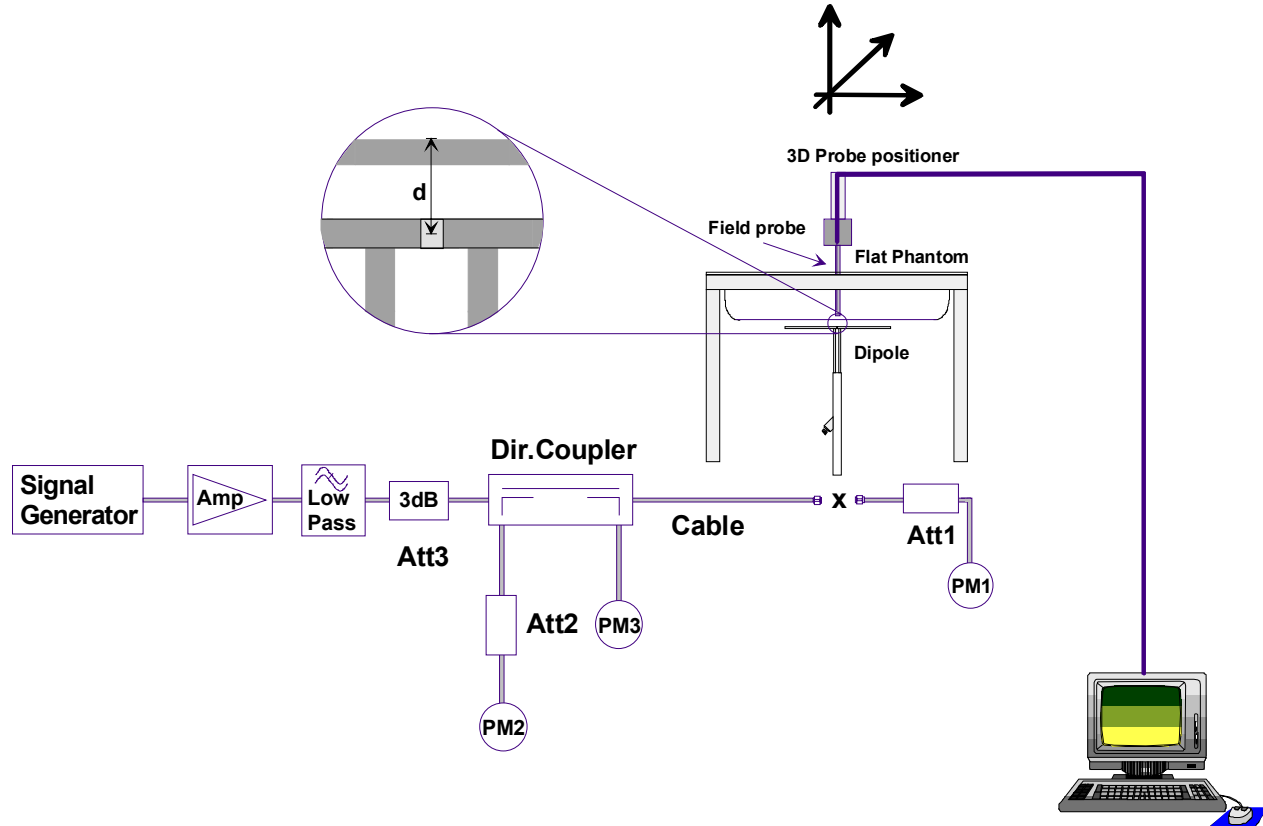

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

## 9. Measurement Conditions

The planar phantom was filled with 450 MHz brain tissue simulant:

Relative Permittivity: 44.7 (+2.8% deviation from target)  
 Conductivity: 0.90 mho/m (+3.4% deviation from target)  
 Fluid Temperature: 23.3°C  
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 24.0°C  
 Humidity: 33 %  
 Barometric Pressure: 102.1kPa

The 450 MHz brain tissue simulant consisted of the following ingredients:


Ingredient	Percentage by weight
Water	38.56%
Sugar	56.32%
Salt	3.95%
HEC	0.98%
Dowicil 75	0.19%
450 MHz Target Dielectric Parameters at 22 °C	$\epsilon_r = 43.5$ (+/- 5%) $\sigma = 0.87$ S/m (+/- 5%)

## 10. 450 MHz System Validation SAR Test Results

SAR @ 0.25W Input averaged over 1g				SAR @ 1W Input averaged over 1g			
IEEE Target		Measured	Deviation	IEEE Target		Measured	Deviation
1.23	+/- 10%	1.27	+3.3%	4.90	+/- 10%	5.08	+3.7%
SAR @ 0.25W Input averaged over 10g				SAR @ 1W Input averaged over 10g			
IEEE Target		Measured	Deviation	IEEE Target		Measured	Deviation
0.825	+/- 10%	0.810	-1.8%	3.30	+/- 10%	3.24	-1.8%

The results have been normalized to 1W (forward power) into the dipole.



	Date of Evaluation:	December 07, 2006	Document Issue No.:	SV450B-120706-R1.0
	Evaluation Type:	System Validation	Validation Dipole:	450 MHz
			Fluid Type:	Brain

Date Tested: 12/07/2006

## System Validation - 450 MHz Dipole - Brain Fluid

**DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 12/07/2006**

Ambient Temp: 24.0°C; Fluid Temp: 23.3°C; Barometric Pressure: 102.1 kPa; Humidity: 33%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450; Medium parameters used:  $\sigma = 0.90$  mho/m;  $\epsilon_r = 44.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1387; ConvF(7.4, 7.4, 7.4); Calibrated: 16/03/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 21/06/2006
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### 450 MHz Dipole - System Validation/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm

### 450 MHz Dipole - System Validation/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.5 V/m; Power Drift = 0.014 dB


Peak SAR (extrapolated) = 2.24 W/kg

**SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.810 mW/g**

Maximum value of SAR (measured) = 1.34 mW/g

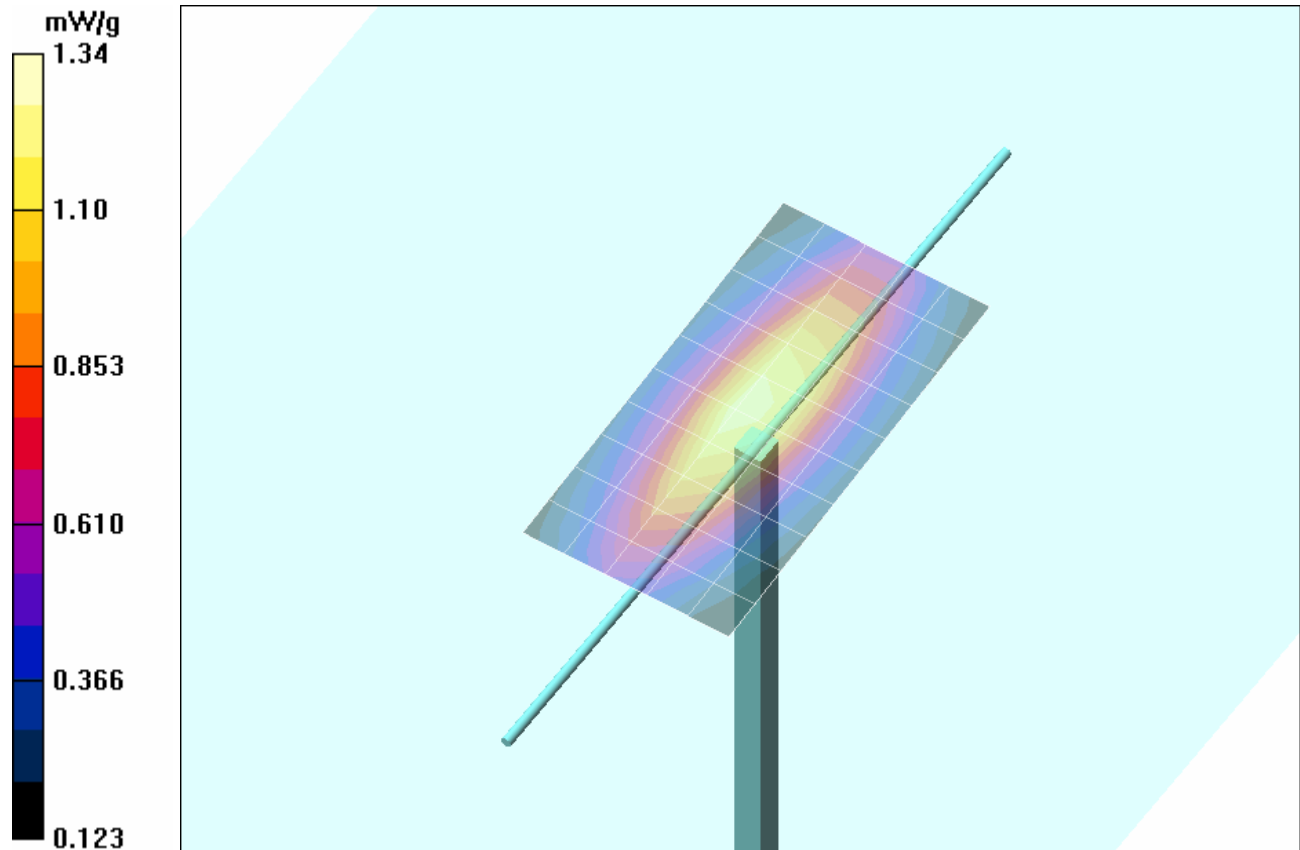

## Z-Axis Scan

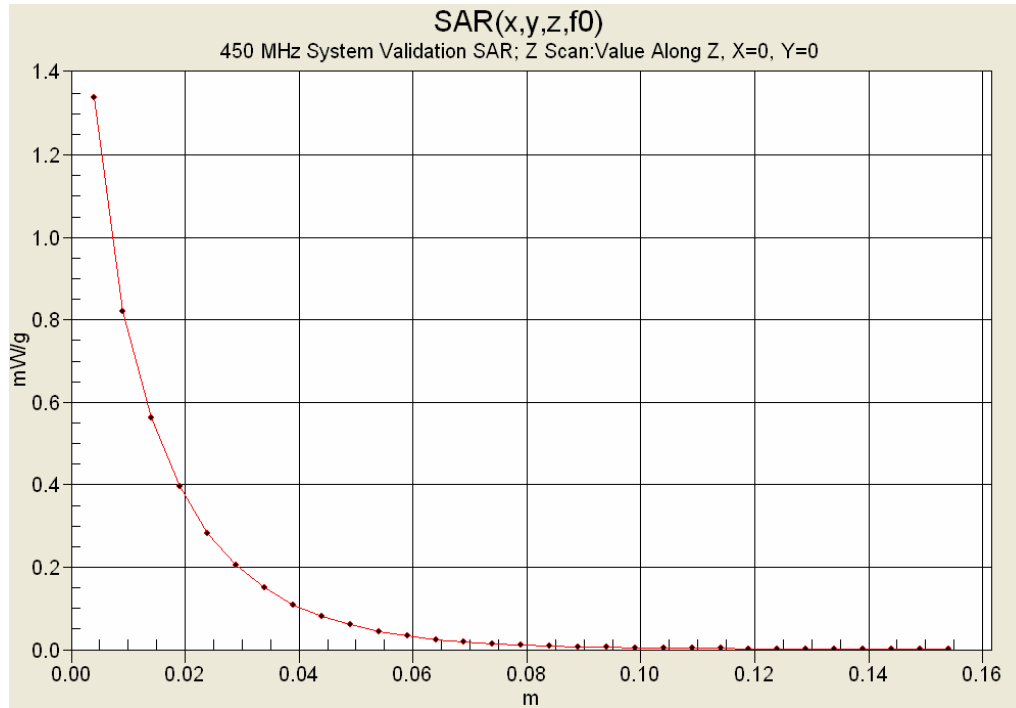

## 11. Measured Fluid Dielectric Parameters

### System Validation (Brain) - 450 MHz Dipole

\*\*\*\*\*

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Thu 07/Dec/2006

Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon



FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM


Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	47.00	0.81
0.3600	44.58	0.87	47.03	0.82
0.3700	44.46	0.87	46.57	0.83
0.3800	44.34	0.87	46.74	0.84
0.3900	44.22	0.87	46.22	0.85
0.4000	44.10	0.87	45.87	0.86
0.4100	43.98	0.87	45.56	0.87
0.4200	43.86	0.87	45.20	0.88
0.4300	43.74	0.87	45.11	0.88
0.4400	43.62	0.87	44.87	0.89
0.4500	43.50	0.87	44.67	0.90
0.4600	43.45	0.87	44.53	0.91
0.4700	43.40	0.87	44.30	0.92
0.4800	43.34	0.87	43.85	0.92
0.4900	43.29	0.87	43.89	0.94
0.5000	43.24	0.87	43.69	0.94
0.5100	43.19	0.87	43.31	0.95
0.5200	43.14	0.88	43.18	0.96
0.5300	43.08	0.88	43.13	0.97
0.5400	43.03	0.88	42.70	0.98
0.5500	42.98	0.88	42.54	0.98

	<u>Date(s) of Evaluation</u> February 15, 2007	<u>Test Report Serial No.</u> 021307K66-T816-S90U	<u>Report Revision No.</u> Revision 1.0	 Certificate No. 2470.01
	<u>Report Issue Date</u> February 22, 2007	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

**APPENDIX F - PROBE CALIBRATION**

<b>Company:</b>	Vertex Standard Co., Ltd.	<b>FCC ID:</b>	K6610654720	<b>IC ID:</b>	511B-10654720	
<b>Model(s):</b>	VX-351-AG7B-5 / VX-354-AG7B-5	<b>Portable FM UHF PTT Radio Transceiver</b>		<b>450 - 512 MHz</b>		
2007 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 43 of 43



Accredited by the Swiss Federal Office of Metrology and Accreditation  
**The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 108**

Client **Celltech Labs**

Certificate No: **ET3-1387\_Mar06**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1387**

Calibration procedure(s) **QA CAL-01.v5  
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 16, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.



All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	11-Aug-05 (METAS, No. 251-00499)	Aug-06
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	11-Aug-05 (METAS, No. 251-00500)	Aug-06
Reference Probe ES3DV2	SN: 3013	2-Jan-06 (SPEAG, No. ES3-3013_Jan06)	Jan-07
DAE4	SN: 654	2-Feb-06 (SPEAG, No. DAE4-654_Feb06)	Feb-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-05)	In house check: Nov 06

Calibrated by: **Katja Pokovic**      Name      Function  
**Technical Manager**

Approved by: **Niels Kuster**      Name      Function  
**Quality Manager**

Signature  
  


Issued: March 16, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1387

Manufactured:	September 21, 1999
Last calibrated:	March 18, 2005
Recalibrated:	March 16, 2006

Calibrated for DASYS Systems

(Note: non-compatible with DASYS2 system!)

**DASY - Parameters of Probe: ET3DV6 SN:1387****Sensitivity in Free Space<sup>A</sup>**

NormX	1.62 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.72 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.72 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

**Diode Compression<sup>B</sup>**

DCP X	92 mV
DCP Y	92 mV
DCP Z	92 mV

**Sensitivity in Tissue Simulating Liquid (Conversion Factors)**

Please see Page 8.

**Boundary Effect**

TSL                      900 MHz      Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	9.3	5.0
SAR <sub>be</sub> [%]	With Correction Algorithm	0.1	0.2

**Sensor Offset**

Probe Tip to Sensor Center                      2.7 mm

**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**


<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.






# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

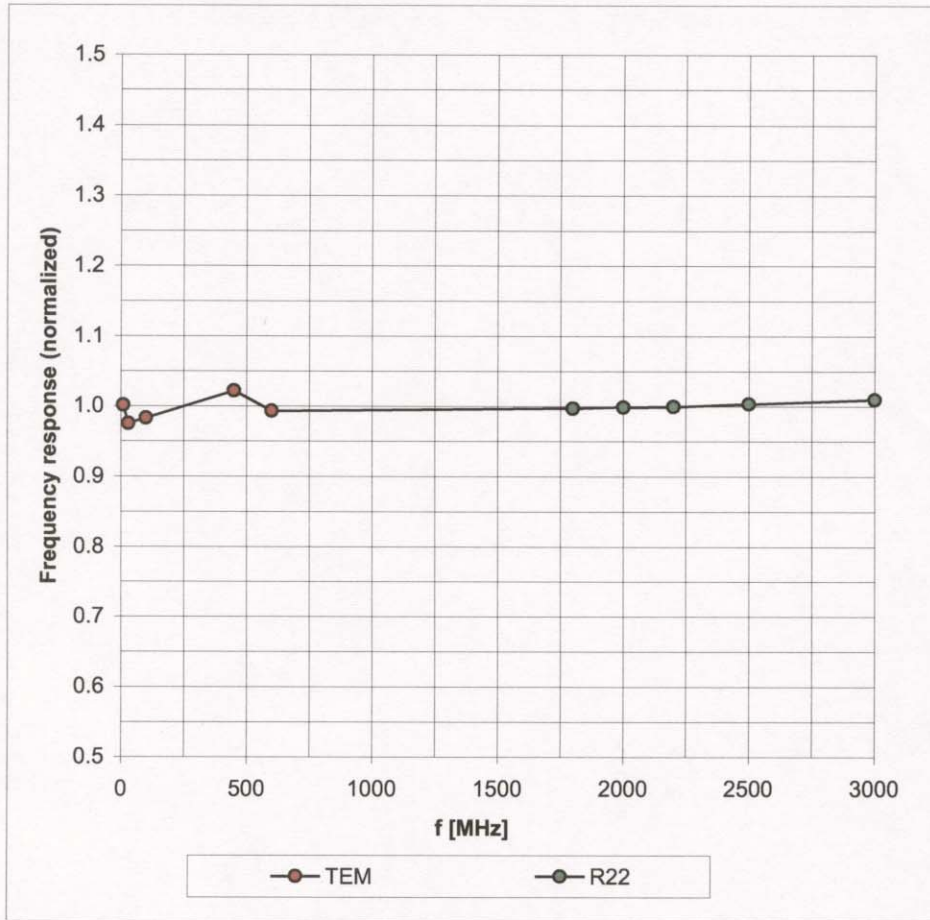



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

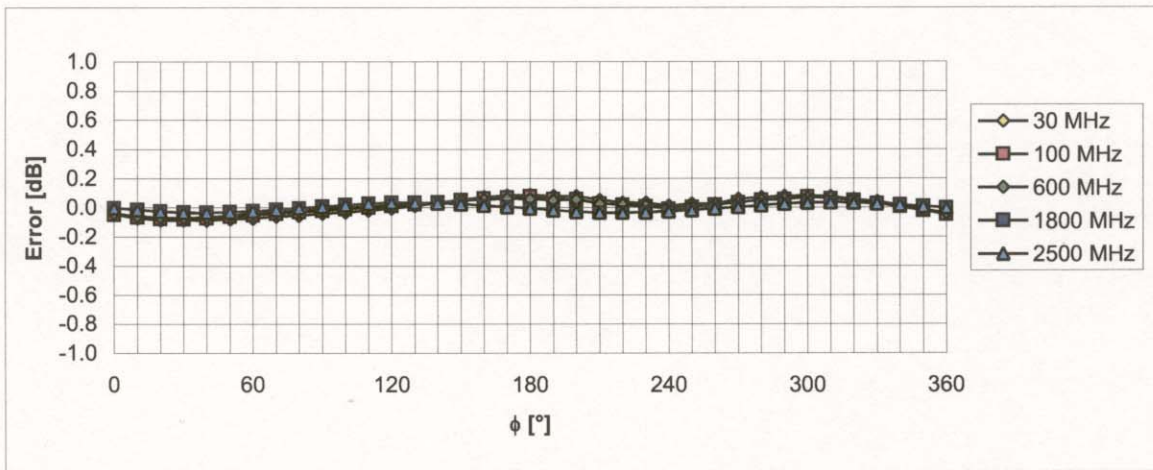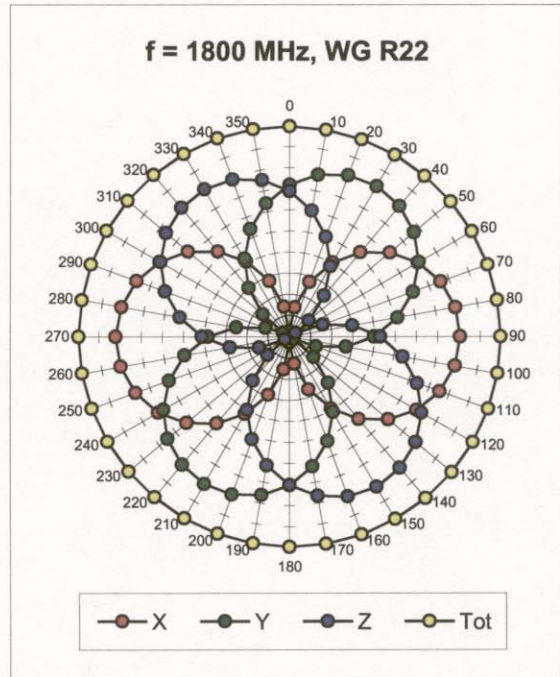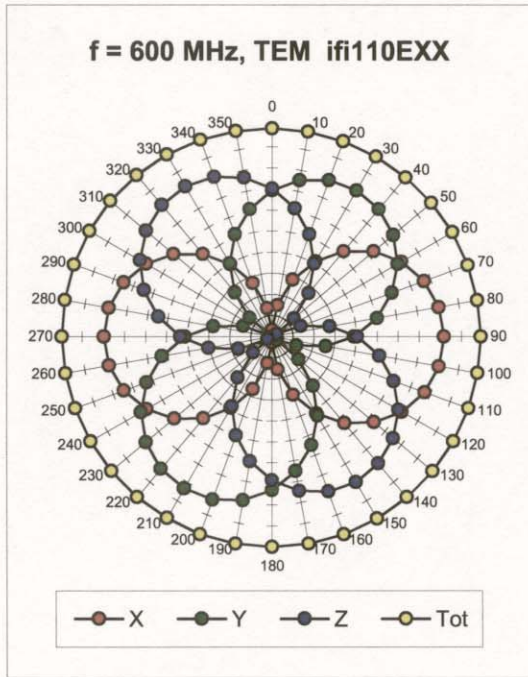



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range $f(SAR_{head})$ (Waveguide R22, $f = 1800$ MHz)

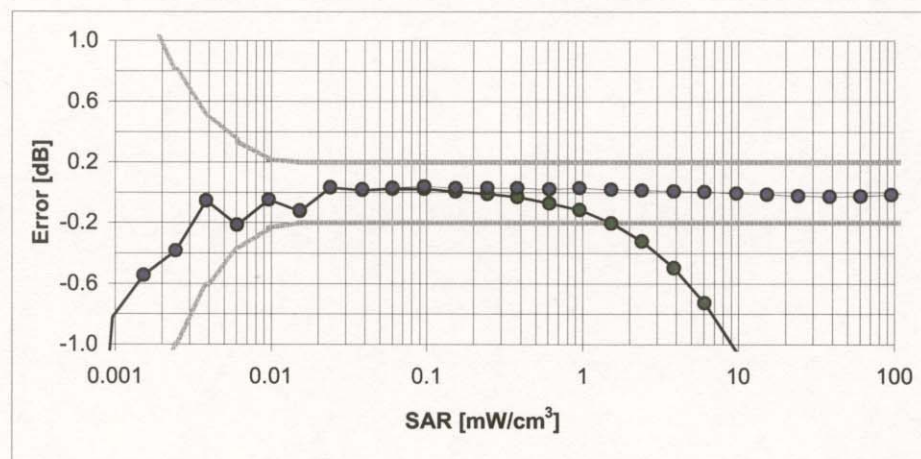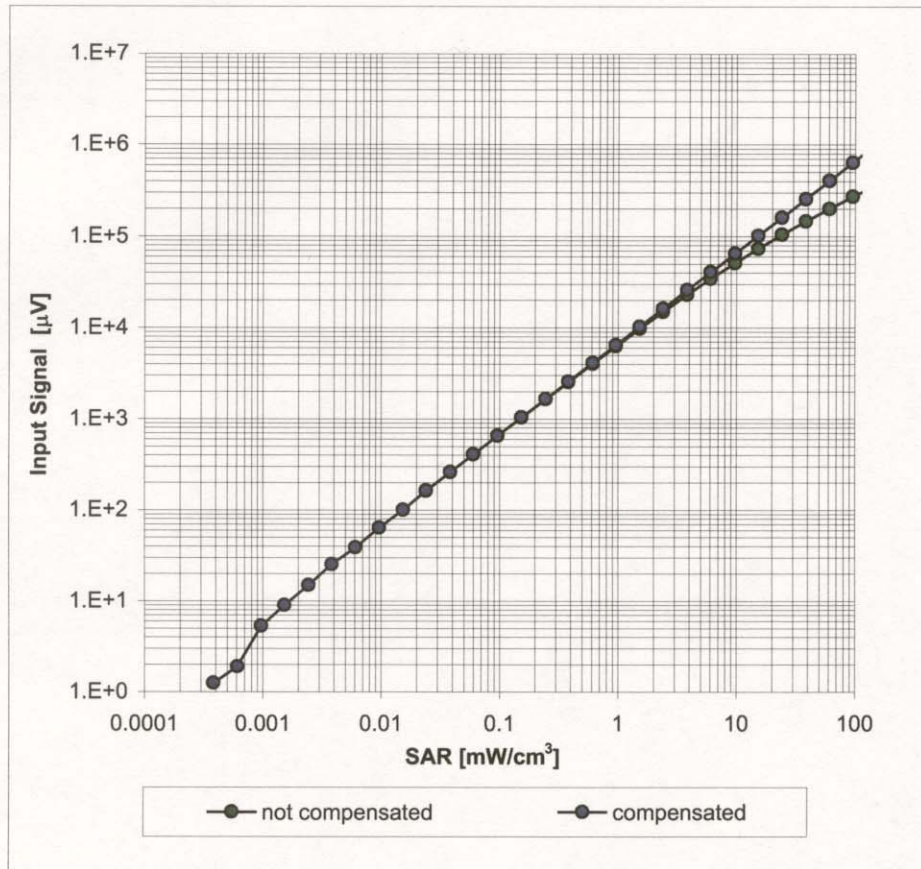

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

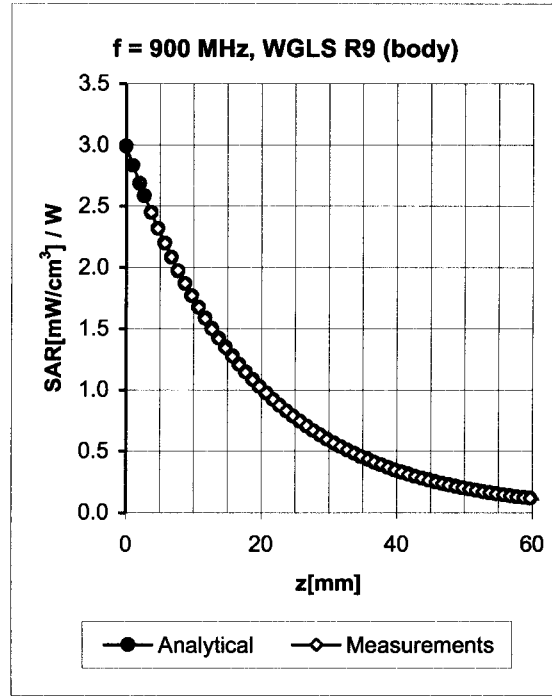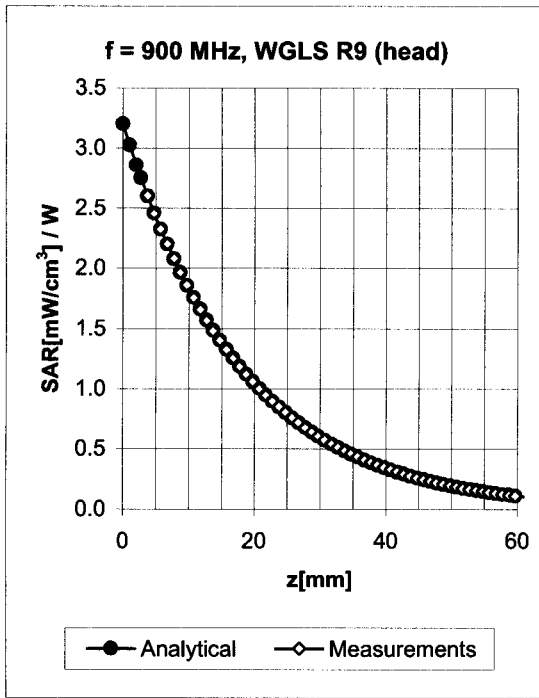


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.62	1.86	6.35 ± 11.0% (k=2)
900	± 50 / ± 100	Body	55.0 ± 5%	1.05 ± 5%	0.59	1.97	6.04 ± 11.0% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



# Deviation from Isotropy in HSL

Error ( $\phi, \vartheta$ ),  $f = 900$  MHz

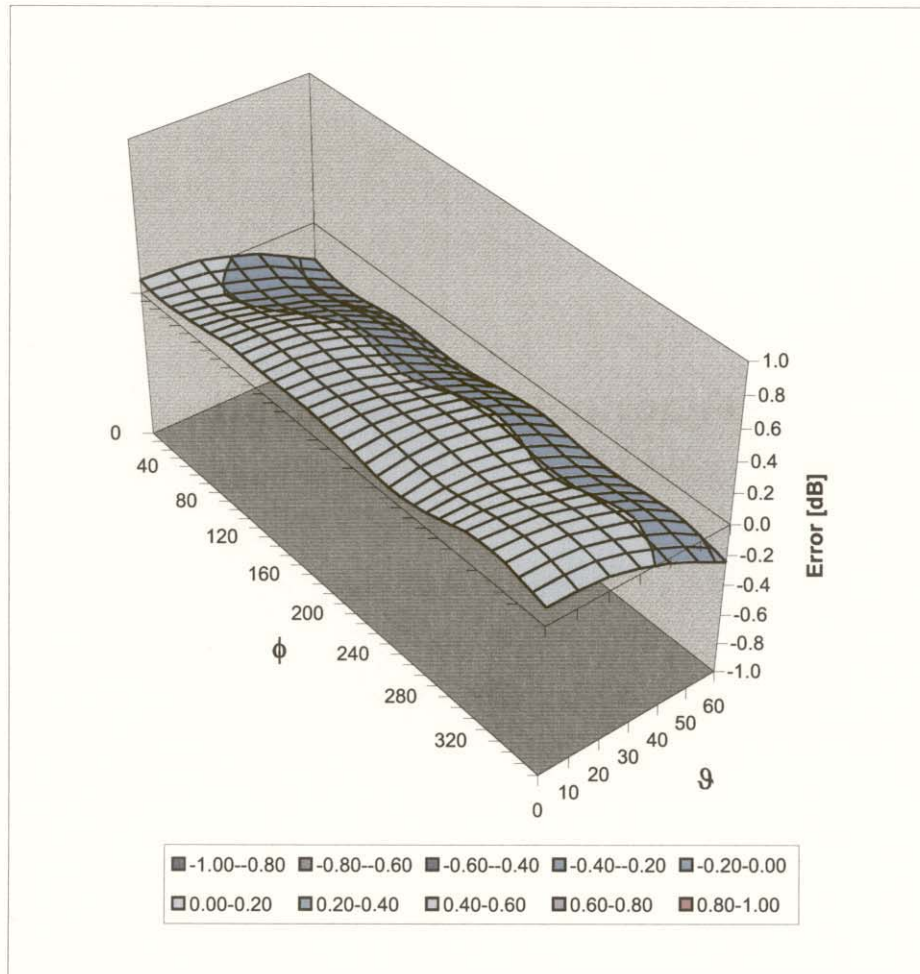

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

## **Additional Conversion Factors** for Dosimetric E-Field Probe

Type:

**ET3DV6**

Serial Number:

**1387**

Place of Assessment:

**Zurich**

Date of Assessment:


**March 18, 2006**

Probe Calibration Date:

**March 16, 2006**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:





Zeughausstrasse 43, 8004 Zurich, Switzerland  
 Phone +41 1 245 9700, Fax +41 1 245 9779  
 info@speag.com, http://www.speag.com

## Dosimetric E-Field Probe ET3DV6 SN:1387

Conversion factor ( $\pm$  standard deviation)

150 $\pm$ 50 MHz	ConvF	8.6 $\pm$ 10%	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
150 $\pm$ 50 MHz	ConvF	8.2 $\pm$ 10%	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
300 $\pm$ 50 MHz	ConvF	7.8 $\pm$ 9%	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 $\pm$ 50 MHz	ConvF	7.4 $\pm$ 8%	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 $\pm$ 50 MHz	ConvF	7.3 $\pm$ 8%	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)
750 $\pm$ 50 MHz	ConvF	6.6 $\pm$ 7%	$\epsilon_r = 41.8 \pm 5\%$ $\sigma = 0.89 \pm 5\%$ mho/m (head tissue)
750 $\pm$ 50 MHz	ConvF	6.4 $\pm$ 7%	$\epsilon_r = 55.4 \pm 5\%$ $\sigma = 0.96 \pm 5\%$ mho/m (body tissue)
1925 $\pm$ 50 MHz	ConvF	5.0 $\pm$ 7%	$\epsilon_r = 39.8 \pm 5\%$ $\sigma = 1.48 \pm 5\%$ mho/m (head tissue)
1925 $\pm$ 50 MHz	ConvF	4.7 $\pm$ 7%	$\epsilon_r = 53.2 \pm 5\%$ $\sigma = 1.60 \pm 5\%$ mho/m (body tissue)

### Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.  
 Please see also Section 4.7 of the DASY4 Manual.