



	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

SAR TEST REPORT (FCC/IC)				
RF EXPOSURE EVALUATION		SPECIFIC ABSORPTION RATE		
APPLICANT	VERTEX STANDARD CO., LTD.			
DEVICE UNDER TEST (DUT)	PORTABLE FM UHF PUSH-TO-TALK RADIO TRANSCEIVER			
DEVICE FREQUENCY RANGE	450 - 512 MHz			
DEVICE MODEL(S)	VX-231-AG7B-5			
DEVICE IDENTIFIER(S)	FCC ID:	K6610854720	IC:	511B-10854720
APPLICATION TYPE	Certification			
STANDARD(S) APPLIED	FCC 47 CFR §2.1093			
	Health Canada Safety Code 6			
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supplement C (01-01)			
	Industry Canada RSS-102 Issue 2			
	IEEE 1528-2003			
	IEC 62209-1:2005			
FCC DEVICE CLASSIFICATION	Licensed Non-Broadcast Transmitter Held to Face (TNF)			
IC DEVICE CLASSIFICATION	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)			
RF EXPOSURE CATEGORY	Occupational / Controlled			
RF EXPOSURE EVALUATION	Face-held & Body-worn			
DATE(S) OF EVALUATION	August 06, 2008			
TEST REPORT SERIAL NO.	080608K66-T918-S90U			
TEST REPORT REVISION NO.	Revision 1.0	Initial Release	August 13, 2008	
TEST REPORT SIGNATORIES	Testing Performed By		Test Report Prepared By	
	Sean Johnston Celltech Labs Inc.		Jonathan Hughes Celltech Labs Inc.	
TEST LAB AND LOCATION	Celltech Compliance Testing and Engineering Lab			
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
TEST LAB CONTACT INFO.	Tel.: 250-765-7650		Fax: 250-765-7645	
	info@celltechlabs.com		www.celltechlabs.com	
TEST LAB ACCREDITATION(S)	 Test Lab Certificate No. 2470.01			

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab Information	Name	CELLTECH LABS INC.			
	Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada			
Applicant Information	Name	VERTEX STANDARD CO., LTD.			
	Address	4-8-8 Nakameguro, Meguro-ku, Tokyo 153-8664 Japan			
Standard(s) Applied	FCC	47 CFR §2.1093			
	IC	Health Canada Safety Code 6			
Procedure(s) Applied	FCC	OET Bulletin 65, Supplement C (Edition 01-01)			
	IC	RSS-102 Issue 2			
	IEEE	1528-2003			
	IEC	62209-1:2005			
Device Classification(s)	FCC	Licensed Non-Broadcast Transmitter Held to Face (TNF)			
	IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)			
Device RF Exposure Category	Portable	Occupational / Controlled Environment			
Device Identifier(s)	FCC ID:	K6610854720			
	IC:	511B-10854720			
	Model(s)	VX-231-AG7B-5			
	Serial No.	8H000019 (Identical Prototype)			
Device Description	Portable FM UHF Push-To-Talk (PTT) Radio Transceiver				
Transmit Frequency Range(s)	450 - 512 MHz				
Max. RF Output Power Tested	5.3 Watts	37.24 dBm	Conducted	450 MHz	Low Channel
	5.3 Watts	37.24 dBm	Conducted	481 MHz	Mid Channel
	5.2 Watts	37.16 dBm	Conducted	512 MHz	High Channel
Antenna Type(s) Tested	Detachable Whip	450 - 485 MHz	P/N: ATU-6D	Length: 151 mm	
	Detachable Whip	485 - 520 MHz	P/N: ATU-6F	Length: 141 mm	
Battery Type(s) Tested	Lithium-ion	7.4 V	1150 mAh	P/N: FNB-V103LI	
	Lithium-ion	7.4 V	2000 mAh	P/N: FNB-V104LI	
Body-worn Accessories Tested	Belt-Clip	Contains Plastic and Metal Components			Model: CLIP-18
Audio Accessories Tested	Speaker-Microphone	P/N: MH-45B4B	VOX Headset	P/N: VC-25	
Additional Audio Accessories	Speaker-Microphone	P/N: MH-360S	Speaker-Microphone	P/N: MH-450S	
Max. SAR Level(s) Evaluated	Face-held	3.87 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure
	Body-worn	5.33 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure
FCC/IC Spatial Peak SAR Limit	Head/Body	8.0 W/kg	1g	50% duty cycle	Occupational / Controlled Exposure

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the Occupational/Controlled Exposure environment. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 2, IEEE 1528-2003 and IEC 62209-1:2005. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results and statements contained in this report pertain only to the device(s) evaluated.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.

Test Report Approved By		Sean Johnston	Celltech Labs Inc.
--------------------------------	---	----------------------	---------------------------






Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 43

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 MEASUREMENT SUMMARY	5
4.0 DETAILS OF SAR EVALUATION	6
5.0 EVALUATION PROCEDURES	6
6.0 SYSTEM PERFORMANCE CHECK	7
7.0 SIMULATED EQUIVALENT TISSUES	8
8.0 SAR LIMITS	8
9.0 ROBOT SYSTEM SPECIFICATIONS	9
10.0 PROBE SPECIFICATION (ET3DV6)	10
11.0 SIDE PLANAR PHANTOM	10
12.0 VALIDATION PLANAR PHANTOM	10
13.0 DEVICE HOLDER	10
14.0 TEST EQUIPMENT LIST	11
15.0 MEASUREMENT UNCERTAINTIES	12
MEASUREMENT UNCERTAINTIES (CONT.)	13
16.0 REFERENCES	14
APPENDIX A - SAR MEASUREMENT DATA	15
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	27
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	30
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	34
APPENDIX E - SYSTEM VALIDATION	42
APPENDIX F - PROBE CALIBRATION	43


	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

1.0 INTRODUCTION

This measurement report demonstrates that the Vertex Standard Co., Ltd. Model: VX-231-AG7B-5 Portable FM UHF PTT Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]), IC RSS-102 Issue 2 (see reference [4]), IEEE 1528-2003 (see reference [5]) and IEC 62209-1:2005 (see reference [6]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

2.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

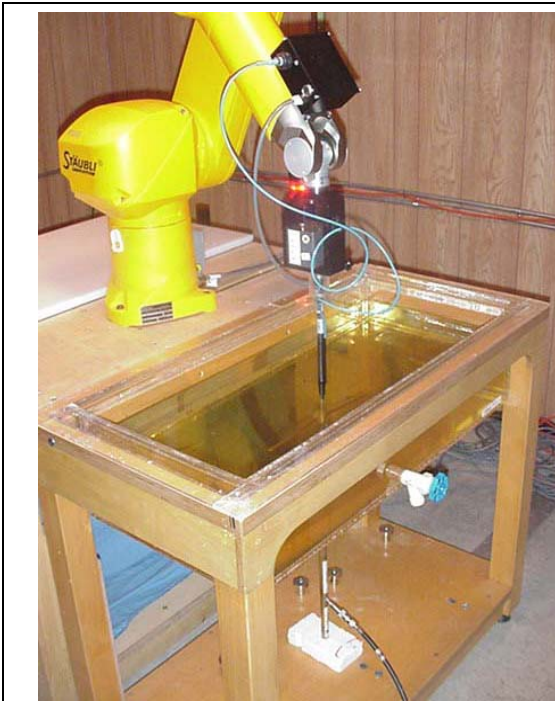



DASY4 SAR System with Plexiglas validation phantom



DASY4 SAR System with Plexiglas side planar phantom

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	


3.0 MEASUREMENT SUMMARY



SAR EVALUATION RESULTS

Test Type	Freq. MHz	Ch.	Test Mode	Antenna Part No.	Battery Type mAh	Accessory Type(s)		Device Spacing to Planar Phantom cm	Cond. Power Before Test Watts	Measured SAR 1g (W/kg)		SAR Drift During Test dB	Scaled SAR with droop 1g (W/kg)	
						Body-worn	Audio			Duty Cycle			Duty Cycle	
	100%	50%	100%	50%										
Face	481	Mid	CW	ATU-6D	1150	n/a	n/a	2.5	5.3	5.67	2.84	-0.271	6.04	3.02
Face	481	Mid	CW	ATU-6D	2000	n/a	n/a	2.5	5.3	6.11	3.06	-0.236	6.45	3.23
Face	450	Low	CW	ATU-6D	2000	n/a	n/a	2.5	5.3	7.00	3.50	-0.147	7.24	3.62
Face	512	High	CW	ATU-6F	2000	n/a	n/a	2.5	5.2	7.25	3.63	-0.283	7.74	3.87
Body	481	Mid	CW	ATU-6D	1150	Belt-Clip	Spkr-Mic	1.5	5.3	8.98	4.49	-0.216	9.44	4.72
Body	481	Mid	CW	ATU-6D	2000	Belt-Clip	Spkr-Mic	1.5	5.3	9.61	4.81	-0.201	10.1	5.03
Body	481	Mid	CW	ATU-6D	2000	Belt-Clip	Headset	1.5	5.3	10.2	5.10	-0.193	10.7	5.33
Body	450	Low	CW	ATU-6D	2000	Belt-Clip	Headset	1.5	5.3	10.3	5.15	-0.110	10.6	5.28
Body	512	High	CW	ATU-6F	2000	Belt-Clip	Headset	1.5	5.2	9.59	4.80	-0.403	10.5	5.26
SAR LIMIT(S)					BRAIN & BODY			SPATIAL PEAK			RF EXPOSURE CATEGORY			
FCC 47 CFR 2.1093		Health Canada Safety Code 6			8.0 W/kg			averaged over 1 gram			Occupational / Controlled			
Test Date	August 06, 2008				August 06, 2008				Measured Fluid Type		Brain	Body	Unit	
Fluid Type	480 MHz Brain				480 MHz Body				Atmospheric Pressure		101.1	101.1	kPa	
Dielectric Constant ϵ_r	IEEE Target		Meas.	Dev.	IEEE Target		Meas.	Dev.	Relative Humidity		35	35	%	
	43.3	$\pm 5\%$	42.3	-2.3%	56.6	$\pm 5\%$	56.4	-0.4%	Ambient Temperature		22.8	22.8	°C	
Fluid Type	480 MHz Brain				480 MHz Body				Fluid Temperature		22.1	22.0	°C	
Conductivity σ (mho/m)	IEEE Target		Meas.	Dev.	IEEE Target		Meas.	Dev.	Fluid Depth		≥ 15	≥ 15	cm	
	0.87	$\pm 5\%$	0.88	+1.2%	0.94	$\pm 5\%$	0.95	+1.1%	ρ (Kg/m ³)		1000			

Notes

- Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the scaled SAR levels evaluated at the mid channel (50% duty cycle) were ≥ 3 dB below the SAR limit, SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
- The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
- The power droop of the DUT measured by the DASY4 system for the duration of the SAR evaluations was added to the measured SAR level to report scaled SAR results as shown in the above test data table.
- A SAR-versus-Time power droop evaluation was performed in the test configuration that reported the maximum scaled SAR level. See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
- The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
- The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
- The SAR evaluations were performed within 24 hours of the system performance check.

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

4.0 DETAILS OF SAR EVALUATION

The Vertex Standard Co., Ltd. Model: VX-231-AG7B-5 Portable FM UHF PTT Radio Transceiver described in this report was compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. Detailed photographs of the test setup are shown in Appendix D.

Test Configuration(s)

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached belt-clip accessory was touching the planar phantom and provided a 1.5 cm spacing from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the manufacturer-supplied speaker-microphone accessory and VOX headset accessory connected to the audio port consecutively.

Test Mode & Output Power


3. The DUT was tested at maximum power in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
4. The conducted power levels were measured prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046 and IC RSS-Gen.



Test Conditions

5. The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within $\pm 2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.
6. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).

5.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.
An area scan was determined as follows:
- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.
A 1g and 10g spatial peak SAR was determined as follows:
- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 43


	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	



6.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations a system check was performed using a Plexiglas planar phantom and 450 MHz dipole (see Appendix B for system performance check test plot). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ from the system validation target SAR value (see Appendix E for system validation procedures).

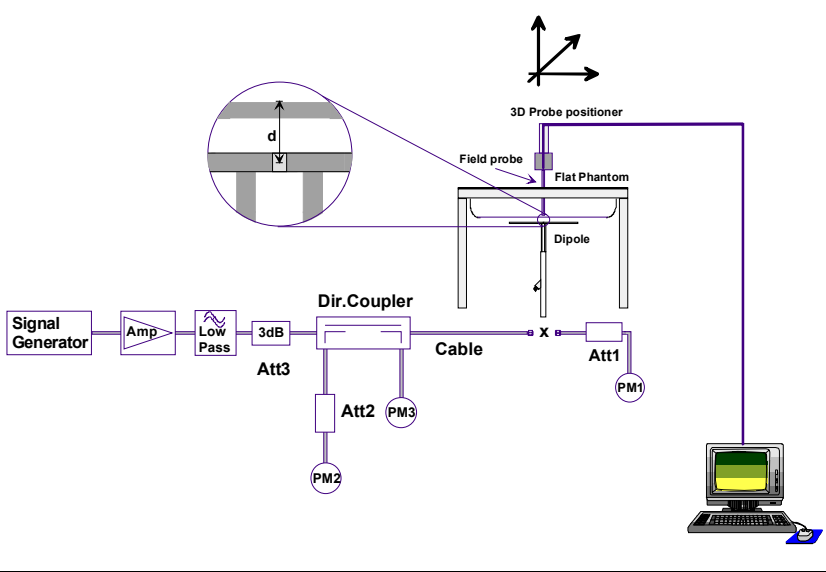SYSTEM PERFORMANCE CHECK EVALUATION																
Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.	Sys. Val Target	Meas.	Dev.						
Aug. 5	Brain	1.18 $\pm 10\%$	1.18	0.0%	43.4 $\pm 5\%$	44.4	+2.3%	0.89 $\pm 5\%$	0.89	0.0%	1000	23.0	22.3	≥ 15	35	101.1
	450															
Note(s)		1. The target SAR value is referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E). 2. The target dielectric parameters are referenced from the System Validation procedure performed by Celltech Labs Inc. (see Appendix E). 3. The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $\pm 2^\circ\text{C}$ of the fluid temperature reported during the dielectric parameter measurements. 4. The SAR evaluations were performed within 24 hours of the system performance check.														

	
System Performance Check Measurement Setup Diagram	450 MHz Validation Dipole Setup

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


7.0 SIMULATED EQUIVALENT TISSUES



The simulated tissue mixtures consisted of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide was added and visual inspection made to ensure air bubbles were not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Brain	450 MHz Body
	System Check & DUT Evaluation	DUT Evaluation
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

8.0 SAR LIMITS


SAR RF EXPOSURE LIMITS			
FCC 47 CFR 2.1093	Health Canada Safety Code 6	(General Population / Uncontrolled Exposure)	(Occupational / Controlled Exposure)
Spatial Average (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak (averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.			
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.			
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.			
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.			



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 8 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


9.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44
	Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
<u>Evaluation Phantom</u>	
Type	Side Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	2.0 mm ± 0.1 mm
Outer Dimensions	75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)
<u>Validation Phantom (≤ 450MHz)</u>	
Type	Planar Phantom
Shell Material	Plexiglas
Bottom Thickness	6.2 mm ± 0.1 mm
Outer Dimensions	86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


10.0 PROBE SPECIFICATION (ET3DV6)

<p>Construction: Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)</p> <p>Calibration: In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)</p> <p>Frequency: 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)</p> <p>Directivity: ± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)</p> <p>Dynamic Range: 5 μW/g to > 100 mW/g; Linearity: ± 0.2 dB</p> <p>Surface Detect: ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces</p> <p>Dimensions: Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm</p> <p>Application: General dosimetry up to 3 GHz Compliance tests of mobile phone</p>	
ET3DV6 E-Field Probe	


11.0 SIDE PLANAR PHANTOM


<p>The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of portable radio transceivers. The side planar phantom is mounted on the side of the DASY4 compact system table.</p>	
Plexiglas Side Planar Phantom	



12.0 VALIDATION PLANAR PHANTOM

<p>The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted to the table of the DASY4 compact system.</p>	
Plexiglas Validation Planar Phantom	

13.0 DEVICE HOLDER

<p>The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>	
Device Holder	



Applicant: Vertex Standard Co., Ltd.	FCC ID: K6610854720	IC: 511B-10854720	
Model(s): VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.: 450 - 512 MHz	
2008 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.			Page 10 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

14.0 TEST EQUIPMENT LIST


TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	N/A	N/A
x	-Robot	00046	599396-01	N/A	N/A
x	-DAE4	00019	353	22Apr08	22Apr09
x	-ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
x	-450 MHz Validation Dipole	00024	136	25Jul08	25Jul09
	-SAM Phantom V4.0C	00154	1033	N/A	N/A
	-Barski Planar Phantom	00155	03-01	N/A	N/A
x	-Plexiglas Side Planar Phantom	00156	161	N/A	N/A
x	-Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A	N/A
x	HP 85070C Dielectric Probe Kit	00033	US39240170	N/A	N/A
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
x	HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
	Rohde & Schwarz SMR20 Signal Generator	00006	100104	NCR	NCR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR
	Amplifier Research 10W1000C Power Amplifier	00041	27887	NCR	NCR
	Nextec NB00383 Microwave Amplifier	00151	0535	NCR	NCR
Abbr.	N/A = Not Applicable		NCR = No Calibration Required		



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

15.0 MEASUREMENT UNCERTAINTIES


UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	1.2	Normal	1	0.64	0.8	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.3	Normal	1	0.6	1.4	∞
Combined Standard Uncertainty					11.11	
Expanded Uncertainty (k=2)					22.22	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC Standard 62209-1:2005						



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

MEASUREMENT UNCERTAINTIES (CONT.)


UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	0	Normal	1	0.64	0.0	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.3	Normal	1	0.6	1.4	∞
Combined Standard Uncertainty					9.39	
Expanded Uncertainty (k=2)					18.77	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC Standard 62209-1:2005						



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	


16.0 REFERENCES



- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Face-held SAR - Antenna P/N: ATU-6D - 1150mAh Battery - Mid Channel - 481 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Ambient Temp: 22.8°C; Fluid Temp: 22.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 481 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.3 Watts (Conducted)
 7.4V 1150mAh Lithium-ion Battery (P/N: FNB-V103LI)
 Medium: HSL450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom



Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 5.53 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

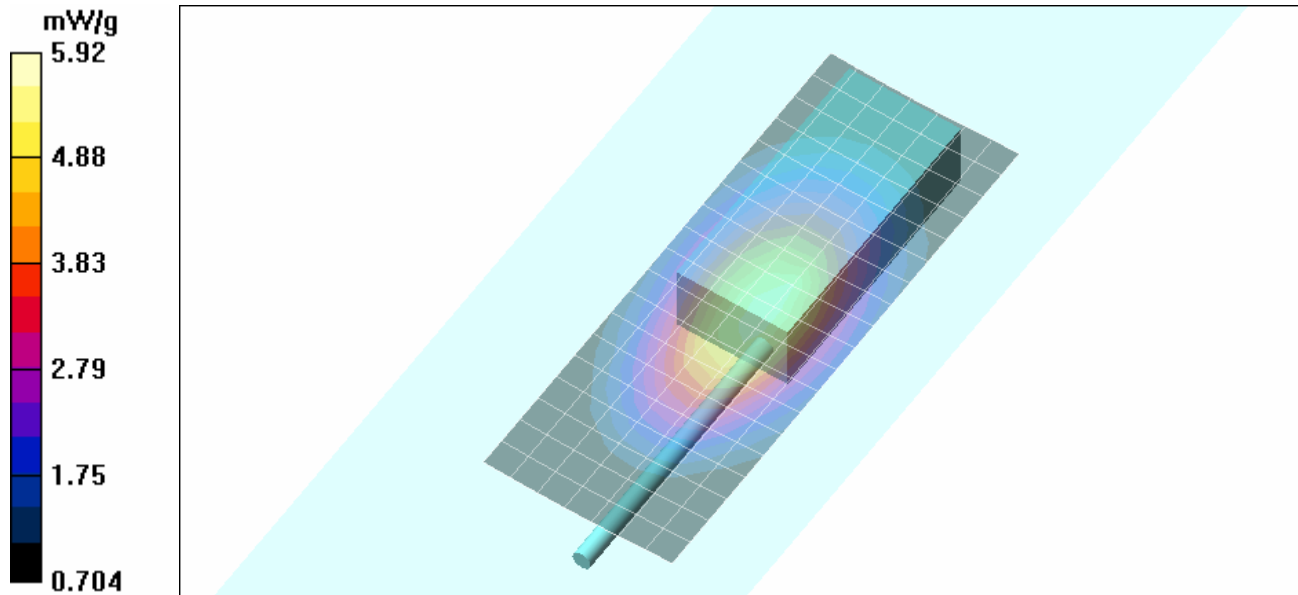Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 81.7 V/m; Power Drift = -0.271 dB
 Peak SAR (extrapolated) = 8.05 W/kg
SAR(1 g) = 5.67 mW/g; SAR(10 g) = 4.11 mW/g
 Maximum value of SAR (measured) = 5.92 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Face-held SAR - Antenna P/N: ATU-6D - 2000mAh Battery - Mid Channel - 481 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Ambient Temp: 22.8°C; Fluid Temp: 22.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 481 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.3 Watts (Conducted)
 7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)
 Medium: HSL450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom



Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 5.01 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

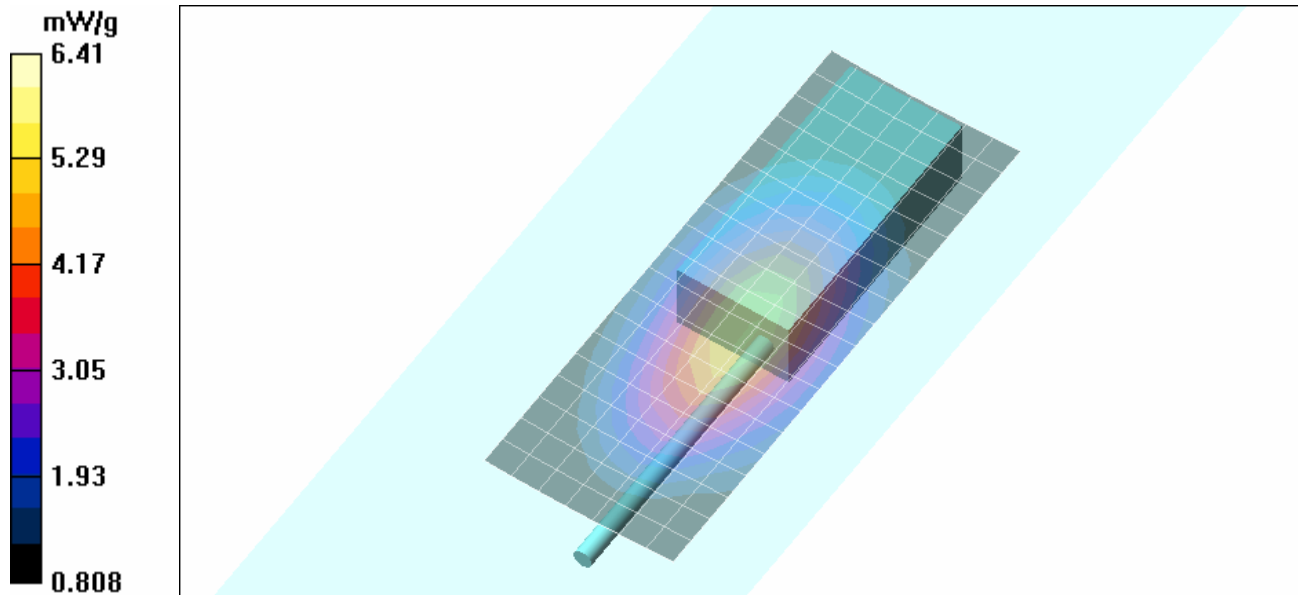Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 82.3 V/m; Power Drift = -0.236 dB
 Peak SAR (extrapolated) = 8.61 W/kg
SAR(1 g) = 6.11 mW/g; SAR(10 g) = 4.43 mW/g
 Maximum value of SAR (measured) = 6.41 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Face-held SAR - Antenna P/N: ATU-6D - 2000mAh Battery - Low Channel - 450 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Ambient Temp: 22.8°C; Fluid Temp: 22.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 450 MHz; Duty Cycle: 1:1

Communication System: FM UHF (CW)

RF Output Power: 5.3 Watts (Conducted)

7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)

Medium: HSL450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

Area Scan (8x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 7.04 mW/g

Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 89.6 V/m; Power Drift = -0.147 dB



Peak SAR (extrapolated) = 9.79 W/kg

SAR(1 g) = 7 mW/g; SAR(10 g) = 5.12 mW/g

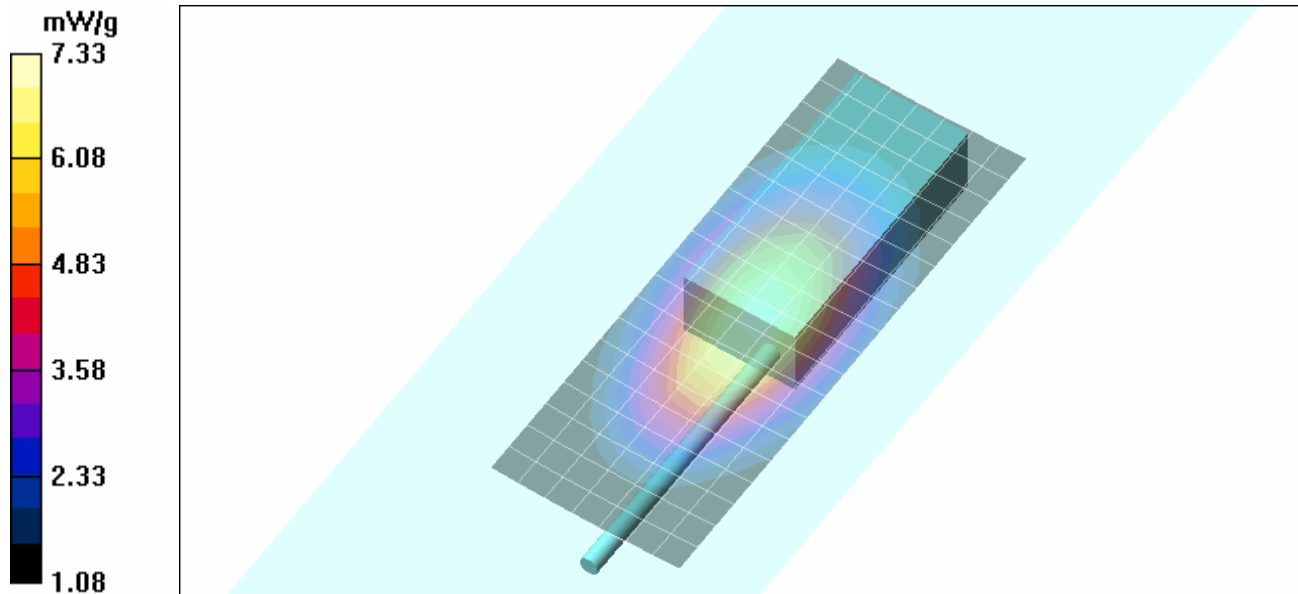Maximum value of SAR (measured) = 7.33 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 18 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Face-held SAR - Antenna P/N: ATU-6F - 2000mAh Battery - High Channel - 512 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Ambient Temp: 22.8°C; Fluid Temp: 22.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 512 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.2 Watts (Conducted)
 7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)
 Medium: HSL450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

Area Scan (8x20x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 6.46 mW/g


Face-held SAR - 2.5 cm Spacing from Front Side of DUT to Planar Phantom

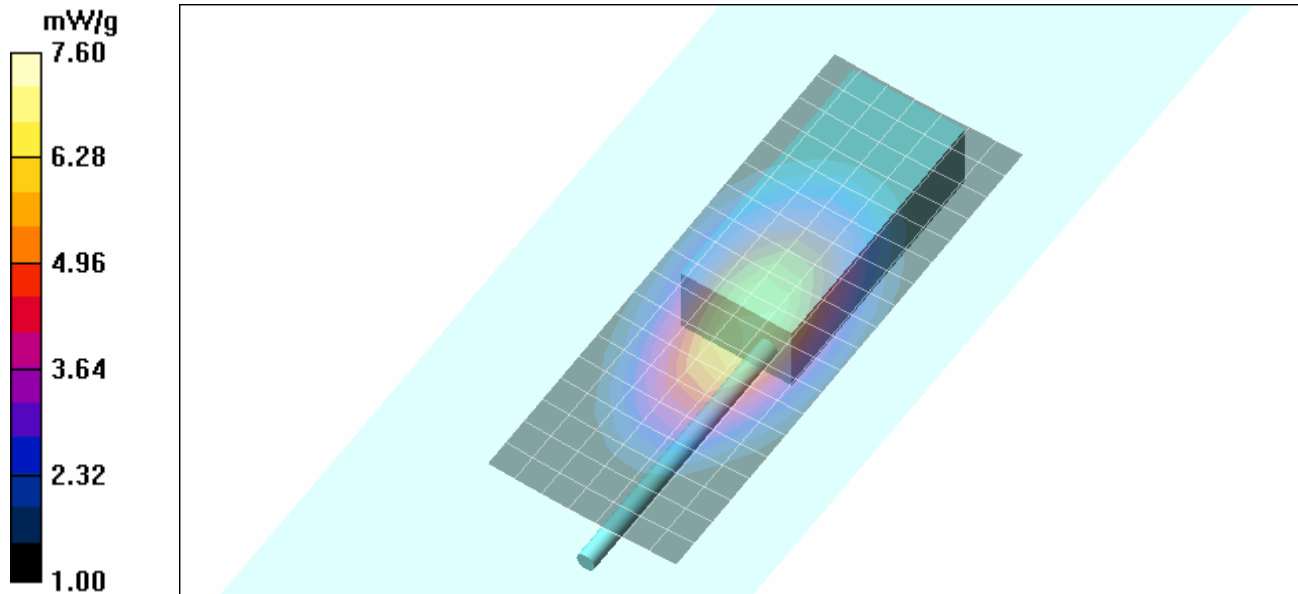

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
 Reference Value = 91.0 V/m; Power Drift = -0.283 dB
 Peak SAR (extrapolated) = 10.4 W/kg
SAR(1 g) = 7.25 mW/g; SAR(10 g) = 5.2 mW/g
 Maximum value of SAR (measured) = 7.60 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 19 of 43

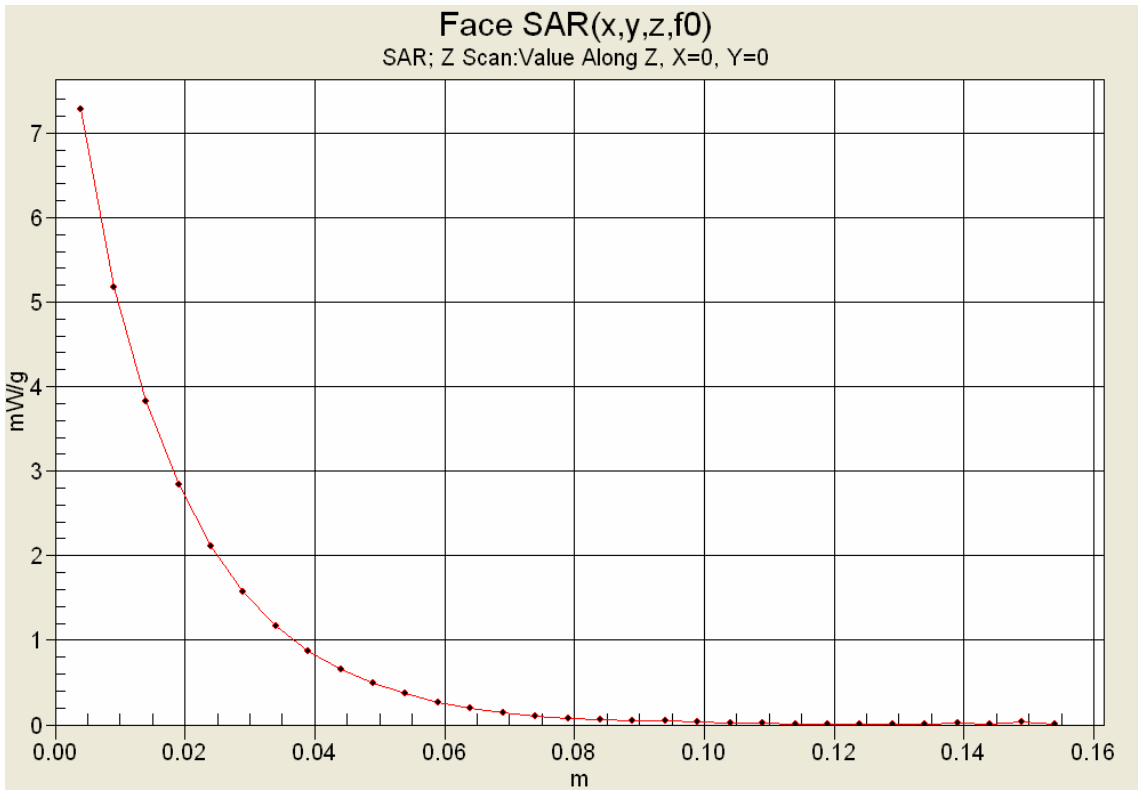Z-Axis Scan



	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Body-worn SAR - Antenna P/N: ATU-6D - 1150mAh Battery - Mid Channel - 481 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Body-worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: Speaker-Microphone (P/N: MH-45B4B)

Ambient Temp: 22.8°C; Fluid Temp: 22.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 481 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.3 Watts (Conducted)
 7.4V 1150mAh Lithium-ion Battery (P/N: FNB-V103LI)
 Medium: M450 Medium parameters used: $f = 481 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom



Area Scan (7x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 9.73 mW/g

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

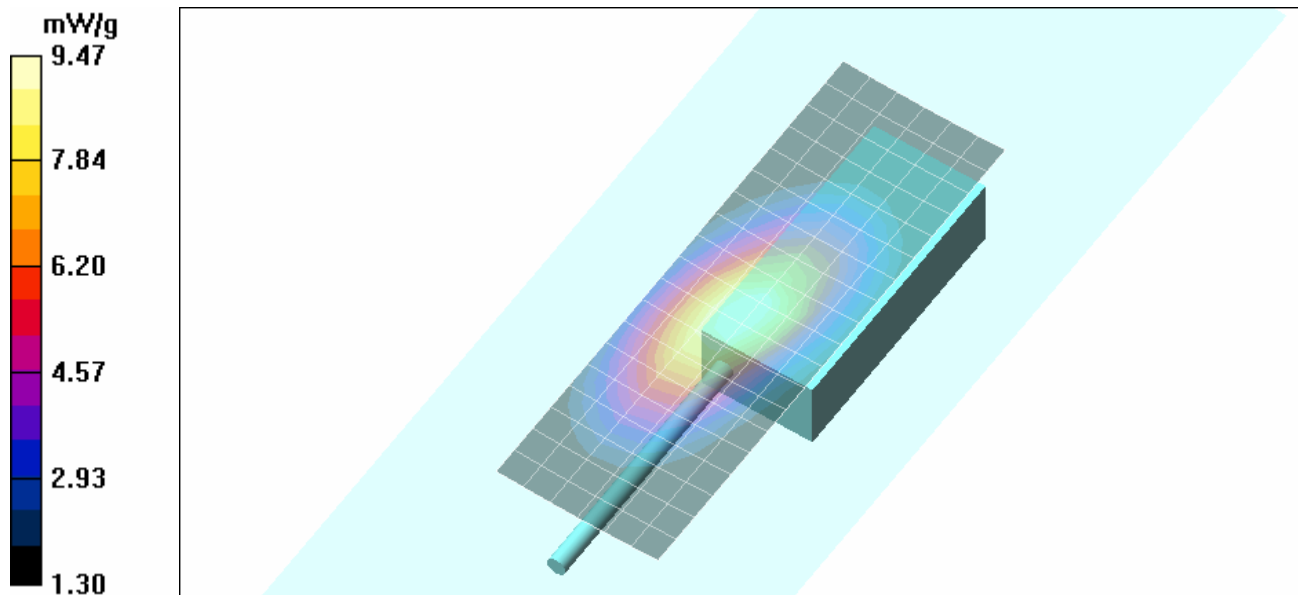Zoom Scan 2 (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 97.8 V/m; Power Drift = -0.216 dB
 Peak SAR (extrapolated) = 13.3 W/kg
SAR(1 g) = 8.98 mW/g; SAR(10 g) = 6.32 mW/g
 Maximum value of SAR (measured) = 9.47 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Body-worn SAR - Antenna P/N: ATU-6D - 2000mAh Battery - Mid Channel - 481 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Body-worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: Speaker-Microphone (P/N: MH-45B4B)

Ambient Temp: 22.8°C; Fluid Temp: 22.1°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 481 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.3 Watts (Conducted)
 7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)
 Medium: M450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom



Area Scan (7x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 9.73 mW/g

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

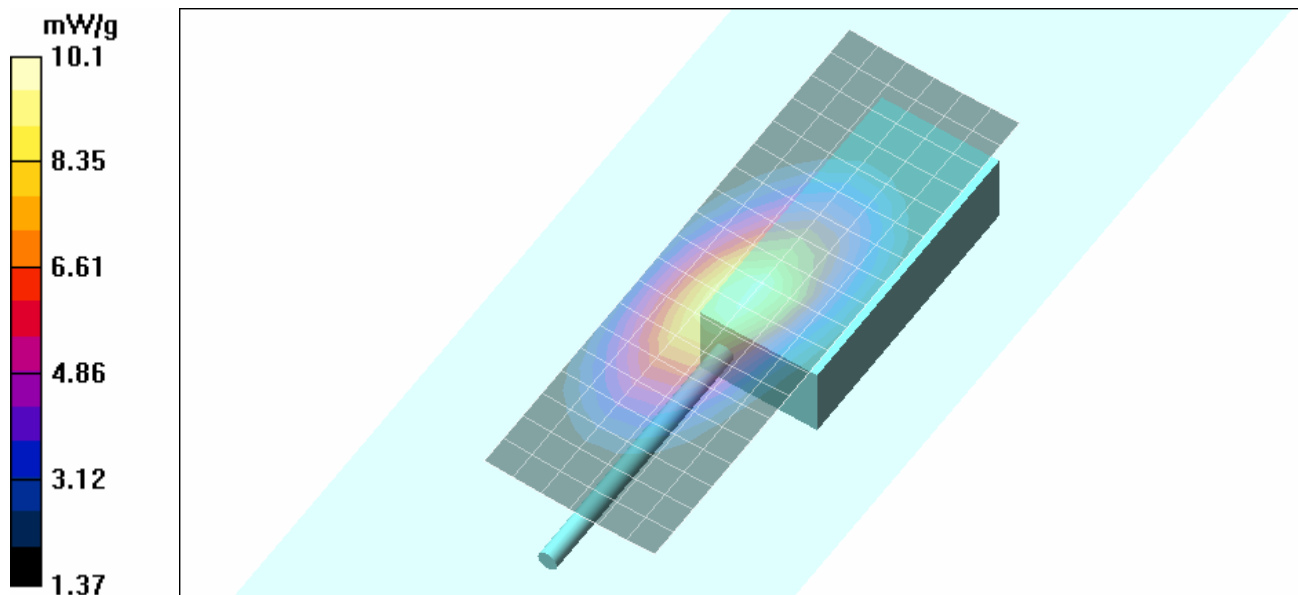Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 104.0 V/m; Power Drift = -0.201 dB
 Peak SAR (extrapolated) = 14.1 W/kg
SAR(1 g) = 9.61 mW/g; SAR(10 g) = 6.81 mW/g
 Maximum value of SAR (measured) = 10.1 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Body-worn SAR - Antenna P/N: ATU-6D - 2000mAh Battery - Mid Channel - 481 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Body-worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: VOX Headset (P/N: VC-25)

Ambient Temp: 22.8°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 481 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.3 Watts (Conducted)
 7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)
 Medium: M450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom



Area Scan (7x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 10.5 mW/g

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

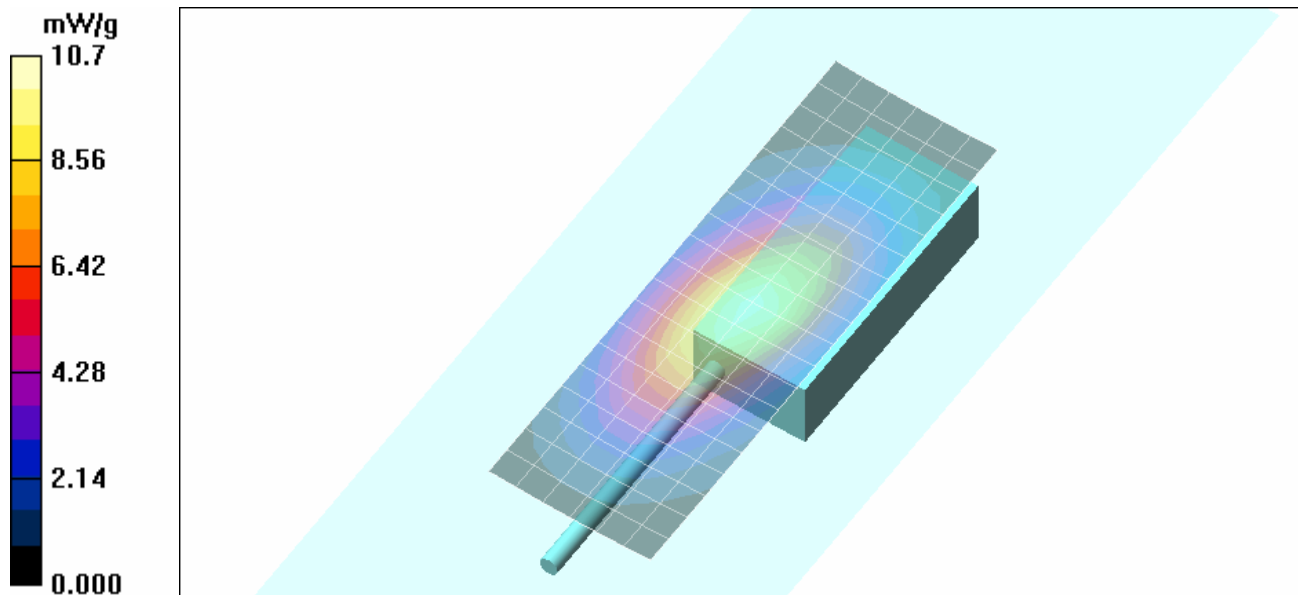Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 109.3 V/m; Power Drift = -0.193 dB
 Peak SAR (extrapolated) = 14.9 W/kg
SAR(1 g) = 10.2 mW/g; SAR(10 g) = 7.3 mW/g
 Maximum value of SAR (measured) = 10.7 mW/g



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Body-worn SAR - Antenna P/N: ATU-6D - 2000mAh Battery - Low Channel - 450 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Body-worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: VOX Headset (P/N: VC-25)

Ambient Temp: 22.8°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 450 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.3 Watts (Conducted)
 7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)
 Medium: M450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Area Scan (7x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 9.42 mW/g


Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 106.4 V/m; Power Drift = -0.110 dB
 Peak SAR (extrapolated) = 14.9 W/kg
SAR(1 g) = 10.3 mW/g; SAR(10 g) = 7.37 mW/g
 Maximum value of SAR (measured) = 10.7 mW/g

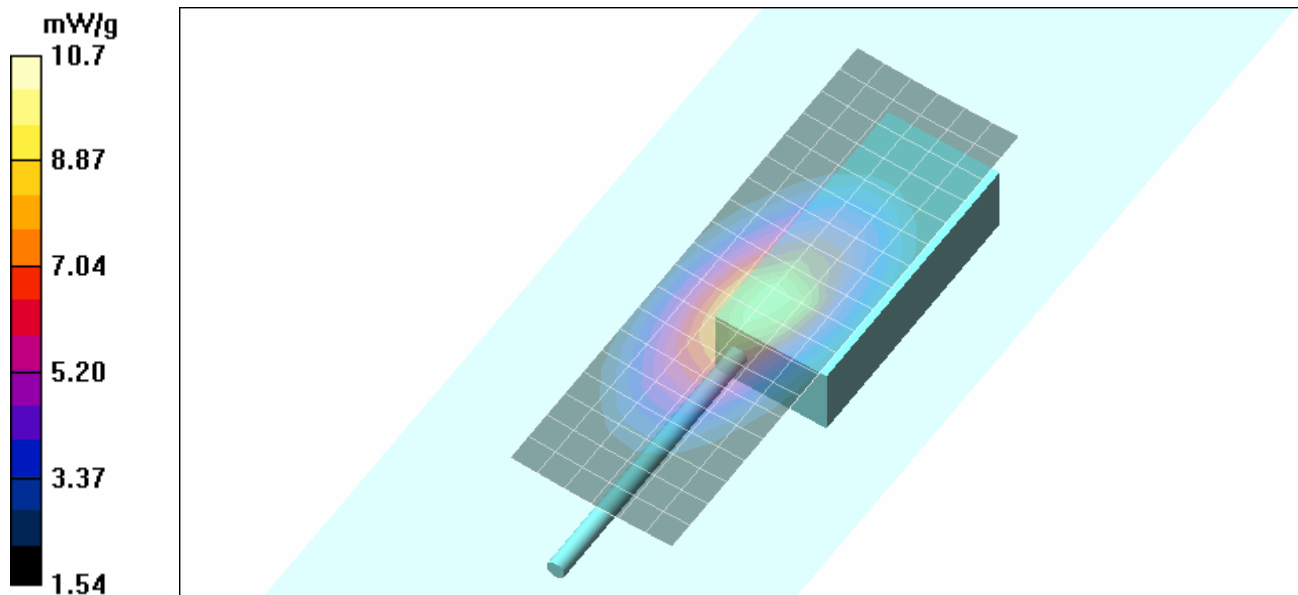


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 43

Z-Axis Scan

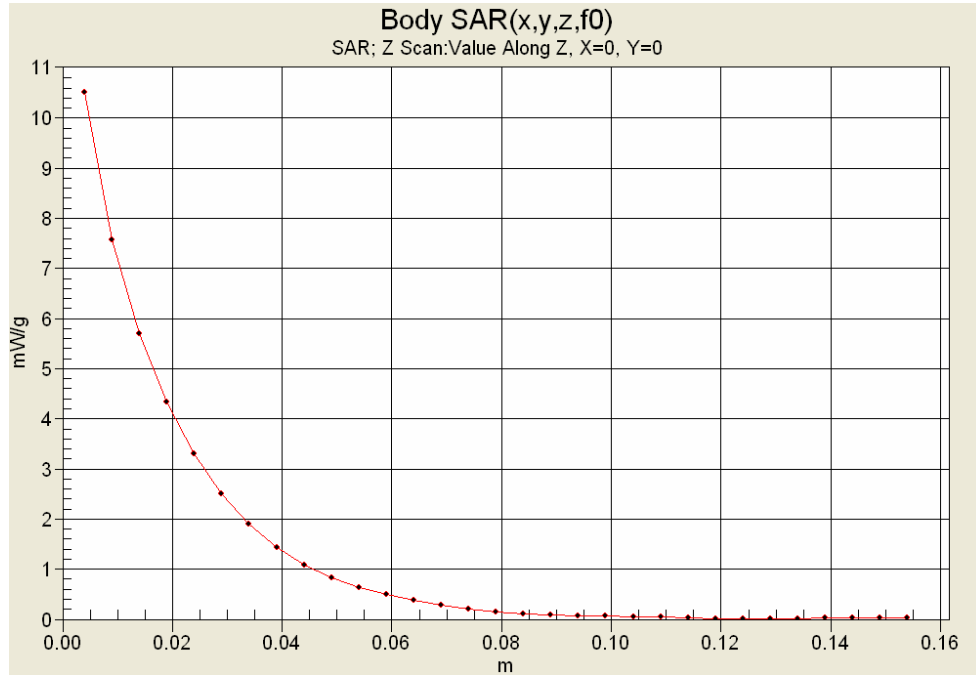



SAR-versus-Time Power Droop Evaluation

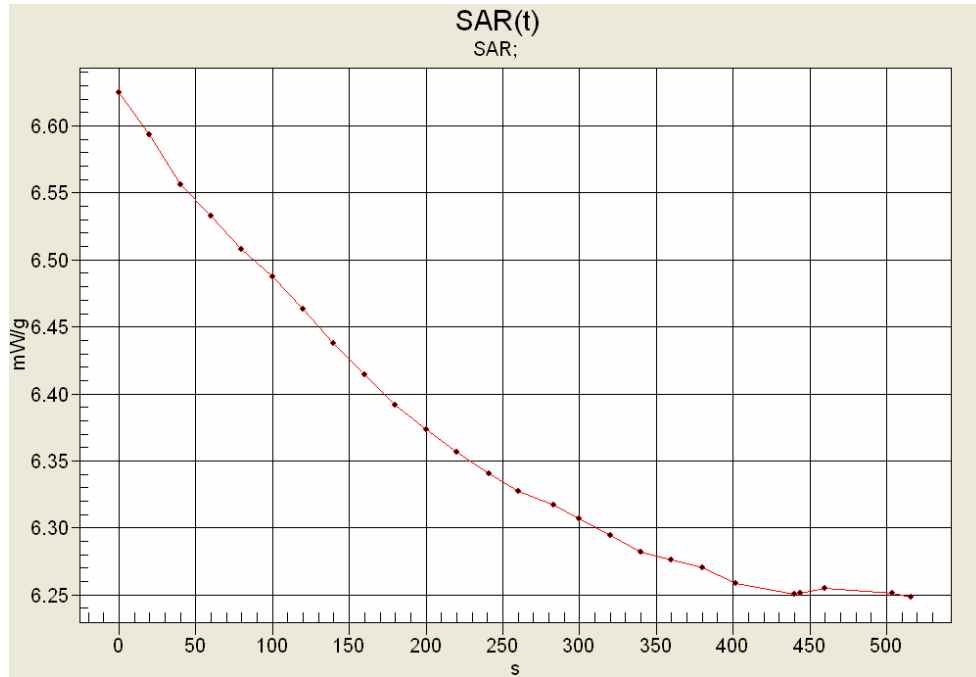Body-worn Configuration
 Low Channel - 450 MHz
 ATU-6D Antenna



Max SAR: 6.62476 mW/g
 End SAR: 6.24844 mW/g (-0.254 dB)
 SAR after 340s: 6.28221 mW/g (-0.231 dB)
 (340s = Zoom Scan Duration)
 (516s = Area Scan Duration)

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/06/2008

Body-worn SAR - Antenna P/N: ATU-6F - 2000mAh Battery - High Channel - 512 MHz

DUT: Vertex Model: VX-231-AG7B-5; Type: Portable FM UHF PTT Radio Transceiver; Serial: 8H000019

Body-worn Accessory: Belt-Clip (Model: CLIP-18); Audio Accessory: VOX Headset (P/N: VC-25)

Ambient Temp: 22.8°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Frequency: 512 MHz; Duty Cycle: 1:1
 Communication System: FM UHF (CW)
 RF Output Power: 5.2 Watts (Conducted)
 7.4V 2000mAh Lithium-ion Battery (P/N: FNB-V104LI)
 Medium: M450 Medium parameters used: $f = 480 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 56.4$; $\rho = 1000 \text{ kg/m}^3$


- Probe: ET3DV6 - SN1590; ConvF(8.27, 8.27, 8.27); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171


Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom



Area Scan (7x20x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 10.8 mW/g

Body-worn SAR - 1.5 cm Belt-Clip Spacing from Back Side of DUT to Planar Phantom

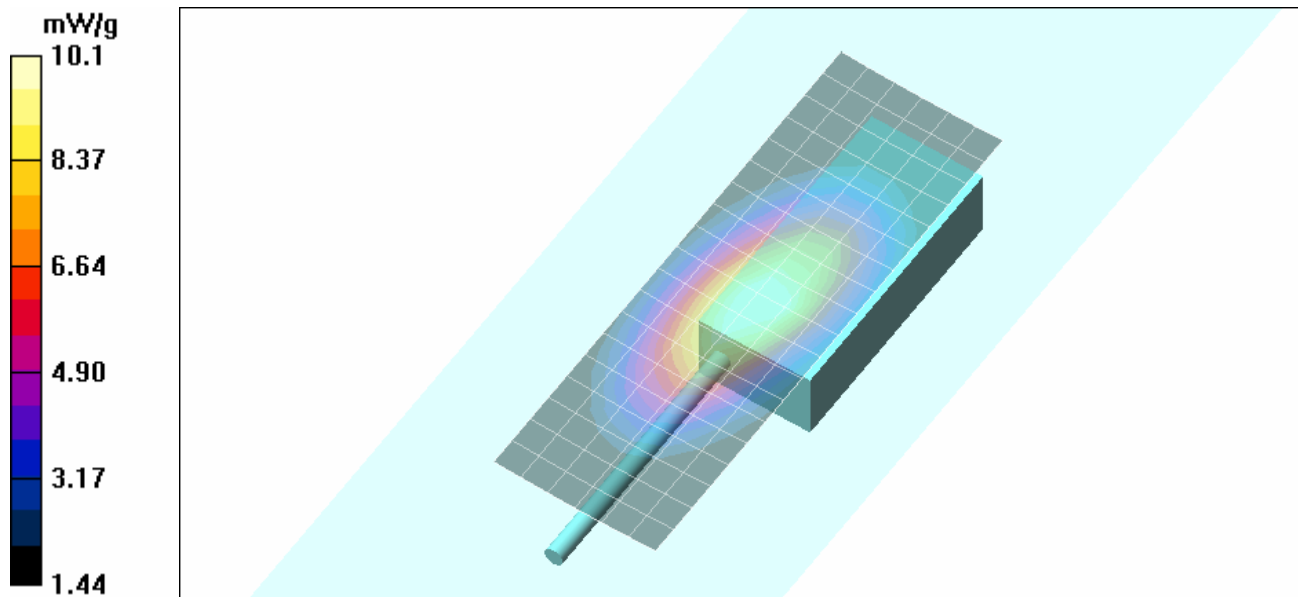Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 105.9 V/m; Power Drift = -0.403 dB
 Peak SAR (extrapolated) = 13.9 W/kg
SAR(1 g) = 9.59 mW/g; SAR(10 g) = 6.8 mW/g
 Maximum value of SAR (measured) = 10.1 mW/g





Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 27 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 08/05/2008

System Performance Check - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008

Ambient Temp: 23.0°C; Fluid Temp: 22.3°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 44.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 22/04/2008

- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137

- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

450 MHz Dipole - System Performance Check

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.20 mW/g

450 MHz Dipole - System Performance Check


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$


Reference Value = 39.6 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.87 W/kg


SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.772 mW/g

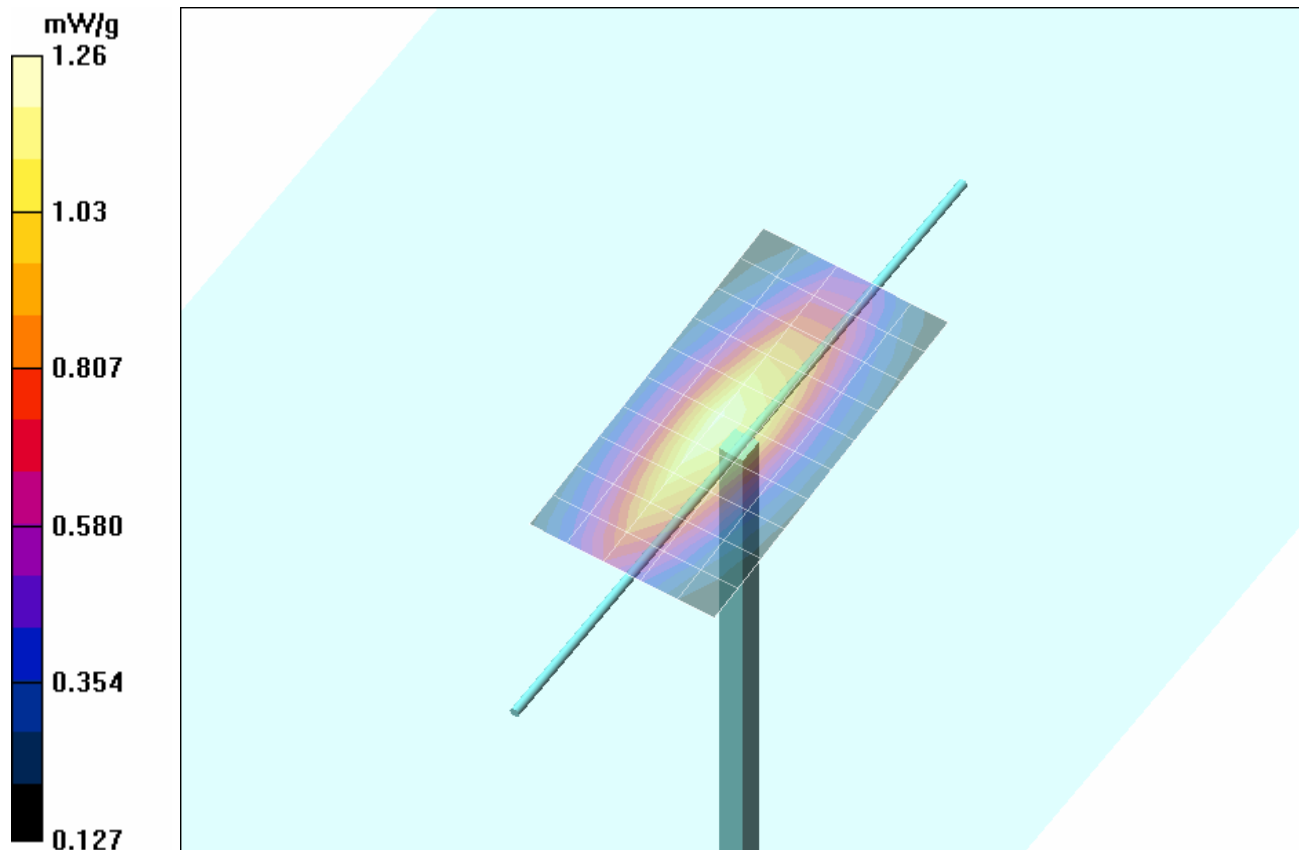

Maximum value of SAR (measured) = 1.26 mW/g




Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 43

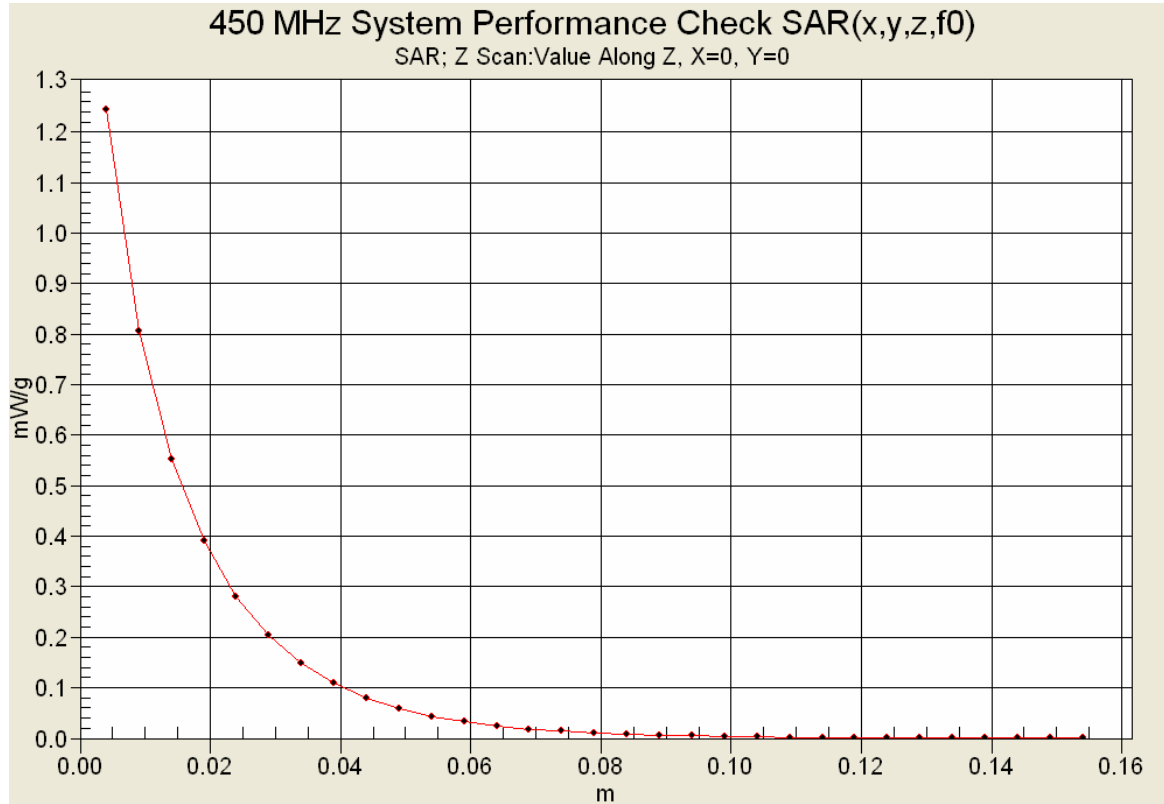

Z-Axis Scan



	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 30 of 43



	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

450 MHz System Performance Check (Brain)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Tue 05/Aug/2008
 Frequency (GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHFCC_sH	Test_e	Test_s	
0.3500	44.70	0.87	46.64	0.80
0.3600	44.58	0.87	46.65	0.82
0.3700	44.46	0.87	46.42	0.83
0.3800	44.34	0.87	46.08	0.83
0.3900	44.22	0.87	45.54	0.84
0.4000	44.10	0.87	45.41	0.84
0.4100	43.98	0.87	44.78	0.84
0.4200	43.86	0.87	44.52	0.84
0.4300	43.74	0.87	44.16	0.87
0.4400	43.62	0.87	44.83	0.87
0.4500	43.50	0.87	44.36	0.89
0.4600	43.45	0.87	44.56	0.90
0.4700	43.40	0.87	44.11	0.93
0.4800	43.34	0.87	44.31	0.92
0.4900	43.29	0.87	43.83	0.92
0.5000	43.24	0.87	43.17	0.94
0.5100	43.19	0.87	42.88	0.92
0.5200	43.14	0.88	43.15	0.94
0.5300	43.08	0.88	42.29	0.97
0.5400	43.03	0.88	42.52	0.98
0.5500	42.98	0.88	41.92	0.98


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 43



	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

480 MHz DUT Evaluation (Brain)

Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Wed 06/Aug/2008
 Frequency (GHz)
 FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	FCC_eHF	FCC_sHF	Test_e	Test_s
0.3500	44.70	0.87	44.79	0.74
0.3600	44.58	0.87	44.84	0.76
0.3700	44.46	0.87	43.89	0.77
0.3800	44.34	0.87	43.82	0.77
0.3900	44.22	0.87	43.62	0.78
0.4000	44.10	0.87	42.97	0.81
0.4100	43.98	0.87	43.65	0.81
0.4200	43.86	0.87	42.81	0.82
0.4300	43.74	0.87	42.63	0.82
0.4400	43.62	0.87	43.00	0.82
0.4500	43.50	0.87	42.20	0.83
0.4600	43.45	0.87	42.02	0.84
0.4700	43.40	0.87	42.02	0.85
0.4800	43.34	0.87	42.27	0.88
0.4900	43.29	0.87	41.50	0.86
0.5000	43.24	0.87	41.70	0.87
0.5100	43.19	0.87	41.47	0.89
0.5200	43.14	0.88	41.31	0.89
0.5300	43.08	0.88	40.93	0.91
0.5400	43.03	0.88	40.48	0.92
0.5500	42.98	0.88	40.58	0.93


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 43



	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

480 MHz DUT Evaluation (Body)


Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Wed 06/Aug/2008
 Frequency (GHz)
 FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
 FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
 FCC_eB FCC Limits for Body Epsilon
 FCC_sB FCC Limits for Body Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM



Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	57.76	0.85
0.3600	57.60	0.93	58.22	0.84
0.3700	57.50	0.93	57.73	0.85
0.3800	57.40	0.93	57.79	0.86
0.3900	57.30	0.93	57.34	0.87
0.4000	57.20	0.93	57.08	0.88
0.4100	57.10	0.93	57.66	0.90
0.4200	57.00	0.94	57.43	0.91
0.4300	56.90	0.94	56.67	0.90
0.4400	56.80	0.94	56.80	0.92
0.4500	56.70	0.94	56.21	0.93
0.4600	56.66	0.94	56.54	0.91
0.4700	56.62	0.94	56.18	0.94
0.4800	56.58	0.94	56.37	0.95
0.4900	56.54	0.94	55.46	0.94
0.5000	56.51	0.94	56.19	0.96
0.5100	56.47	0.94	55.97	0.98
0.5200	56.43	0.95	55.19	0.98
0.5300	56.39	0.95	55.88	0.99
0.5400	56.35	0.95	55.43	1.00
0.5500	56.31	0.95	55.46	1.01

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 43



	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS


Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Spacing from Front of DUT to Planar Phantom

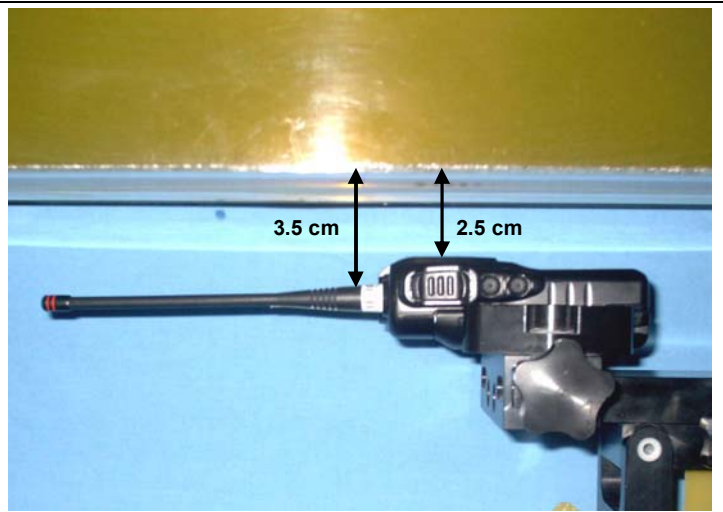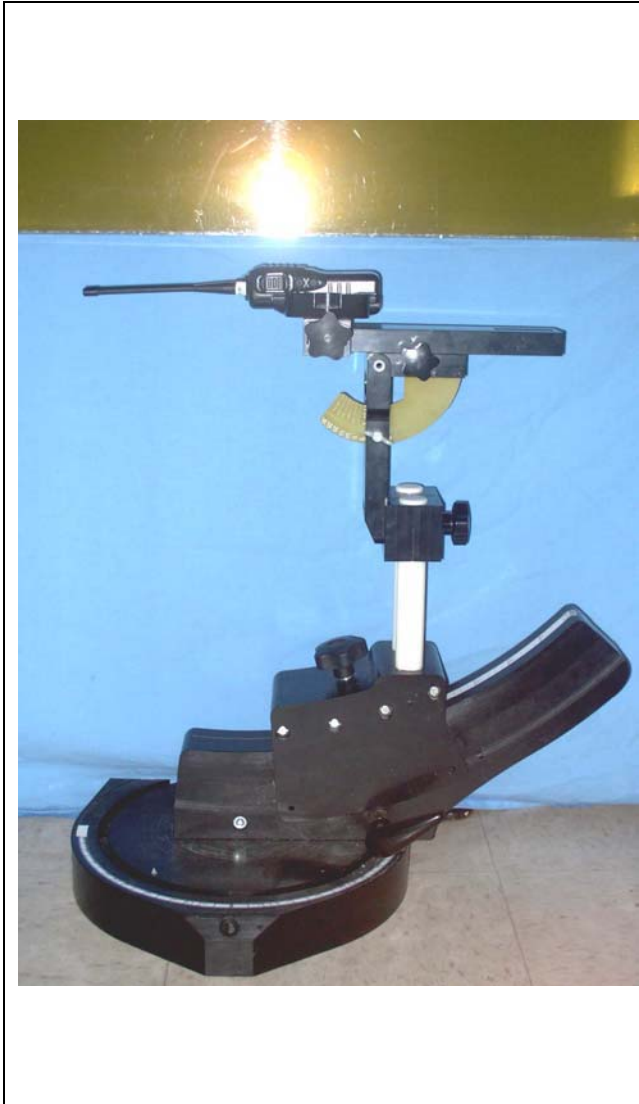

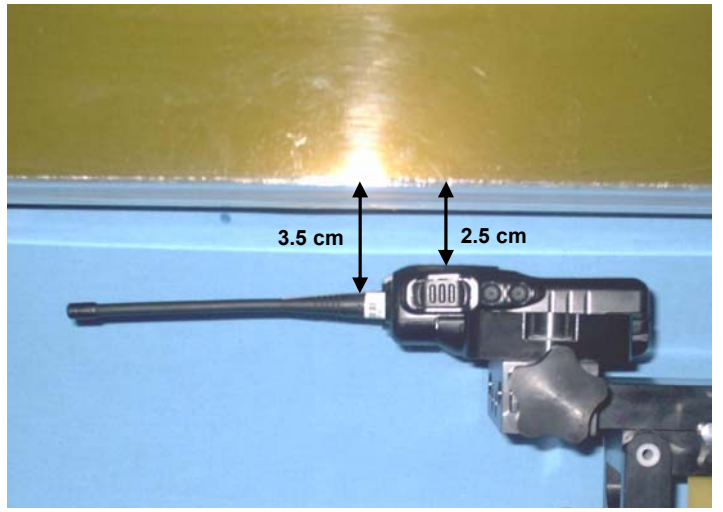

DUT with ATU-6D Antenna









DUT with ATU-6F Antenna



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

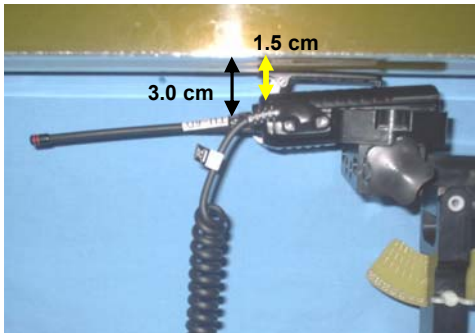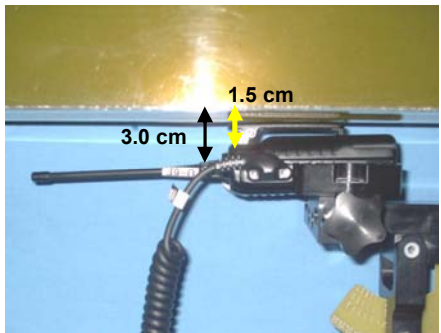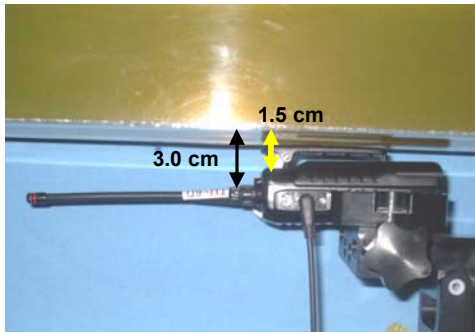BODY-WORN SAR TEST SETUP PHOTOGRAPHS
1.5 cm Belt-Clip Spacing from Back of DUT to Planar Phantom

			
DUT with VOX Headset Audio Accessory		DUT with Speaker-Microphone Audio Accessory	
			
DUT with 1150mAh Battery & ATU-6D Antenna 1.0 cm from bottom end of belt-clip to phantom	DUT with 2000mAh Batt. & ATU-6F Antenna 1.0 cm distance from battery to phantom	DUT with 2000mAh Battery & ATU-6D Antenna 1.0 cm distance from battery to phantom	

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS



DUT with ATU-6D Antenna


DUT with ATU-6F Antenna





Whip Antenna P/N: ATU-6D (450-485 MHz)



Whip Antenna P/N: ATU-6F (485-512 MHz)

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	


DUT PHOTOGRAPHS





DUT with 1150mAh Battery & Belt-Clip	DUT with 2000mAh Battery & Belt-Clip	Top & Bottom end of DUT with 1150mAh Battery
--------------------------------------	--------------------------------------	--




Left Side of DUT with 1150mAh Battery and Belt-Clip	Right Side of DUT with 1150mAh Battery and Belt-Clip
---	--

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 38 of 43

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

DUT PHOTOGRAPHS

		
<p>Top end of DUT with 2000mAh Battery and Belt-Clip</p>	<p>Bottom end of DUT with 2000mAh Battery & Belt-Clip</p>	<p>Belt-Clip Model: CLIP-18</p>
		
		
<p>Left & Right Sides of DUT with 2000mAh Battery and Belt-Clip</p>	<p>Belt-Clip Model: CLIP-18</p>	

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 39 of 43



DUT PHOTOGRAPHS



7.4V 1150mAh Lithium-ion Battery P/N: FNB-V103LI


7.4V 2000mAh Lithium-ion Battery P/N: FNB-V104LI



DUT Battery Compartment

	Date(s) of Evaluation August 06, 2008	Test Report Serial No. 080608K66-T918-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	
	Test Report Issue Date August 13, 2008	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	


DUT PHOTOGRAPHS



Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver		Freq.:	450 - 512 MHz	
2008 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 41 of 43

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX E - SYSTEM VALIDATION

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 42 of 43

	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:

450 MHz SYSTEM VALIDATION

Type:

450 MHz Validation Dipole

Asset Number:

00024

Serial Number:

136

Place of Validation:

Celltech Labs Inc.

Date of Validation:

July 25, 2008

Celltech Labs Inc. certifies that the 450 MHz System Validation was performed on the date indicated above.



Validated by:

Sean Johnston

Signature:



2. Validation Dipole VSWR Data

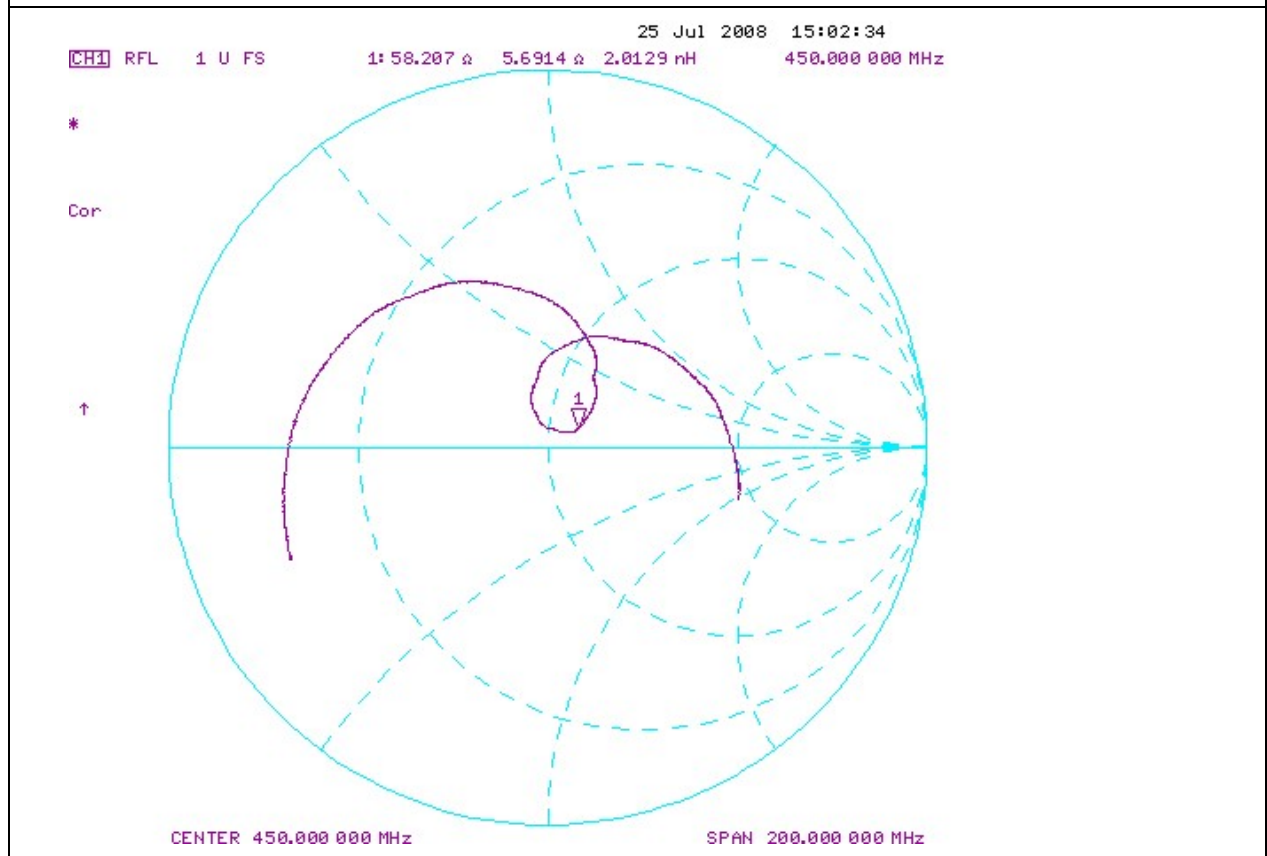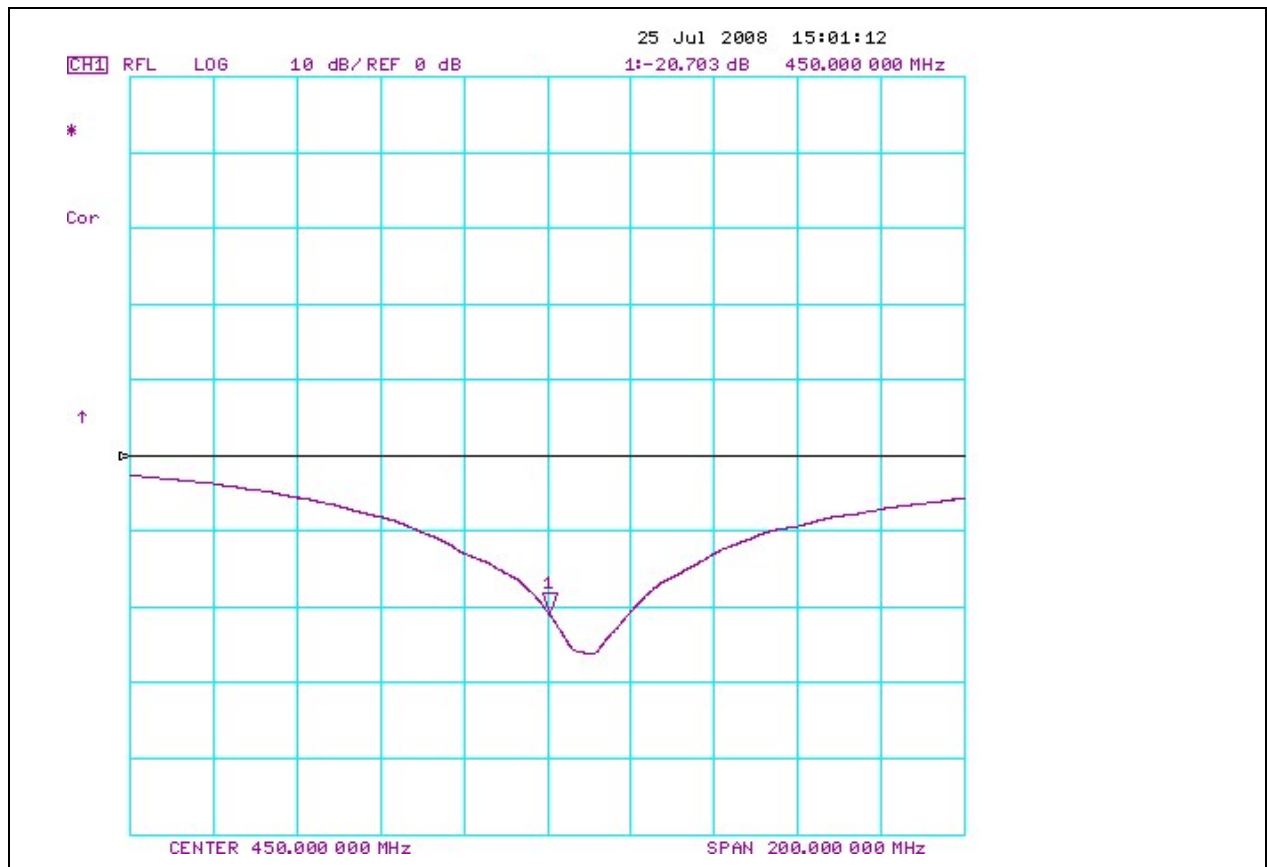

3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	h (mm)	d (mm)
300	396.0	250.0	6.0
450	270.0	167.0	6.0
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.5	30.4	3.6
3000	41.5	25.0	3.6

4. Validation Phantom

The validation phantom (planar) was constructed using relatively low-loss tangent Plexiglas material.

The inner dimensions of the validation phantom are as follows:


Length: 83.5 cm
Width: 36.9 cm
Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

5. Test Equipment List

TEST EQUIPMENT	ASSET NO.	SERIAL NO.	DATE OF CAL.	CAL. DUE DATE
SPEAG DASY4 Measurement Server	00158	1078	N/A	N/A
SPEAG Robot	00046	599396-01	N/A	N/A
SPEAG DAE4	00019	353	22Apr08	22Apr09
SPEAG ET3DV6 E-Field Probe	00017	1590	21Jul08	21Jul09
450 MHz Validation Dipole	00024	136	25Jul08	25Jul09
Plexiglas Validation Planar Phantom	00157	137	N/A	N/A
HP 85070C Dielectric Probe Kit	00033	US39240170	N/A	N/A
Gigatronics 8652A Power Meter	00007	1835272	23Apr08	23Apr09
Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	23Apr09
HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr09
HP 8648D Signal Generator	00005	3847A00611	NCR	NCR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	NCR	NCR

6. Dimensions of Plexiglas Planar Phantom

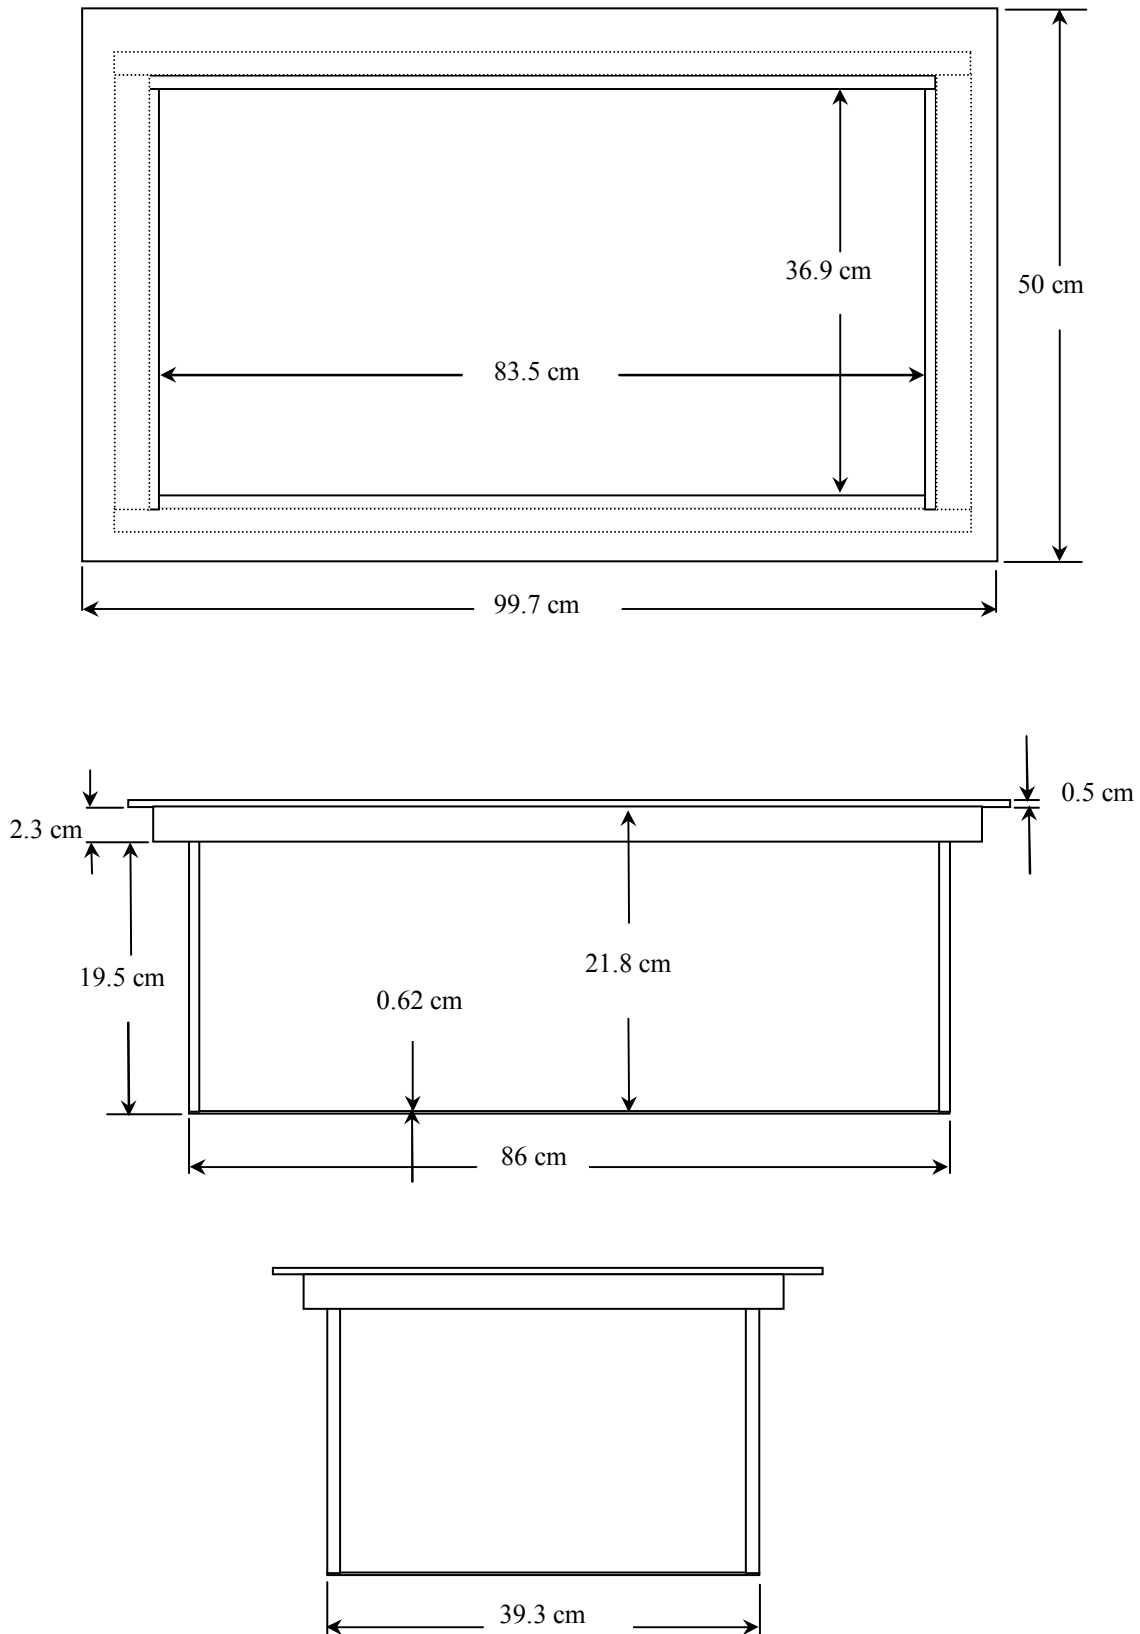

	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0		
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

7. 450 MHz System Validation Setup



	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:


8. 450 MHz Validation Dipole Setup



9. SAR Measurement

Measurements were made using a dosimetric E-field probe ET3DV6 (S/N: 1590, Conversion Factor 7.66). The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the procedures described below.

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

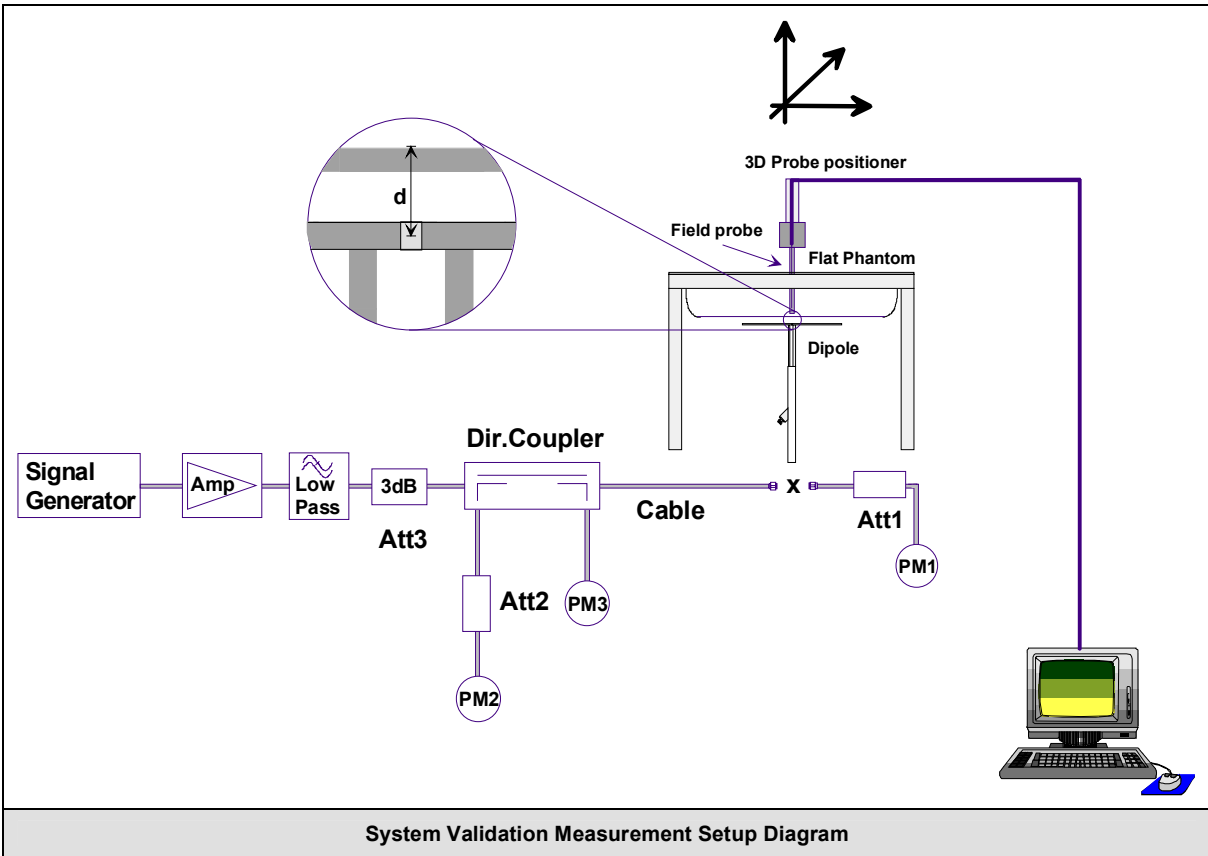

System Validation Measurement Setup Diagram

10. Measurement Conditions

The validation phantom was filled with 450 MHz Brain tissue simulant.

Relative Permittivity: 43.4 (-0.2% deviation from target)
 Conductivity: 0.89 mho/m (+2.3% deviation from target)
 Fluid Temperature: 23.1°C (Start of Test) / 23.2°C (End of Test)
 Fluid Depth: ≥ 15.0 cm

Environmental Conditions:

Ambient Temperature: 24.1°C
 Barometric Pressure: 100.9 kPa
 Humidity: 31%

The 450 MHz Brain tissue simulant consisted of the following ingredients:

Ingredient	Percentage by weight	
Water	38.56%	
Sugar	56.32%	
Salt	3.95%	
HEC	0.98%	
Dowicil 75	0.19%	
IEEE/IEC Target Dielectric Parameters (450 MHz):	$\epsilon_r = 43.5$ (+/- 5%)	$\sigma = 0.87$ S/m (+/- 5%)

11. System Validation SAR Results

SAR @ 0.25W Input averaged over 1g (W/kg)				SAR @ 1W Input averaged over 1g (W/kg)			
IEEE/IEC Target		Measured	Deviation	IEEE/IEC Target		Measured	Deviation
1.23	+/- 10%	1.18	-4.0%	4.92	+/- 10%	4.72	-4.0%
SAR @ 0.25W Input averaged over 10g (W/kg)				SAR @ 1W Input averaged over 10g (W/kg)			
IEEE/IEC Target		Measured	Deviation	IEEE/IEC Target		Measured	Deviation
0.825	+/- 10%	0.775	-6.1%	3.30	+/- 10%	3.10	-6.1%
Frequency (MHz)	1 g SAR	10 g SAR	Local SAR at surface (above feed-point)	Local SAR at surface (y = 2 cm offset from feed-point) ²			
300	3.0	2.0	4.4	2.1			
450	4.9	3.3	7.2	3.2			
835	9.5	6.2	4.1	4.9			
900	10.8	6.9	16.4	5.4			
1450	29.0	16.0	50.2	6.5			
1800	38.1	19.8	69.5	6.8			
1900	39.7	20.5	72.1	6.6			
2000	41.1	21.1	74.6	6.5			
2450	52.4	24.0	104.2	7.7			
3000	63.8	25.7	140.2	9.5			
Numerical reference SAR values for reference dipole and flat phantom normalized to 1 W (IEEE 1528-2003; IEC 62209-1:2005)							

	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:	SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:

Date Tested: 07/25/2008

System Validation - 450 MHz Dipole - HSL

DUT: Dipole 450 MHz; Asset: 00024; Serial: 136; Validation: 07/25/2008

Ambient Temp: 24.1°C; Fluid Temp: 23.1°C; Barometric Pressure: 100.9 kPa; Humidity: 31%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used: $f = 450 \text{ MHz}$; $\sigma = 0.89 \text{ mho/m}$; $\epsilon_r = 43.4$; $\rho = 1000 \text{ kg/m}^3$

- Probe: ET3DV6 - SN1590; ConvF(7.66, 7.66, 7.66); Calibrated: 21/07/2008
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 22/04/2008
- Phantom: Validation Planar; Type: Plexiglas; Serial: TE#137
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

450 MHz Dipole - System Validation

Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.18 mW/g

450 MHz Dipole - System Validation


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=7.5\text{mm}$, $dy=7.5\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.3 V/m; Power Drift = 0.000 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.775 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

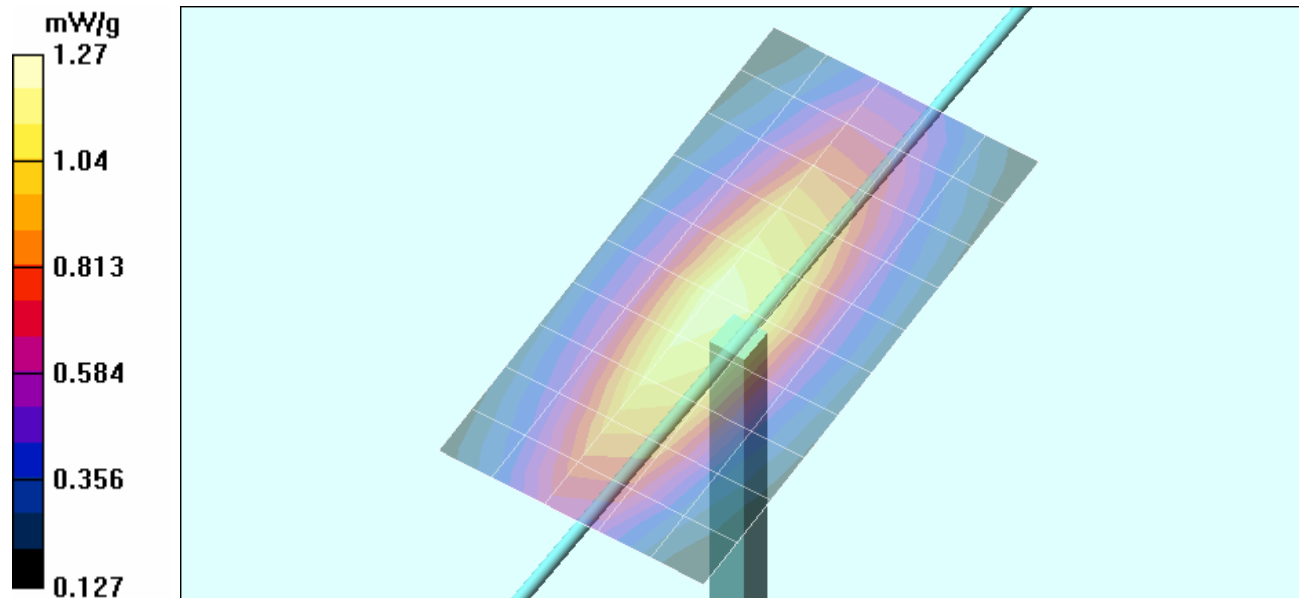

Z-Axis Scan

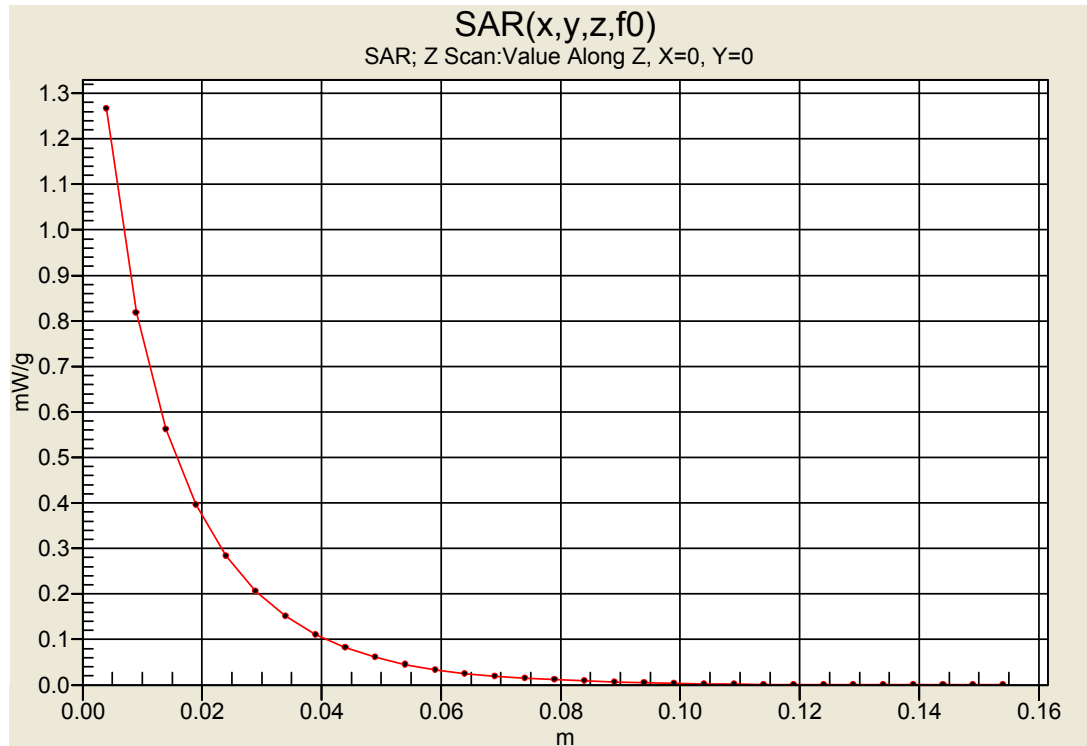

12. Measured Fluid Dielectric Parameters

System Validation - 450 MHz (Brain)



Celltech Labs Inc.
 Test Result for UIM Dielectric Parameter
 Fri 25/Jul/2008
 Frequency (GHz)
 IEEE_eH IEEE 1528-2003 Limits for Head Epsilon
 IEEE_sH IEEE 1528-2003 Limits for Head Sigma
 Test_e Epsilon of UIM
 Test_s Sigma of UIM

Freq	IEEE_eH	IEEE_sH	Test_e	Test_s
0.3500	44.70	0.87	46.31	0.80
0.3600	44.58	0.87	45.65	0.82
0.3700	44.46	0.87	45.27	0.82
0.3800	44.34	0.87	45.47	0.83
0.3900	44.22	0.87	44.76	0.84
0.4000	44.10	0.87	44.57	0.87
0.4100	43.98	0.87	44.63	0.86
0.4200	43.86	0.87	44.66	0.86
0.4300	43.74	0.87	43.79	0.89
0.4400	43.62	0.87	43.68	0.87
0.4500	43.50	0.87	43.44	0.89
0.4600	43.45	0.87	43.27	0.90
0.4700	43.40	0.87	43.17	0.90
0.4800	43.34	0.87	43.66	0.91
0.4900	43.29	0.87	42.68	0.92
0.5000	43.24	0.87	42.39	0.95
0.5100	43.19	0.87	42.24	0.94
0.5200	43.14	0.88	41.96	0.95
0.5300	43.08	0.88	42.42	0.95
0.5400	43.03	0.88	41.99	0.97
0.5500	42.98	0.88	41.92	0.98


	Date of Evaluation:	July 25, 2008	Validation Document Serial No.:		SV450B-072508-R1.0	
	Type of Evaluation:	System Validation	Validation Dipole:	450 MHz	Fluid Type:	Brain

13. Measurement Uncertainties

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value $\pm\%$	Probability Distribution	Divisor	c_i 1g	Uncertainty Value $\pm\%$ (1g)	V_i or V_{eff}
Measurement System						
Probe calibration (450 MHz)	6.65	Normal	1	1	6.65	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	0.8	Rectangular	1.732050808	1	0.5	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Dipole						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.3	Normal	1	0.64	1.5	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	0.2	Normal	1	0.6	0.1	∞
Combined Standard Uncertainty					9.40	
Expanded Uncertainty (k=2)					18.80	
Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 and IEC 62209-1:2005						

	<u>Date(s) of Evaluation</u> August 06, 2008	<u>Test Report Serial No.</u> 080608K66-T918-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> August 13, 2008	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

APPENDIX F - PROBE CALIBRATION

Applicant:	Vertex Standard Co., Ltd.	FCC ID:	K6610854720	IC:	511B-10854720	
Model(s):	VX-231-AG7B-5	Portable FM UHF PTT Radio Transceiver	Freq.:	450 - 512 MHz		
2008 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 43 of 43



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Calltech**

Certificate No: **ET3-1590_Jul08**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5 and QA CAL-23.v3
Calibration procedure for dosimetric E-field probes**

Calibration date: **July 21, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: July 21, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not effect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibrated:	May 20, 2005
Recalibrated:	July 21, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1590

Sensitivity in Free Space^A

NormX	1.81 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormY	2.00 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.72 ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression^B

DCP X	87 mV
DCP Y	92 mV
DCP Z	85 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL 835 MHz Typical SAR gradient: 5 % per mm

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR _{be} [%]	Without Correction Algorithm	10.7	7.2
SAR _{be} [%]	With Correction Algorithm	0.8	0.5

Sensor Offset

Probe Tip to Sensor Center 2.7 mm


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).

^B Numerical linearization parameter: uncertainty not required.




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

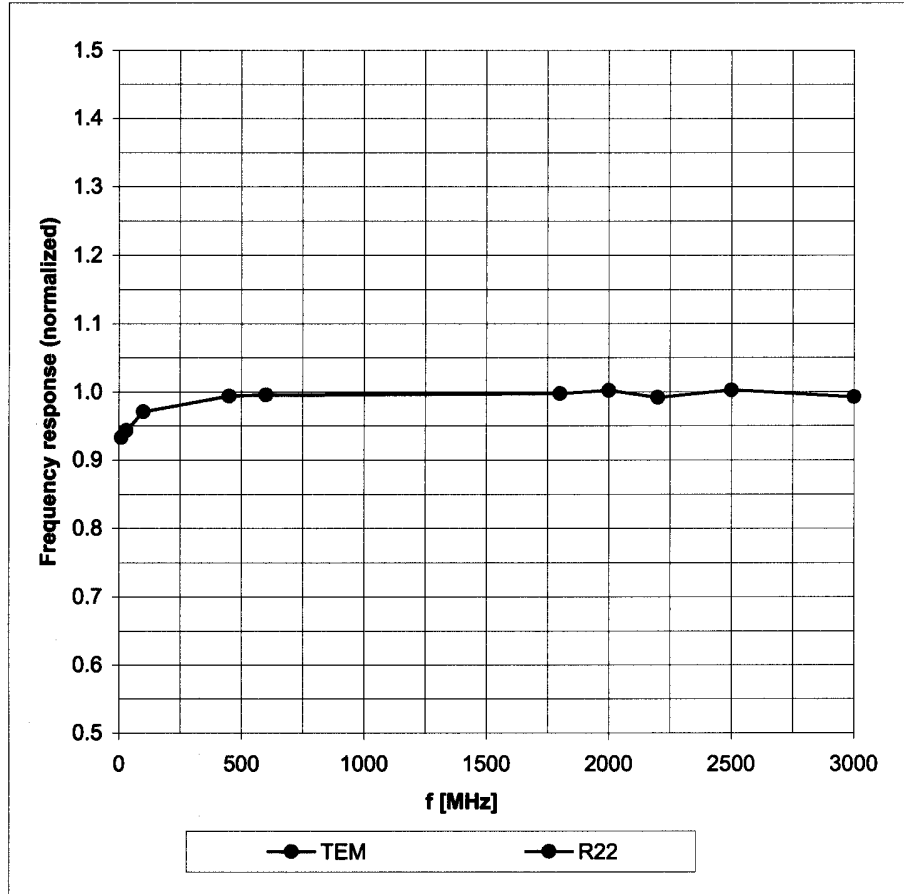



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

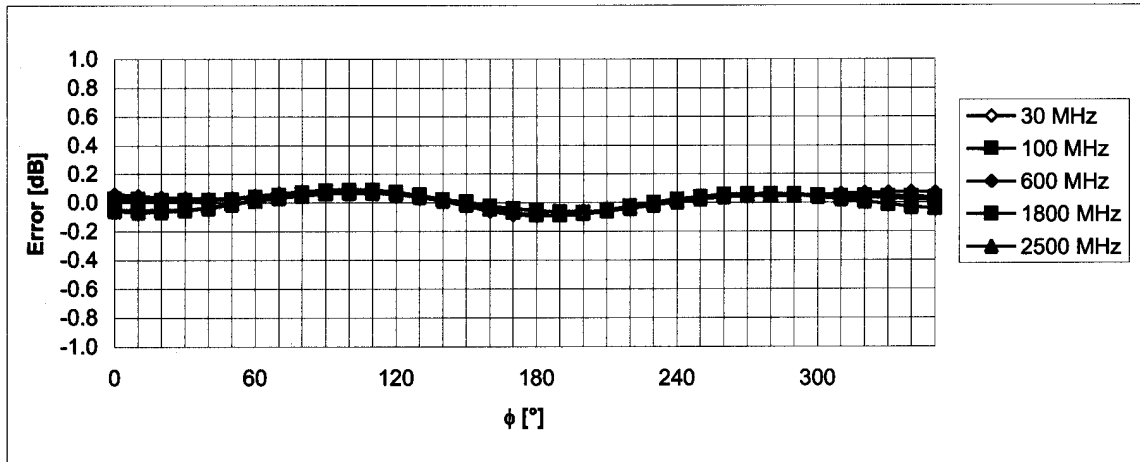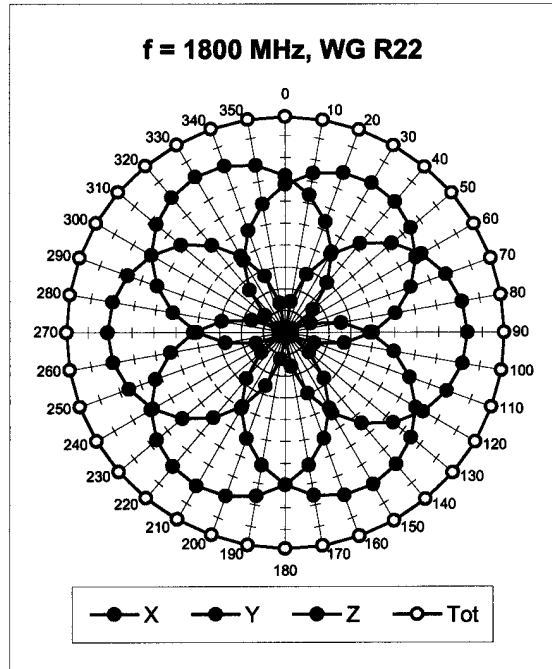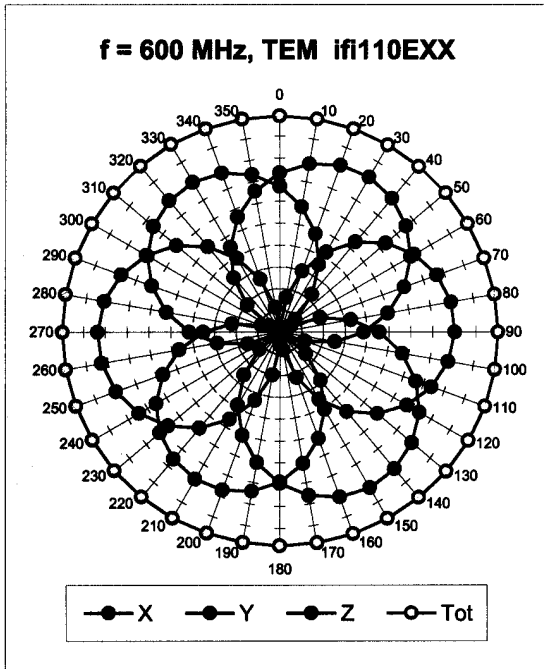


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$)

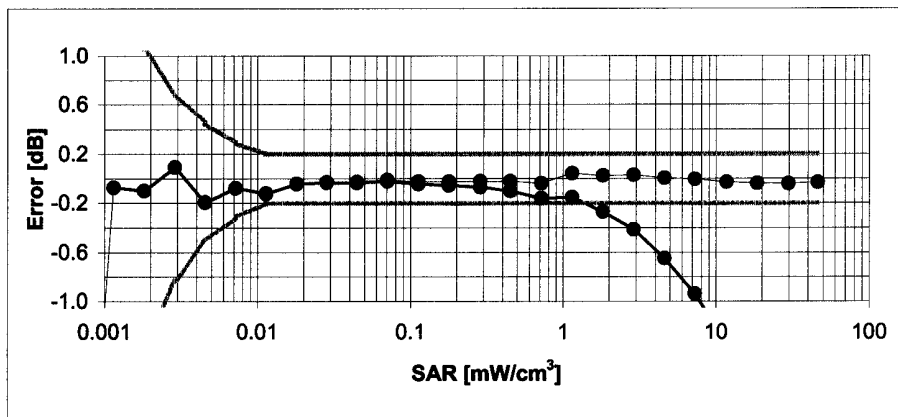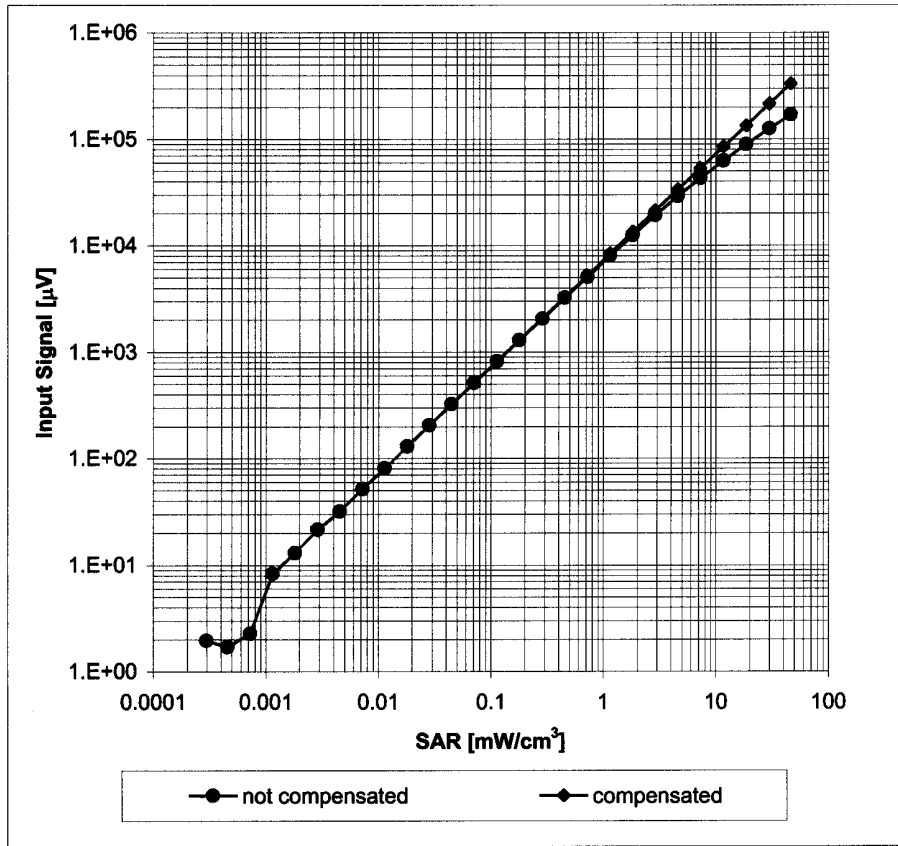

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

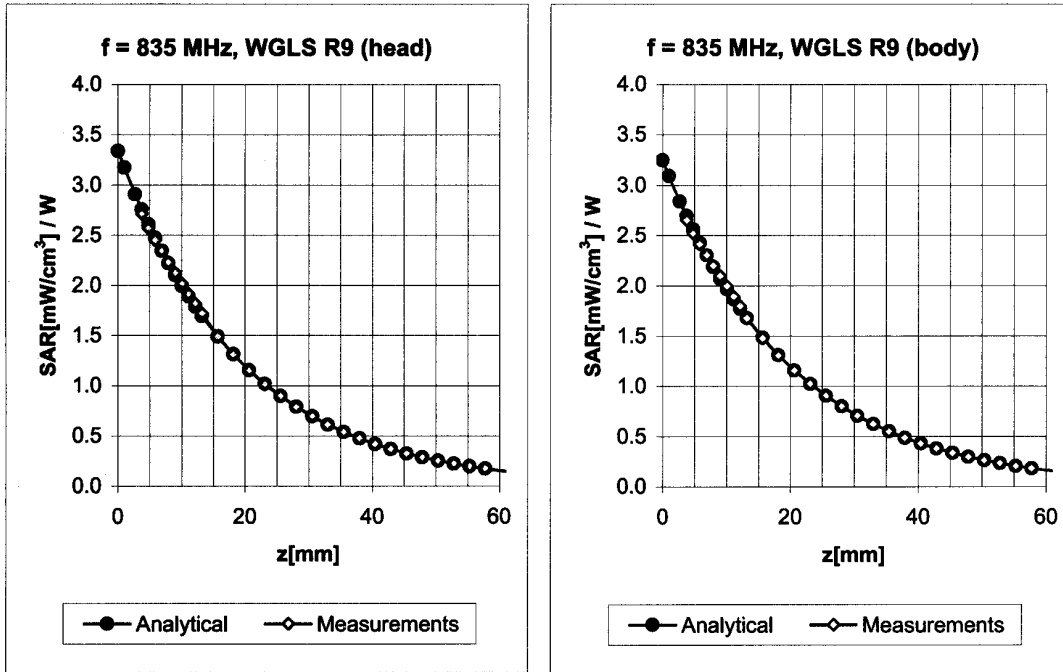


f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
450	± 50 / ± 100	Head	43.5 ± 5%	0.87 ± 5%	0.34	1.75	7.66 ± 13.3% (k=2)
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.32	3.52	6.54 ± 11.0% (k=2)
450	± 50 / ± 100	Body	56.7 ± 5%	0.94 ± 5%	0.28	1.77	8.27 ± 13.3% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.36	3.31	6.39 ± 11.0% (k=2)

^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

Deviation from Isotropy in HSL

Error (ϕ, ϑ), $f = 900$ MHz

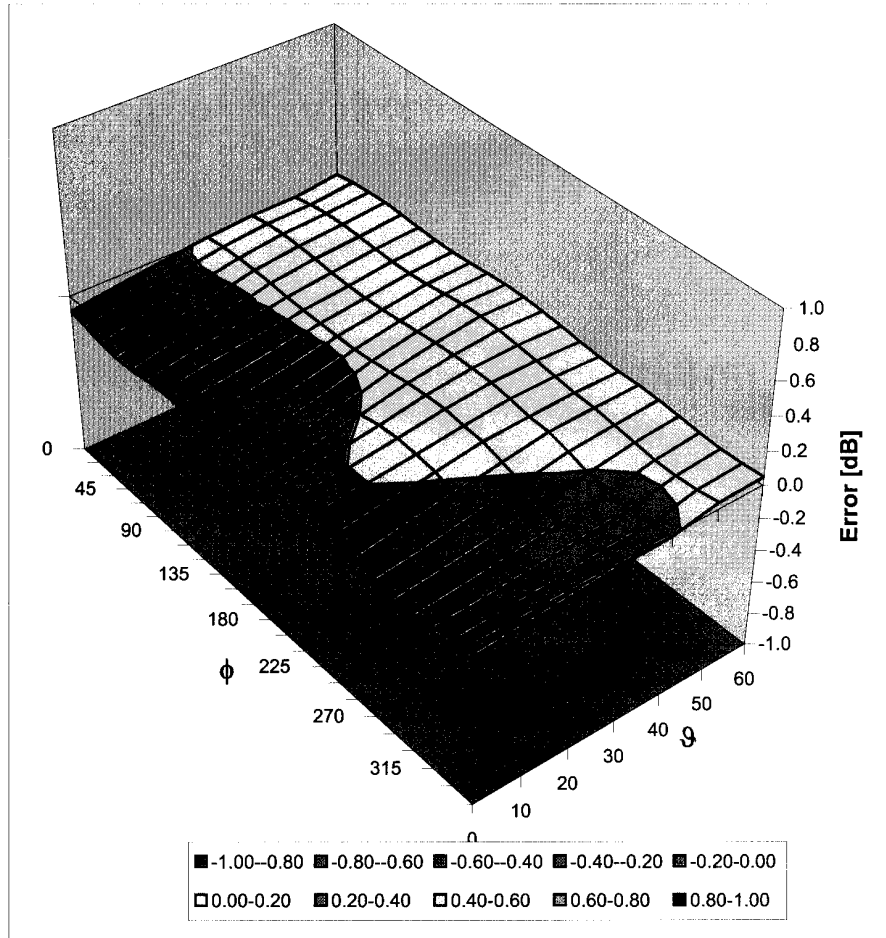

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)