



849 NW State Road 45
 Newberry, Fl 32669 USA
 Phone: 888.472.2424 or 352.472.5500
 Fax: 352.472.2030
 Email: info@timcoengr.com
 Website: www.timcoengr.com

FCC PART 15 SCANNING RECEIVER

Applicant	VERTEX STANDARD CO., LTD.
Address	4-8-8 NAKAMEGURO, MEGURO-KU
	TOKYO 153-8644 JAPAN
FCC ID:	K6620305X30
Model Number	FTM-10SR
Product Description	AMATEUR RADIO WITH SCANNING RECEIVER
Date Sample Received	5/28/2007
Date Tested	6/11/2007
Tested By	JOSEPH SCOGLIO
Approved By	MARIO DE ARANZETA
Report Number	2174AUT7TestReport.doc
Test Results	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
 WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**



TABLE OF CONTENTS

STATEMENT OF COMPLIANCE..... 3
GENERAL INFORMATION 4
TEST EQUIPMENT LIST 5
TEST PROCEDURE..... 6
RADIATED SPURIOUS EMISSIONS 7
POWER LINE CONDUCTED INTERFERENCE..... 9
38 Db REJECTION RADIO 10

APPLICANT: VERTEX STANDARD CO., LTD.
FCC ID: K6620305X30
REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

STATEMENT OF COMPLIANCE

This equipment has been tested in accordance with the standards identified in the referenced test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report and demonstrate that the equipment complies with the appropriate standards.

I attest that the necessary measurements were made by me or under my supervision, at TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, Florida 32669 USA.



Certificate #0955-01

Authorized by: Mario de Aranzeta

Authorized Signature: <Mario de Aranzeta>

Function: Engineer

Date: JUNE 15, 2007

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30

REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

GENERAL INFORMATION

The test results relate only to the items tested.	
DUT Description	AMATEUR RADIO WITH SCANNING RECEIVER
FCC ID	K6620305X30
Model Number	FTM-10SR
DUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz
	<input type="checkbox"/> DC Power
	<input checked="" type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype
	<input checked="" type="checkbox"/> Pre-Production
	<input type="checkbox"/> Production
Modifications to DUT	None
Test Standards	FCC Part 15, Subpart B, ANSI C63.4-2003

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30

REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/20/07	3/19/10
3-Meter OATS	TEI	N/A	N/A	Listed 1/11/06	1/10/09
Antenna: Biconnical	Eaton	94455-1	1057	CAL 12/12/05	12/12/07
Antenna: Biconnical	Eaton	94455-1	1096	CAL 10/11/06	10/11/08
Antenna: Biconnical	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Analyzer Tan Tower Quasi-Peak Adapter	HP	85650A	3303A01690	CAL 12/8/05	12/8/07
Analyzer Tan Tower RF Preselector	HP	85685A	3221A01400	CAL 12/7/05	12/7/07
Analyzer Tan Tower Spectrum Analyzer	HP	8568B Opt 462	3138A07786 3144A20661	CAL 12/7/05	12/7/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/5/06	10/5/08
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Antenna: Log- Periodic	Eaton	96005	1243	CAL 12/14/05	12/14/07

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30

REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

TEST PROCEDURE

General: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

Radiation Interference: The test procedure used was ANSI Standard C63.4-2003 using a spectrum analyzer with a pre-selector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The video bandwidth was always greater than or equal to the RBW.

Formula Of Conversion Factors: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dBuV	+ 10.36 dB/m	+0.40 dB	=30.36 dBuV/m @ 3m

ANSI C63.4-2003 Section 10.1.7 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

If powerline conducted testing was required for this device, the situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI C63.4-2003 with the EUT 40 cm from the vertical ground wall.

RADIATED SPURIOUS EMISSIONS

Rules Part No.: 15.109

Requirements:

Frequency	Limits
30 – 88	40.0 dB μ V/m measured @ 3 meters
80 – 216	43.5 dB μ V/m measured @ 3 meters
216 – 960	46.0 dB μ V/m measured @ 3 meters
Above 960	54.0 dB μ V/m measured @ 3 meters

Test Procedure: The procedure used was ANSI C63.4-2003. The frequency was scanned from 30 MHz to 1.0 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The DUT was measured in three (3) orthogonal planes when necessary.

Test Data:

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
77.0	154.00	7.4	H	0.72	14.00	22.12	21.38
95.0	190.00	4.0	V	0.86	17.40	22.26	21.24
95.0	190.00	10.2	H	0.86	17.40	28.46	15.04
107.0	214.00	3.8	V	0.93	11.50	16.23	27.27
107.0	214.00	8.0	H	0.93	11.74	20.67	22.83
109.0	156.20	4.7	V	0.72	14.60	20.02	23.48
124.0	171.20	3.1	V	0.78	16.59	20.47	23.03
124.0	171.20	5.0	H	0.78	15.27	21.05	22.45
138.0	185.20	3.3	V	0.84	17.30	21.44	22.06
138.0	185.20	4.3	H	0.84	17.11	22.25	21.25
155.0	202.20	8.7	V	0.90	11.70	21.30	22.20
155.0	202.20	16.0	H	0.90	12.06	28.96	14.54
162.4	209.70	14.1	V	0.92	11.70	26.72	16.78
162.4	209.70	22.9	H	0.92	11.91	35.73	7.77
173.0	220.20	5.3	V	0.94	11.20	17.44	28.56
173.0	220.20	8.3	H	0.94	11.50	20.74	25.26
197.0	151.20	6.8	V	0.70	14.27	21.77	21.73
197.0	151.20	7.9	H	0.70	14.28	22.88	20.62
301.0	348.20	4.8	V	1.15	14.60	20.55	25.45
301.0	348.20	6.1	H	1.15	14.96	22.21	23.79
318.0	365.20	5.0	V	1.17	14.96	21.13	24.87
318.0	365.20	9.3	H	1.17	15.10	25.57	20.43
335.0	382.20	4.5	V	1.18	15.37	21.05	24.95
335.0	382.20	7.9	H	1.18	15.49	24.57	21.43

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30

REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

TEST DATA CONTD.

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Pol	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
337.0	384.20	5.8	V	1.18	15.43	22.41	23.59
337.0	384.20	7.6	H	1.18	15.57	24.35	21.65
337.0	768.50	4.0	V	1.84	20.79	26.63	19.37
378.0	425.20	6.7	V	1.23	16.05	23.98	22.02
378.0	425.20	7.0	H	1.23	16.36	24.59	21.41
419.0	371.70	15.1	V	1.17	15.13	31.40	14.60
419.0	371.70	23.2	H	1.17	15.23	39.60	6.40
419.0	743.40	4.6	V	1.79	20.73	27.12	18.88
419.0	743.40	5.5	H	1.79	21.40	28.69	17.31
421.0	373.70	13.9	V	1.17	15.17	30.24	15.76
421.0	373.70	23.4	H	1.17	15.27	39.84	6.16
421.0	747.40	3.8	V	1.79	20.65	26.24	19.76
421.0	747.40	5.3	H	1.79	21.52	28.61	17.39
445.0	397.70	16.6	V	1.20	15.68	33.48	12.52
445.0	397.70	24.5	H	1.20	16.03	41.73	4.27
469.0	421.70	13.2	V	1.22	16.02	30.44	15.56
469.0	421.70	18.5	H	1.22	16.25	35.97	10.03
471.0	425.20	10.6	V	1.23	16.05	27.88	18.12
471.0	425.20	14.0	H	1.23	16.36	31.59	14.41
801.0	753.70	6.4	V	1.81	20.64	28.85	17.15
801.0	753.70	7.7	H	1.81	21.60	31.11	14.89
998.0	950.70	5.1	H	2.03	23.32	30.45	15.55

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30

REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: Part 15.107

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

Test Procedure: ANSI Standard C63.4-2003. The spectrum was scanned from 0.15 to 30 MHz.

Test Data: Not applicable.

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30


REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc

38 Db REJECTION RADIO

RULES PART NUMBER: 15.121(b)

REQUIREMENTS: 38dB REJECTION RATIO TO SENSITIVITY OF THE RECEIVER.

TEST SET-UP

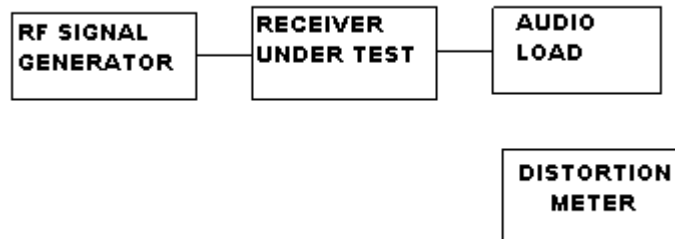

- a. Equipment connected as illustrated
- b. A standard signal was applied to the receiver input terminals.
- c. Receiver output audio output was adjusted for rated output.
- d. The RF Signal generator was adjusted to the lowest level to produce a 12dB SINAD without the audio output dropping more than 3dB. Make note of sensitivity level.
- e. This was done across the different bands to establish a reference level. The reference taken was the worse case sensitivity.
- f. The output of the signal generator was then adjusted to a level of 60dB above the reference level at a frequency of 824.5MHz.
- g. With the level set 60dB above the level measured in step e.
- h. Set squelch on receiver to threshold, the signal level required to open the squelch must be lower than the level measured in step d.
- i. Cause the receiver to scan or step-it through its complete range of frequencies.
- j. If receiver stops or unsquelches on any frequency, record the frequency and then adjust the level until a 12dB SINAD is produced. This level must be greater than 38dB above the level in step e.
- k. Repeat steps f through j for frequencies 836.0, 848.5, 869.1, 881.0, & 893.5MHz.

TEST RESULTS: The UUT meets the 38dB REJECTION RATIO.

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6620305X30

REPORT #: V\VERTEX_STANDARD\2174AUT7\2174AUT7TestReport.doc