

Model: FTM-150R Page 1 of 19

# **TEST REPORT**

## 144/430MHz DUAL BAND FM TRANSCEIVER

In conformity with

FCC CFR 47 Part15 Subpart B (CSR)

Model : FTM-150R

FCC ID : K6620865X50

: 144/430MHz DUAL BAND FM TRANSCEIVER **Test Item** 

Report No. : WE240205BB1-12

: 5 Jul. 2024 **Issue Date** 

#### Prepared for

YAESU MUSEN CO., LTD.

Omori Bell port D building 3F, 6-26-3 Minamioi, Shinagawa-ku,

Tokyo 140-0013 Japan

#### Prepared by

SGS Japan Inc.

3-5-23, Kiyatamata, Tsuzuki-ku, Yokohama, 224-0021, Japan

Telephone: +81+(0)50-1780-7880 FAX: +81+(0)45-592-7506

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

・ビスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償 載された結果は、試験したサンブルのみに属します。この書面全体の複製以外には、弊社からの事前 この試験報告書は、https://www.sgs.com/en/Terms-and-Conditions.aspx で入手が可能なサービスに関する一般的条件に則して発行されます。そちの範囲及び司法管轄の項目をご参照ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンプルのみに属します。この許可を得ること無く複製することを禁じます。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じる。



Model: FTM-150R Page 2 of 19

### **Table of contents**

| 1 | Ge   | neral information                          | 3    |
|---|------|--|------|
|   | 1.1  | Product description from supplier          | 3    |
|   | 1.2  | Test(s) performed/ Summary of test result  | 4    |
|   | 1.3  | Test facility                              |      |
|   | 1.4  | Measurement uncertainty                    | 5    |
|   | 1.5  | Summary of test results                    | 6    |
|   | 1.6  | Setup of equipment under test (EUT)        |      |
|   | 1.6. | 1 Test configuration of EUT                | 6    |
|   | 1.6. | 2 Operating condition:                     | 6    |
|   | 1.6. |  |      |
|   | 1.7  | Equipment modifications                    | 7    |
|   | 1.8  | Deviation from the standard                | 7    |
| 2 | Tes  | st procedure and test data                 | 8    |
|   | 2.1  | Radiated emissions                         | 8    |
|   | 2.2  | Conducted emissions for receiver           | . 13 |
|   | 2.3  | AC power line conducted emissions          | . 15 |
| 3 | Tes  | st setup photographs                       | 17   |
|   | 3.1  | Radiated emissions                         |      |
|   | 3.2  | AC power line conducted emissions          | . 18 |
|   | 3.3  | RF Conducted test                          | . 18 |
| 4 | Lis  | t of utilized test equipment / calibration | 19   |

## **History**

| Report No.     | Date         | Revisions                                | Issued By |
|----------------|--------------|--|-----------|
| WE240205BB1-11 | 18 Apr. 2024 | Initial Issue                            | K. Onishi |
| WE240205BB1-12 | 5 Jul. 2024  | Change Model number (FTM-450R->FTM-150R) | K. Onishi |
|                |              |  |           |

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 3 of 19

### **General information**

### 1.1 Product description from supplier

: 144/430MHz DUAL BAND FM TRANSCEIVER Test item

Manufacturer : YAESU MUSEN CO., LTD.

: 43 Utsuroda, Morijuku, Sukagawa-shi, Fukushima-ken 962-0001 JAPAN Address

Model : FTM-150R FCC ID : K6620865X50

Serial number : SPP01 Hardware version : SPP Software version : 95.10

Operating frequency range : 108.000 - 550.000 MHz

Highest internal operating Freq. : 550 MHz Receipt date of EUT : 28 Feb. 2024 Nominal power source voltages : DC 13.8 V (Battery)

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 4 of 19

#### 1.2 Test(s) performed/ Summary of test result

Test specification(s) : FCC CFR 47 Part 15 Subpart B

Test method(s) : ANSI C63.4: 2014 Test(s) started : 12 Apr. 2024 : 12 Apr. 2024 Test(s) completed

Purpose of test(s) : Certification as the scanning receiver

Summary of test result : Complied

Note: The above judgment is only based on the measurement data, and it does not include the measurement uncertainty. Accordingly, the statement below is applied to the test result.

The EUT complies with the limit required in the standard in case that the margin is not less than the measurement uncertainty in the Laboratory.

Compliance of the EUT is more probable than non-compliance is case that the margin is less than the measurement uncertainty in the Laboratory.

Test engineer

(Test Engineer, C&P Connectivity EMC Laboratory)

Reviewer

Y. Taki

(Manager, C&P Connectivity Wireless)

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 5 of 19

#### Test facility 1.3

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at SGS Japan Inc., located in 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama, 224-0021, Japan, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed under registration number 319924 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at http://www.fcc.gov.

Registered by Innovation, Science and Economic Development Canada (ISED): The registered CAB identifier is JP0009.

Accredited by National Voluntary Laboratory Accreditation Program (NVLAP) for the emission tests stated in the scope of the certificate under Certificate Number 200780-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



## Measurement uncertainty

The treatment of uncertainty is based on the general matters on the definition of uncertainty in "Guide to the expression of uncertainty in measurement (GUM)" published by ISO. The Lab's uncertainty is determined by referring UKAS Publication LAB34: 2002 "The Expression of Uncertainty in EMC Testing" and CISPR16-4-2: 2011 "Uncertainty in EMC Measurements".

The uncertainty of the measurement results in the level of confidence of approximately 95% (k=2) is as follows.

AC conducted emission (150 kHz - 30 MHz)  $: \pm 3.3 \text{ dB}$ RF conducted emission (30 MHz - 6 GHz)  $:\pm 1.3 dB$  $: \pm 5.9 \text{ dB}$ Radiated emission (30 MHz - 1000 MHz) Radiated emission (1 GHz - 6 GHz)  $: \pm 4.0 \text{ dB}$ 

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償 載された結果は、試験したサンブルのみに属します。この書面全体の複製以外には、弊社からの事前 この試験報告書は、https://www.sgs.com/en/Terms-and-Conditions.aspx で入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されの範囲及び司法管轄の項目をご参照ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンブルのみに属します。この書面全体の許可を得ること無く複製することを禁じます。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります



Model: FTM-150R Page 6 of 19

### 1.5 Summary of test results

| Requirement                              | Section in specification | Result   | Section in this report |
|--|--------------------------|----------|------------------------|
| Radiated emissions (30 to 2750 MHz) (*1) | 15.109                   | Complied | 2.1                    |
| Conducted emission for receiver          | 15.111                   | Complied | 2.2                    |
| AC power line conducted emissions        | 15.107                   | N/A (*2) | 2.3                    |
| 38 dB Rejection (cellular band)          | 15.121 (b)               | N/A (*3) | -                      |

- **(\*1)** The highest internal operating frequency is 550 MHz
- (\*2) The EUT is powered by the car battery.
- (\*3) This item was not tested in this report.

#### 1.6 **Setup of equipment under test (EUT)**

### 1.6.1 Test configuration of EUT

**Equipment(s) under test** 

| No. | Item                                   | Model No. | Manufacture           | Serial No. |
|-----|--|-----------|-----------------------|------------|
| 1   | 144/430MHz DUAL BAND<br>FM TRANSCEIVER | FTM-150R  | YAESU MUSEN CO., LTD. | SPP01      |
| -   | -                                      | -         | -                     | -0         |

**Support Equipment(s)** 

| No. | Item             | Item Model No. Manufa |                       | Serial No. |  |  |  |  |
|-----|------------------|-----------------------|-----------------------|------------|--|--|--|--|
| 2   | DTMF Microphone  | SSM-85D               | YAESU MUSEN CO., LTD. | -          |  |  |  |  |
| 3   | External Speaker | MLS-100               | YAESU MUSEN CO., LTD. | -          |  |  |  |  |
| -   | -                | -                     | -                     | -          |  |  |  |  |

**Connected cable(s)** 

| cicu c | abic(s)       |      |    |            |                   |                 |
|--------|---------------|------|----|------------|-------------------|-----------------|
| No.    | Item          | From | То | Length [m] | Cable<br>Shielded | Ferrite<br>Core |
| A      | Speaker cable | 1    | 2  | 1,9        | No                | No              |
| В      | Mic cable     | 1    | 3  | 0.5        | No                | No              |
| C      | DC cable      | 1    | DC | 2.8        | No                | No              |
| -      | -             | _    | -  | -          | -                 | -               |

#### 1.6.2 **Operating condition:**


- Receiving mode at Lch (108.000MHz)
- Receiving mode at Mch (329.000MHz)
- Receiving mode at Hch (550.000MHz)

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 7 of 19

### Setup diagram of tested system

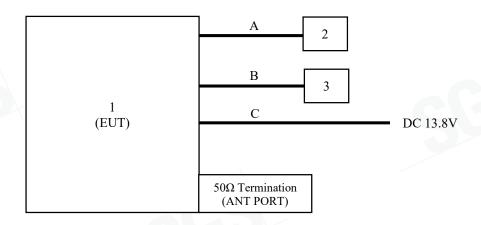

## **Equipment modifications**

No modifications have been made to the equipment to achieve compliance with the applicable standards described in clause 1.2.

#### 1.8 **Deviation from the standard**

No deviations from the standards described in clause 1.2.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 8 of 19

## Test procedure and test data

#### 2.1 Radiated emissions

#### **Test setup**

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation", clause 8.2 and Annex H.3 "Radiated emission measurements setup".

#### **Test procedure**

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 8.2.

The EUT is place on a non-conducted table which is 0.8 m height from a ground plane and the measurement antenna to EUT distance is 3 meters. The turn table is rotated for 360 degrees to determine the maximum emission level.

The antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

The spectrum analyzer and receiver are set to the followings;

RBW=100 kHz (up to 1000 MHz) or 1 MHz (above 1000 MHz),

VBW= 300 kHz (up to 1000 MHz) or 3 MHz (above 1000 MHz)

Final measurement is carried out with a receiver RBW of 120 kHz (up to 1000 MHz), or 1 MHz (above 1000 MHz).

#### Applicable rule and limitation

FCC 15.109 Radiated emissions limits

| Frequency<br>[MHz] | Field Strength [   [ | Measurement Distance [m] | Field Strength<br>[dBµV/m] |
|--------------------|----------------------|--------------------------|----------------------------|
| 30 - 88            | 100                  | 3                        | 40.0                       |
| 88 –216            | 150                  | 3                        | 43.5                       |
| 216 - 960          | 200                  | 3                        | 46.0                       |
| Above 960          | 500                  | 3                        | 53.9                       |

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a QP detector (up to 1000 MHz) or AVE/PEAK detector (above 1000 MHz).

#### Test results - Complied with requirement

### Test equipment used (refer to List of utilized test equipment)

| AC11(EM) | AC11(EG) | BA10 | CL71 | CL35 | CL36 | CL80 |
|----------|----------|------|------|------|------|------|
| DH07     | PR15     | PR16 | TR10 | -    | -    | -    |

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ービスに関する一般的条件に則して発行されます。 そちらに明記されている弊社の負うべき債務・補償 載された結果は、試験したサンプルのみに属します。 この書面全体の複製以外には、弊社からの事前 この試験報告書は、https://www.sgs.com/en/Terms-and-Conditions.aspx で入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されの範囲及び司法管轄の項目をご参照ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンブルのみに属します。この書面全体の許可を得ること無く複製することを禁じます。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります



Model: FTM-150R Page 9 of 19

#### Test software used EMI1 Ver. 6.1

#### **Calculation method**

The Correction Factor and Result are calculated as followings.

Correction Factor [dB/m] = Ant. Factor [dB/m] + Loss [dB] – Gain [dB] Result  $[dB\mu V/m]$  = Reading  $[dB\mu V]$  + Correction Factor [dB/m]

#### **Test Data**

Operating mode: Rx 108.000 MHz

Range: 30 - 1000 MHz

| No. | Frequency<br>[MHz] | Reading<br>[dBµV] | Factor [dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result [dBµV/m] | Limit<br>[dBµV/m] | Margin<br>[dB] | Ant.  |
|-----|--------------------|-------------------|---------------|--------------|--------------|-----------------|-------------------|----------------|-------|
| 1   | 374.150            | 40.9              | 14.8          | 7.9          | 29.9         | 33.7            | 46.0              | 12.3           | Hori. |
| 2 \ | 823.750            | 34.9              | 22.2          | 9.1          | 30.4         | 35.8            | 46.0              | 10.2           | Hori. |
| 3   | 988.500            | 32.4              | 24.5          | 9.4          | 30.1         | 36.2            | 53.9              | 17.7           | Hori. |
| 4   | 438.426            | 21.2              | 16.6          | 8.1          | 29.8         | 16.1            | 46.0              | 29.9           | Vert. |
| 5   | 823.750            | 30.7              | 22.2          | 9.1          | 30.4         | 31.6            | 46.0              | 14.4           | Vert. |
| 6   | 988.500            | 36.6              | 24.5          | 9.4          | 30.1         | 40.4            | 53.9              | 13.5           | Vert. |

Range: 1000 - 2750 MHz

| No. | Frequency<br>[MHz] | Reading<br>PK<br>[dBµV] | Reading<br>AVE<br>[dBµV] | C.Factor [dB/m] | Result<br>PK<br>[dBµV/m] | Result<br>AVE<br>[dBµV/m] | Limit<br>PK<br>[dBµV/m] | Limit<br>AVE<br>[dBµV/m] | Margin<br>PK<br>[dB] | Margin<br>AVE<br>[dB] | Ant.  |
|-----|--------------------|-------------------------|--------------------------|-----------------|--------------------------|---------------------------|-------------------------|--------------------------|----------------------|-----------------------|-------|
| 1   | 1812.249           | 52.0                    | 47.6                     | -5.8            | 46.2                     | 41.8                      | 73.9                    | 53.9                     | 27.7                 | 12.1                  | Hori. |
| 2   | 1977.000           | 51.2                    | 46.5                     | -4.4            | 46.8                     | 42.1                      | 73.9                    | 53.9                     | 27.1                 | 11.8                  | Hori. |
| 3   | 2619.052           | 48.9                    | 42.5                     | -1.0            | 47.9                     | 41.5                      | 73.9                    | 53.9                     | 26.0                 | 12.4                  | Hori. |
| 4   | 1812.248           | 51.0                    | 44.8                     | -5.8            | 45.2                     | 39.0                      | 73.9                    | 53.9                     | 28.7                 | 14.9                  | Vert. |
| 5   | 1977.000           | 50.3                    | 44.4                     | -4.4            | 45.9                     | 40.0                      | 73.9                    | 53.9                     | 28.0                 | 13.9                  | Vert. |
| 6   | 2619.054           | 48.4                    | 41.1                     | -1.0            | 47.4                     | 40.1                      | 73.9                    | 53.9                     | 26.5                 | 13.8                  | Vert. |

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 10 of 19

Operating mode: Rx 329.000 MHz

Range: 30 - 1000 MHz

| Range. 30 - 1000 MHZ |                    |                   |               |              |              |                 |                   |                |       |  |  |
|----------------------|--------------------|-------------------|---------------|--------------|--------------|-----------------|-------------------|----------------|-------|--|--|
| No.                  | Frequency<br>[MHz] | Reading<br>[dBµV] | Factor [dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result [dBµV/m] | Limit<br>[dBµV/m] | Margin<br>[dB] | Ant.  |  |  |
| 1                    | 30.000             | 21.4              | 18.9          | 6.3          | 30.3         | 16.3            | 40.0              | 23.7           | Hori. |  |  |
| 2                    | 374.150            | 41.1              | 14.8          | 7.9          | 29.9         | 33.9            | 46.0              | 12.1           | Hori. |  |  |
| 3                    | 959.555            | 21.8              | 25.2          | 9.3          | 30.2         | 26.1            | 46.0              | 19.9           | Hori. |  |  |
| 4                    | 771.500            | 34.2              | 22.3          | 8.8          | 30.2         | 35.1            | 46.0              | 10.9           | Vert. |  |  |
|                      | -                  | -                 | -             | ı            | ı            | -               |                   |                | -     |  |  |
| -                    | -                  | -                 | -             | -            | -            | -               | -                 | _              | _     |  |  |

Range: 1000 - 2750 MHz

| No. | Frequency<br>[MHz] | Reading<br>PK<br>[dBµV] | Reading<br>AVE<br>[dBµV] | C.Factor [dB/m] | Result<br>PK<br>[dBµV/m] | Result<br>AVE<br>[dBµV/m] | Limit<br>PK<br>[dBµV/m] | Limit<br>AVE<br>[dBµV/m] | Margin<br>PK<br>[dB] | Margin<br>AVE<br>[dB] | Ant.  |
|-----|--------------------|-------------------------|--------------------------|-----------------|--------------------------|---------------------------|-------------------------|--------------------------|----------------------|-----------------------|-------|
| 1   | 1157.249           | 55.6                    | 53.2                     | -6.9            | 48.7                     | 46.3                      | 73.9                    | 53.9                     | 25.2                 | 7.6                   | Hori. |
| 2   | 1928.749           | 55.7                    | 53.0                     | -5.0            | 50.7                     | 48.0                      | 73.9                    | 53.9                     | 23.2                 | 5.9                   | Hori. |
| 3   | 2619.051           | 49.0                    | 42.4                     | -1.0            | 48.0                     | 41.4                      | 73.9                    | 53.9                     | 25.9                 | 12.5                  | Hori. |
| 4   | 1157.251           | 59.6                    | 58.0                     | -6.9            | 52.7                     | 51.1                      | 73.9                    | 53.9                     | 21.2                 | 2.8                   | Vert. |
| 5   | 1928.754           | 54.7                    | 52.0                     | -5.0            | 49.7                     | 47.0                      | 73.9                    | 53.9                     | 24.2                 | 6.9                   | Vert. |
| 6   | 2619.042           | 48.3                    | 40.7                     | -1.0            | 47.3                     | 39.7                      | 73.9                    | 53.9                     | 26.6                 | 14.2                  | Vert. |

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 11 of 19

Operating mode: Rx 550.000 MHz

Range: 30 - 1000 MHz

| runge. | Kange. 30 - 1000 MHZ |                   |               |              |              |                 |                   |                |       |  |
|--------|----------------------|-------------------|---------------|--------------|--------------|-----------------|-------------------|----------------|-------|--|
| No.    | Frequency<br>[MHz]   | Reading<br>[dBµV] | Factor [dB/m] | Loss<br>[dB] | Gain<br>[dB] | Result [dBµV/m] | Limit<br>[dBµV/m] | Margin<br>[dB] | Ant.  |  |
| 1      | 30.970               | 21.5              | 18.3          | 6.3          | 30.3         | 15.8            | 40.0              | 24.2           | Hori. |  |
| 2      | 374.150              | 41.1              | 14.8          | 7.9          | 29.9         | 33.9            | 46.0              | 12.1           | Hori. |  |
| 3      | 493.250              | 40.9              | 17.8          | 8.2          | 29.6         | 37.3            | 46.0              | 8.7            | Hori. |  |
| 4      | 986.500              | 36.2              | 24.6          | 9.4          | 30.1         | 40.1            | 53.9              | 13.8           | Hori. |  |
| 5      | 493.250              | 36.8              | 17.8          | 8.2          | 29.6         | 33.2            | 46.0              | 12.8           | Vert. |  |
| 6      | 986.500              | 40.4              | 24.6          | 9.4          | 30.1         | 44.3            | 53.9              | 9.6            | Vert. |  |

Range: 1000 - 2750 MHz

| No. | Frequency [MHz] | Reading<br>PK<br>[dBµV] | Reading<br>AVE<br>[dBµV] | C.Factor [dB/m] | Result<br>PK<br>[dBµV/m] | Result<br>AVE<br>[dBµV/m] | Limit<br>PK<br>[dBµV/m] | Limit<br>AVE<br>[dBµV/m] | Margin<br>PK<br>[dB] | Margin<br>AVE<br>[dB] | Ant.  |
|-----|-----------------|-------------------------|--------------------------|-----------------|--------------------------|---------------------------|-------------------------|--------------------------|----------------------|-----------------------|-------|
| 1   | 1479.749        | 57.5                    | 55.4                     | -6.7            | 50.8                     | 48.7                      | 73.9                    | 53.9                     | 23.1                 | 5.2                   | Hori. |
| 2   | 1973.002        | 52.0                    | 47.8                     | -4.6            | 47.4                     | 43.2                      | 73.9                    | 53.9                     | 26.5                 | 10.7                  | Hori. |
| 3   | 2619.053        | 48.9                    | 42.4                     | -1.0            | 47.9                     | 41.4                      | 73.9                    | 53.9                     | 26.0                 | 12.5                  | Hori. |
| 4   | 1479.750        | 55.6                    | 52.9                     | -6.7            | 48.9                     | 46.2                      | 73.9                    | 53.9                     | 25.0                 | 7.7                   | Vert. |
| 5   | 1973.000        | 51.2                    | 46.2                     | -4.6            | 46.6                     | 41.6                      | 73.9                    | 53.9                     | 27.3                 | 12.3                  | Vert. |
| 6   | 2619.049        | 48.1                    | 41.1                     | -1.0            | 47.1                     | 40.1                      | 73.9                    | 53.9                     | 26.8                 | 13.8                  | Vert. |


This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Model: FTM-150R Page 12 of 19

### [Chart (Worst)]

#### Operating condition: Rx 329.000 MHz

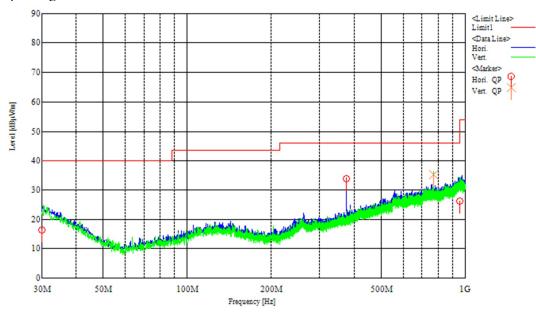

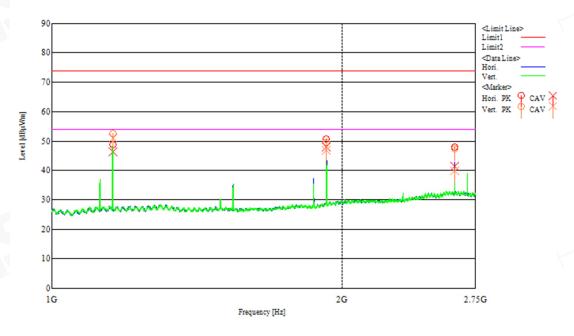

#### [Test condition]

Tested Date: 12 Apr. 2024 20 deg. C Temperature: 47 % Humidity: Atmos. Press: 1018 hPa


This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 13 of 19

#### **Conducted emissions for receiver**

#### **Test setup**



#### Applicable rule and limitation

§15.111 (b) Antenna power conducted limit: 2 nW (= -57 dBm)

#### Test equipment used (refer to List of utilized test equipment)

### Test results - Complied with requirement

#### **Test Data**

[The maximum spurious level]

| Operating freq. |                | cy range<br>00 MHz | Frequency range<br>1000 - 2750 MHz |                |  |  |
|-----------------|----------------|--------------------|------------------------------------|----------------|--|--|
| [MHz]           | Freq.<br>[MHz] | Level<br>\[dBm]    | Freq.<br>[MHz]                     | Level<br>[dBm] |  |  |
| 108.000         | 374.140        | -66.2              | 1870.626                           | -64.7          |  |  |
| 329.000         | 374.139        | -66.4              | 1870.626                           | -64.6          |  |  |
| 550.000         | 374.090        | -66.6              | 1870.626                           | -65.1          |  |  |

[Test condition]

Tested Date: 12 Apr. 2024 Temperature: 20 deg. C Humidity: Atmos. Press: 1018 hPa


This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Model: FTM-150R Page 14 of 19

[Chart]

Operating mode: Rx 329.000 MHz (Worst)

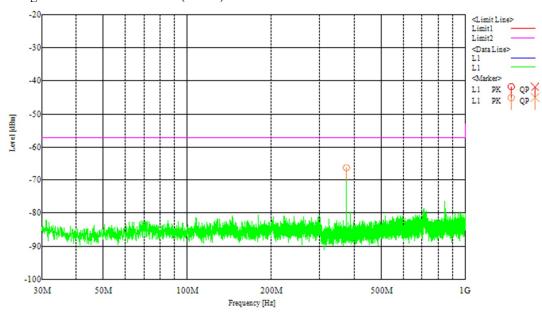

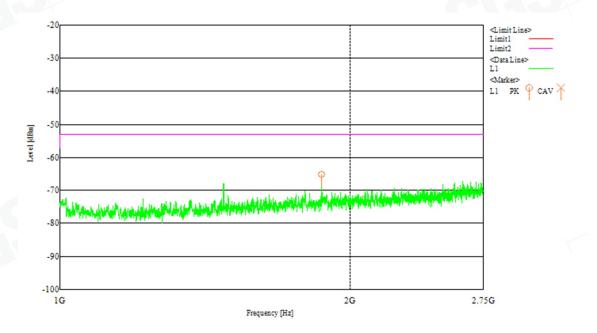

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 15 of 19

### AC power line conducted emissions

#### **Test setup**

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation" and Annex H.1 "AC power line conducted emission measurements setup".

#### **Test procedure**

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 7, clause 13.1.3 and Annex H.2 "AC power line conducted emission measurements".

Exploratory measurements were used the spectrum analyzer to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement.

Final ac power line conducted emission measurements were performed based on the exploratory tests. The EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit are selected for the final measurement.

When the measurement value is greater than average limitation the average detection measurements were performed.

#### Applicable rule and limitation

§15.107 (b) AC power line conducted limits

| Frequency of Emission | Conducted emissions Limit [dBµV] |            |  |  |  |
|-----------------------|----------------------------------|------------|--|--|--|
| [MHz]                 | Quasi-peak                       | Average    |  |  |  |
| 0.15 - 0.5            | 66 to 56 *                       | 56 to 46 * |  |  |  |
| 0.5 - 5               | 56                               | 46         |  |  |  |
| 5 - 30                | 60                               | 50         |  |  |  |

<sup>\*</sup> Decreases with the logarithm of the frequency. The lower limit applies at the band edges.

#### Test equipment used (refer to List of utilized test equipment)

| _ | _ | _ | _ |
|---|---|---|---|
| _ | _ | _ | _ |
|   |   |   |   |

#### Test software used

EMI1 Ver. 6.1

#### Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB] = ISN Factor [dB] + Loss [dB] Result  $[dB\mu V]$  = Reading  $[dB\mu V]$  + Correction Factor [dB]

Test results - This item was not tested.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 16 of 19

#### **Test Data**

[Emission level]

Operating mode: -

| Freq.<br>[MHz] | Reading<br>QP<br>[dBµV] | Reading<br>Ave<br>[dBµV] | Factor [dB] | Result<br>QP<br>[dBµV] | Result<br>Ave<br>[dBµV] | Limit<br>QP<br>[dBµV] | Limit<br>Ave<br>[dBµV] | Margin<br>QP<br>[dB] | Margin<br>Ave<br>[dB] | Line |
|----------------|-------------------------|--------------------------|-------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|------|
|                |                         |                          |             |                        |                         |                       |                        |                      |                       |      |
|                |                         |                          |             |                        |                         |                       |                        |                      |                       | \    |

[Chart]

Operating mode: -

[Test condition]

Tested Date: Humidity:

- deg. C Temperature:

- %

- hPa Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FTM-150R Page 19 of 19

### List of utilized test equipment / calibration

| RFT<br>ID No. | Kind of Equipment and Precision | Manufacturer            | Model No.     | Serial Number | Calibration<br>Date | Calibrated until |
|---------------|---------------------------------|-------------------------|---------------|---------------|---------------------|------------------|
| AC11(EM)      | Anechoic Chamber                | TDK                     | -             | -             | 2023/08/03          | 2024/08/31       |
| AC11(EG)      | Anechoic Chamber                | TDK                     | -             | -             | 2023/07/29          | 2024/07/31       |
| BA10          | Bilogical Antenna               | TESEQ                   | CBL6111D      | 32342         | 2023/06/21          | 2024/06/30       |
| CL35          | RF Cable 2 m                    | Junkosha                | MWX221        | 1502S020      | 2024/02/16          | 2025/02/28       |
| CL36          | RF Cable 2 m                    | Junkosha                | MWX221        | 1502S021      | 2024/02/16          | 2025/02/28       |
| CL80          | RF Cable 8 m                    | HUBER&SUHNER            | SUCOFLEX104PE | MY3792/4PE    | 2024/02/16          | 2025/02/28       |
| CL71          | RF Cable for RE                 | RFT                     | -             | -             | 2024/01/17          | 2025/01/31       |
| DH07          | DRG Horn Antenna                | A.H. Systems            | SAS-571       | 1939          | 2024/02/08          | 2026/02/28       |
| PR15          | Pre. Amplifier                  | Anritsu                 | MH648A        | 6201156141    | 2023/06/21          | 2024/06/30       |
| PR16          | Pre. Amplifier (1-26G)          | Agilent<br>Technologies | 8449B         | 3008A01538    | 2024/02/16          | 2025/02/28       |
| TR10          | Test Receiver (F/W: 3.66)       | Rohde & Schwarz         | ESR26         | 101313        | 2023/05/18          | 2024/05/31       |

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.