

Model: FT-3185R Page 1 of 19

TEST REPORT

VHF FM TRANSCEIVER

In conformity with

FCC CFR 47 Part15 Subpart B (CSR)

Model : FT-3185R

FCC ID : K6620873X50

Test Item : VHF FM TRANSCEIVER

Report No. : WE231124BB1-12

Issue Date : 6 Feb. 2024

Prepared for

YAESU MUSEN CO., LTD.

Omori Bell port D building 3F, 6-26-3 Minamioi, Shinagawa-ku,

Tokyo 140-0013 Japan

Prepared by

SGS Japan Inc.

3-5-23, Kiyatamata, Tsuzuki-ku, Yokohama, 224-0021, Japan

Telephone: +81+(0)50-1780-7880 FAX: +81+(0)45-592-7506

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

・ビスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償 敢された結果は、試験したサンブルのみに属します。この書面全体の複製以外には、弊社からの事前 この試験報告書は、https://www.sgs.com/en/Terms-and-Conditions.aspx で入手が可能なサーの範囲及び司法管轄の項目をご参照ください。他に特に明記のない限り、この試験報告書に記の許可を得ること無く複製することを禁じます。この試験報告書を無断で変更、偽造、改ざんする



Model: FT-3185R Page 2 of 19

Table of contents

1	Gei	neral information	3
	1.1	Product description from supplier	3
	1.2	Test(s) performed/ Summary of test result	4
	1.3	Test facility	
	1.4	Measurement uncertainty	5
	1.5	Summary of test results	6
	1.6	Setup of equipment under test (EUT)	6
	1.6.	1 Test configuration of EUT	6
	1.6.2	2 Operating condition:	6
	1.6.3		
	1.7	Equipment modifications	7
	1.8	Deviation from the standard	7
2	Tes	t procedure and test data	8
	2.1	Radiated emissions	8
	2.2	Conducted emissions for receiver	. 13
	2.3	AC power line conducted emissions	. 15
3	Tes	t setup photographs	17
	3.1	Radiated emissions	
	3.2	AC power line conducted emissions	
	3.3	RF Conducted test	. 18
4	List	t of utilized test equipment / calibration	19

History

Report No.	Date	Revisions	Issued By
WE231124BB1-11	26 Jan. 2024	Initial Issue	K. Onishi
WE231124BB1-12	6 Feb. 2024	Replaced the plot data (clause 2.2)	K. Onishi

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 3 of 19

General information

1.1 Product description from supplier

: VHF FM TRANSCEIVER Test item Manufacturer : YAESU MUSEN CO., LTD.

: 43 Utsuroda, Morijuku, Sukagawa-shi, Fukushima-ken 962-0001 JAPAN Address

Model : FT-3185R FCC ID : K6620873X50

Serial number : SPP01 : SPP Hardware version Software version : AA07

Operating frequency range : 136.000 - 174.000 MHz

Highest internal operating Freq. : 174 MHz Receipt date of EUT : 13 Dec. 2023 Nominal power source voltages : DC 13.8 V

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 4 of 19

1.2 Test(s) performed/ Summary of test result

Test specification(s) : FCC CFR 47 Part 15 Subpart B

Test method(s) : ANSI C63.4: 2014 : 19 Dec. 2023 Test(s) started Test(s) completed : 19 Dec. 2023

Purpose of test(s) : Certification as the scanning receiver

Summary of test result : Complied

Note: The above judgment is only based on the measurement data, and it does not include the measurement uncertainty. Accordingly, the statement below is applied to the test result.

The EUT complies with the limit required in the standard in case that the margin is not less than the measurement uncertainty in the Laboratory.

Compliance of the EUT is more probable than non-compliance is case that the margin is less than the measurement uncertainty in the Laboratory.

Test engineer

(Test Engineer, C&P Connectivity EMC Laboratory)

Reviewer

(Manager, C&P Connectivity Wireless)

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 5 of 19

Test facility 1.3

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at SGS Japan Inc., located in 3-5-23, Kitayamata, Tsuzuki-ku, Yokohama, 224-0021, Japan, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed under registration number 319924 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at http://www.fcc.gov.

Registered by Innovation, Science and Economic Development Canada (ISED): The registered CAB identifier is JP0009.

Accredited by National Voluntary Laboratory Accreditation Program (NVLAP) for the emission tests stated in the scope of the certificate under Certificate Number 200780-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.



Measurement uncertainty

The treatment of uncertainty is based on the general matters on the definition of uncertainty in "Guide to the expression of uncertainty in measurement (GUM)" published by ISO. The Lab's uncertainty is determined by referring UKAS Publication LAB34: 2002 "The Expression of Uncertainty in EMC Testing" and CISPR16-4-2: 2011 "Uncertainty in EMC Measurements".

The uncertainty of the measurement results in the level of confidence of approximately 95% (k=2) is as follows.

AC conducted emission (150 kHz - 30 MHz) $: \pm 3.3 \text{ dB}$ RF conducted emission (30 MHz - 6 GHz) $:\pm 1.3 dB$ $: \pm 5.9 \text{ dB}$ Radiated emission (30 MHz - 1000 MHz) Radiated emission (1 GHz - 6 GHz) $: \pm 4.0 \text{ dB}$

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ービスに関する一般的条件に則して発行されます。そちらに明記されている弊社の負うべき債務・補償 載された結果は、試験したサンブルのみに属します。この書面全体の複製以外には、弊社からの事前 この試験報告書は、https://www.sgs.com/en/Terms-and-Conditions.aspx で入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されの範囲及び司法管轄の項目をご参照ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンブルのみに属します。この書面全体の許可を得ること無く複製することを禁じます。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります



Model: FT-3185R Page 6 of 19

1.5 Summary of test results

Requirement	Section in specification	Result	Section in this report
Radiated emissions (30 to 2000 MHz) (*1)	15.109	Complied	2.1
Conducted emission for receiver	15.111	Complied	2.2
AC power line conducted emissions	15.107	N/A (*2)	2.3
38 dB Rejection (cellular band)	15.121 (b)	N/A (*3)	-

- (*1) The highest internal operating frequency is 174 MHz
- (*2) The EUT is powered by the car battery.
- (*3)This item was not tested in this report.

Setup of equipment under test (EUT)

Test configuration of EUT

Equipment(s) under test

No.	Item	Model No.	Manufacture	Serial No.
1	VHF FM TRANSCEIVER	FT-3185R	YAESU MUSEN CO., LTD.	SPP01
- 1	_	-	-	-

Support Equipment(s)

No.	Item	Model No. Manufacture		Serial No.
2	DTMF Microphone	SSM-85D	YAESU MUSEN CO., LTD.	-
3	External Speaker	MLS-100	YAESU MUSEN CO., LTD.	-
_	-	-	-	-

Connected cable(s)

No.	Item	From	То	Length [m]	Cable Shielded	Ferrite Core
A	Speaker cable	1	2	1,9	No	No
В	Mic cable	1	3	0.5	No	No
C	DC cable	1	DC	2.8	No	No
	-	-	-	-	-	

1.6.2 Operating condition:


- Receiving mode at Lch (136.000MHz)
- Receiving mode at Mch (155.000MHz)
- Receiving mode at Hch (174.000MHz)

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 7 of 19

Setup diagram of tested system

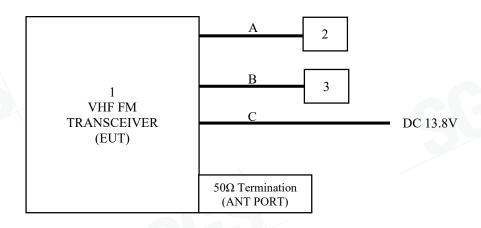

Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the applicable standards described in clause 1.2.

Deviation from the standard 1.8

No deviations from the standards described in clause 1.2.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 8 of 19

Test procedure and test data

2.1 Radiated emissions

Test setup

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation", clause 8.2 and Annex H.3 "Radiated emission measurements setup".

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 8.2.

The EUT is place on a non-conducted table which is 0.8 m height from a ground plane and the measurement antenna to EUT distance is 3 meters. The turn table is rotated for 360 degrees to determine the maximum emission level.

The antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

The spectrum analyzer and receiver are set to the followings;

RBW=100 kHz (up to 1000 MHz) or 1 MHz (above 1000 MHz),

VBW= 300 kHz (up to 1000 MHz) or 3 MHz (above 1000 MHz)

Final measurement is carried out with a receiver RBW of 120 kHz (up to 1000 MHz), or 1 MHz (above 1000 MHz).

Applicable rule and limitation

FCC 15.109 Radiated emissions limits

Frequency [MHz]	Field Strength [μV/m]	Measurement Distance [m]	Field Strength [dBµV/m]
30 - 88	100	3	40.0
88 –216	150	3	43.5
216 - 960	200	3	46.0
Above 960	500	3	53.9

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a QP detector (up to 1000 MHz) or AVE/PEAK detector (above 1000 MHz).

Test results - Complied with requirement

Test equipment used (refer to List of utilized test equipment)

AC01 (EM)	AC01 (EG)	BA07	CL11	CL38	CL39	DH06
PR12	PR21	TR10	-	-	-	-

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

ービスに関する一般的条件に則して発行されます。 そちらに明記されている弊社の負うべき債務・補償 載された結果は、試験したサンプルのみに属します。 この書面全体の複製以外には、弊社からの事前 この試験報告書は、https://www.sgs.com/en/Terms-and-Conditions.aspx で入手が可能なサービスに関する一般的条件に則して発行されます。そちらに明記されの範囲及び司法管轄の項目をご参照ください。他に特に明記のない限り、この試験報告書に記載された結果は、試験したサンブルのみに属します。この書面全体の許可を得ること無く複製することを禁じます。この試験報告書を無断で変更、偽造、改ざんすることは違法であり、違反者に対しては法的手段を講じることとなります



Model: FT-3185R Page 9 of 19

Test software used EMI1 Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB/m] = Ant. Factor [dB/m] + Loss [dB] - Gain [dB]Result $[dB\mu V/m] = Reading [dB\mu V] + Correction Factor [dB/m]$

Test Data

Operating mode: Rx 136.000 MHz

Range: 30 - 1000 MHz

No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	30.000	20.4	22.8	6.8	30.3	19.7	40.0	20.3	Vert.
2	845.591	16.8	20.1	12.4	30.4	18.9	46.0	27.1	Vert.
3	959.900	15.9	21.0	12.8	30.1	19.6	46.0	26.4	Vert.
_	-	-	-	-	ı	-	-		-
-	-	-	-	-	ı	-	-	-	-
-	_	-	-	-	-	-	-	-	_

All other emissions were under noise floor.

Range: 1000 - 2000 MHz

No.	Frequency [MHz]	Reading PK [dBµV]	Reading AVE [dBµV]	C.Factor [dB/m]	Result PK [dBµV/m]	Result AVE [dBµV/m]	Limit PK [dBµV/m]	Limit AVE [dBµV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1000.000	46.1	33.0	-11.5	34.6	21.5	73.9	53.9	39.3	32.4	Hori.
2	2000.000	43.9	30.2	-6.4	37.5	23.8	73.9	53.9	36.4	30.1	Hori.
-	_	ı	-	1	-	i	ı	Ī	1	_	-
-	-	ı	1	ı	-	Ī	ı	Ī	ı		-
-		ı	ı	ı	-	i	ı	i	•	j	-
-	-	1	-	-	-	i	1	-	1	ſ	-

All other emissions were under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 10 of 19

Operating mode: Rx 155.000 MHz

Range: 30 - 1000 MHz

rtunge.	Kange. 30 - 1000 Milz											
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.			
1	30.000	20.4	22.8	6.8	30.3	19.7	40.0	20.3	Hori.			
2	845.397	16.9	20.1	12.4	30.4	19.0	46.0	27.0	Hori.			
3	916.491	16.5	20.6	12.7	30.3	19.5	46.0	26.5	Hori.			
4	959.900	16.0	21.0	12.8	30.1	19.7	46.0	26.3	Hori.			
	-	-	-	-	-	-	-	•	-			
_	-	-	-	-	-	-	-	-	-			

All other emissions were under noise floor.

Range: 1000 - 2000 MHz

No.	Frequency [MHz]	Reading PK [dBµV]	Reading AVE [dBµV]	C.Factor [dB/m]	Result PK [dBµV/m]	Result AVE [dBµV/m]	Limit PK [dBµV/m]	Limit AVE [dBµV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1000.000	46.6	33.0	-11.5	35.1	21.5	73.9	53.9	38.8	32.4	Vert.
2	2000.000	43.7	30.3	-6.4	37.3	23.9	73.9	53.9	36.6	30.0	Vert.
-	-	-	-	-	-	-	-	-	-	-	-
		Ī	1	ı	-	-	-	1		1	-
-		-	-	-	-	-	-	-			-
		-	-	-	-	-	-				-

All other emissions were under noise floor.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 11 of 19

Operating mode: Rx 174.000 MHz

Range: 30 - 1000 MHz

1100118011	00 - 1000 WIIIZ						1		
No.	Frequency [MHz]	Reading [dBµV]	Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Ant.
1	30.000	20.3	22.8	6.8	30.3	19.6	40.0	20.4	Hori.
2	845.785	16.9	20.1	12.4	30.4	19.0	46.0	27.0	Hori.
3	959.900	16.0	21.0	12.8	30.1	19.7	46.0	26.3	Hori.
-	-	-	-	-	-	-	- (
_	-	-	-	-	-	-	-		-
-	-	-	-	-	-	-	-	-	-

All other emissions were under noise floor.

Range: 1000 - 2000 MHz

No.	Frequency [MHz]	Reading PK [dBµV]	Reading AVE [dBµV]	C.Factor [dB/m]	Result PK [dBµV/m]	Result AVE [dBµV/m]	Limit PK [dBµV/m]	Limit AVE [dBµV/m]	Margin PK [dB]	Margin AVE [dB]	Ant.
1	1000.000	46.8	33.0	-11.5	35.3	21.5	73.9	53.9	38.6	32.4	Vert.
2	1827.601	46.6	36.2	-8.3	38.3	27.9	73.9	53.9	35.6	26.0	Vert.
3	2000.000	44.3	30.2	-6.4	37.9	23.8	73.9	53.9	36.0	30.1	Vert.
		ı	1	ı	-	-	-	1		-	-
-		ı	1	ı	-	-	-			-)	-
		-	-	-	-	-	-			-	-

All other emissions were under noise floor.


This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Model: FT-3185R Page 12 of 19

[Chart (Worst)]

Operating condition: Rx 174.000 MHz

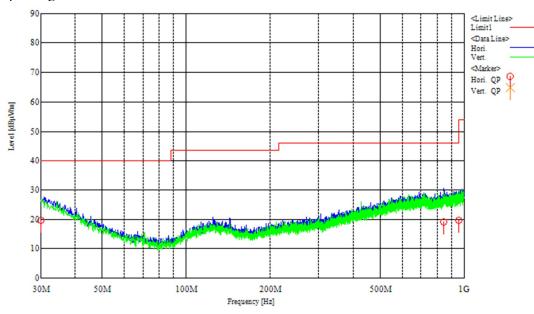

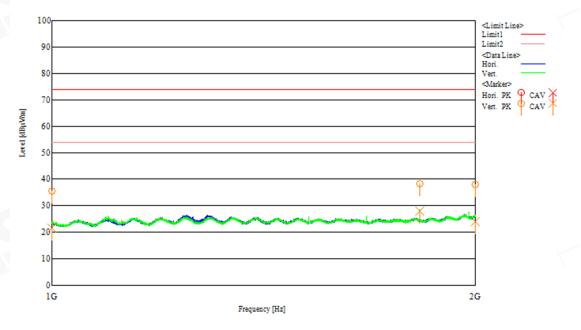

[Test condition]

Tested Date: 16 deg. C 19 Dec. 2023 Temperature: 31 % Humidity: Atmos. Press: 1022 hPa


This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 13 of 19

Conducted emissions for receiver

Test setup



Applicable rule and limitation

§15.111 (b) Antenna power conducted limit: 2 nW (= -57 dBm)

Test equipment used (refer to List of utilized test equipment)

|--|

Test results - Complied with requirement

Test Data

[The maximum spurious level]

Operating freq.		cy range 00 MHz		cy range 000 MHz
[MHz]	Freq. [MHz]	Level [dBm]	Freq. [MHz]	Level [dBm]
136.000	709.951	-81.22	1733.580	-73.43
155.000	845.155	-80.44	1763.370	-73.50
174.000	844.961	-80.49	1928.460	-73.68

No emission above noise floor was found.

[Test condition]

Tested Date: 19 Dec. 2023 Temperature: 16 deg. C Humidity: 31 % Atmos. Press: 1022 hPa


This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Model: FT-3185R Page 14 of 19

[Chart]

Operating mode: Rx 136.000 MHz (Worst)

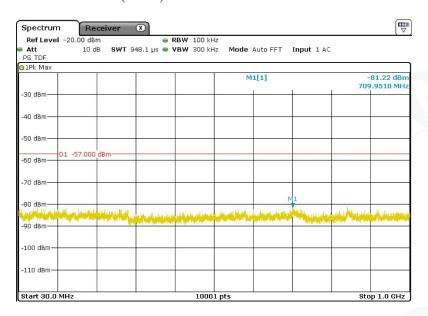

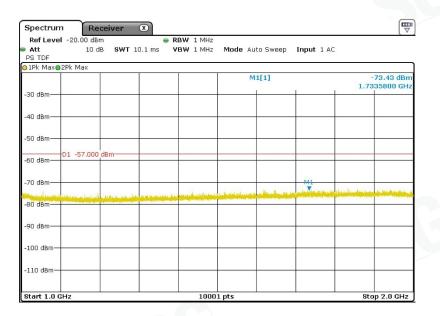

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 15 of 19

AC power line conducted emissions

Test setup

Test setup was implemented according to the method of ANSI C63.4 clause 6 "General requirements for EUT equipment arrangements and operation" and Annex H.1 "AC power line conducted emission measurements setup".

Test procedure

Measurement procedures were implemented according to the method of ANSI C63.4 clauses 7, clause 13.1.3 and Annex H.2 "AC power line conducted emission measurements".

Exploratory measurements were used the spectrum analyzer to identify the frequency of the emission that has the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable positions, and with a typical system equipment configuration and arrangement.

Final ac power line conducted emission measurements were performed based on the exploratory tests. The EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit are selected for the final measurement.

When the measurement value is greater than average limitation the average detection measurements were performed.

Applicable rule and limitation

§15.107 (b) AC power line conducted limits

Frequency of Emission	Conducted emissions Limit [dBµV]				
[MHz]	Quasi-peak	Average			
0.15 - 0.5	66 to 56 *	56 to 46 *			
0.5 - 5	56	46			
5 - 30	60	50			

^{*} Decreases with the logarithm of the frequency. The lower limit applies at the band edges.

Test equipment used (refer to List of utilized test equipment)

_	_	_	_

Test software used

EMI1 Ver. 6.1

Calculation method

The Correction Factor and Result are calculated as followings.

Correction Factor [dB] = ISN Factor [dB] + Loss [dB] Result $[dB\mu V]$ = Reading $[dB\mu V]$ + Correction Factor [dB]

Test results - This item was not tested.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 16 of 19

Test Data

[Emission level]

Operating mode: -

Freq. [MHz]	Reading QP [dBµV]	Reading Ave [dBµV]	Factor [dB]	Result QP [dBµV]	Result Ave [dBµV]	Limit QP [dBµV]	Limit Ave [dBµV]	Margin QP [dB]	Margin Ave [dB]	Line
										\

[Chart]

Operating mode: -

[Test condition]

Tested Date: Humidity: - % Temperature: - deg. C

- hPa Atmos. Press:

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Model: FT-3185R Page 19 of 19

List of utilized test equipment / calibration

RFT ID No.	Kind of Equipment and Precision	Manufacturer	Model No.	Serial Number	Calibration Date	Calibrated until
AC01 (EM)	Anechoic Chamber (Y1 test room)	JSE	203397C	-	2023/03/08	2024/03/31
AC01 (EG)	Anechoic Chamber (Y1 test room)	JSE	203397C	-	2023/03/30	2024/03/31
BA07	Bilogical Antenna	TESEQ	CBL6143A	26670	2023/03/15	2024/03/31
CL11	RF Cable for RE	RFT	_	-	2023/03/16	2024/03/31
CL31	RF Cable 1 m	Junkosha	MWX221	1303S118	2023/01/20	2024/01/31
CL38	RF Cable 2 m	Junkosha	MWX221	1603S626	2023/01/20	2024/01/31
CL39	RF Cable 5 m	SUHNER	SUCOFLEX126E	523222	2023/01/20	2024/01/31
DH06	DRG Horn Antenna	A.H. Systems	SAS-571	1339	2022/07/09	2024/07/31
PR12	Pre. Amplifier (1-26G)	Agilent Technologies	8449B	3008A02513	2023/01/23	2024/01/31
PR21	Pre. Amplifier	Anritsu	MH648A	6200467119	2023/03/16	2024/03/31
TR10	Test Receiver (F/W: 3.66)	Rohde & Schwarz	ESR26	101313	2023/05/18	2024/05/31

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

This document is issued by the Company subject to its General Conditions of Service accessible at https://www.sgs.com/en/Terms-and-Conditions.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Unless otherwise stated the results shown in this Test Report refer only for the tested sample(s). Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.