

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: MARINE TRANSCEIVER

FCC ID: K6630063X30

Applicant:

VERTEX STANDARD CO., LTD.
4-8-8 NAKAMEGURO, MEGURO-KU
TOKYO 153-8644
JAPAN

Date Receipt: AUGUST 5, 2004

Date Tested: AUGUST 16, 2004

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

TEST REPORT:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED RF POWER OUTPUT
PAGE 3.....	TECHNICAL DATA
PAGE 4.....	VOICE MODULATION CHARACTERISITICS AUDIO FREQUENCY RESPONSE
PAGE 5.....	AUDIO LOW PASS FILTER
PAGE 6.....	MODULATION LIMITING
PAGE 7.....	OCCUPIED BANDWIDTH
PAGE 8.....	OCCUPIED BANDWIDTH PLOT
PAGE 9.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 10.....	METHOD OF MEASURING CONDUCTED SPURIOUS EMISS
PAGE 11.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 12.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 13.....	FREQUENCY STABILITY
PAGE 14.....	MPE CALCULATION
PAGE 15.....	LIST OF TEST EQUIPMENT

EXHIBITS INCLUDING:

BLOCK DIAGRAM
SCHEMATIC
PARTS LIST
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TUNING PROCEDURE
TEST SET UP PHOTOGRAPHS

APPLICANT: VERTEX STANDARD STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TABLE OF CONTENTS

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

GENERAL INFORMATION

2.1033(c) VERTEX STANDARD CO., LTD. will sell the FCC ID: K6630063X30 VHF Marine transmitter in quantity, for use under FCC RULES PART 80.

2.1033(c) TECHNICAL DESCRIPTION

(4) Type of Emission: 16K0F3E/16K0G3E

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 4.3 \text{ KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(4.3K)(1) = 6.0K + 8.6 = 14.6K$$

80.205 (a) ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

2.1033(c)(6) Frequency Range: 156.025 - 157.425 MHz

2.1033(c)(7) Power Range and Controls: There is a user Power switch for High/Low Power.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:

POWER INPUT

FINAL AMPLIFIER ONLY

High

$$V_{ce} = 13.8 \text{ Volts}$$

$$I_{ce} = 4.36 \text{ A.}$$

$$P_{in} = 60.17 \text{ Watts}$$

Low

$$V_{ce} = 13.8 \text{ VDC}$$

$$I_{ce} = 0.95 \text{ A.}$$

$$P_{in} = 13.11 \text{ Watts}$$

Function of each electron tube or semiconductor device or other active circuit device is included in the parts list exhibit.

2.1033(c)(9) Complete Circuit Diagrams: The circuit diagrams and block diagrams are included.

2.1033(c)(10) Instruction book. The instruction manual is included.

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1033(c)(11) Tune-up procedure. The tune-up procedure is included.

Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description

2.1033(c)(11) Digital modulation. This unit does NOT use digital modulation.

The data required by 2.1046 through 2.1055 is submitted below.

2.1046(a)
80.215 (e)(1)

RF power output.


RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER: HIGH: 25 W CONDUCTED
LOW: 1 W CONDUCTED

80.911 (d)(5) For primary supply voltages, measured in accordance with the procedures in this paragraph, greater than 11.5 volts, but less than 12.6 volts, the required transmitter output power shall be equal or greater than the value calculated below

$$P = 4.375(v) - 35.313 \text{ (For 12V this equals 17.2W)}$$

METHOD OF MEASURING RF POWER OUTPUT

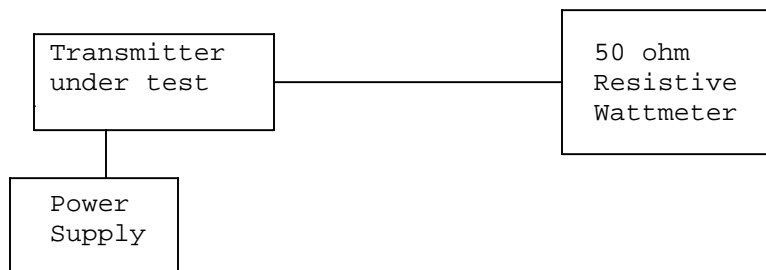

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TECHNICAL DATA:

- 80.203 (b) **External Controls:** The transmitter is capable of changing frequency between 156.05 - 157.425 MHz by external control. The available channels are shown in the User Manual description Channel List. These channels are preprogrammed by the manufacturer and change of frequency is inaccessible to the station operator.
- 80.203 (c) Five minutes continuous transmission test. The antenna was connected to a dummy load and the radio was locked in a transmit PTT mode. An external timer digital clock was used to observe the duration of the un-modulated transmission. The transmitter turned off and the radio went to receive mode at 4 minutes, 58 seconds as displayed by the external digital clock.
- 80.203 (n) This radio complies with the requirement for DSC capability in the 156.025-157.425 MHz band and in accordance with 80.225.
- 80.873; 80.956 Transmitter G3E emission capability: The transmitter was connected to 50 ohm resistive wattmeter and the frequency was set to 156.300 and to 156.800 MHz. With normal modulation, the output power displayed was 25 Watts at the high power setting and 1 watt at low power setting, consistent with previous measurements.
- The transmitter has been demonstrated to be capable, with normal operating voltages applied, of delivering 25 watts of carrier power into a 50 ohm resistive load over the specified frequencies.
- 80.911 (a) 80.956 G3E Transmissions: This radio is capable of G3E emission on 156.300 and 156.800 MHz
- 80.911 (c) With 13.6 VDC applied and with the radio connected to a 50 ohm resistive wattmeter, the output power was measured at 156.300 and 156.800 MHz with a measured reading of 25 Watts under normal speech modulation.
- 80.911 (d)(2) 80.959 With the power supply set to 13.6 VDC, and the output of the transmitter terminated in a 50 ohm matching artificial load, the transmitter output power was monitored over a 10 minute continuous operational period while in full power. The output power varied from the nominal 25 Watts output power to 24.8 Watts output power

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(a) Voice Modulation characteristics:

(b) AUDIO FREQUENCY RESPONSE
See the following plot.

Audio Frequency Response Plot

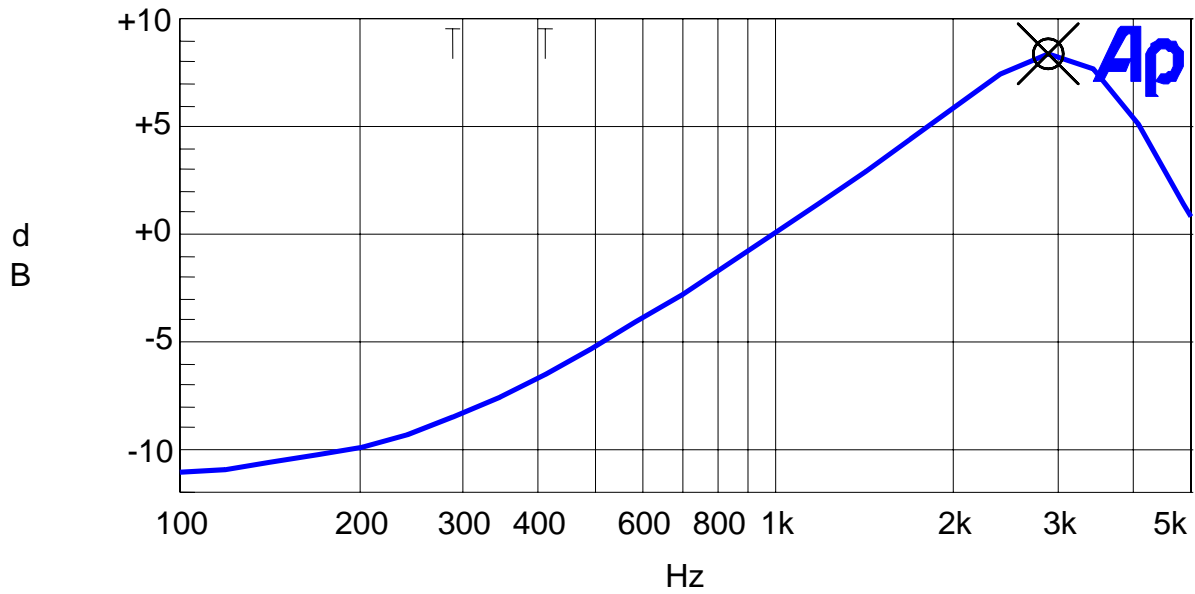

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(a) AUDIO LOW PASS FILTER
80.213 (e) The audio low pass filter shown in the following
plot.

NAME OF TEST: Audio Low Pass Filter (Voice Input)

STATE: 0 : General

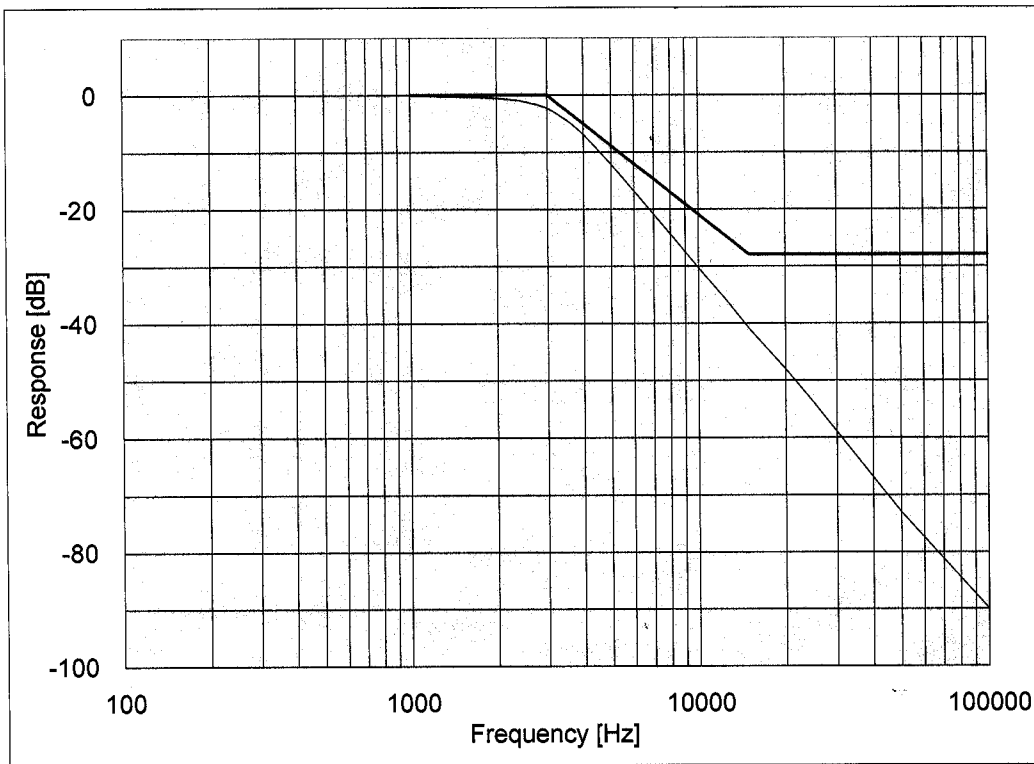

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.


849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(b)
80.213 (d)

Audio input versus modulation

A plot of the audio input versus deviation is shown in the following plots.

Modulation Limiting Plots:
2.5 KHz (Green), 1.0 KHz (Blue), and 300 Hz (Yellow)

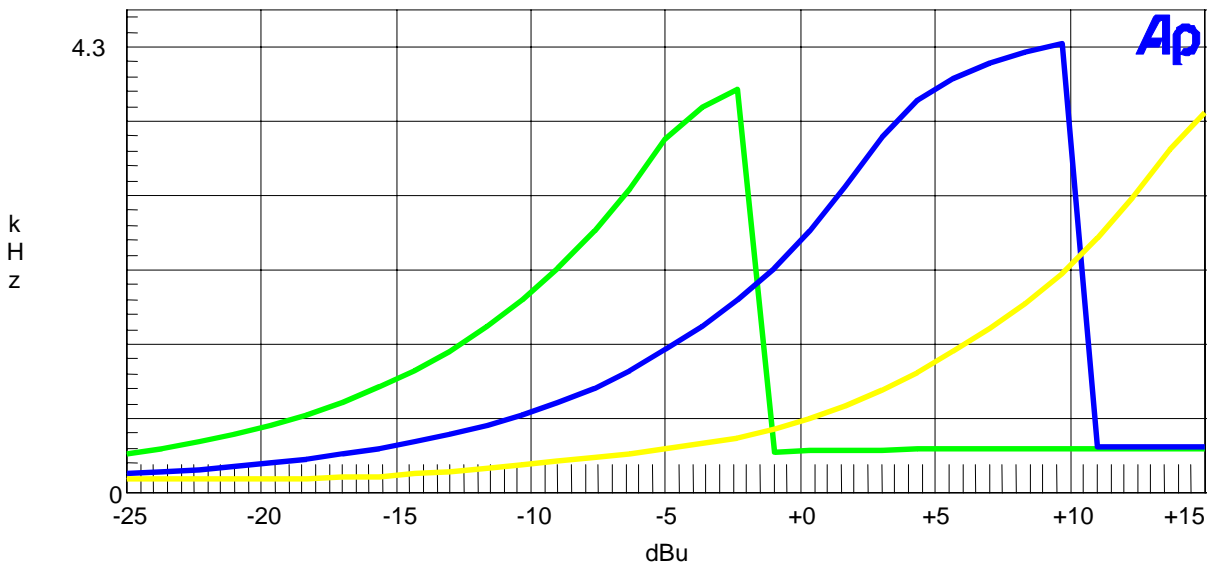

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1049(c) **Occupied bandwidth:**

80.213 (f)


Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least $43 + \log(P)$ dB. The occupied bandwidth plot is shown on the following page.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11, with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

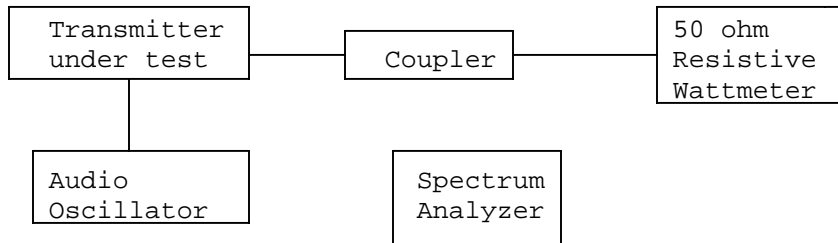

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
 http://www.timcoengr.com
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH PLOT

NOTES:

VERTEX STANDARD USA, INC. - FCC ID: K6630063X30
 OCCUPIED BANDWIDTH PLOT

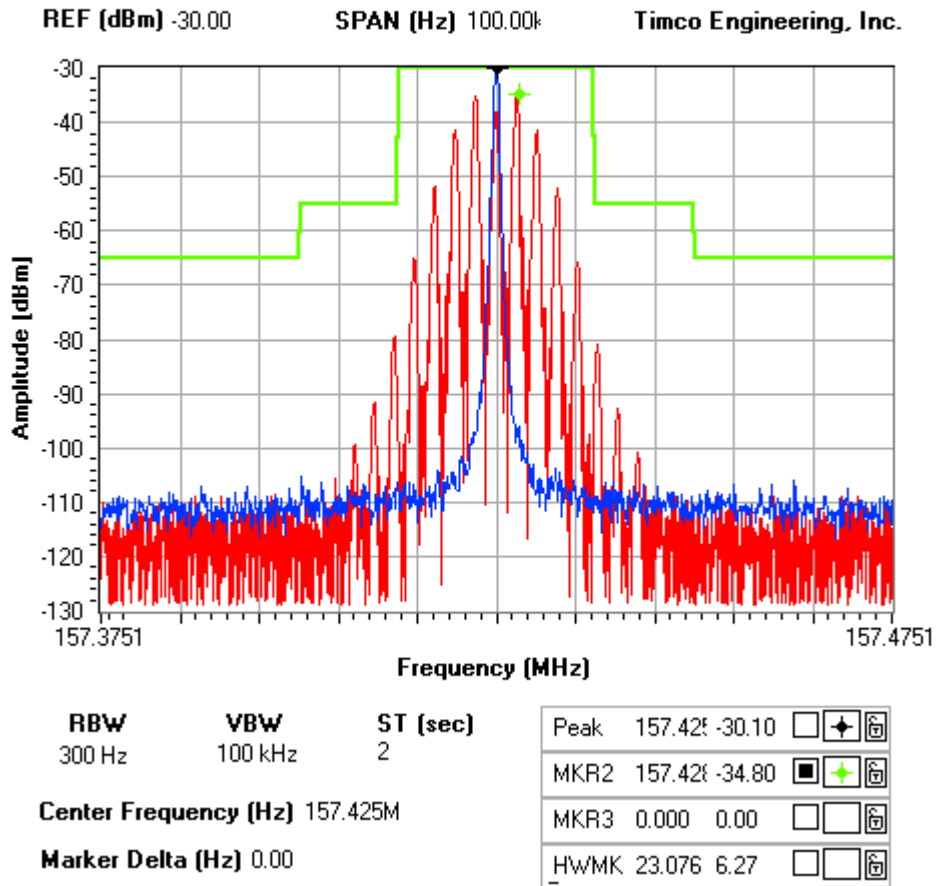

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
 Newberry, Florida 32669
<http://www.timcoengr.com>
 888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1051
 80.211 (f)

Spurious emissions at antenna terminals(conducted):

The data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS:

Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

HIGH: $43 + 10\log(25) = 57$
LOW: $43 + 10\log(1) = 43$

TF HIGH POWER	EF	dB below carrier	TF LOW POWER	EF	dB below carrier
156.8	156.8	0.0	156.8	156.8	0.0
	313.6	92.6		313.6	92.3
	470.4	71.6		470.4	101.3
	627.2	110.5		627.2	104.0
	784.0	92.9		784.0	106.0
	940.8	110.4		940.8	105.4
	1097.6	101.9		1097.6	136.5
	1254.4	93.1		1254.4	95.5
	1411.2	85.3		1411.2	92.5
	1568.0	88.4		1568.0	136.5

TF HIGH POWER	EF	dB below carrier	TF LOW POWER	EF	dB below carrier
157.425	157.425	0.0	157.425	157.425	0.0
	314.85	90.4		314.85	91.5
	472.275	69.3		472.275	105.7
	629.7	108.0		629.7	104.0
	787.125	93.6		787.125	110.2
	944.55	108.5		944.55	110.7
	1101.975	101.2		1101.975	105.0
	1259.4	91.7		1259.4	98.7
	1416.825	82.4		1416.825	92.8
	1574.25	88.0		1574.25	135.3

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Conducted Spurious Emissions



METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400kHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 STATE ROAD 45, NEWBERRY FLORIDA 32669.

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1053(a)

Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS (156.8 MHz)

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

HIGH: $43 + 10\log(25) = 57$

LOW: $43 + 10\log(1) = 43$

TEST DATA (HIGH):

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
156.80	0	42.03	0	-0.23	0
313.60	H	-35.80	0	-1.25	78.85
470.40	H	-41.70	0	-0.53	84.03
627.20	V	-43.10	0	-0.24	85.14
784.00	V	-52.20	0	-1.09	95.09
940.80	V	-39.10	0	-1.03	81.93
1097.60	V	-49.30	1.02	3.34	88.78
1254.40	V	-37.60	1.05	3.97	76.48
1411.20	H	-46.60	1.08	4.59	84.89
1568.00	H	-43.30	1.11	4.99	81.22

TEST DATA (LOW):

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
156.80	0	28.03	0	-0.23	0
313.60	H	-29.00	0	-1.25	58.05
470.40	H	-43.10	0	-0.53	71.43
627.20	H	-41.80	0	-0.24	69.84
784.00	H	-49.00	0	-1.09	77.89
940.80	H	-51.00	0	-1.03	79.83
1097.60	V	-55.50	1.02	3.34	80.98
1254.40	V	-37.00	1.05	3.97	61.88
1411.20	H	-50.30	1.08	4.59	74.59
1568.00	H	-49.80	1.11	4.99	73.72

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1053(a)

Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS (157.43 MHz)

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

HIGH: $43 + 10\log(25) = 57$

LOW: $43 + 10\log(1) = 43$

TEST DATA (HIGH):

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
157.43	0	42.00	0	-0.2	0
314.85	H	-35.50	0	-1.25	78.55
472.28	V	-40.60	0	-0.54	82.94
629.70	H	-44.40	0	-0.23	86.43
787.13	V	-49.00	0	-1.14	91.94
944.55	H	-45.80	0	-1.08	88.68
1101.98	V	-50.50	1.02	3.36	89.96
1259.40	V	-31.10	1.05	3.99	69.96
1416.83	V	-36.20	1.08	4.62	74.46
1574.25	H	-41.60	1.11	4.99	79.52

TEST DATA (LOW):

Emission Frequency MHz	Ant. Polarity	Corrected EUT Signal Reading	Coax Loss (dB)	Substitution Antenna (dBd)	dB Below Carrier (dBc)
157.43	0	28.00	0	-0.2	0
314.85	H	-36.00	0	-1.25	65.05
472.28	H	-42.70	0	-0.54	71.04
629.70	H	-43.20	0	-0.23	71.23
787.13	H	-49.70	0	-1.14	78.64
944.55	V	-50.70	0	-1.08	79.58
1101.98	H	-49.00	1.02	3.36	74.46
1259.40	V	-46.00	1.05	3.99	70.86
1416.83	H	-50.30	1.08	4.62	74.56
1574.25	V	-50.60	1.11	4.99	74.52

APPLICANT: VERTEX STANDARD CO., LTD.


FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Radiated Spurious Emissions

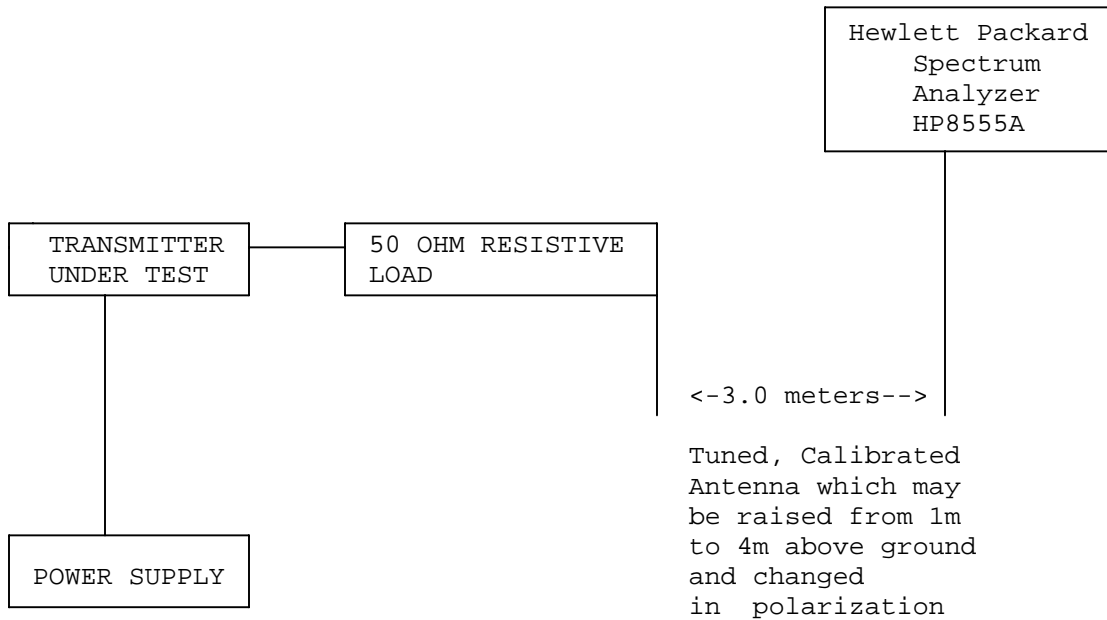

Equipment placed 80 cm above ground on a rotatable platform.

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Frequency stability:

2.1055(a)(2)
80.209 (a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0010%, 10.0ppm specification limit, for 20kHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 sec intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50° C.

Readings were also taken at minus 15% of the battery voltage of 13.8 V, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 156.800 129 MHz

<u>TEMPERATURE C</u>	<u>FREQUENCY MHz</u>	<u>PPM</u>
REFERENCE	156.800 129	00.0
-30	156.800 131	+ 0.01
-20	156.799 991	- 0.88
-10	156.800 147	+ 0.11
0	156.800 257	+ 0.82
+10	156.800 235	+ 0.67
+20	156.800 129	0.00
+30	156.800 029	- 0.64
+40	156.800 022	+ 0.68
+50	156.800 184	+ 0.35

	<u>VOLTS</u>	<u>Batt. Data</u>	<u>Batt. PPM</u>
-15%	11.73	156.800 124	- 0.03

RESULTS OF MEASUREMENTS: The test results indicates that the EUT meets the requirements.

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
http://www.timcoengr.com
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
3/10-Meter OATS	TEI	N/A	N/A	Listed 3/27/04	3/26/07
3-Meter OATS	TEI	N/A	N/A	Listed 1/13/03	1/12/06
Audio Generator	B&K	3010	8739686	CHAR 12/1/02	12/1/04
Audio Oscillator	Precision	653A	832-00260	CHAR 12/1/02	12/1/04
Biconnical Antenna	Eaton	94455-1	1057	CAL 3/18/03	3/18/05
Biconnical Antenna	Eaton	94455-1	1096	CAL 10/1/01	10/1/03
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/26/01	4/26/03
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/15/03	4/15/05
Blue Tower RF	HP	85685A	2620A00294	CAL 4/27/04	4/27/06
Preselector					
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/15/03	4/15/05
Frequency Counter	HP	5352B	2632A00165	CAL 11/28/01	11/28/03
Frequency Counter	HP	5382A	1620A03535	CHAR 3/2/01	Out of Service
Frequency Counter	HP	5385A	2730A03025	CAL 3/7/03	3/7/05
Frequency Counter	HP	5385A	3242A07460	CAL 3/7/03	3/7/05
LISN	Electro-Metrics	ANS-25/2	2604	CAL 10/9/01	10/9/03
LISN	Electro-Metrics	EM-7820	2682	CAL 3/12/03	3/12/05
Log-Periodic Antenna	Eaton	96005	1243	CAL 5/8/03	5/8/05

APPLICANT: VERTEX STANDARD CO., LTD.

FCC ID: K6630063X30

REPORT #: V\VERTEX USA_\1248AUT4\1248AUT4TestReport.doc