

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

VERTEX STANDARD CO., LTD.
4-8-8, Nakameguro, Meguro-Ku
Tokyo 153-8644
Japan

Rule Part(s):	FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)
Test Procedure(s):	FCC OET Bulletin 65, Supplement C (Edition 01-01)
Device Type:	Portable FM VHF PTT Radio Transceiver
FCC IDENTIFIER:	K6630083220
Model(s):	HX-370S
Modulation:	FM (VHF)
Tx Frequency Range:	137 - 174 MHz
Max. RF Output Power Tested:	5.11 Watts Conducted (137 MHz) 5.20 Watts Conducted (156 MHz) 5.21 Watts Conducted (174 MHz)
Antenna Type(s) Tested:	Whip 137-174 MHz (CAT-460) Whip 137 MHz (ATV-8A) Whip 156 MHz (ATV-8B) Whip 174 MHz (ATV-8C)
Battery Type(s) Tested:	NiCd 7.2 V, 1100 mAh (P/N: FNB-V57IS) NiMH 7.2 V, 1400 mAh (P/N: FNB-83) Alkaline 1.5 V AA x6 (Battery Case P/N: FBA-25) (1. Duracell Procell 2850 mAh, 2. Energizer E91 2850 mAh)
Body-Worn Accessories:	Plastic Swivel Belt-Clip (P/N: CMP-14) Speaker-Microphone (P/N: CMP-460) Microphone (P/N: MH-57) VOX Microphone (P/N: VC-27) VOX Headset (P/N: VC-24)
Maximum SAR Levels:	1.05 W/kg - Face-Held (50% Duty Cycle) 0.703 W/kg - Body-Worn (50% Duty Cycle)

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the Occupational / Controlled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.



Russell W. Pipe
Senior Compliance Technologist
Celltech Labs Inc.



TABLE OF CONTENTS		
1.0	INTRODUCTION.....	3
2.0	DESCRIPTION OF DUT.....	3
3.0	SAR MEASUREMENT SYSTEM.....	4
4.0	MEASUREMENT SUMMARY.....	5-7
5.0	DETAILS OF SAR EVALUATION.....	8
6.0	EVALUATION PROCEDURES.....	8
7.0	SYSTEM PERFORMANCE CHECK.....	9
8.0	SIMULATED EQUIVALENT TISSUES.....	10
9.0	SAR SAFETY LIMITS.....	10
10.0	ROBOT SYSTEM SPECIFICATIONS.....	11
11.0	PROBE SPECIFICATION.....	12
12.0	PLANAR PHANTOM.....	12
13.0	VALIDATION PHANTOM.....	12
14.0	DEVICE HOLDER.....	12
15.0	TEST EQUIPMENT LIST.....	13
16.0	MEASUREMENT UNCERTAINTIES.....	14-15
17.0	REFERENCES.....	16
	APPENDIX A - SAR MEASUREMENT DATA.....	17
	APPENDIX B - SYSTEM PERFORMANCE CHECK DATA.....	18
	APPENDIX C - SYSTEM VALIDATION PROCEDURES.....	19
	APPENDIX D - PROBE CALIBRATION.....	20
	APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS.....	21
	APPENDIX F - SAR TEST SETUP & DUT PHOTOGRAPHS.....	22

1.0 INTRODUCTION

This measurement report demonstrates that the Vertex Standard Co., Ltd. Model: HX-370S Portable FM VHF PTT Radio Transceiver FCC ID: K6630083220 complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 1 (Provisional) (see reference [4]) were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

FCC Rule Part(s)	FCC 47 CFR §2.1093			
IC Rule Part(s)	RSS-102 Issue 1 (Provisional)			
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (01-01)			
Device Type	Portable FM VHF PTT Radio Transceiver			
FCC IDENTIFIER	K6630083220			
Model No.(s)	HX-370S			
Serial No.(s)	4D000001 (Identical Prototype)			
Modulation	FM (VHF)			
Tx Frequency Range	137 - 174 MHz			
Max. RF Output Power Tested	5.11 Watts	Conducted	137.0 MHz	
	5.20 Watts	Conducted	156.0 MHz	
	5.21 Watts	Conducted	174.0 MHz	
Battery Type(s) Tested	NiCd	7.2V, 1100mAh		
	NiMH	7.2V, 1400mAh		
	Alkaline	1.5 V AA (x6)	Duracell 2850 mAh	Battery Case P/N: FBA-25
Energizer 2850 mAh				
Antenna Type(s) Tested	Whip	137-174 MHz	148 mm	P/N: CAT-460
	Whip	137 MHz	219 mm	P/N: ATV-8A
	Whip	156 MHz	165 mm	P/N: ATV-8B
	Whip	174 MHz	163 mm	P/N: ATV-8C
Body-worn Accessories Tested	Plastic Swivel Belt-Clip (P/N: CMP-14)			
	Speaker-Microphone (P/N: CMP-460)			
	Microphone (P/N: MH-57)			
	VOX Microphone (P/N: VC-27)			
	VOX Headset (P/N: VC-24)			

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with validation phantom



DASY4 SAR Measurement System with Plexiglas planar phantom

4.0 MEASUREMENT SUMMARY

FACE-HELD SAR EVALUATION RESULTS

Freq (MHz)	Chan.	Test Mode	Conducted Power Before Test (Watts)	Battery Type	Antenna Part No.	Separation Distance to Planar Phantom (cm)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg)			
							Duty Cycle			Duty Cycle			
							100%	50%		100%	50%		
156	Mid	CW	5.08	NiMH	CAT-460	2.5	0.557	0.279	-0.145	0.576	0.288		
156	Mid	CW	5.05	NiCd	CAT-460	2.5	0.593	0.297	-0.150	0.614	0.307		
156	Mid	CW	4.95	Duracell Alkaline	CAT-460	2.5	0.499	0.250	-0.143	0.516	0.258		
156	Mid	CW	5.09	NiMH	ATV-8B	2.5	0.987	0.494	0.0879	0.987	0.494		
156	Mid	CW	5.06	NiCd	ATV-8B	2.5	0.990	0.495	-0.119	1.02	0.509		
156	Mid	CW	4.95	Duracell Alkaline	ATV-8B	2.5	0.938	0.469	-0.519	1.06	0.529		
137	Low	CW	5.11	Duracell Alkaline	ATV-8A	2.5	1.41	0.705	-0.105	1.44	0.722		
174	High	CW	5.13	Duracell Alkaline	ATV-8C	2.5	1.60	0.800	-0.0346	1.61	0.806		
174	High	CW	5.01	Energizer Alkaline	ATV-8C	2.5	P	1.71	0.855	-0.904	P	2.11	1.05
			5.10				S	1.49	0.745	-0.747	S	1.77	0.885

**ANSI / IEEE C95.1 1992 - SAFETY LIMIT
BRAIN: 8.0 W/kg (averaged over 1 gram)
Spatial Peak - Controlled Exposure / Occupational**

Test Date	03/30/04		Ambient Temperature	24.7 °C
Measured Fluid Type	150 MHz Brain		Fluid Temperature	21.7 °C
Dielectric Constant ϵ_r	IEEE Target	Measured	Fluid Depth	≥ 15 cm
	52.3 (± 5%)	52.7	Relative Humidity	31%
Conductivity σ (mho/m)	IEEE Target	Measured	Atmospheric Pressure	101.8 kPa
	0.76 (± 5%)	0.72	ρ (Kg/m³)	1000

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the SAR measurements performed at the mid channel were ≥ 3dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
- Secondary hotspots were evaluated to report SAR levels within 3 dB of the primary (P = Primary, S = Secondary).
- The DUT was evaluated for SAR with Duracell Procell alkaline batteries. To report a SAR comparison between alternate alkaline battery types, an additional evaluation was performed for the highest Duracell Procell alkaline battery SAR level configuration (face-held, high channel, ATV-8C antenna) using Energizer E91 batteries (see above table).
- Power drifts measured by the DASY system were added to the measured SAR levels to report scaled SAR results as shown in the above table.
- A SAR versus time power drift evaluation was performed for the duration of the area scan measurement in the test configuration that reported the highest scaled SAR level (face-held, Energizer E91 alkaline battery, high channel, ATV-8C antenna). See Appendix A (SAR Test Plots) for SAR versus Time drift evaluation plot.
- The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Conducted Power Before Test (Watts)	Antenna Part No.	Battery Type	Body-worn Accessory	Separation Distance to Planar Phantom (cm)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg)	
								Duty Cycle			Duty Cycle	
								100%	50%		100%	50%
156	Mid	CW	5.14	ATV-8B	NiMH	Belt-Clip Speaker-Mic	2.5	0.263	0.132	-0.0913	0.269	0.134
156	Mid	CW	5.10	ATV-8B	NiCd	Belt-Clip Speaker-Mic	2.5	0.251	0.126	-0.108	0.257	0.129
156	Mid	CW	5.02	ATV-8B	Duracell Alkaline	Belt-Clip Speaker-Mic	2.5	0.254	0.127	-0.349	0.275	0.138
156	Mid	CW	5.11	ATV-8B	NiMH	Belt-Clip Microphone	2.5	0.301	0.151	-0.297	0.322	0.161
156	Mid	CW	5.08	ATV-8B	NiCd	Belt-Clip Microphone	2.5	0.304	0.152	-0.100	0.311	0.156
156	Mid	CW	5.06	ATV-8B	Duracell Alkaline	Belt-Clip Microphone	2.5	0.296	0.148	-0.173	0.308	0.154
156	Mid	CW	5.15	ATV-8B	NiMH	Belt-Clip VOX Headset	2.5	0.273	0.137	-0.275	0.291	0.145
156	Mid	CW	5.08	ATV-8B	NiCd	Belt-Clip VOX Headset	2.5	0.292	0.146	-0.329	0.315	0.157
156	Mid	CW	5.05	ATV-8B	Duracell Alkaline	Belt-Clip VOX Headset	2.5	0.387	0.194	-0.314	0.416	0.208
156	Mid	CW	5.20	ATV-8B	NiMH	Belt-Clip VOX Mic.	2.5	0.301	0.151	0.106	0.301	0.151
156	Mid	CW	5.12	ATV-8B	NiCd	Belt-Clip VOX Mic.	2.5	0.254	0.127	0.272	0.254	0.127
156	Mid	CW	5.10	ATV-8B	Duracell Alkaline	Belt-Clip VOX Mic.	2.5	0.243	0.122	-0.166	0.252	0.126
174	High	CW	5.21	ATV-8C	NiMH	Belt-Clip Microphone	2.5	0.398	0.199	-0.466	0.443	0.222
174	High	CW	5.16	ATV-8C	NiCd	Belt-Clip VOX Headset	2.5	0.329	0.165	-0.248	0.348	0.174
174	High	CW	5.08	ATV-8C	Duracell Alkaline	Belt-Clip VOX Headset	2.5	0.332	0.166	-0.0945	0.339	0.170
137	Low	CW	5.01	ATV-8A	NiMH	Belt-Clip Microphone	2.5	0.822	0.411	-0.128	0.847	0.423
137	Low	CW	5.00	ATV-8A	NiCd	Belt-Clip VOX Headset	2.5	1.09	0.545	-0.0565	1.10	0.552
137	Low	CW	4.99	ATV-8A	Duracell Alkaline	Belt-Clip VOX Headset	2.5	0.270	0.135	-0.0825	0.275	0.138

ANSI / IEEE C95.1 1992 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date	04/03/04		Ambient Temperature	23.4 °C
Measured Fluid Type	150 MHz Body		Fluid Temperature	21.5 °C
Dielectric Constant ϵ_r	IEEE Target	Measured	Fluid Depth	≥ 15 cm
	61.9 (± 5%)	60.7	Relative Humidity	31%
Conductivity σ (mho/m)	IEEE Target	Measured	Atmospheric Pressure	101.3 kPa
	0.80 (± 5%)	0.79	ρ (Kg/m³)	1000

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the SAR measurements performed at the mid channel were ≥ 3dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
- Power drifts measured by the DASY system were added to the measured SAR levels to report scaled SAR results as shown in the above table.
- The SAR evaluations were performed within 24 hours of the system performance check.

MEASUREMENT SUMMARY (Cont.)

BODY-WORN SAR EVALUATION RESULTS

Freq. (MHz)	Chan.	Test Mode	Conducted Power Before Test (Watts)	Antenna Part No.	Battery Type	Body-worn Accessory	Separation Distance to Planar Phantom (cm)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg)			
								Duty Cycle			Duty Cycle			
								100%	50%		100%	50%		
156	Mid	CW	5.06	CAT-460	NiMH	Belt-Clip Speaker-Mic	2.5	1.03	0.515	-0.0412	1.04	0.520		
156	Mid	CW	5.09	CAT-460	NiCd	Belt-Clip Speaker-Mic	2.5	0.998	0.499	-0.0383	1.01	0.503		
156	Mid	CW	5.03	CAT-460	Duracell Alkaline	Belt-Clip Speaker-Mic	2.5	P	0.965	0.483	-0.0929	P	0.986	0.493
			S					0.511	0.256	-0.762	S	0.609	0.305	
156	Mid	CW	5.10	CAT-460	NiMH	Belt-Clip Microphone	2.5	1.20	0.600	-0.0460	1.21	0.606		
156	Mid	CW	5.10	CAT-460	NiCd	Belt-Clip Microphone	2.5	1.10	0.550	-0.300	1.18	0.589		
156	Mid	CW	5.04	CAT-460	Duracell Alkaline	Belt-Clip Microphone	2.5	1.17	0.585	-0.239	1.24	0.618		
156	Mid	CW	5.09	CAT-460	NiMH	Belt-Clip VOX Headset	2.5	1.19	0.595	-0.241	1.26	0.629		
156	Mid	CW	5.09	CAT-460	NiCd	Belt-Clip VOX Headset	2.5	1.31	0.655	-0.310	1.41	0.703		
156	Mid	CW	5.05	CAT-460	Duracell	Belt-Clip VOX Headset	2.5	1.16	0.580	-0.256	1.23	0.615		
156	Mid	CW	5.06	CAT-460	NiMH	Belt-Clip VOX Mic.	2.5	P	0.592	0.296	0.0979	P	0.592	0.296
			S					0.513	0.257	0.345	S	0.513	0.257	
156	Mid	CW	5.07	CAT-460	NiCd	Belt-Clip VOX Mic.	2.5	P	0.505	0.253	0.0460	P	0.505	0.253
			S					0.316	0.158	0.202	S	0.316	0.158	
156	Mid	CW	5.07	CAT-460	Duracell Alkaline	Belt-Clip VOX Mic.	2.5	P	0.314	0.157	-0.183	P	0.328	0.164
			S					0.327	0.164	0.218	S	0.327	0.164	

ANSI / IEEE C95.1 1992 - SAFETY LIMIT
Spatial Peak - Controlled Exposure / Occupational
BODY: 8.0 W/kg (averaged over 1 gram)

Test Date	04/04/04		Ambient Temperature	23.9 °C
Measured Fluid Type	150 MHz Body		Fluid Temperature	22.7 °C
Dielectric Constant ϵ_r	IEEE Target	Measured	Fluid Depth	≥ 15 cm
	61.9 (± 5%)	60.7	Relative Humidity	31%
Conductivity σ (mho/m)	IEEE Target	Measured	Atmospheric Pressure	101.3 kPa
	0.80 (± 5%)	0.79	ρ (Kg/m³)	1000

Note(s):

- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the SAR measurements performed at the mid channel were ≥ 3dB below the SAR limit, SAR evaluation for the low and high channels was optional per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]).
- Secondary hotspots were evaluated to report SAR levels within 3 dB of the primary (P = Primary, S = Secondary).
- Power drifts measured by the DASY system were added to the measured SAR levels to report scaled SAR results as shown in the above table.
- The SAR evaluations were performed within 24 hours of the system performance check.

5.0 DETAILS OF SAR EVALUATION

The Vertex Standard Co., Ltd. Model: HX-370S Portable FM VHF PTT Radio Transceiver FCC ID: K6630083220 was found to be compliant for localized Specific Absorption Rate (Occupational / Controlled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix F.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front side of the DUT and the outer surface of the planar phantom for the duration of the tests.
2. The DUT was evaluated in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached plastic swivel belt-clip was touching the planar phantom and provided a 2.5 cm separation distance between the back of the DUT and the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with Speaker-Microphone, Microphone, VOX Headset, and VOX Microphone accessories.
3. The conducted power levels were measured before each test using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
4. The power drifts measured by the DASY system during the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the test data tables (pages 5-7).
5. A SAR versus time power drift evaluation was performed for the duration of the area scan measurement in the test configuration that reported the highest scaled SAR level (face-held, Energizer E91 alkaline battery, high channel, ATV-8C antenna). The SAR versus time power drift evaluation plot is shown in Appendix A (SAR Test Plots).
6. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down to room temperature and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
7. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
8. The SAR evaluations were performed using a Plexiglas planar phantom.
9. A stack of low-density, low-loss dielectric foamed polystyrene was used in place of the device holder.
10. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures listed were consistent for all measurement periods.
11. The dielectric parameters of the simulated tissue mixtures were measured prior to the evaluation using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).

6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
(ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix D). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed using a Plexiglas planar phantom with a 300MHz dipole (see Appendix C for system validation procedure). The dielectric parameters of the simulated brain tissue mixture were measured prior to the system performance check using an 85070C Dielectric Probe Kit and an 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters). A forward power of 250mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plots).

SYSTEM PERFORMANCE CHECK													
Test Date	300MHz Equiv. Tissue	SAR 1g (W/kg)		Dielectric Constant ϵ_r		Conductivity σ (mho/m)		ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Measured	IEEE Target	Measured	IEEE Target	Measured						
03/30/04	Brain	0.750 $\pm 10\%$	0.772 (+2.9%)	45.3 $\pm 5\%$	45.1	0.87 $\pm 5\%$	0.85	1000	21.8	20.7	≥ 15	31	101.9
04/03/04	Brain	0.750 $\pm 10\%$	0.762 (+1.6%)	45.3 $\pm 5\%$	45.9	0.87 $\pm 5\%$	0.87	1000	21.8	21.2	≥ 15	32	101.2

Note(s):

1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance checks. The temperatures listed in the table above were consistent for all measurement periods.
2. The SAR evaluations were performed within 24 hours of the system performance checks.

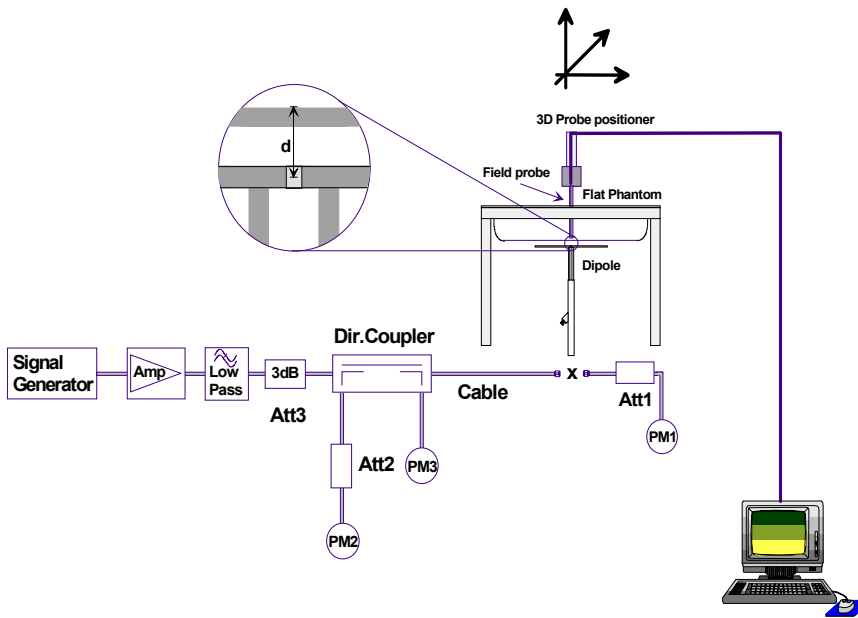


Figure 1. System Performance Check Setup Diagram



300 MHz Dipole Setup

8.0 SIMULATED EQUIVALENT TISSUES

The simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES			
INGREDIENT	300 MHz Brain (%) (System Check)	150 MHz Brain (%) (DUT Evaluation)	150 MHz Body (%) (DUT Evaluation)
Water	37.56	38.35	46.6
Sugar	55.32	55.5	49.7
Salt	5.95	5.15	2.6
HEC	0.98	0.9	1.0
Bactericide	0.19	0.1	0.1

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
 Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1590
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Evaluation Phantom

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm \pm 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450 MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm \pm 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

11.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Surface Detection:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone



ET3DV6 E-Field Probe

12.0 PLANAR PHANTOM

The planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld and body-worn radio transceivers. The planar phantom is mounted on the side of the DASY4 compact system table.



Plexiglas Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.



Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT	SERIAL NO.	CALIBRATION DATE
Schmid & Partner DASY4 System	-	-
DASY4 Measurement Server	1078	N/A
-Robot	599396-01	N/A
-ET3DV6 E-Field Probe	1590	May 2003
-300MHz Validation Dipole	135	Oct 2003
-450MHz Validation Dipole	136	Nov 2003
-900MHz Validation Dipole	054	June 2003
-1800MHz Validation Dipole	247	June 2003
-2450MHz Validation Dipole	150	Sept 2003
-Plexiglas Planar Phantom	161	N/A
-Validation Planar Phantom	137	N/A
HP 85070C Dielectric Probe Kit	N/A	N/A
Gigatronics 8651A Power Meter	8650137	April 2004
Gigatronics 8652A Power Meter	1835267	April 2004
Power Sensor 80701A	1833542	April 2004
Power Sensor 80701A	1834350	April 2004
HP E4408B Spectrum Analyzer	US39240170	Dec 2003
HP 8594E Spectrum Analyzer	3543A02721	April 2004
HP 8753E Network Analyzer	US38433013	May 2003
HP 8648D Signal Generator	3847A00611	May 2003
Amplifier Research 5S1G4 Power Amplifier	26235	N/A

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C _i 1g	Standard Uncertainty ±% (1g)	v _i or v _{eff}
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1-C _p)	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(C _p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	Normal	√3	1	± 6.7	12
Device holder uncertainty	± 5.0	Normal	√3	1	± 5.9	8
Power drift	± 5.0	Rectangular	√3		± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.3	
Expanded Uncertainty (k=2)					± 26.6	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

MEASUREMENT UNCERTAINTIES (Cont.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	C _i 1g	Standard Uncertainty ±% (1g)	v _i or v _{eff}
Measurement System						
Probe calibration	± 4.8	Normal	1	1	± 4.8	∞
Axial isotropy of the probe	± 4.7	Rectangular	√3	(1-C _p)	± 1.9	∞
Spherical isotropy of the probe	± 9.6	Rectangular	√3	(C _p)	± 3.9	∞
Spatial resolution	± 0.0	Rectangular	√3	1	± 0.0	∞
Boundary effects	± 5.5	Rectangular	√3	1	± 3.2	∞
Probe linearity	± 4.7	Rectangular	√3	1	± 2.7	∞
Detection limit	± 1.0	Rectangular	√3	1	± 0.6	∞
Readout electronics	± 1.0	Normal	1	1	± 1.0	∞
Response time	± 0.8	Rectangular	√3	1	± 0.5	∞
Integration time	± 1.4	Rectangular	√3	1	± 0.8	∞
RF ambient conditions	± 3.0	Rectangular	√3	1	± 1.7	∞
Mech. constraints of robot	± 0.4	Rectangular	√3	1	± 0.2	∞
Probe positioning	± 2.9	Rectangular	√3	1	± 1.7	∞
Extrapolation & integration	± 3.9	Rectangular	√3	1	± 2.3	∞
Dipole						
Dipole Axis to Liquid Distance	± 2.0	Rectangular	√3	1	± 1.2	∞
Input Power	± 4.7	Rectangular	√3	1	± 2.7	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	Rectangular	√3	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid conductivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (target)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Liquid permittivity (measured)	± 5.0	Rectangular	√3	0.6	± 1.7	∞
Combined Standard Uncertainty					± 9.9	
Expanded Uncertainty (k=2)					± 19.8	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Std 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX A - SAR MEASUREMENT DATA

Face-Held SAR - NiMH Battery - Antenna P/N: CAT-460

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF

Frequency: 156 MHz; Duty Cycle: 1:1

RF Output Power: 5.08 Watts (Conducted)

7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)

Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.1 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.557 mW/g; SAR(10 g) = 0.419 mW/g

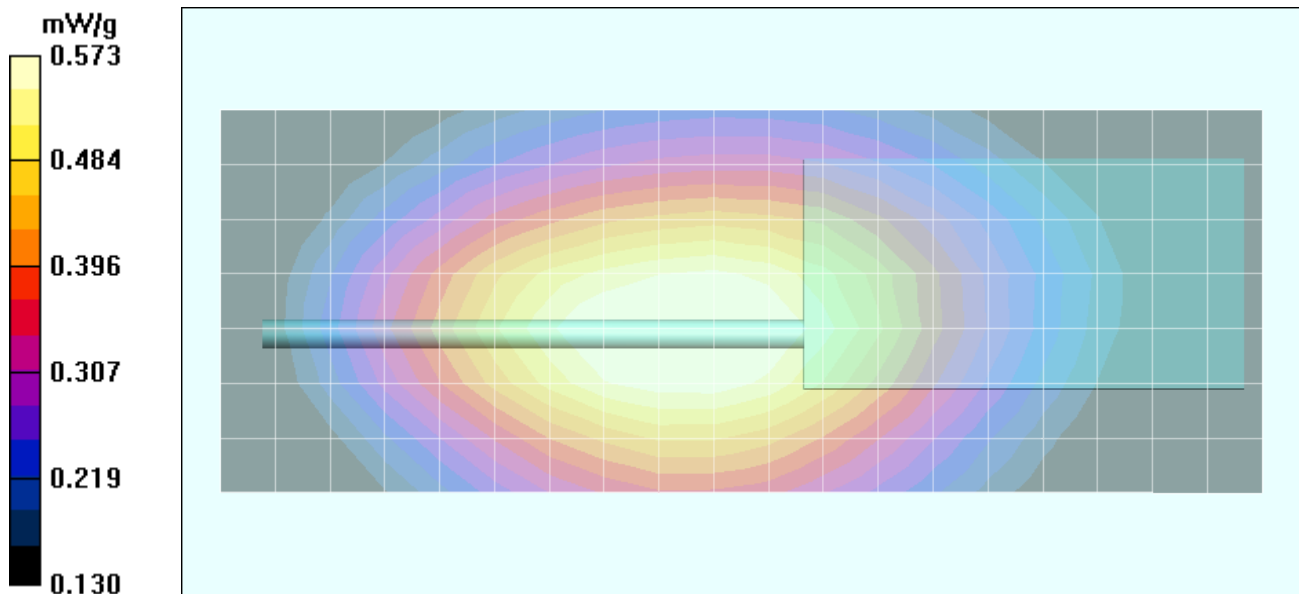

Face-Held SAR - NiCd Battery - Antenna P/N: CAT-460

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF

Frequency: 156 MHz; Duty Cycle: 1:1

RF Output Power: 5.05 Watts (Conducted)

7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)

Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.9 V/m; Power Drift = -0.150 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.445 mW/g

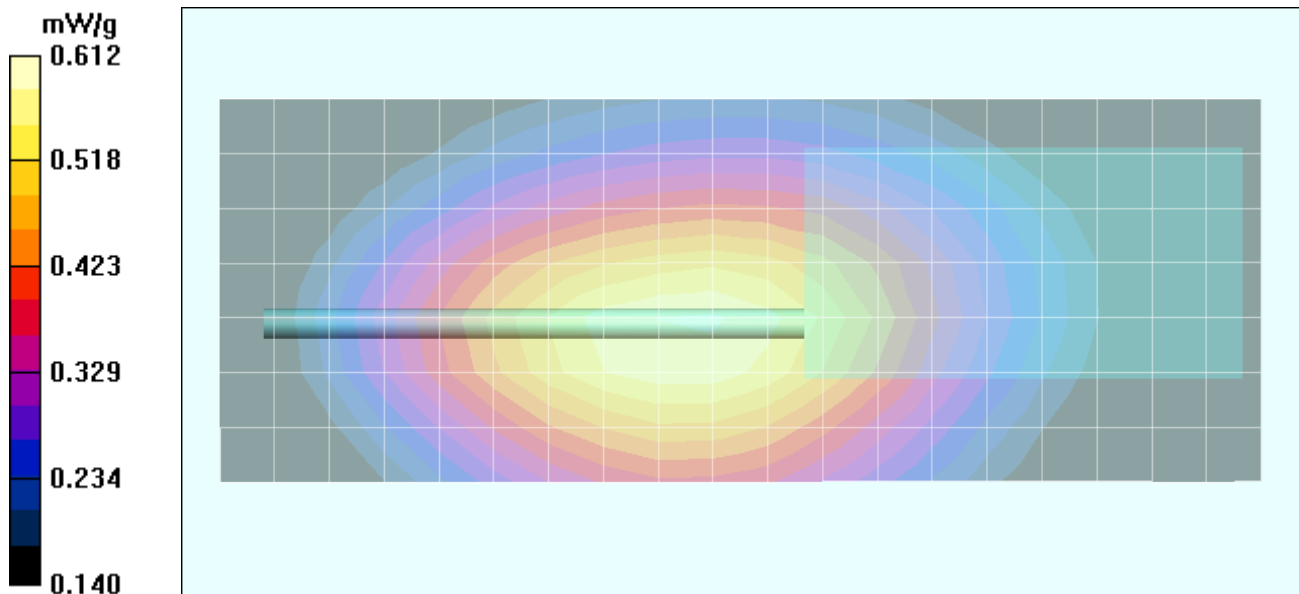

Face-Held SAR - Alkaline Batteries (Duracell ProCell) - Antenna P/N: CAT-460

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 4.95 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.9 V/m; Power Drift = -0.143 dB
 Peak SAR (extrapolated) = 0.752 W/kg
SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.375 mW/g

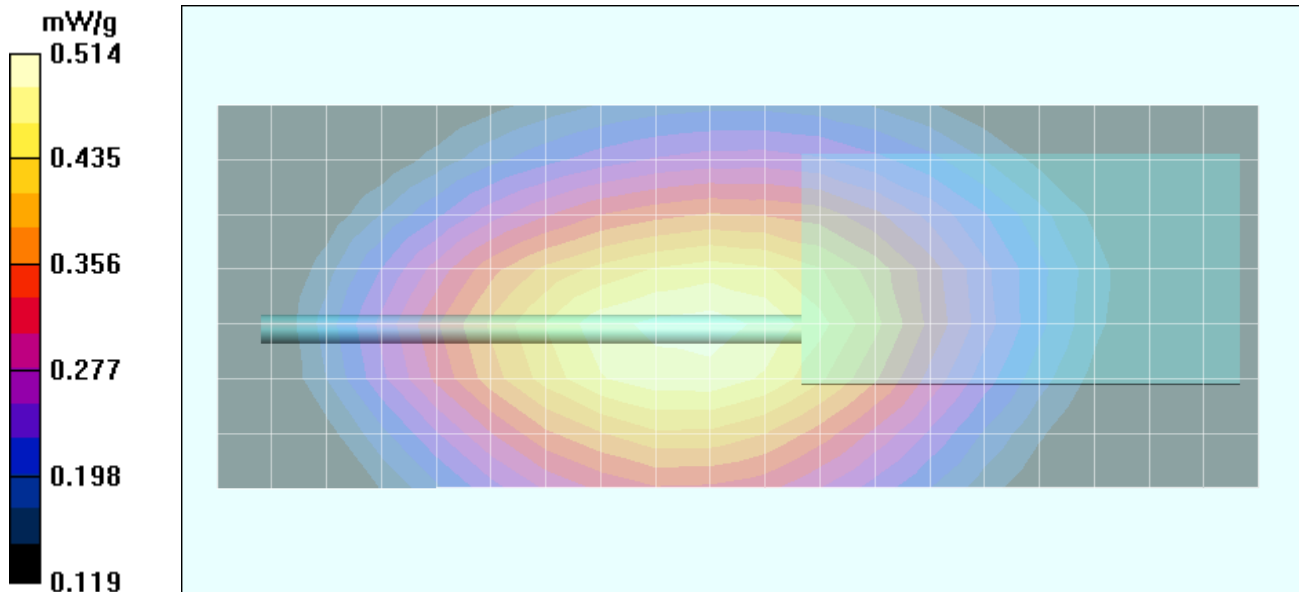

Face-Held SAR - NiMH Battery - Antenna P/N: ATV-8B

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF

Frequency: 156 MHz; Duty Cycle: 1:1

RF Output Power: 5.09 Watts (Conducted)

7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)

Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held - 2.5cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.1 V/m; Power Drift = 0.0879 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.987 mW/g; SAR(10 g) = 0.741 mW/g

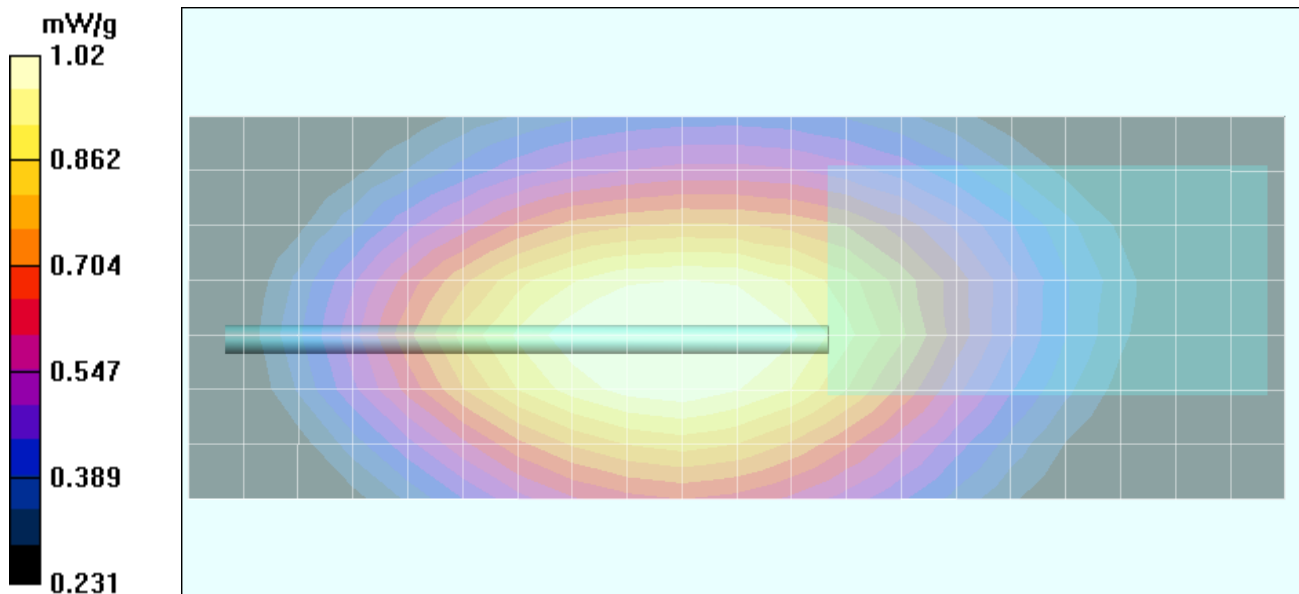

Face-Held SAR - NiCd Battery - Antenna P/N: ATV-8B

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.06 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 34.1 V/m; Power Drift = -0.119 dB
 Peak SAR (extrapolated) = 1.49 W/kg
SAR(1 g) = 0.990 mW/g; SAR(10 g) = 0.747 mW/g

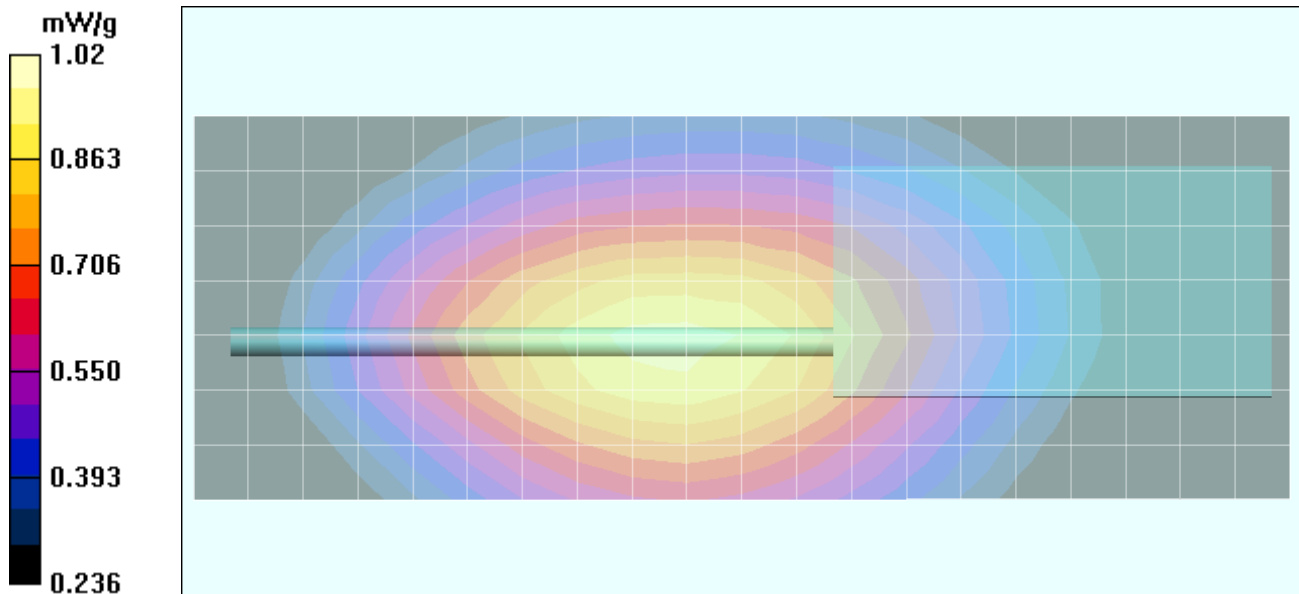

Face-Held SAR - Alkaline Batteries (Duracell ProCell) - Antenna P/N: ATV-8B

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 4.95 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5cm Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 34.2 V/m; Power Drift = -0.519 dB
 Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.707 mW/g

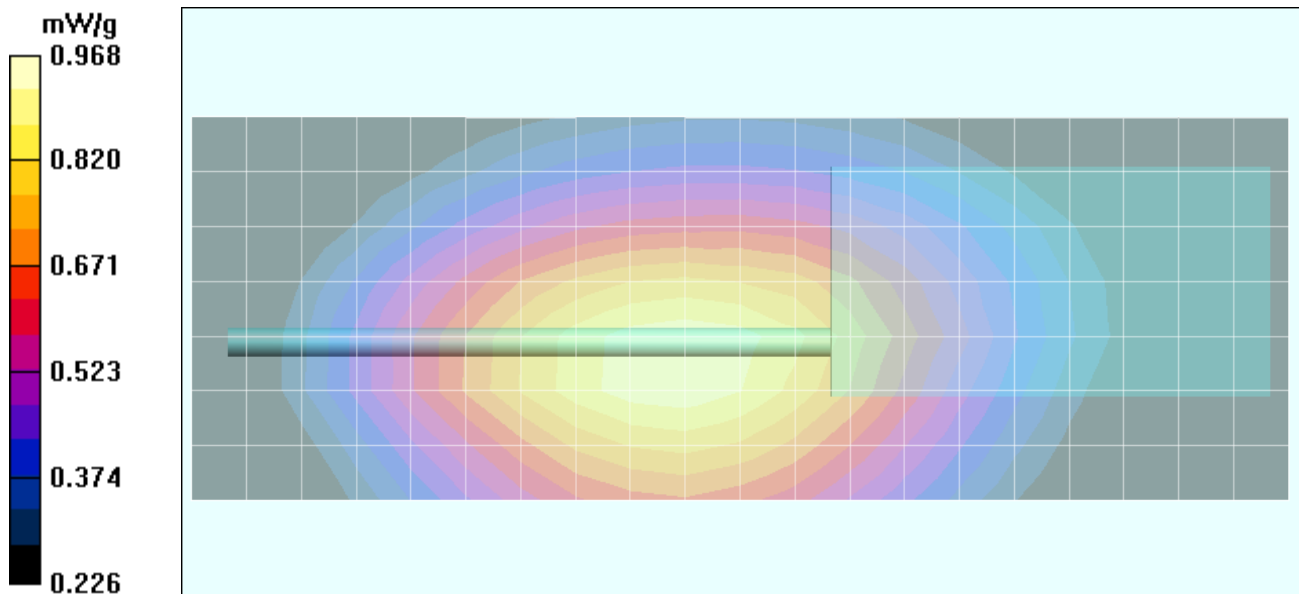

Face-Held SAR - Alkaline Batteries (Duracell ProCell) - Antenna P/N: ATV-8A

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF
 Frequency: 137 MHz; Duty Cycle: 1:1
 RF Output Power: 5.11 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: HSL150 ($\sigma = 0.72 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - Low Channel/Area Scan (8x24x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5cm Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 37.5 V/m; Power Drift = -0.105 dB
 Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 1.41 mW/g; SAR(10 g) = 1.05 mW/g

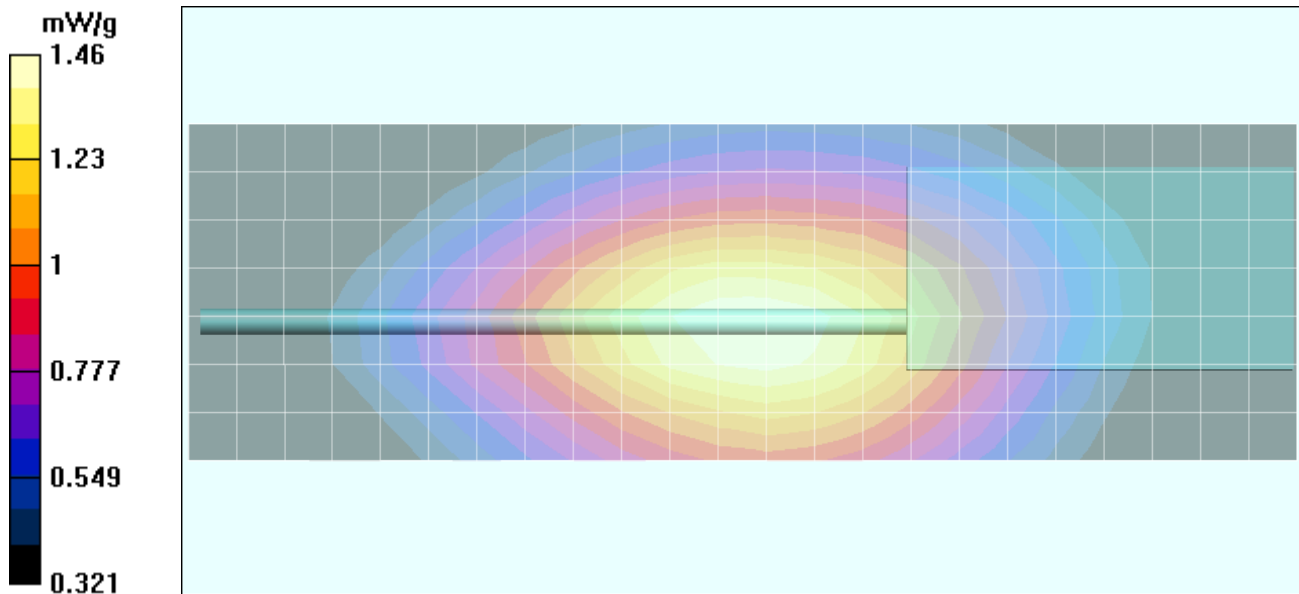

Face-Held SAR - Alkaline Batteries (Duracell ProCell) - Antenna P/N: ATV-8C

Dated Tested: 03/30/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF
 Frequency: 174 MHz; Duty Cycle: 1:1
 RF Output Power: 5.13 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: HSL150 ($\sigma = 0.72 \text{ mho/m}$; $\epsilon_r = 52.7$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - High Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5cm Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 39.9 V/m; Power Drift = -0.0346 dB
 Peak SAR (extrapolated) = 2.44 W/kg
SAR(1 g) = 1.60 mW/g; SAR(10 g) = 1.16 mW/g

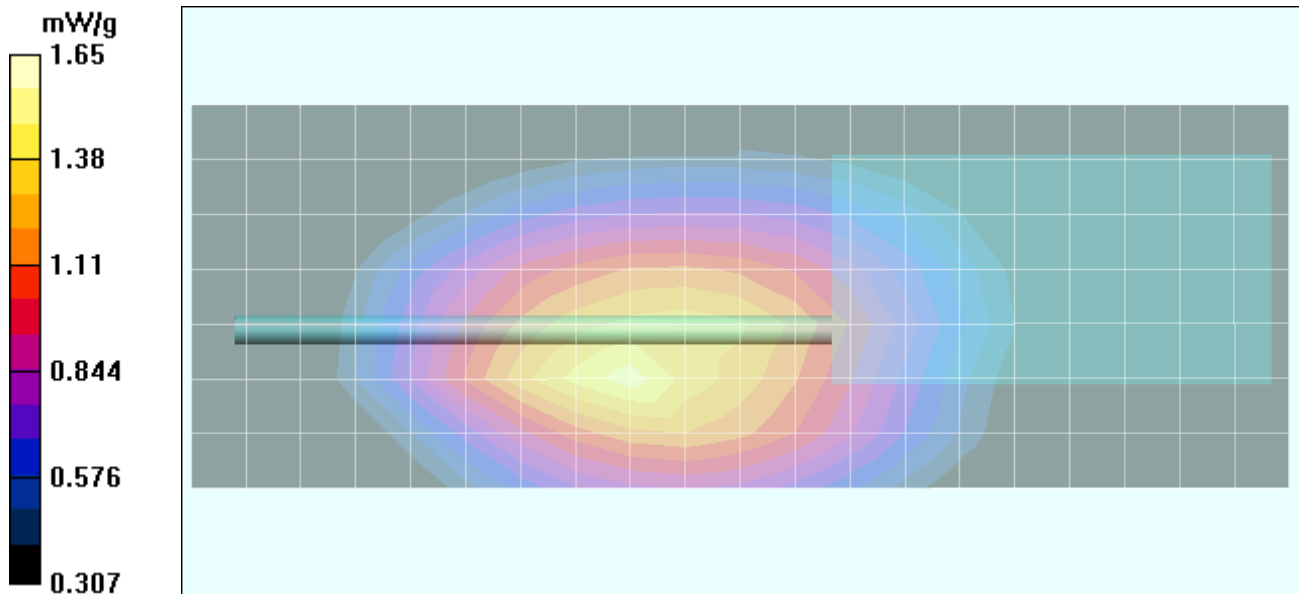

Face-Held SAR - Alkaline Batteries (Energizer E91) - Antenna P/N: ATV-8C

Dated Tested: 03/30/04

DUT: Vertex Standard HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 24.7 °C; Fluid Temp: 21.7 °C; Barometric Pressure: 101.8 kPa; Humidity: 31%

Communication System: FM VHF
 Frequency: 174 MHz; Duty Cycle: 1:1
 RF Output Power: 5.01 Watts (Conducted)
 RF Output Power: 5.10 Watts (Conducted) 2nd Maximum
 9V AA Alkaline Energizer E91 Battery Pack (Battery Case P/N: FBA-25)
 Medium: HSL150 ($\sigma = 0.72$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.6, 9.6, 9.6); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Face-Held - 2.5cm Separation Distance - High Channel/Area Scan (8x21x1):


Measurement grid: dx=15mm, dy=15mm

Face-Held - 2.5cm Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 42.5 V/m; Power Drift = -0.904 dB
 Peak SAR (extrapolated) = 2.63 W/kg
SAR(1 g) = 1.71 mW/g; SAR(10 g) = 1.26 mW/g

Face-Held - 2.5cm Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 1:


Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 42.5 V/m; Power Drift = -0.747 dB
 Peak SAR (extrapolated) = 2.62 W/kg
SAR(1 g) = 1.49 mW/g; SAR(10 g) = 1.02 mW/g

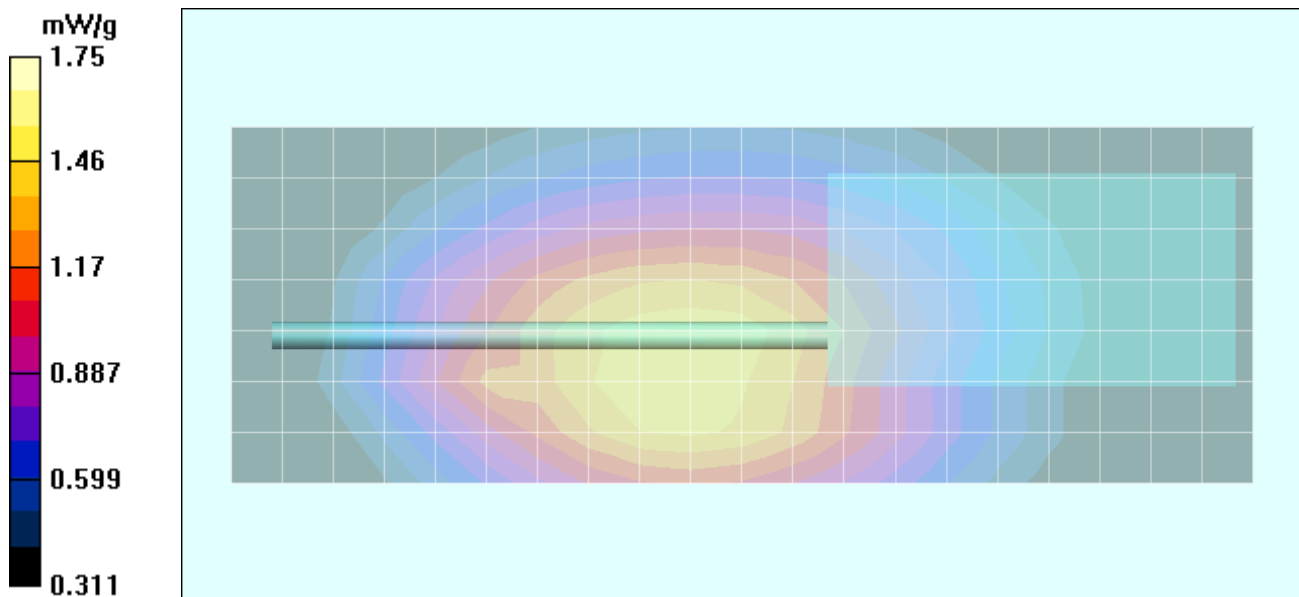

Z-Axis Scan

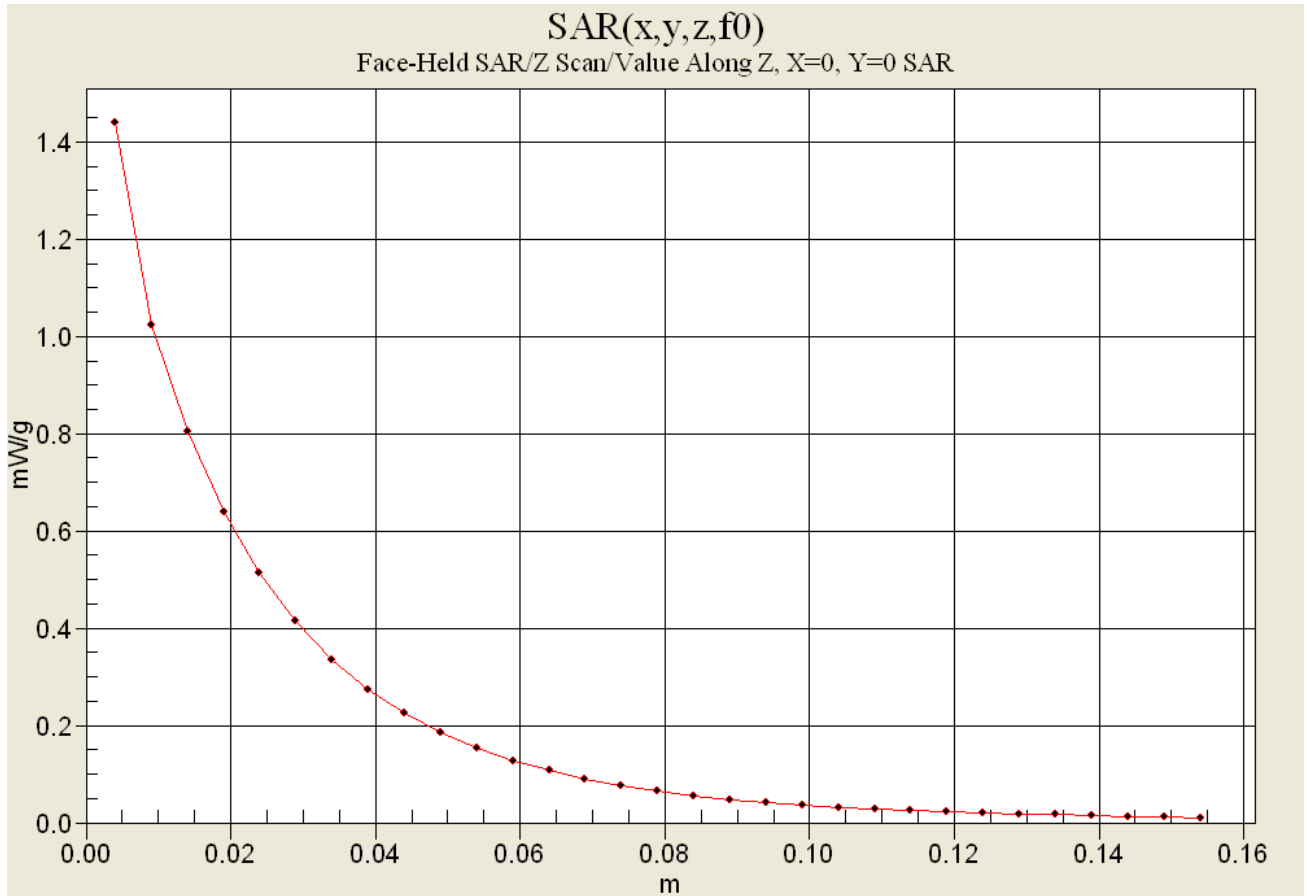

SAR versus Time - Alkaline Batteries (Energizer E91) - Antenna P/N: ATV-8C

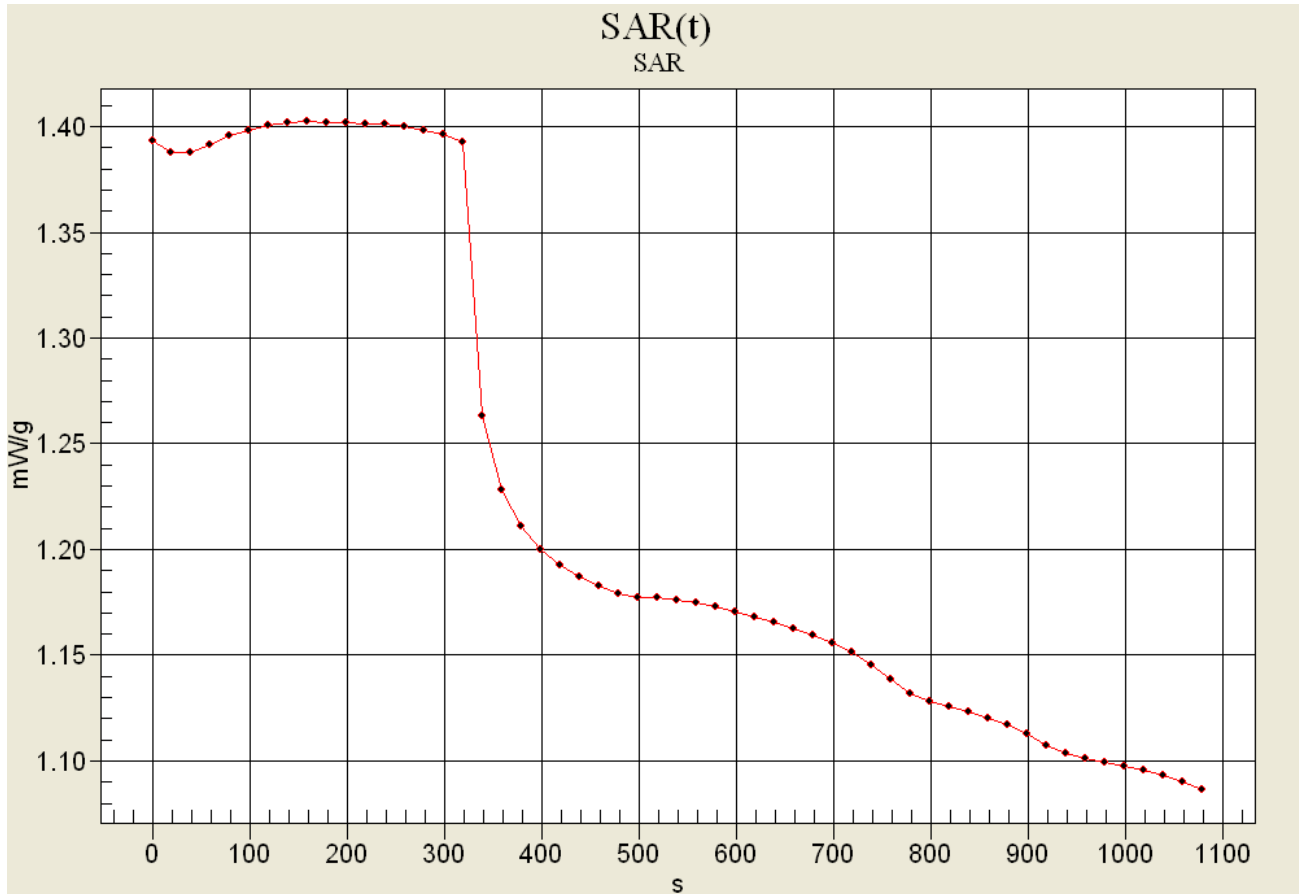

Initial SAR: 1.394 mW/g
Maximum SAR: 1.402 mW/g
Final SAR: 1.088 mW/g (-1.101 dB)
SAR from Initial to 300s: 1.397 mW/g (0.009 dB)
(300s = Zoom Scan Duration)

Body-Worn SAR - NiMH Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Speaker-Microphone (P/N: CMP-460)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.14 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16.3 V/m; Power Drift = -0.0913 dB
 Peak SAR (extrapolated) = 0.399 W/kg
SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.196 mW/g

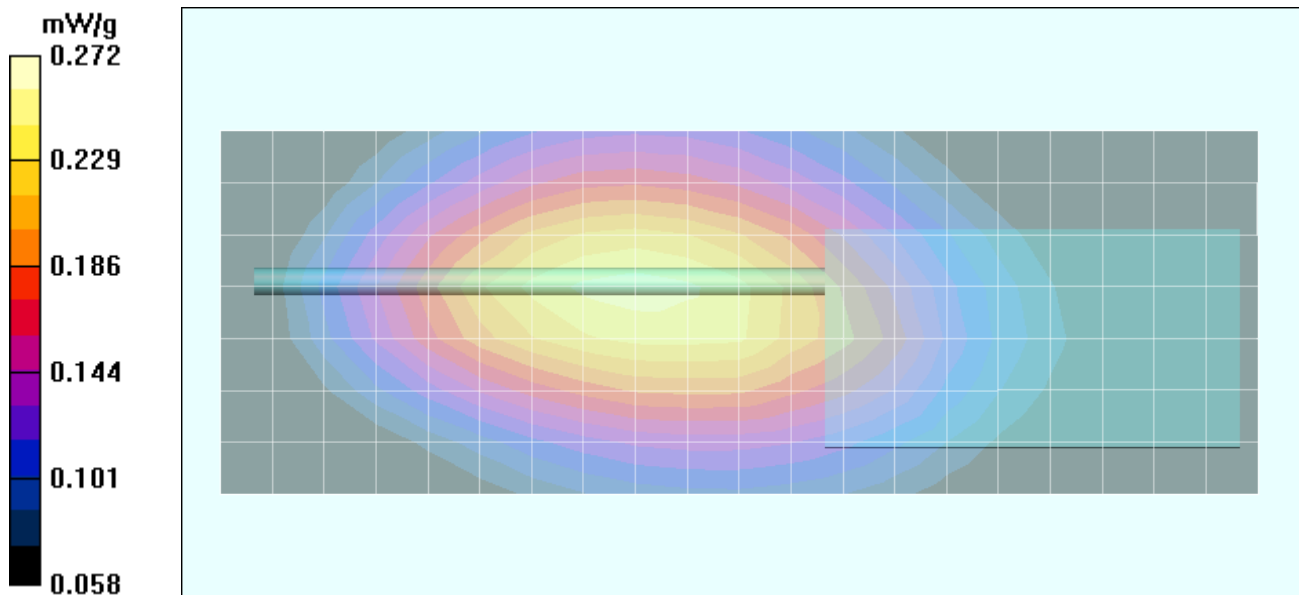

Body-Worn SAR - NiCd Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Speaker-Microphone (P/N: CMP-460)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.10 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16 V/m; Power Drift = -0.108 dB
 Peak SAR (extrapolated) = 0.384 W/kg
SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.187 mW/g

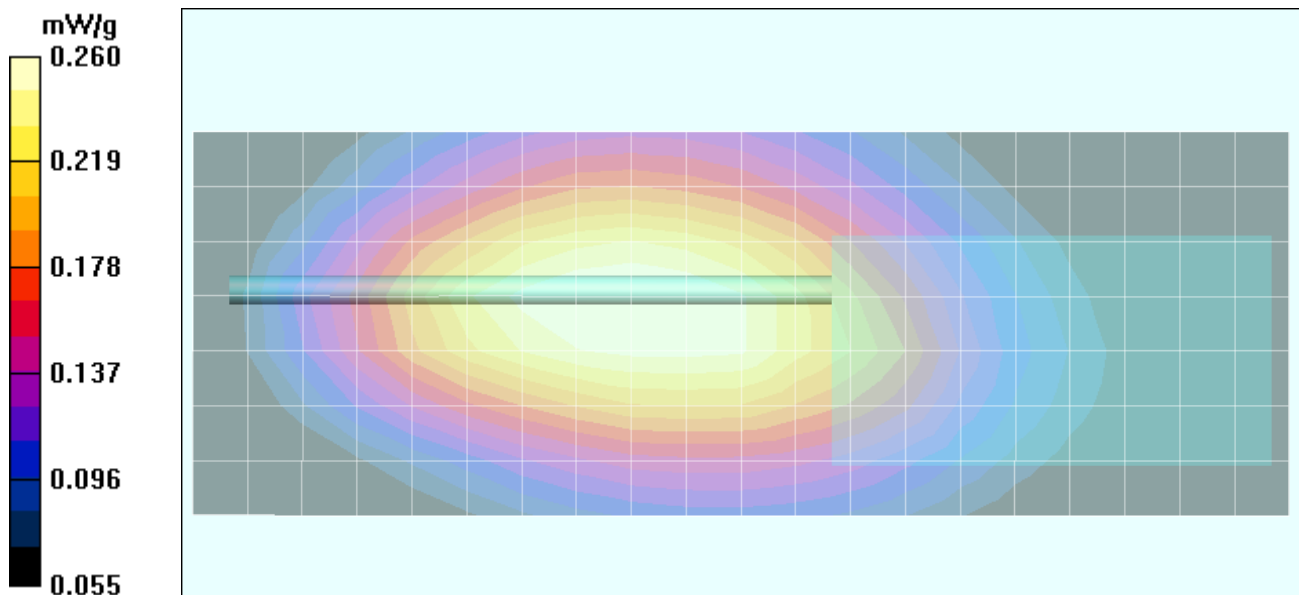

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Speaker-Microphone (P/N: CMP-460)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.02 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16.1 V/m; Power Drift = -0.349 dB
 Peak SAR (extrapolated) = 0.392 W/kg
SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.189 mW/g

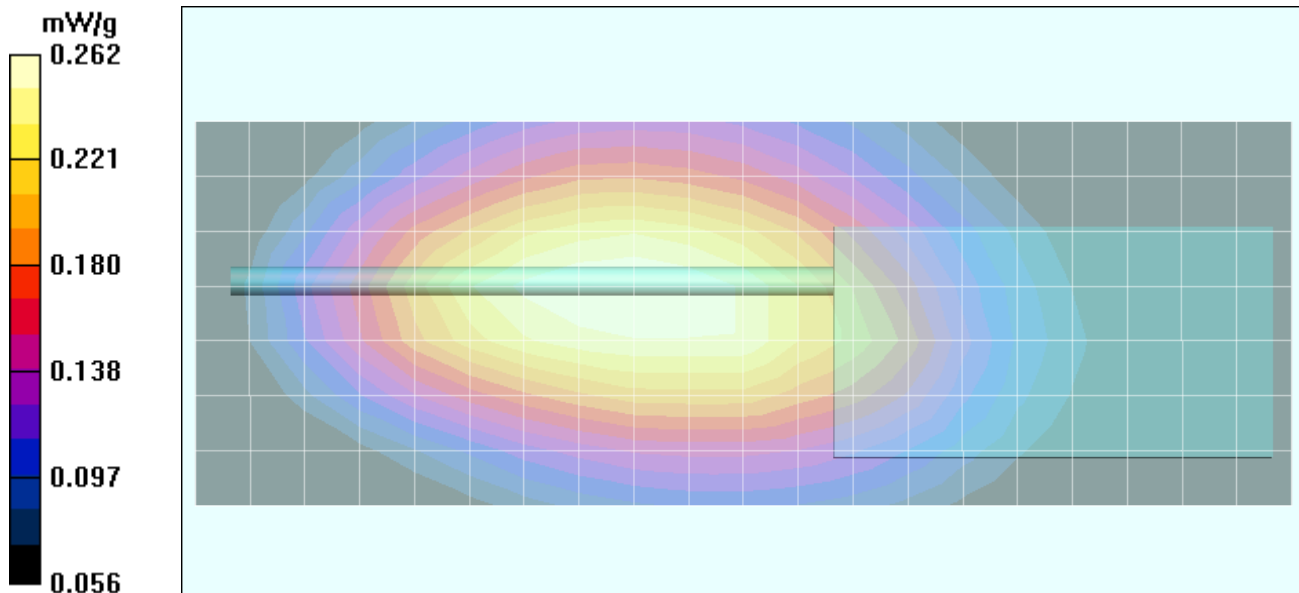

Body-Worn SAR - NiMH Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.11 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.9 V/m; Power Drift = -0.297 dB
 Peak SAR (extrapolated) = 0.458 W/kg
SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.225 mW/g

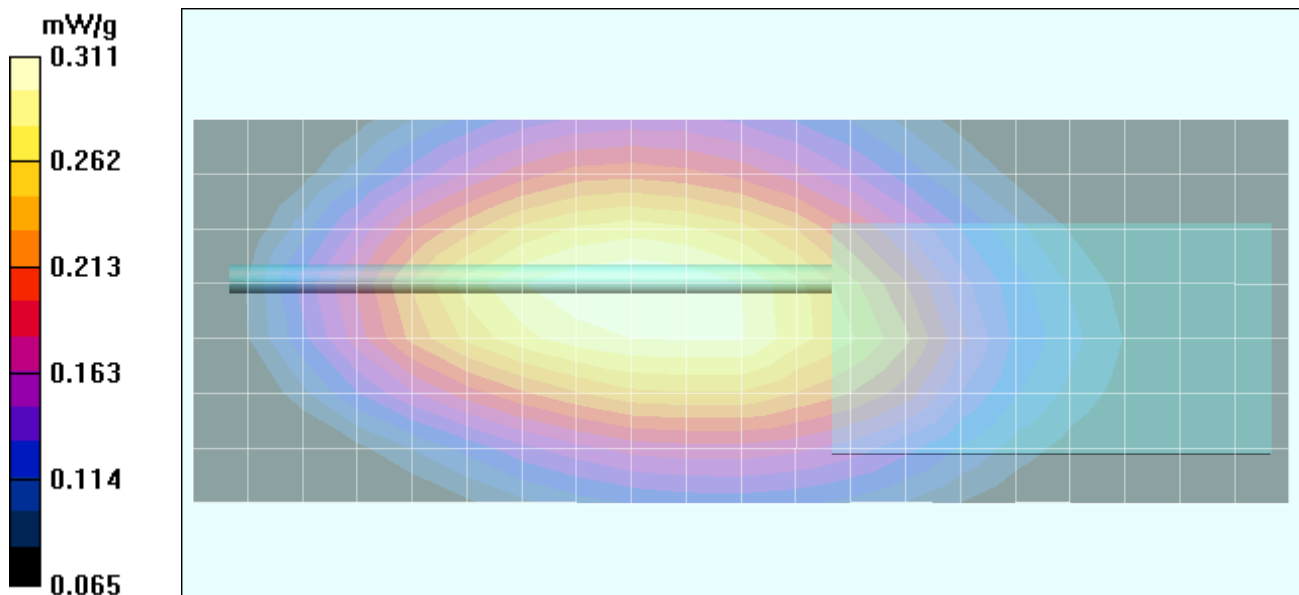

Body-Worn SAR - NiCd Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.08 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.6 V/m; Power Drift = -0.100 dB
 Peak SAR (extrapolated) = 0.463 W/kg
SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.225 mW/g

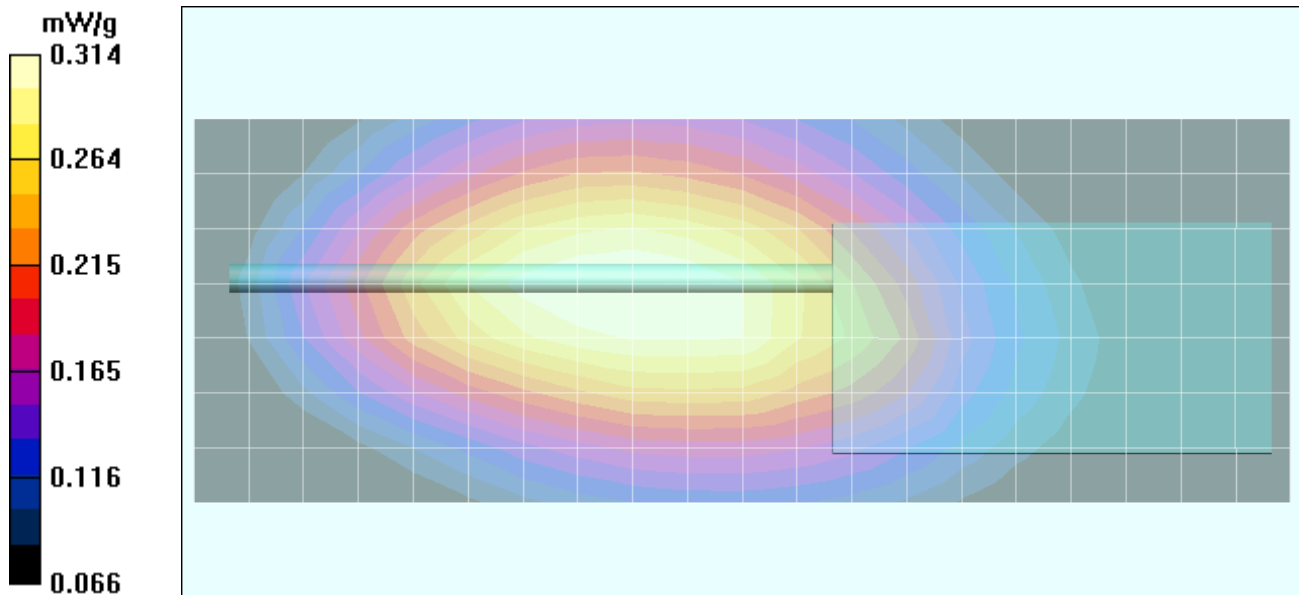

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.06 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.5 V/m; Power Drift = -0.173 dB
 Peak SAR (extrapolated) = 0.455 W/kg
SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.219 mW/g

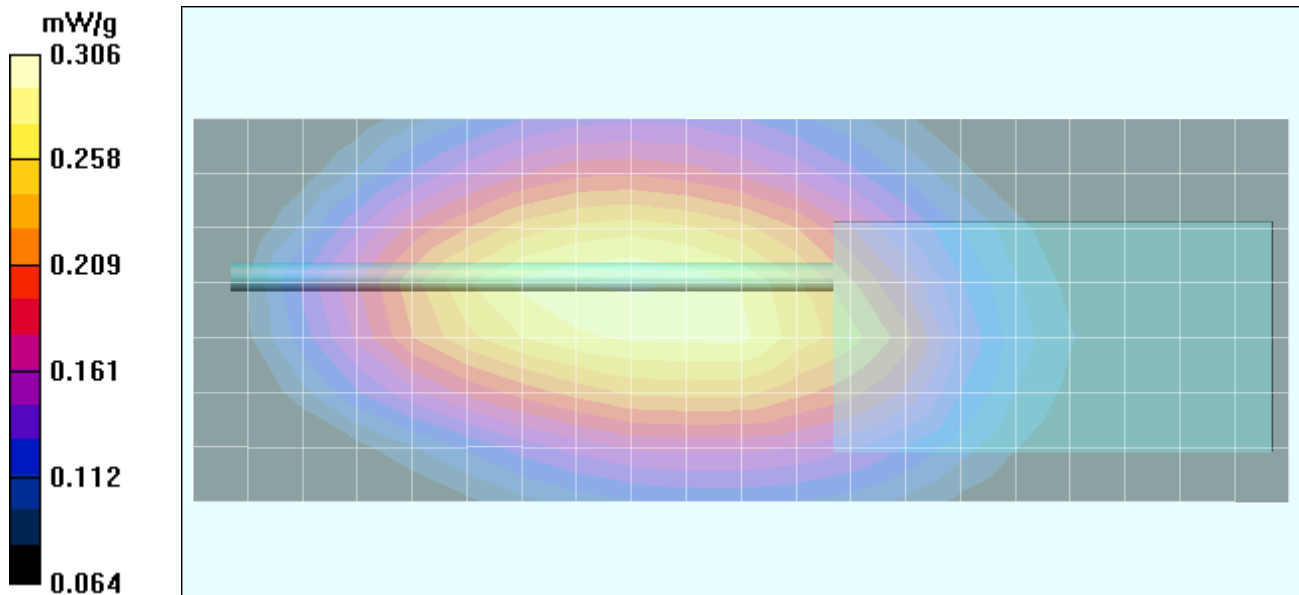

Body-Worn SAR - NiMH Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.15 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.1 V/m; Power Drift = -0.275 dB
 Peak SAR (extrapolated) = 0.415 W/kg
SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.204 mW/g

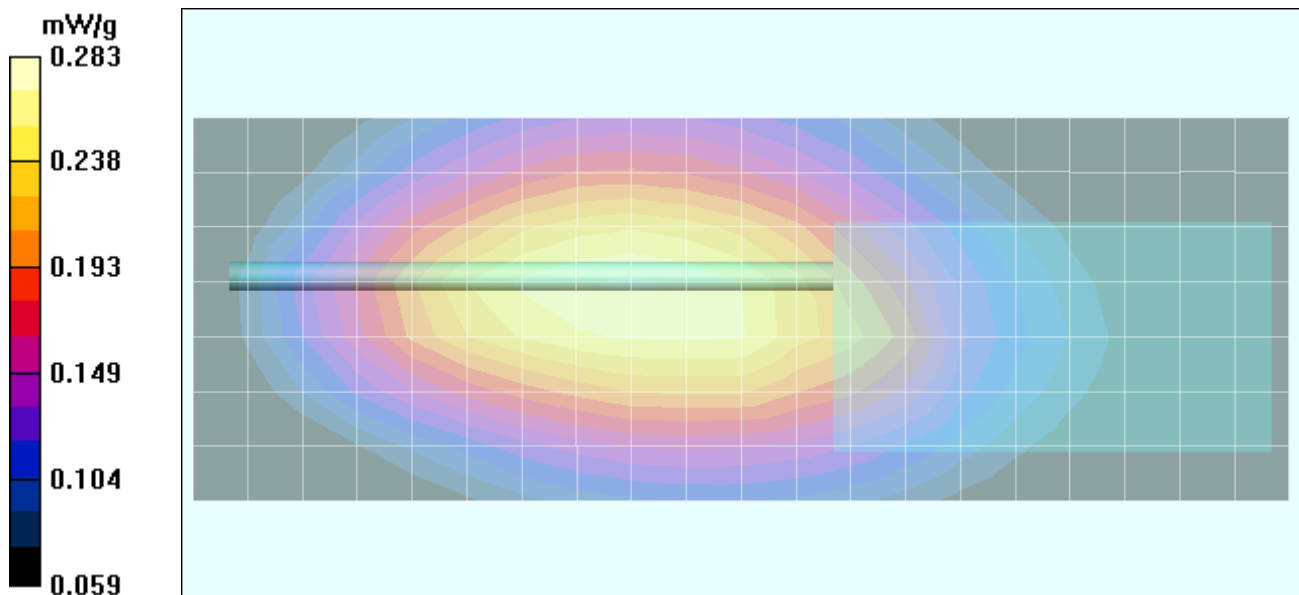

Body-Worn SAR - NiCd Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.08 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.5 V/m; Power Drift = -0.329 dB
 Peak SAR (extrapolated) = 0.445 W/kg
SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.217 mW/g

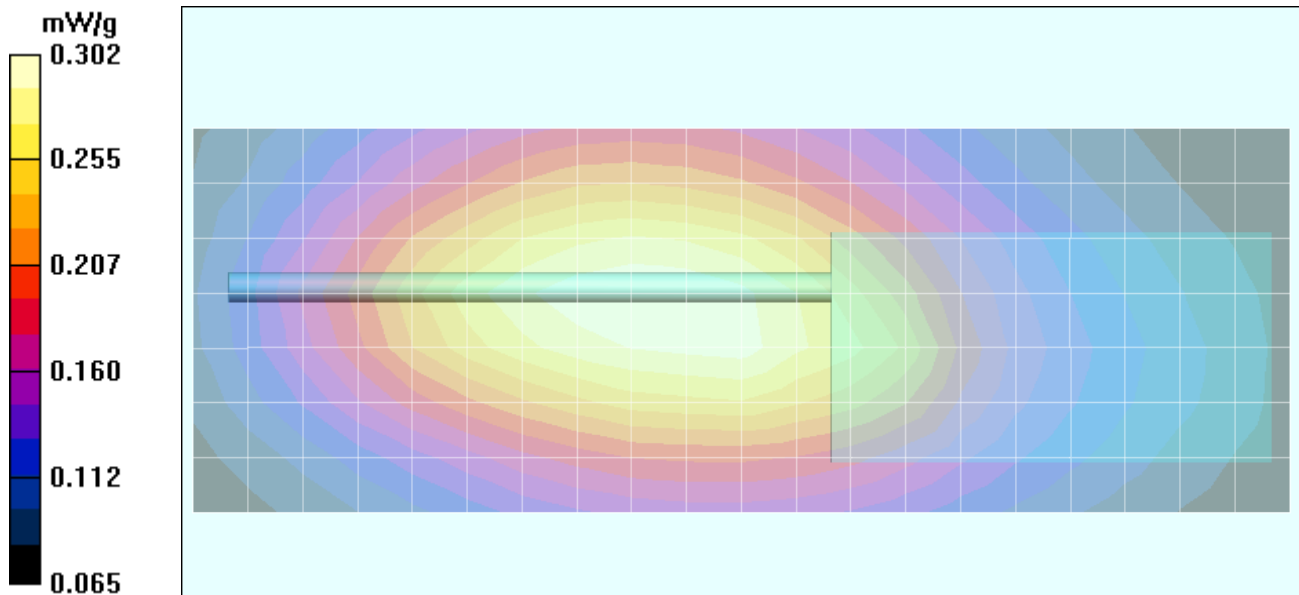

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.05 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DAS4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20.4 V/m; Power Drift = -0.314 dB
 Peak SAR (extrapolated) = 0.590 W/kg
SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.288 mW/g

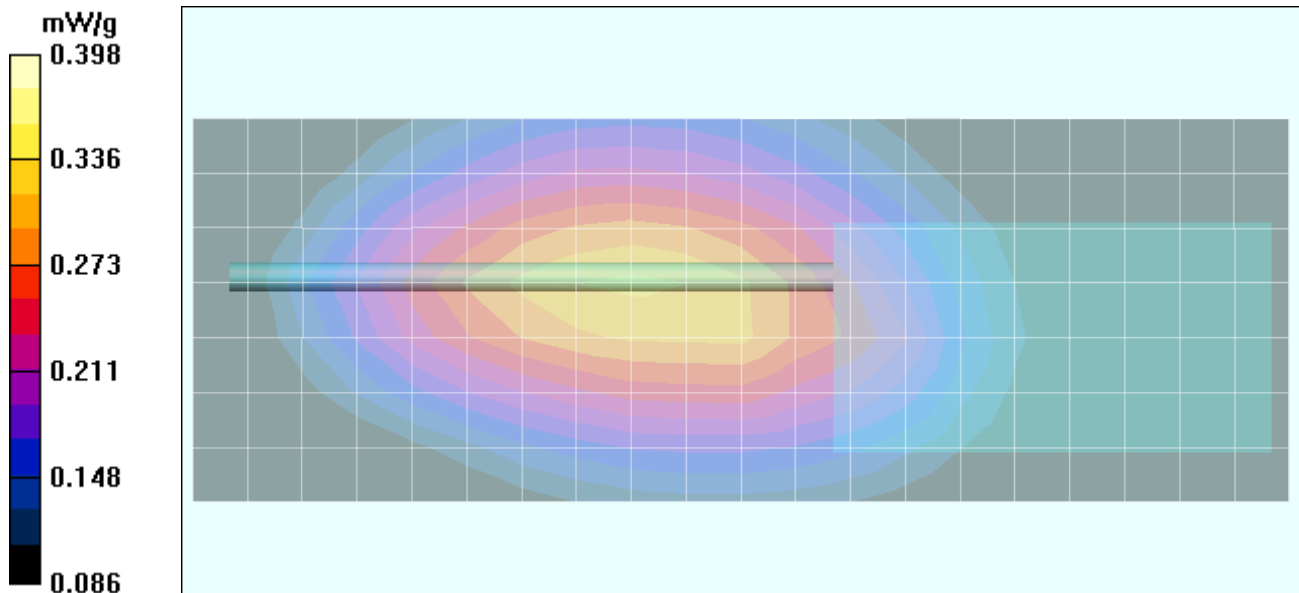

Body-Worn SAR - NiMH Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Microphone (P/N: VC-27)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.20 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 18.4 V/m; Power Drift = 0.106 dB
 Peak SAR (extrapolated) = 0.476 W/kg
SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.222 mW/g

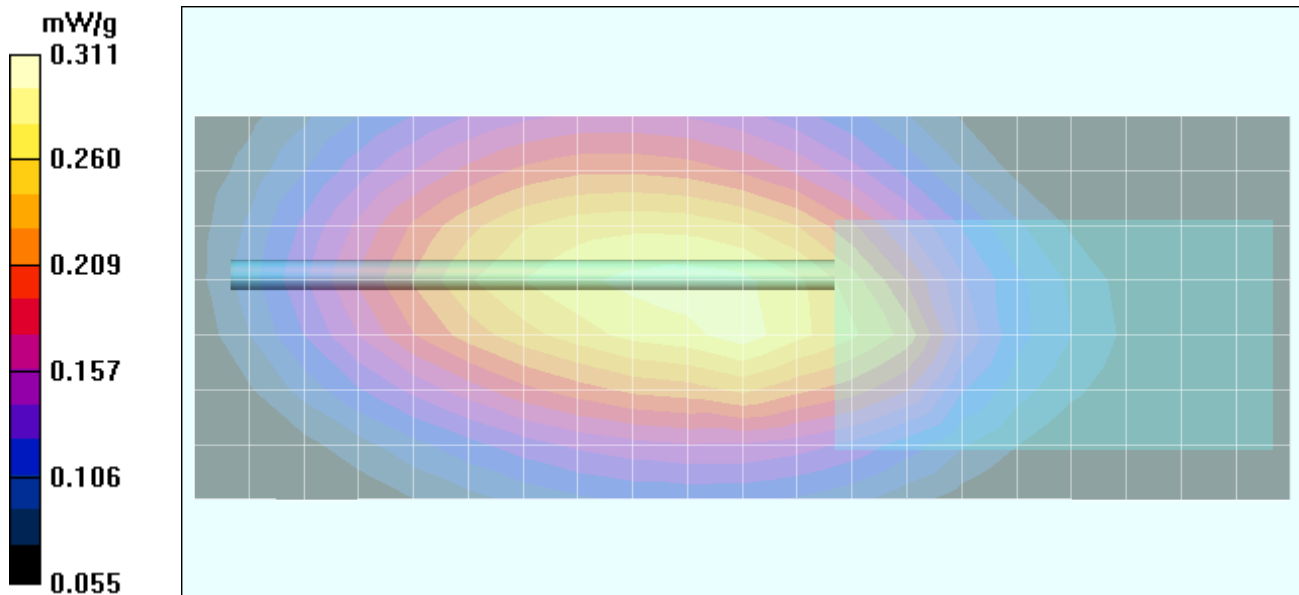

Body-Worn SAR - NiCd Battery - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Microphone (P/N: VC-27)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.12 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 16.3 V/m; Power Drift = 0.272 dB
 Peak SAR (extrapolated) = 0.401 W/kg
SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.187 mW/g

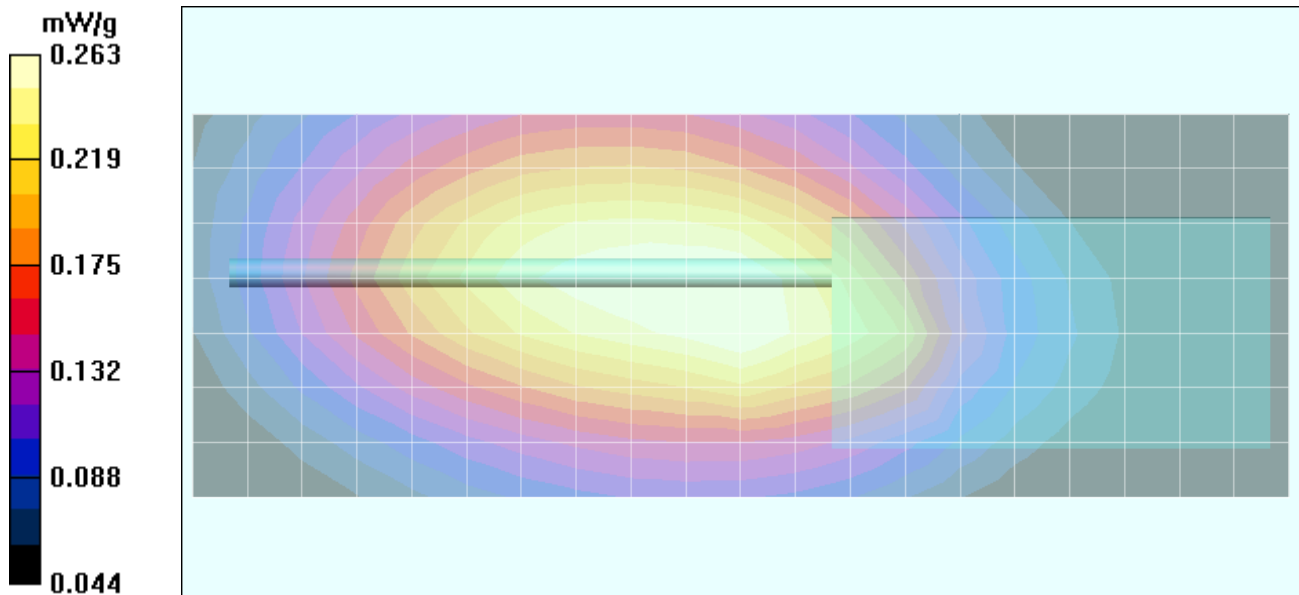

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: ATV-8B

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Microphone (P/N: VC-27)

Communication System: FM VHF

Frequency: 156 MHz; Duty Cycle: 1:1

RF Output Power: 5.10 Watts (Conducted)

9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)

Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.3 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.243 mW/g; SAR(10 g) = 0.178 mW/g

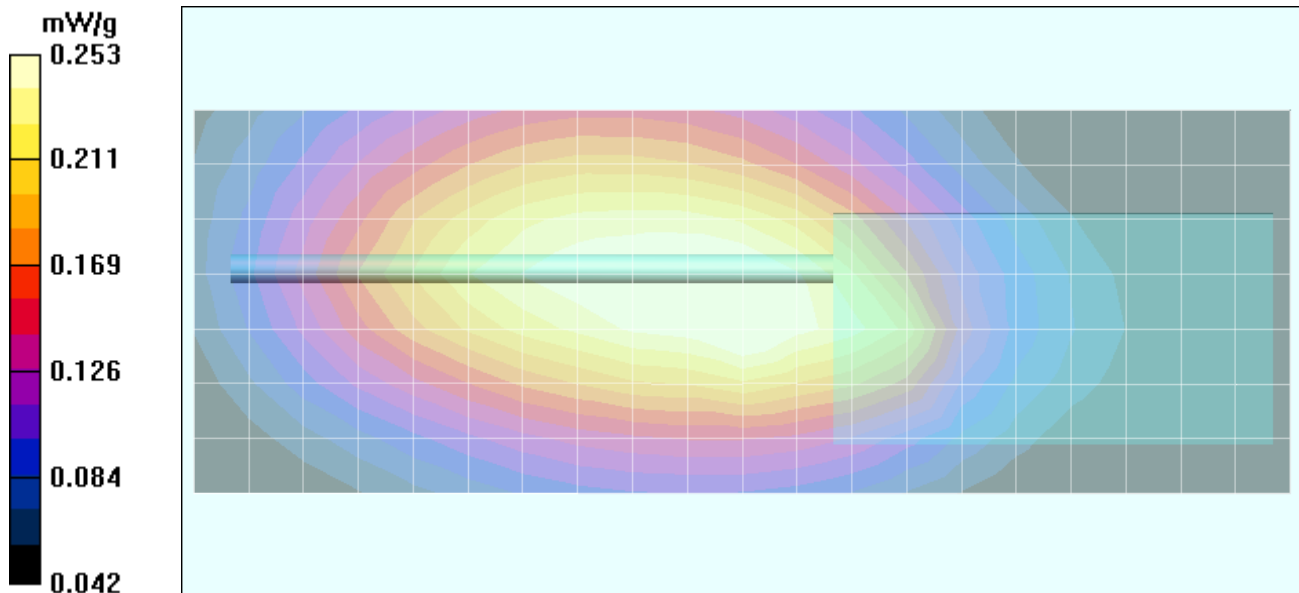

Body-Worn SAR - NiMH Battery - Antenna P/N: ATV-8C

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 174 MHz; Duty Cycle: 1:1
 RF Output Power: 5.21 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - High Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20.2 V/m; Power Drift = -0.466 dB
 Peak SAR (extrapolated) = 0.603 W/kg
SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.294 mW/g

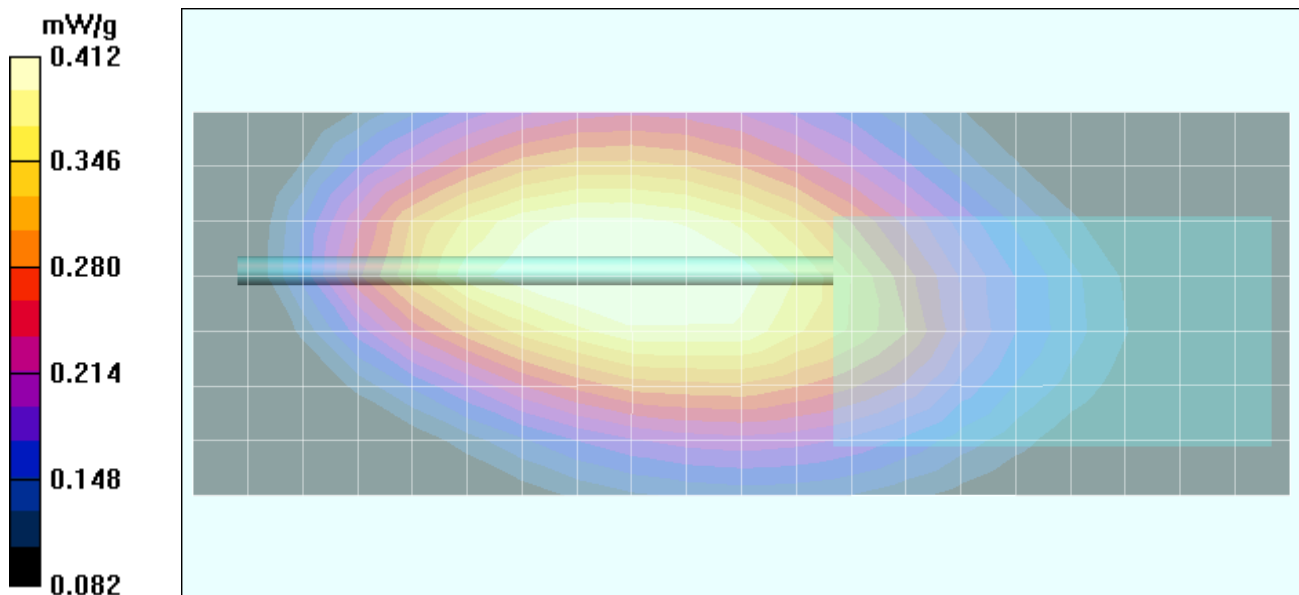

Body-Worn SAR - NiCd Battery - Antenna P/N: ATV-8C

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 174 MHz; Duty Cycle: 1:1
 RF Output Power: 5.16 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 60.7$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - High Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 17.4 V/m; Power Drift = -0.248 dB
 Peak SAR (extrapolated) = 0.511 W/kg
SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.242 mW/g

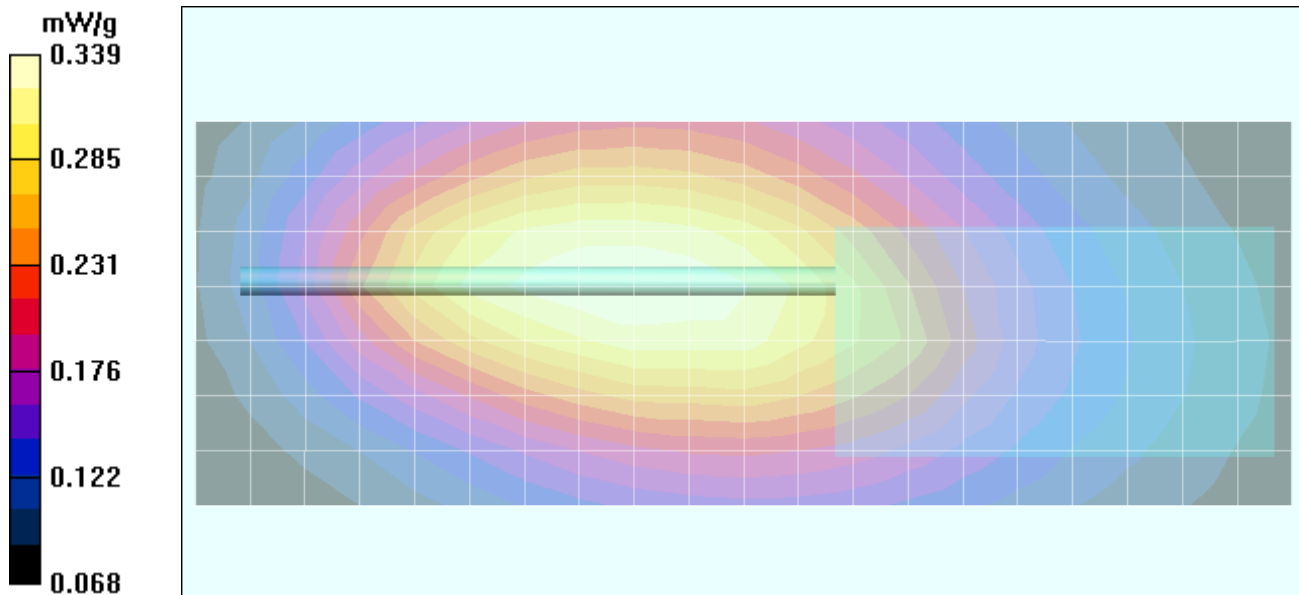

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: ATV-8C

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 174 MHz; Duty Cycle: 1:1
 RF Output Power: 5.08 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - High Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - High Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 18.4 V/m; Power Drift = -0.0945 dB
 Peak SAR (extrapolated) = 0.574 W/kg
SAR(1 g) = 0.332 mW/g; SAR(10 g) = 0.232 mW/g

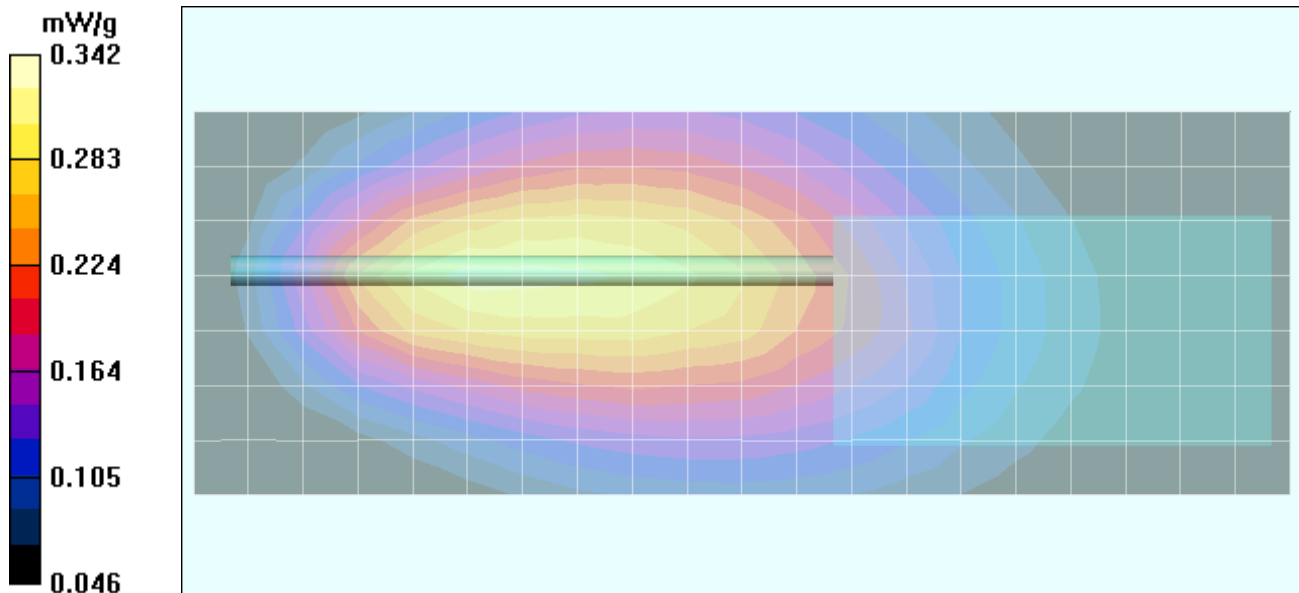

Body-Worn SAR - NiMH Battery - Antenna P/N: ATV-8A

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 137 MHz; Duty Cycle: 1:1
 RF Output Power: 5.01 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Low Channel/Area Scan (8x24x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 30.5 V/m; Power Drift = -0.128 dB
 Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.617 mW/g

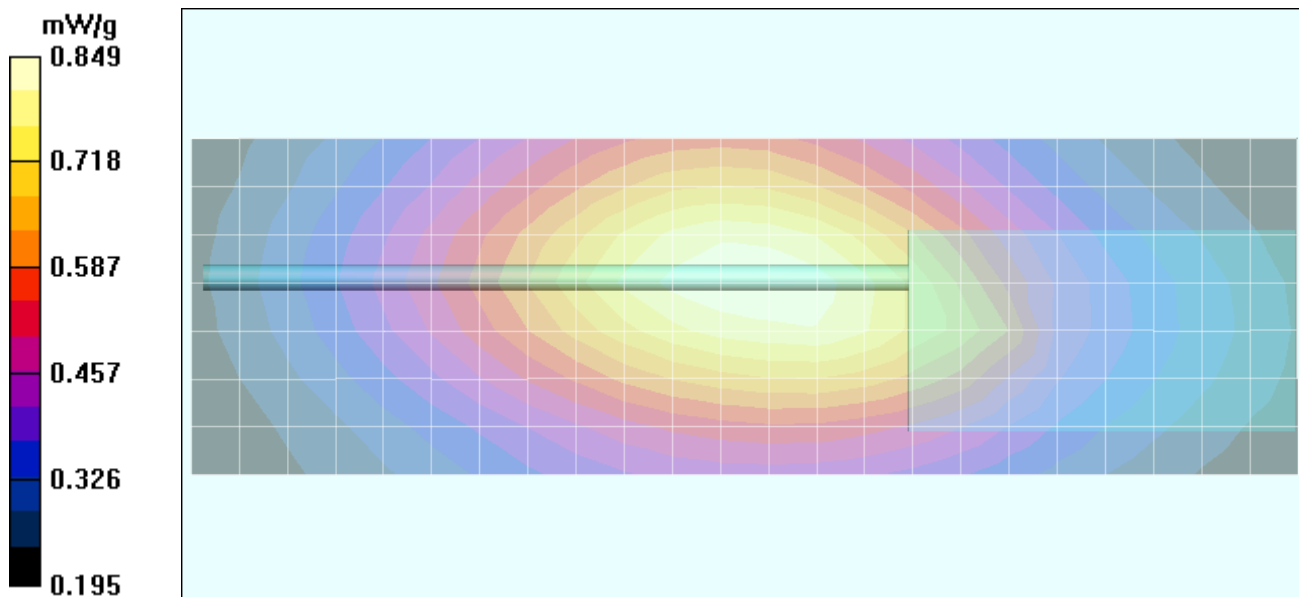

Body-Worn SAR - NiCd Battery - Antenna P/N: ATV-8A

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 137 MHz; Duty Cycle: 1:1
 RF Output Power: 5.00 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Low Channel/Area Scan (8x24x1):


Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 35.4 V/m; Power Drift = -0.0565 dB
 Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.813 mW/g

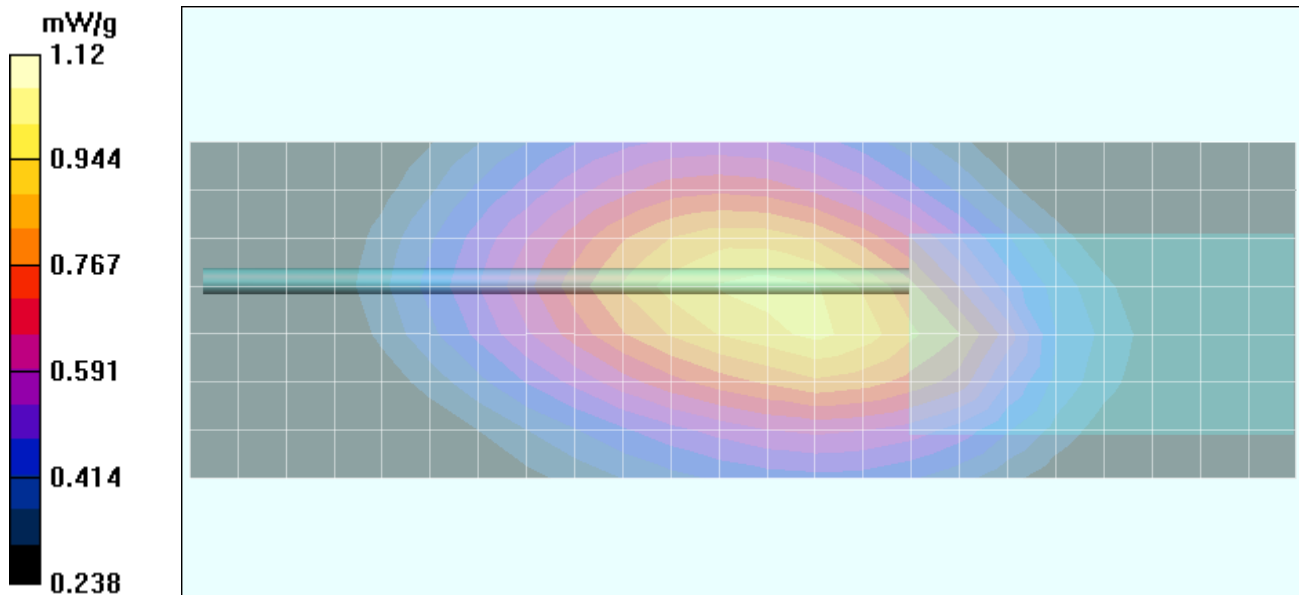

Z-Axis Scan

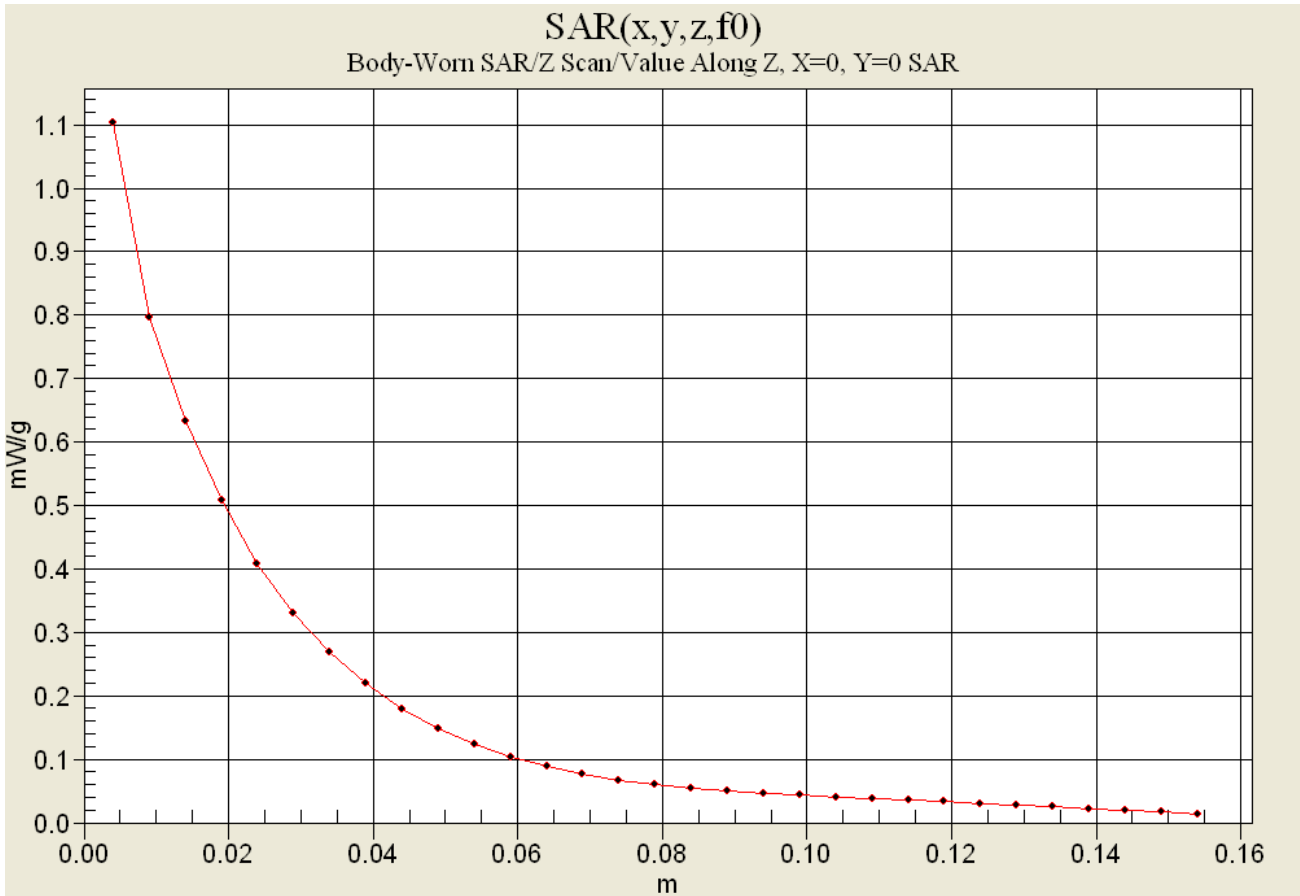

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: ATV-8A

Date Tested: 04/03/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.4 °C; Fluid Temp: 21.5 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF

Frequency: 137 MHz; Duty Cycle: 1:1

RF Output Power: 4.99 Watts (Conducted)

9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)

Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASy4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Low Channel/Area Scan (8x21x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Low Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17 V/m; Power Drift = -0.0825 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.201 mW/g

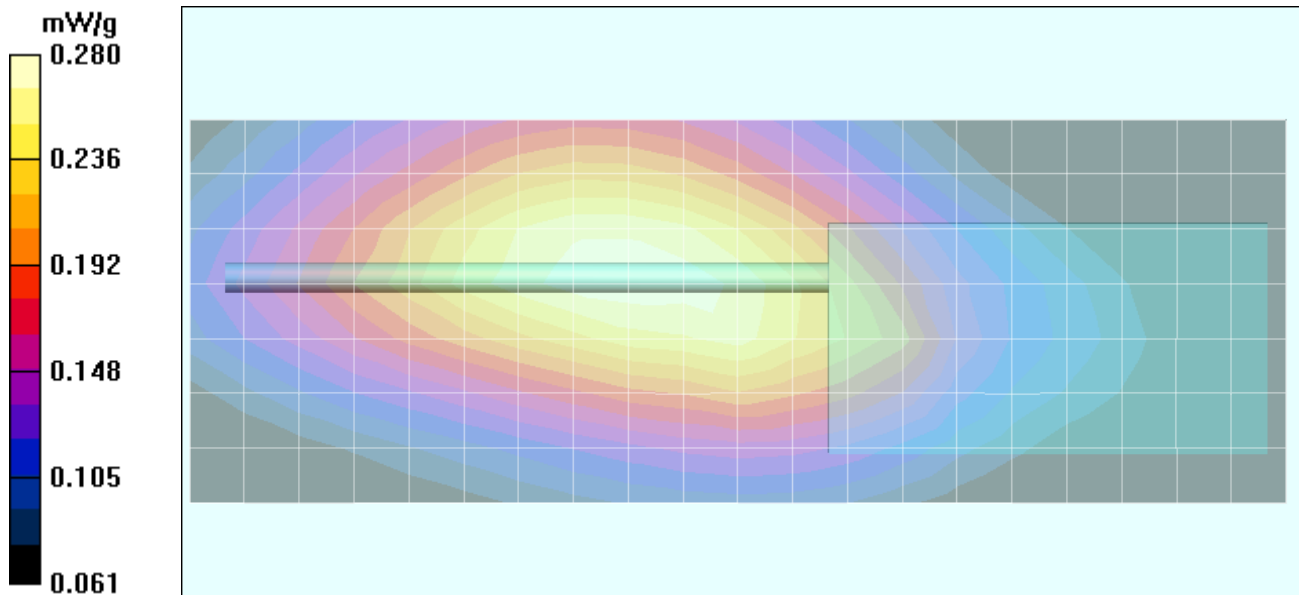

Body-Worn SAR - NiMH Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Speaker-Microphone (P/N: CMP-460)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.06 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 33.1 V/m; Power Drift = -0.0412 dB
 Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.765 mW/g

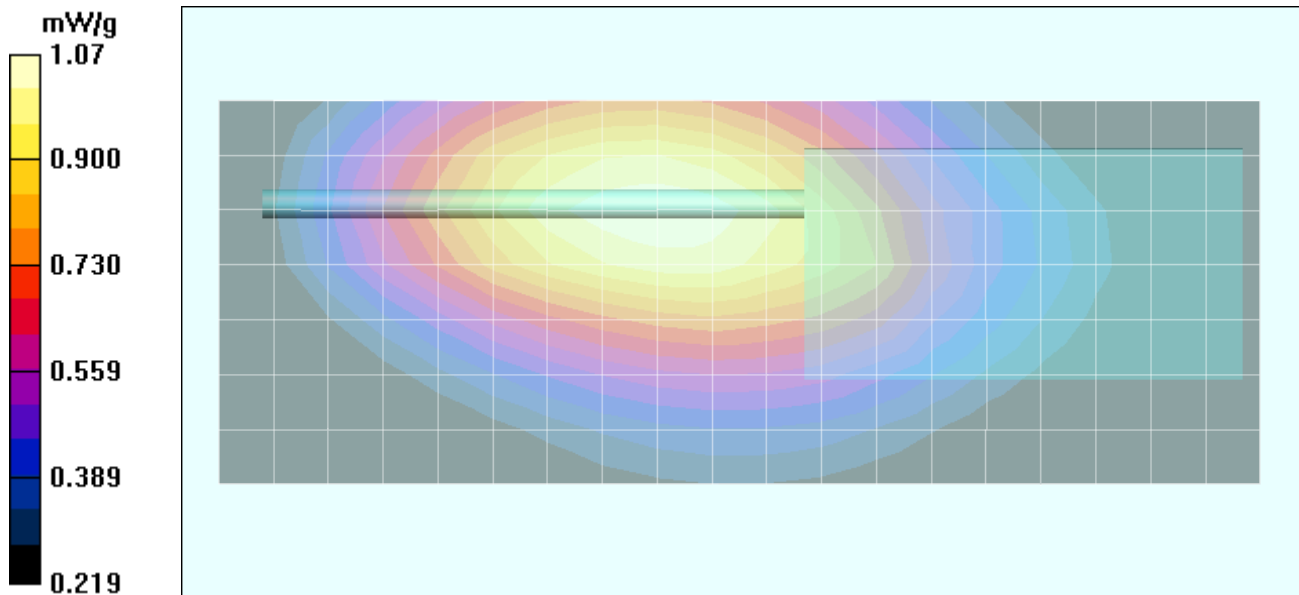

Body-Worn SAR - NiCd Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Speaker-Microphone (P/N: CMP-460)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.09 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 30.2 V/m; Power Drift = -0.0383 dB
 Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.718 mW/g

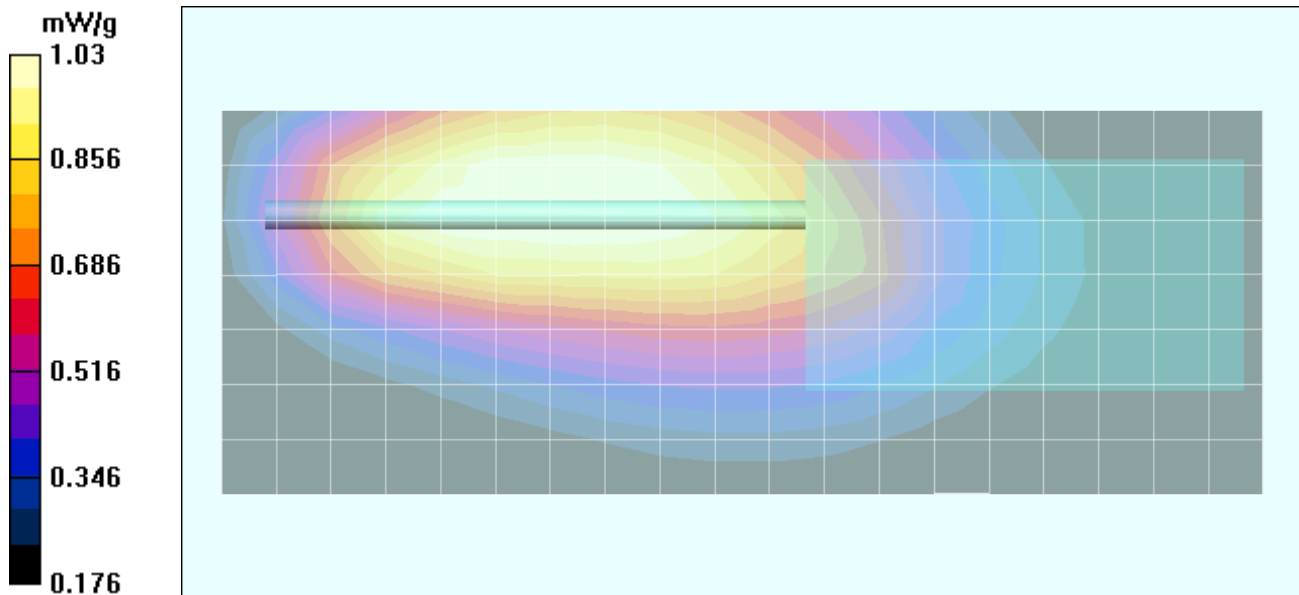

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Speaker-Microphone (P/N: CMP-460)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.03 Watts (Conducted)
 RF Output Power: 5.01 Watts (Conducted) 2nd Maximum
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 60.7$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):


Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 29.8 V/m; Power Drift = -0.0929 dB
 Peak SAR (extrapolated) = 1.92 W/kg
SAR(1 g) = 0.965 mW/g; SAR(10 g) = 0.653 mW/g

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 29.8 V/m; Power Drift = -0.762 dB
 Peak SAR (extrapolated) = 0.911 W/kg
SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.370 mW/g

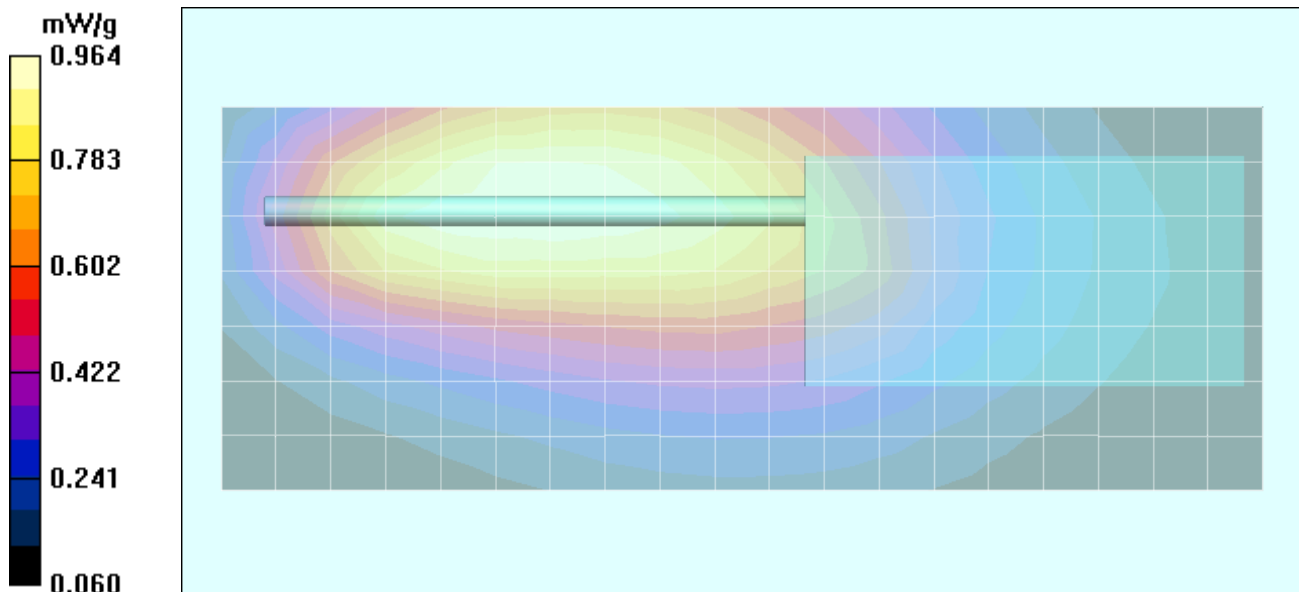

Body-Worn SAR - NiMH Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.10 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 35 V/m; Power Drift = -0.046 dB
 Peak SAR (extrapolated) = 1.96 W/kg
SAR(1 g) = 1.20 mW/g; SAR(10 g) = 0.883 mW/g

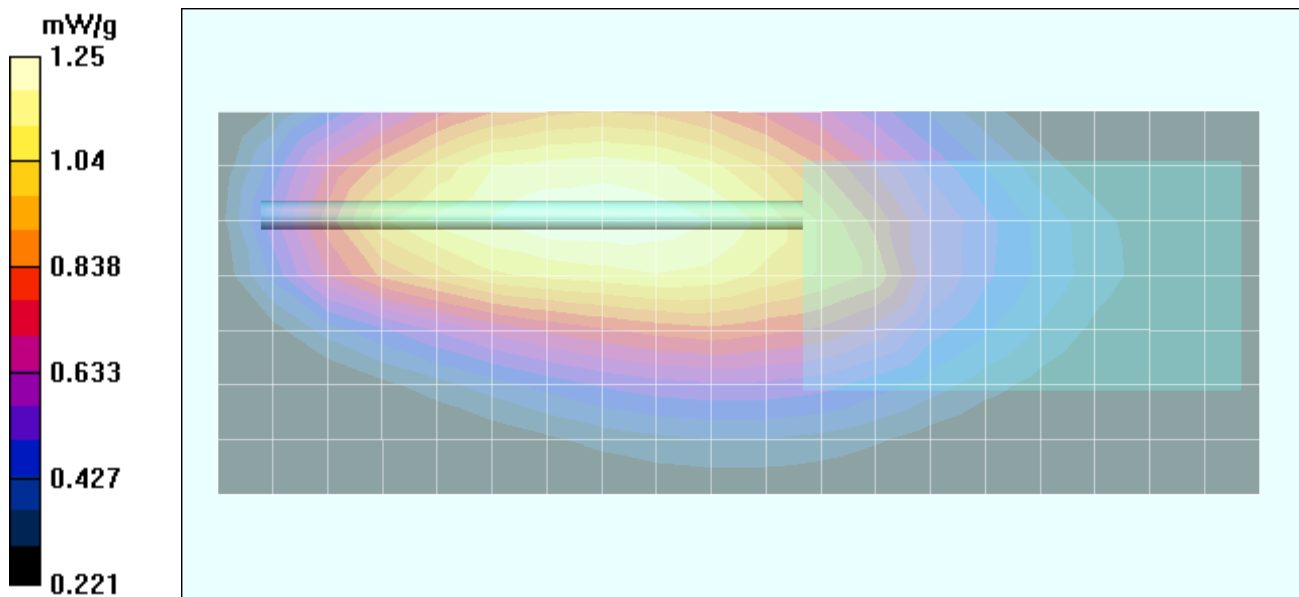

Body-Worn SAR - NiCd Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.10 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 33.6 V/m; Power Drift = -0.300 dB
 Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 1.10 mW/g; SAR(10 g) = 0.808 mW/g

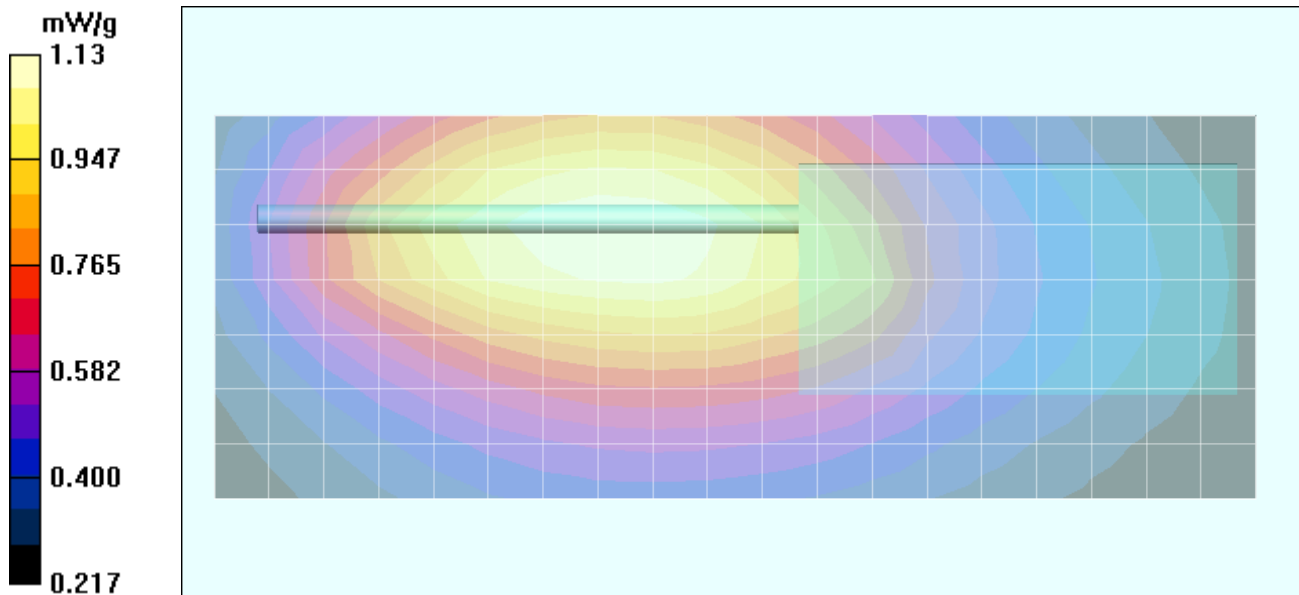

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), Microphone (P/N: MH-57)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.04 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79 \text{ mho/m}$; $\epsilon_r = 60.7$; $\rho = 1000 \text{ kg/m}^3$)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 33.7 V/m; Power Drift = -0.239 dB
 Peak SAR (extrapolated) = 1.88 W/kg
SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.859 mW/g

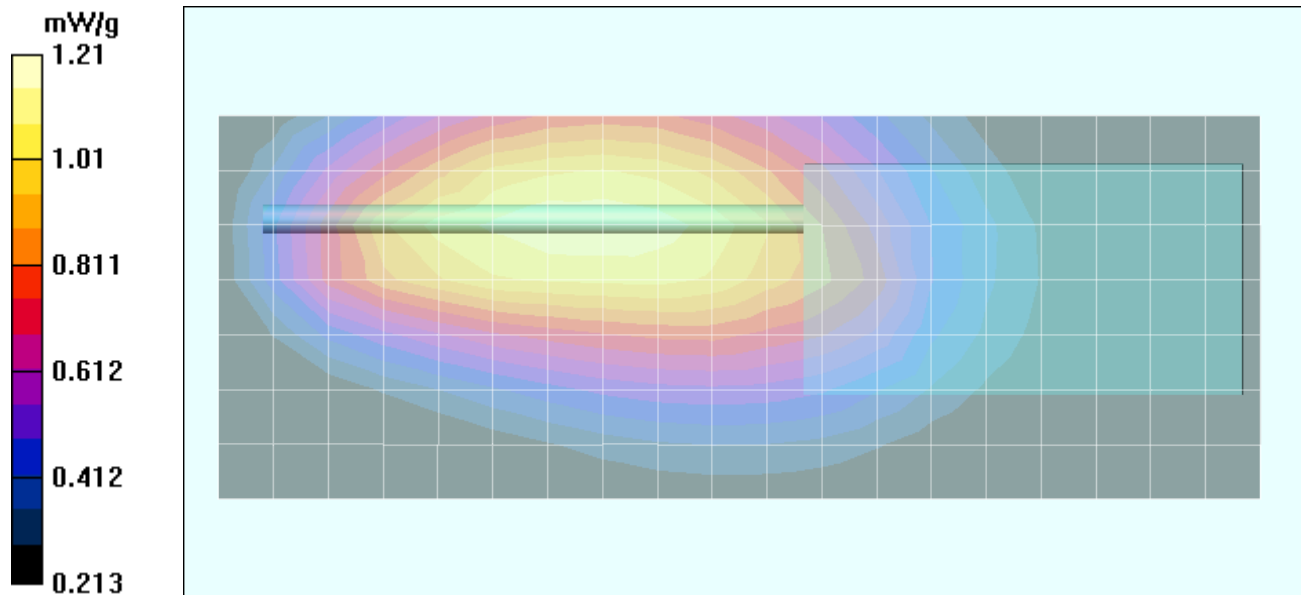

Body-Worn SAR - NiMH Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.09 Watts (Conducted)
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 35.6 V/m; Power Drift = -0.241 dB
 Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.888 mW/g

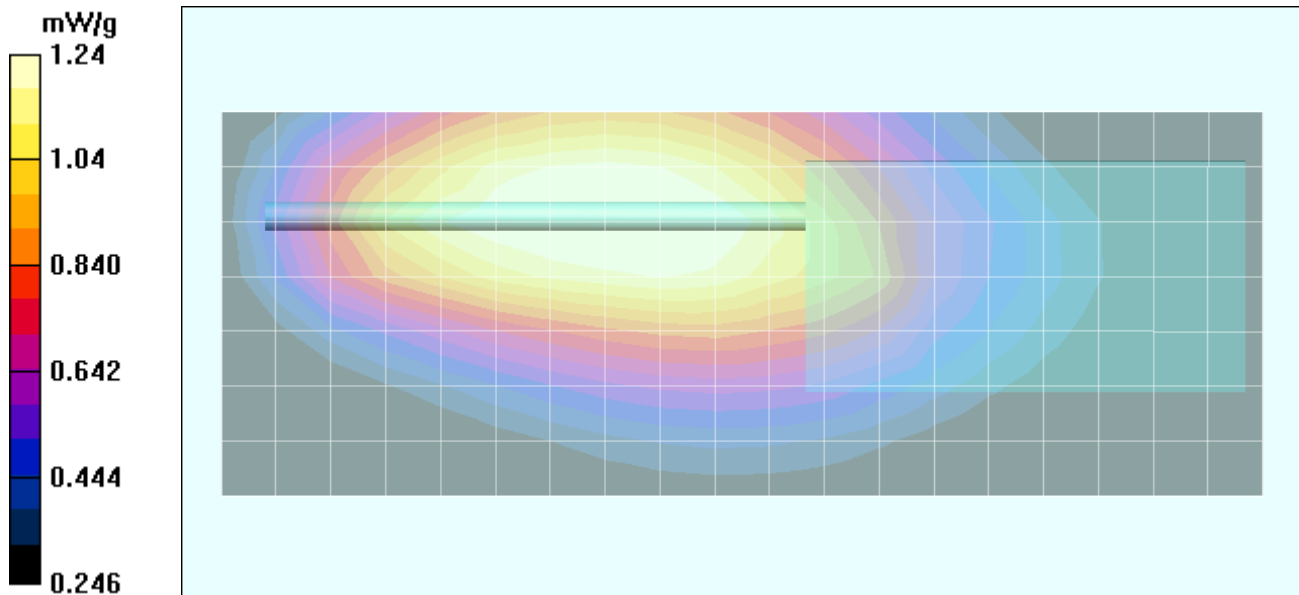

Body-Worn SAR - NiCd Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.09 Watts (Conducted)
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V571S)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):


Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 35.9 V/m; Power Drift = -0.310 dB
 Peak SAR (extrapolated) = 2.06 W/kg
SAR(1 g) = 1.31 mW/g; SAR(10 g) = 0.966 mW/g

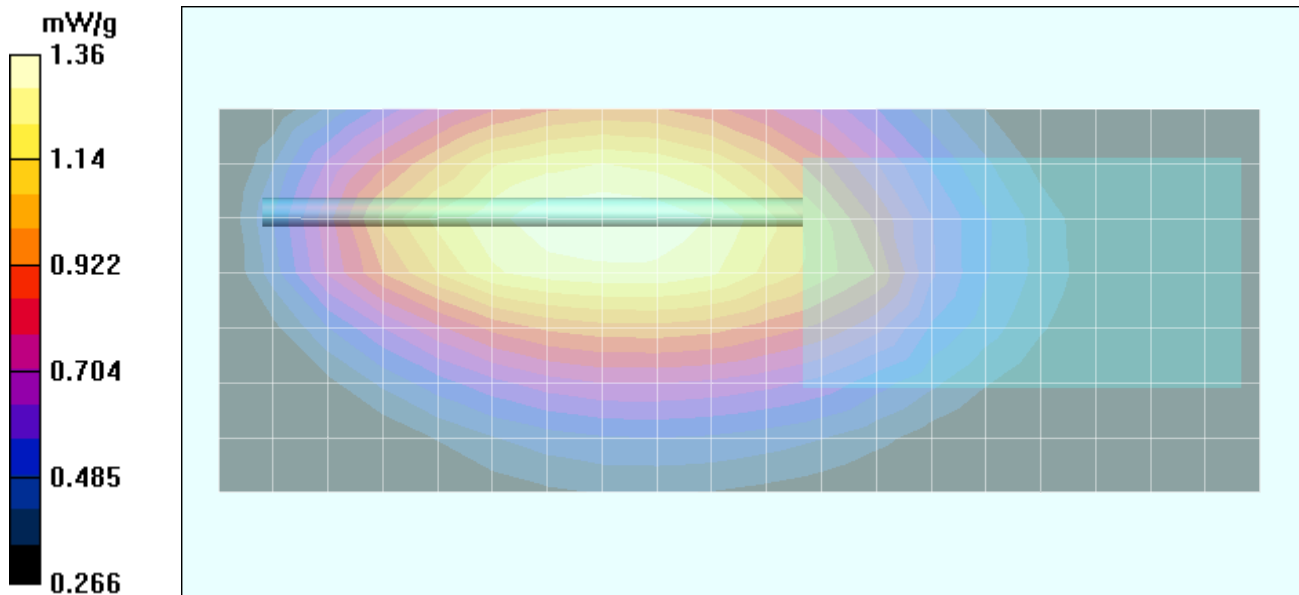

Z-Axis Scan

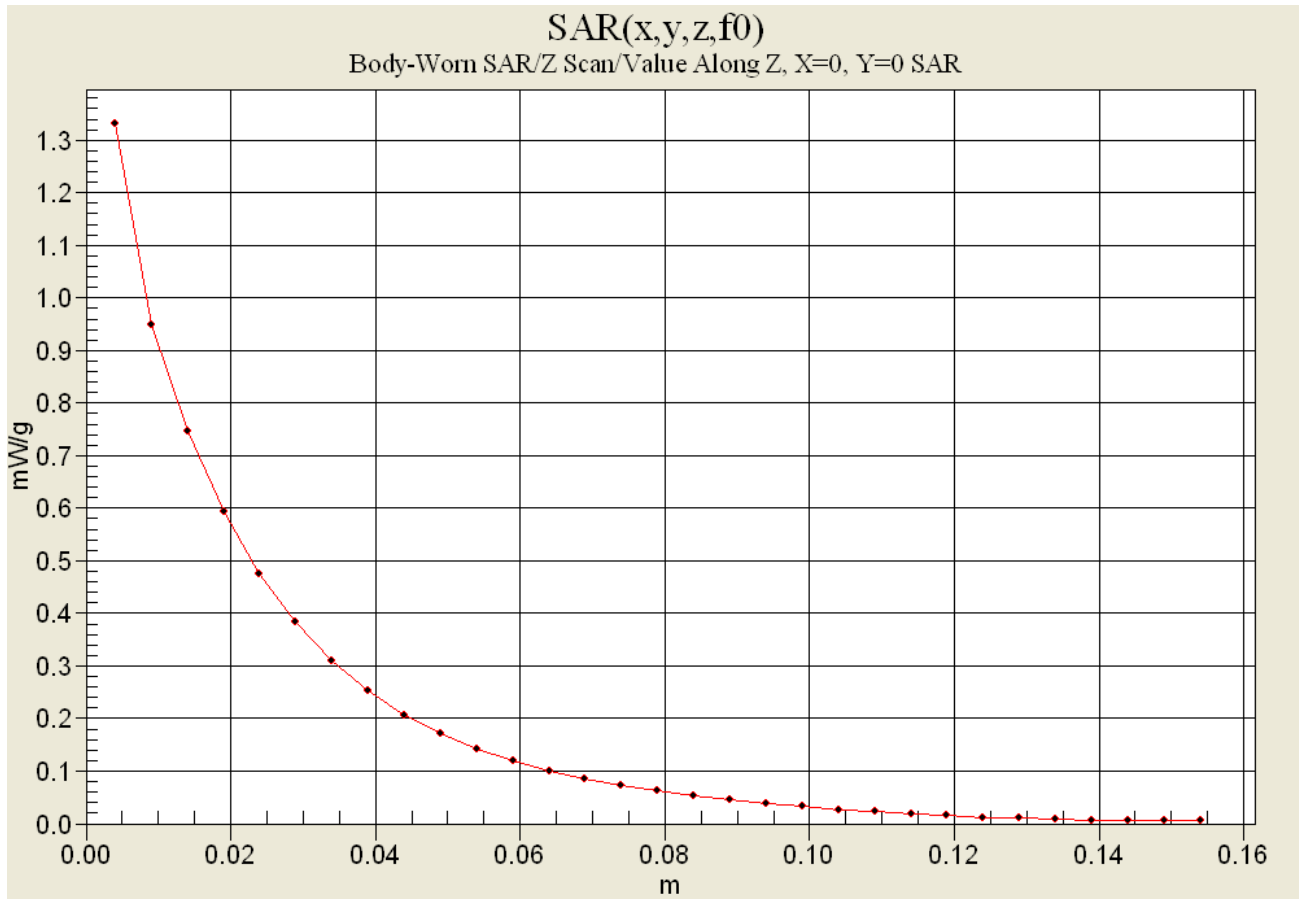

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Headset (P/N: VC-24)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.05 Watts (Conducted)
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 34.3 V/m; Power Drift = -0.256 dB
 Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.851 mW/g

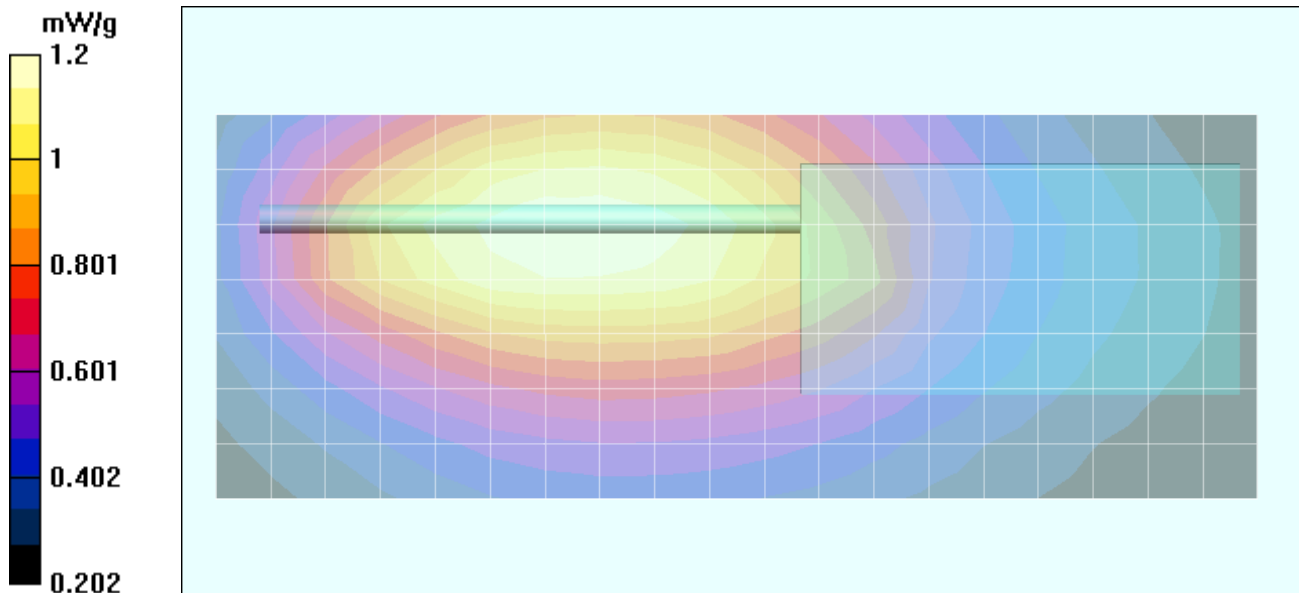

Body-Worn SAR - NiMH Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Microphone (P/N: VC-27)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.06 Watts (Conducted)
 RF Output Power: 5.07 Watts (Conducted) 2nd Maximum
 7.2V 1400mAh NiMH Battery Pack (P/N: FNB-83)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):


Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.7 V/m; Power Drift = 0.0979 dB
 Peak SAR (extrapolated) = 0.947 W/kg
SAR(1 g) = 0.592 mW/g; SAR(10 g) = 0.432 mW/g

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.7 V/m; Power Drift = 0.345 dB
 Peak SAR (extrapolated) = 0.878 W/kg
SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.350 mW/g

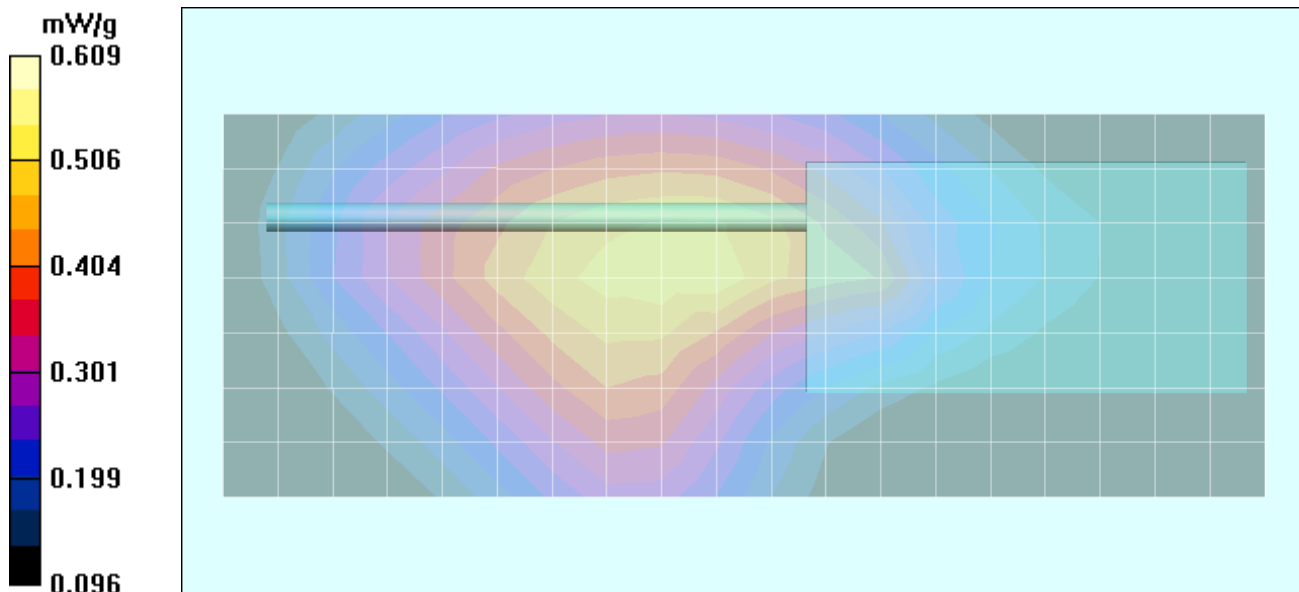

Body-Worn SAR - NiCd Battery - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Microphone (P/N: VC-27)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.07 Watts (Conducted)
 RF Output Power: 5.04 Watts (Conducted) 2nd Maximum
 7.2V 1100mAh NiCd Battery Pack (P/N: FNB-V57IS)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):


Measurement grid: dx=15mm, dy=15mm

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.8 V/m; Power Drift = 0.046 dB
 Peak SAR (extrapolated) = 0.811 W/kg
SAR(1 g) = 0.505 mW/g; SAR(10 g) = 0.366 mW/g

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.8 V/m; Power Drift = 0.202 dB
 Peak SAR (extrapolated) = 0.595 W/kg
SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.212 mW/g

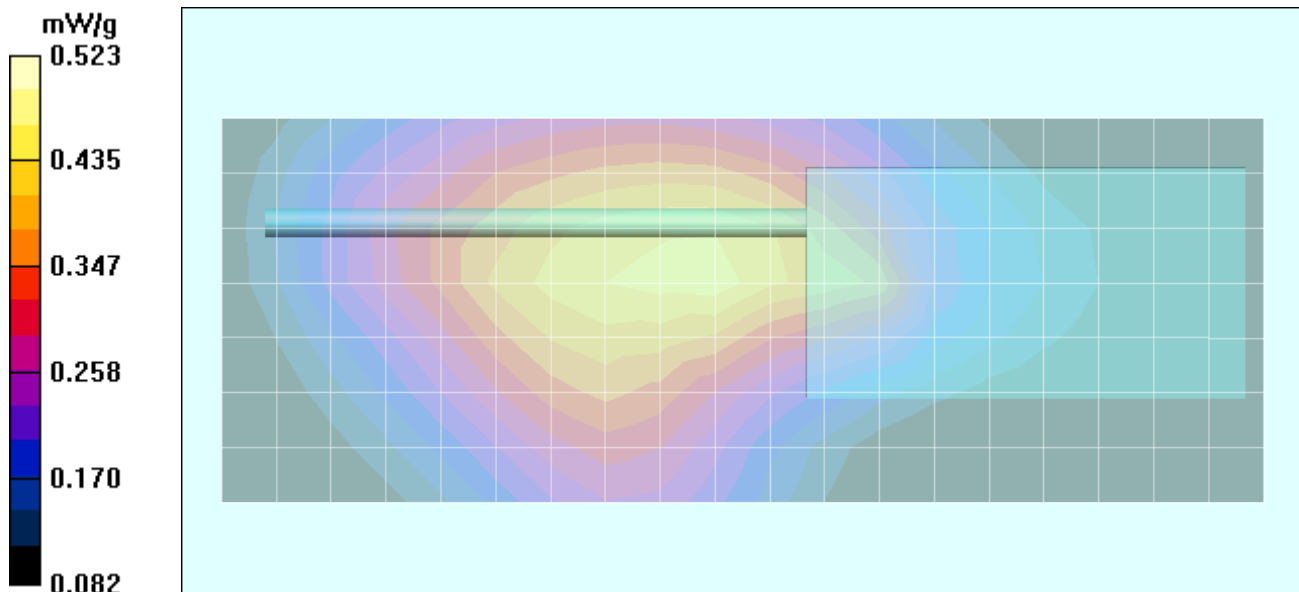

Body-Worn SAR - Alkaline Batteries (Duracell Procell) - Antenna P/N: CAT-460

Date Tested: 04/04/04

DUT: Vertex Standard Model: HX-370S; Type: Portable FM VHF PTT Radio Transceiver; Serial: 4D000001

Ambient Temp: 23.9 °C; Fluid Temp: 22.7 °C; Barometric Pressure: 101.3 kPa; Humidity: 31%

Body-Worn Accessories: Plastic Swivel Belt-Clip (P/N: CMP-14), VOX Microphone (P/N: VC-27)

Communication System: FM VHF
 Frequency: 156 MHz; Duty Cycle: 1:1
 RF Output Power: 5.07 Watts (Conducted)
 RF Output Power: 4.99 Watts (Conducted) 2nd Maximum
 9V AA Alkaline Duracell ProCell Battery Pack (Battery Case P/N: FBA-25)
 Medium: M150 ($\sigma = 0.79$ mho/m; $\epsilon_r = 60.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1590; ConvF(9.2, 9.2, 9.2); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm


Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20 V/m; Power Drift = -0.183 dB
 Peak SAR (extrapolated) = 0.520 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.225 mW/g

Body-Worn - 2.5 cm Swivel Belt-Clip Separation Distance - Mid Channel/Zoom Scan (5x5x7)/Cube 1:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20 V/m; Power Drift = 0.218 dB
 Peak SAR (extrapolated) = 0.608 W/kg
SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.220 mW/g

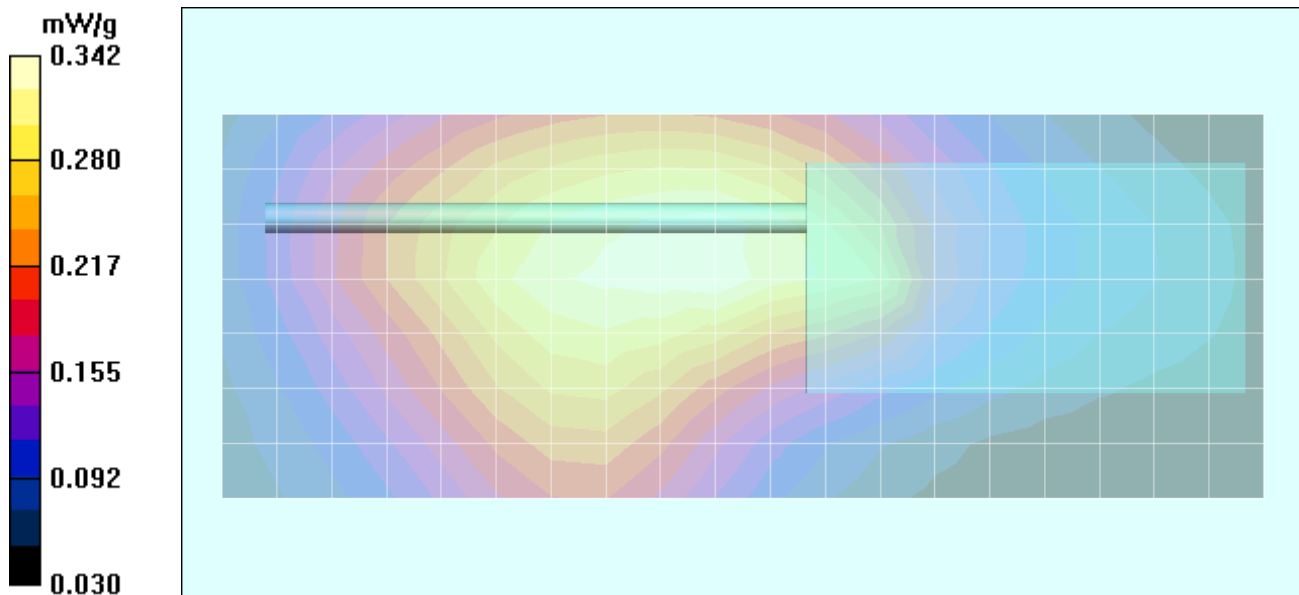

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

System Performance Check - 300 MHz Dipole

Date Tested: 03/30/04

DUT: Dipole 300 MHz; Model: D300V2; Type: System Performance Check; Serial: 135

Ambient Temp: 21.8 °C; Fluid Temp: 20.7 °C; Barometric Pressure: 101.9 kPa; Humidity: 31%

Communication System: CW
 Forward Conducted Power: 250 mW
 Frequency: 300 MHz; Duty Cycle: 1:1
 Medium: 300 HSL ($\sigma = 0.85$ mho/m; $\epsilon_r = 45.1$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

300 MHz System Performance Check/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm

300 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 18.5 V/m; Power Drift = -0.1 dB
 Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.772 mW/g; SAR(10 g) = 0.506 mW/g

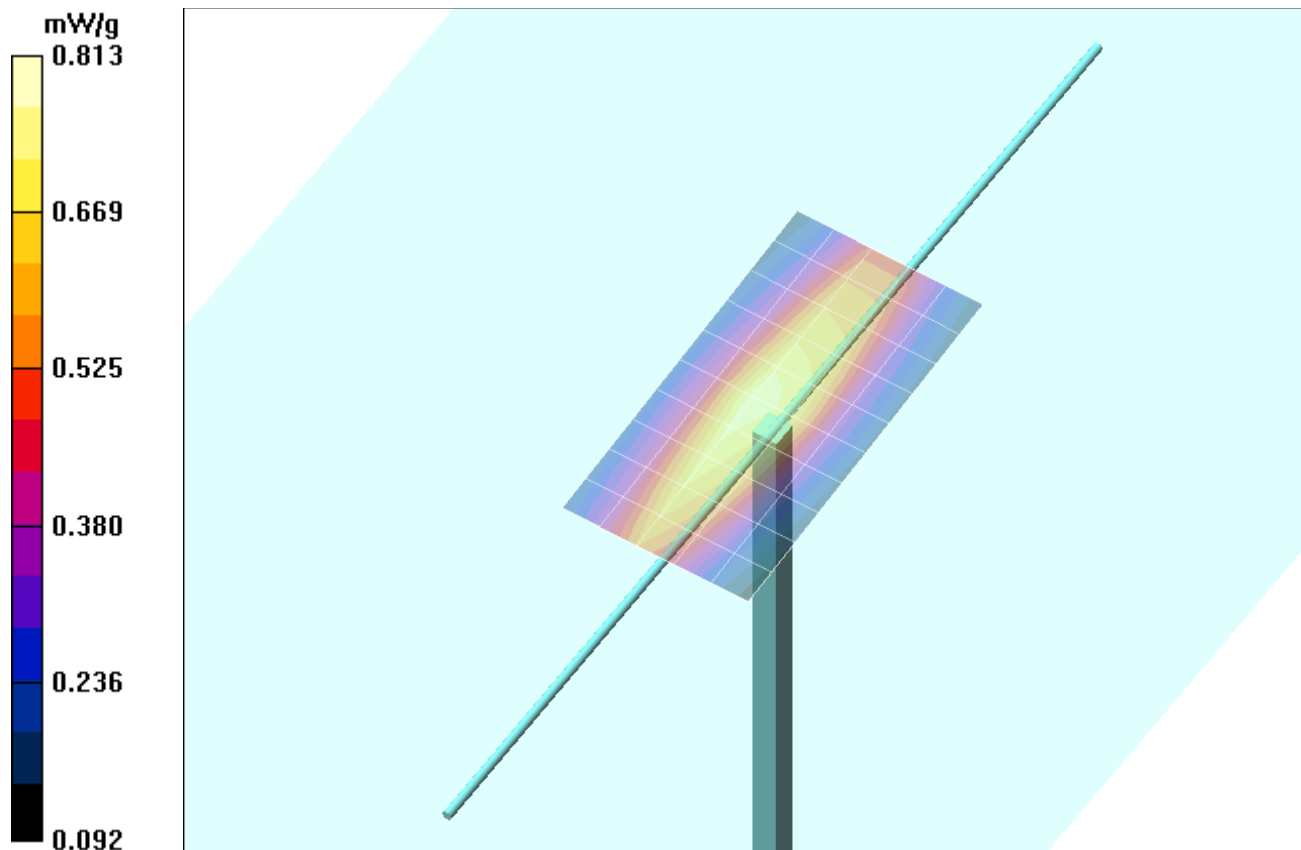

Z-Axis Scan

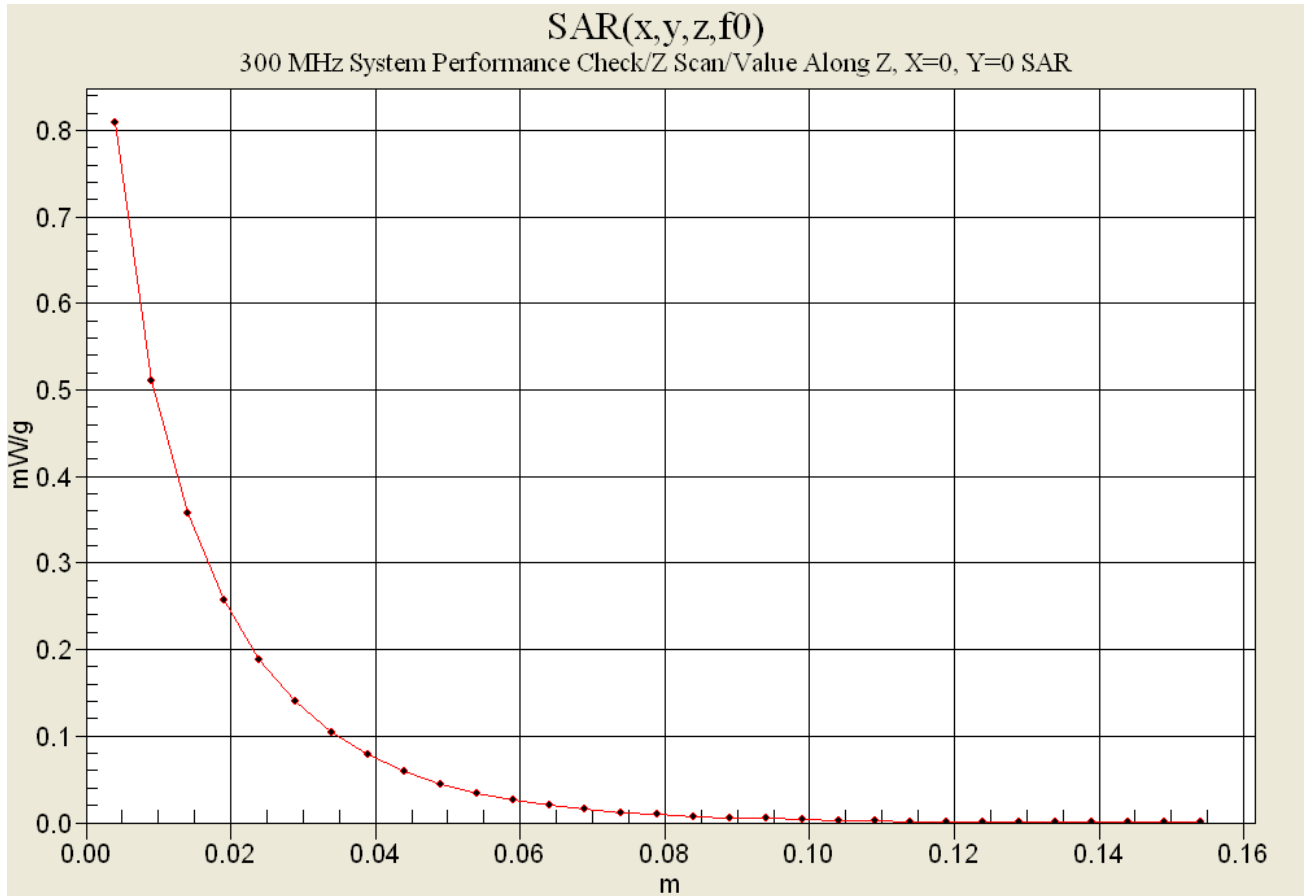

System Performance Check - 300 MHz Dipole

Date Tested: 04/03/04

DUT: Dipole 300 MHz; Model: D300V2; Type: System Performance Check; Serial: 135

Ambient Temp: 21.8 °C; Fluid Temp: 21.2 °C; Barometric Pressure: 101.2 kPa; Humidity: 32%

Communication System: CW
 Forward Conducted Power: 250mW
 Frequency: 300 MHz; Duty Cycle: 1:1
 Medium: 300 HSL ($\sigma = 0.87$ mho/m; $\epsilon_r = 45.9$; $\rho = 1000$ kg/m³)


- Probe: ET3DV6 - SN1590; ConvF(8.3, 8.3, 8.3); Calibrated: 15/05/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn353; Calibrated: 19/12/2003
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASY4, V4.2 Build 37; Postprocessing SW: SEMCAD, V1.8 Build 109

300 MHz System Performance Check/Area Scan (6x11x1):


Measurement grid: dx=15mm, dy=15mm

300 MHz System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.6 V/m; Power Drift = -0.1 dB
 Peak SAR (extrapolated) = 1.32 W/kg
SAR(1 g) = 0.762 mW/g; SAR(10 g) = 0.499 mW/g

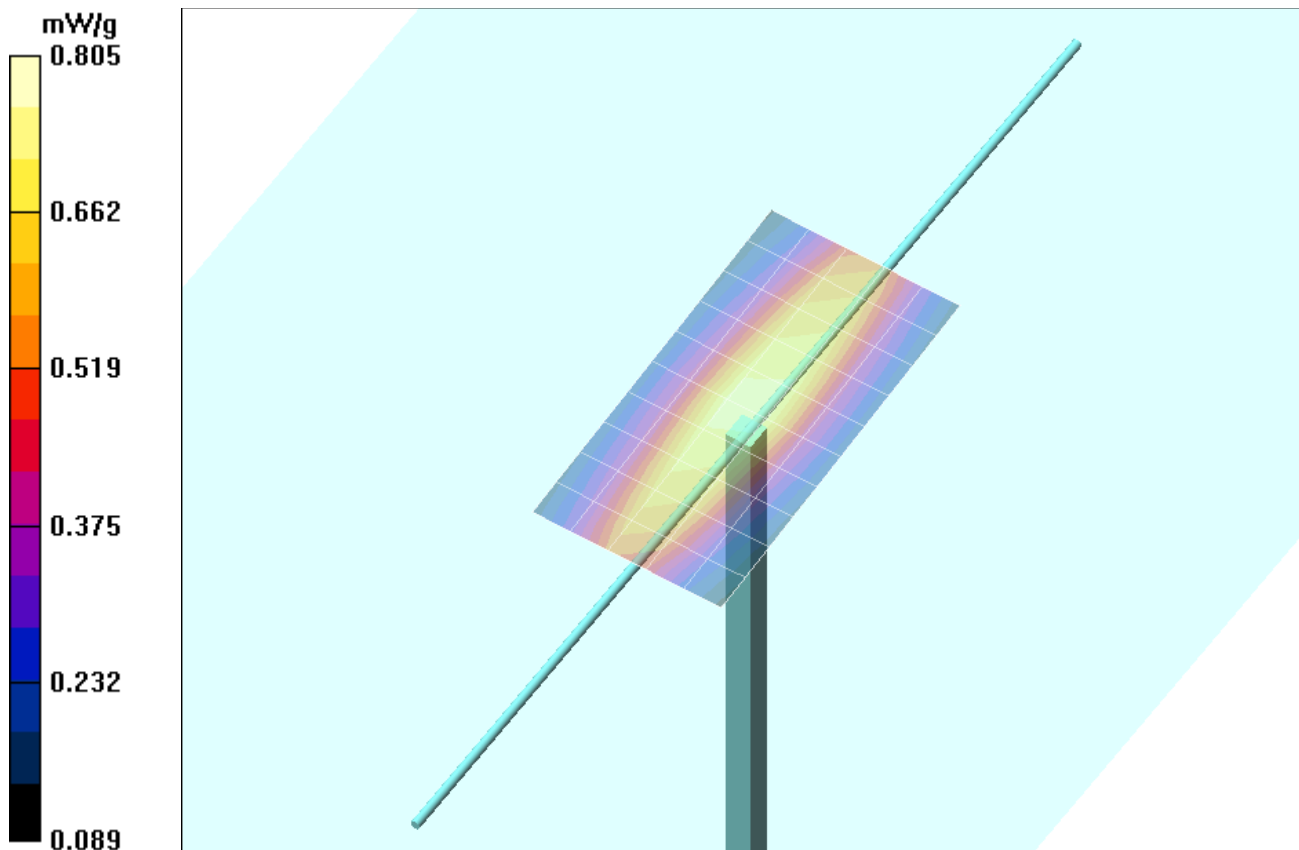

Z-Axis Scan

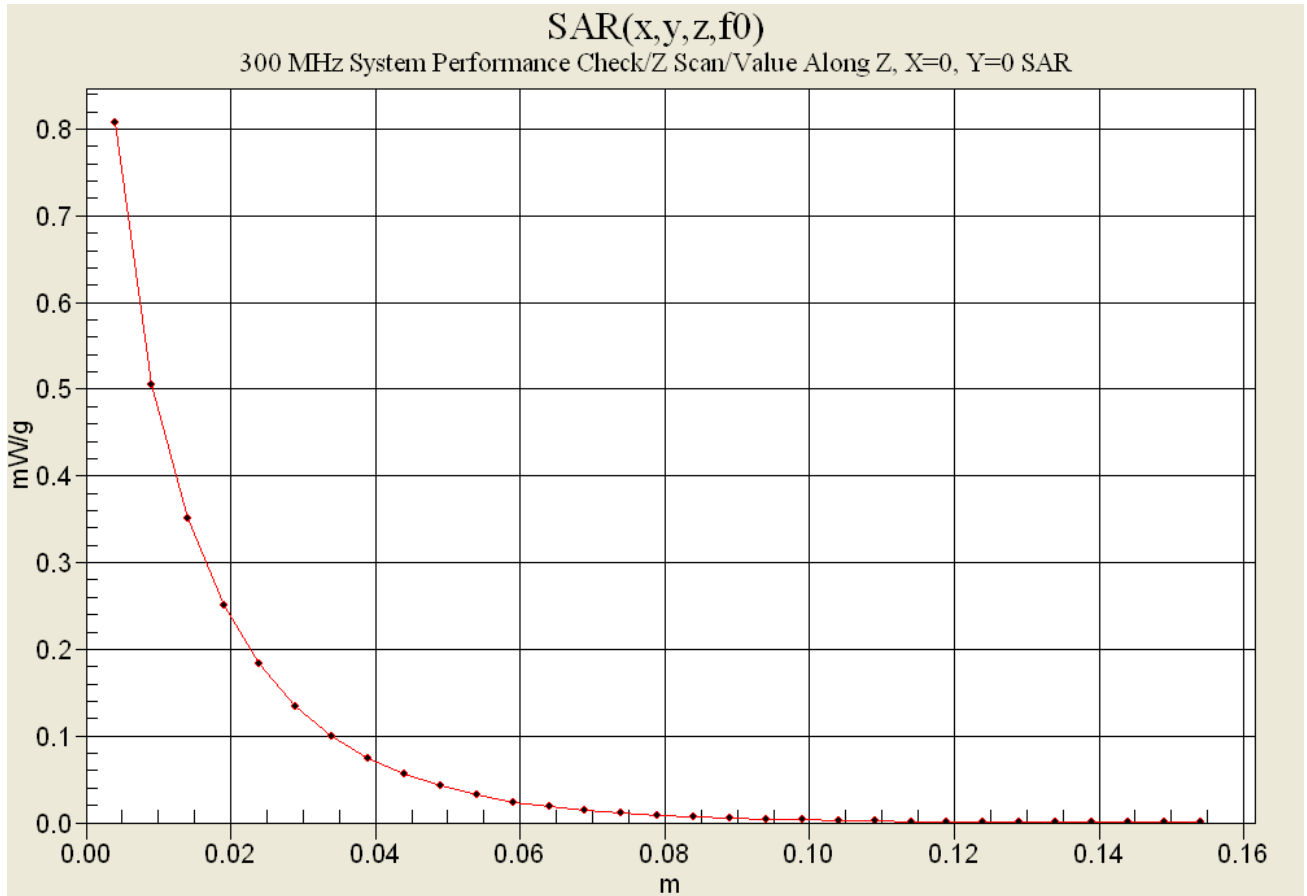

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX C - SYSTEM VALIDATION

300MHz SYSTEM VALIDATION DIPOLE

Type:

300MHz Validation Dipole

Serial Number:

135

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

October 30, 2003

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:

Spencer Watson


Approved by:


Russell W. Pipe

1. Validation Dipole Construction & Electrical Characteristics


The validation dipole was constructed in accordance with the IEEE Std. "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques". The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

Feed point impedance at 300MHz	$\text{Re}\{Z\} = 43.586\Omega$
	$\text{Im}\{Z\} = -4.5313\Omega$
Return Loss at 300MHz	-21.693dB

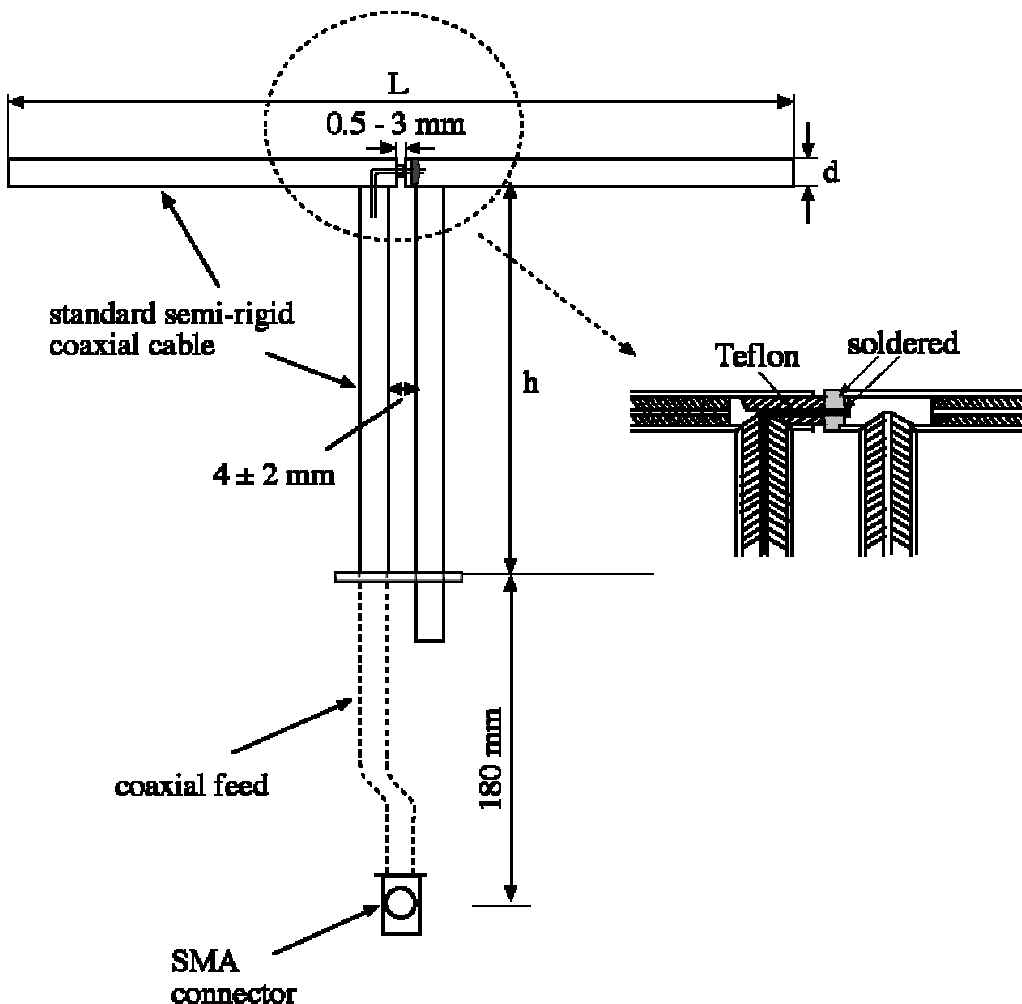

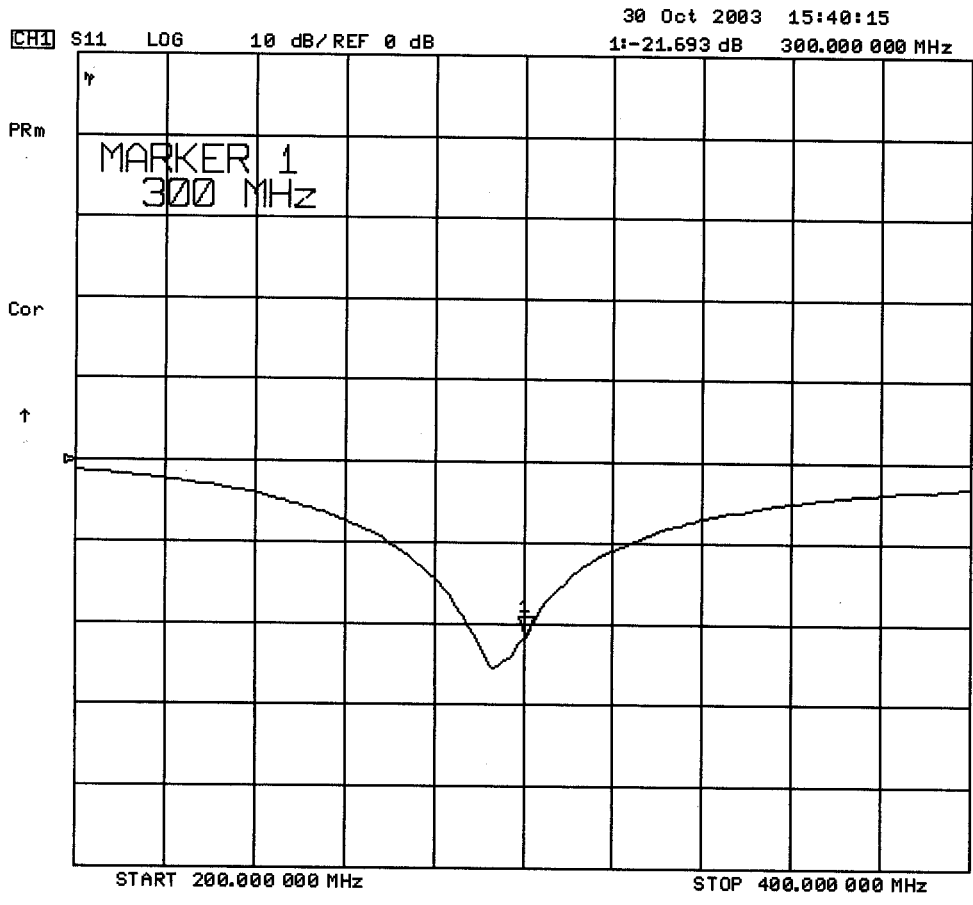

30 Oct 2003 15:41:51
[CH1] S11 1 U FS 1: 43.586 Ω -4.5313 Ω 117.08 pF 300.000 000 MHz

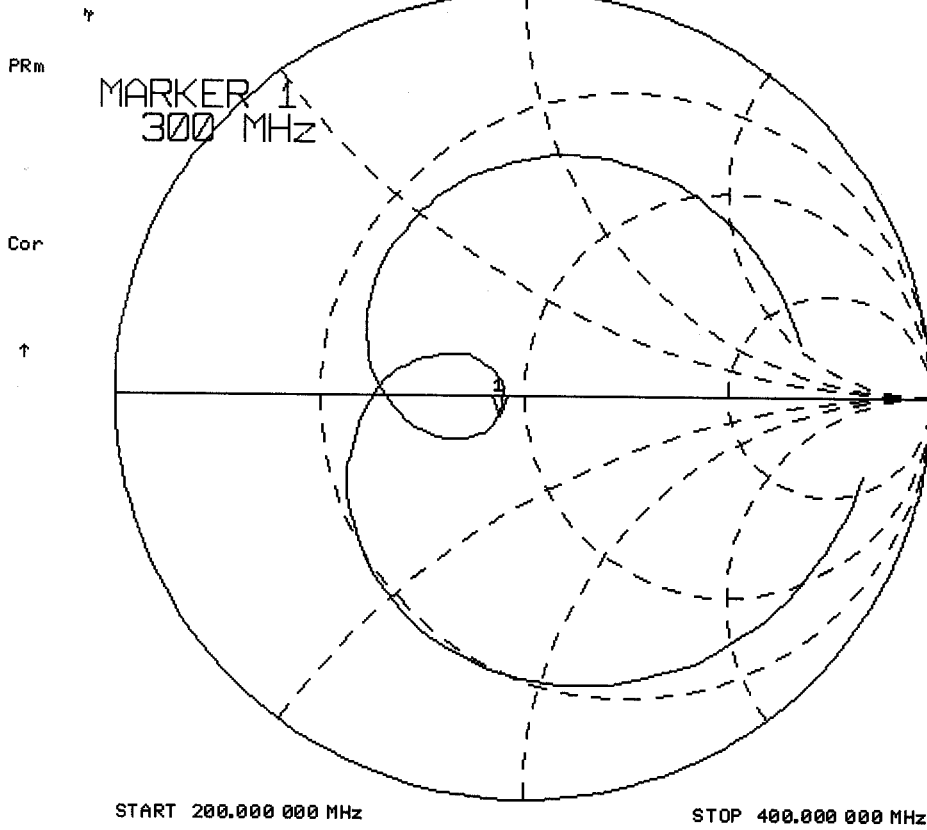

2. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	H (mm)	D (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

3. Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material. The inner dimensions of the phantom are as follows:




Length: 83.5 cm

Width: 36.9 cm


Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

4. Dimensions of Plexiglas Planar Phantom

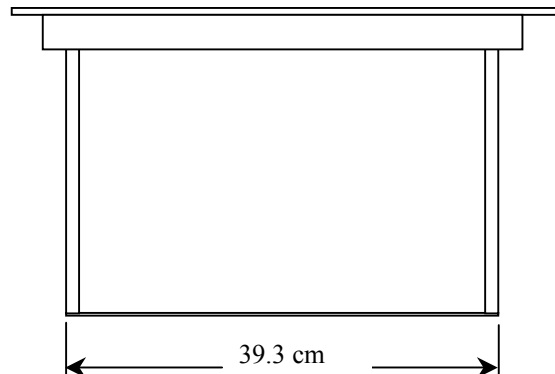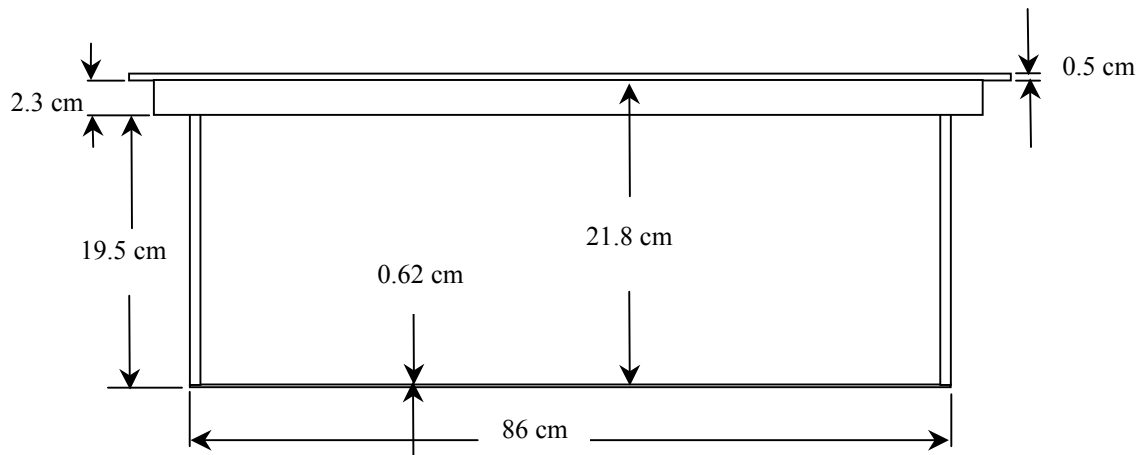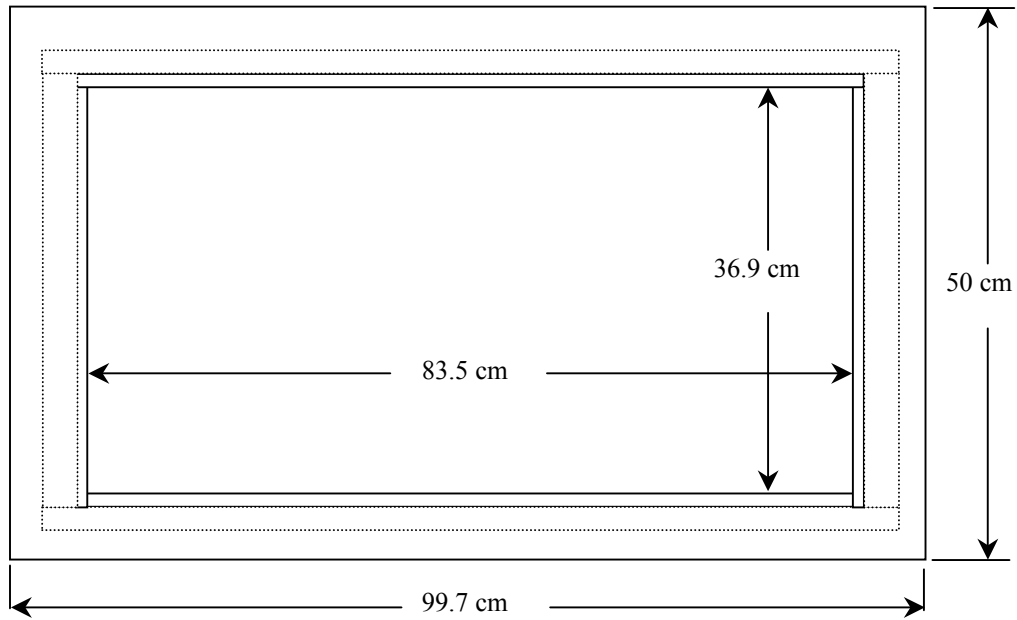

5. 300MHz System Validation Setup

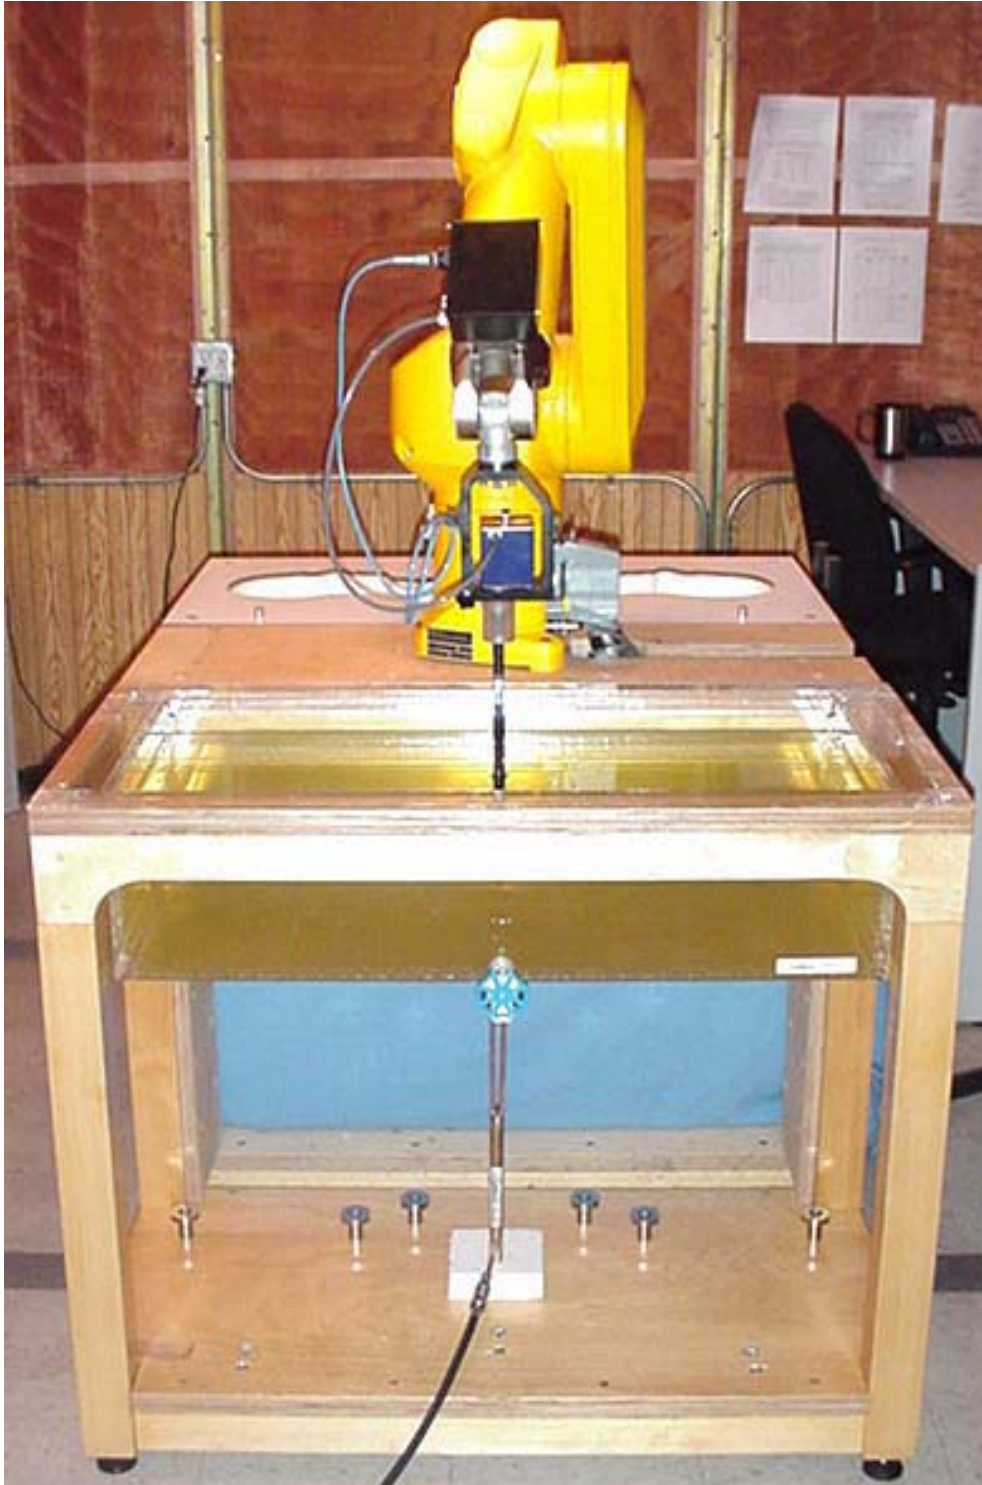

300MHz System Validation Setup



6. Measurement Conditions

The planar phantom was filled with simulated brain tissue having the following parameters at 300MHz:

Relative Permittivity:	45.7
Conductivity:	0.88 mho/m
Fluid Temperature:	22.2°C
Fluid Depth:	≥ 15cm

Environmental Conditions:


Ambient Temperature:	22.1°C
Humidity:	56%
Barometric Pressure:	103.4 kPa

The 300MHz simulated tissue mixture consists of the following ingredients:

Ingredient	Percentage by weight
Water	37.56%
Sugar	55.32%
Salt	5.95%
HEC	0.98%
Dowicil 75	0.19%
300MHz Target Dielectric Parameters at 22°C	$\epsilon_r = 45.3$ $\sigma = 0.87 \text{ S/m}$

7. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

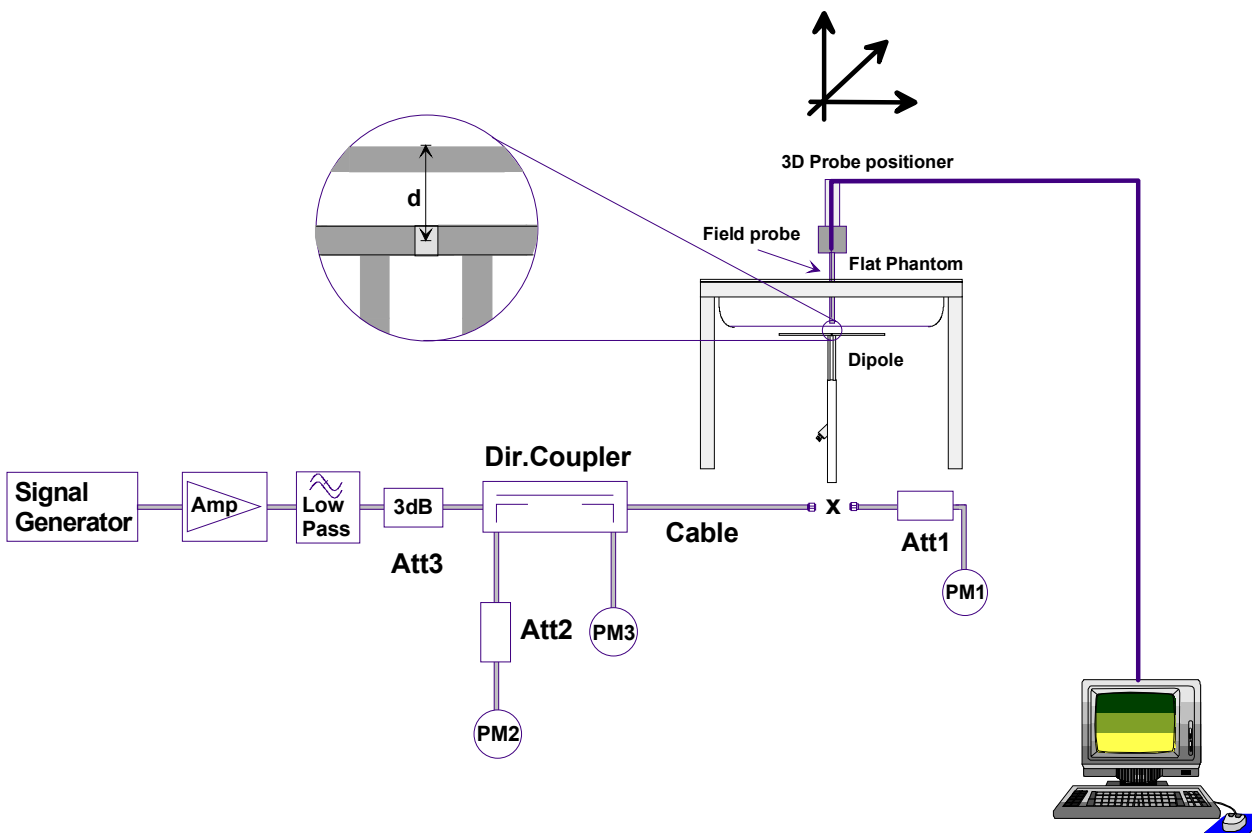

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

8. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	0.781	3.12	0.497	1.99	1.39
Test 2	0.779	3.12	0.495	1.98	1.39
Test 3	0.780	3.12	0.496	1.98	1.38
Test 4	0.788	3.15	0.501	2.00	1.41
Test 5	0.787	3.15	0.498	1.99	1.39
Test 6	0.780	3.12	0.492	1.97	1.38
Test 7	0.776	3.10	0.494	1.98	1.37
Test 8	0.784	3.14	0.500	2.00	1.39
Test 9	0.785	3.14	0.500	2.00	1.39
Test 10	0.784	3.14	0.496	1.98	1.40
Average Value	0.782	3.13	0.497	1.99	1.39

The results have been normalized to 1W (forward power) into the dipole.

IEEE Target over 1cm³ (1g) of tissue: 0.750 mW/g (+/- 10%)

Averaged over 1cm³ (1g) of tissue: 3.13 mW/g

Averaged over 10cm³ (10g) of tissue: 1.99 mW/g

Test Date: 10/30/03

DUT: Dipole 300 MHz; Model: D300V2; Type: System Validation; Serial: 135

Ambient Temp: 22.1°C; Fluid Temp: 22.2°C; Barometric Pressure: 103.4 kPa; Humidity: 56%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 300 MHz; Duty Cycle: 1:1

Medium: 300 HSL ($\sigma = 0.88$ mho/m, $\epsilon_r = 45.7$, $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.9, 7.9, 7.9); Calibrated: 26/02/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 19/05/2003
- Phantom: Validation Planar; Type: Plexiglas; Serial: 137
- Measurement SW: DASy4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 116

300 MHz Validation/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 30.4 V/m

Power Drift = -0.1 dB


300 MHz Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.781 mW/g; SAR(10 g) = 0.497 mW/g

Reference Value = 30.4 V/m

Power Drift = -0.1 dB

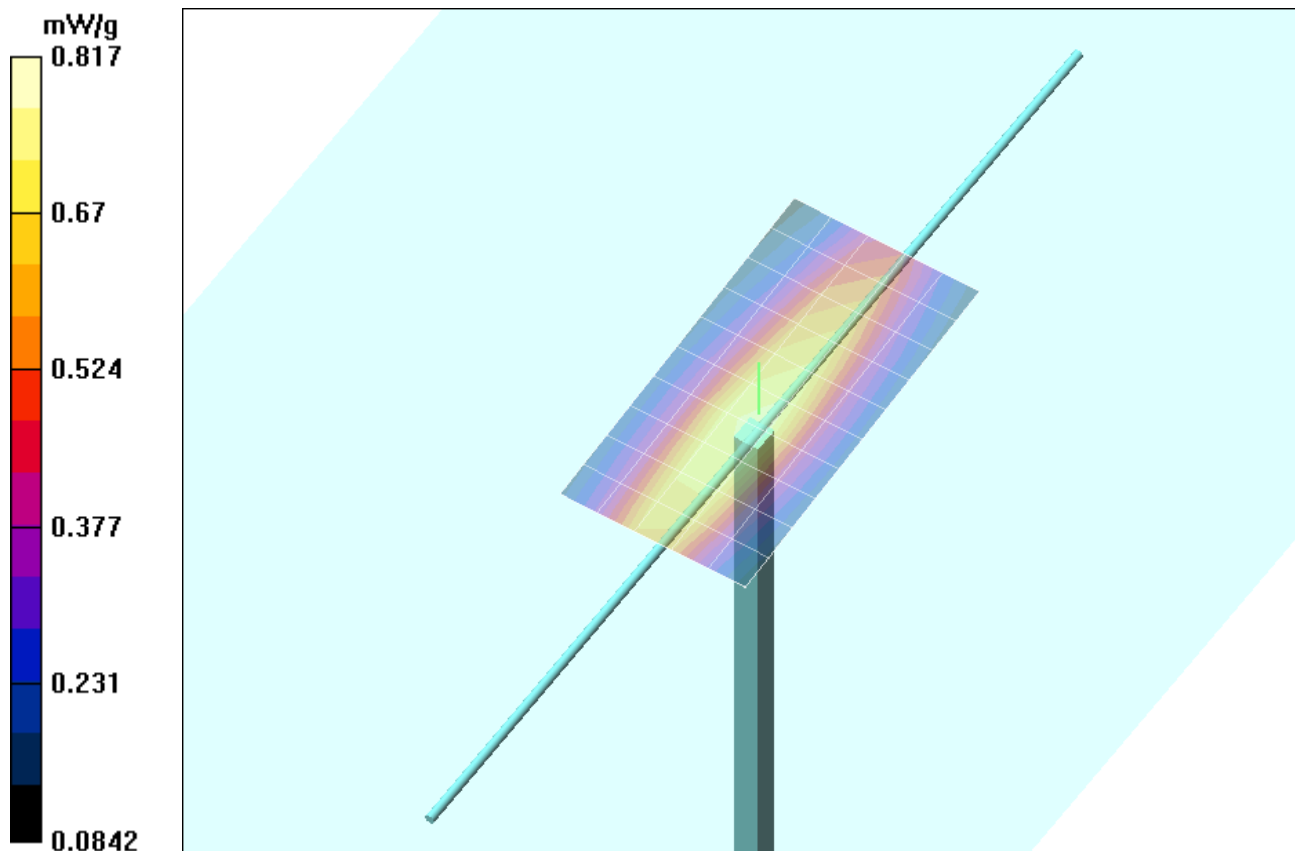

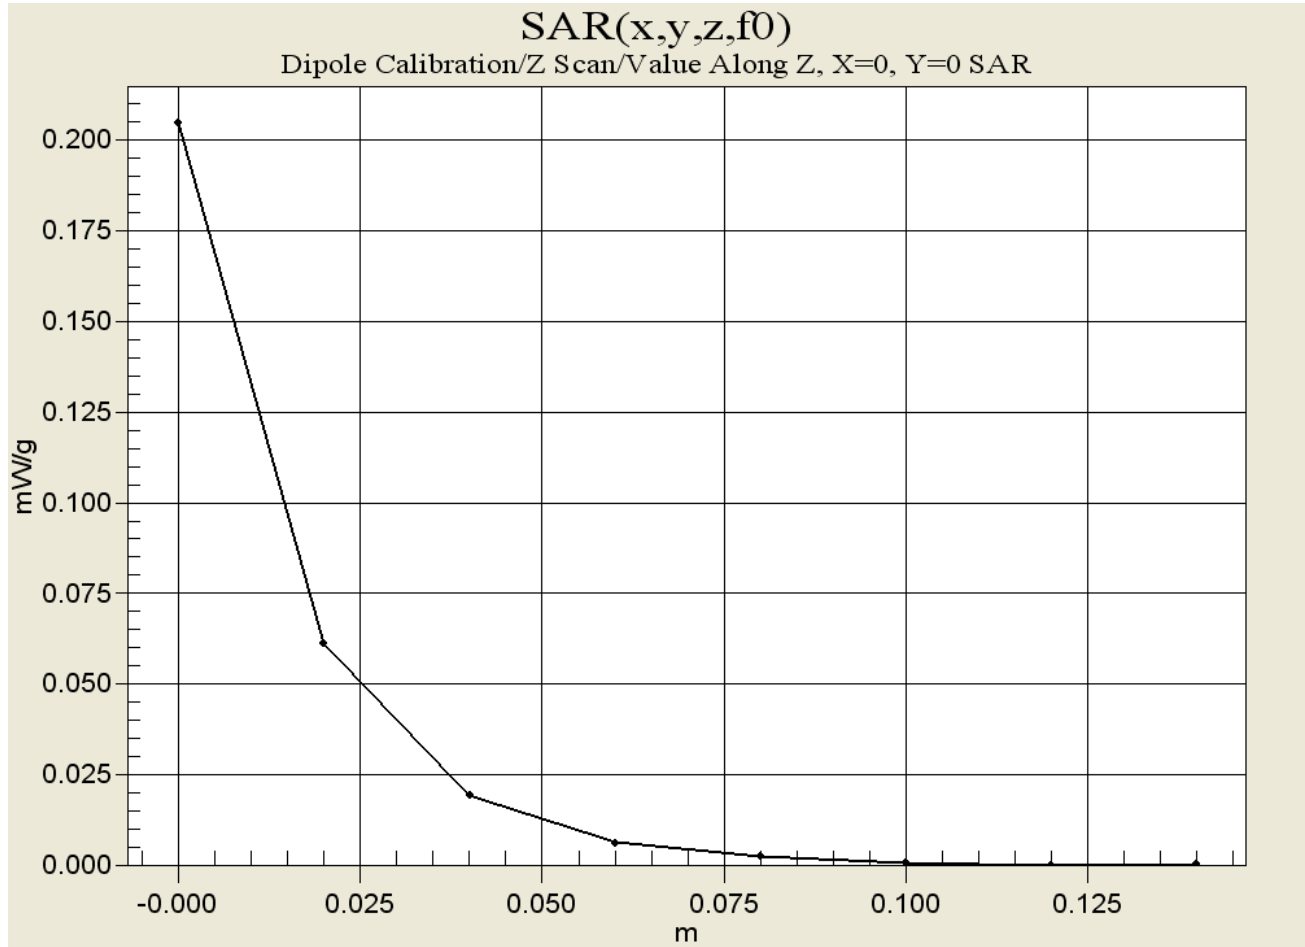

300MHz System Validation

Measured Fluid Dielectric Parameters (Brain)



October 30, 2003

Frequency	ϵ'	ϵ''
200.000000 MHz	49.8336	71.7361
210.000000 MHz	49.2398	69.1403
220.000000 MHz	48.9026	66.6656
230.000000 MHz	48.4363	64.3972
240.000000 MHz	47.9018	62.2373
250.000000 MHz	47.4646	60.4416
260.000000 MHz	47.0839	58.8112
270.000000 MHz	46.6772	57.3352
280.000000 MHz	46.4143	55.8759
290.000000 MHz	46.0204	54.5734
300.000000 MHz	45.6863	52.9882
310.000000 MHz	45.3261	51.7924
320.000000 MHz	44.9882	50.6430
330.000000 MHz	44.6549	49.5121
340.000000 MHz	44.3168	48.5356
350.000000 MHz	44.0824	47.5910
360.000000 MHz	43.7780	46.7661
370.000000 MHz	43.5461	45.8627
380.000000 MHz	43.3671	45.0444
390.000000 MHz	43.1052	44.2129
400.000000 MHz	42.8360	43.5735

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX D - PROBE CALIBRATION

Client **Celltech Labs**

CALIBRATION CERTIFICATE																															
Object(s)	ET3DV6 - SN:1590																														
Calibration procedure(s)	QA CAL-01.v2 Calibration procedure for dosimetric E-field probes																														
Calibration date:	May 15, 2003																														
Condition of the calibrated item	In Tolerance (according to the specific calibration document)																														
<p>This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Model Type</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>RF generator HP 8684C</td> <td>US3642U01700</td> <td>4-Aug-99 (SPEAG, in house check Aug-02)</td> <td>In house check: Aug-05</td> </tr> <tr> <td>Power sensor E4412A</td> <td>MY41495277</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41092180</td> <td>18-Sep-02 (Agilent, No. 20020918)</td> <td>Sep-03</td> </tr> <tr> <td>Power meter EPM E4419B</td> <td>GB41293874</td> <td>2-Apr-03 (METAS, No 252-0250)</td> <td>Apr-04</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US38432426</td> <td>3-May-00 (Agilent, No. 8702K094602)</td> <td>In house check: May 03</td> </tr> <tr> <td>Fluke Process Calibrator Type 702</td> <td>SN: 6295803</td> <td>3-Sep-01 (ELCAL, No.2360)</td> <td>Sep-03</td> </tr> </tbody> </table>				Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05	Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04	Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	Sep-03	Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04	Network Analyzer HP 8753E	US38432426	3-May-00 (Agilent, No. 8702K094602)	In house check: May 03	Fluke Process Calibrator Type 702	SN: 6295803	3-Sep-01 (ELCAL, No.2360)	Sep-03
Model Type	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																												
RF generator HP 8684C	US3642U01700	4-Aug-99 (SPEAG, in house check Aug-02)	In house check: Aug-05																												
Power sensor E4412A	MY41495277	2-Apr-03 (METAS, No 252-0250)	Apr-04																												
Power sensor HP 8481A	MY41092180	18-Sep-02 (Agilent, No. 20020918)	Sep-03																												
Power meter EPM E4419B	GB41293874	2-Apr-03 (METAS, No 252-0250)	Apr-04																												
Network Analyzer HP 8753E	US38432426	3-May-00 (Agilent, No. 8702K094602)	In house check: May 03																												
Fluke Process Calibrator Type 702	SN: 6295803	3-Sep-01 (ELCAL, No.2360)	Sep-03																												
Calibrated by:	Name Nicola Vetterli	Function Technician	Signature 																												
Approved by:	Name Katja Polovic	Function Laboratory Director	Signature 																												
Date issued: May 15, 2003																															
<p>This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.</p>																															

Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibration:	April 26, 2002
Recalibrated:	May 15, 2003

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

DASY - Parameters of Probe: ET3DV6 SN:1590**Sensitivity in Free Space**

NormX	1.76 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.91 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.66 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	92	mV
DCP Y	92	mV
DCP Z	92	mV

Sensitivity in Tissue Simulating Liquid

Head 900 MHz $\epsilon_r = 41.5 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ mho/m

Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	7.0 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	7.0 $\pm 9.5\%$ (k=2)	Alpha 0.33
ConvF Z	7.0 $\pm 9.5\%$ (k=2)	Depth 2.56

Head 1800 MHz $\epsilon_r = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ mho/m

Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.5 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	5.5 $\pm 9.5\%$ (k=2)	Alpha 0.44
ConvF Z	5.5 $\pm 9.5\%$ (k=2)	Depth 2.69

Boundary Effect

Head 900 MHz Typical SAR gradient: 5 % per mm

Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%]	Without Correction Algorithm	8.7	5.0
SAR _{be} [%]	With Correction Algorithm	0.3	0.5





Head 1800 MHz Typical SAR gradient: 10 % per mm



Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%]	Without Correction Algorithm	12.3	8.5
SAR _{be} [%]	With Correction Algorithm	0.2	0.1

Sensor Offset


Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.4 \pm 0.2	mm

Receiving Pattern (ϕ), $\theta = 0^\circ$

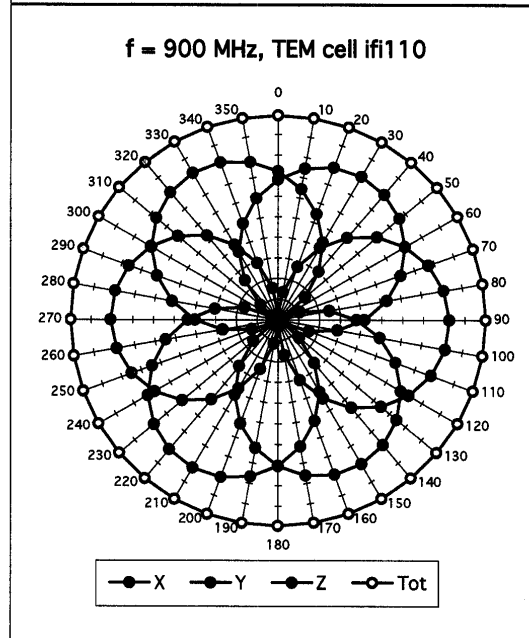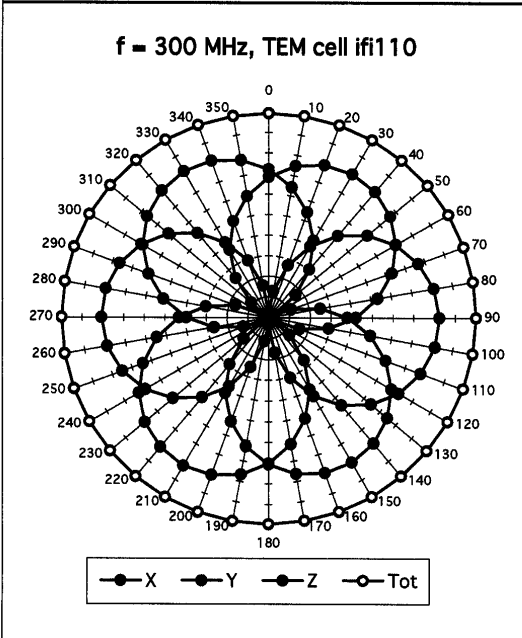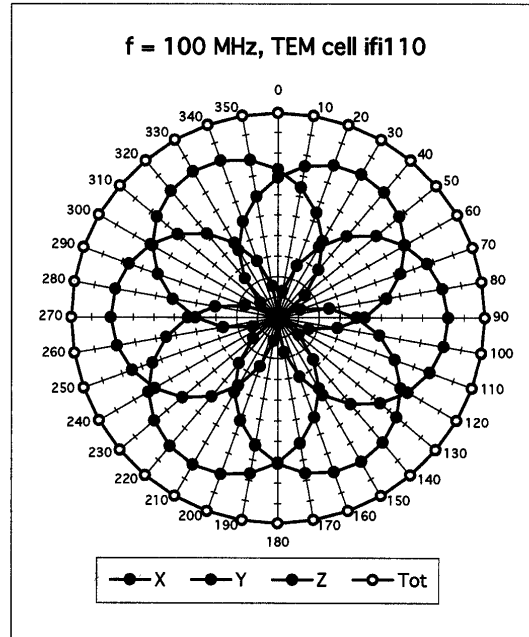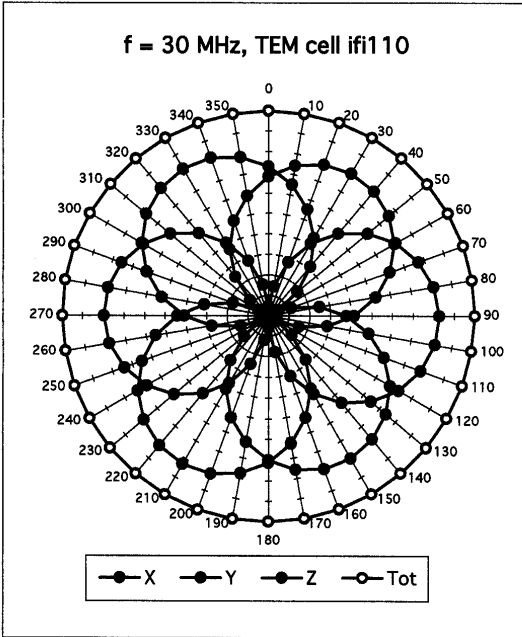

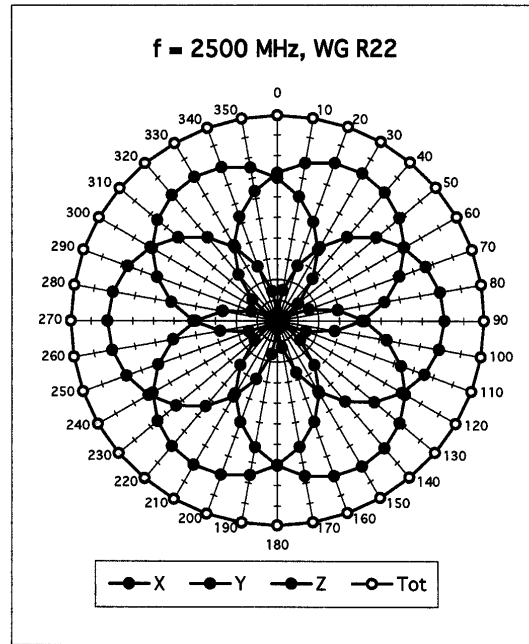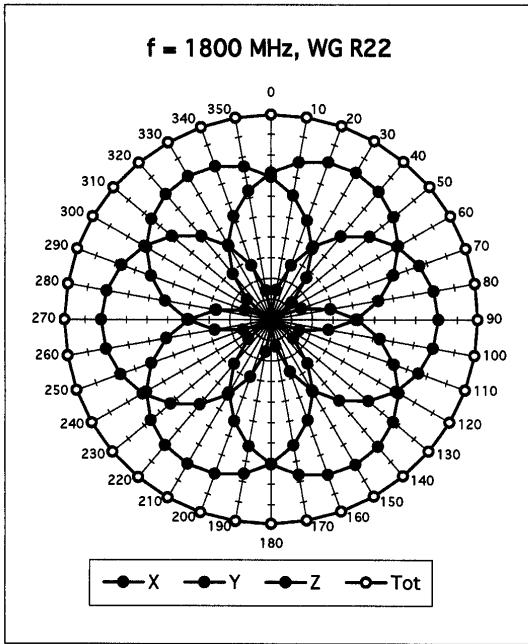


Isotropy Error (ϕ), $\theta = 0^\circ$

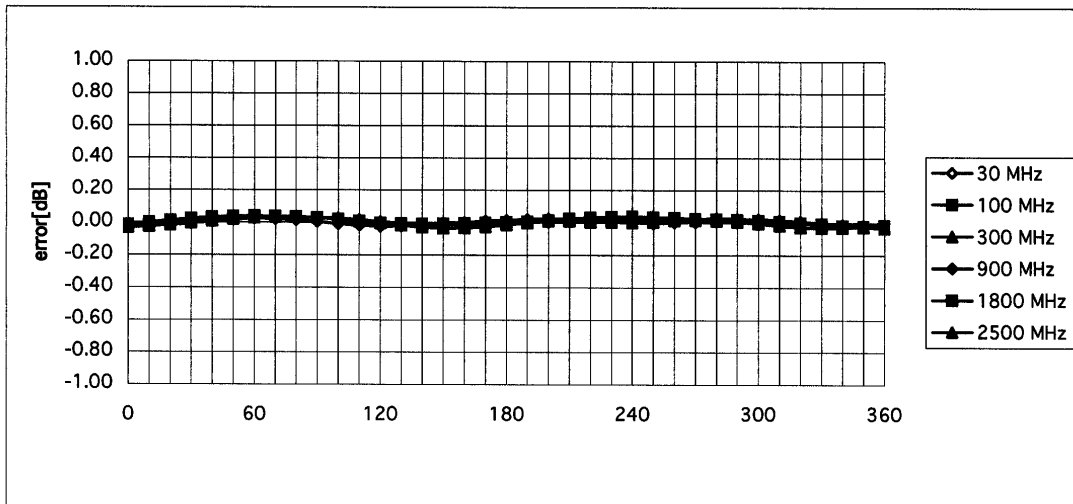



Frequency Response of E-Field

(TEM-Cell:ifi110, Waveguide R22)

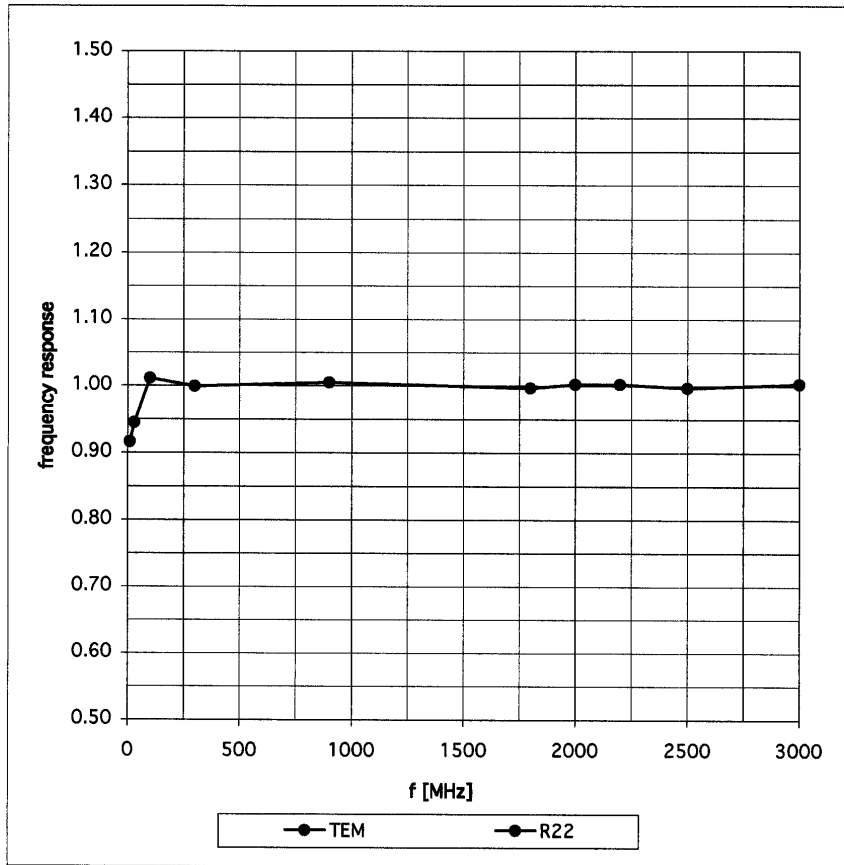


Dynamic Range f(SAR_{brain})

(Waveguide R22)

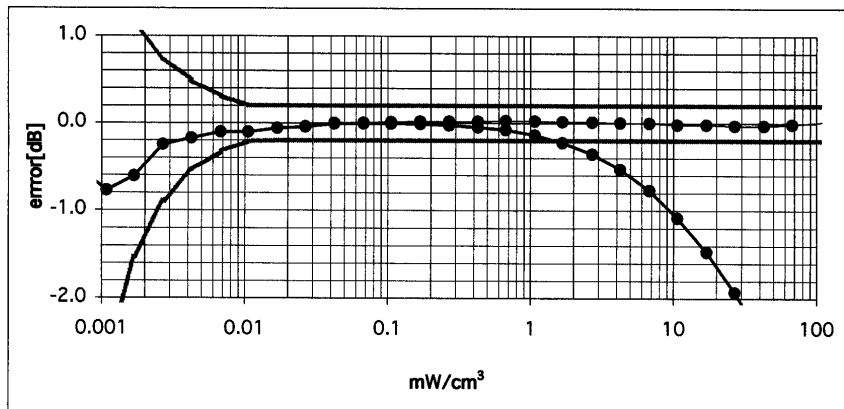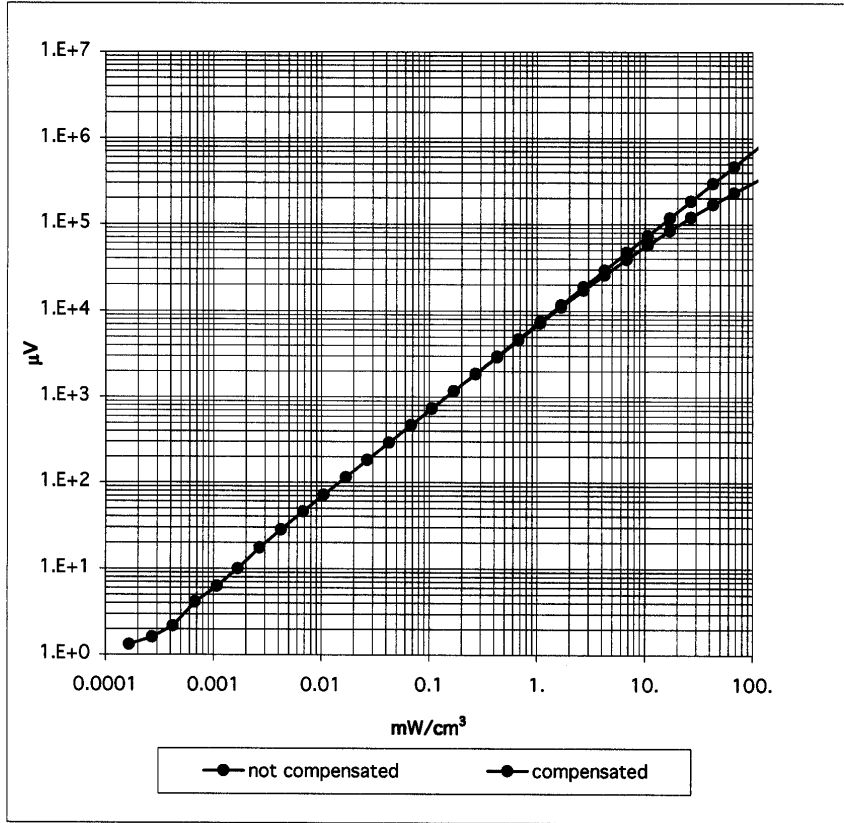

Conversion Factor Assessment

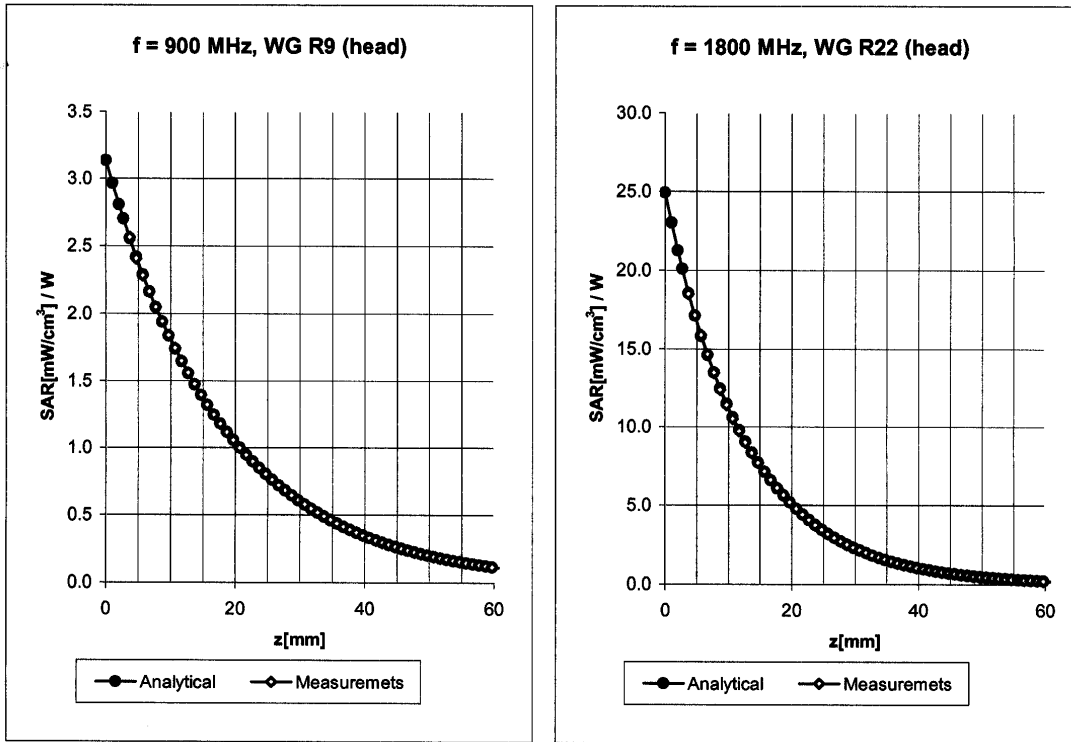

Head 900 MHz $\epsilon_r = 41.5 \pm 5\%$ $\sigma = 0.97 \pm 5\%$ mho/m

Valid for f=800-1000 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X


ConvF X	7.0 ± 9.5% (k=2)	Boundary effect:	
ConvF Y	7.0 ± 9.5% (k=2)	Alpha	0.33
ConvF Z	7.0 ± 9.5% (k=2)	Depth	2.56

Head 1800 MHz $\epsilon_r = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\%$ mho/m

Valid for f=1710-1910 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.5 ± 9.5% (k=2)	Boundary effect:	
ConvF Y	5.5 ± 9.5% (k=2)	Alpha	0.44
ConvF Z	5.5 ± 9.5% (k=2)	Depth	2.69

Conversion Factor Assessment

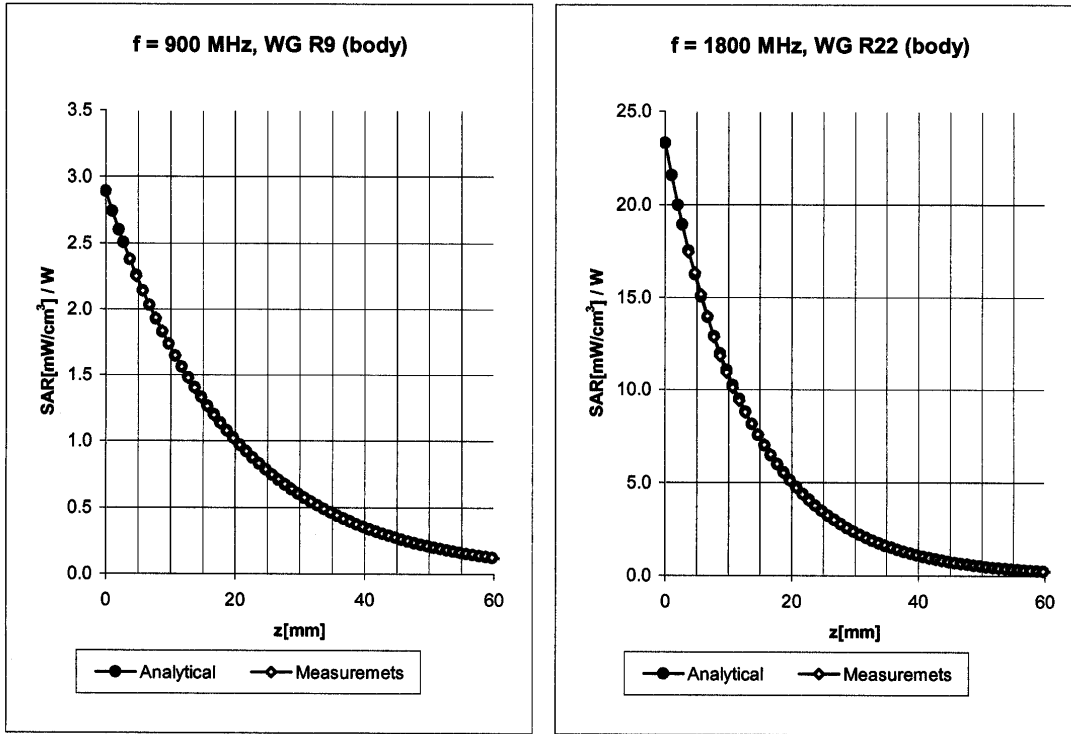

Body 900 MHz $\epsilon_r = 55.0 \pm 5\%$ $\sigma = 1.05 \pm 5\%$ mho/m

Valid for f=800-1000 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C


ConvF X	6.8 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	6.8 $\pm 9.5\%$ (k=2)	Alpha 0.34
ConvF Z	6.8 $\pm 9.5\%$ (k=2)	Depth 2.61

Body 1800 MHz $\epsilon_r = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\%$ mho/m

Valid for f=1710-1910 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	5.0 $\pm 9.5\%$ (k=2)	Boundary effect:
ConvF Y	5.0 $\pm 9.5\%$ (k=2)	Alpha 0.52
ConvF Z	5.0 $\pm 9.5\%$ (k=2)	Depth 2.69

Conversion Factor Assessment

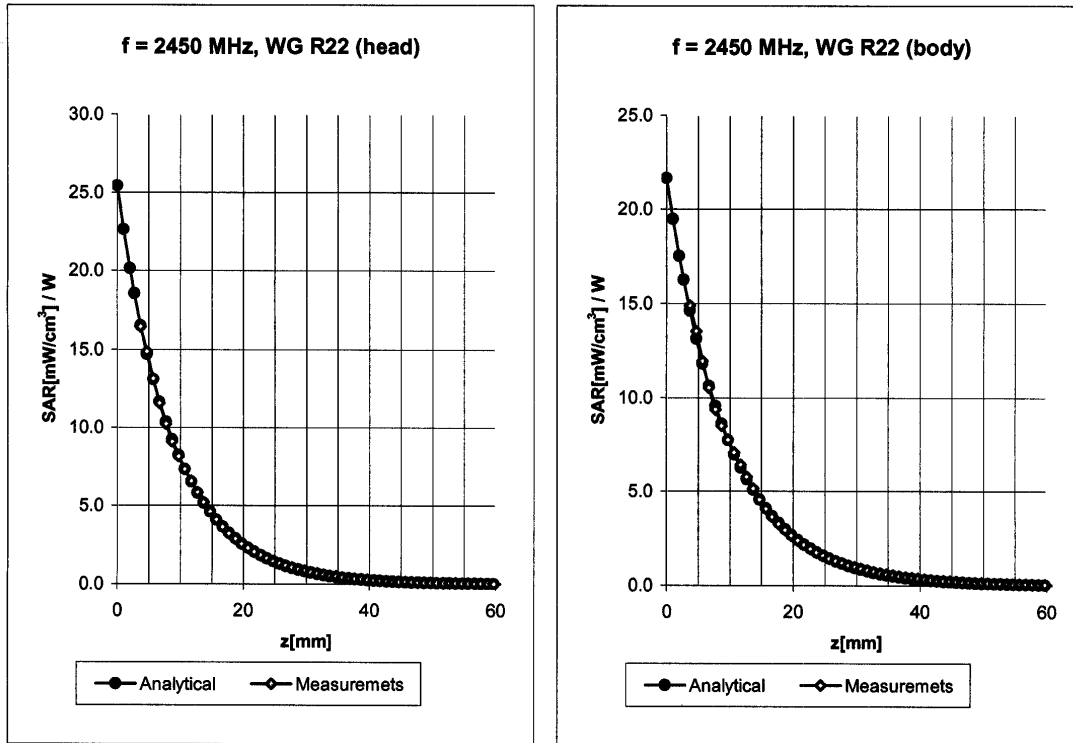

Head 2450 MHz $\epsilon_r = 39.2 \pm 5\%$ $\sigma = 1.80 \pm 5\%$ mho/m

Valid for f=2400-2500 MHz with Head Tissue Simulating Liquid according to EN 50361, P1528-200X

ConvF X	5.0 ± 8.9% (k=2)	Boundary effect:	
ConvF Y	5.0 ± 8.9% (k=2)	Alpha	0.88
ConvF Z	5.0 ± 8.9% (k=2)	Depth	1.92


Body 2450 MHz $\epsilon_r = 52.7 \pm 5\%$ $\sigma = 1.95 \pm 5\%$ mho/m

Valid for f=2400-2500 MHz with Body Tissue Simulating Liquid according to OET 65 Suppl. C

ConvF X	4.4 ± 8.9% (k=2)	Boundary effect:	
ConvF Y	4.4 ± 8.9% (k=2)	Alpha	0.90
ConvF Z	4.4 ± 8.9% (k=2)	Depth	1.87

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

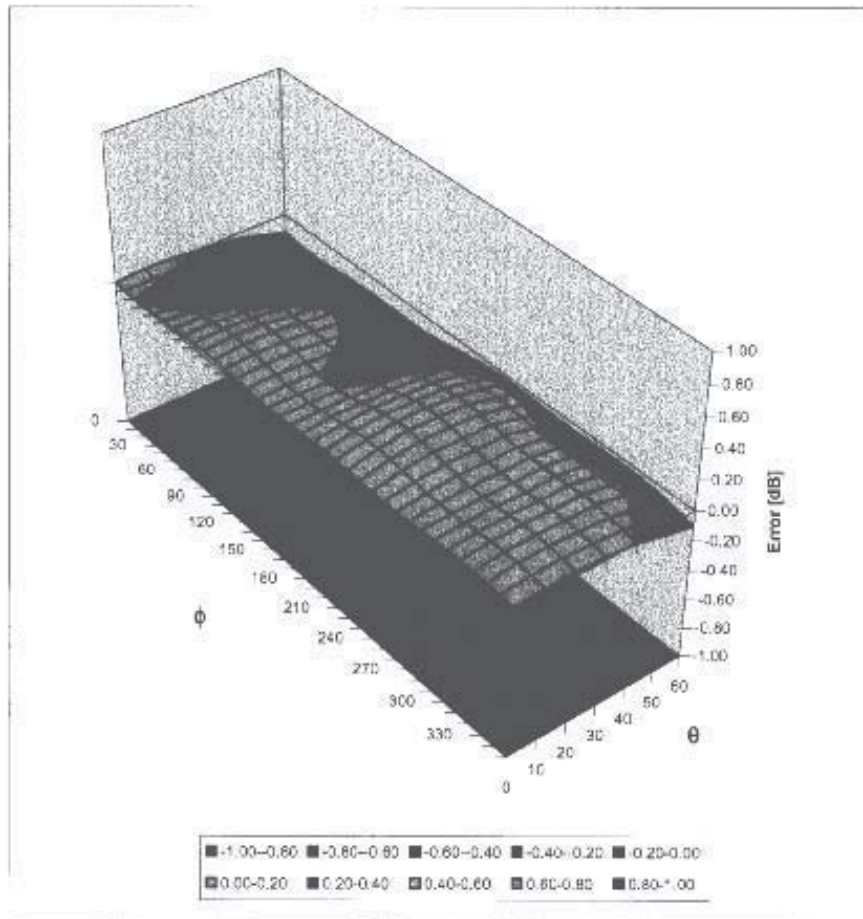

Additional Conversion Factors for Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1590

Place of Assessment:

Zurich

Date of Assessment:


May 19, 2003

Probe Calibration Date:

May 15, 2003

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



Dosimetric E-Field Probe ET3DV6 SN:1590Conversion factor (\pm standard deviation)

150 MHz	ConvF	9.6 \pm 8%	$\epsilon_r = 52.3 \pm 5\%$ $\sigma = 0.76 \pm 5\%$ mho/m (head tissue)
300 MHz	ConvF	8.3 \pm 8%	$\epsilon_r = 45.3 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
450 MHz	ConvF	7.9 \pm 8%	$\epsilon_r = 43.5 \pm 5\%$ $\sigma = 0.87 \pm 5\%$ mho/m (head tissue)
150 MHz	ConvF	9.2 \pm 8%	$\epsilon_r = 61.9 \pm 5\%$ $\sigma = 0.80 \pm 5\%$ mho/m (body tissue)
450 MHz	ConvF	8.1 \pm 8%	$\epsilon_r = 56.7 \pm 5\%$ $\sigma = 0.94 \pm 5\%$ mho/m (body tissue)

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS

300 MHz System Performance Check

Measured Fluid Dielectric Parameters (Brain)

March 30, 2004

Frequency	ϵ'	ϵ''
250.000000 MHz	46.7459	57.9012
255.000000 MHz	46.4852	57.1752
260.000000 MHz	46.2695	56.3299
265.000000 MHz	46.1057	55.6368
270.000000 MHz	45.9598	54.9214
275.000000 MHz	45.7288	54.2252
280.000000 MHz	45.6276	53.5709
285.000000 MHz	45.5306	52.7924
290.000000 MHz	45.3115	52.2111
295.000000 MHz	45.1308	51.5326
300.000000 MHz	45.0625	50.8230
305.000000 MHz	44.8674	50.2045
310.000000 MHz	44.8034	49.6322
315.000000 MHz	44.5324	49.1006
320.000000 MHz	44.4913	48.4557
325.000000 MHz	44.2334	48.0608
330.000000 MHz	44.0738	47.4641
335.000000 MHz	44.0137	47.0490
340.000000 MHz	43.7090	46.5387
345.000000 MHz	43.6353	46.0652
350.000000 MHz	43.4650	45.6767

150 MHz DUT Evaluation (Face)

Measured Fluid Dielectric Parameters (Brain)

March 30, 2004

Frequency	ϵ'	ϵ''
50.000000 MHz	64.5415	230.7073
60.000000 MHz	62.2359	194.4378
70.000000 MHz	60.4278	168.3920
80.000000 MHz	59.0859	148.8853
90.000000 MHz	57.5485	134.5228
100.000000 MHz	56.3074	122.4536
110.000000 MHz	55.2455	112.9369
120.000000 MHz	54.3304	104.8620
130.000000 MHz	53.8753	97.9704
140.000000 MHz	53.4051	92.0275
150.000000 MHz	52.6765	86.8327
160.000000 MHz	52.2960	82.2116
170.000000 MHz	51.7828	78.2580
180.000000 MHz	51.4661	74.3850
190.000000 MHz	51.0658	71.3092
200.000000 MHz	50.4628	68.5132
210.000000 MHz	50.1021	66.0225
220.000000 MHz	49.6612	63.6880
230.000000 MHz	49.0815	61.5320
240.000000 MHz	48.5242	59.6064
250.000000 MHz	48.1182	57.8715

300 MHz System Performance Check

Measured Fluid Dielectric Parameters (Brain)

April 03, 2004

Frequency	ϵ'	ϵ''
200.000000 MHz	49.8352	70.9723
210.000000 MHz	49.3615	68.2246
220.000000 MHz	49.0924	65.8023
230.000000 MHz	48.4873	63.5453
240.000000 MHz	47.9594	61.5399
250.000000 MHz	47.5762	59.6824
260.000000 MHz	47.1242	58.0700
270.000000 MHz	46.7983	56.5345
280.000000 MHz	46.4164	55.0245
290.000000 MHz	46.1365	53.6223
300.000000 MHz	45.8726	52.1295
310.000000 MHz	45.6336	50.9046
320.000000 MHz	45.2568	49.7711
330.000000 MHz	44.7934	48.7300
340.000000 MHz	44.4015	47.8925
350.000000 MHz	44.0514	47.0391
360.000000 MHz	43.6742	46.2143
370.000000 MHz	43.3268	45.4892
380.000000 MHz	43.0633	44.7707
390.000000 MHz	42.8166	44.0110
400.000000 MHz	42.5690	43.3323

150 MHz DUT Evaluation (Body)

Measured Fluid Dielectric Parameters (Muscle)



April 03, 2004

Frequency	ϵ'	ϵ''
50.000000 MHz	67.6977	261.3960
60.000000 MHz	66.5147	219.3696
70.000000 MHz	65.5711	189.4271
80.000000 MHz	64.1272	167.3753
90.000000 MHz	64.1301	149.6948
100.000000 MHz	63.1062	136.1030
110.000000 MHz	62.7402	124.5276
120.000000 MHz	61.9513	115.2302
130.000000 MHz	61.5954	107.1380
140.000000 MHz	61.4163	100.2051
150.000000 MHz	60.6743	94.3316
160.000000 MHz	60.4989	89.2223
170.000000 MHz	60.3147	84.8482
180.000000 MHz	59.9233	80.3460
190.000000 MHz	59.7732	76.8114
200.000000 MHz	59.5132	73.5476
210.000000 MHz	59.0182	70.7090
220.000000 MHz	58.9345	67.9511
230.000000 MHz	58.5993	65.5048
240.000000 MHz	58.2370	63.3479
250.000000 MHz	57.9667	61.2827




Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

APPENDIX F - SAR TEST SETUP & DUT PHOTOGRAPHS




FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
Antenna P/N: CAT-460

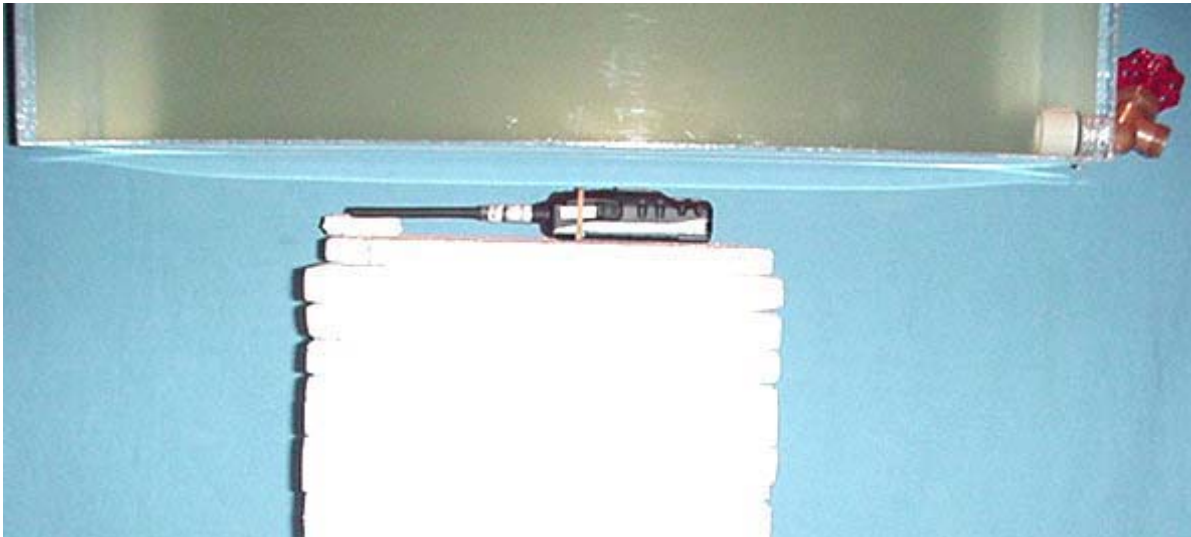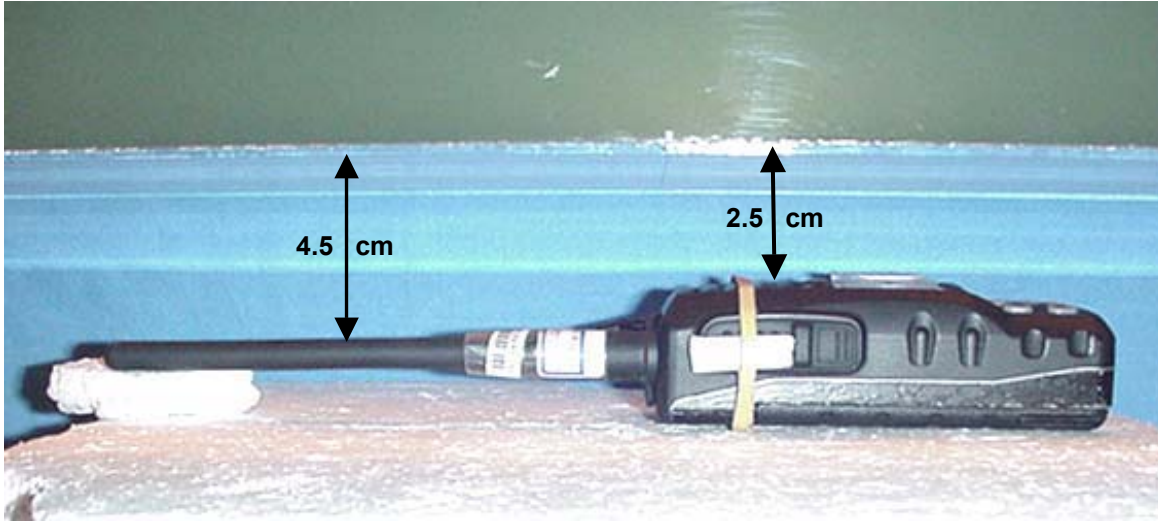




FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
Antenna P/N: ATV-8B

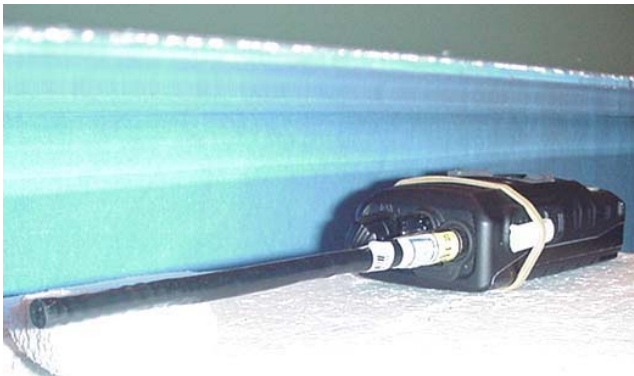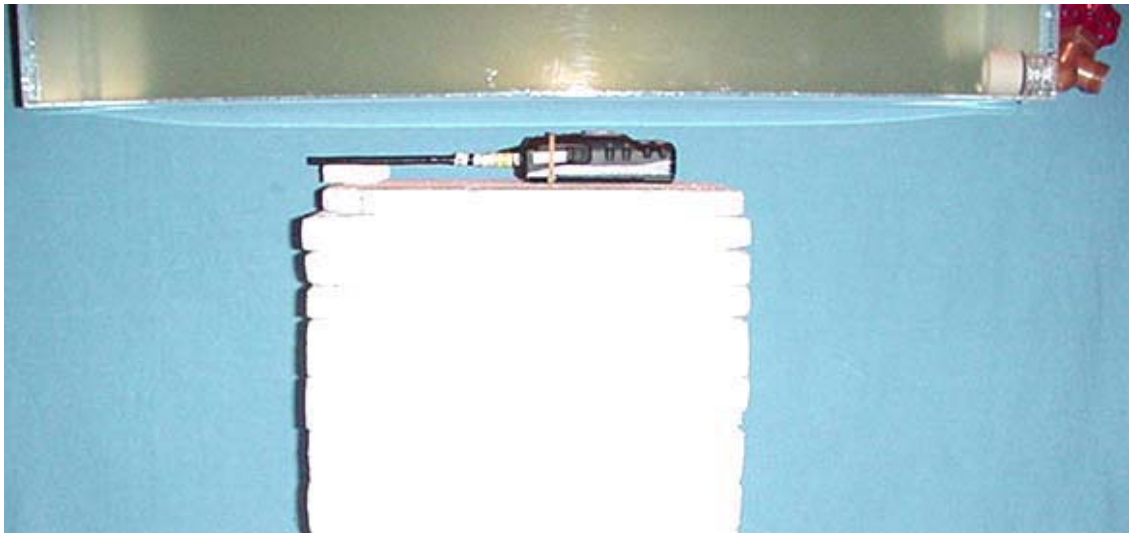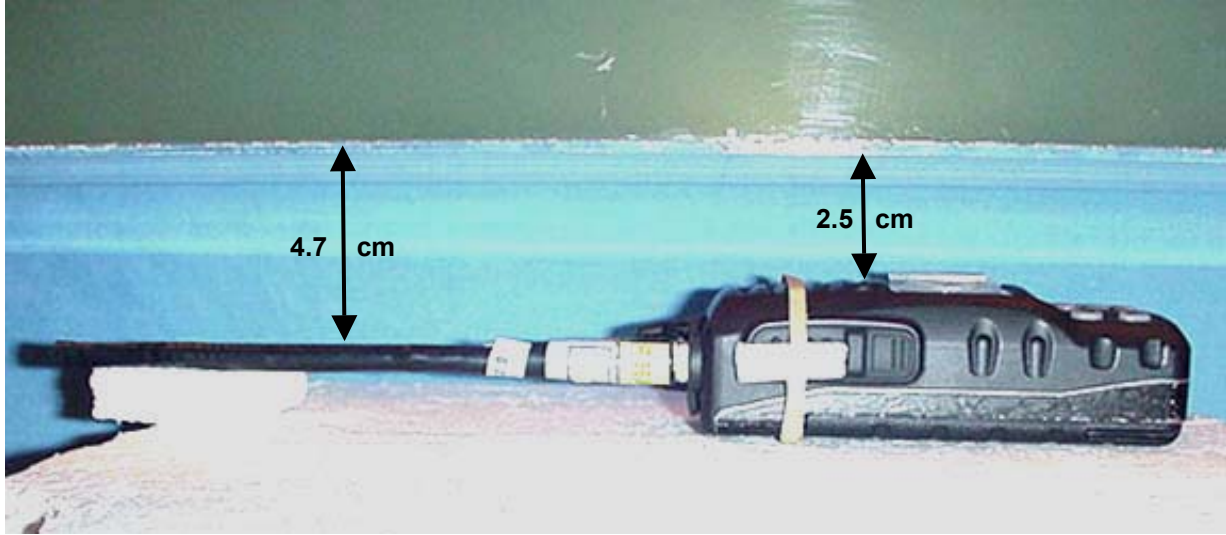




FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
Antenna P/N: ATV-8A

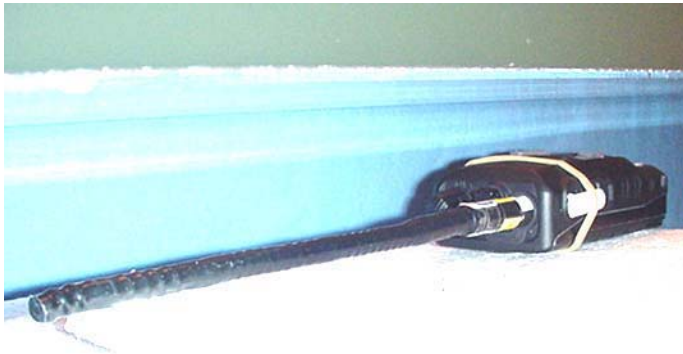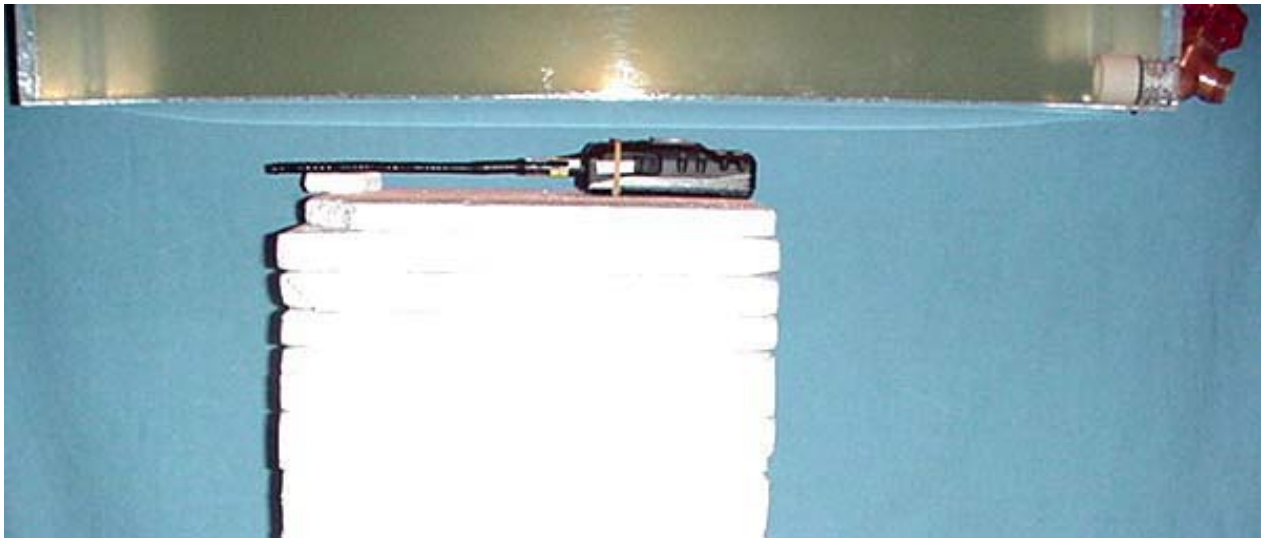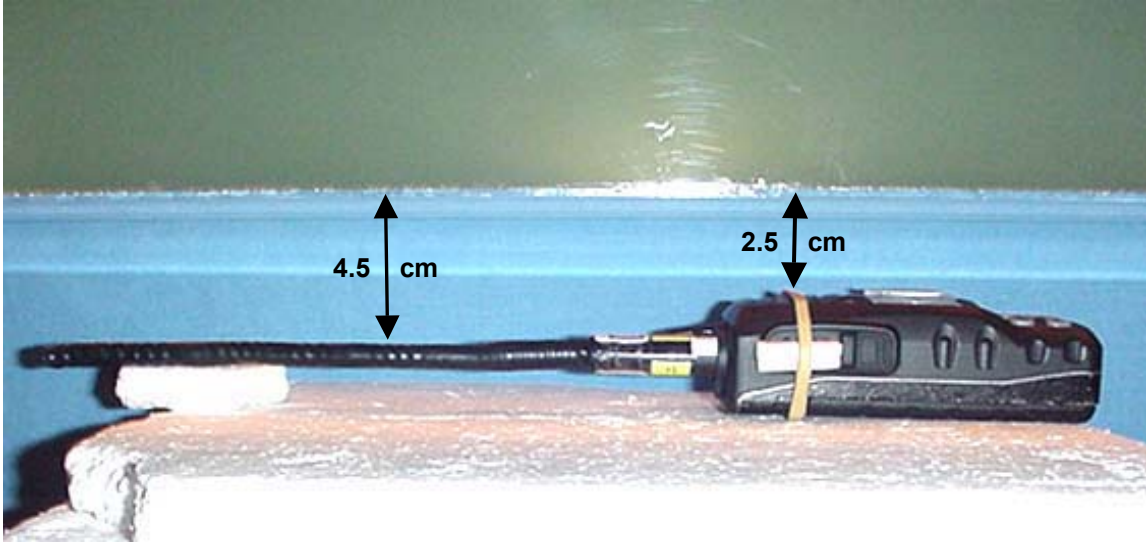


FACE-HELD SAR TEST SETUP PHOTOGRAPHS
2.5 cm Separation Distance from Front of Radio to Planar Phantom
Antenna P/N: ATV-8C

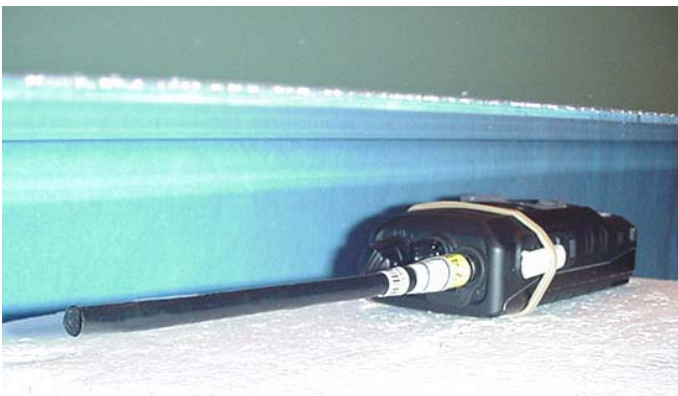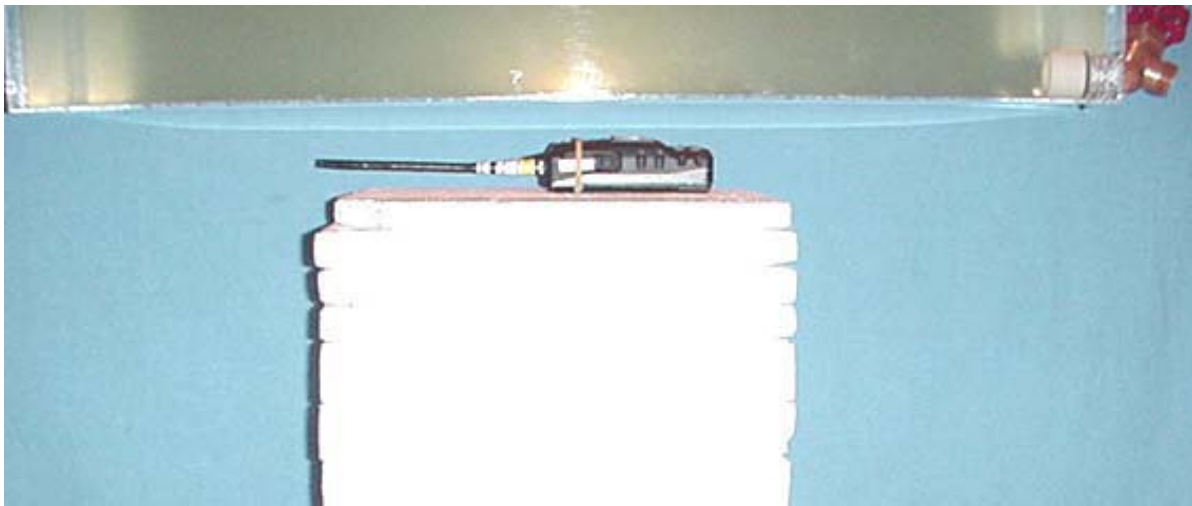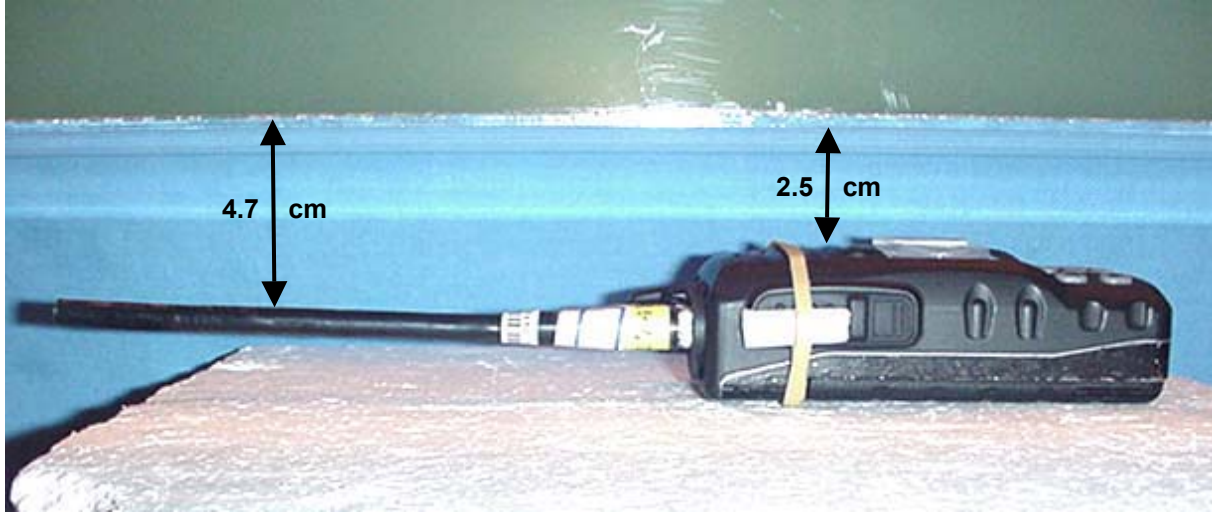




BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8B & Speaker-Microphone Accessory P/N: CMP-460

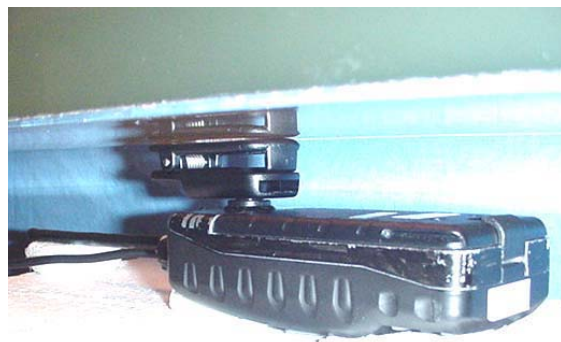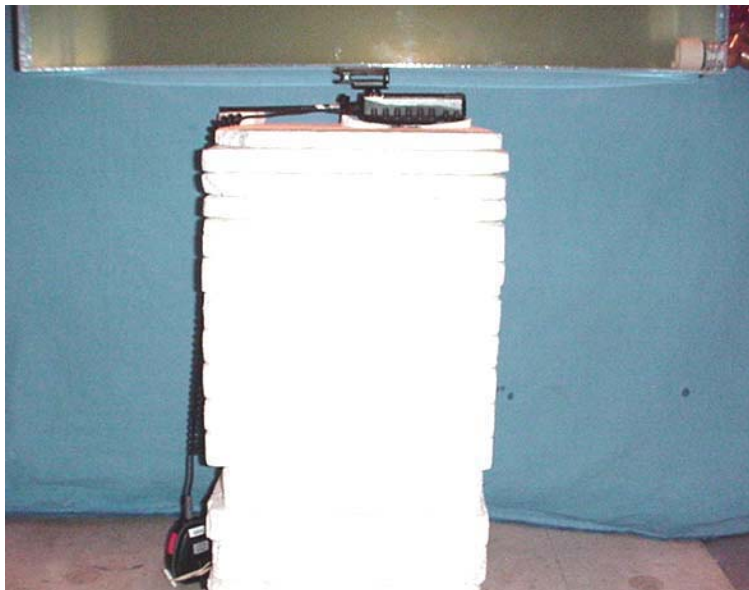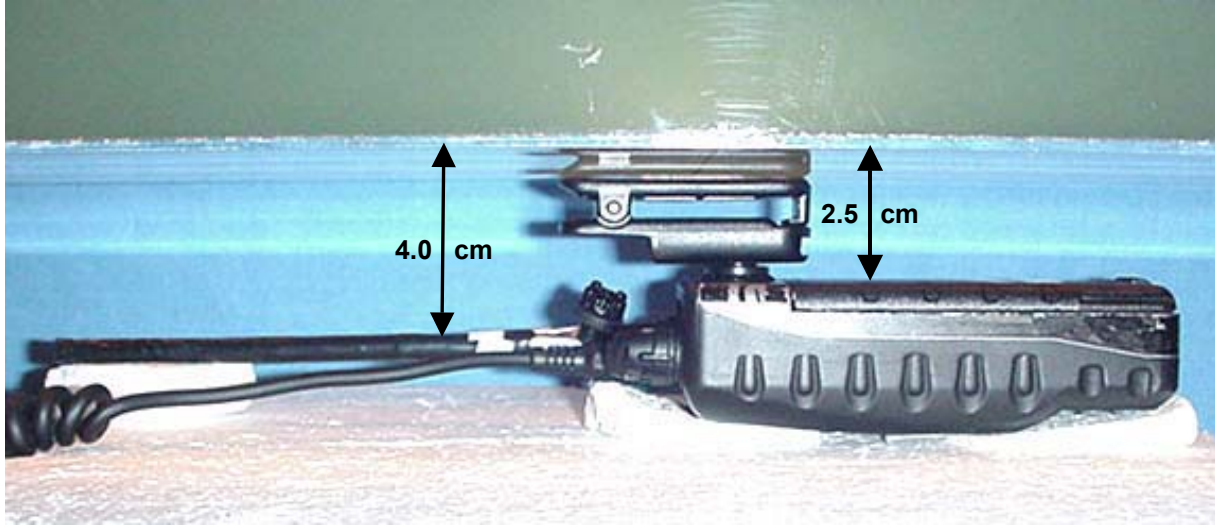




BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8B & Microphone Accessory P/N: MH-57

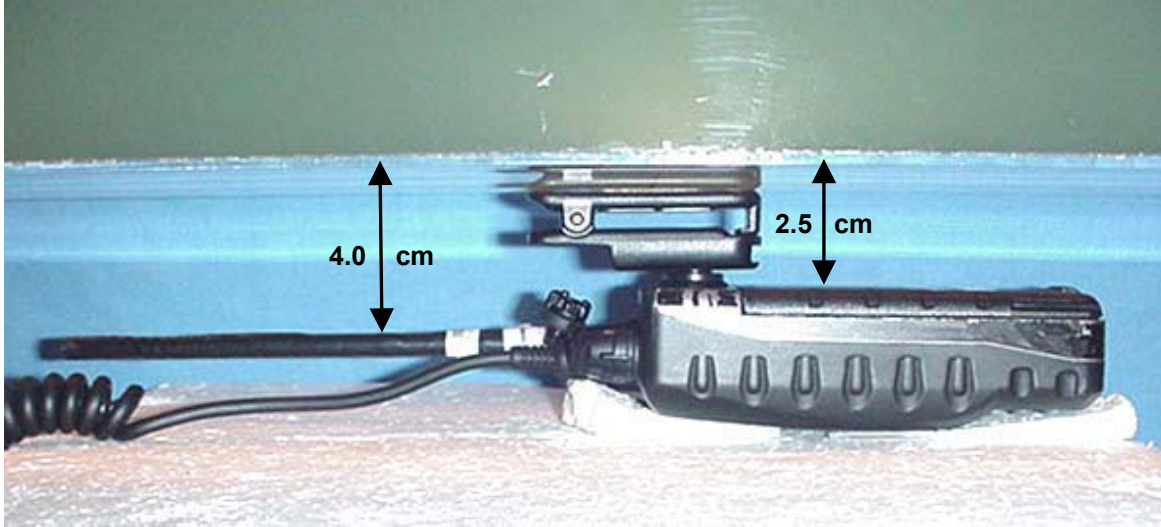


BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8B & VOX Headset Accessory P/N: VC-24

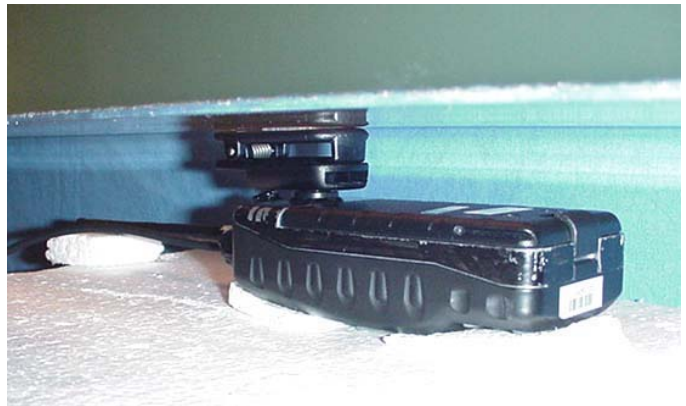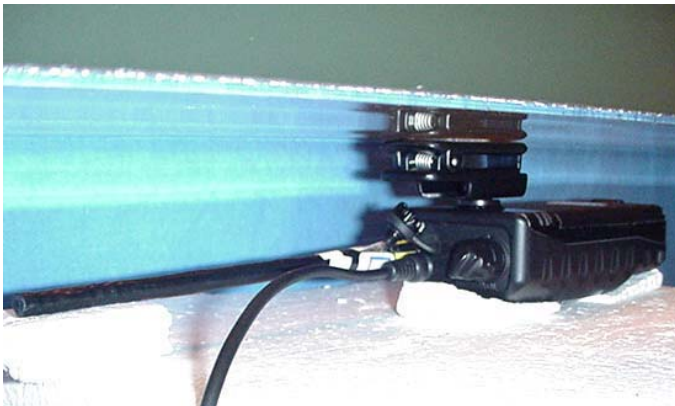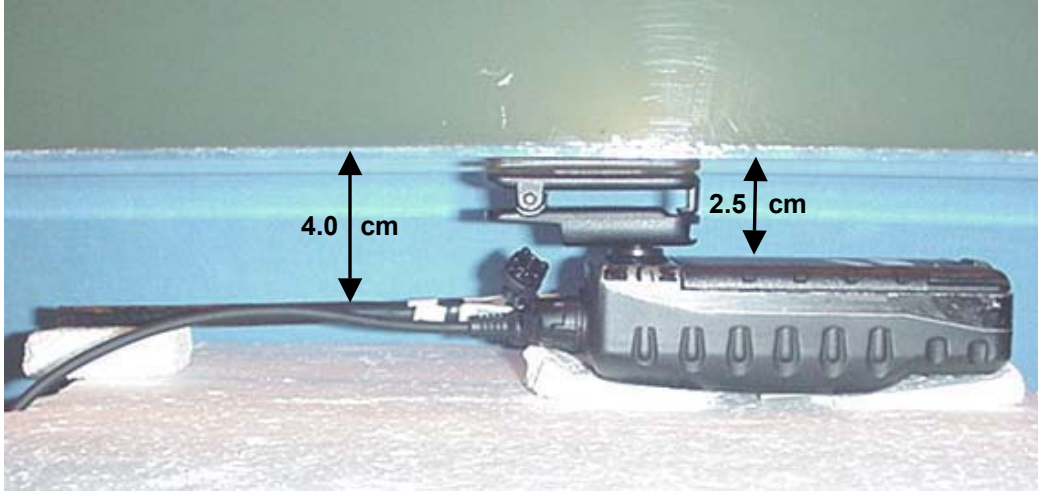



BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8B & VOX Microphone Accessory P/N: VC-27

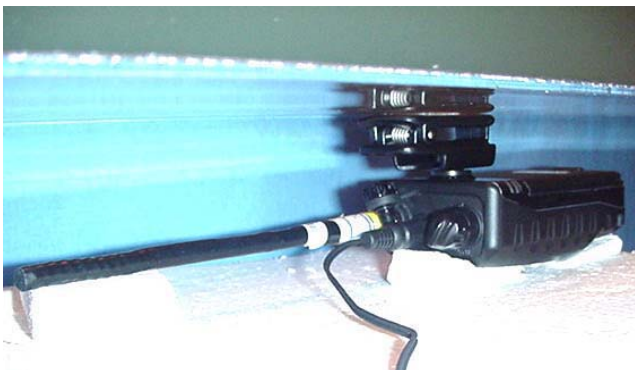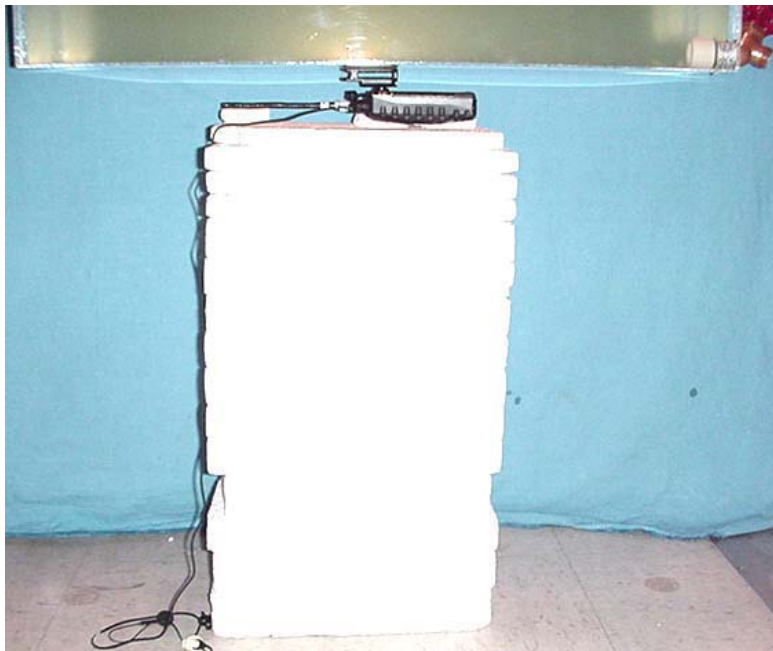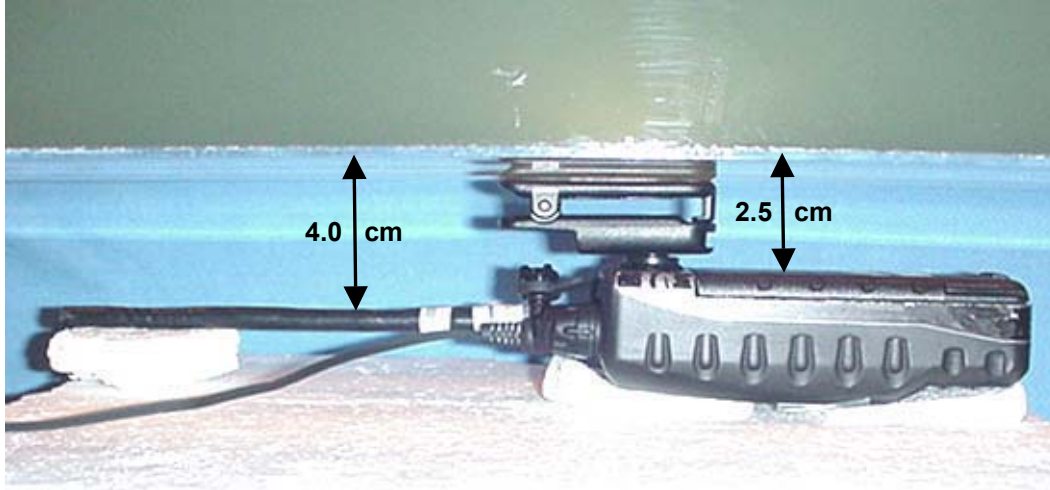



BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8A & Microphone Accessory P/N: MH-57

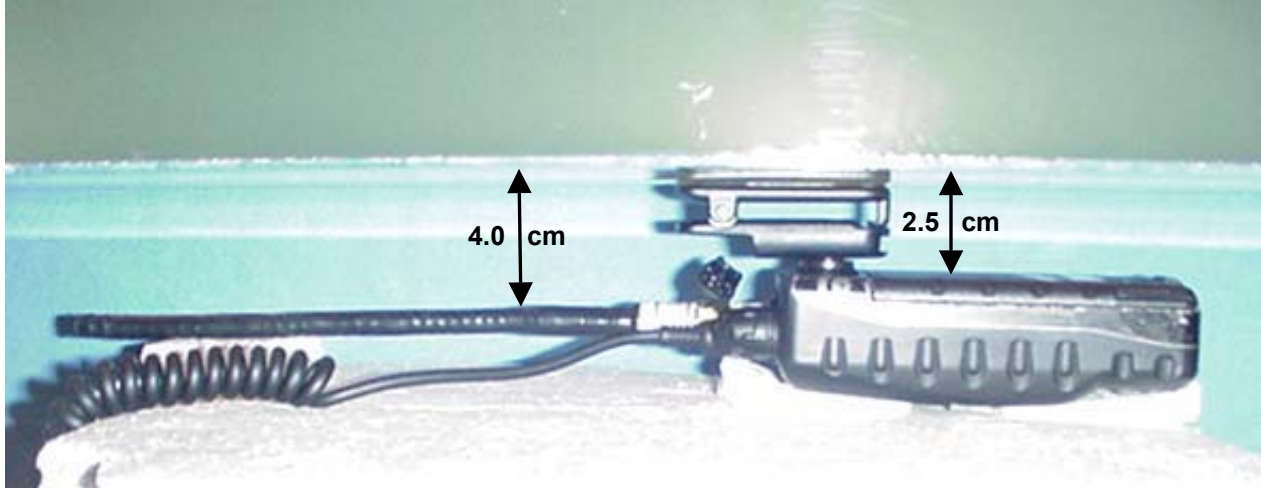



BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8A & VOX Headset Accessory P/N: VC-24

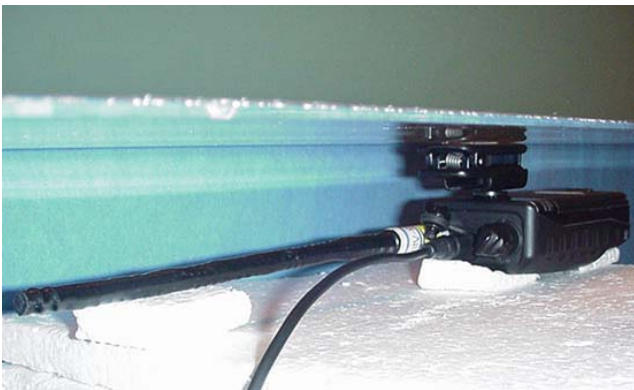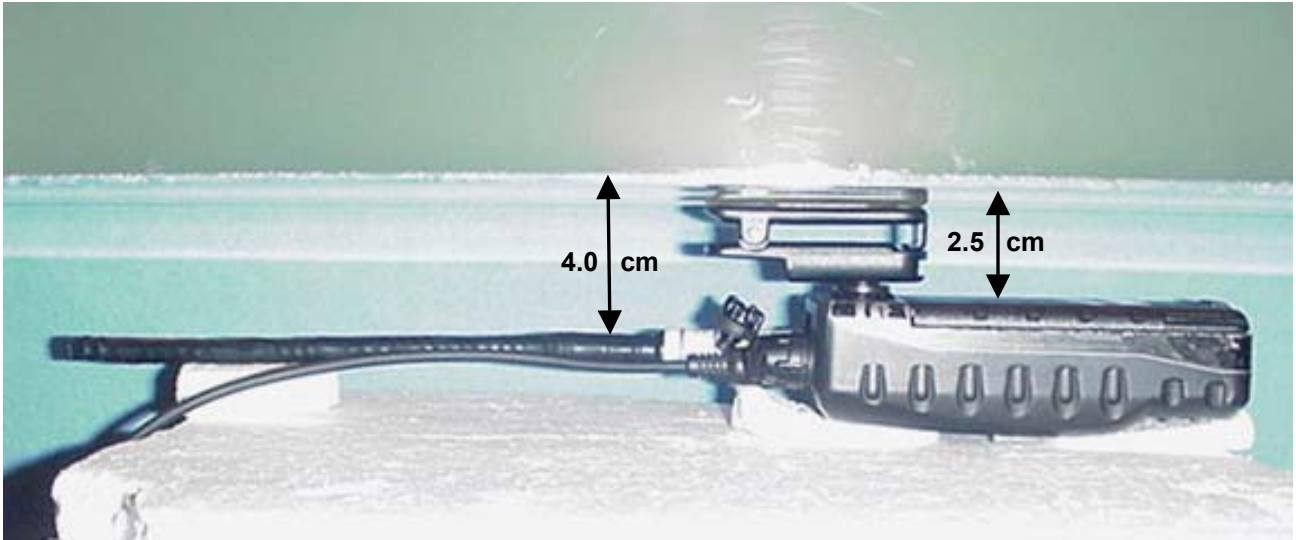




BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8C & Microphone Accessory P/N: MH-57

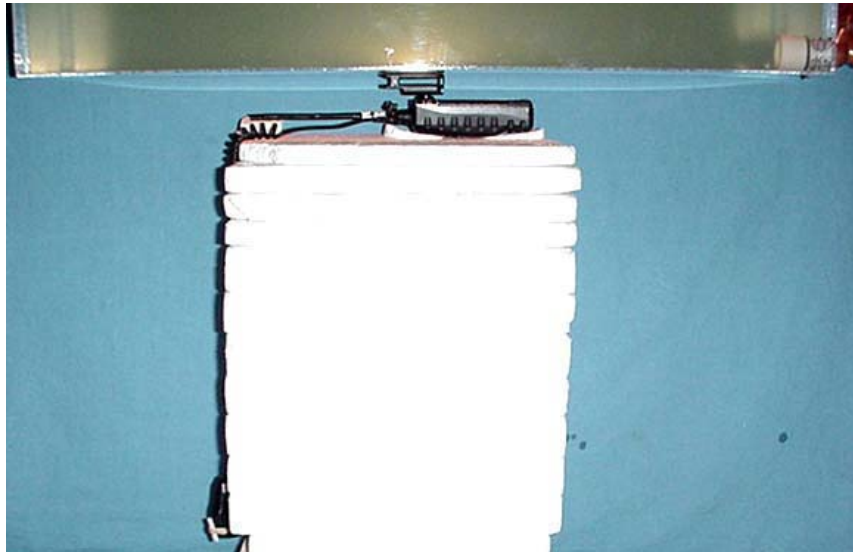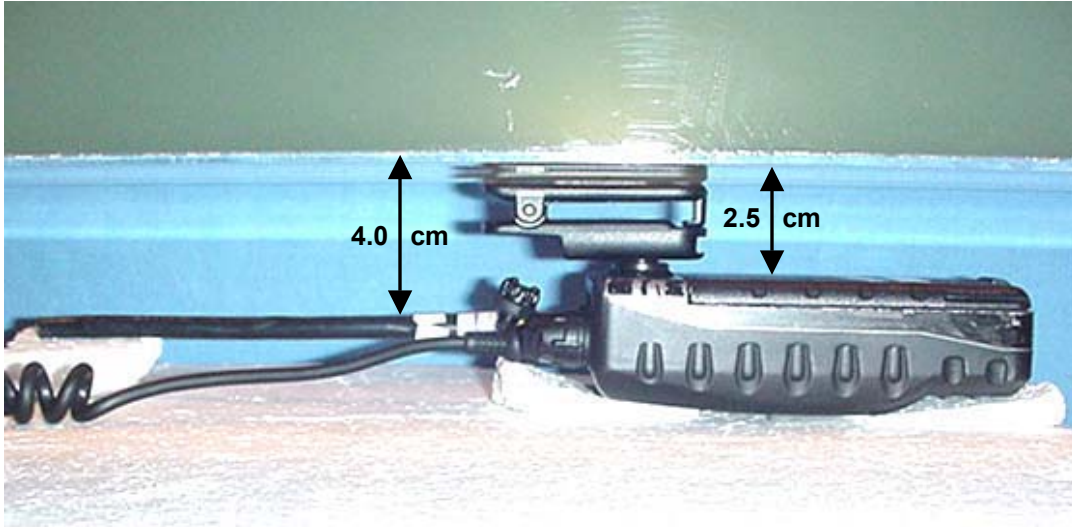



BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: ATV-8C & VOX Headset Accessory P/N: VC-24

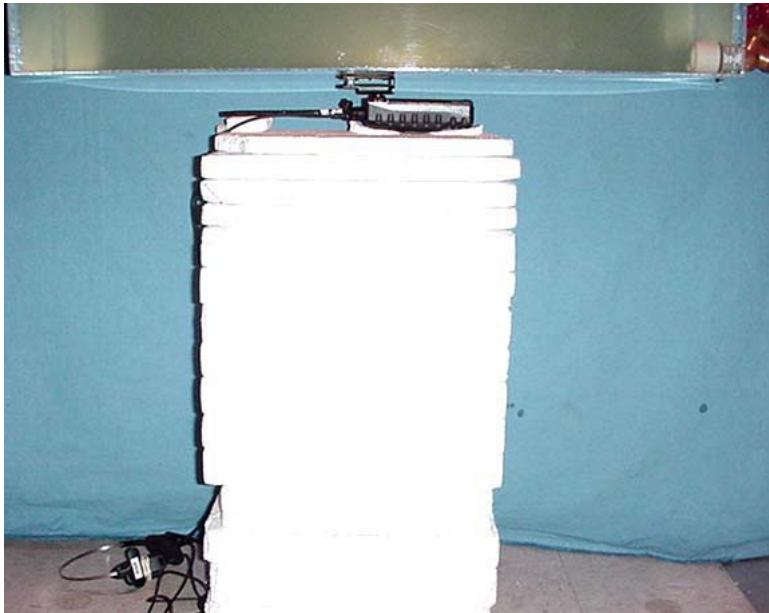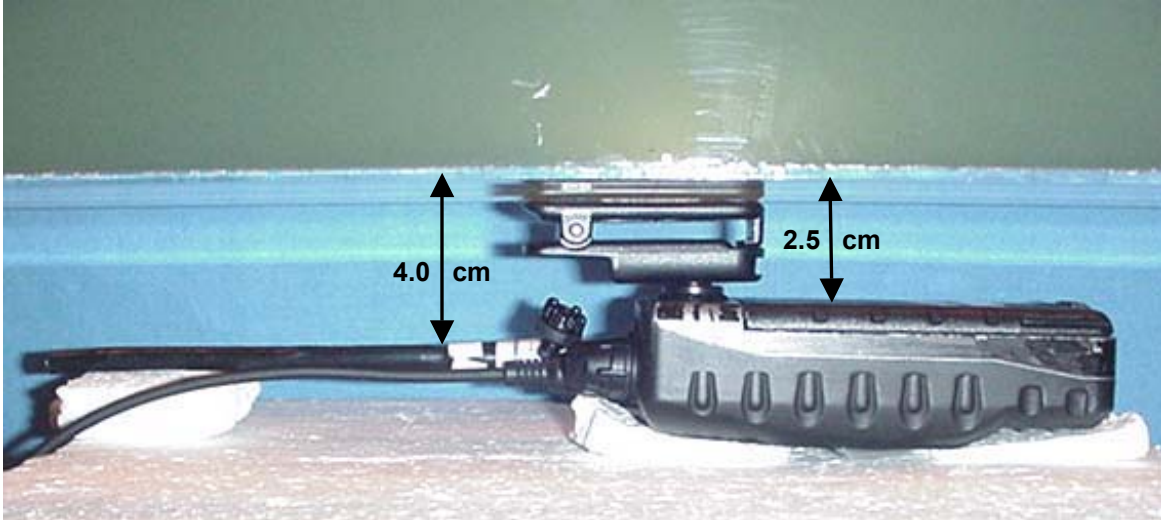



BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: CAT-460 & Speaker-Microphone Accessory P/N: CMP-460

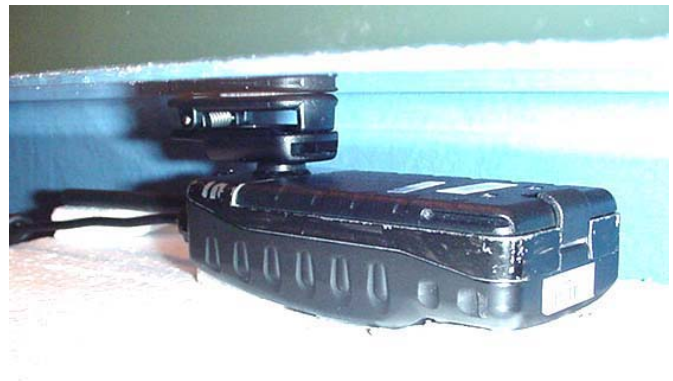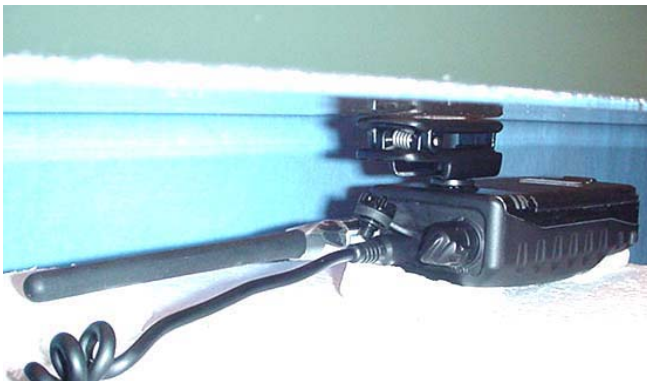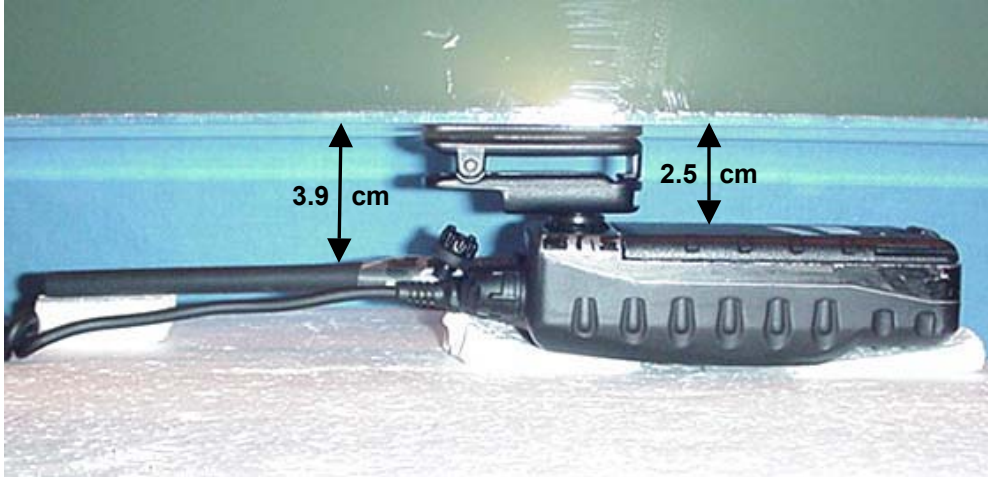



BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: CAT-460 & Microphone Accessory P/N: MH-57

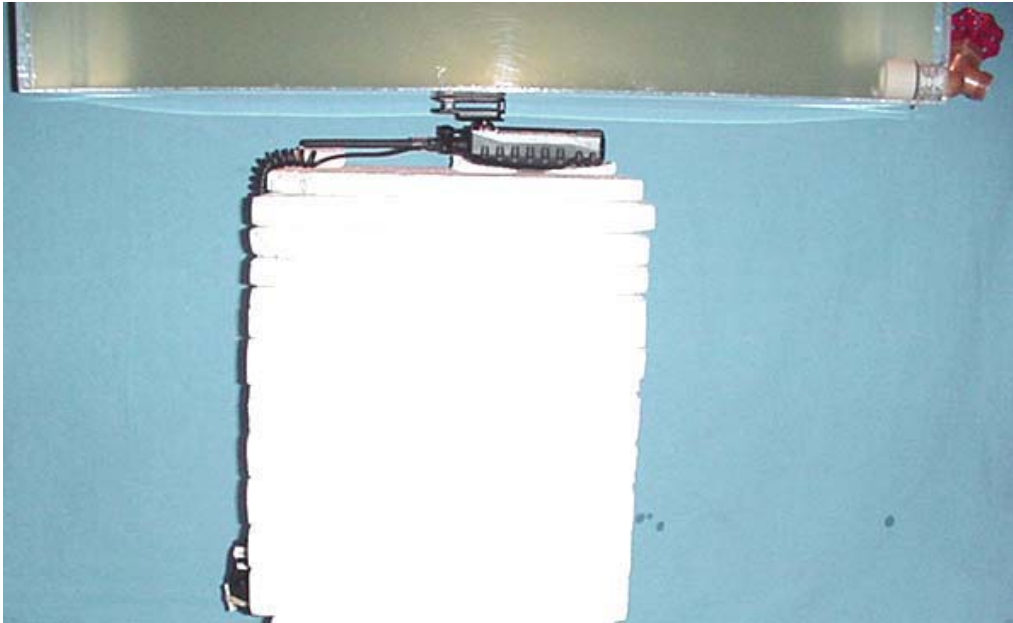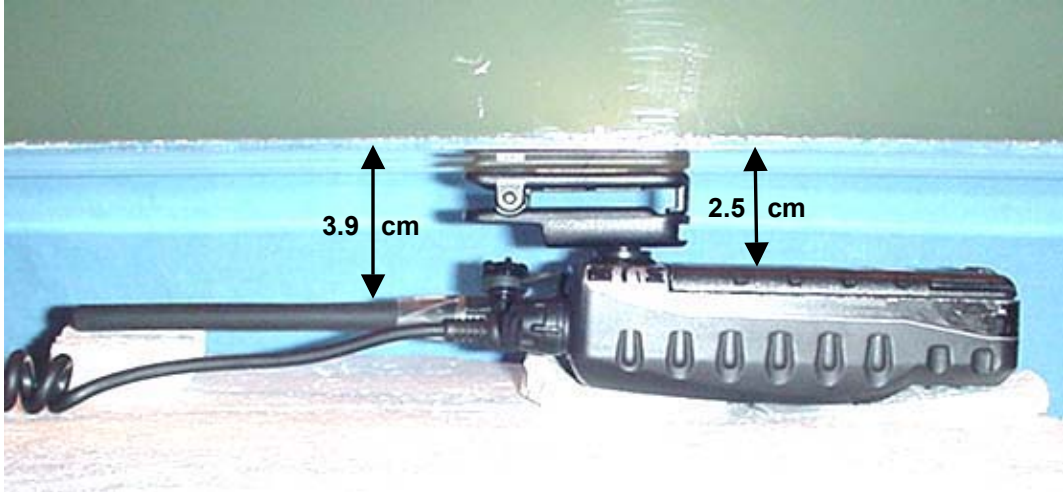

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: CAT-460 & VOX Headset Accessory P/N: VC-24

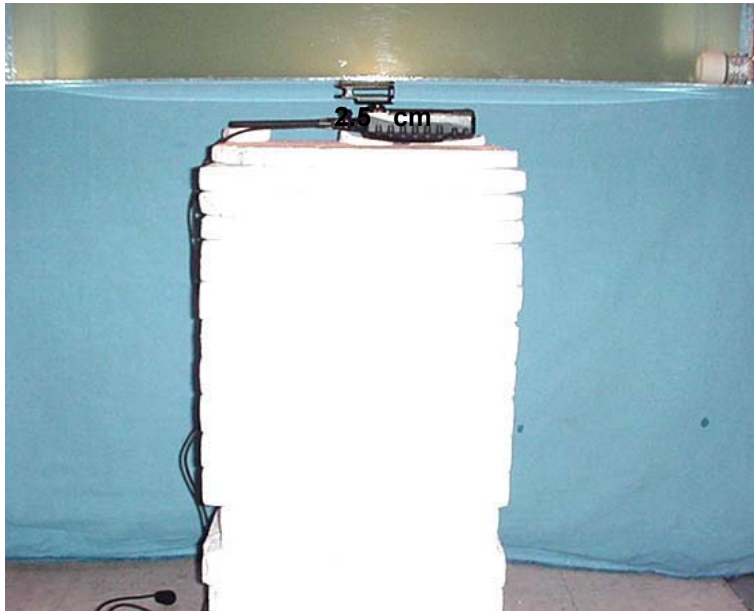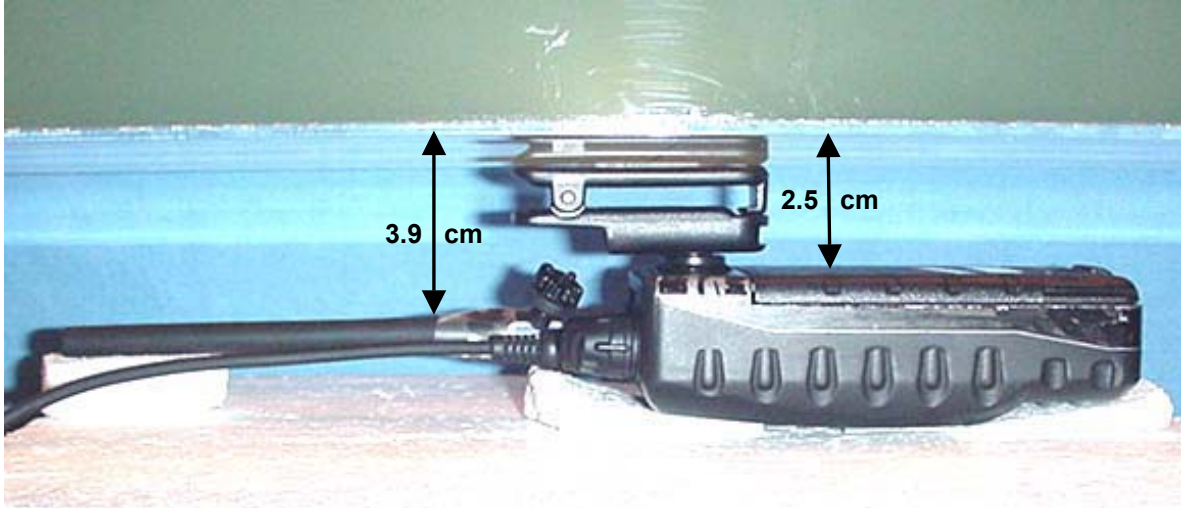

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.5 cm Plastic Swivel Belt-Clip Separation Distance to Planar Phantom
with Antenna P/N: CAT-460 & VOX Microphone Accessory P/N: VC-27

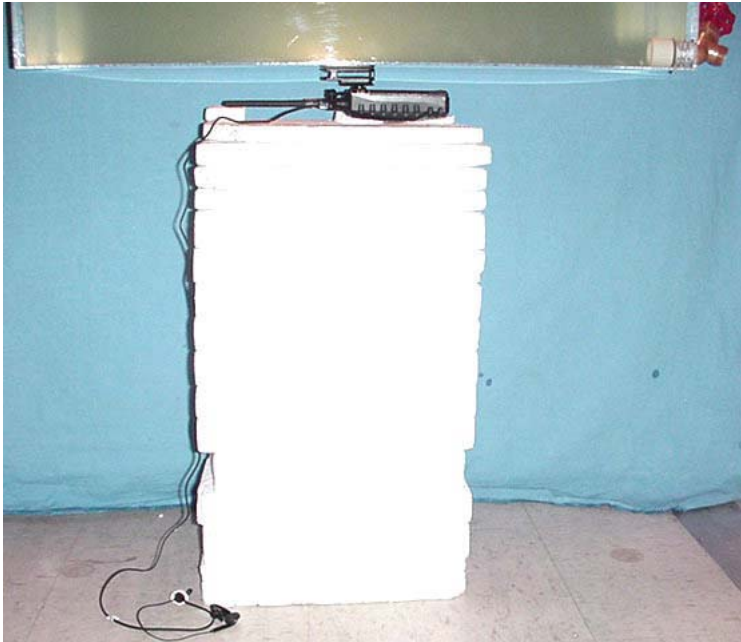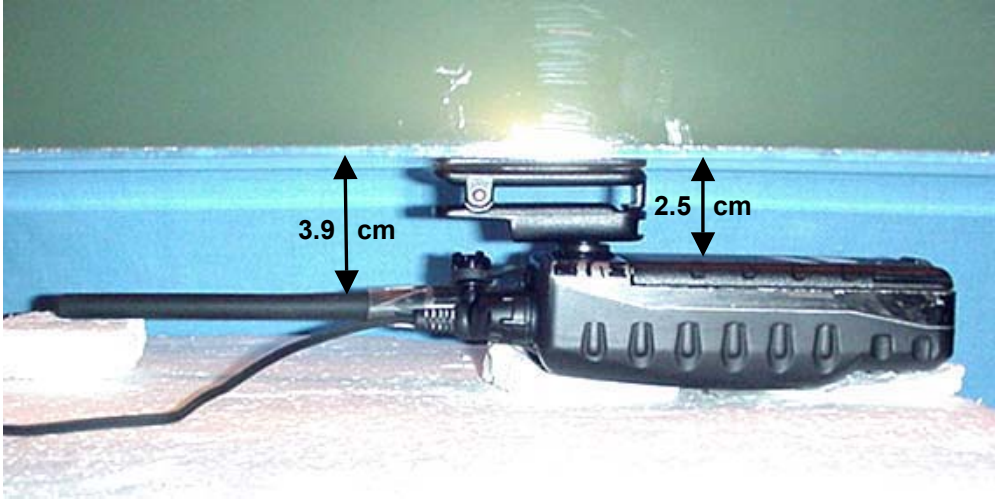

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

DUT PHOTOGRAPHS



with Antenna P/N: CAT-460



with Antenna P/N: ATV-8A



with Antenna P/N: ATV-8B



with Antenna P/N: ATV-8C

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

DUT PHOTOGRAPHS



Front of DUT



Back of DUT with
Plastic Swivel Belt-Clip



Back of DUT



Top of DUT



Bottom of DUT

DUT PHOTOGRAPHS



Left Side of DUT with Plastic Swivel Belt-Clip



Right Side of DUT with Plastic Swivel Belt-Clip



Plastic Swivel Belt-Clip Accessory (P/N CMP-14)

DUT PHOTOGRAPHS



DUT Battery Compartment



NiCd 1100mAh Battery Pack
(P/N: FNB-V57IS)



NiMH 1400mAh Battery Pack
(P/N: FNB-83)



9V Alkaline Battery Case (P/N: FBA-25)



Duracell Procell Alkaline Batteries
(2850 mAh)




Energizer E91 Alkaline Batteries
(2850 mAh)

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

DUT PHOTOGRAPHS



Antenna P/N: CAT-460

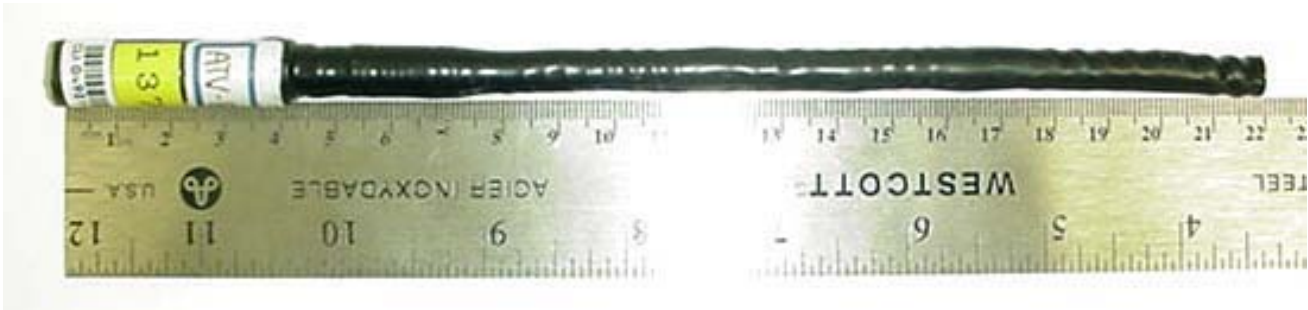

Antenna P/N: ATV-8A



Antenna P/N: ATV-8B



Antenna P/N: ATV-8C

Test Report S/N:	033004-498K66
Test Date(s):	March 30 & April 03-04, 2004
Test Type:	FCC/IC SAR Evaluation

DUT PHOTOGRAPHS



with Speaker-Microphone Accessory (P/N: CMP-460)



with Microphone Accessory (P/N: MH-57)

DUT PHOTOGRAPHS



with VOX Headset Accessory (P/N: VC-24)



with VOX Microphone Accessory (P/N: VC-27)