

TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66HX292UT

TEST REPORT:

PAGE 1.....COVER SHEET - GENERAL INFORMATION & TECHNICAL DESCR.  
PAGE 2.....TECHNICAL DESCRIPTION CONTINUED  
PAGE 3.....RF POWER OUTPUT AND MODULATION CHARACTERISTICS  
PAGE 4.....OCCUPIED BANDWIDTH  
PAGE 5.....SPURIOUS EMISSIONS AT ANTENNA TERMINALS  
PAGE 6.....FIELD STRENGTH OF SPURIOUS EMISSIONS  
PAGE 7.....METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS  
PAGE 8.....FREQUENCY STABILITY  
PAGE 9-10...TRANSIENT FREQUENCY STABILITY  
PAGE 11.....CERTIFICATION OF TECHNICAL DATA AND  
LIST OF TEST EQUIPMENT

EXHIBIT CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER  
EXHIBIT 2.....FCC ID LABEL SAMPLE  
EXHIBIT 3.....SKETCH OF FCC ID LABEL LOCATION  
EXHIBIT 4A-4E...FRONT VIEW EXTERNAL PHOTOGRAPHS  
EXHIBIT 4F.....REAR VIEW EXTERNAL PHOTOGRAPH  
EXHIBIT 4G-4H...SIDE VIEW EXTERNAL PHOTOGRAPHS  
EXHIBIT 4I.....TOP VIEW EXTERNAL PHOTOGRAPH  
EXHIBIT 4J-4N...INTERNAL PHOTOGRAPHS  
EXHIBIT 5A-5K...THEORY OF OPERATIONS INCLUDING BLOCK DIAGRAMS  
EXHIBIT 6.....CRYSTAL SPECIFICATION  
EXHIBIT 7A-7B...PARTS LIST  
EXHIBIT 8A-8B...SCHEMATICS  
EXHIBIT 9A-9J...USER'S MANUAL  
EXHIBIT 10A....AUDIO RESPONSE - 25 KHz CHANNEL SPACING  
EXHIBIT 10B....AUDIO RESPONSE - 12.5 KHz CHANNEL SPACING  
EXHIBIT 11A....MODULATION LIMITING -12.5KHz CH SPACING -300 Hz  
EXHIBIT 11B....MODULATION LIMITING - 12.5KHz CH SPACING -1000 Hz  
EXHIBIT 11C....MODULATION LIMITING - 12.5KHz CH SPACING -3000 Hz  
EXHIBIT 12A....MODULATION LIMITING - 25 KHz CH SPACING -300 Hz  
EXHIBIT 12B....MODULATION LIMITING - 25 KHz CH SPACING -1000 Hz  
EXHIBIT 12C....MODULATION LIMITING - 25 KHz CH SPACING -3000 Hz  
EXHIBIT 13.....INPUT VS DEVIATION  
EXHIBIT 14A.....OCCUPIED BANDWIDTH CW PLOT-12.5 KHz - CH  
EXHIBIT 14B.....OCCUPIED BANDWIDTH 2.5K TONE - 12.5 KHz PLOT  
EXHIBIT 14C.....OCCUPIED BANDWIDTH CW PLOT - 25 KHz - CH  
EXHIBIT 14D.....OCCUPIED BANDWIDTH 2.5K TONE - 25 KHz PLOT  
EXHIBIT 15A-15D...TRANSIENT FREQUENCY RESPONSE PLOTS  
EXHIBIT 16.....AUDIO LOW PASS FILTER

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66HX292UT

REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT

PAGE: TABLE OF CONTENTS

GENERAL\_INFORMATION\_REQUIRED  
FOR\_TYPE\_ACCEPTANCE

2.983 (a,b,c) YAESU MUSEN CO., LTD. will sell the  
MODEL NO. K66HX292UT VHF transmitter in quantity,  
for use under FCC RULES PART 22 & 90.

2.983 (d) TECHNICAL\_DESCRIPTION

(1) Type of Emission: 14K2F3E For 25KHz  
10K0F3E For 12.5KHz

For 25KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 4.1\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0\text{K}) + 2(4.1\text{K})(1) = 6.0\text{K} + 8.2\text{K} = 14.2\text{K}$$

ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

For 12.5KHz

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 1.6\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0\text{K}) + 2(1.6\text{K})(1) = 6.0\text{K} + 3.2\text{K} = 10.0\text{K}$$

ALLOWED AUTHORIZED BANDWIDTH = 11.25KHz.

90.209(b)(5)

(2) Frequency Range: 450-480 MHz

(3) Power Range and Controls: There are NO user Power  
controls.

(4) Maximum Output Power Rating:  
4.0 Watts & 1.0 Watt  
into a 50 ohm resistive load.

(5) DC Voltages and Current into Final Amplifier:

POWER INPUT

High FINAL AMPLIFIER ONLY

$$V_{ce} = 7.20 \text{ Volts}$$

$$I_{ce} = 1.80 \text{ A.}$$

$$P_{in} = 12.96 \text{ Watts}$$

Low FINAL AMPLIFIER ONLY

$$V_{ce} = 7.20 \text{ Volts}$$

$$I_{ce} = 1.25 \text{ A.}$$

$$P_{in} = 8.64 \text{ Watts}$$

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66HX292UT

REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT

PAGE #: 1

- (6) Function of each electron tube or semiconductor device or other active circuit device: - SEE EXHIBIT
- 2.983(d) (7) Complete Circuit Diagrams: The circuit diagram is included as EXHIBIT 8A-8B. The block diagram is included as EXHIBIT 5.
- (8) Instruction book. The instruction manual is included as EXHIBIT #8.
- (9) Tune-up procedure. The tune-up procedure is given in EXHIBIT #8.
- (10) Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description in the instruction manual.
- 2.983 (11) Description of any circuits or devices employed for suppression of spurious radiation, for limiting modulation, and for limiting power.
- In addition to the interstage filtering the multi-section low pass filter made up of L12, L11, C40, C47, C95, C46, C94, C45, & C26.
- Limiting Modulation:  
The transmitter audio limiting circuitry is contained in the loop filter IC01.
- Limiting Power: There is no provision for limiting power.
- (12) Digital modulation. This unit does NOT use digital modulation.
- 2.983(e) The data required by 2.985 through 2.997 is submitted below.


2.985(a) RF\_power\_output.

RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage of 7.2V, and the transmitter properly adjusted the RF output measures:

POWER HIGH  
INPUT POWER: (7.2V)(1.80A) = 12.98 Watts  
OUTPUT POWER: 4.2 Watts Efficiency: 32%

LOW POWER  
INPUT POWER: (7.2V)(1.20A) = 8.64 Watts  
OUTPUT POWER: 1.0Watts Efficiency: 12%

METHOD OF MEASURING RF POWER OUTPUT

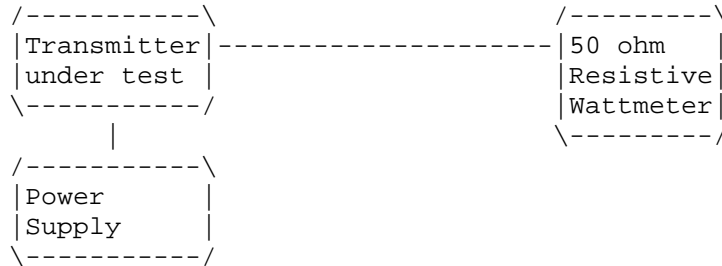

2.987(a) Voice Modulation\_characteristics:

(a) AUDIO\_FREQUENCY\_RESPONSE See the EXHIBIT #10.

2.987(a) AUDIO\_LOW\_PASS\_FILTER  
The audio low pass filter is included and the plot is shown as EXHIBIT #11. Rules 90.210(b,d, & e) for mobile stations with a low pass filter.

2.987(b) Audio\_input\_versus\_modulation A plot of the audio input versus deviation is shown in Exhibit 13.

2.989(c) Occupied\_bandwidth:

90.210(b,)

Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least 43+log(P)dB.


90.210( d) 12.5KHz channel bandwidth equipment. For transmitters designed to operate with a 12.5KHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows; (1) On any frequency from the center of the authorized bandwidth f0 to 5.625kHz removed from fP0: Zero dB. (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency(fd-2.88kHz)dB. (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency(fd in kHz Log(P) or 70dB, whichever is the lesser attenuation.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11 , with the exception that various tones were used.


Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

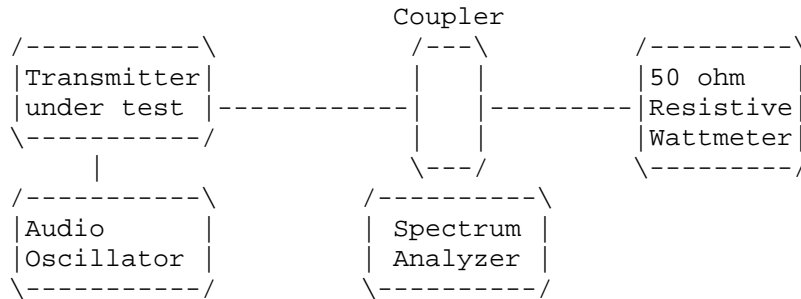

2.991 Spurious\_emissions\_at\_antenna\_terminals(conducted):  
 Data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

Method of Measuring Conducted Spurious Emissions

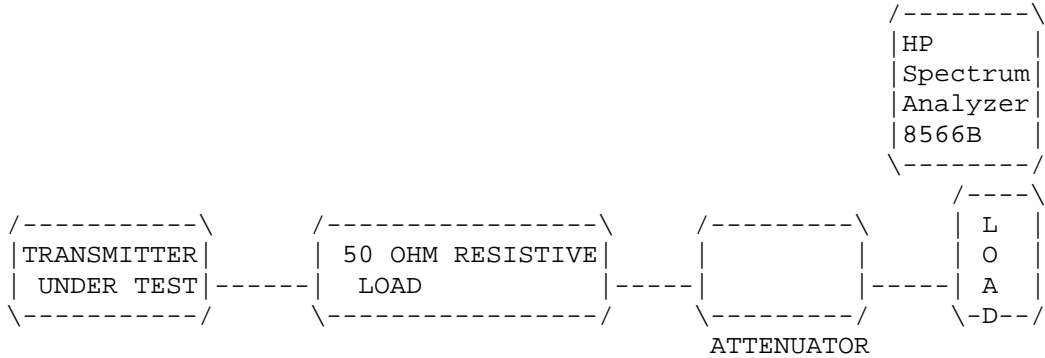

2.991 Continued Spurious\_Emissions\_at\_the\_Antenna\_Terminals:

REQUIREMENTS: Emissions must be  $43 + 10\log(P_o)$  dB below the mean power output of the transmitter.

For 25KHz	$43 + 10\log(5.2) = 43 + 7.4 = 50.2\text{dB}$
For 12.5KHz	$50 + 10\log(P_o) = 50 + 3.01 = 53.01$
For 12.5KHz	$50 + 10 \log(1.0) = 50\text{dB}$

	EMISSION FREQUENCY ____MHz____	dB BELOW CARRIER _____
HIGH POWER	465.025	00.0
	930.05	-71.6
	1395.08	-70.5
	1860.10	-81.2
	2325.13	-83.6
	2709.15	-89.1
	3720.02	-88.4
	14650.30	-89.1
LOW POWER	465.025	00.0
	930.05	-64.3
	1395.08	-65.8
	1860.10	-69.2
	2325.13	-71.6
	2709.15	-72.1
	3720.02	-73.2
	4650.30	-71.5

2.991 Continued          Spurious\_Emissions\_at\_the\_Antenna\_Terminals:

METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. An audio generator was connected to the UUT through a dummy microphone circuit and the output of the transmitter connected to a standard load and from the standard load through a pre-selector filter of the spectrum analyzer. The spectrum was scanned from 400KHz to at least the tenth harmonic of the fundamental using a HP model 8566B spectrum analyzer. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 25355 WEST NEWBERRY ROAD, NEWBERRY FLORIDA 32669.

2.993(a)(b)          Field\_strength\_of\_spurious\_emissions:

NAME OF TEST:                  RADIATED SPURIOUS EMISSIONS

REQUIREMENTS:              Emissions must be 43 +10log(Po) dB below the mean power output of the transmitter.

HIGH POWER                  50 + 10log(5.2) = 57.0 dB  
 LOW POWER                  50 + 10log(1.0) = 50.0 dB


EMISSION FREQUENCY _MHz_	METER READING @ 3 METERS _dBuV_	COAX LOSS dB	ANTENNA CORRECTION FIELD		ATT. _dB_	dB_	
			FACTOR dB_	STRENGTH dBuV/m			
HIGH POWER							
465.06	109.20	1.60	18.50	129.30	0.0	0.0	V
930.08	43.90	2.90	24.14	70.94	58.36	1.36	H
1395.00	42.80	1.00	25.58	69.38	59.92	2.92	H
1860.00	26.80	1.01	27.44	55.25	74.05	17.05	H
2325.00	26.00	1.08	28.81	55.89	73.41	16.41	H
2790.00	19.90	1.15	29.98	51.02	78.28	21.28	H
3255.00	34.90	1.22	31.14	67.26	62.04	5.04	H
3720.00	24.50	1.29	32.30	58.09	71.21	14.21	H
4185.00	31.00	1.36	33.21	65.57	63.73	67.3	H
4650.20	12.60	1.43	33.73	47.76	81.54	24.54	H
LOW POWER							
465.06	102.90	1.60	18.50	123.00	0.0	0.0	V
930.08	44.90	2.90	24.14	71.94	51.06	1.06	H
1395.00	43.80	1.00	25.58	70.38	52.62	2.62	H
1860.00	27.30	1.01	27.44	55.75	67.25	17.25	H
2325.00R	27.20	1.08	28.81	57.09	65.91	15.91	H
2790.00R	19.40	1.15	29.98	50.52	72.48	22.48	H
3255.00	35.20	1.22	31.14	67.56	55.44	5.44	H
3720.00R	25.30	1.29	32.30	58.89	64.11	14.11	H
4185.00R	32.20	1.36	33.21	66.77	56.23	6.23	H
4650.30R	13.70	1.43	33.73	48.86	74.14	24.14	H

2.993(a)(b) Field\_strength\_of\_spurious\_emissions:

METHOD OF MEASUREMENT: The tabulated Data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per ANSI STANDARD C63.4-1992 with the exception of briefly connecting the transmitter to a half wave dipole for the purpose of establishing a reference. Measurements were made at the open field test site of TIMCO ENGINEERING INC. located at 6051 N.W. 19th Lane Gainesville, FL 32605.

2.993(a)(b) Continued Field\_strength\_of\_spurious\_emissions:

### Method of Measuring Radiated Spurious Emissions

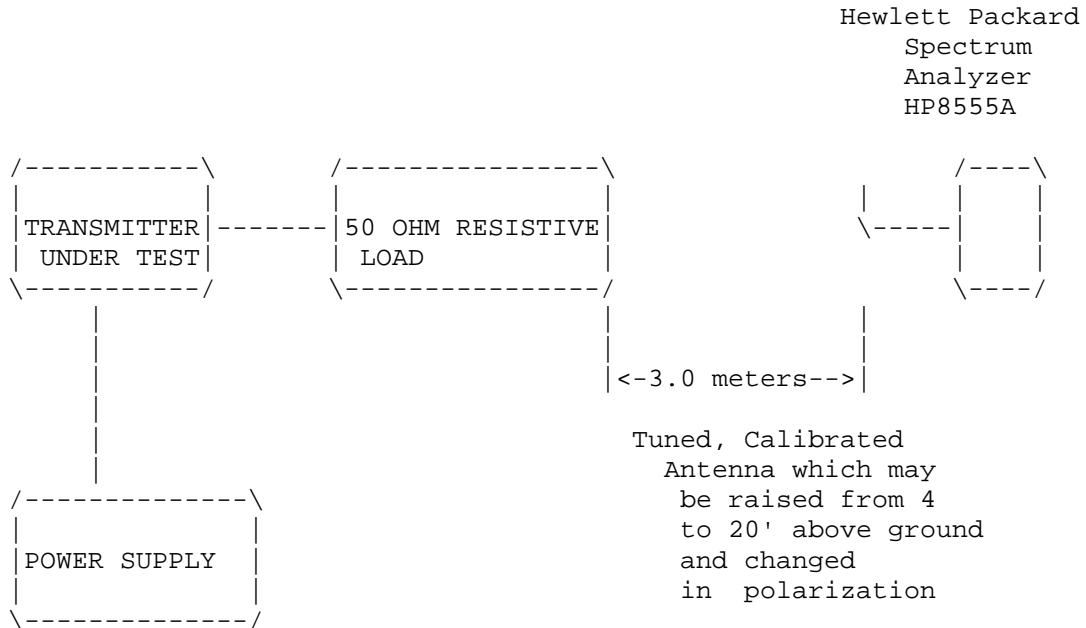

Equipment placed 4' above ground on a rotatable platform.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66HX292UT  
REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT  
PAGE #: 7



2.995(a)(b)(d) Frequency\_stability:  
90.213(a)

Temperature and voltage tests were performed to verify that the frequency remains within the .00025%, 2.5 ppm specification limit, for 25KHz spacing & 0.00025% for 12.5KHz spacing and 0.0001% for 6.25KHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 degrees C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 degrees C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 second intervals. The worst case number was recorded for temperature plotting. This procedure was repeated in 10 degree increments up to + 50 degrees C. Readings were also taken at minus 25% of the battery voltage of 5.4VDC, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 465.012 500MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	465.012 500	00.0
-30_____	465.011 800	-1.50
-20_____	465.012 800	+0.65
-10_____	465.012 880	+0.82
0_____	465.012 670	+0.37
+10_____	465.012 620	0.25
+20_____	465.012 570	+0.15
+30_____	465.012 360	-0.30
+40_____	465.012 240	-0.56
+50_____	465.012 050	-0.97

20oC Battery End-Point 5.6VDC 465.012 720 +0.47

RESULTS OF MEASUREMENTS: The maximum frequency variation over the temperature range was -1.50 to 0.82 ppm. The maximum frequency variation over the voltage range was +0.47 ppm.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66HX292UT  
REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT  
PAGE #: 8

2.995(a)(b)(d) Frequency\_stability:  
90.214 Transient Frequency Behavior

REQUIREMENTS: In the 150-174MHz frequency band, transient frequencies must be within the maximum frequency difference limits during the time interval indicated below for 12.5kHz Channels:


Time Interval	Maximum Frequency	Portable Radios 150-174Mhz
t1	+12.5kHz	5.0ms
t2	+6.25kHz	20.0ms
t3,t4	+12.5kHz	5.0ms

TEST PROCEEDURE: TIA/EIA TS603 PARA 2.2.19, the levels were set as follows;

1. Using the variable attenuator the transmitter level was set to 40dB below the test recievers maximum input level, then the transmitter was turned off.
2. With the Transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30dB.
4. With the levels set as above the transient frequency behavior was observed & recorded.

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66HX292UT  
REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT  
PAGE #: 9

2.995(a)(b)(d) Frequency\_stability:  
 90.214 Transient Frequency Behavior  
 (Continued)

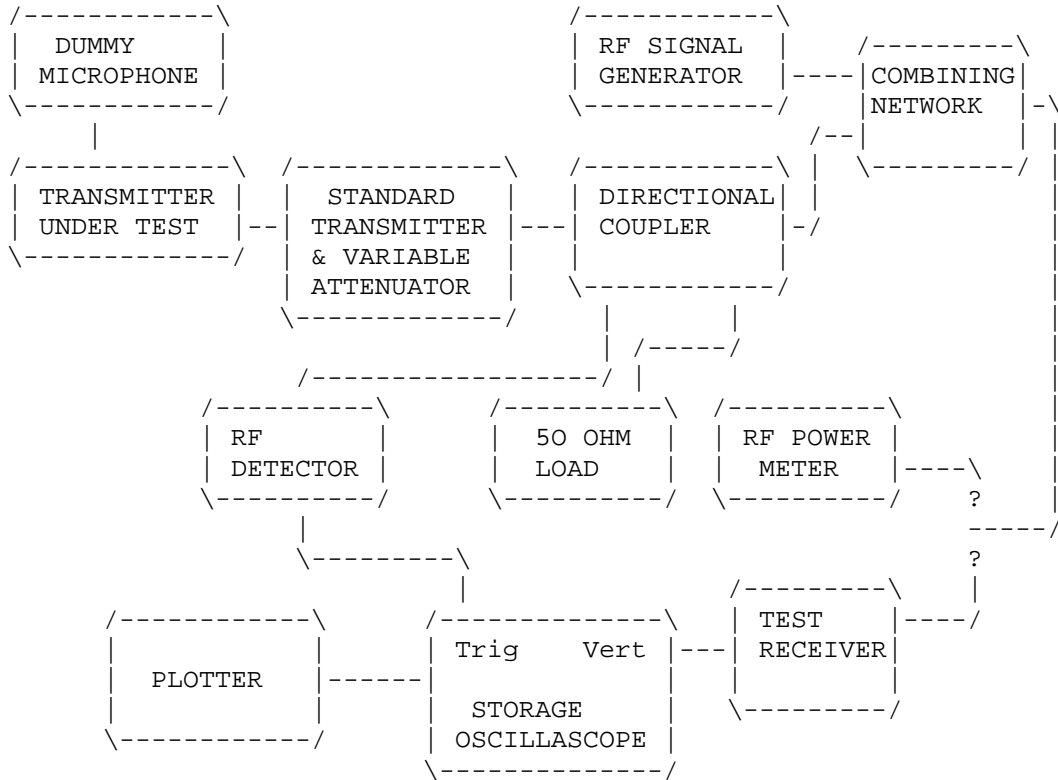

APPLICANT: YAESU MUSEN CO., LTD.  
 FCC ID: K66HX292UT  
 REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT  
 PAGE #: 10

- 2.983(f) Photo\_or\_Drawing\_of\_Label:  
See Page 2.
- 2.983(g) Photos\_of\_Equipment:  
See Pages 4A-4L.
- 2.999 Measurement\_Procedures\_for\_Type\_Acceptance:  
  
Measurement techniques have been in accordance with EIA specifications and the FCC requirements.
- 2.909 Certification\_of\_Technical\_Data\_by\_Engineers  
  
We, the undersigned, certify that the enclosed measurements and enclosed data are true and correct.

S. S. SANDERS  
S.S. Sanders  
Engineer

LIST\_OF\_TEST\_EQUIPMENT

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/ preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP 8449B - OPT H02 Cal. 6/26/98
2. Signal Generator, Hewlett Packard 8640B, cal. 10/1/98
3. Eaton Biconnical Antenna Model 94455-1  
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 10/30/98
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal. 11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber

APPLICANT: YAESU MUSEN CO., LTD.  
FCC ID: K66HX292UT  
REPORT #: F:\CUS\Y\YAE\YAE145A9.RPT  
PAGE #: 11