
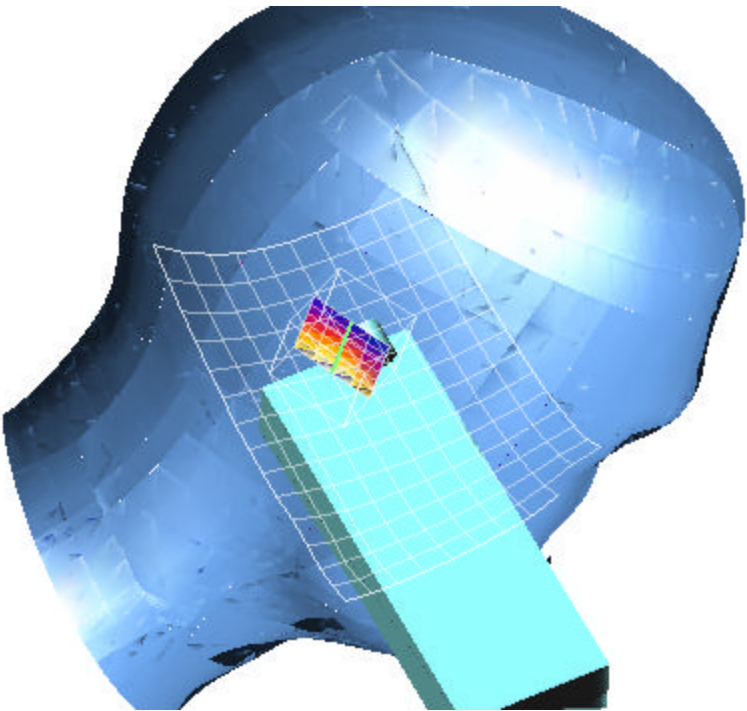


Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.018mW.da4

EUT Setup Configuration 1 (Left Head)



Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.018mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Left Touched; Low channel (2401 MHz)

Communication System: FHSS - Giant; Frequency: 2401 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.26 V/m

Peak SAR = 0.0377 mW/g

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.00848 mW/g

Power Drift = -0.12 dB

Area Scan (15x11x1): Measurement grid: dx=10mm, dy=10mm

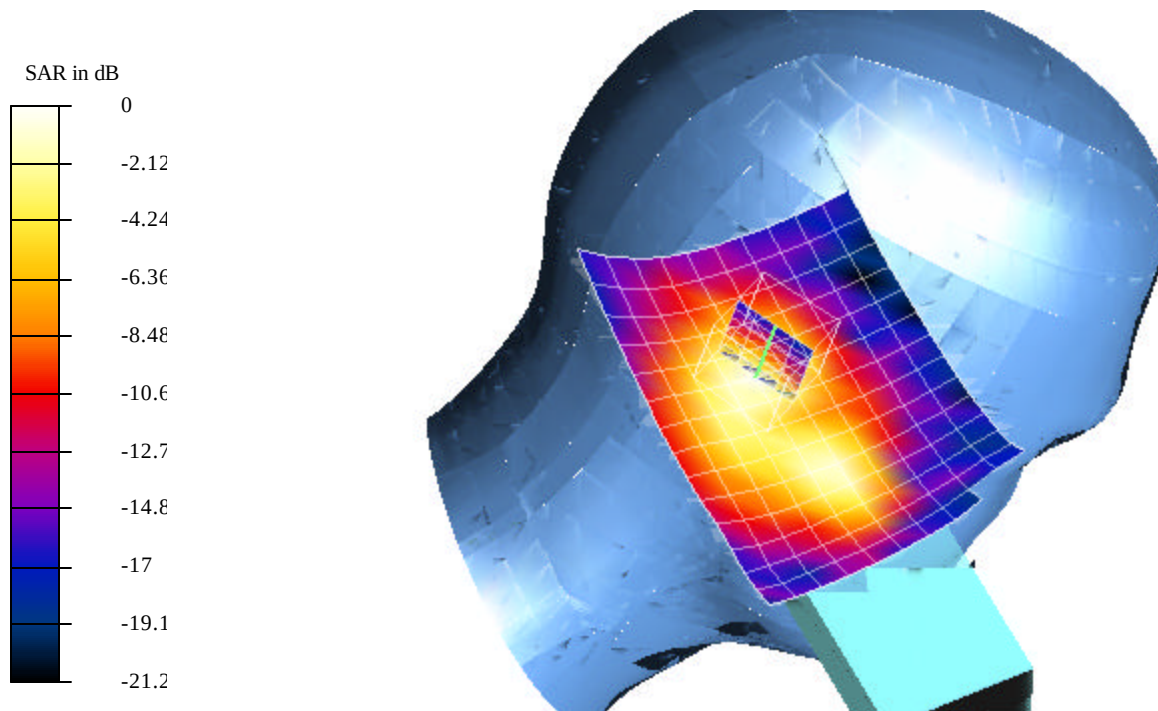

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.0162mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Left Touched; Middle channel (2442MHz)

Communication System: FHSS - Giant; Frequency: 2442 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.86 V/m

Peak SAR = 0.0339 mW/g

SAR(1 g) = 0.0162 mW/g; SAR(10 g) = 0.00754 mW/g

Power Drift = -0.12 dB

Area Scan (15x11x1): Measurement grid: dx=10mm, dy=10mm

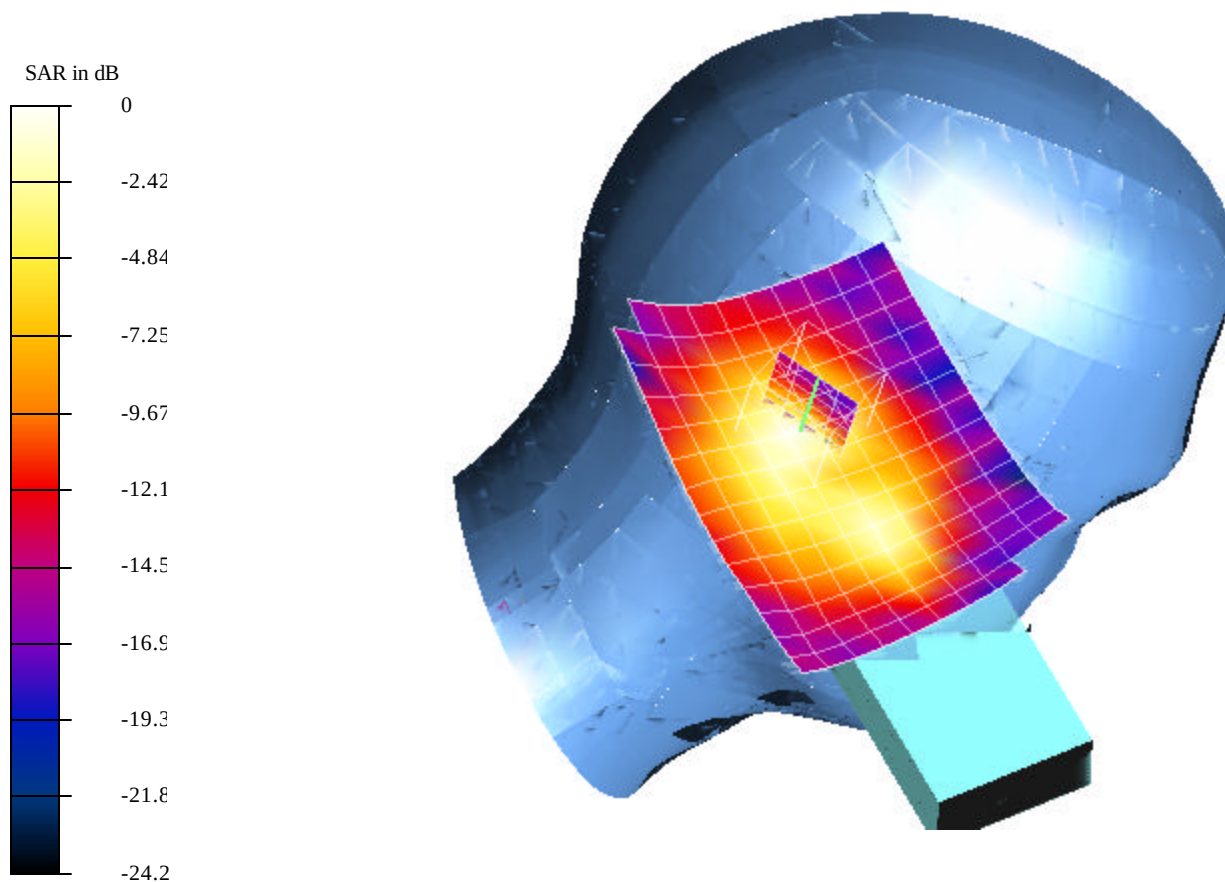

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.0134mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Left Touched; High channel (2482MHz)

Communication System: FHSS - Giant; Frequency: 2482 MHz; Duty Cycle: 1:12.5
Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.75 V/m

Peak SAR = 0.0279 mW/g

SAR(1 g) = 0.0134 mW/g; SAR(10 g) = 0.00624 mW/g

Power Drift = -0.02 dB

Area Scan (15x11x1): Measurement grid: dx=10mm, dy=10mm

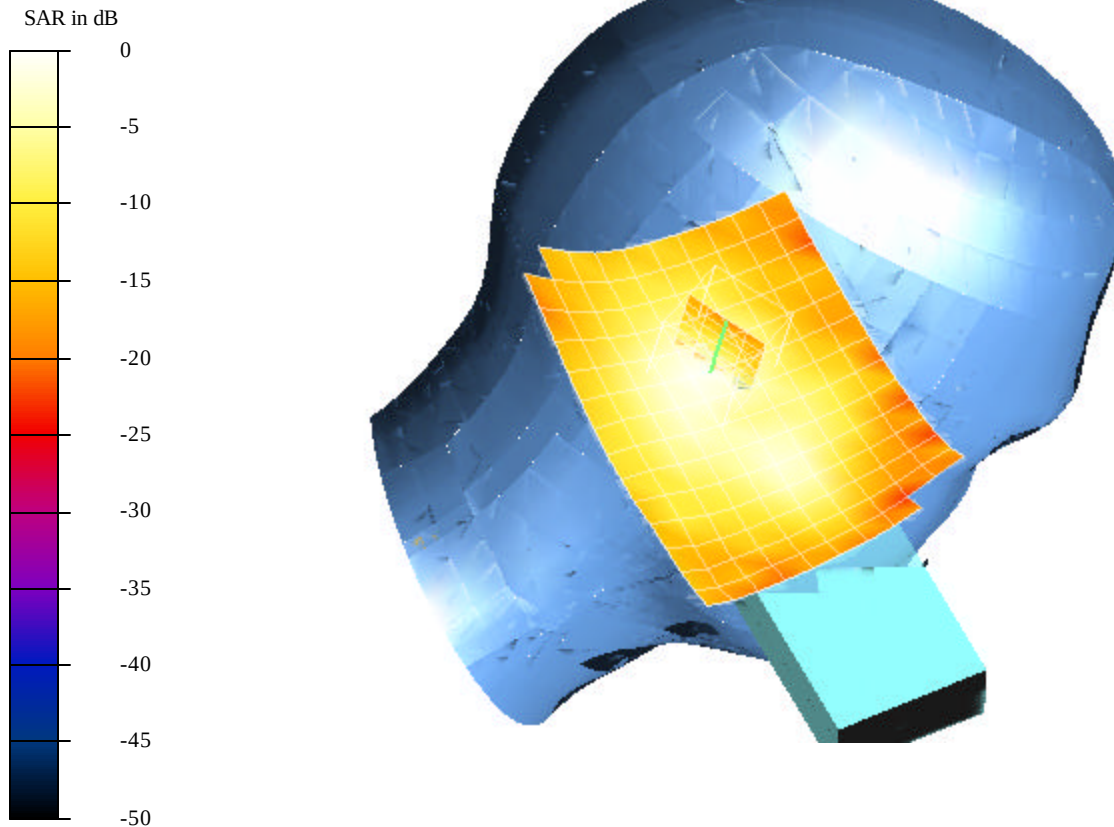

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0137mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Left Touched; Low channel (2401MHz)

Communication System: FHSS - Giant; Frequency: 2401 MHz; Duty Cycle: 1:12.5
Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)
Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.56 V/m

Peak SAR = 0.0288 mW/g

SAR(1 g) = 0.0137 mW/g; SAR(10 g) = 0.00647 mW/g

Power Drift = -0.08 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

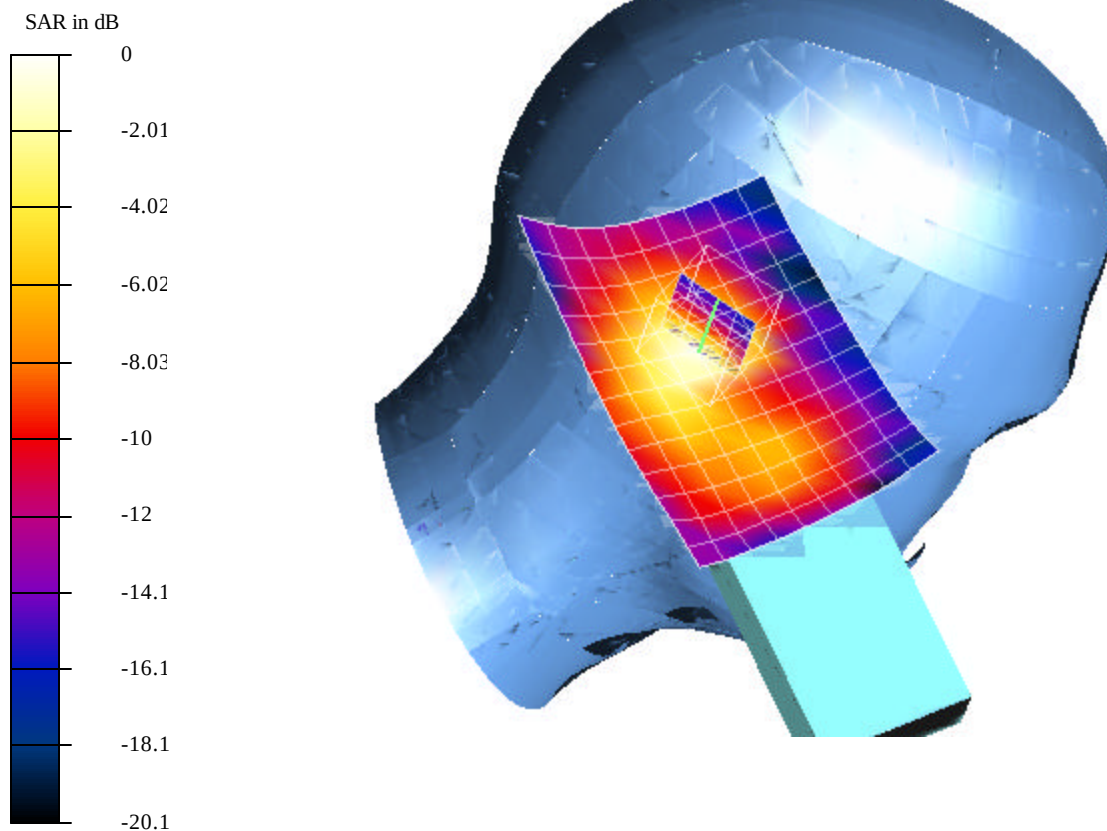

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.0123mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Left Touched; Middle channel (2442MHz)

Communication System: FHSS - Giant; Frequency: 2442 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 2.42 V/m

Peak SAR = 0.0285 mW/g

SAR(1 g) = 0.0123 mW/g; SAR(10 g) = 0.00564 mW/g

Power Drift = -0.12 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

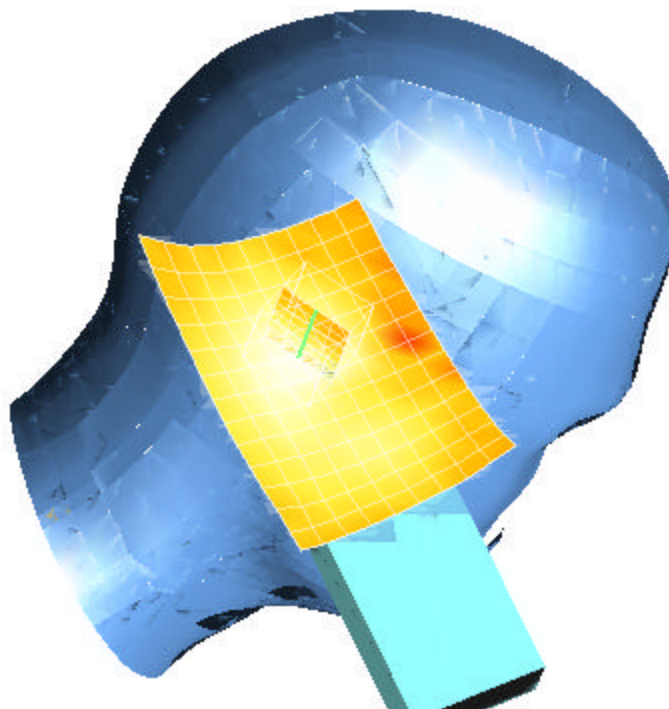

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.0116mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Left Tilt; High channel (2482MHz)

Communication System: FHSS - Giant; Frequency: 2482 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.45 V/m

Peak SAR = 0.0245 mW/g

SAR(1 g) = 0.0116 mW/g; SAR(10 g) = 0.00543 mW/g


Power Drift = -0.1 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

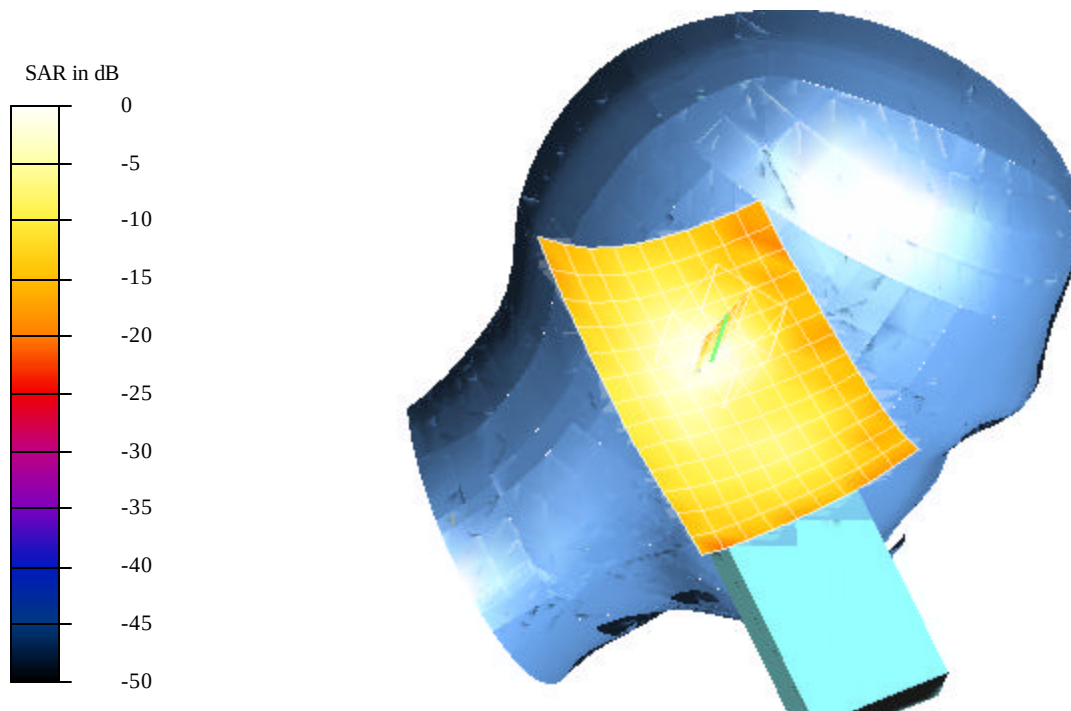

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0239mW.da4

EUT Setup Configuration 2 (Right Head)

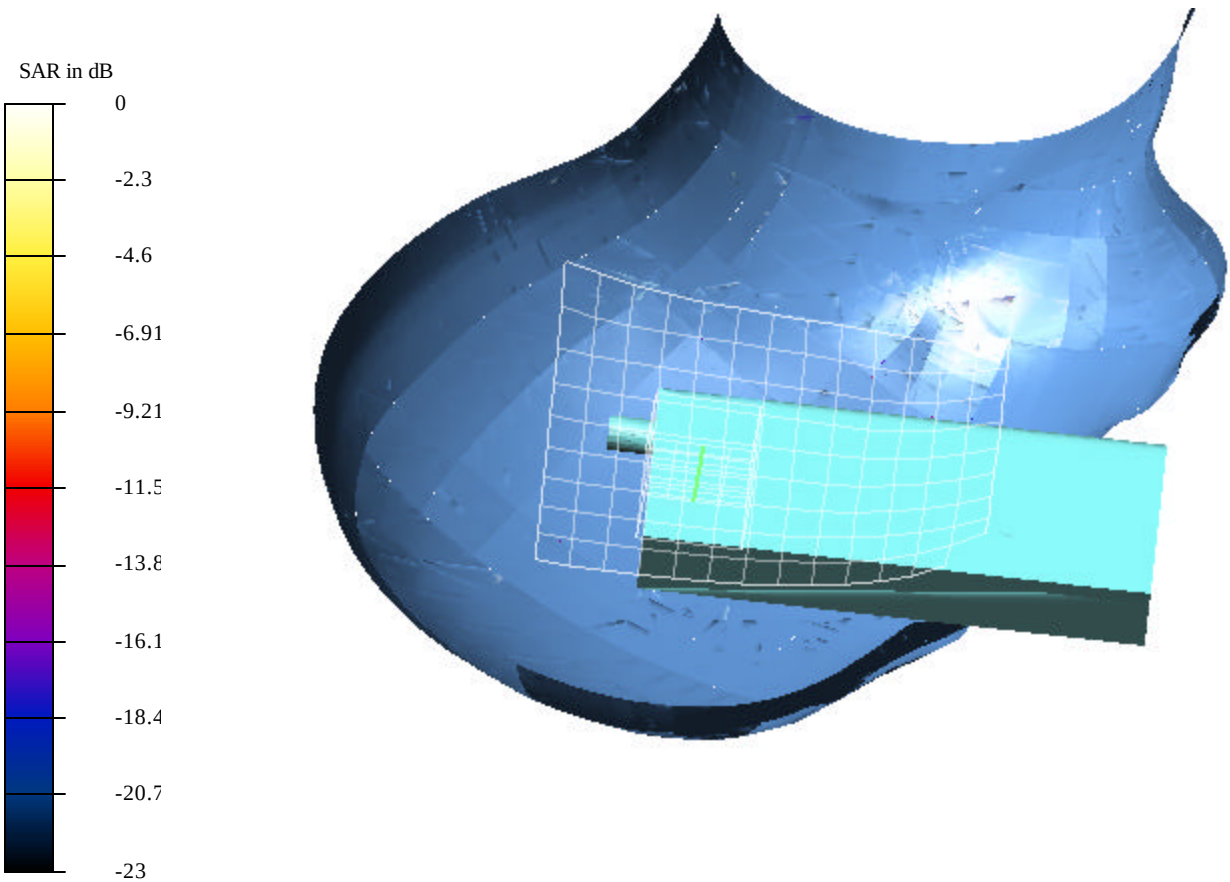

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.0239mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Left Tilt; Low channel (2401MHz)

Communication System: FHSS - Giant; Frequency: 2401 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.59 V/m

Peak SAR = 0.0525 mW/g

SAR(1 g) = 0.0239 mW/g; SAR(10 g) = 0.0112 mW/g

Power Drift = -0.09 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

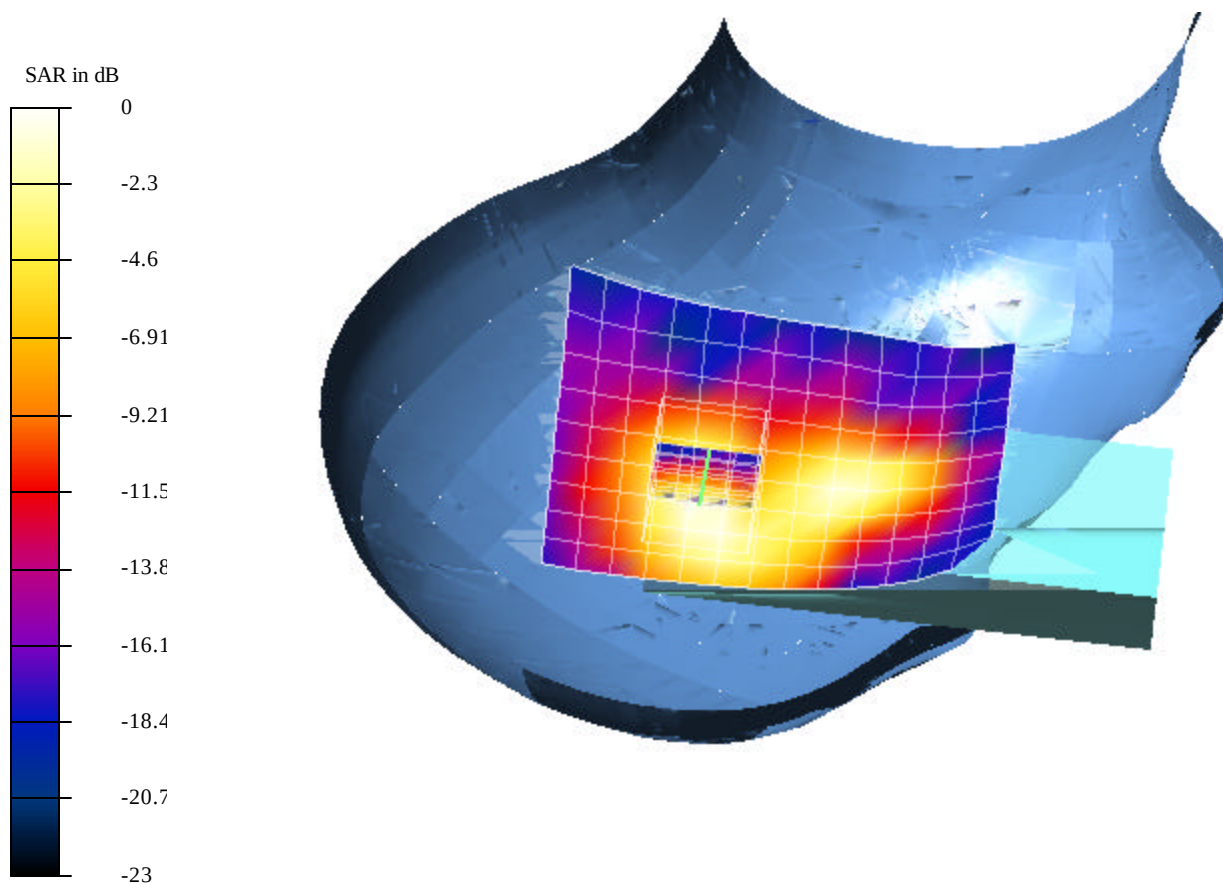

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.0206mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Right touch; Middle channel (2442MHz)

Communication System: FHSS - Giant; Frequency: 2442 MHz; Duty Cycle: 1:12.5
Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.38 V/m

Peak SAR = 0.0447 mW/g

SAR(1 g) = 0.0206 mW/g; SAR(10 g) = 0.0097 mW/g

Power Drift = -0.12 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

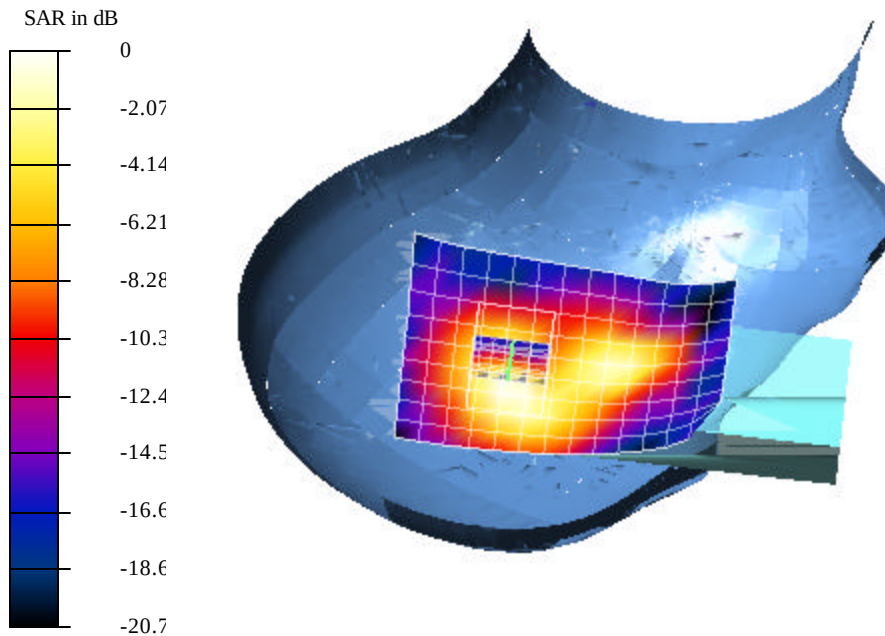

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.0182mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Right touch; High channel (2482MHz)

Communication System: FHSS - Giant; Frequency: 2482 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.96 V/m

Peak SAR = 0.0394 mW/g

SAR(1 g) = 0.0182 mW/g; SAR(10 g) = 0.00842 mW/g

Power Drift = -0.02 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

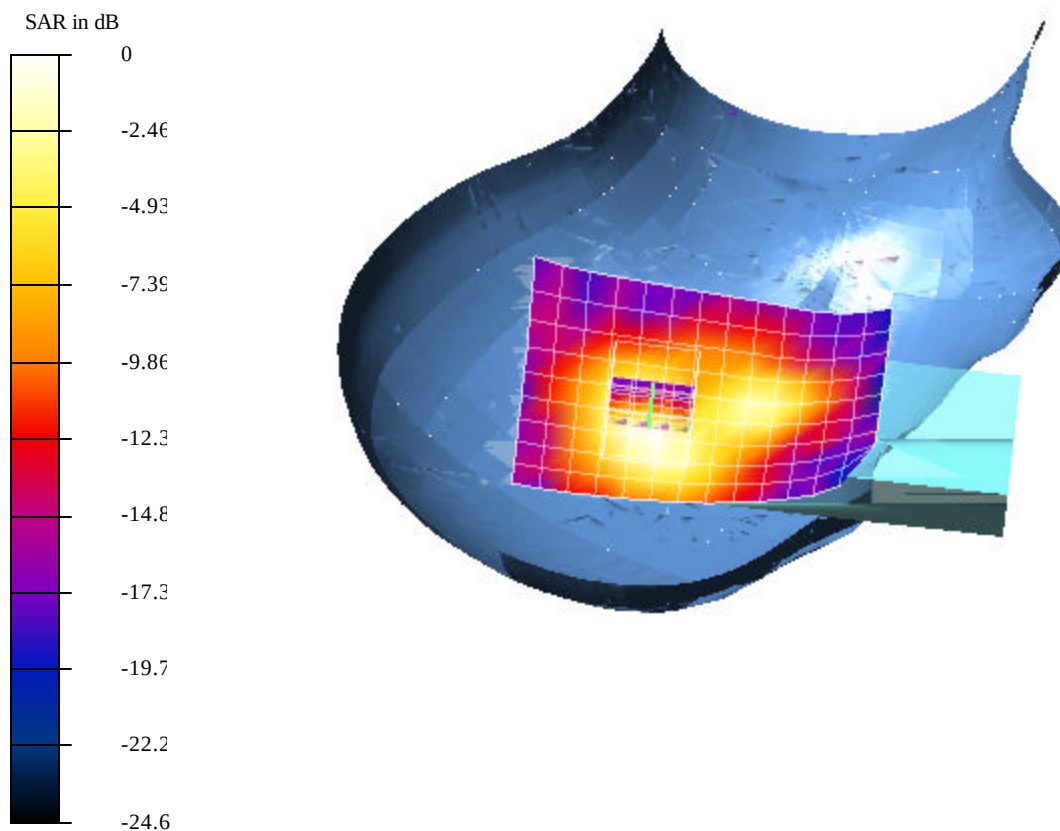

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0182mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Right Tilt; Low channel (2401MHz)

Communication System: FHSS - Giant; Frequency: 2401 MHz; Duty Cycle: 1:12.5
Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.28 V/m

Peak SAR = 0.0377 mW/g

SAR(1 g) = 0.0182 mW/g; SAR(10 g) = 0.00862 mW/g

Power Drift = -0.12 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

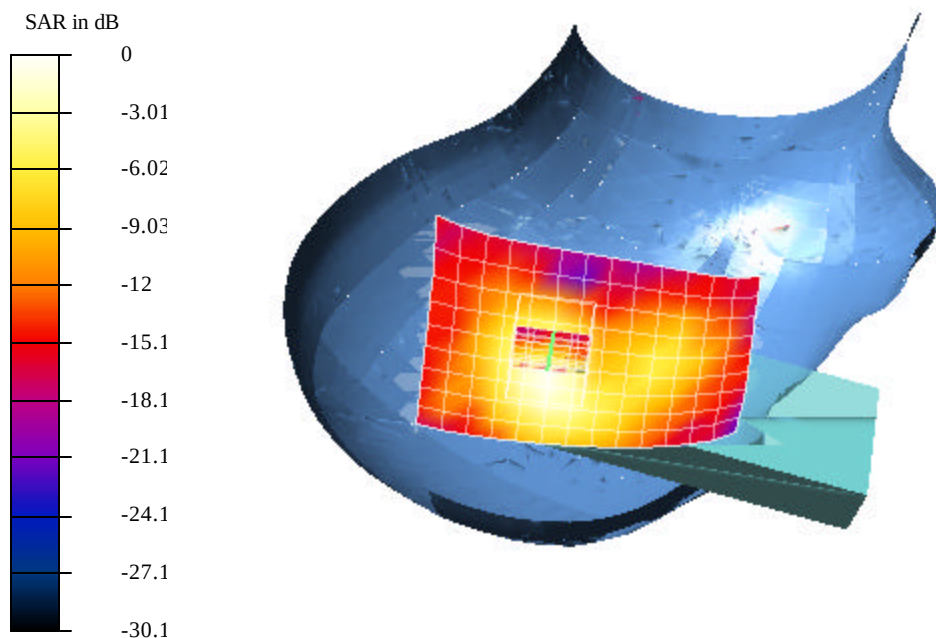

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.0155mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Right Tilt; Middle channel (2442MHz)

Communication System: FHSS - Giant; Frequency: 2442 MHz; Duty Cycle: 1:12.5

Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.93 V/m

Peak SAR = 0.0332 mW/g

SAR(1 g) = 0.0155 mW/g; SAR(10 g) = 0.00723 mW/g

Power Drift = -0.13 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

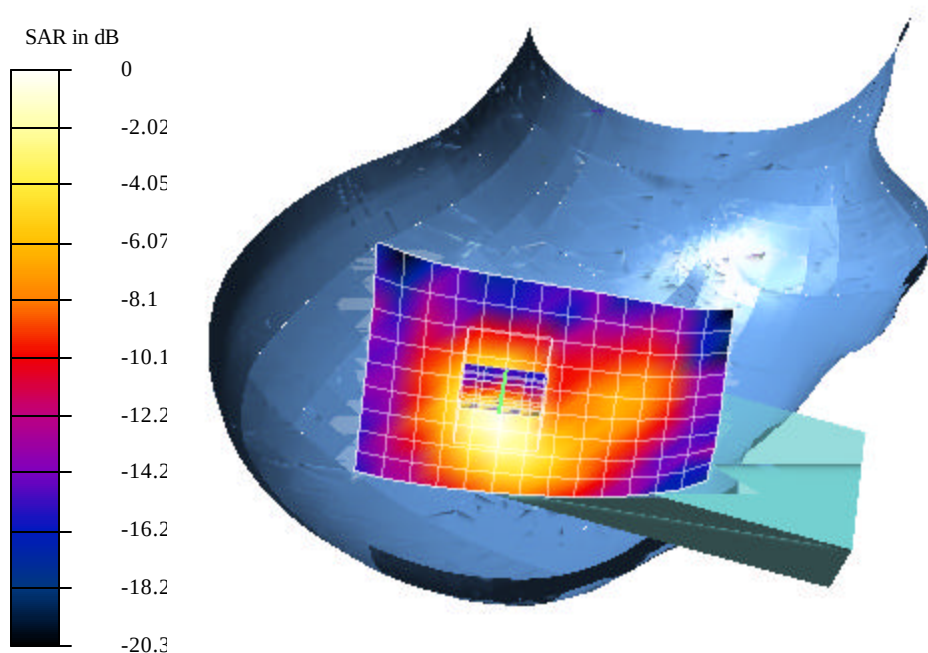

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.0137mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Right Tilt; High channel (2482MHz)

Communication System: FHSS - Giant; Frequency: 2482 MHz; Duty Cycle: 1:12.5
Medium: Head 2450 MHz ($\sigma = 1.8618$ mho/m, $\epsilon = 39.45$, $\rho = 1000$ kg/m³)
Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.1, 5.1, 5.1); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 2.68 V/m

Peak SAR = 0.032 mW/g

SAR(1 g) = 0.0137 mW/g; SAR(10 g) = 0.00623 mW/g


Power Drift = -0.1 dB

Area Scan (14x10x1): Measurement grid: dx=10mm, dy=10mm

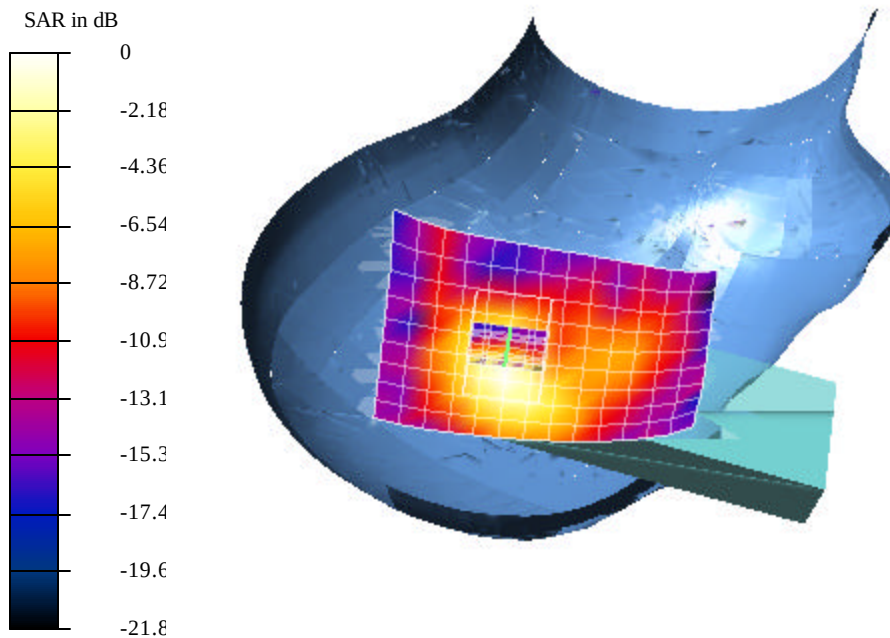

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0917mW.da4

EUT Setup Configuration 3 (Body / Flat Position

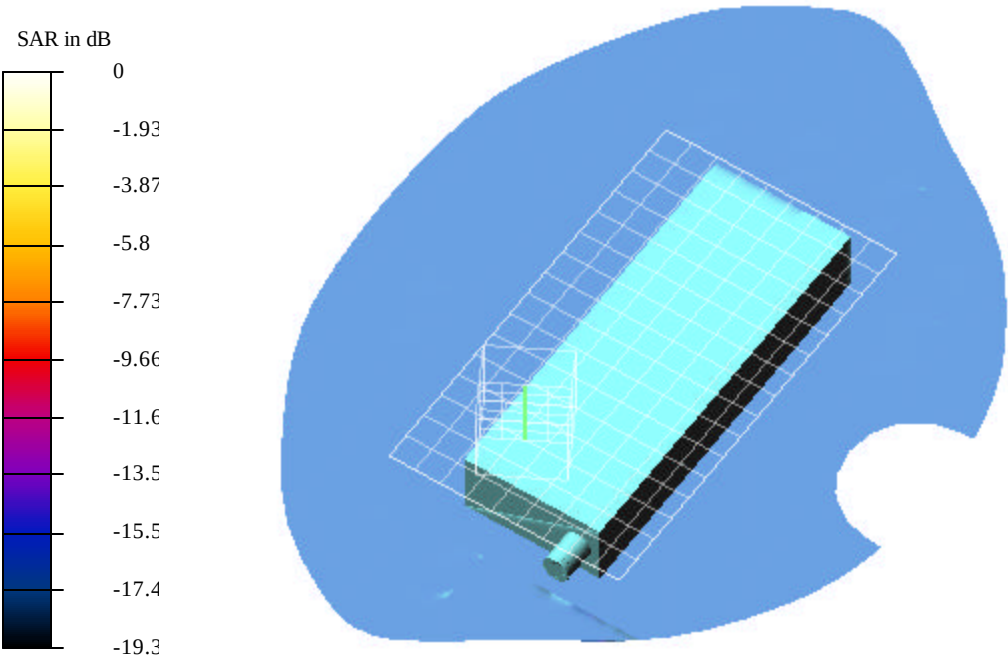

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0917mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Body; Low channel (2401MHz)

Communication System: FHSS - Giant; Frequency: 2401 MHz; Duty Cycle: 1:12.5
Medium: Muscle 2450 MHz ($\sigma = 2.0077$ mho/m, $\epsilon = 51.25$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1 - TP:1185
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 1.88 V/m

Peak SAR = 0.206 mW/g

SAR(1 g) = 0.0917 mW/g; SAR(10 g) = 0.046 mW/g

Power Drift = -0.04 dB

Area Scan (10x17x1): Measurement grid: dx=10mm, dy=10mm

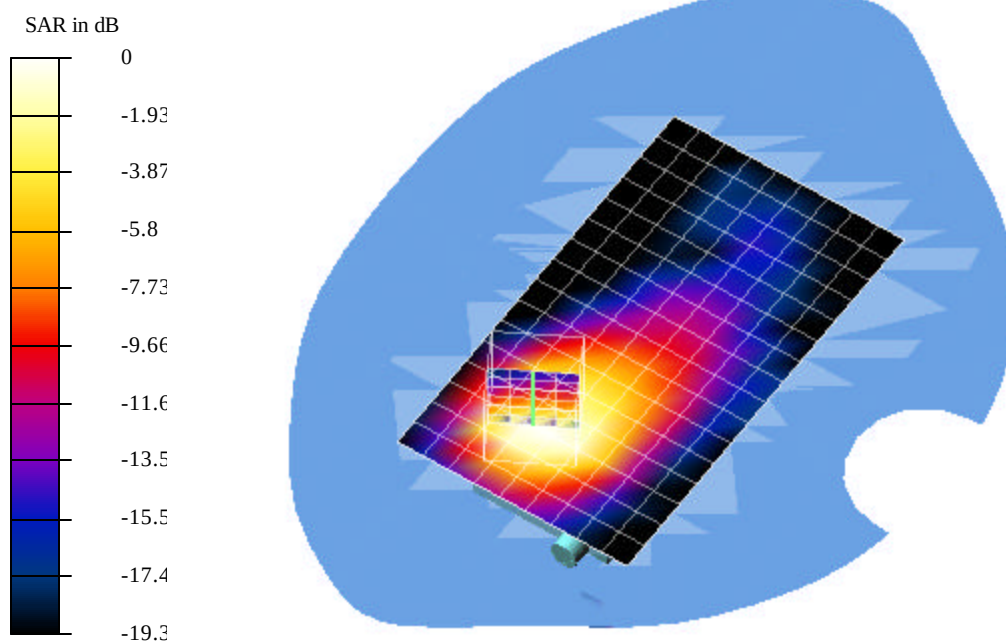

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.0699mW.da4

DUT: Giant Type & Serial Number: OL2400
Program: Body; Middle channel (2442MHz)

Communication System: FHSS - Giant; Frequency: 2442 MHz; Duty Cycle: 1:12.5
Medium: Muscle 2450 MHz ($\sigma = 2.0077$ mho/m, $\epsilon = 51.25$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1 - TP:1185
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 1.42 V/m

Peak SAR = 0.16 mW/g

SAR(1 g) = 0.0699 mW/g; SAR(10 g) = 0.0327 mW/g

Power Drift = -0.13 dB

Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

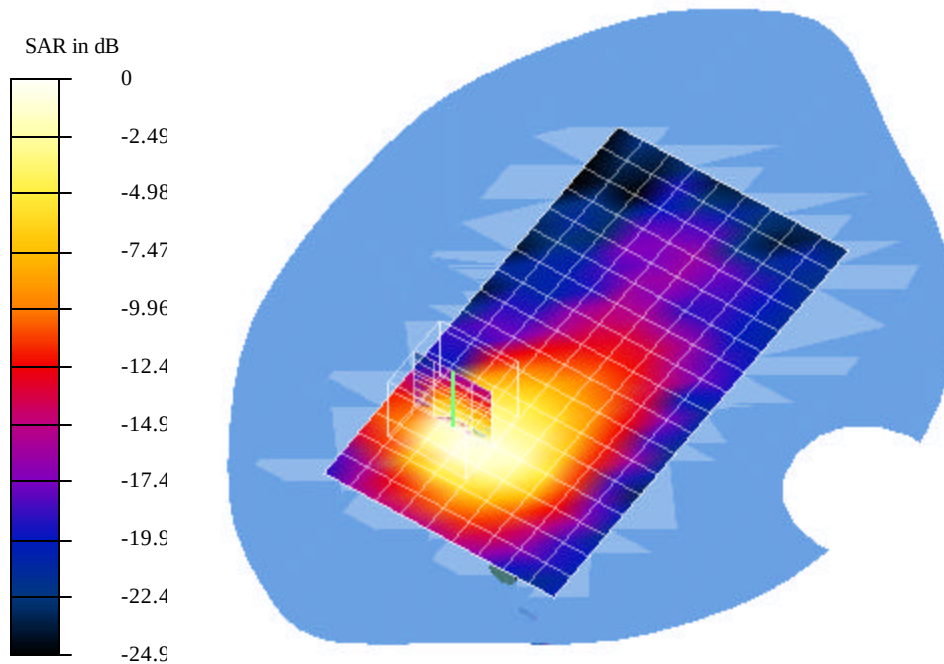

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.055mW.da4

DUT: Giant Type & Serial Number: OL2400

Program: Body; High channel (2482MHz)

Communication System: FHSS - Giant; Frequency: 2482 MHz; Duty Cycle: 1:12.5

Medium: Muscle 2450 MHz ($\sigma = 2.0077$ mho/m, $\epsilon = 51.25$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 1 - TP:1185
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm

Reference Value = 1.15 V/m

Peak SAR = 0.127 mW/g

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.0272 mW/g

Power Drift = -0.12 dB

Area Scan (10x18x1): Measurement grid: dx=10mm, dy=10mm

