




Report No.: HK08110561-1
PC Link Charging Mode
PC's AC Mains "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

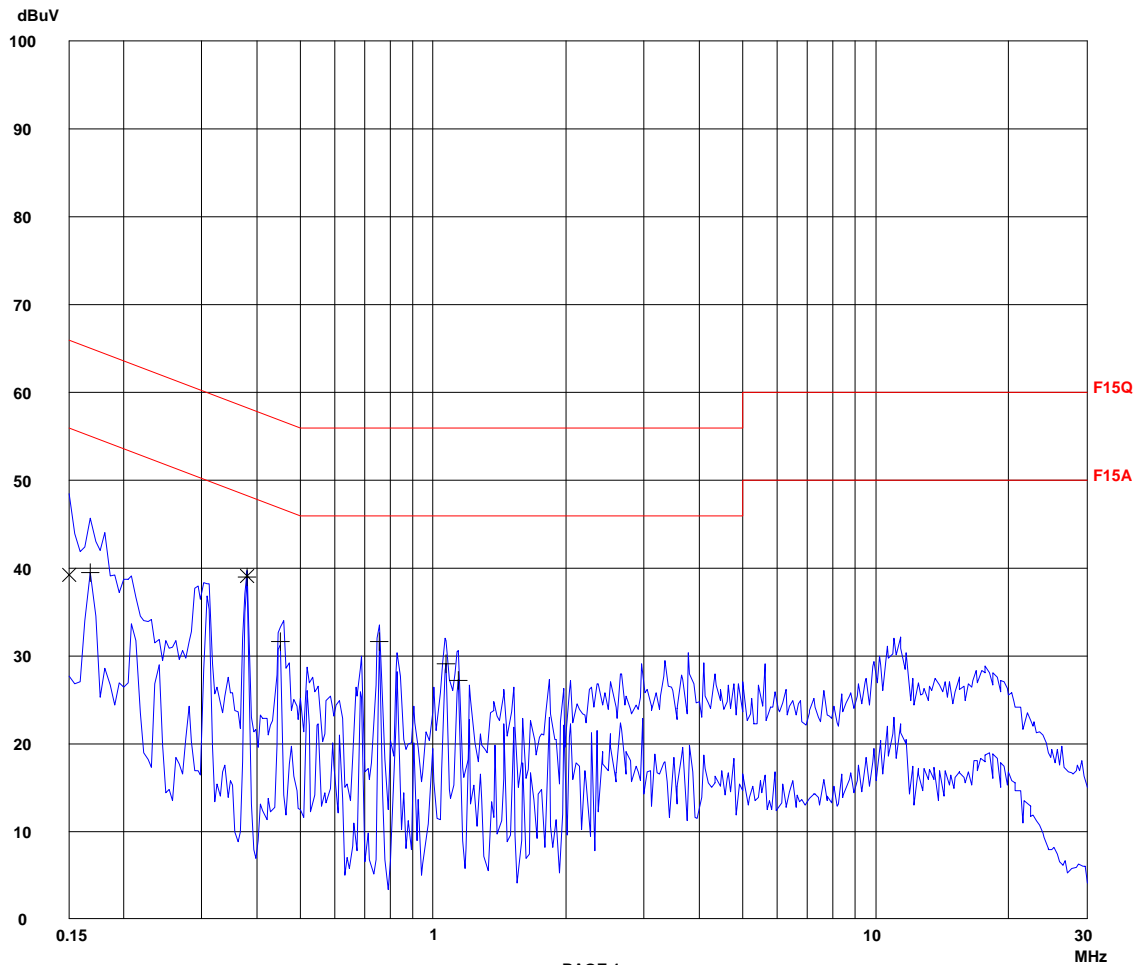



Report No.: HK08110561-1
PC Link Charging Mode
PC's AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	39.2	66.0	-26.8
0.37950	39.1	58.3	-19.2


Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.16800	39.4	55.1	-15.7
0.37950	38.9	48.3	-9.4
0.45150	31.6	46.8	-15.2
0.75750	31.6	46.0	-14.4
1.06800	29.1	46.0	-16.9
1.14000	27.2	46.0	-18.8

* limit exceeded



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

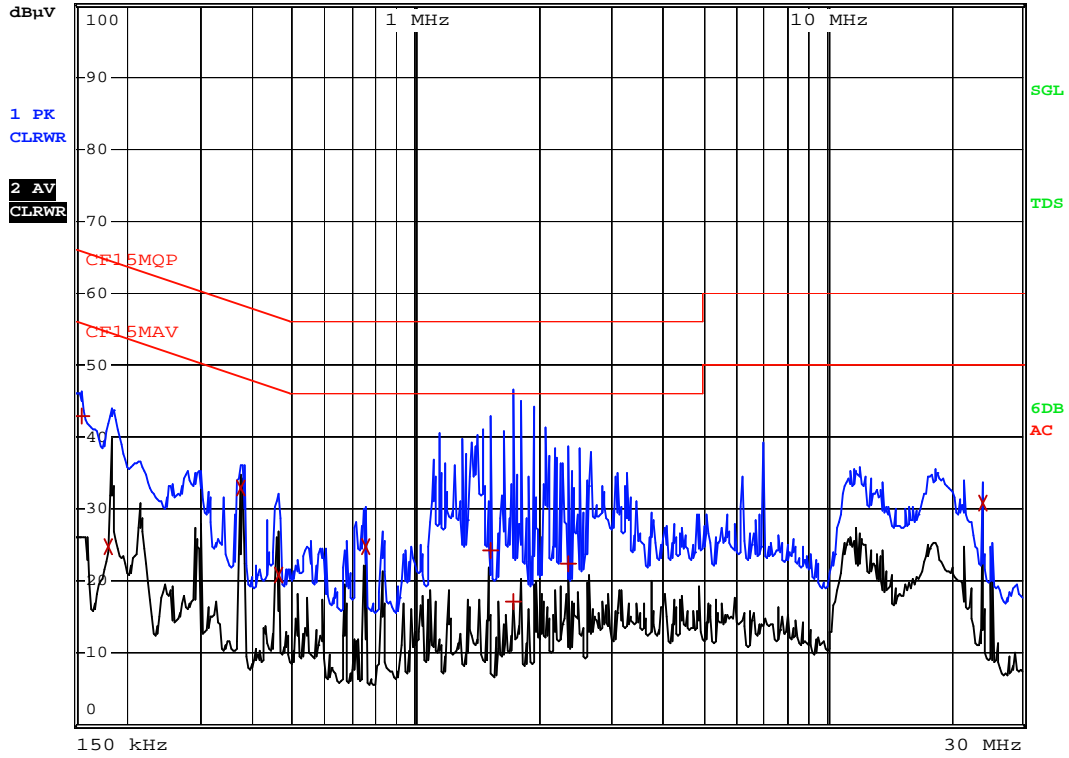

HK08110561

Date: 19.DEC.2008 21:42:34

Ctrl No.: N/A



Report No.: HK08110561-1

Weather receiver Charging by
using USB cable via computer

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		CF15MQP		
Trace2:		CF15MAV		
Trace3:		---		
	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	154.5 kHz	42.88 N	-22.87
2	Average	181.5 kHz	24.79 N	-29.62
2	Average	375 kHz	33.00 N	-15.38
2	Average	460.5 kHz	20.79 N	-25.88
2	Average	753 kHz	24.76 N	-21.23
1	Quasi Peak	1.518 MHz	24.23 L1	-31.76
1	Quasi Peak	1.734 MHz	17.21 L1	-38.78
1	Quasi Peak	2.346 MHz	22.45 L1	-33.54
2	Average	24.009 MHz	30.92 N	-19.07

HK08110561

Date: 19.DEC.2008 21:42:27

Ctrl No.: N/A