




Report No.: HK08111026-1
PC Link Charging Mode
PC's AC Mains "N"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0192

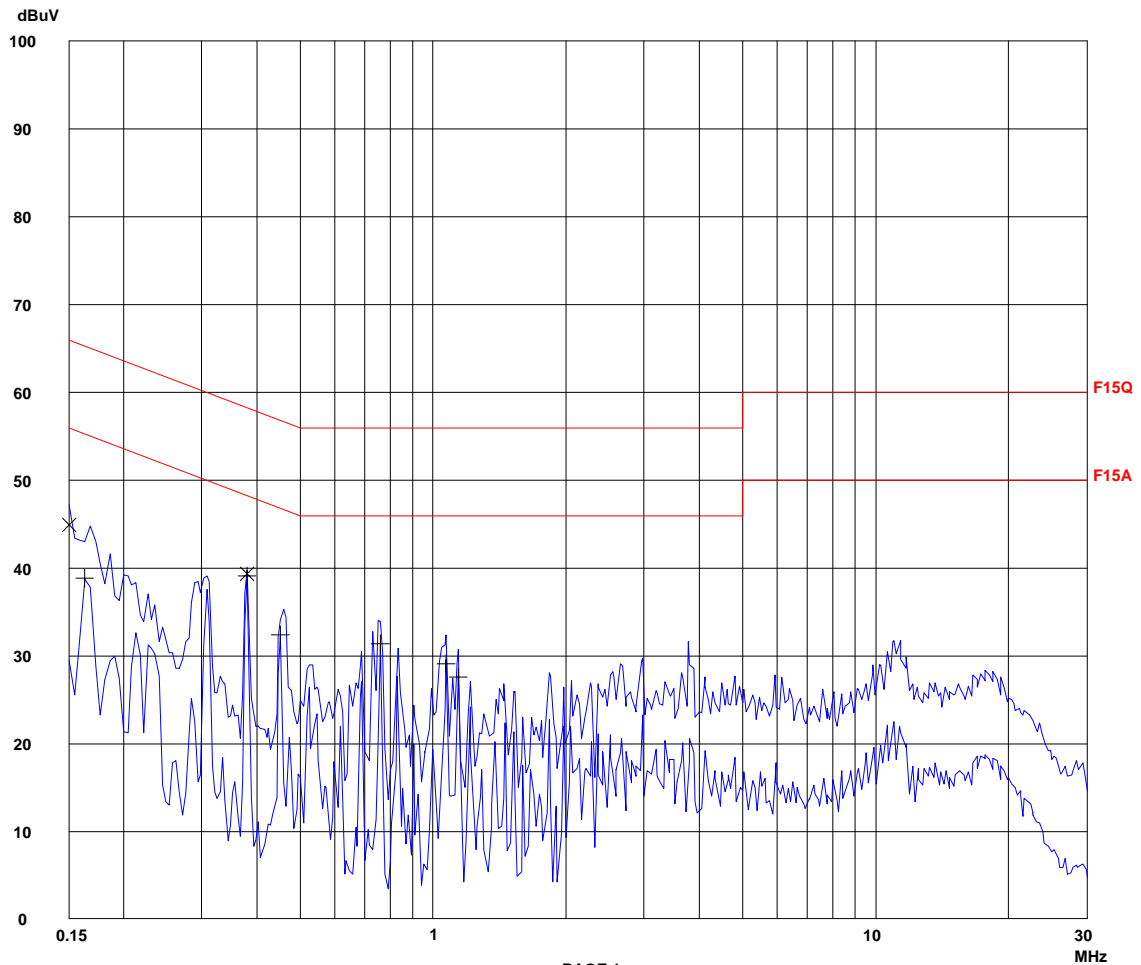



Report No.: HK08111026-1
PC Link Charging Mode
PC's AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	44.8	66.0	-21.2
0.37950	39.3	58.3	-19.0


Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.16350	38.9	55.3	-16.4
0.37950	39.0	48.3	-9.3
0.45150	32.3	46.8	-14.5
0.76200	31.4	46.0	-14.6
1.06800	29.1	46.0	-16.9
1.14000	27.5	46.0	-18.5

* limit exceeded



RBW 9 kHz
MT 1 s

Att 10 dB AUTO PREAMP OFF

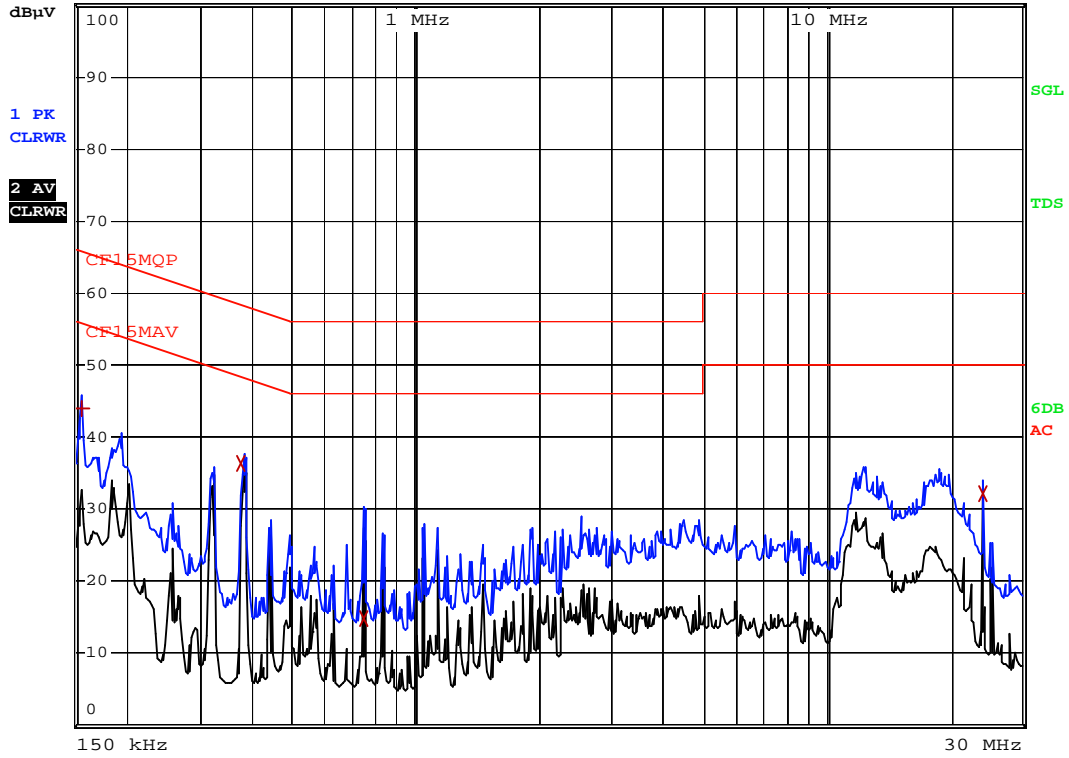

HK08111026

Date: 20.DEC.2008 01:36:04

Ctrl No.: N/A



Report No.: HK08111026-1
Weather band receiver charging
by using USB cable via computer
PC'S AC MAINS

EDIT PEAK LIST (Final Measurement Results)				
TRACE		FREQUENCY	LEVEL dB μ V	DELTA LIMIT dB
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
1	Quasi Peak	154.5 kHz	44.02 N	-21.73
2	Average	379.5 kHz	36.46 N	-11.82
2	Average	748.5 kHz	14.73 N	-31.26
2	Average	24.0045 MHz	32.15 N	-17.84

HK08111026

Date: 20.DEC.2008 01:35:58

Ctrl No.: N/A