

h

REF 127.0 dB μ V

AT 30 dB

MKR 10.45 KHz

-.09 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

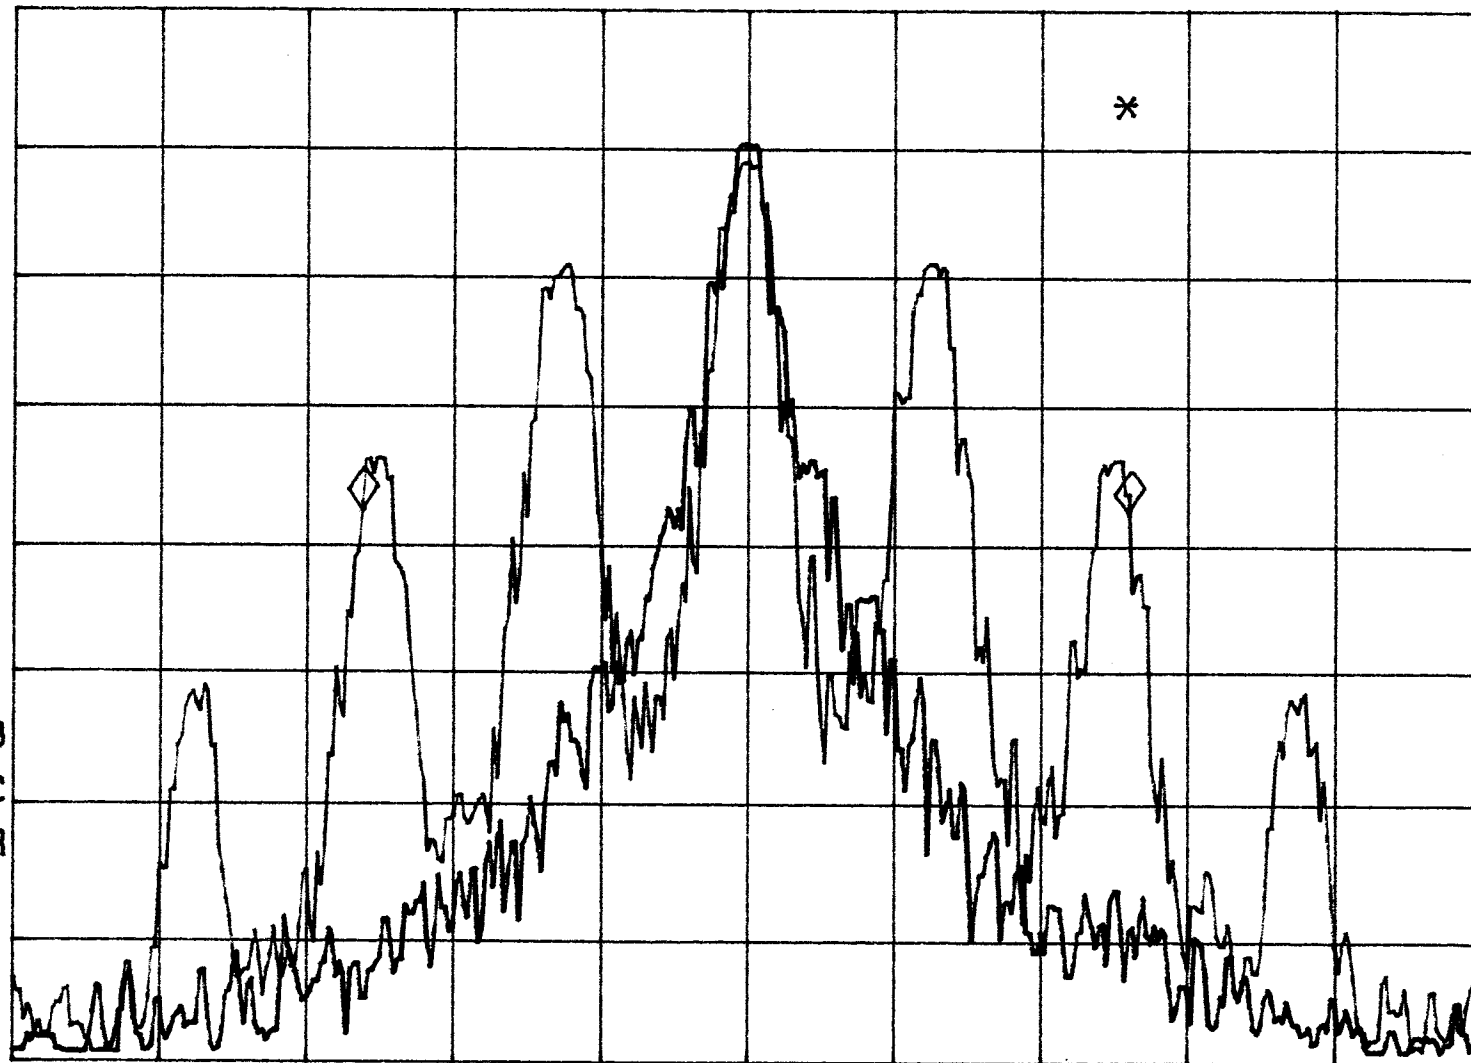

CENTER 462.63750 MHz


RES BW 300 Hz

VBW 300 Hz


SPAN 20.00 KHz

SWP 1.00 sec


Audio Low Pass Filter Response

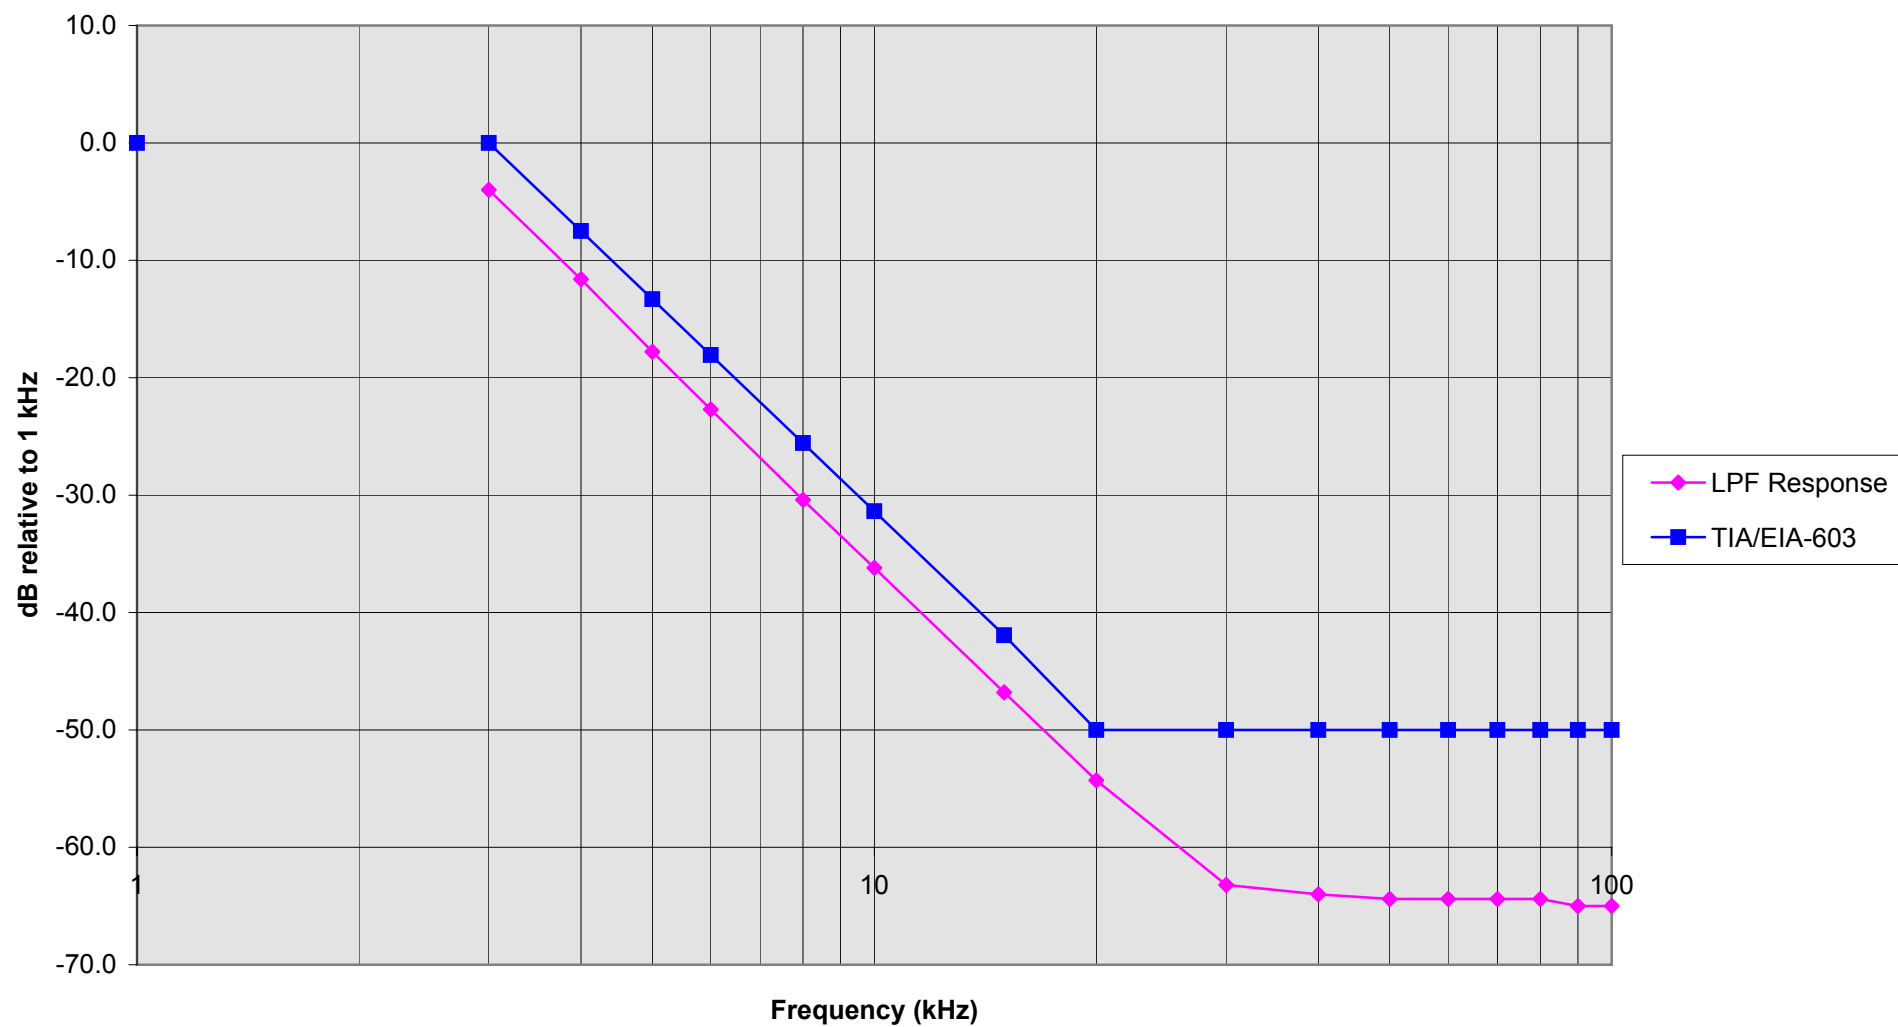

Modulation Frequency Response

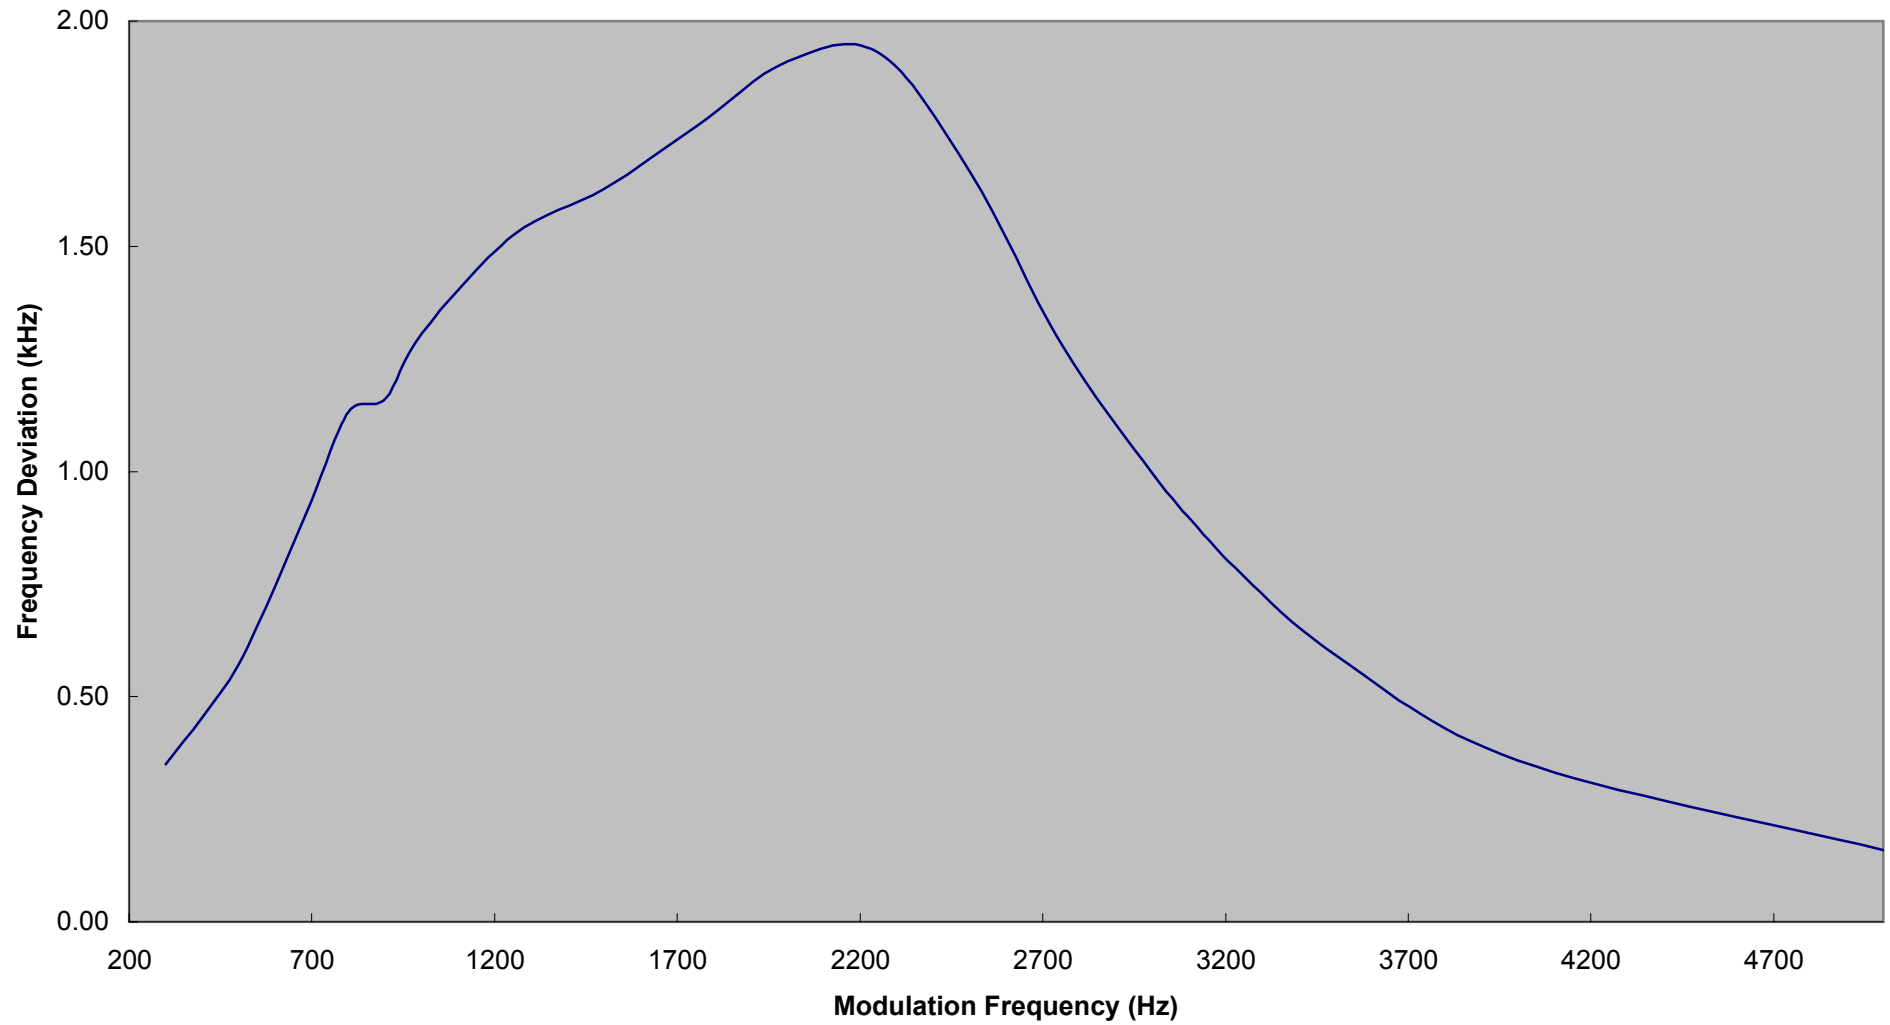

Modulation Limiting Characteristic

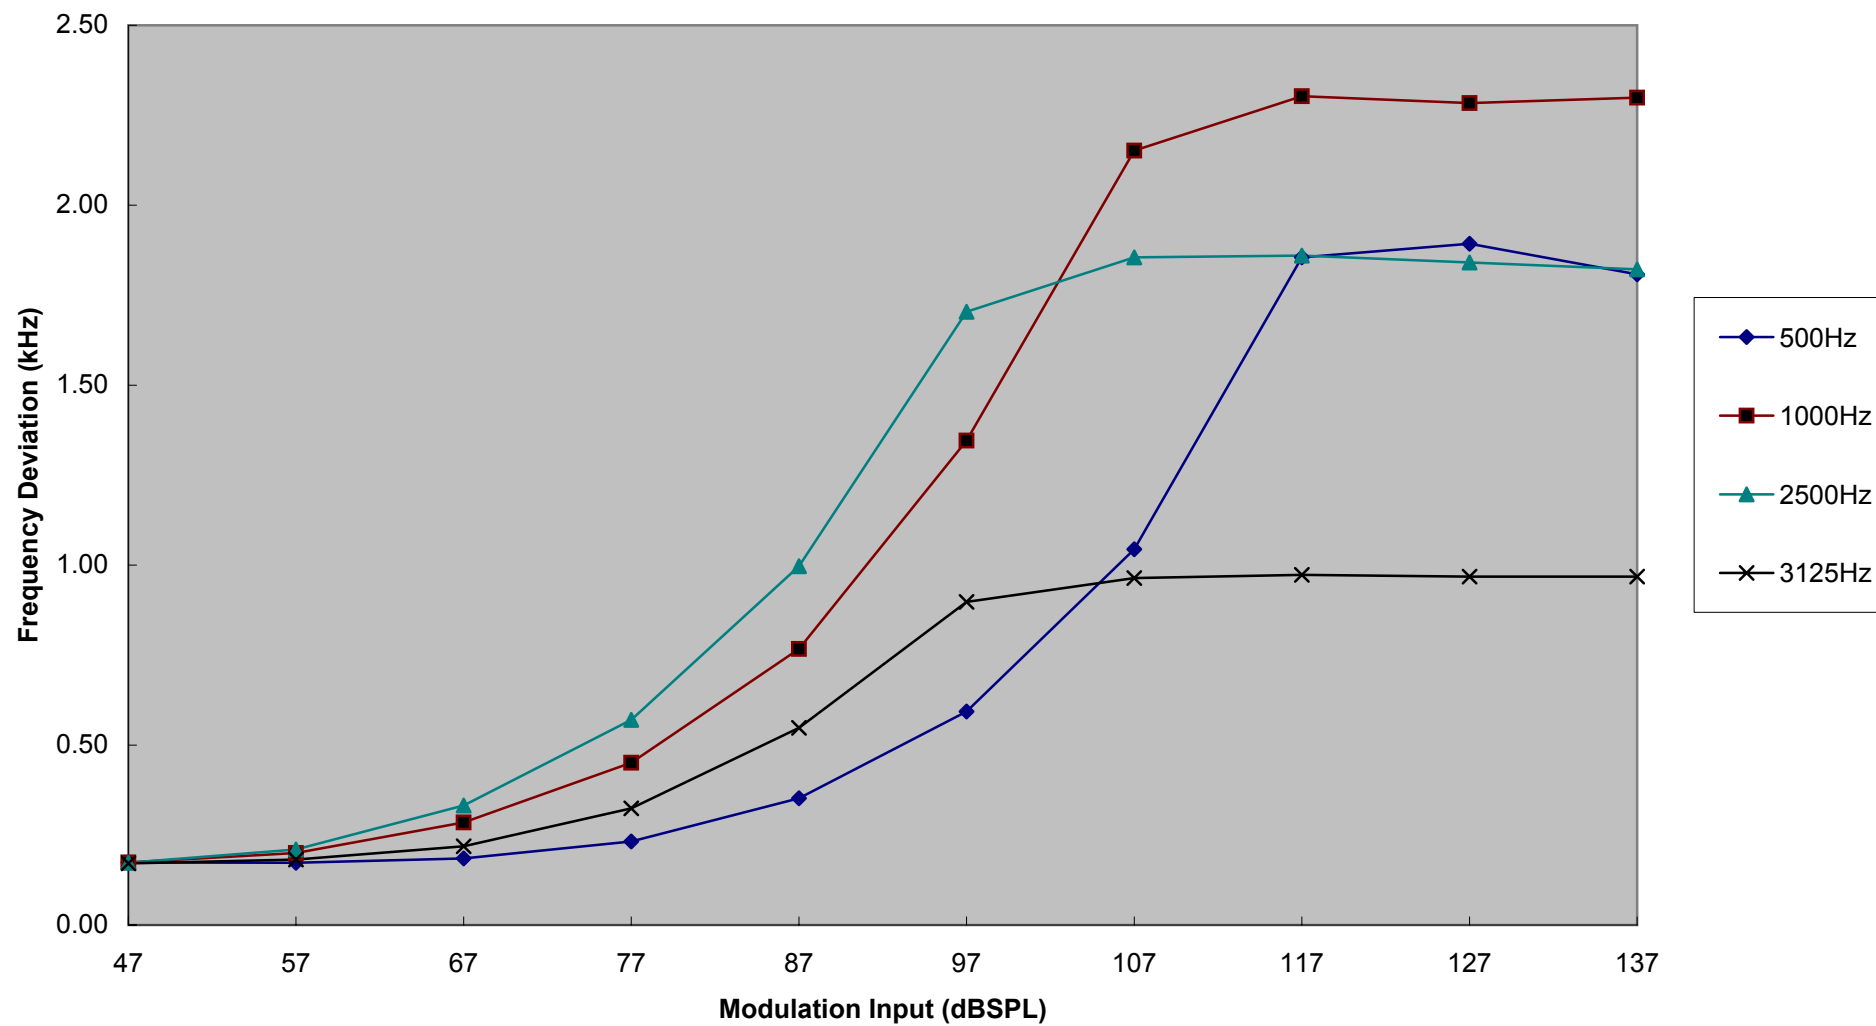


hp

REF 127.0 dB μ V AT 30 dB

PEAK
LOG
10
dB/

VA VB
SC FC
CORR

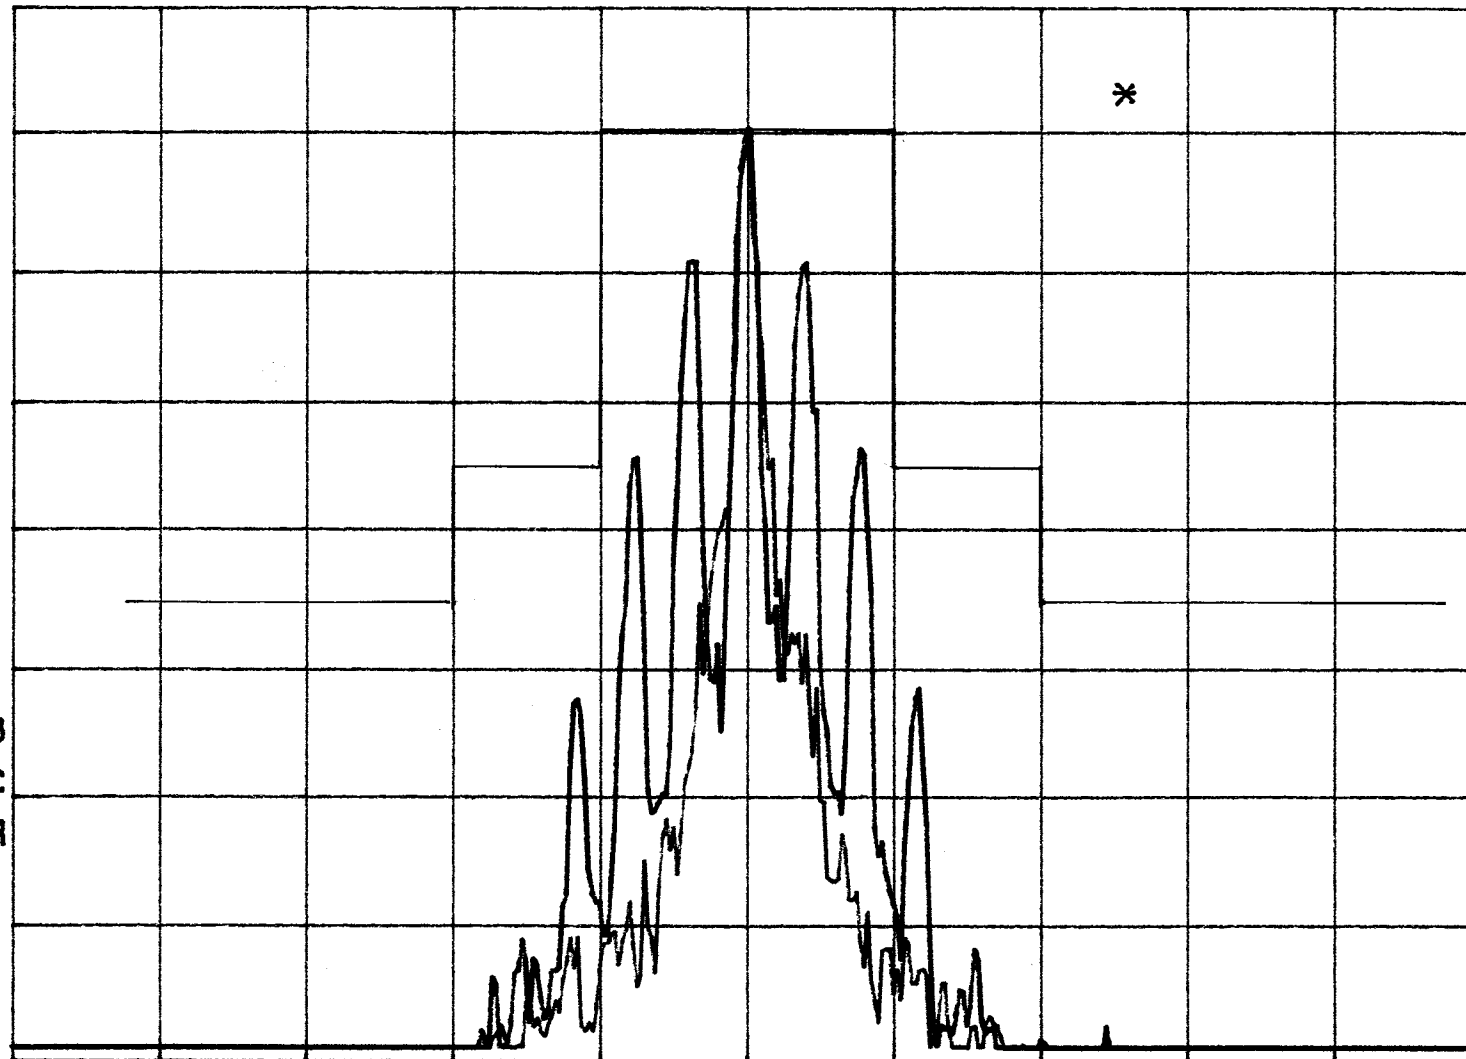

CENTER 462.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 kHz

SWP 2.17 sec

typ

REF 127.0 dB μ V AT 30 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

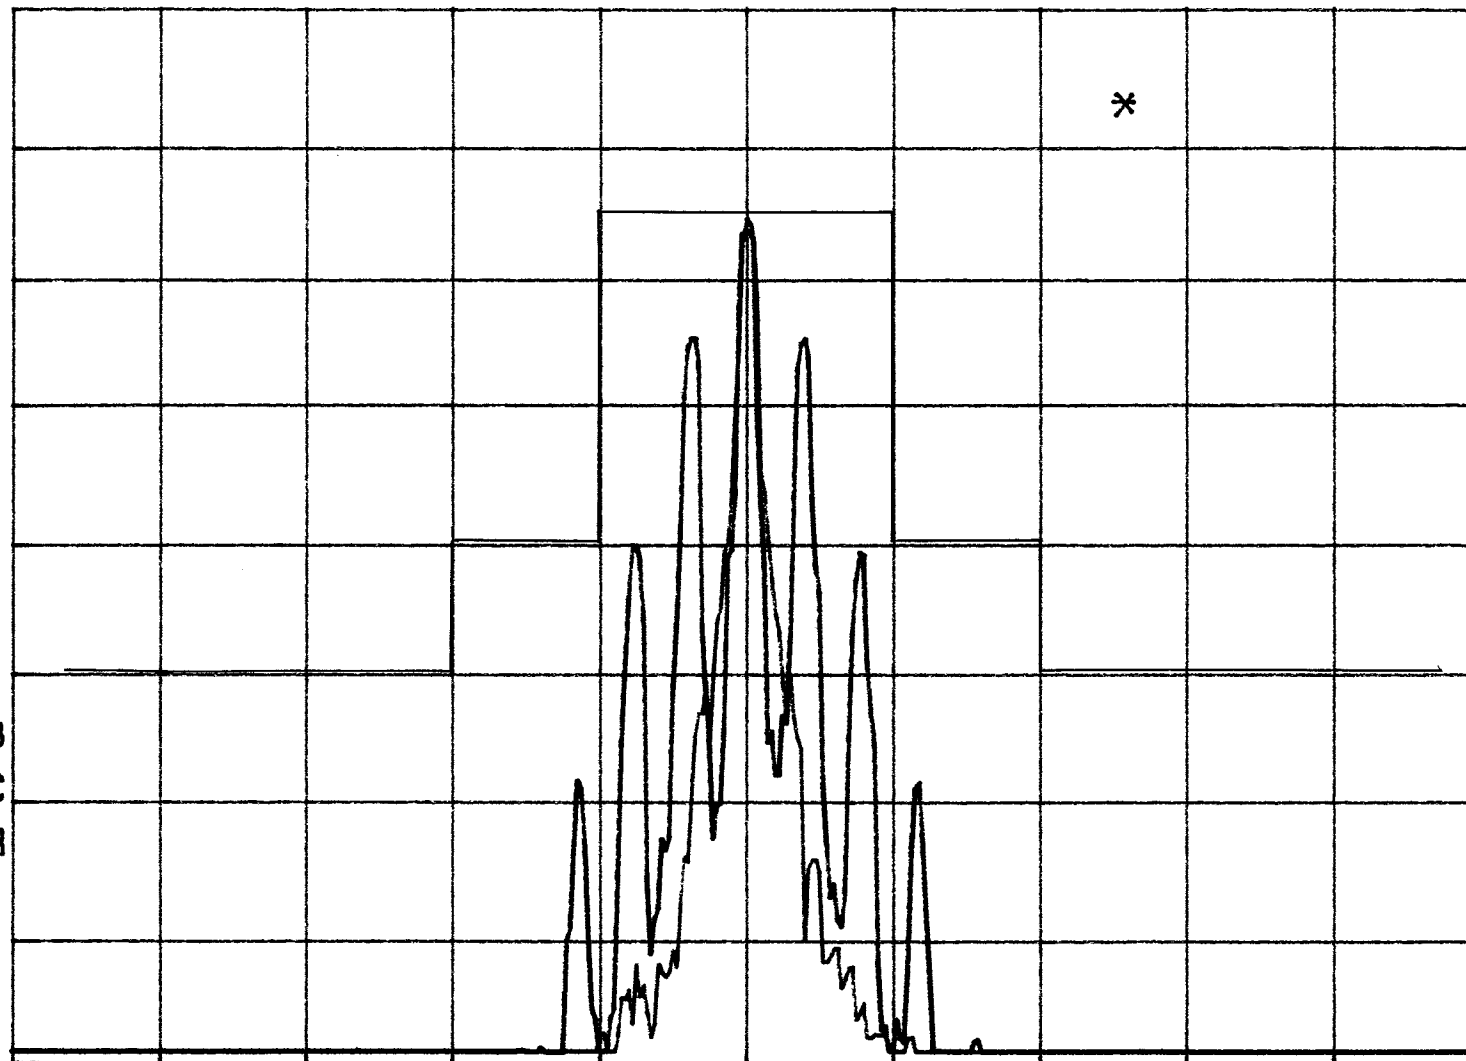

CENTER 467.63750 MHz


#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 kHz

SWP 2.17 sec

Modulation Frequency Response

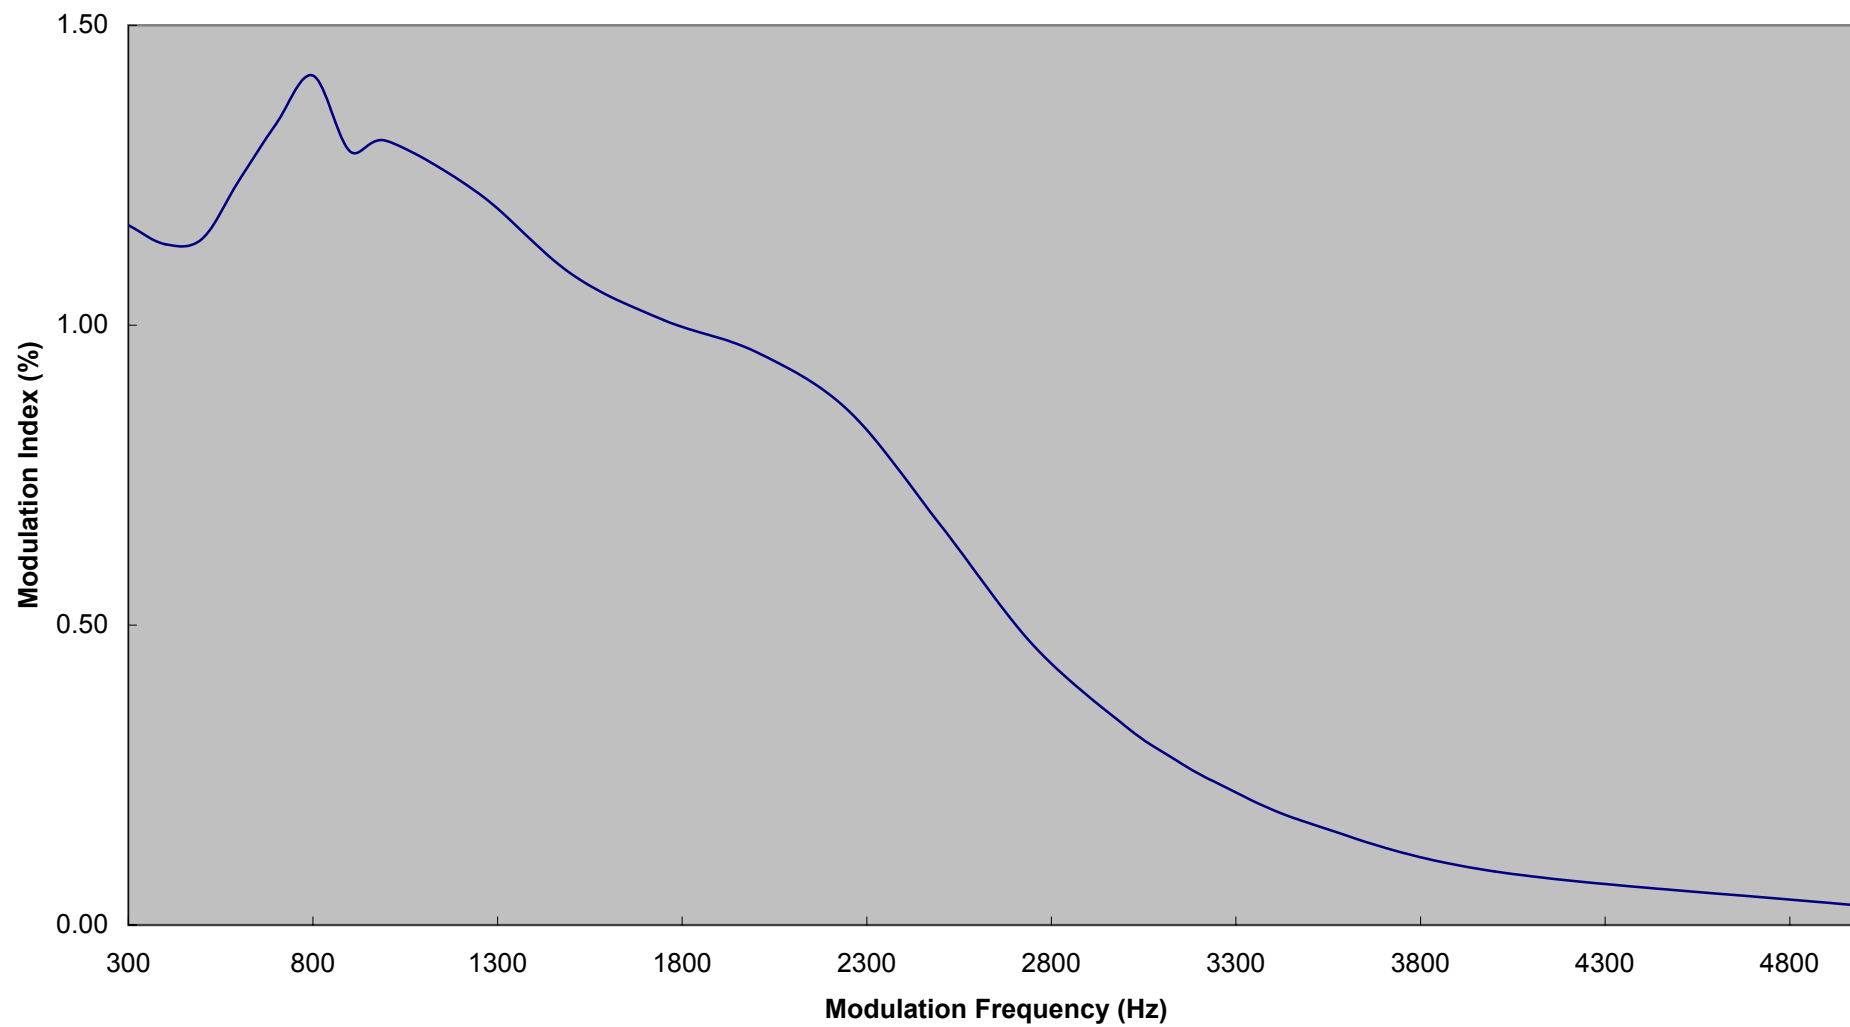

hp

MKR 10.35 kHz

REF 127.0 dB μ V

AT 30 dB

-.45 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

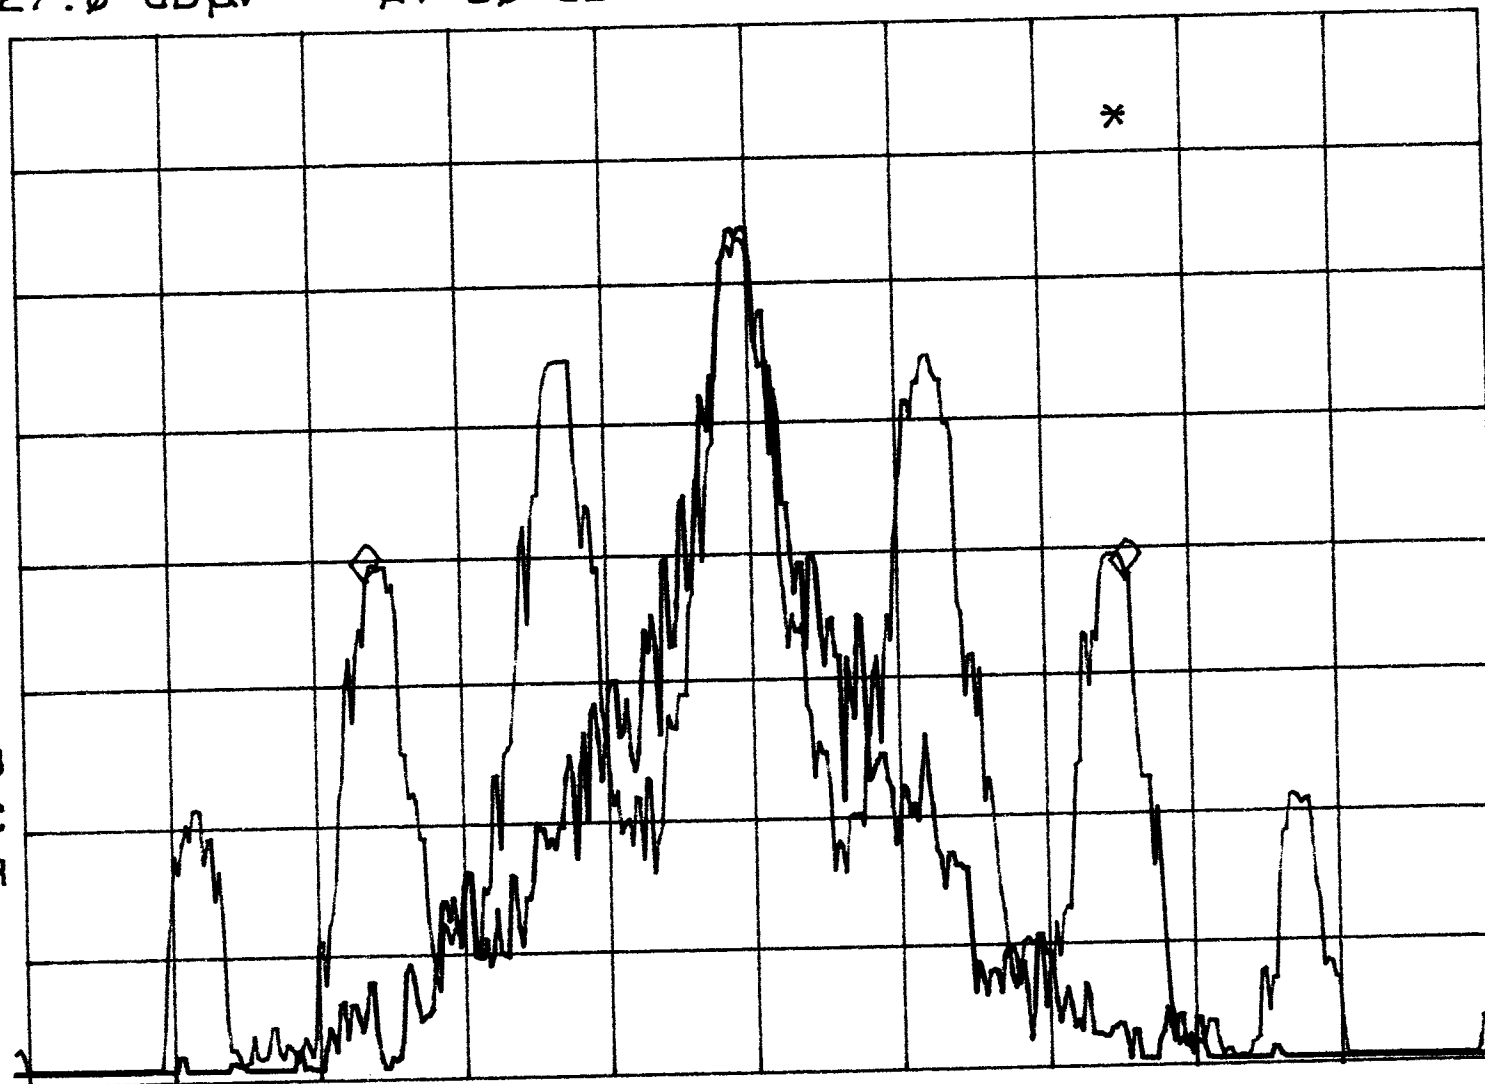

CENTER 467.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 kHz

SWP 1.00 sec