



“mfr” file

Modulation Frequency Response

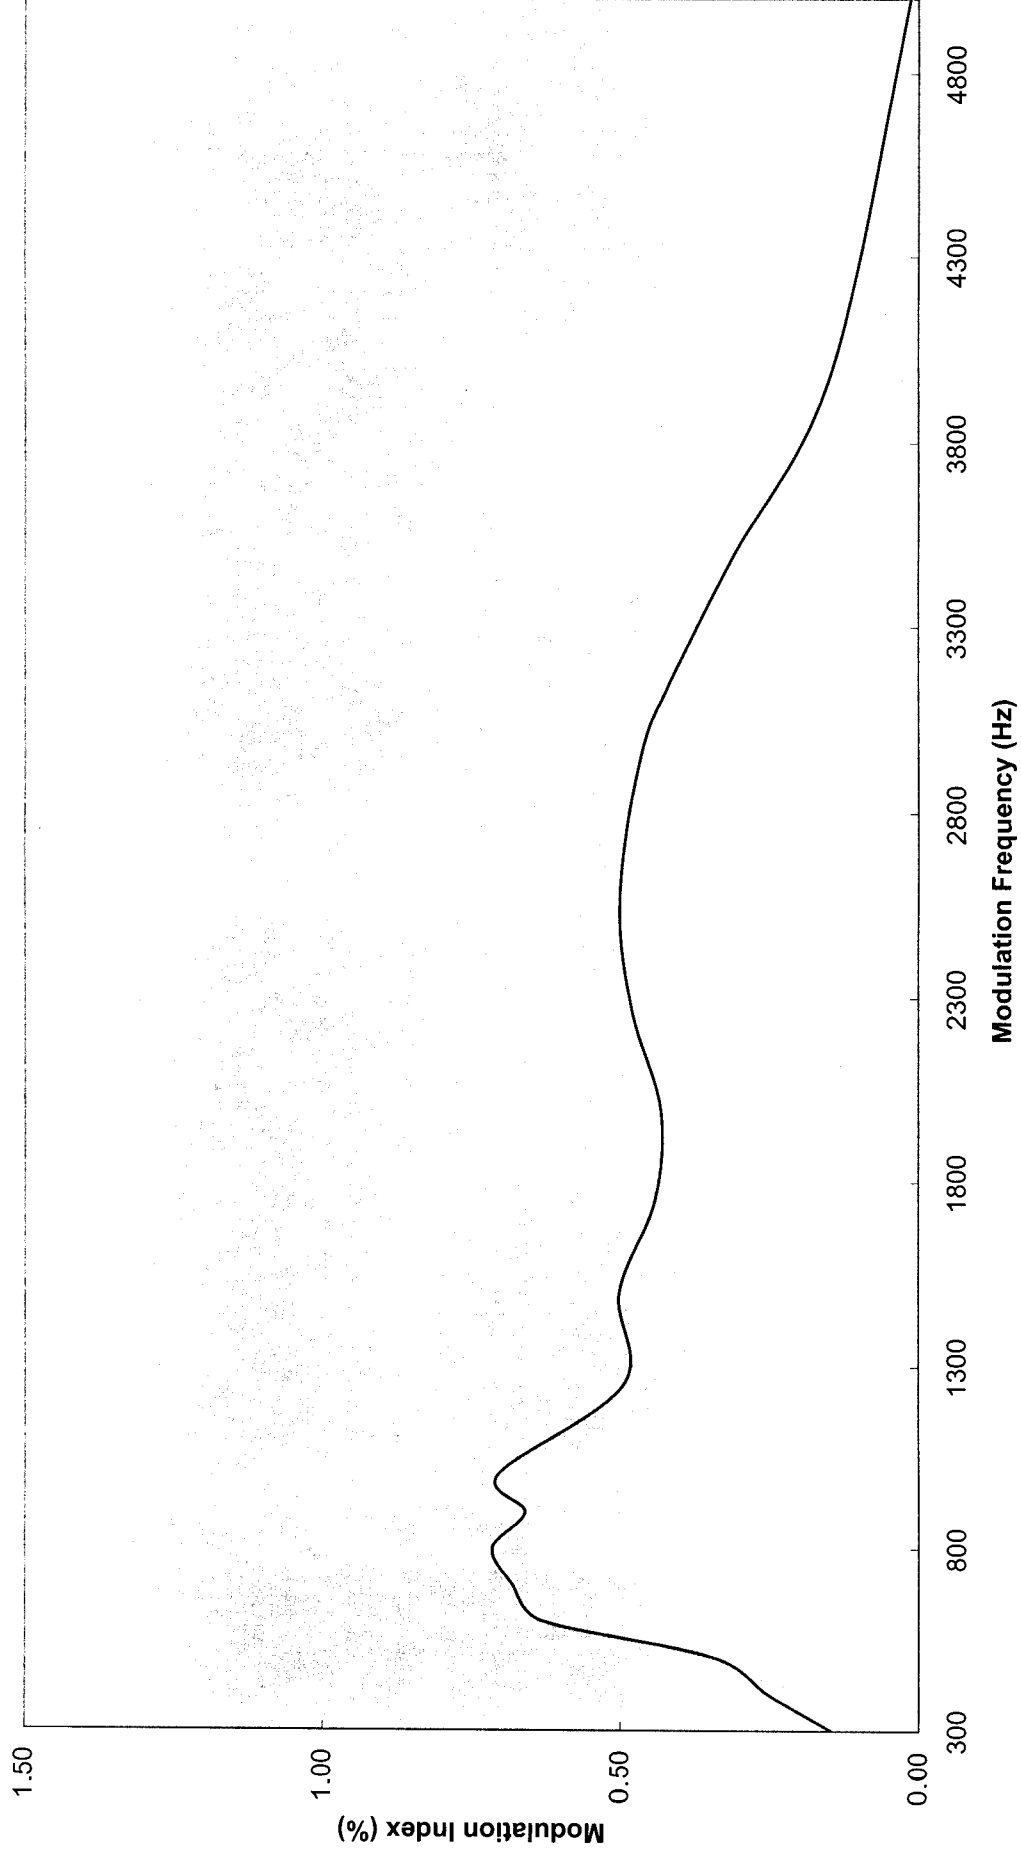


Modulation Frequency Response

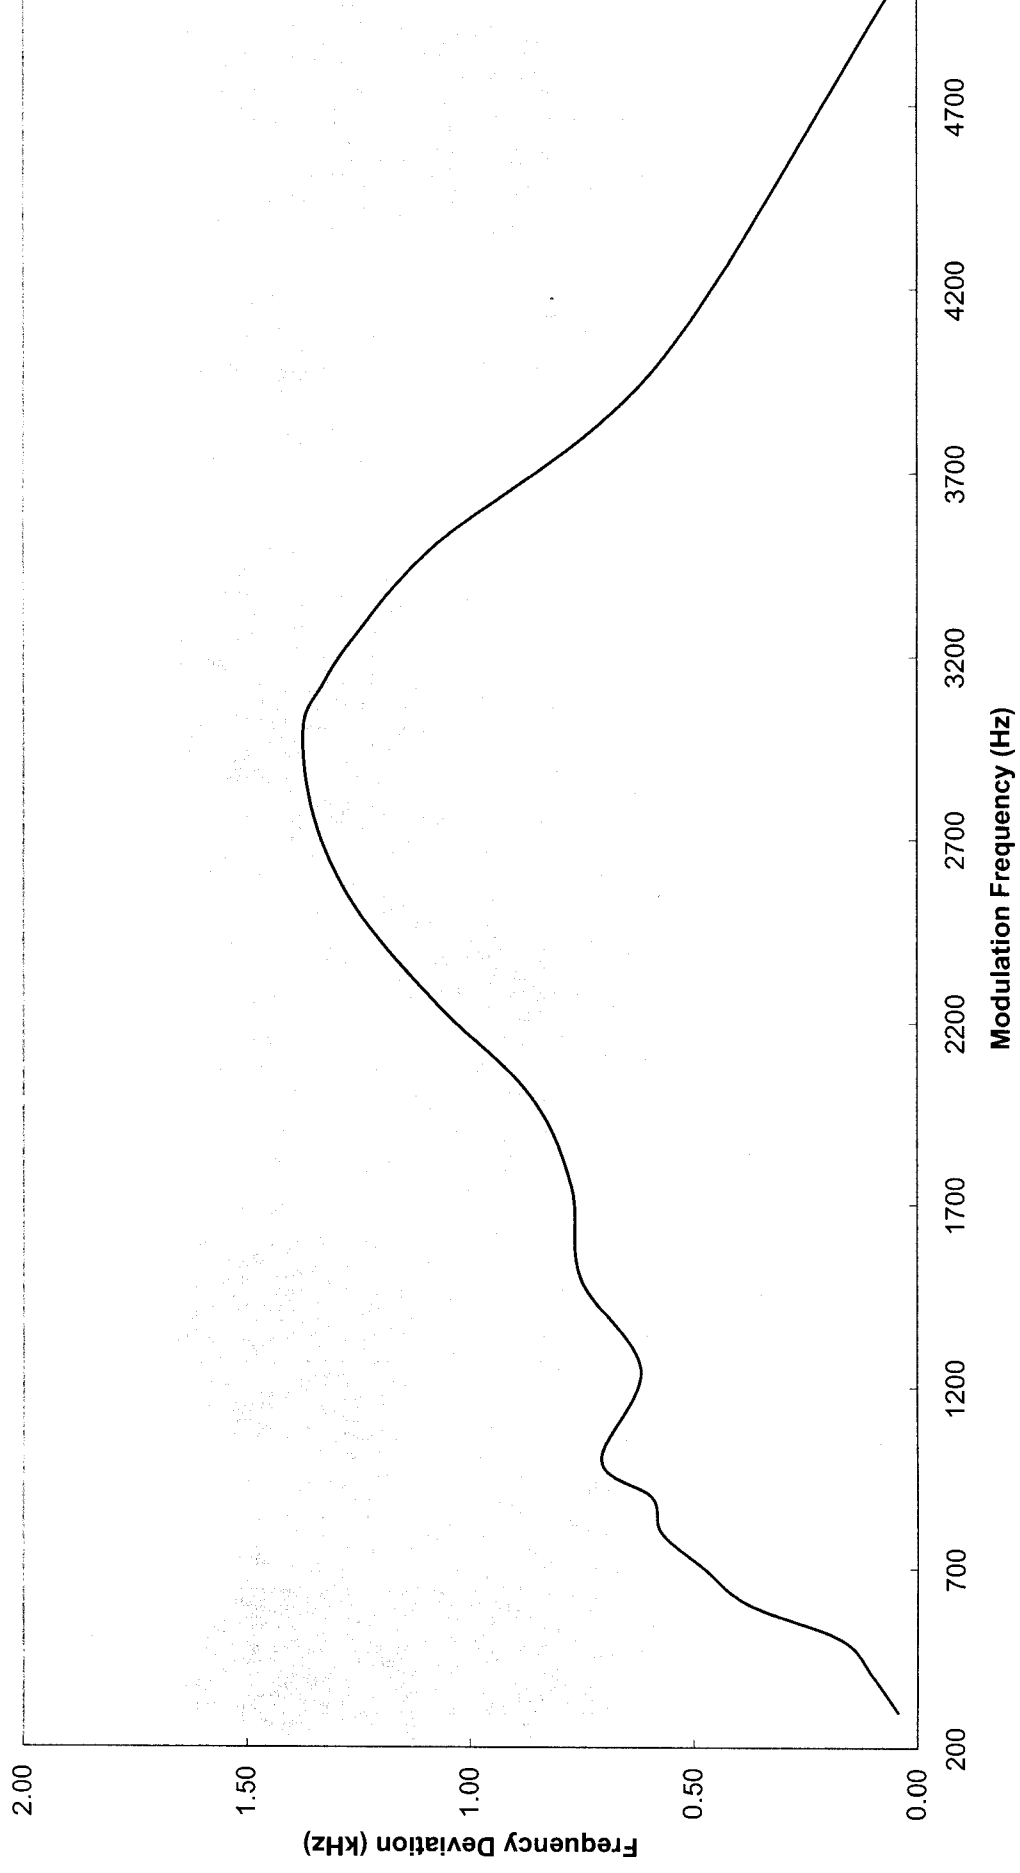


“mlc” file

Modulation Limiting Characteristic

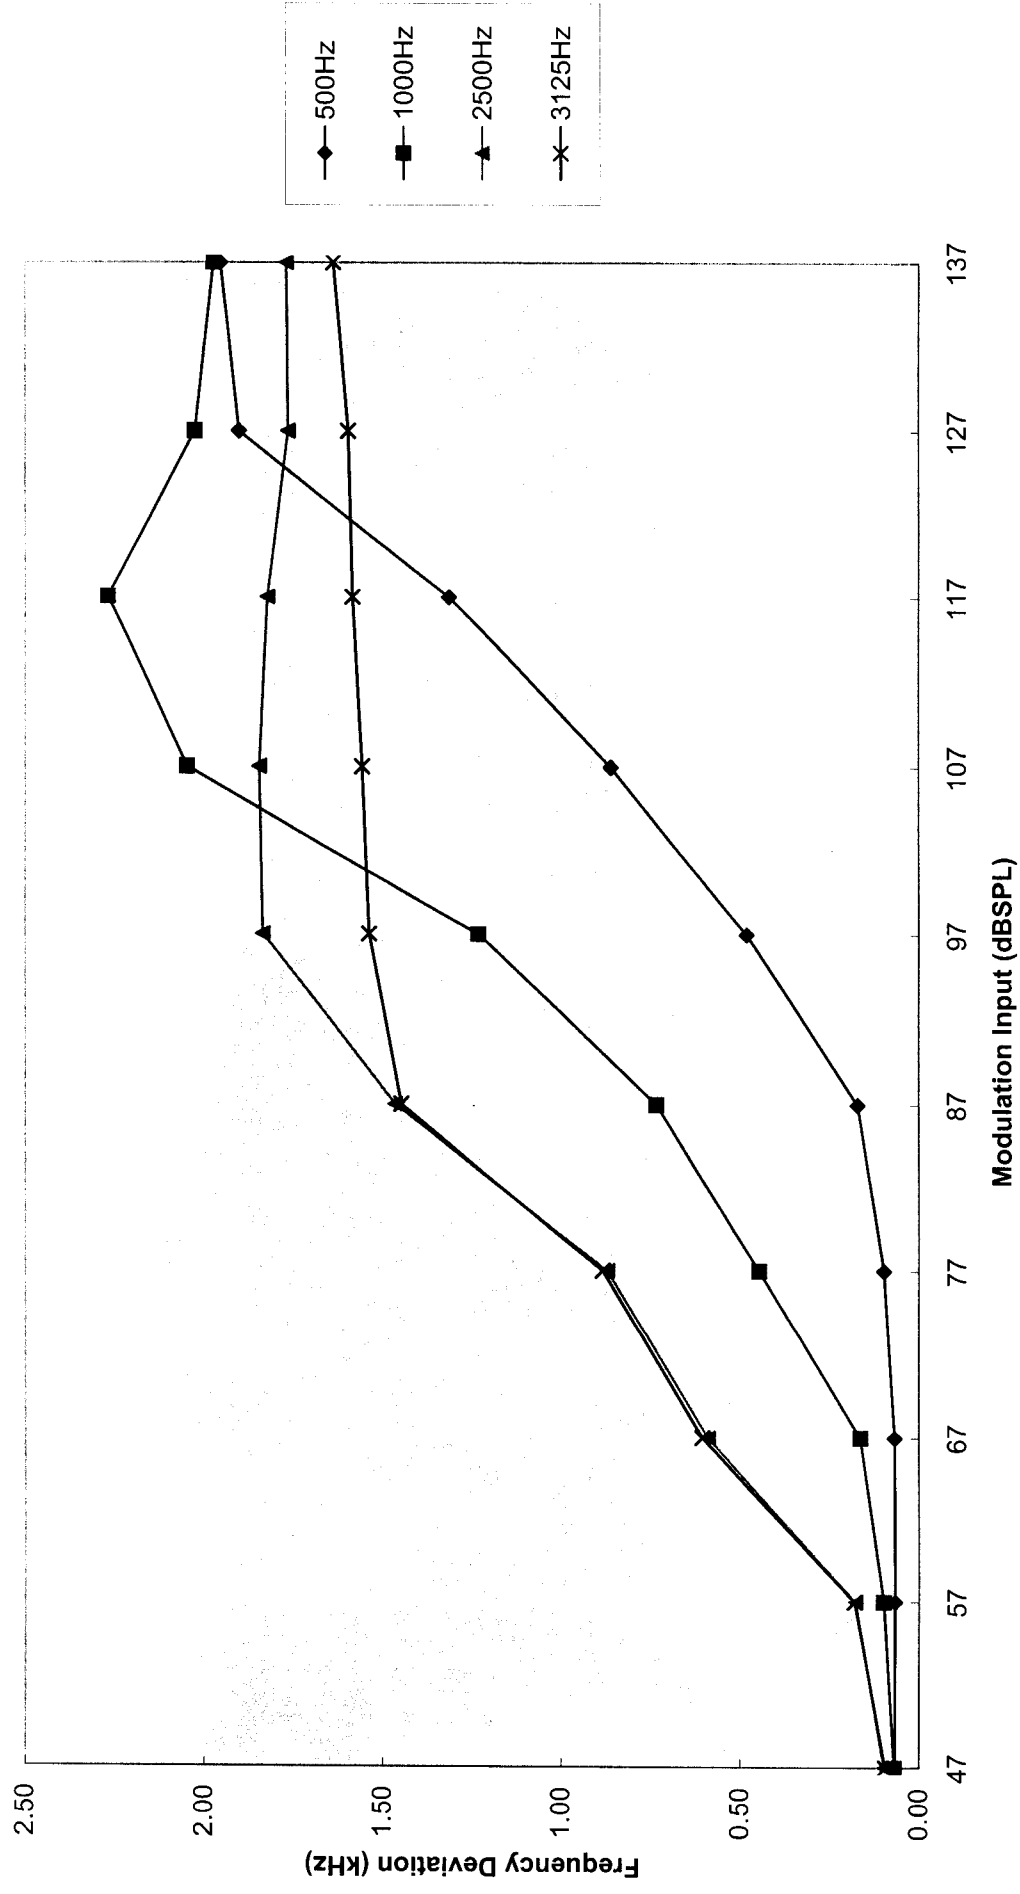

“lpf” file

Audio Low Pass Filter Response

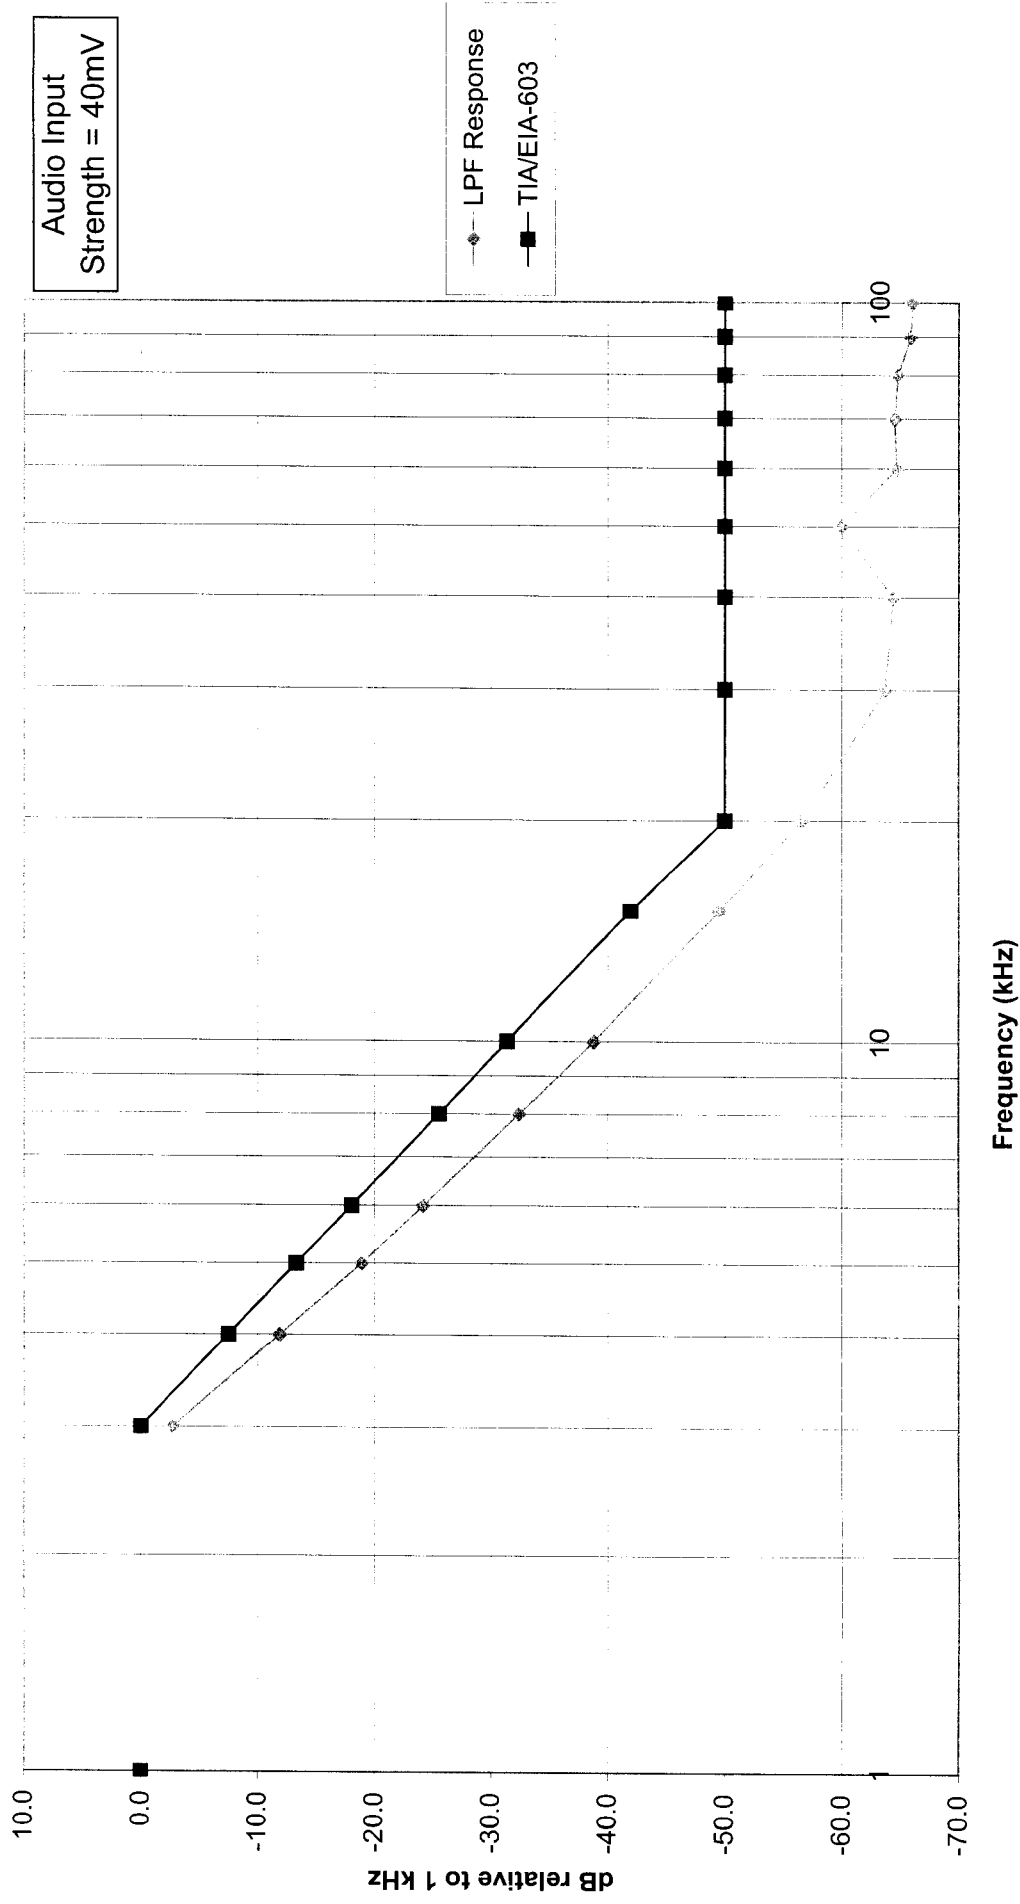

“bw” file

70

MKA 5.60 KHZ

1.10 dB

AT 30 dB

REF 15.0 dBm

PEAK

LOG

10


dB/

*

VA VB

SC FC

CORR

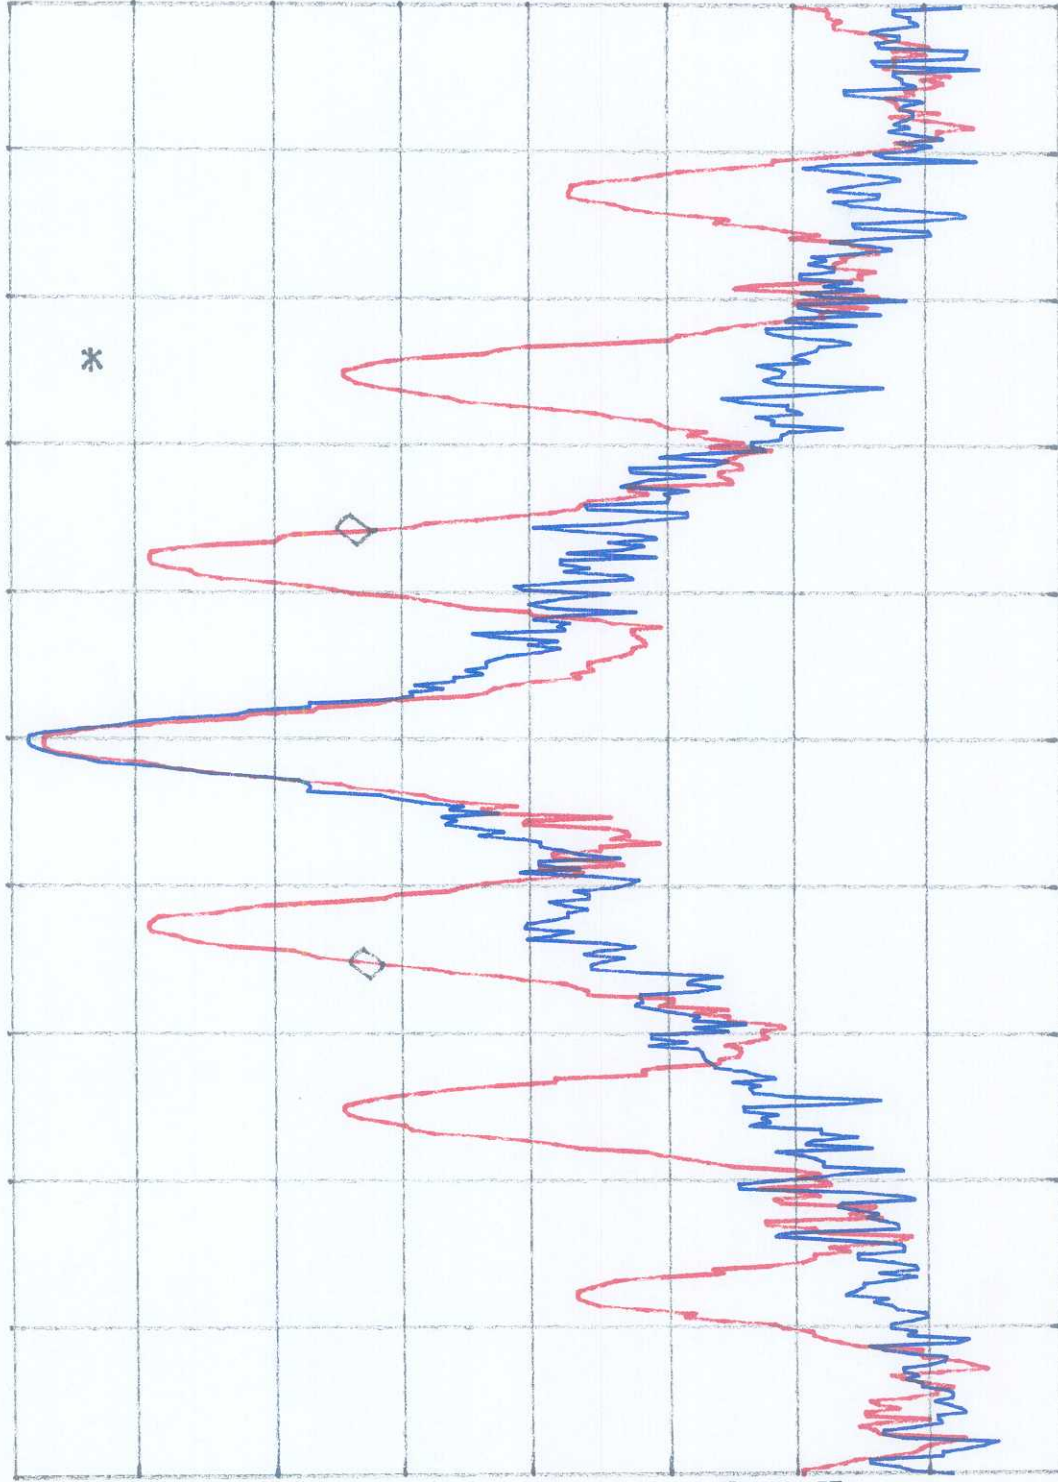

CENTER 462.63750 MHZ

RES BW 300 HZ

VBW 300 HZ

SPAN 20.00 KHZ

SWP 1.00 SEC


70

MKA 5.65 KHz

--.56 dB

AT 20 dB

REF 9.0 dBm

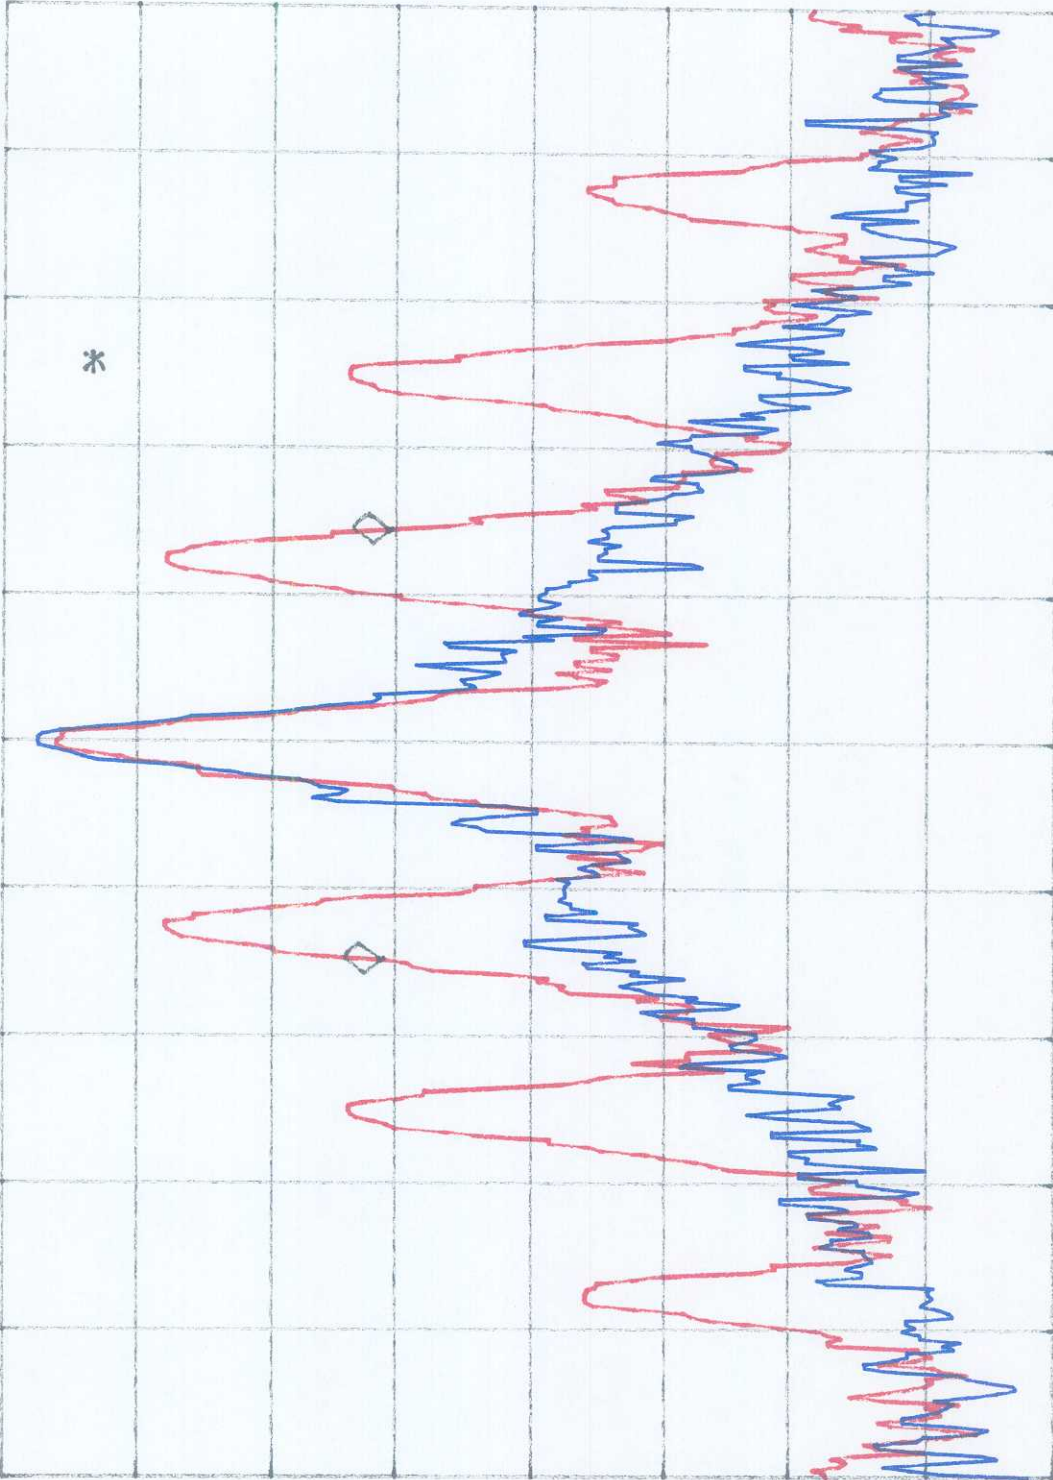

PEAK

LOG

10

dB/

VA VB

SC FC

CORR

CENTER 467.63750 MHz

RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 KHz

SWP 1.00 sec

Emission mask
“spurious” file

70


REF 15.0 dBm AT 30 dB

PEAK

LOG

10

dB/

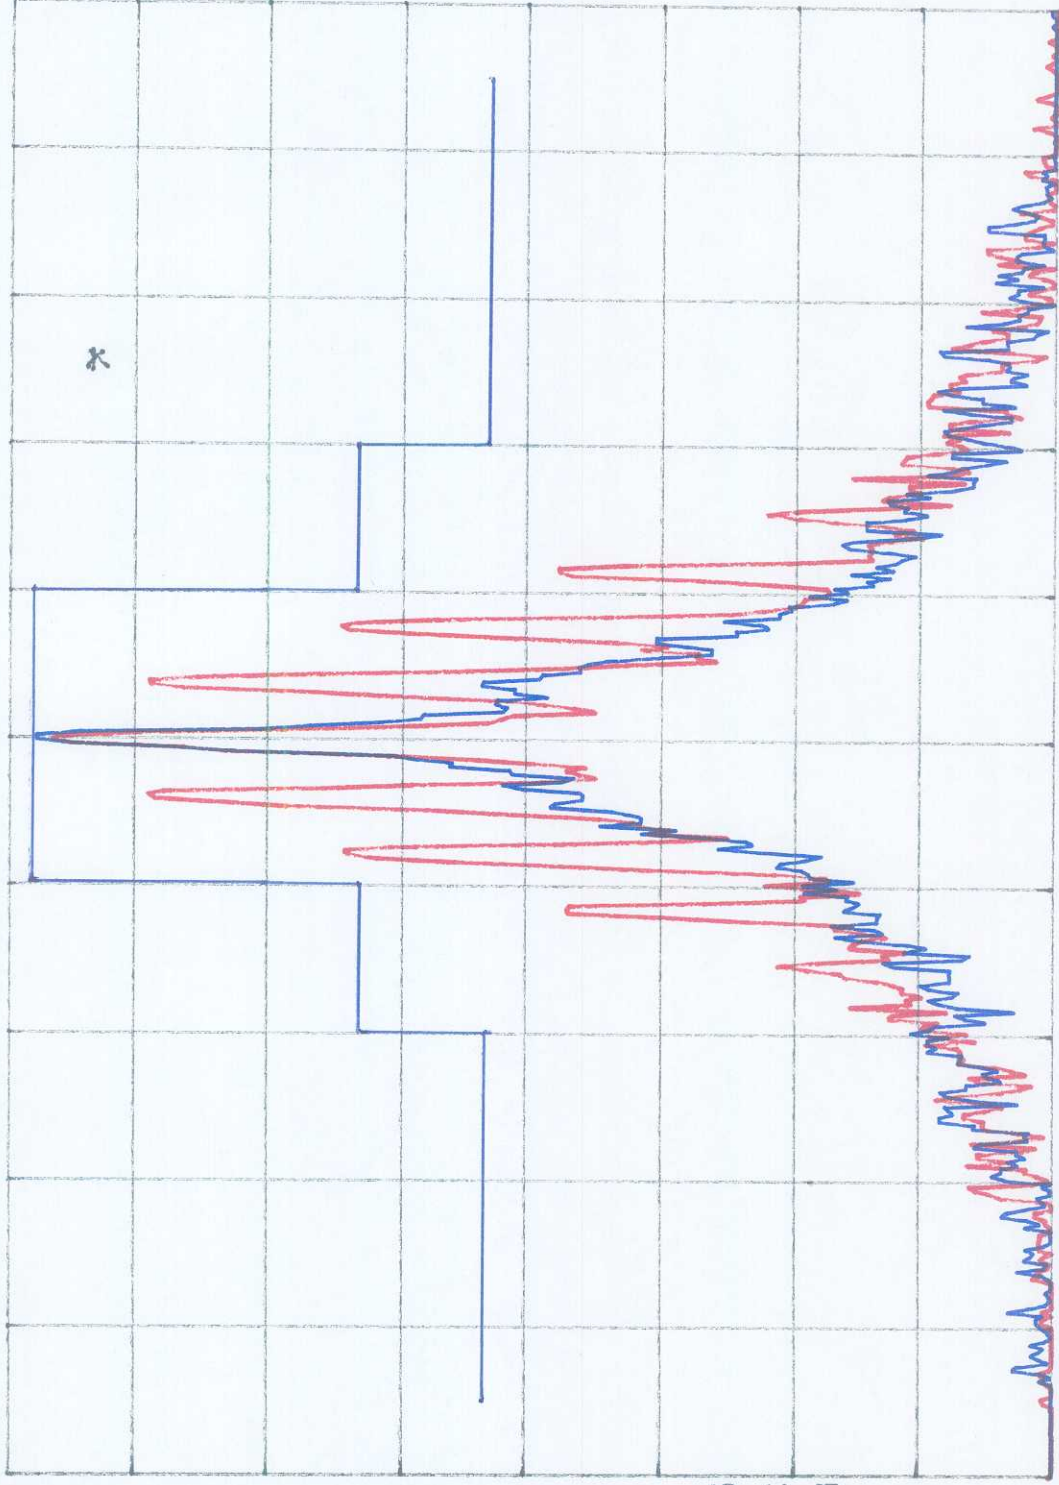

VA VB
SC FC
CORR

CENTER 462.63750 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 65.00 KHz

SWP 2.17 sec

70

REF 8.0 dBm


AT 20 dB

PEAK

LOG

10

dB/

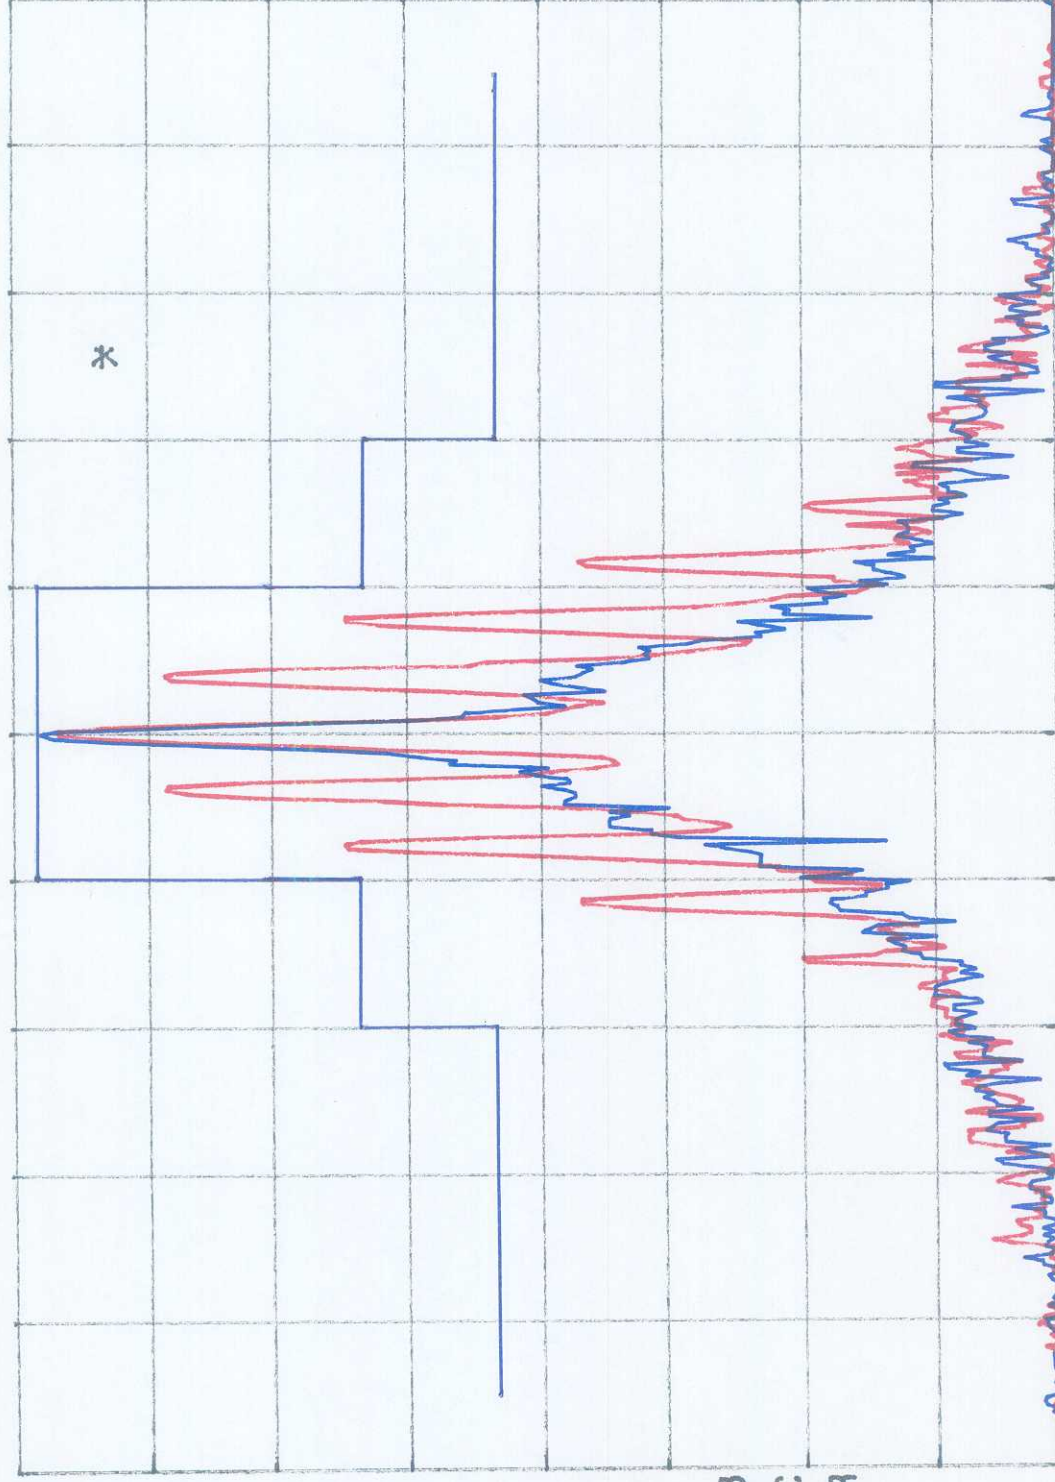

VA VB
SC FC
CORR

CENTER 467.63750 MHz

#RES BW 300 Hz

#VBW 300 Hz

SPAN 65.00 KHz

SWP 2.17 sec