



“mfr” file

Modulation Frequency Response

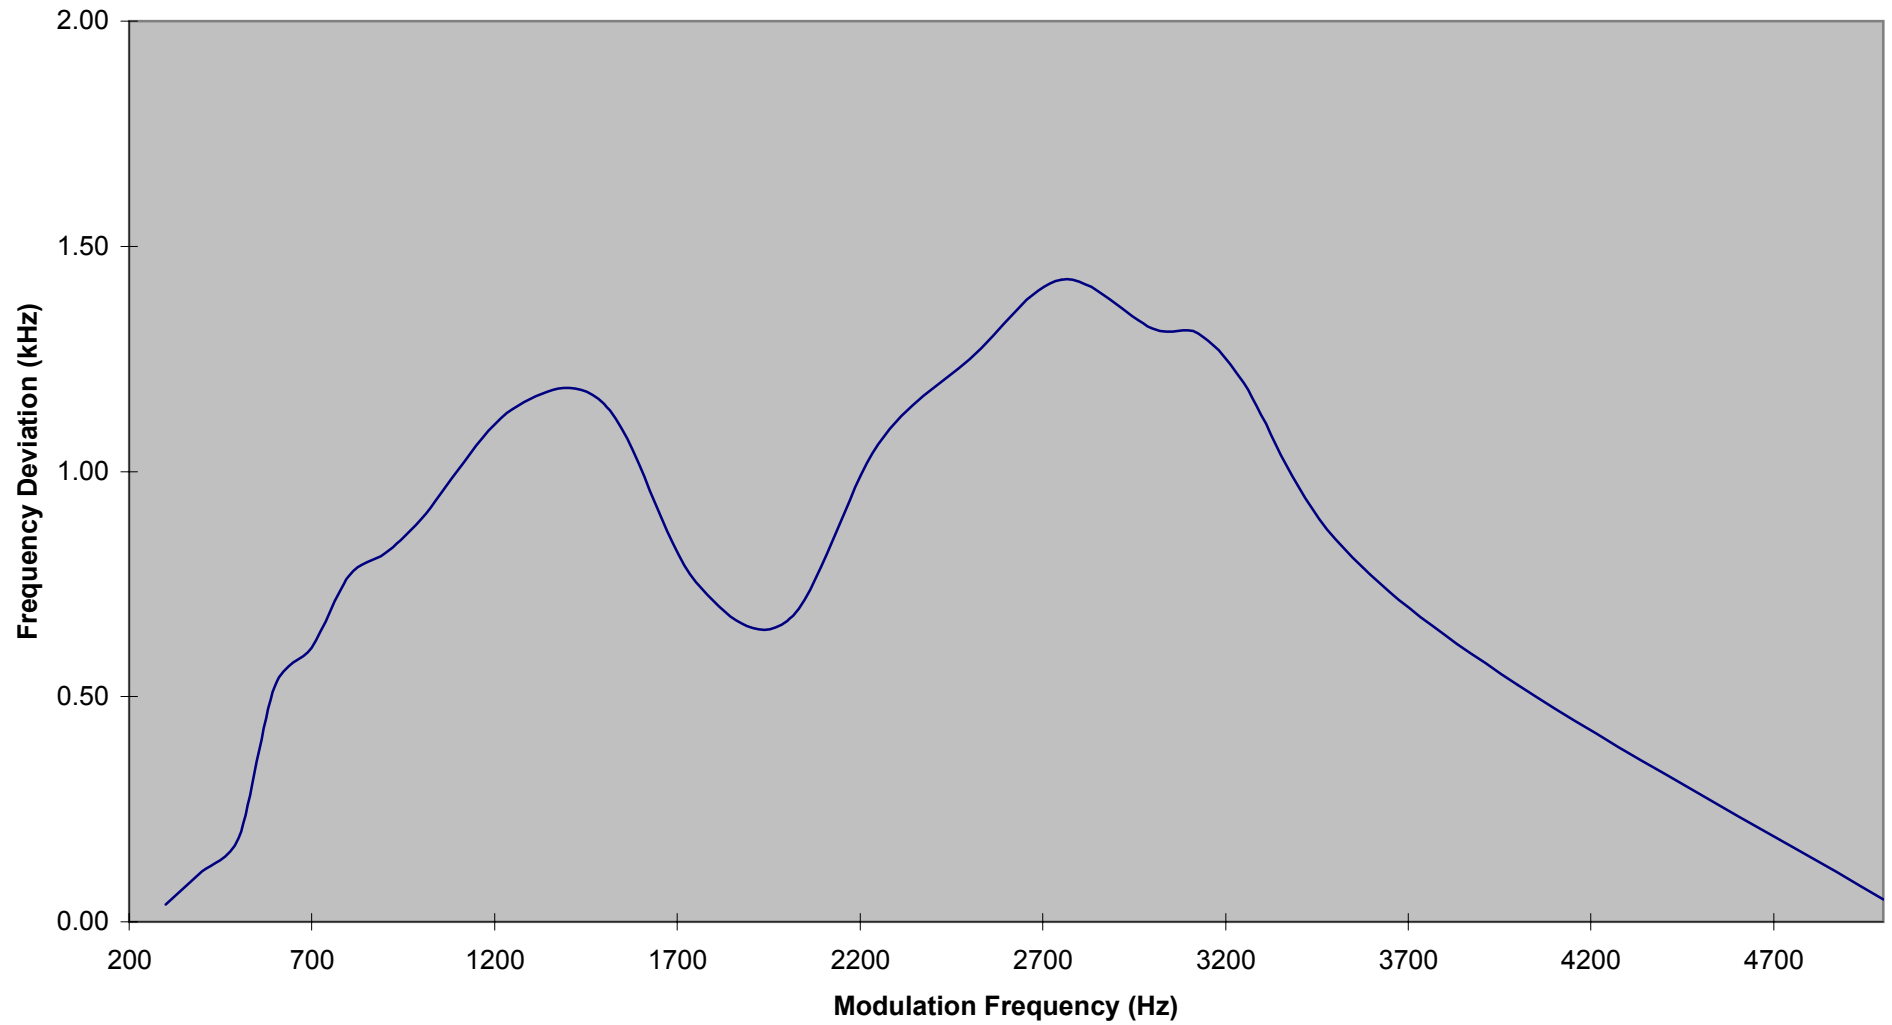


Modulation Frequency Response

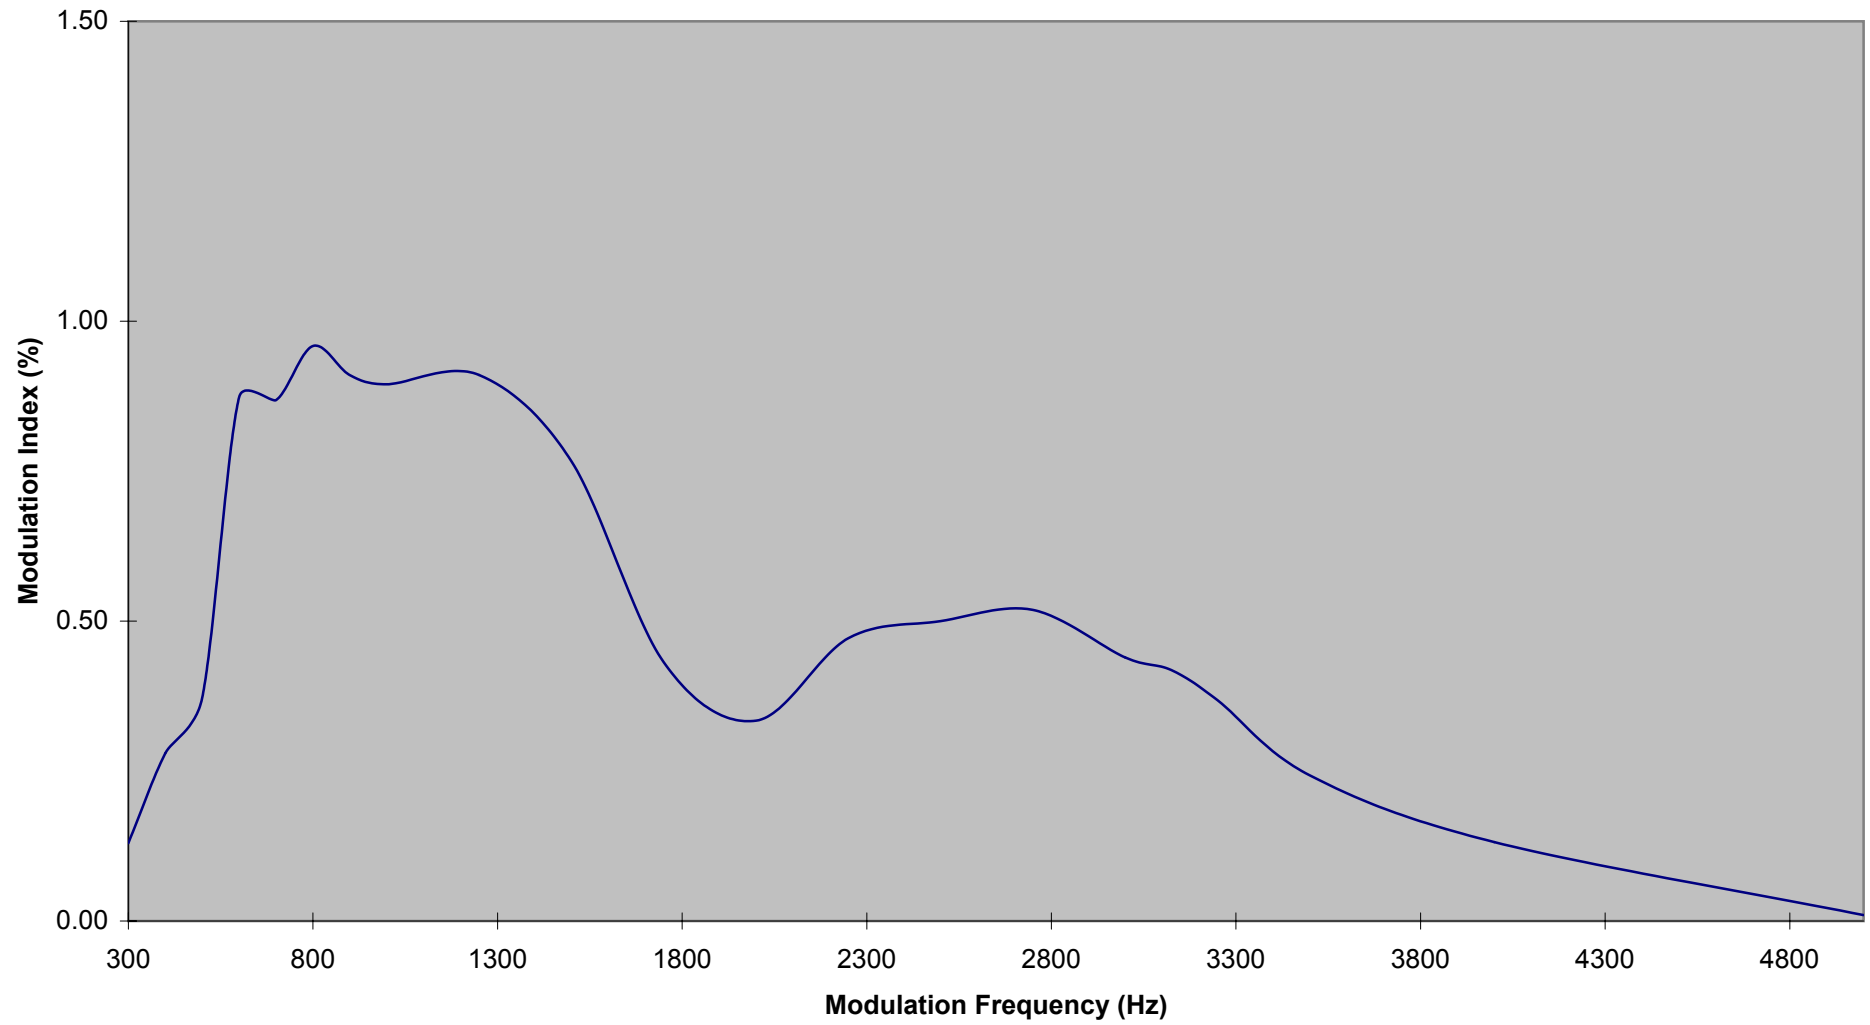


“mlc” file

Modulation Limiting Characteristic

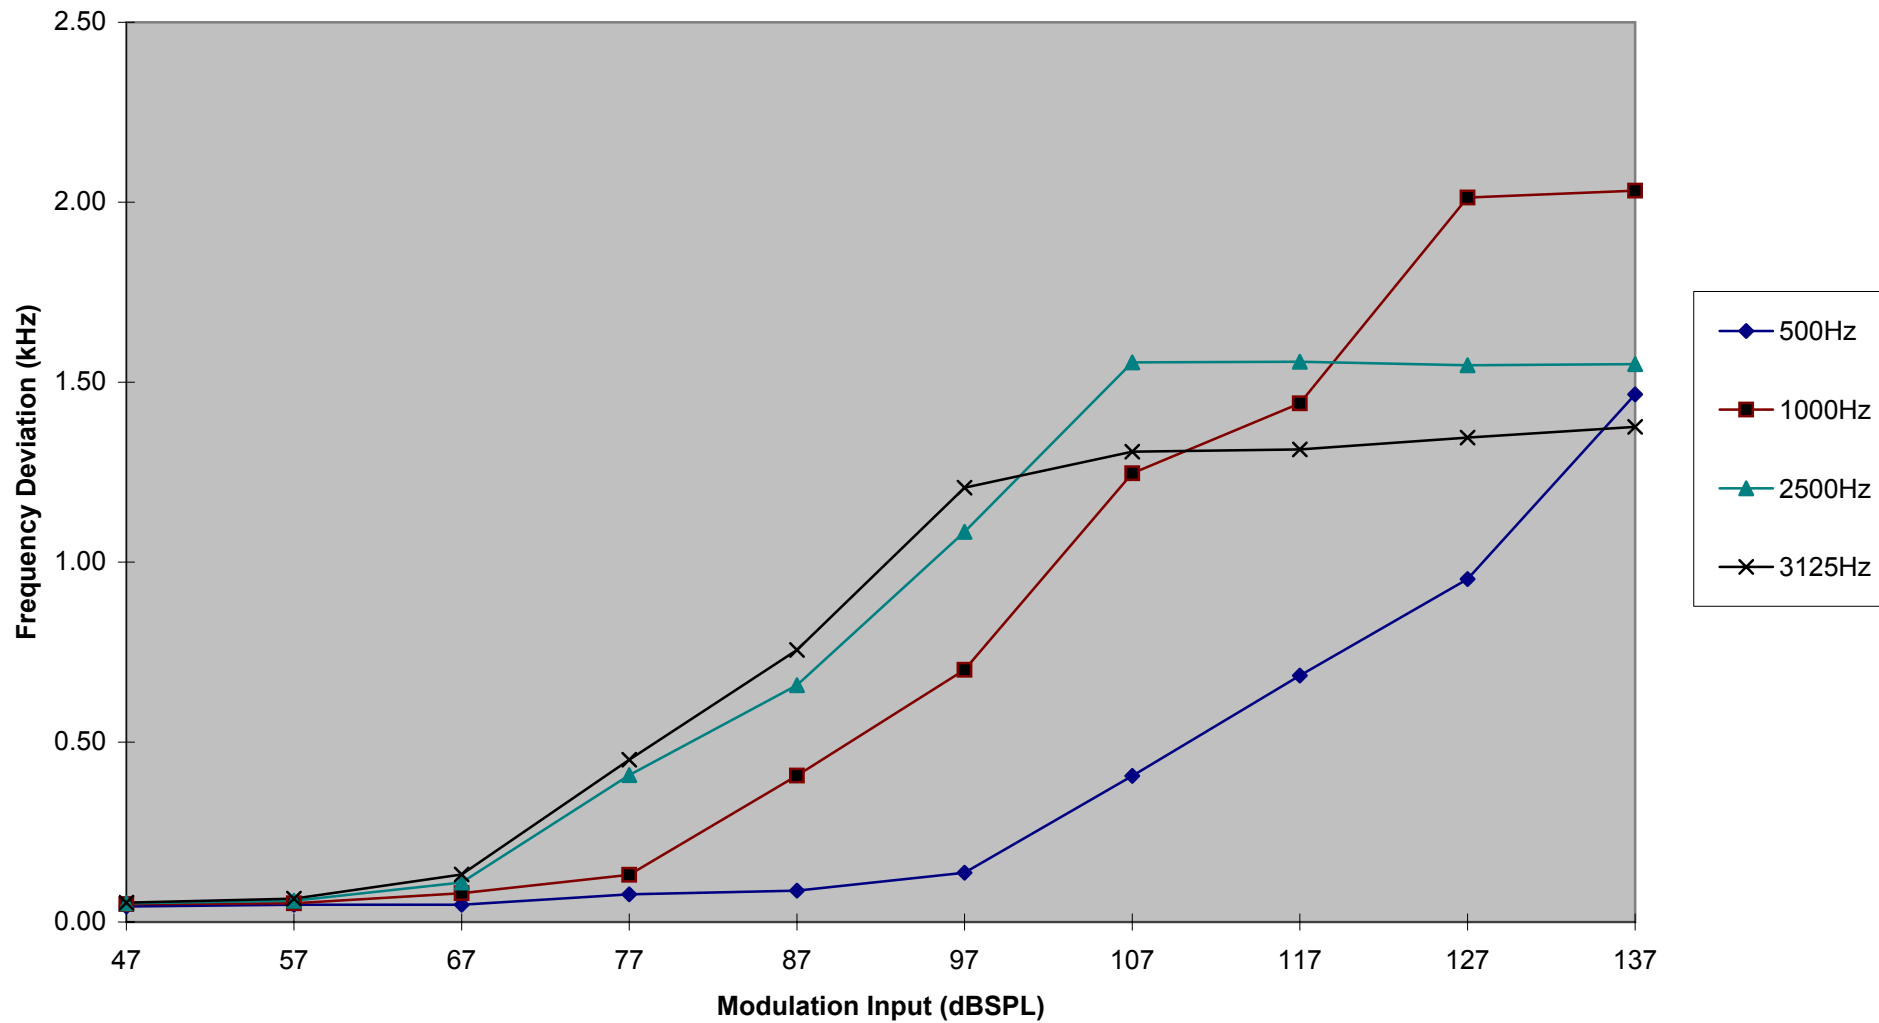

“lpf” file

Audio Low Pass Filter Response

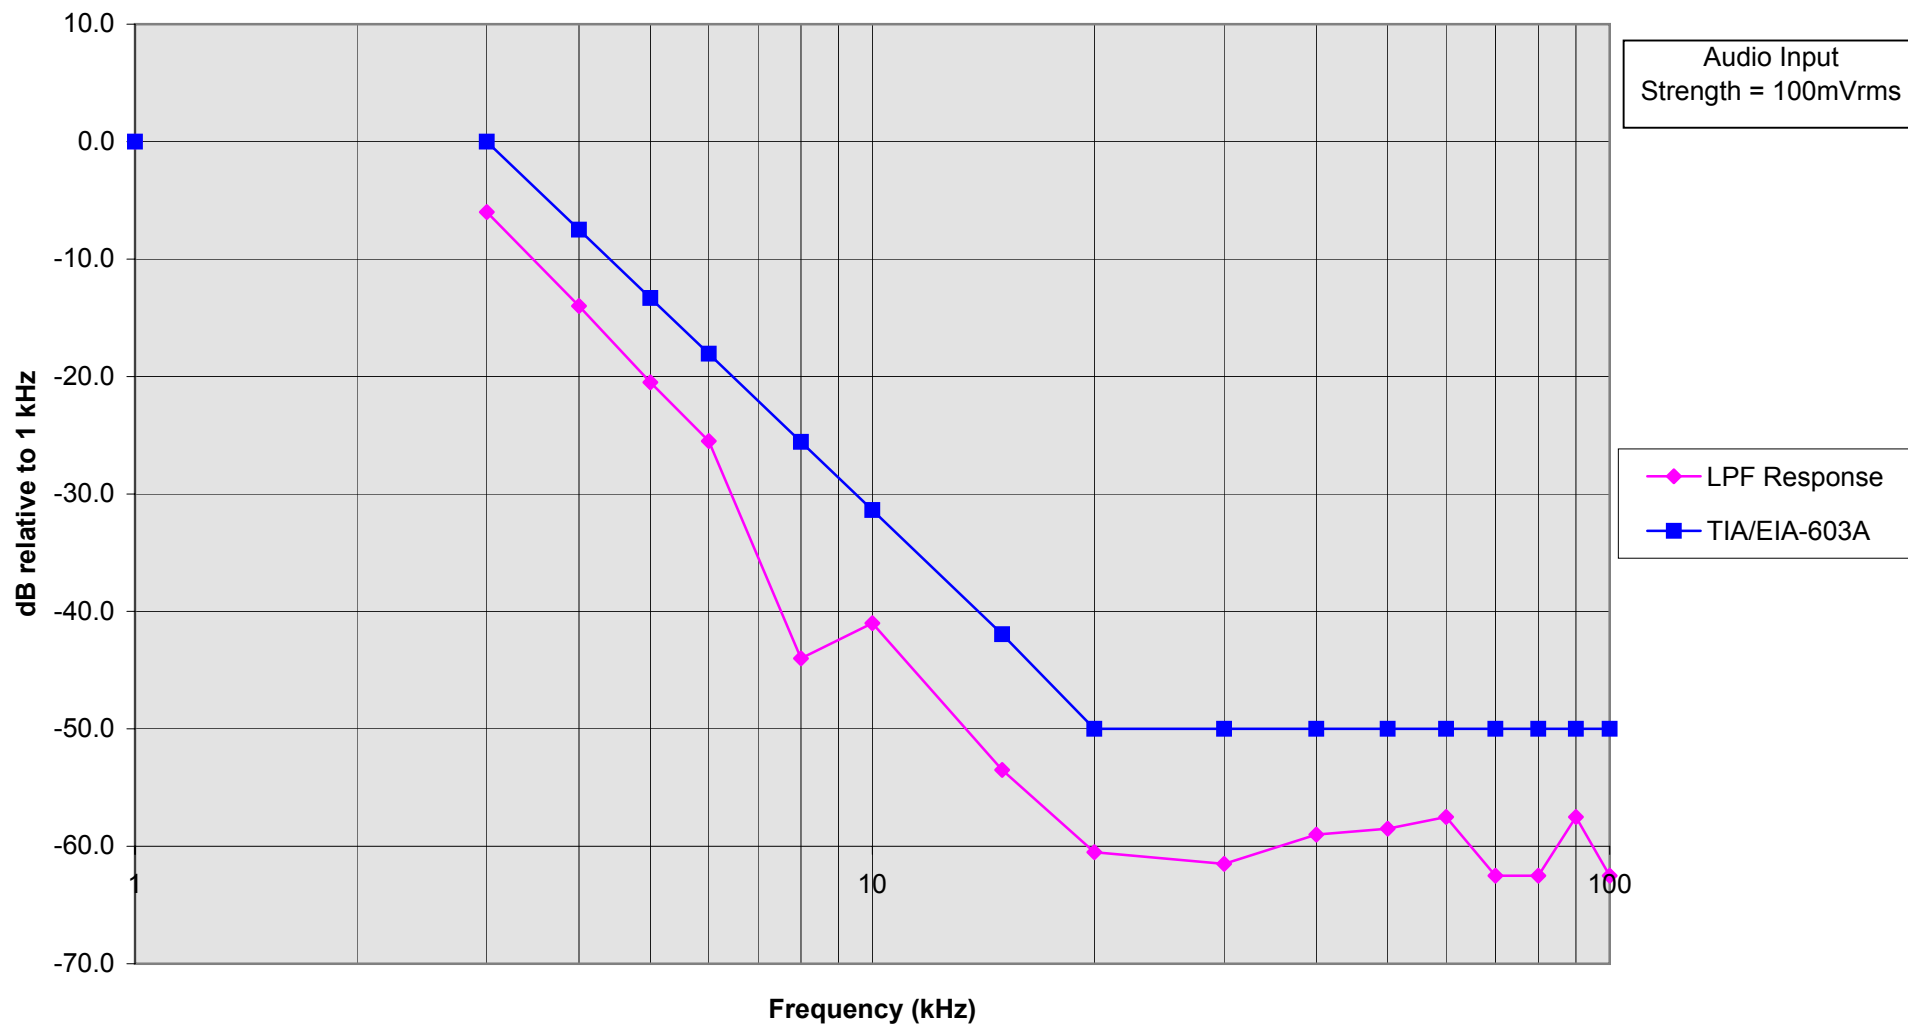

“bw” file

hp

REF 15.0 dBm


AT 30 dB

MKR 10.00 KHz

-.82 dB

PEAK
LOG
10
dB/

VA VB
SC FC
CORR

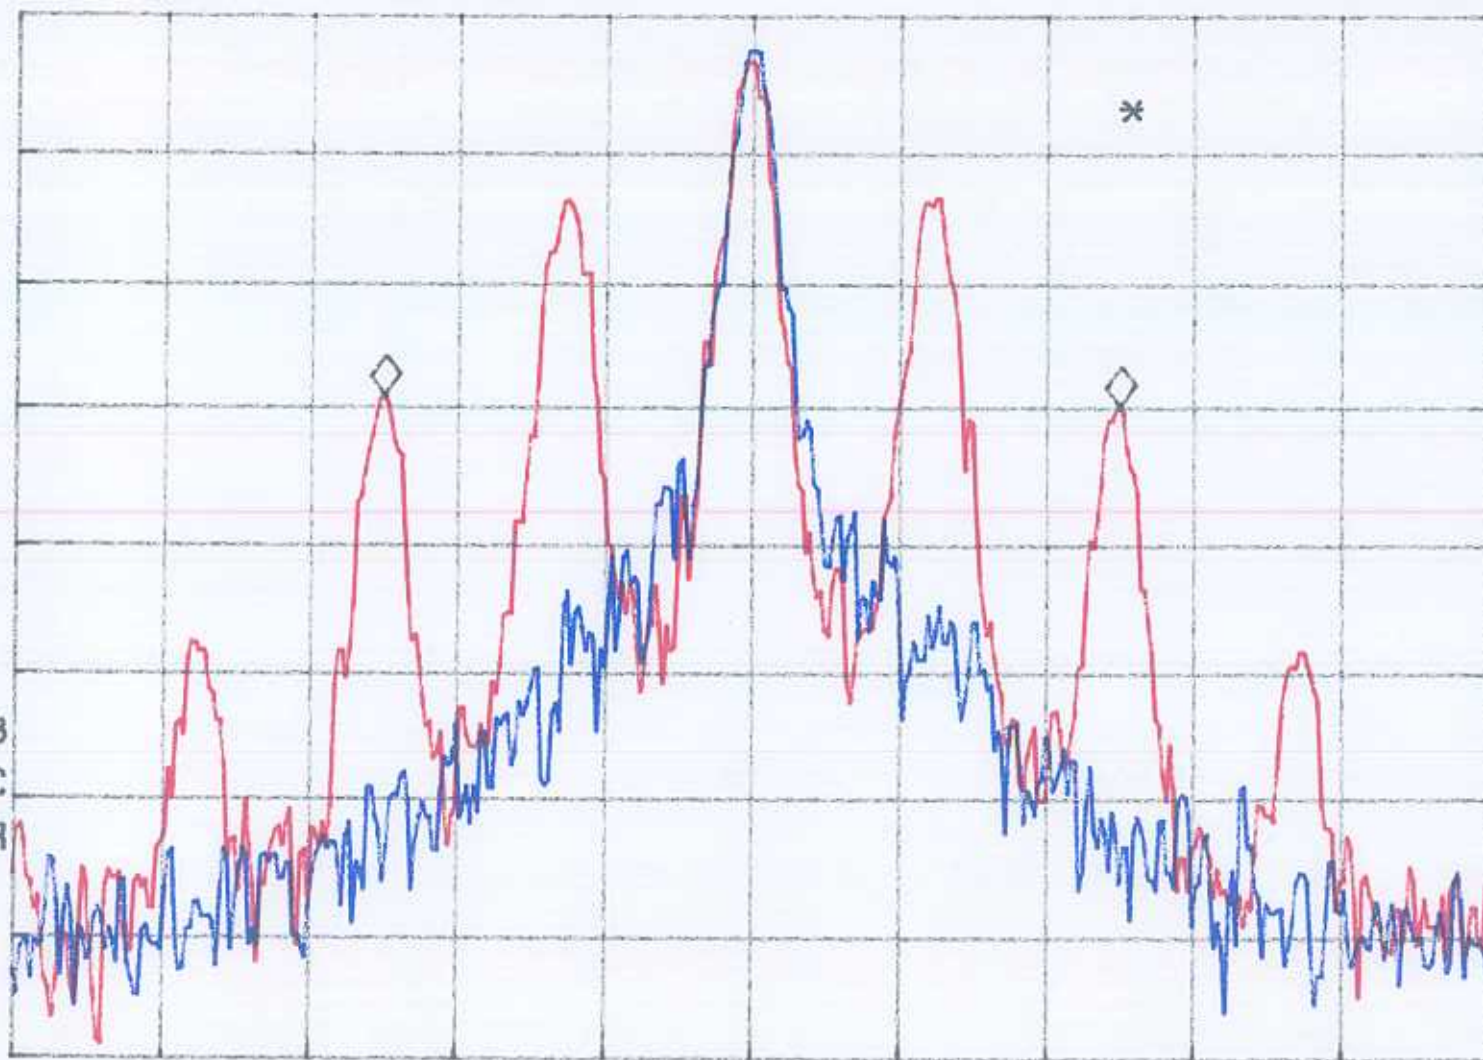

CENTER 462.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 KHz

SWP 1.00 sec

17

REF 15.0 dBm


AT 30 dB

MKR -10.00 KHz

- .11 dB

PEAK
LOG
10
dB/

VA VB
SC FC
CORR

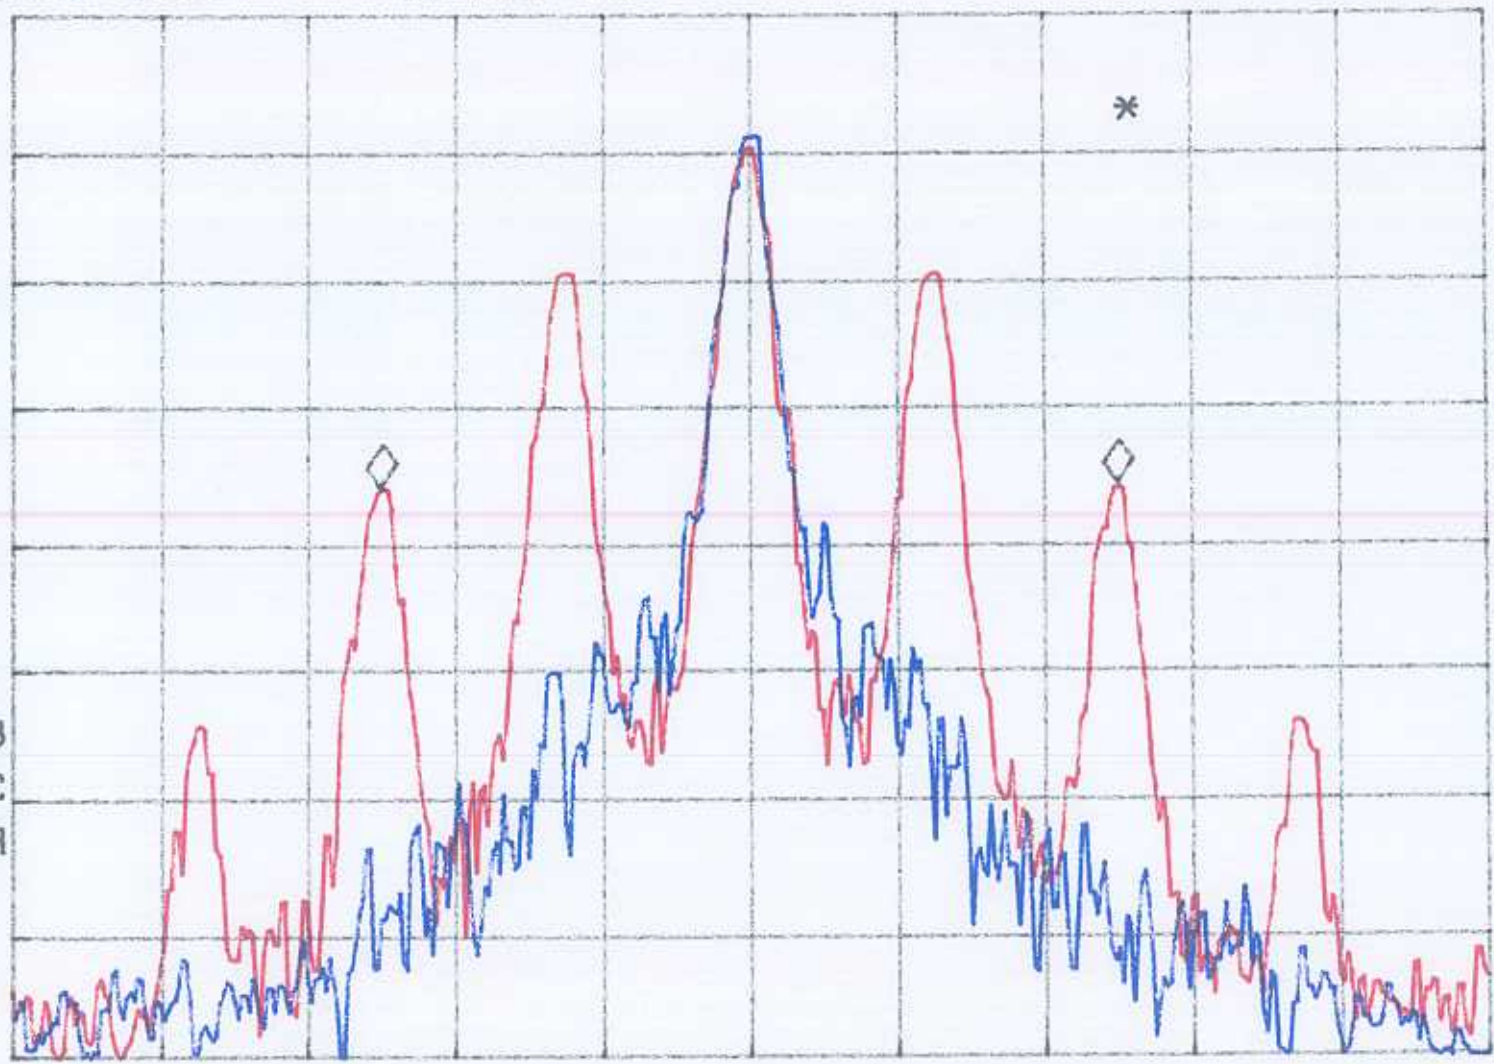

CENTER 467.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 20.00 KHz

SWP 1.00 sec

Emission mask
“spurious” file

hp

REF 15.0 dBm

AT 30 dB

PEAK

LOG


10

dB/

VA VB

SC FC

CORR

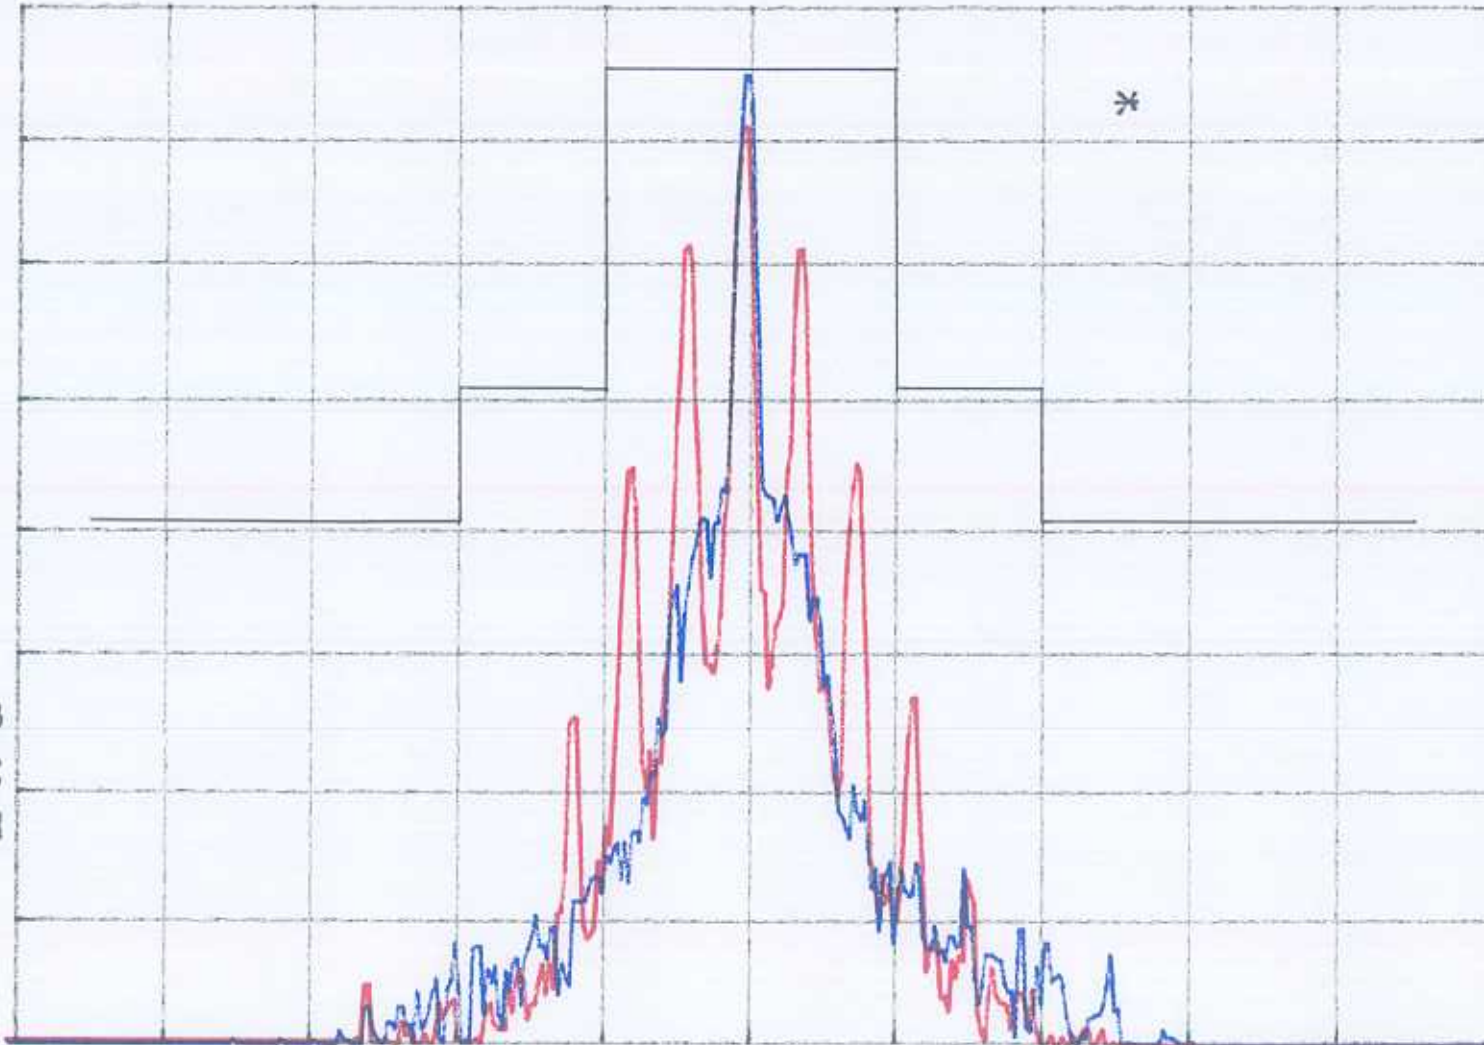

CENTER 462.63750 MHz

#RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 kHz

SWP 2.17 sec


hp

REF 15.0 dBm

AT 30 dB

PEAK
LOG
10
dB/

VA VB
SC FC
CORR

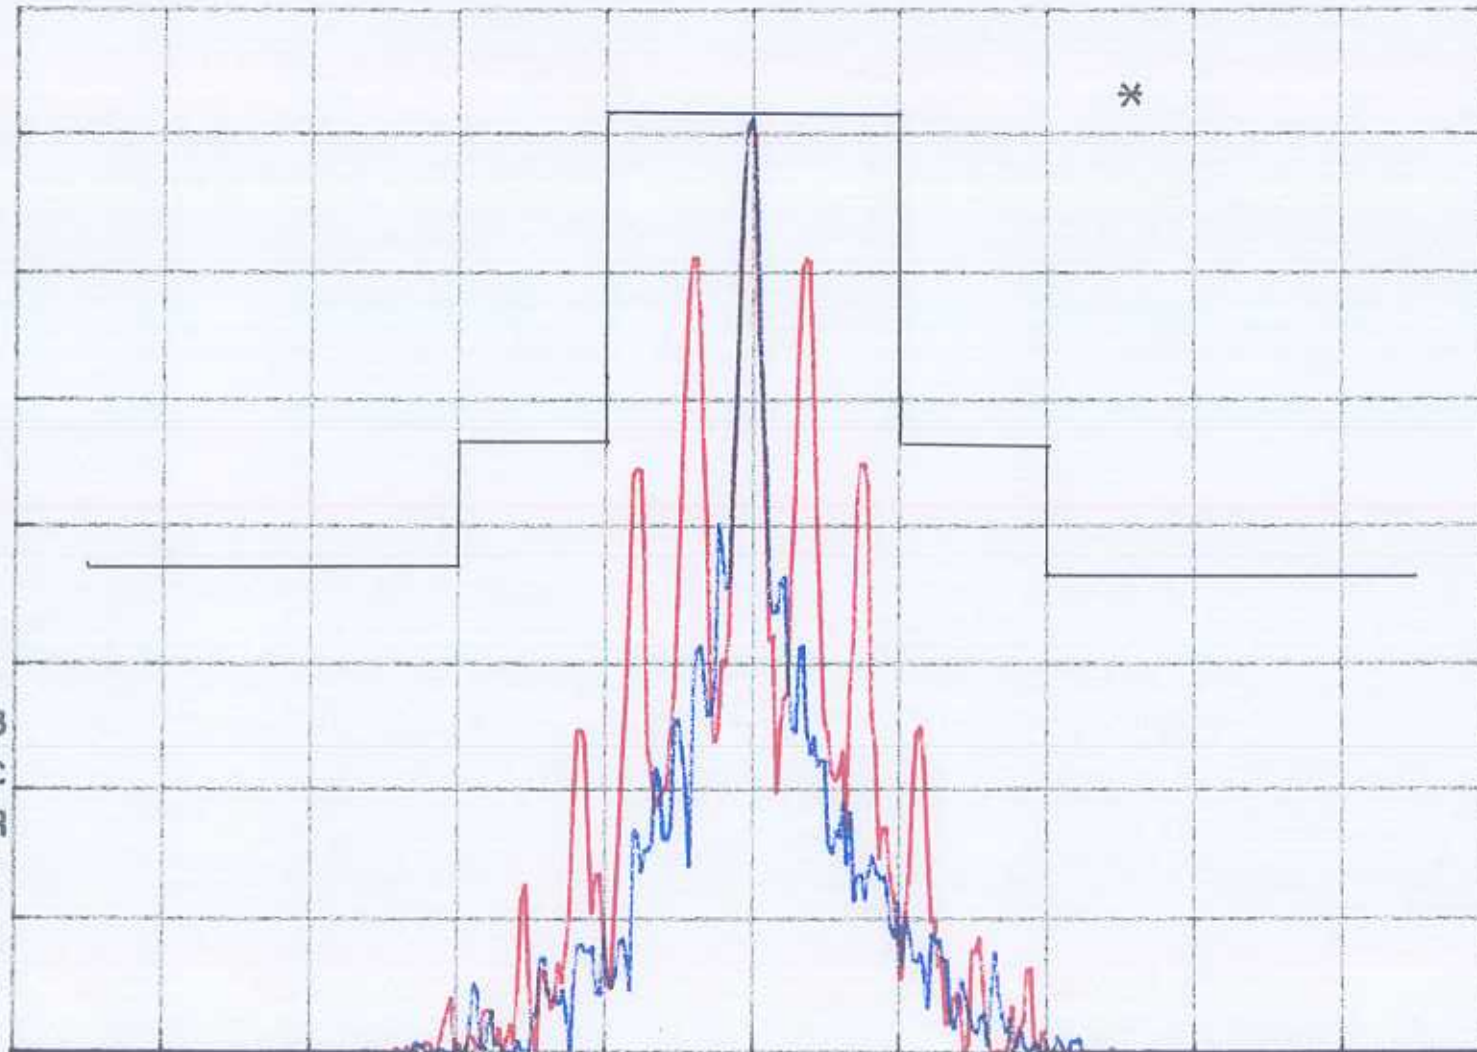

CENTER 467.63750 MHz

*RES BW 300 Hz

VBW 300 Hz

SPAN 65.00 KHz

SWP 2.17 sec