


EUT : F507230-4  
 Power : AC 110V  
 Test Mode : 802.11g CH L0  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 60 %

Data: 20  
 Level (dBuV)

Date: 2005-02-21

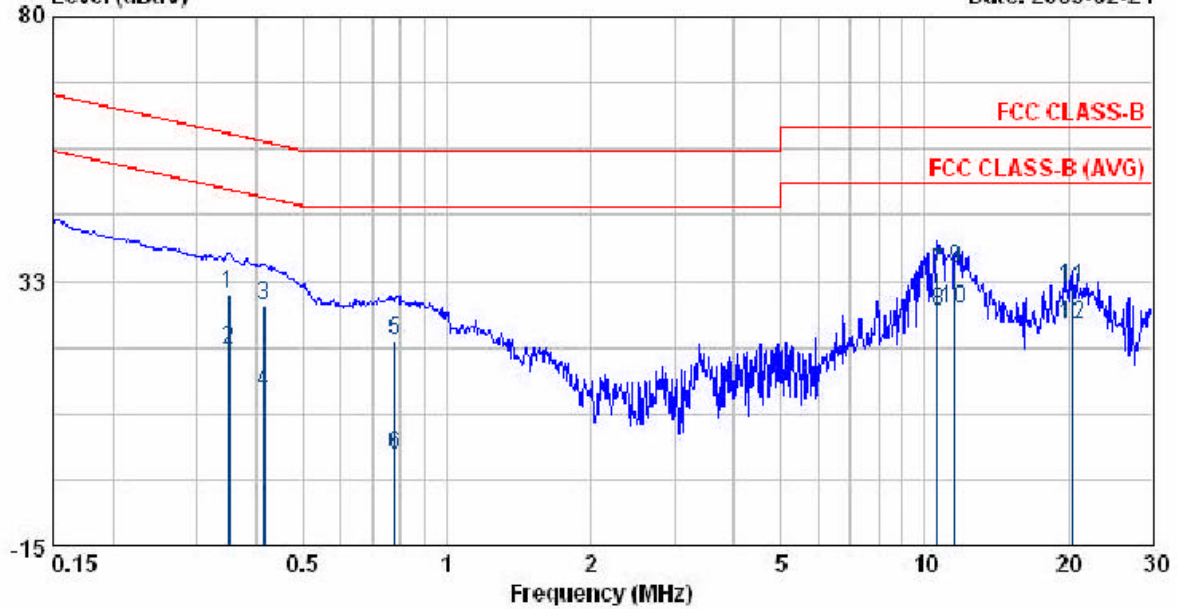


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.350  | 29.80      | 0.44   | 30.24 | 58.96 | -28.72     | QP      |
| 0.350  | 19.71      | 0.44   | 20.15 | 48.96 | -28.81     | AVERAGE |
| 0.415  | 27.65      | 0.50   | 28.15 | 57.55 | -29.41     | QP      |
| 0.415  | 11.93      | 0.50   | 12.43 | 47.55 | -35.13     | AVERAGE |
| 0.780  | 21.59      | 0.43   | 22.02 | 56.00 | -33.98     | QP      |
| 0.780  | 1.00       | 0.43   | 1.43  | 46.00 | -44.57     | AVERAGE |
| 10.656 | 33.58      | 0.55   | 34.13 | 60.00 | -25.87     | QP      |
| 10.656 | 26.59      | 0.55   | 27.14 | 50.00 | -22.86     | AVERAGE |
| 11.593 | 34.11      | 0.61   | 34.72 | 60.00 | -25.28     | QP      |
| 11.593 | 26.85      | 0.61   | 27.46 | 50.00 | -22.54     | AVERAGE |
| 20.380 | 30.55      | 0.71   | 31.26 | 60.00 | -28.74     | QP      |
| 20.380 | 23.81      | 0.71   | 24.52 | 50.00 | -25.48     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : F507230-4  
 Power : AC 110V  
 Test Mode : 802.11g CH L0  
 Memo :

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 60 %

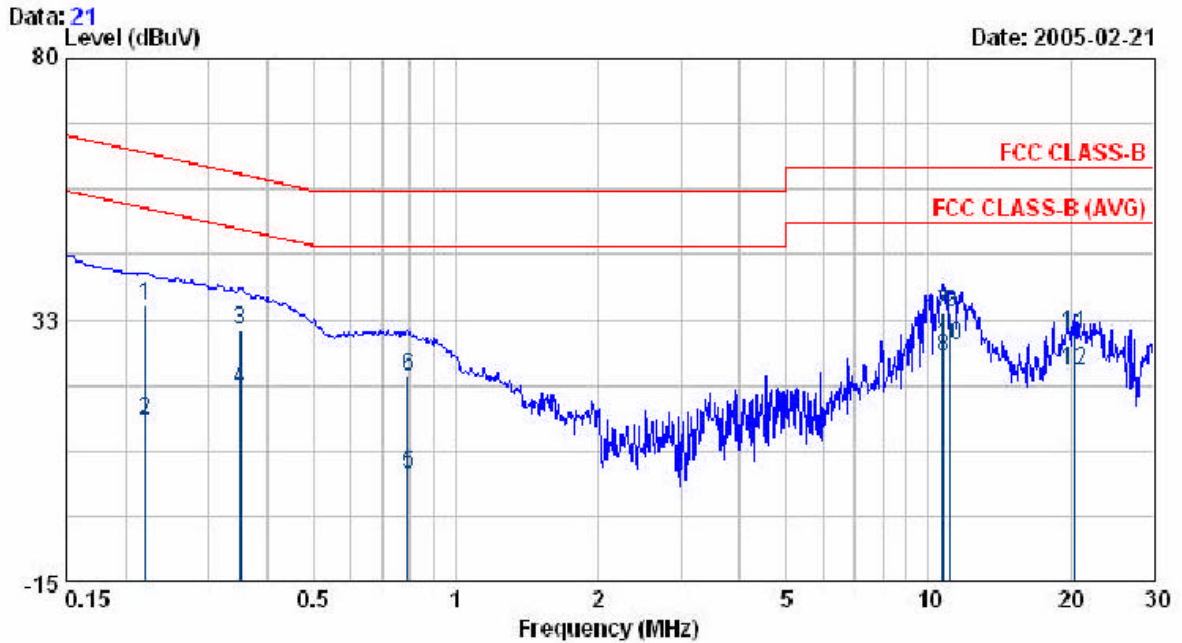


| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.221  | 34.74      | 0.24   | 34.98 | 62.79 | -27.81     | QP      |
| 0.221  | 13.96      | 0.24   | 14.20 | 52.79 | -38.59     | AVERAGE |
| 0.350  | 30.29      | 0.44   | 30.73 | 58.96 | -28.23     | QP      |
| 0.350  | 19.50      | 0.44   | 19.94 | 48.96 | -29.02     | AVERAGE |
| 0.792  | 4.12       | 0.43   | 4.55  | 46.00 | -41.45     | AVERAGE |
| 0.792  | 21.73      | 0.43   | 22.16 | 56.00 | -33.84     | QP      |
| 10.733 | 33.40      | 0.47   | 33.87 | 60.00 | -26.13     | QP      |
| 10.733 | 25.32      | 0.47   | 25.79 | 50.00 | -24.21     | AVERAGE |
| 11.164 | 33.27      | 0.51   | 33.78 | 60.00 | -26.22     | QP      |
| 11.164 | 27.45      | 0.51   | 27.96 | 50.00 | -22.04     | AVERAGE |
| 20.382 | 29.22      | 0.73   | 29.95 | 60.00 | -30.05     | QP      |
| 20.382 | 22.68      | 0.73   | 23.41 | 50.00 | -26.59     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : F5D7230-4  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 60 %

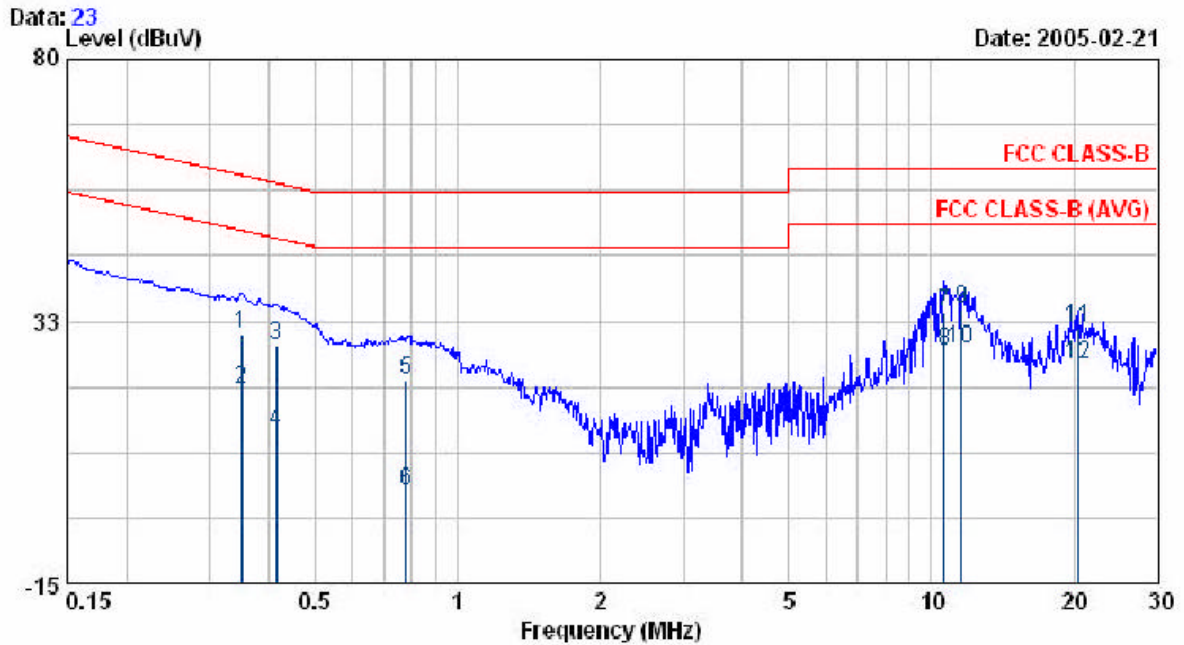

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.350  | 29.70      | 0.44   | 30.14 | 58.96 | -28.82     | QP      |
| 0.350  | 19.80      | 0.44   | 20.24 | 48.96 | -28.72     | AVERAGE |
| 0.415  | 27.71      | 0.50   | 28.21 | 57.55 | -29.35     | QP      |
| 0.415  | 12.01      | 0.50   | 12.51 | 47.55 | -35.05     | AVERAGE |
| 0.780  | 21.61      | 0.43   | 22.04 | 56.00 | -33.96     | QP      |
| 0.780  | 1.12       | 0.43   | 1.55  | 46.00 | -44.45     | AVERAGE |
| 10.656 | 33.63      | 0.55   | 34.18 | 60.00 | -25.82     | QP      |
| 10.656 | 26.61      | 0.55   | 27.16 | 50.00 | -22.84     | AVERAGE |
| 11.593 | 34.21      | 0.61   | 34.82 | 60.00 | -25.18     | QP      |
| 11.593 | 26.91      | 0.61   | 27.52 | 50.00 | -22.48     | AVERAGE |
| 20.380 | 30.63      | 0.71   | 31.34 | 60.00 | -28.66     | QP      |
| 20.380 | 23.91      | 0.71   | 24.62 | 50.00 | -25.38     | AVERAGE |


Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN (ISN) Factor + Cable Loss

EUT : F507230-4  
 Power : AC 110V  
 Test Mode : 802.11g CH MID  
 Memo :

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 60 %

Data: 22

Date: 2005-02-21

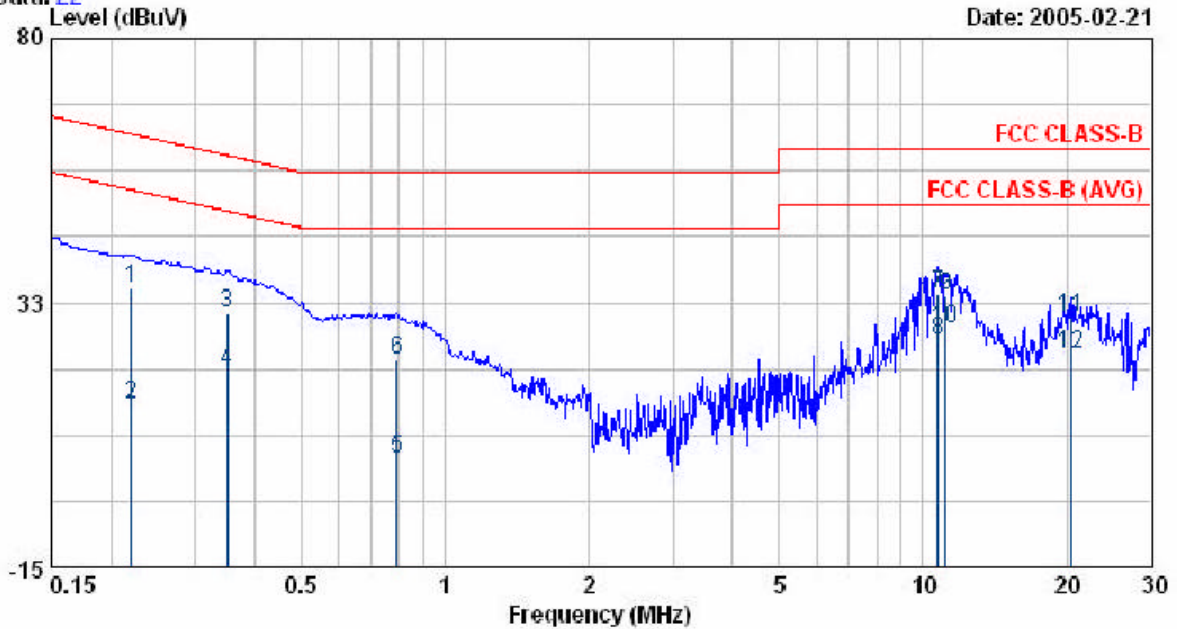

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.221  | 34.81      | 0.24   | 35.05 | 62.79 | -27.74     | QP      |
| 0.221  | 13.94      | 0.24   | 14.18 | 52.79 | -38.61     | AVERAGE |
| 0.350  | 30.30      | 0.44   | 30.74 | 58.96 | -28.22     | QP      |
| 0.350  | 19.60      | 0.44   | 20.04 | 48.96 | -28.92     | AVERAGE |
| 0.792  | 4.15       | 0.43   | 4.58  | 46.00 | -41.42     | AVERAGE |
| 0.792  | 21.81      | 0.43   | 22.24 | 56.00 | -33.76     | QP      |
| 10.733 | 33.63      | 0.47   | 34.10 | 60.00 | -25.90     | QP      |
| 10.733 | 25.41      | 0.47   | 25.88 | 50.00 | -24.12     | AVERAGE |
| 11.164 | 33.21      | 0.51   | 33.72 | 60.00 | -26.28     | QP      |
| 11.164 | 27.46      | 0.51   | 27.97 | 50.00 | -22.03     | AVERAGE |
| 20.382 | 29.23      | 0.73   | 29.96 | 60.00 | -30.04     | QP      |
| 20.382 | 22.69      | 0.73   | 23.42 | 50.00 | -26.58     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss


EUT : F5D7230-4  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo :

Pol/Phase : NEUTRAL  
 Temperature : 25 °C  
 Humidity : 60 %

Data: 24

Level (dBuV)

Date: 2005-02-21

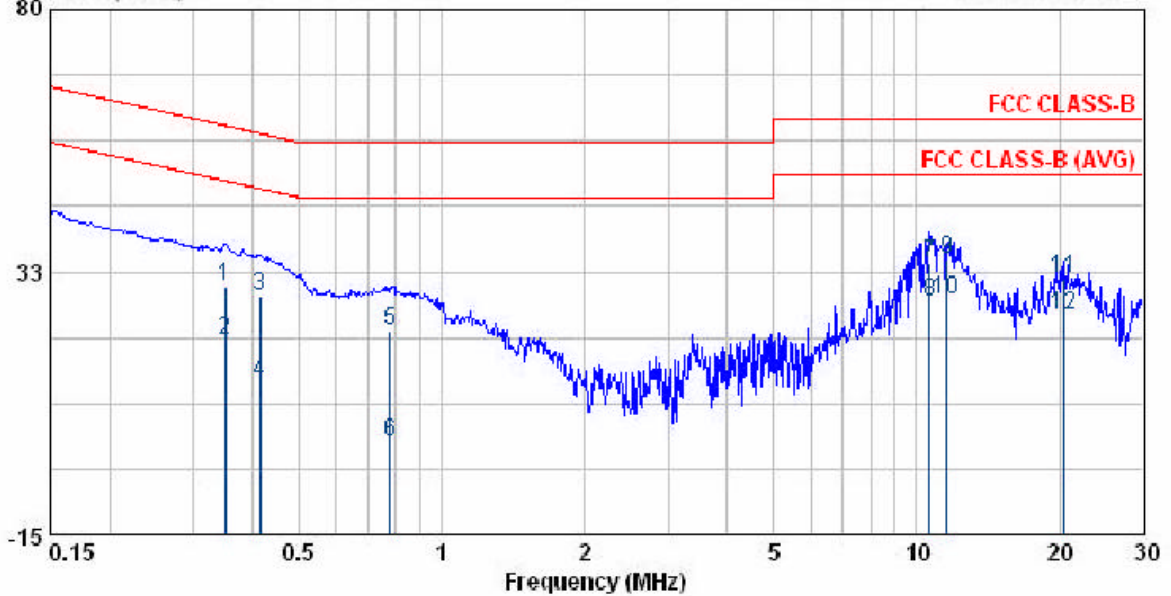

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.350  | 29.61      | 0.44   | 30.05 | 58.96 | -28.91     | QP      |
| 0.350  | 19.81      | 0.44   | 20.25 | 48.96 | -28.71     | AVERAGE |
| 0.415  | 27.75      | 0.50   | 28.25 | 57.55 | -29.31     | QP      |
| 0.415  | 12.11      | 0.50   | 12.61 | 47.55 | -34.95     | AVERAGE |
| 0.780  | 21.63      | 0.43   | 22.06 | 56.00 | -33.94     | QP      |
| 0.780  | 1.21       | 0.43   | 1.64  | 46.00 | -44.36     | AVERAGE |
| 10.656 | 33.65      | 0.55   | 34.20 | 60.00 | -25.80     | QP      |
| 10.656 | 26.65      | 0.55   | 27.20 | 50.00 | -22.80     | AVERAGE |
| 11.593 | 34.23      | 0.61   | 34.84 | 60.00 | -25.16     | QP      |
| 11.593 | 26.96      | 0.61   | 27.57 | 50.00 | -22.43     | AVERAGE |
| 20.380 | 30.68      | 0.71   | 31.39 | 60.00 | -28.61     | QP      |
| 20.380 | 23.96      | 0.71   | 24.67 | 50.00 | -25.33     | AVERAGE |


Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

EUT : F5D7230-4  
 Power : AC 110V  
 Test Mode : 802.11g CH HI  
 Memo :

Pol/Phase : LINE  
 Temperature : 25 °C  
 Humidity : 60 %

Data: 25

Date: 2005-02-21

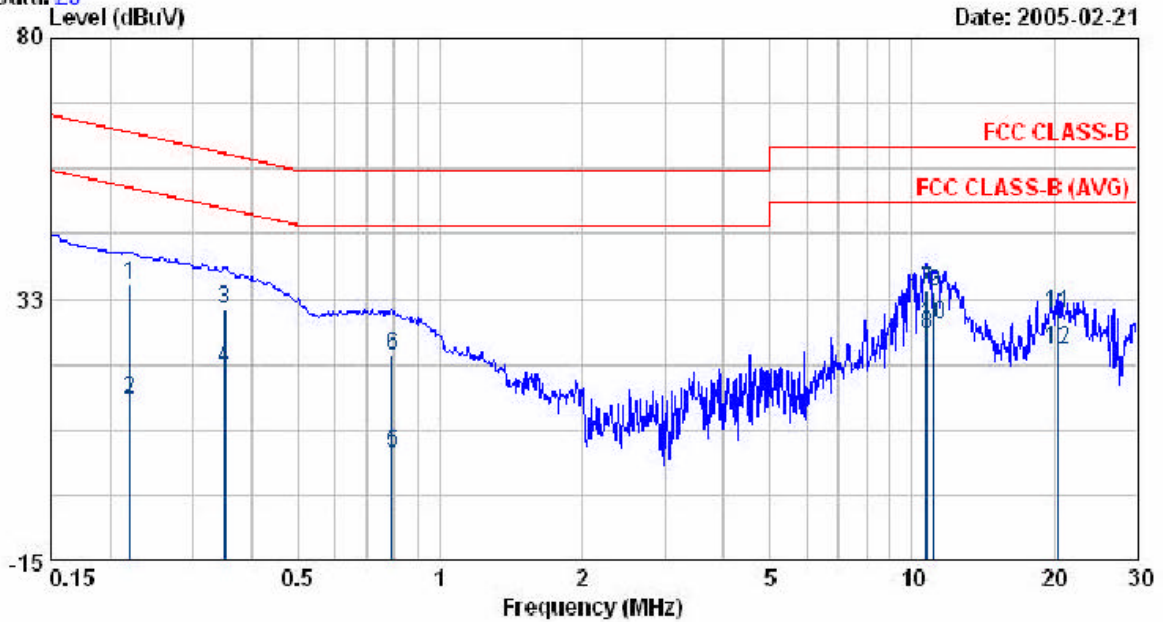

| Freq   | Read Level | Factor | Level | Limit | Over Limit | Remark  |
|--------|------------|--------|-------|-------|------------|---------|
| MHz    | dBuV       | dB     | dBuV  | dBuV  | dBuV       |         |
| 0.221  | 34.91      | 0.24   | 35.15 | 62.79 | -27.64     | QP      |
| 0.221  | 13.96      | 0.24   | 14.20 | 52.79 | -38.59     | AVERAGE |
| 0.350  | 30.12      | 0.44   | 30.56 | 58.96 | -28.40     | QP      |
| 0.350  | 19.51      | 0.44   | 19.95 | 48.96 | -29.01     | AVERAGE |
| 0.792  | 4.12       | 0.43   | 4.55  | 46.00 | -41.45     | AVERAGE |
| 0.792  | 21.88      | 0.43   | 22.26 | 56.00 | -33.74     | QP      |
| 10.733 | 33.65      | 0.47   | 34.12 | 60.00 | -25.88     | QP      |
| 10.733 | 25.46      | 0.47   | 25.93 | 50.00 | -24.07     | AVERAGE |
| 11.164 | 33.19      | 0.51   | 33.70 | 60.00 | -26.30     | QP      |
| 11.164 | 27.41      | 0.51   | 27.92 | 50.00 | -22.08     | AVERAGE |
| 20.382 | 29.31      | 0.73   | 30.04 | 60.00 | -29.96     | QP      |
| 20.382 | 22.63      | 0.73   | 23.36 | 50.00 | -26.64     | AVERAGE |

Remarks: 1. Level = Read Level + Factor  
 2. Factor = LISN(ISN) Factor + Cable Loss

Test by: *[Signature]* Feb. 21. 2005

4.2.1. Photographs of Conducted Emission Test

FRONT VIEW



REAR VIEW

